




(86) Date de dépôt PCT/PCT Filing Date: 1995/01/12  
(87) Date publication PCT/PCT Publication Date: 1995/07/20  
(45) Date de délivrance/Issue Date: 2006/01/03  
(85) Entrée phase nationale/National Entry: 1996/07/12  
(86) N° demande PCT/PCT Application No.: US 1995/000333  
(87) N° publication PCT/PCT Publication No.: 1995/019265  
(30) Priorité/Priority: 1994/01/13 (08/180,719) US


(51) Cl.Int.<sup>7</sup>/Int.Cl.<sup>7</sup> B41J 32/02  
(72) Inventeur/Inventor:  
PUTMAN, ALLEN W., US  
(73) Propriétaire/Owner:  
NU-KOTE IMAGING INTERNATIONAL, INC., US  
(74) Agent: SIM & MCBURNEY

(54) Titre : CARTOUCHE A RUBAN ENCREUR RE-ENCRABLE  
(54) Title: RE-INKABLE RIBBON CARTRIDGE

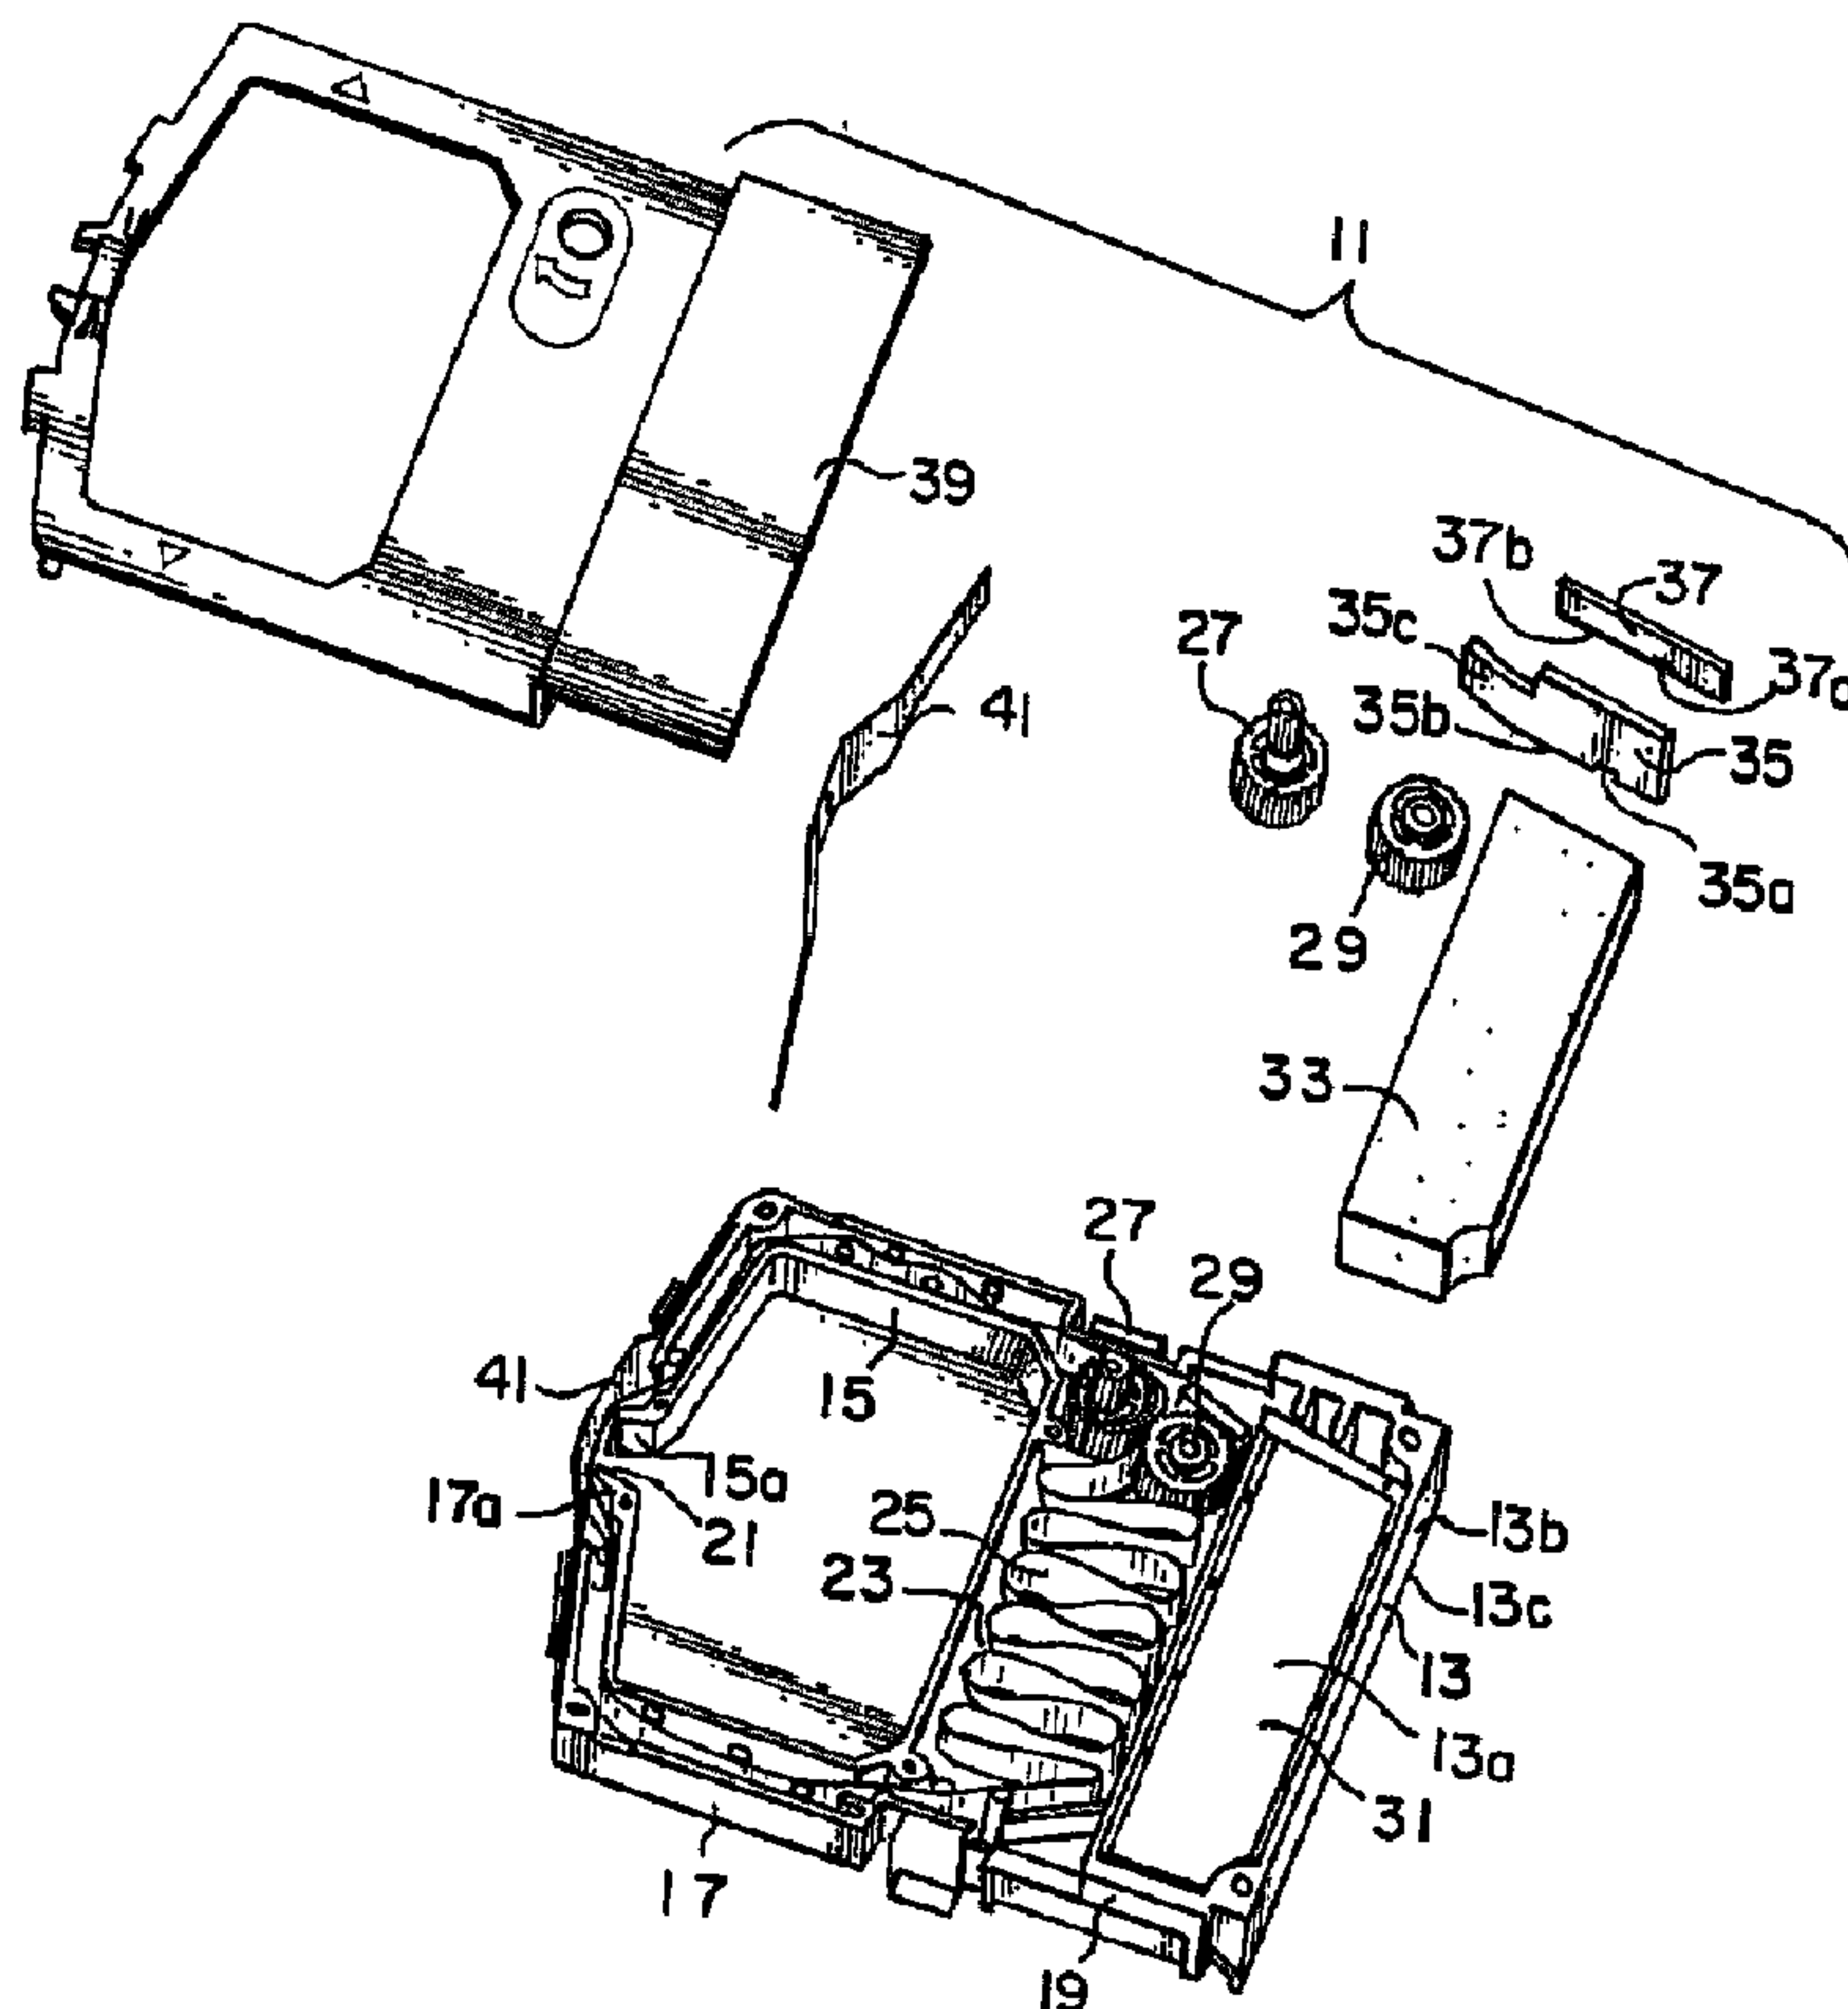

(57) Abrégé/Abstract:

A re-inkable ribbon cartridge (11) for use in a printing device for printing on a sheet of paper and obtaining a consistent darkness of print. The ribbon cartridge (11) has a base member (19) with an exit arm (15) and an entrance arm (17) extending from the base member (19) with a print space between ends of the arms. A ribbon storage chamber (23) is formed in the base member (19), an ink ribbon (25) extends from the ribbon storage chamber (23), through the exit arm (15), the print space (21), and the entrance arm (17) to return to the ribbon storage chamber (23). A drive wheel (27) is mounted in the cartridge for moving the ribbon (25) out of

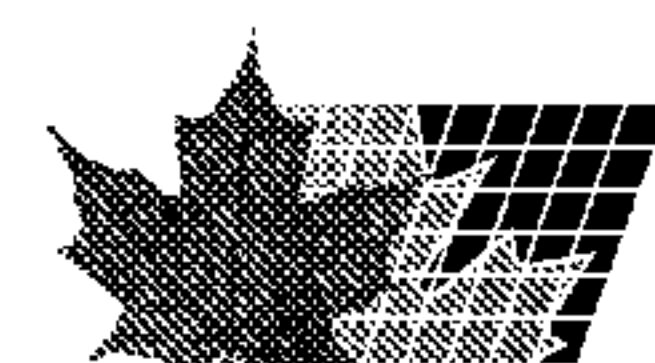



(57) **Abrégé(suite)/Abstract(continued):**

the storage chamber (23) with a press wheel (29) that presses the ribbon (25) against the drive wheel (27) and meters ink onto the ribbon (25). An ink reservoir chamber (31) is formed in the cartridge, and a foam pad (33) containing ink is positioned in the ink reservoir chamber (31). A wick (35) extends from the foam pad (33) and contacts the press wheel (29) to transfer ink by capillary action from the foam pad (33) to the press wheel (29) which meters the ink onto the ribbon (25). A spring (37) presses the wick (35) against the press wheel (29).





## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification<sup>6</sup>:

B41J 27/12

A1

(11) International Publication Number:

WO 95/19265

(43) International Publication Date:

20 July 1995 (20.07.95)

(21) International Application Number: PCT/US95/00333

(22) International Filing Date: 12 January 1995 (12.01.95)

(30) Priority Data:

08/180,719

13 January 1994 (13.01.94)

US

(60) Parent Application or Grant

(63) Related by Continuation

US

Filed on

08/180,719 (CON)

13 January 1994 (13.01.94)

(71) Applicant (for all designated States except US): PELIKAN, INC. [US/US]; 200 Beasley Drive, P.O. Box 3000, Franklin, TN 37068 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): PUTMAN, Allen, W. [US/US]; 423 Roberts Street, Franklin, TN 37064 (US).

(74) Agents: EARLEY, John, F., A. et al.; 86 The Commons At Valley Forge East, 1288 Valley Forge Road, P.O. Box 750, Valley Forge, PA 19482-0750 (US).

(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ).


Published

With international search report.

(54) Title: RE-INKABLE RIBBON CARTRIDGE

(57) Abstract

A re-inkable ribbon cartridge (11) for use in a printing device for printing on a sheet of paper and obtaining a consistent darkness of print. The ribbon cartridge (11) has a base member (19) with an exit arm (15) and an entrance arm (17) extending from the base member (19) with a print space between ends of the arms. A ribbon storage chamber (23) is formed in the base member (19), an ink ribbon (25) extends from the ribbon storage chamber (23), through the exit arm (15), the print space (21), and the entrance arm (17) to return to the ribbon storage chamber (23). A drive wheel (27) is mounted in the cartridge for moving the ribbon (25) out of the storage chamber (23) with a press wheel (29) that presses the ribbon (25) against the drive wheel (27) and meters ink onto the ribbon (25). An ink reservoir chamber (31) is formed in the cartridge, and a foam pad (33) containing ink is positioned in the ink reservoir chamber (31). A wick (35) extends from the foam pad (33) and contacts the press wheel (29) to transfer ink by capillary action from the foam pad (33) to the press wheel (29) which meters the ink onto the ribbon (25). A spring (37) presses the wick (35) against the press wheel (29).

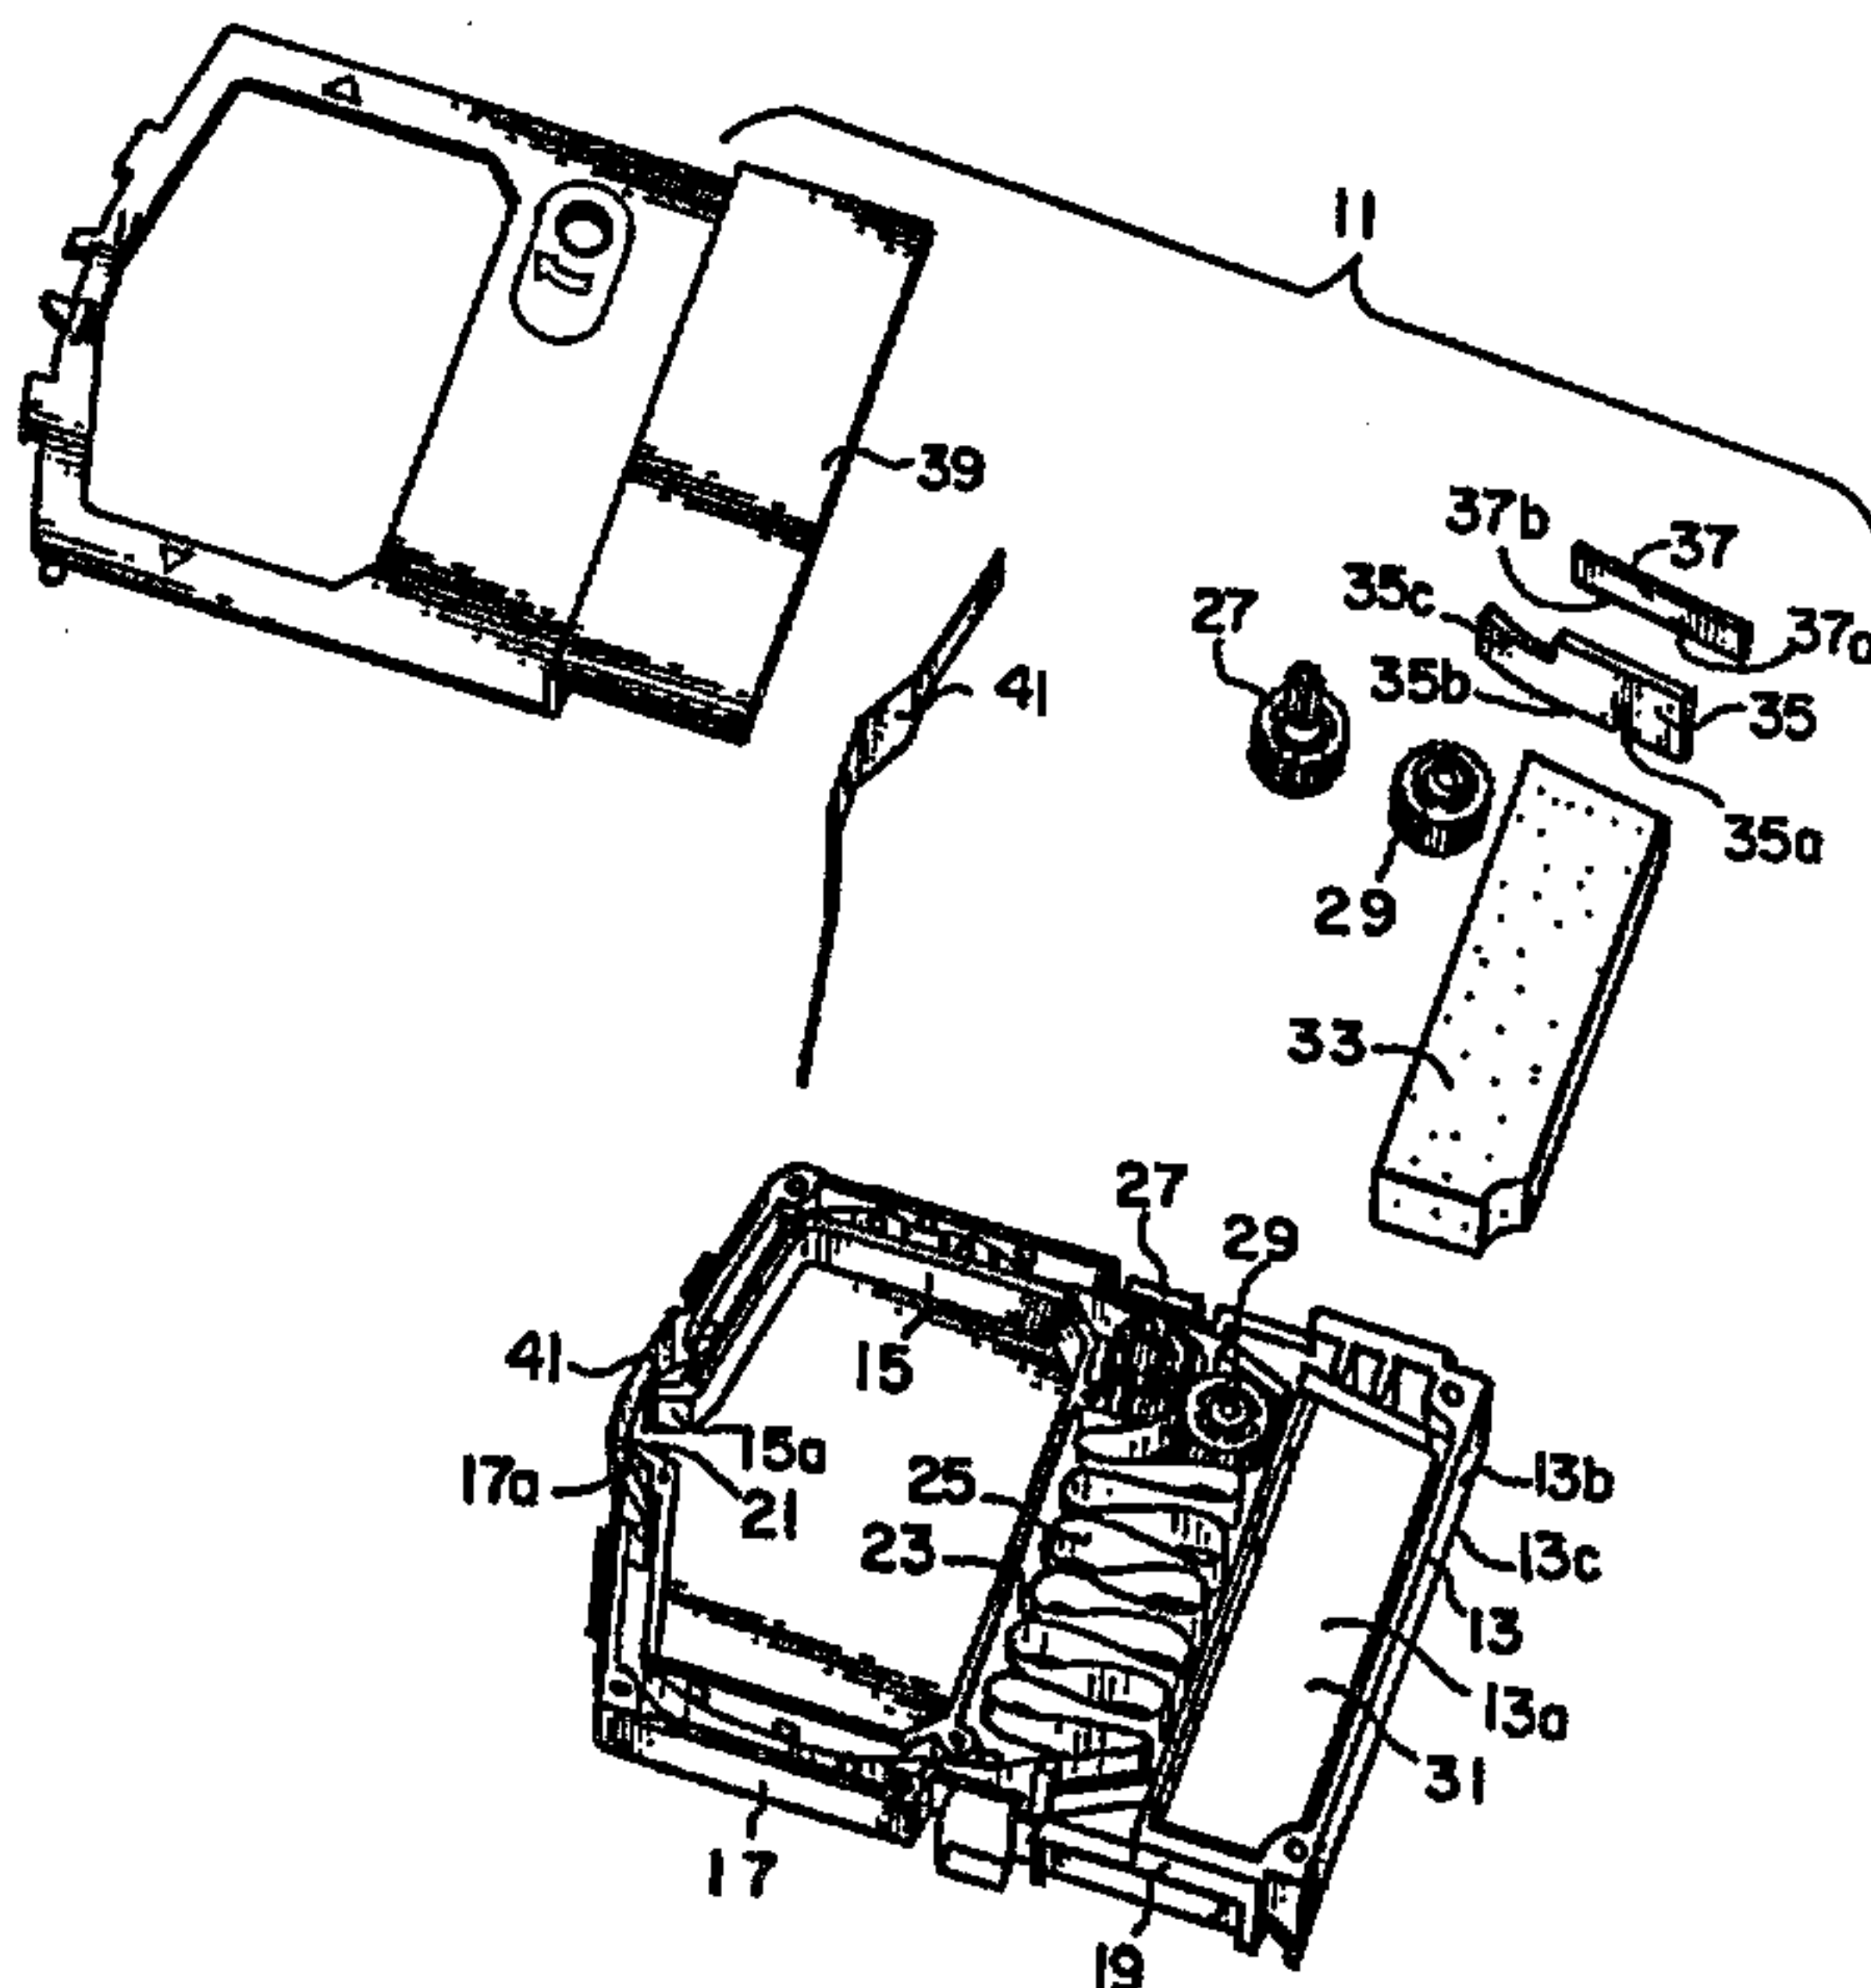



## RE-INKABLE RIBBON CARTRIDGE

### BACKGROUND OF THE INVENTION

#### Field of the Invention

5 The present invention relates to a ribbon cartridge for printing devices including typewriters and printers, and is more particularly concerned with ribbon cartridges which have endless ribbons that are re-inkable.

#### Description of the Prior Art

10 A problem with a number of conventional ink ribbon cartridges or cassettes in use today with typewriters and printers is that the darkness of the print fades during the life of the ribbon.

15 In several of the conventional cartridges, the ribbon ink that is being depleted during printing is replenished through a reservoir of ink held in either a foam pad or in a circular foam roll. The



ink is transferred onto the fabric ribbon by applying the ink from the foam pad or foam roll to a transfer roller that meters the ink from the transfer roller to the fabric ribbon. This keeps the ink from puddling in one spot on the ribbon when it sits idle between print sessions. However, this structure does not provide a solution to the problem of maintaining a uniform darkness of the print during the life of the ink ribbon cartridge.

10

## SUMMARY OF THE INVENTION

The present invention solves the problem of maintaining a uniform darkness of print during the life of the cartridge by providing an ink reservoir pad which holds a supply of ink, a wick which extends from the ink reservoir pad to provide for capillary flow of the ink to a press wheel which meters the ink onto the ribbon, and a spring which presses the wick against the press wheel.

In accordance with another aspect of the present invention, there is provided a re-inkable ribbon cartridge for use in a printing device for printing on a sheet of paper, comprising

- a cartridge having a case with a base member,
- an exit arm and an entrance arm extending from the base member with a print space between ends of the arms,
- said case having a bottom wall with an upstanding sidewall extending upwardly from the periphery of the bottom wall,
- a ribbon storage chamber formed in the base member, an



2a

ink ribbon extending from the ribbon storage chamber and through the exit arm, the print space, and the entrance arm to return to the ribbon storage chamber,

drive wheel means mounted in the base member for  
5 moving the ribbon out of the storage chamber,

press wheel ink transfer means for pressing the ribbon against the drive wheel means and for metering ink to the ribbon,

an ink reservoir chamber formed in the base member,  
10 a foam pad containing ink positioned in the ink reservoir chamber,

wick means extending from the foam pad and contacting the press wheel ink transfer means for metering ink by capillary action from the foam ink pad through the wick  
15 means and to the press wheel ink transfer means,

said wick means being a flat sheet generally rectangular in shape with a reduced portion at its forward end portion,

said wick sheet having a lower edge and a positioning  
20 notch in said lower edge for positioning the wick sheet in the case,

spring means for pressing the wick means against the press wheel ink transfer means to obtain a consistent darkness of print;

25 and a cover for covering the case.

In accordance with another aspect of the present invention, there is provided a re-inkable ribbon cartridge for use in a printing device for printing on a sheet of



2b

paper, comprising

a cartridge having a case with a base member,

an exit arm and an entrance arm extending from the base member with a print space between ends of the arms,

5 said case having a bottom wall with an upstanding sidewall extending upwardly from the periphery of the bottom wall,

a ribbon storage chamber formed in the base member,

an ink ribbon extending from the ribbon storage  
10 chamber and through the exit arm, the print space, and the entrance arm to return to the ribbon storage chamber,

drive wheel means mounted in the base member for moving the ribbon out of the storage chamber,

press wheel ink transfer means for pressing the ribbon  
15 against the drive wheel means and for metering ink to the ribbon,

an ink reservoir chamber formed in the base member,

a foam pad containing ink positioned in the ink reservoir chamber,

20 wick means extending from the foam pad and contacting the press wheel ink transfer means for metering ink by capillary action from the foam ink pad through the wick means and to the press wheel ink transfer means,

said wick means being a flat sheet generally  
25 rectangular in shape with a reduced portion at its forward end portion,

said wick sheet having a lower edge and a positioning notch in said lower edge for positioning the wick sheet in



2c

the case,

spring means for pressing the wick means against the press wheel ink transfer means to obtain a consistent darkness of print;

5 and a cover for covering the case,

said spring means comprising a leaf spring having a positioning notch in its lower edge,

said case having a positioning ridge formed on its upper surface for receiving said positioning notch of the  
10 spring,

said foam pad in the reservoir chamber comprising a reticulated polyester polyurethane open pore foam with tensile strength of 50-110psi ultimate elongation of about 350%, tear strength of 5-18 lb/inch, and about 90 pores per  
15 linear inch,

said ink comprising a black matrix ink containing fatty acids, fatty esters, and a black dye, with a viscosity of about 325cps at 78°F, a boiling point over 300°F,

20 said ink being insoluble in water,

said wick means comprising a polyurethane foam with an airflow of 900-2500in/min at an inlet pressure of 1.2 inch.



**BRIEF DESCRIPTION OF THE DRAWINGS**

Fig. 1 is an exploded view of an ink ribbon cartridge constructed in accordance with this invention; and

Fig. 2 is a view in partial assembly in perspective of the re-inkable cartridge of the invention.

**DETAILED DESCRIPTION OF THE DRAWINGS**

Turning now to the drawings, there is shown a re-inkable ribbon cartridge or cassette 11 for use in a printing device such as a typewriter or printer for printing on a sheet of paper. Ribbon cartridge 11 comprises a case 13 having a base member 19. An exit arm 15 and an entrance arm 17 extend from the base member 19. Case 13 has a bottom wall 13a and an upstanding sidewall 13b extending upwardly from the periphery 13c of the bottom wall 13a. There is a print space 21 between end 15a of exit arm 15 and end 17a of entrance arm 17.

A ribbon storage chamber 23 is formed in base member 19 to hold an ink ribbon 25 which may be made of nylon and which passes from ribbon storage chamber 23 through the exit arm 15, through the print space 21, and returns to the ribbon storage chamber 23 through the entrance arm 17.

A drive wheel 27 is mounted in the base member 19 for moving the ribbon 25 out of the storage chamber 23, and a press wheel 29 helps to move the



ribbon 25 by pressing the ribbon 25 against the drive wheel 27 so that the ribbon is pinched between the drive wheel 27 and press wheel 29 to pull the ribbon 25 out of the storage chamber 23.

5 Press wheel 29 also provides for metering and transferring ink to the ribbon 27.

10 An ink reservoir chamber 31 is formed in the base member 19, and contains a foam pad 33 which is filled with ink. A wick 35 extends from the foam pad 33 and contacts the press wheel 29 to transfer ink by capillary action from the foam pad 33 through the wick 35 and into the teeth 29a of press wheel 29. Wick 35 has a positioning notch 35a in its lower edge 35b, and has a reduced portion 35c at  
15 its forward end portion.

A leaf spring 37 is provided for pressing the wick 35 against the press wheel 29 and this assists in obtaining constant or consistent darkness of print. Spring 37 has a positioning notch 37a in its lower edge 37b, and case 13 has a positioning ridge  
20 formed on the upper surface of bottom wall 13a for receiving the positioning notch 37a of the spring 37.

25 A cover 39 is provided for covering the case 13.

While leaf spring 37 is shown as a flat leaf spring made of stainless steel which applies force to the press wheel 29, a compression spring or a



leaf spring made of other stiff material may be used to press the wick 35 against the press wheel 29.

In operation, the wick 35 transfers ink from the foam pad 33 to the teeth 29a of press wheel 29 which transfers the ink to the ribbon 25 as it passes between press wheel 29 and drive wheel 27. The metering teeth 29a of the press and transfer wheel 29 pick up a metered amount of ink from the wick 35 which receives only a certain amount of ink because of the capillary action. This keeps the ink from puddling on one spot on the ribbon when the press and transfer wheel 29 sits idle between print sessions, as it would if the ribbon were in direct contact with a foam pad or roll.

As shown in the drawings, a polyester ribbon shield 41 is mounted on ends 15a, 17a of exit arm 15 and of entrance arm 17 across the print space 21. The ribbon 25 may be made of nylon, and the case 13, cover 39, and drive wheel 27 may be made of a synthetic resin plastic such as ABS.

The ink used in foam pad 33 is preferably a black matrix ink containing fatty acids, fatty esters, and a black dye. It has a viscosity of about 325 cps at 78°F, a boiling point over 300°F, is insoluble in water and may be obtained from N.H. Labo, Harrisburg, PA., as their catalog number 900A 0% black matrix ink.



The foam for foam pad 33 may be reticulated polyester polyurethane open pore foam, tensile strength about 50-110 psi, ultimate elongation about 250-350%, tear strength about 5-18 lb/inch, about 90 pores per linear inch, and may be obtained from Scotfoam, Edidptone, PA as their catalog number 4-900Z. The permeability of the foam at 0.5 in. of water pressure equals about 65-200 cfm/sq.ft. using test procedure ASTM D3574.

The wick material for wick 35 is preferably Porex XN-1304 polyurethane foam with air flow of 900-2500 in/min at an inlet pressure of 1.2 inch (water) and may be obtained from Porex Technologies Corp., P.O. Box 100394, Atlanta, GA 30384.



## CLAIMS

1. A re-inkable ribbon cartridge for use in a printing device for printing on a sheet of paper, comprising

5 a cartridge having a case with a base member, an exit arm and an entrance arm extending from the base member with a print space between ends of the arms,

10 said case having a bottom wall with an upstanding sidewall extending upwardly from the periphery of the bottom wall,

a ribbon storage chamber formed in the base member,

15 an ink ribbon extending from the ribbon storage chamber and through the exit arm, the print space, and the entrance arm to return to the ribbon storage chamber,

drive wheel means mounted in the base member for moving the ribbon out of the storage chamber,

20 press wheel ink transfer means for pressing the ribbon against the drive wheel means and for metering ink to the ribbon,

an ink reservoir chamber formed in the base member,

25 a foam pad containing ink positioned in the ink reservoir chamber,



wick means extending from the foam pad and contacting the press wheel ink transfer means for metering ink by capillary action from the foam ink pad through the wick means and to the press wheel ink transfer means,

5        said wick means being a flat sheet generally rectangular in shape with a reduced portion at its forward end portion,

      said wick sheet having a lower edge and a positioning notch in said lower edge for positioning the wick sheet in  
10    the case,

      spring means for pressing the wick means against the press wheel ink transfer means to obtain a consistent darkness of print;

      and a cover for covering the case.

15

2.    The re-inkable ribbon cartridge of claim 1,

      said spring means comprising a leaf spring having a positioning notch in its lower edge,

      said case having a positioning ridge formed on its  
20    upper surface for receiving said positioning notch of the spring.

3.    The re-inkable ribbon cartridge of claim 1,  
      wherein

25        said foam pad in the reservoir chamber comprises a reticulated polyester polyurethane open pore foam with tensile strength of 50-110psi, ultimate elongation of about 350%, tear strength of 5-18 lb/inch, and about 90 pores per



linear inch.

4. The re-inkable ribbon cartridge of claim 1,  
said ink comprising a black matrix ink containing  
5 fatty acids, fatty esters, and a black dye, with a  
viscosity of about 325cps at 78°F, and a boiling point over  
300°F,

said ink being insoluble in water.

10 5. The re-inkable ribbon cartridge of claim 1,  
said wick means comprising a polyurethane foam with an  
airflow of 900-2500in/min at an inlet pressure of 1.2 inch.

6. A re-inkable ribbon cartridge for use in a  
15 printing device for printing on a sheet of paper,  
comprising

a cartridge having a case with a base member,  
an exit arm and an entrance arm extending from the  
base member with a print space between ends of the arms,

20 said case having a bottom wall with an upstanding  
sidewall extending upwardly from the periphery of the  
bottom wall,

a ribbon storage chamber formed in the base member,  
an ink ribbon extending from the ribbon storage  
25 chamber and through the exit arm, the print space, and the  
entrance arm to return to the ribbon storage chamber,

drive wheel means mounted in the base member for  
moving the ribbon out of the storage chamber,



press wheel ink transfer means for pressing the ribbon against the drive wheel means and for metering ink to the ribbon,

an ink reservoir chamber formed in the base member,  
5 a foam pad containing ink positioned in the ink reservoir chamber,

wick means extending from the foam pad and contacting the press wheel ink transfer means for metering ink by capillary action from the foam ink pad through the wick  
10 means and to the press wheel ink transfer means,

said wick means being a flat sheet generally rectangular in shape with a reduced portion at its forward end portion,

said wick sheet having a lower edge and a positioning  
15 notch in said lower edge for positioning the wick sheet in the case,

spring means for pressing the wick means against the press wheel ink transfer means to obtain a consistent darkness of print;

20 and a cover for covering the case,

said spring means comprising a leaf spring having a positioning notch in its lower edge,

said case having a positioning ridge formed on its upper surface for receiving said positioning notch of the  
25 spring,

said foam pad in the reservoir chamber comprising a reticulated polyester polyurethane open pore foam with tensile strength of 50-110psi, ultimate elongation of about





350%, tear strength of 5-18 lb/inch, and about 90 pores per linear inch,

said ink comprising a black matrix ink containing fatty acids, fatty esters, and a black dye, with a  
5 viscosity of about 325cps at 78°F, a boiling point over 300°F,

said ink being insoluble in water,

said wick means comprising a polyurethane foam with an airflow of 900-2500in/min at an inlet pressure of 1.2 inch.



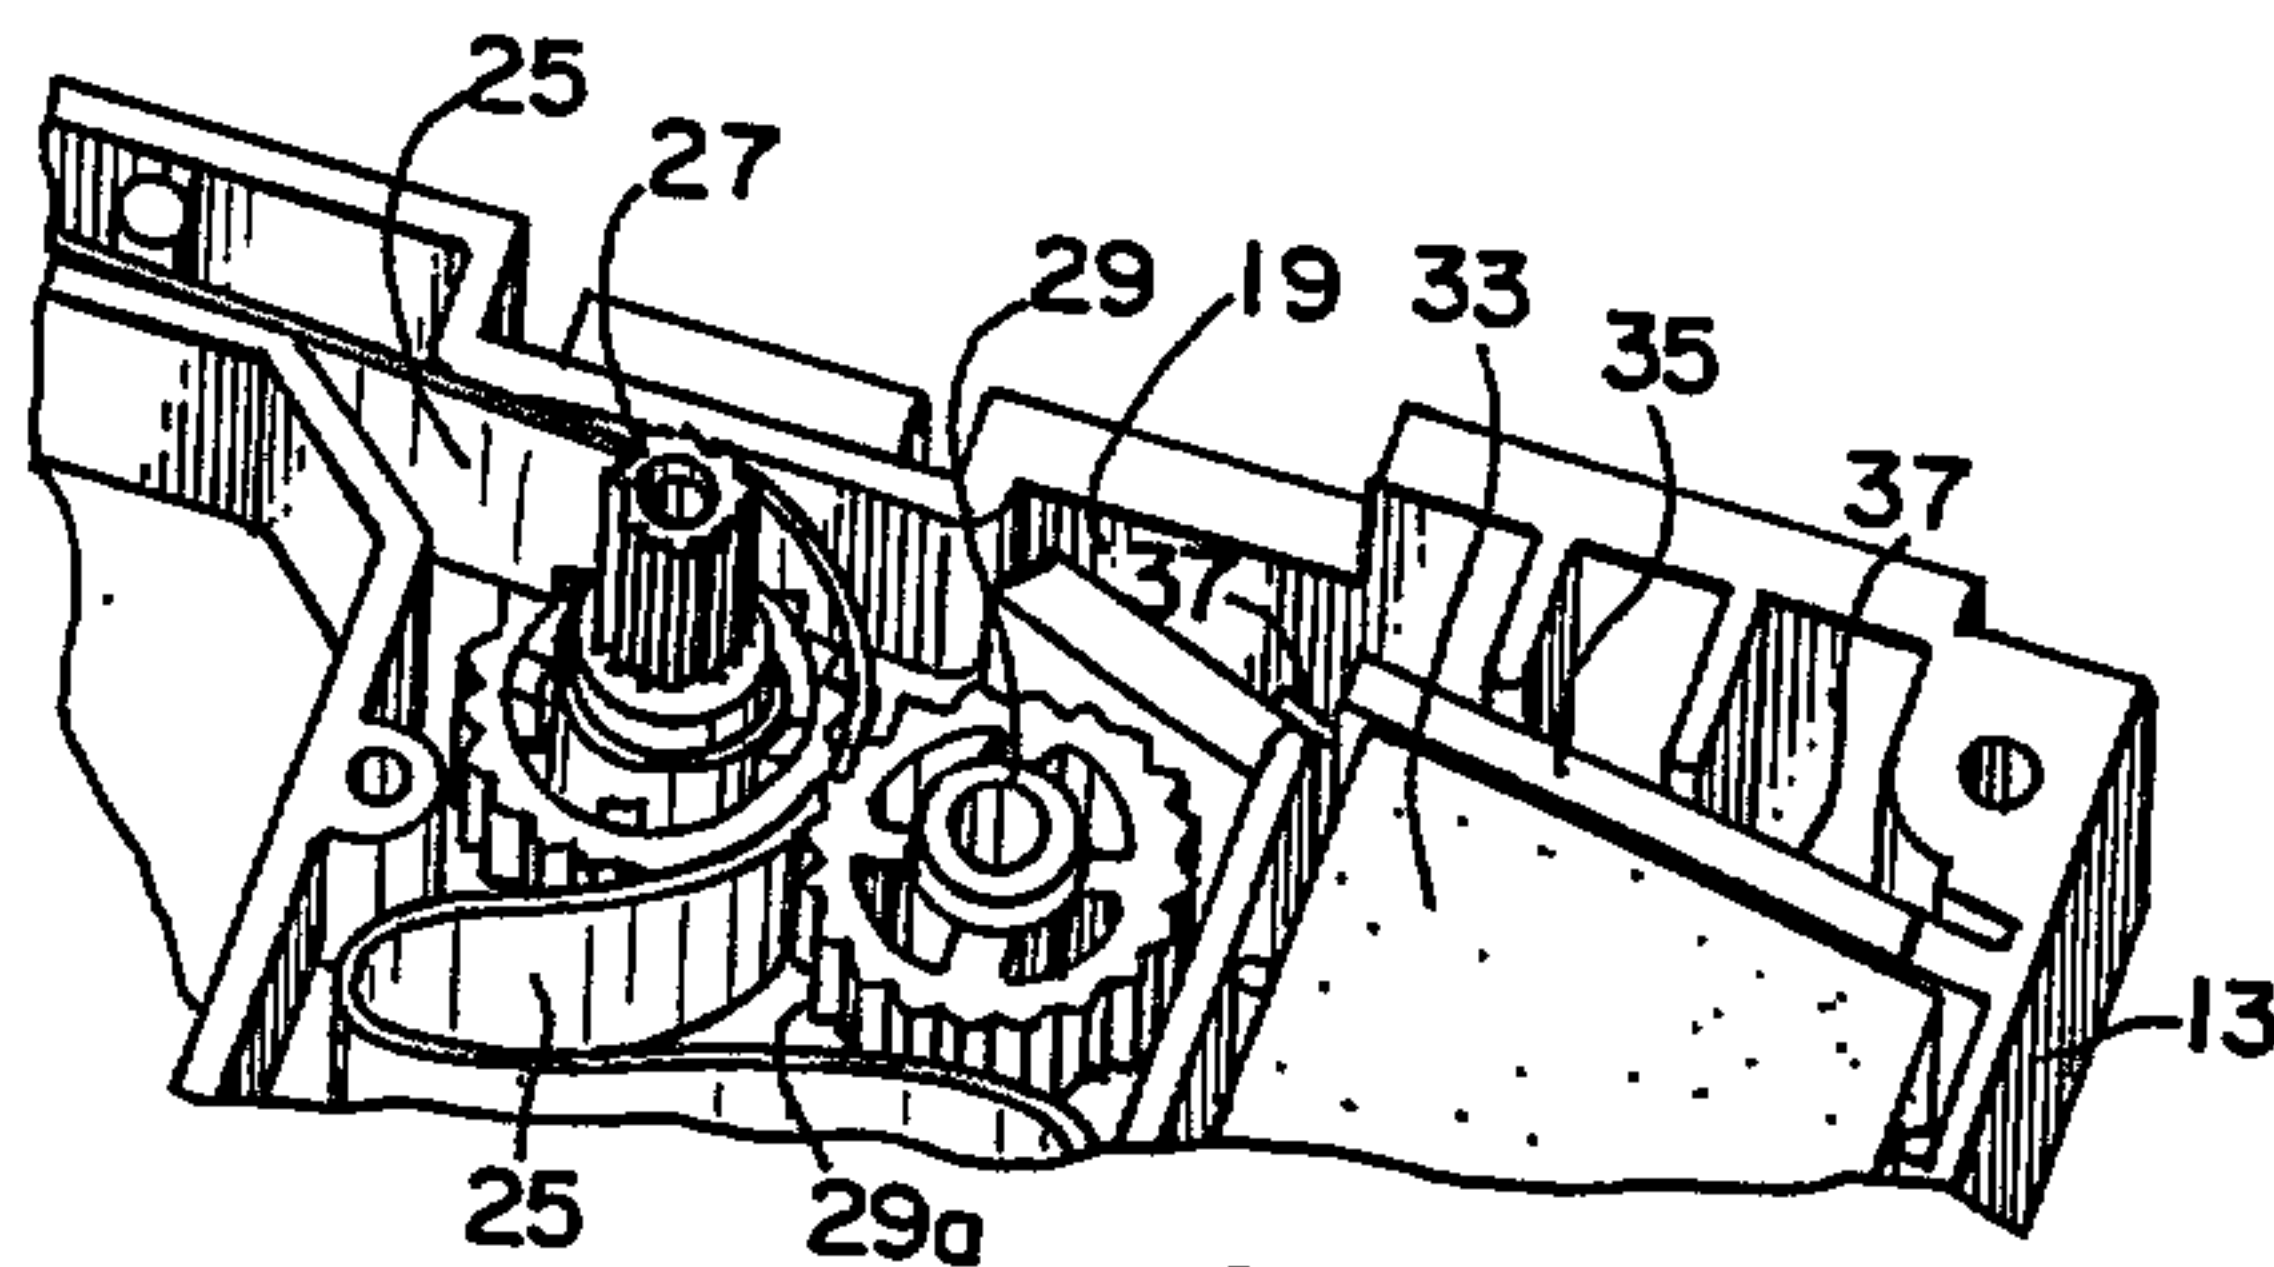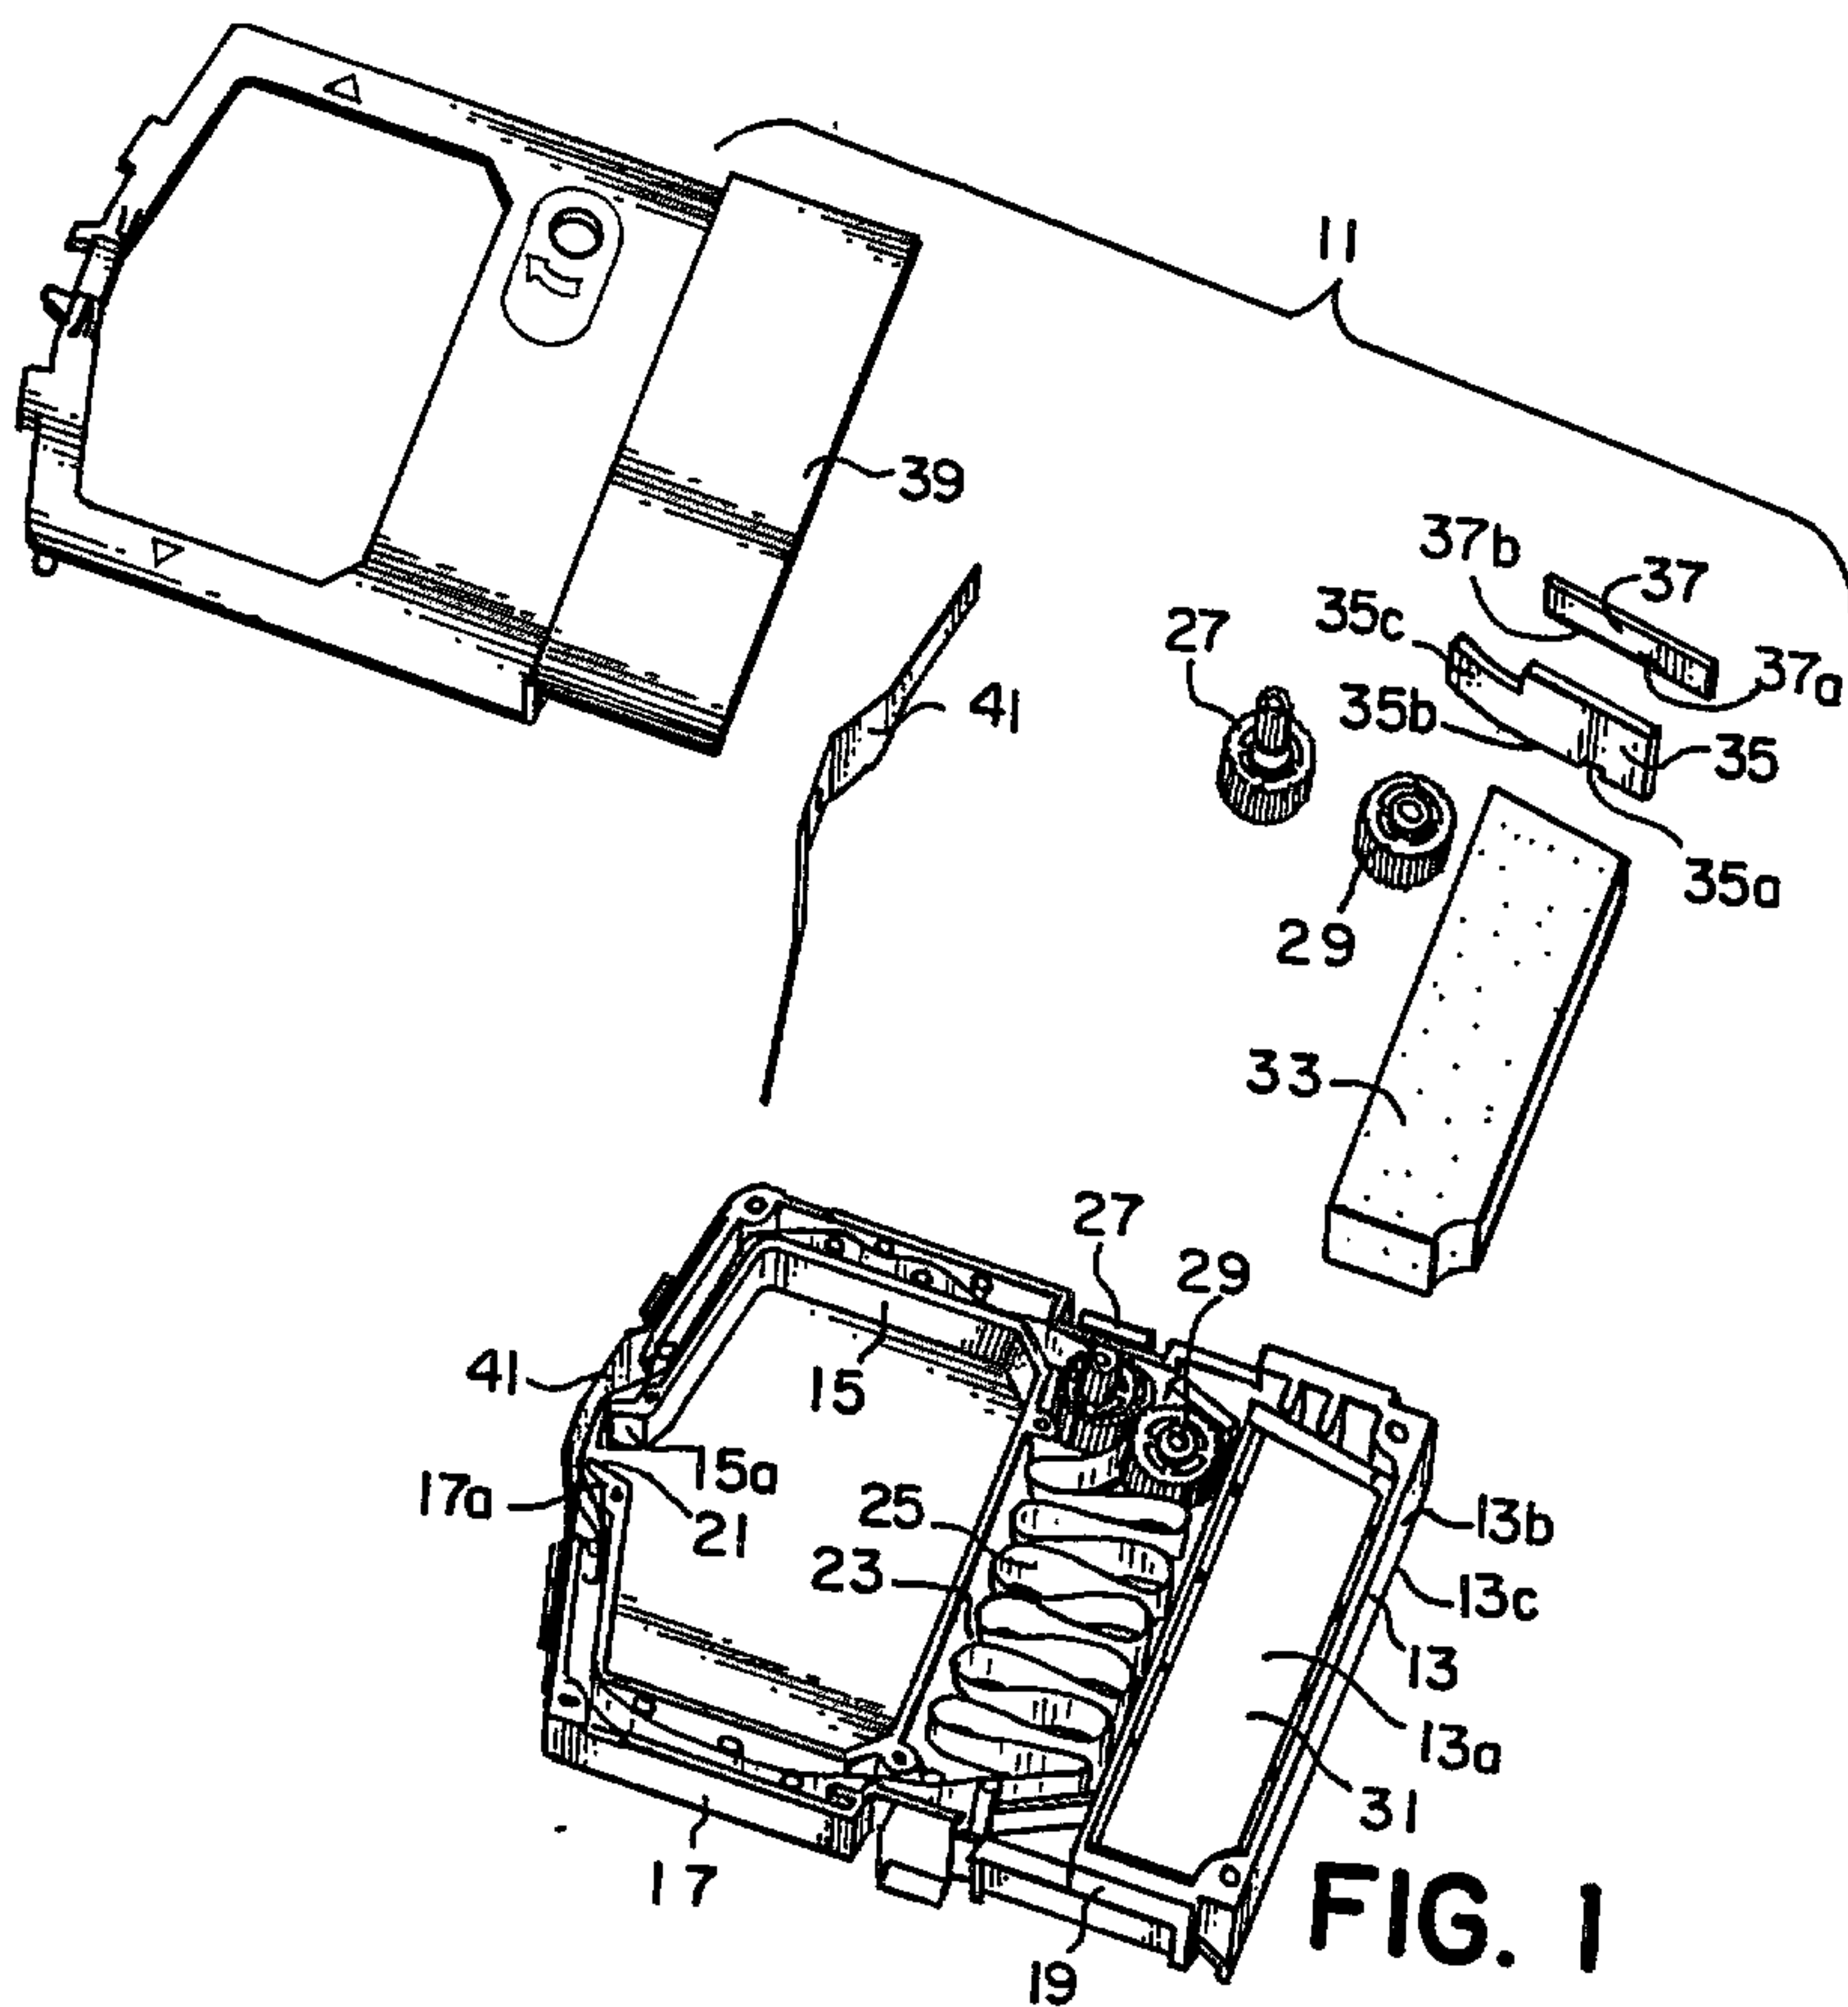

**FIG. 2**

