




- (51) International Patent Classification:  
*G06F 17/50* (2006.01) *H01L 21/673* (2006.01)
- (21) International Application Number:  
PCT/US2016/028806
- (22) International Filing Date:  
22 April 2016 (22.04.2016)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
62/151,709 23 April 2015 (23.04.2015) US
- (71) Applicant: MASSACHUSETTS INSTITUTE OF TECHNOLOGY [US/US]; 77 Massachusetts Avenue, Cambridge, Massachusetts 02139 (US).
- (72) Inventors: LANGFORD, William; 129 Franklin St. apt. 119, Cambridge, Massachusetts 02139 (US). CARNEY, Matthew; 256 Aspinwall Ave. Apt. 2, Brookline, Massachusetts 02445 (US). JENETT, Benjamin; 42 Lincoln St. #2, Cambridge, Massachusetts 02141 (US). GER-SHENFELD, Neil; 50 Orchard St., Cambridge, Massachusetts 02140 (US).
- (74) Agents: GREENSPOON, Robert et al.; 333 N. Michigan Avenue, Suite 2700, Chicago, 60601 (US).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: DISCRETE ASSEMBLERS UTILIZING CONVENTIONAL MOTION SYSTEMS

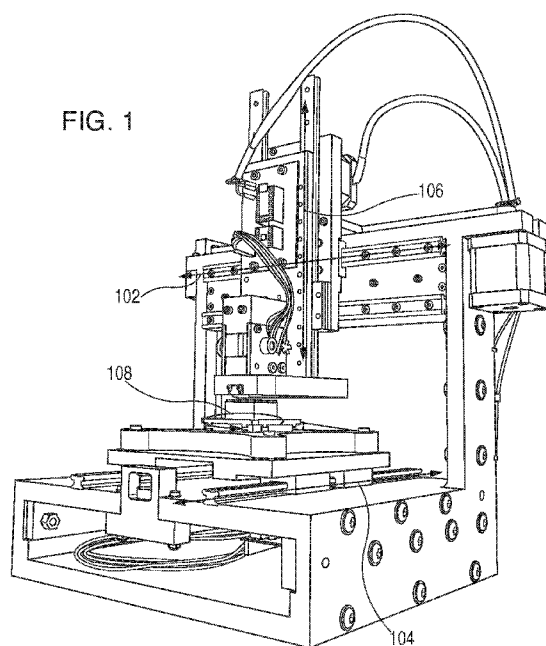

(57) Abstract: An alternative to additive manufacturing is disclosed, introducing an end-to-end workflow in which discrete building blocks are reversibly joined to produce assemblies called digital materials. Described is the design of the bulk-material building blocks and the devices that are assembled from them. Detailed is the design and implementation of an automated assembler, which takes advantage of the digital material structure to avoid positioning errors within a large tolerance. To generate assembly sequences, a novel CAD/CAM workflow is described for designing, simulating, and assembling digital materials. The structures assembled using this process have been evaluated, showing that the joints perform well under varying conditions and that the assembled structures are functionally precise.

**DISCRETE ASSEMBLERS UTILIZING CONVENTIONAL MOTION SYSTEMS**

This application claims the benefit of U.S. Provisional Application No. 62/151,709, filed April 23, 2015, the entire disclosure of which is herein incorporated by reference.

This invention was made with government support under Grant/Contract No. NSF CMMI-1344222 awarded by NSF, Grant/Contract No. W911NF-14-2-0063 awarded by DARPA, and Grant/Contract No. NNX14AH75A awarded by NASA. The government has certain rights in the invention.

**TECHNICAL FIELD OF THE INVENTION**

The present invention relates to electronic digital materials, and more specifically to automated assembly of electronic digital materials.

**BACKGROUND OF THE INVENTION**

Prior work has been done in making machines that assemble structures from discrete parts. Hiller et al. showed a method of parallel part placement of voxel spheres in [J. Hiller and H. Lipson, "Methods of Parallel Voxel Manipulation for 3D Digital

Printing,” in Proceedings of the 18th solid freeform fabrication symposium., 2007, p. 12]. These voxels, however, do not interlock in a structural way and so a binder must be used after depositing the spheres. Assembly machines have also been created for use in assembling micro-electronics. [see E. D. Kunt, A. T. Naskali, and A. Sabanovic, “Miniaturized modular manipulator design for high precision assembly and manipulation tasks,” 2012 12th IEEE Int. Work. Adv. Motion Control, pp. 1–6, Mar. 2012]. These machines operate as pick-and-place machines, having an external magazine of parts from which parts are picked but do not physically register the toolhead to the structure or circuit board. Active research in assembling structures with robotic arms looks to incorporate force sensing to do closed loop force control rather than displacement control. [see A. Stolt, M. Linderöth, A. Robertsson, and R. Johansson, “Force controlled assembly of emergency stop button,” 2011 IEEE Int. Conf. Robot. Autom., pp. 3751–3756, May 2011].

This invention describes a set of machines capable of building structures by the additive assembly of discrete parts. These digital material assemblies (described, in part, in U.S. Patent No. 7,848,838) constrain the constituent parts to a discrete set of possible positions and orientations. In doing so, the structures exhibit many of the properties inherent in digital communication such as error correction and fault tolerance and allow the assembly of precise structures with comparatively imprecise tools. The machines responsible for assembling digital materials should leverage, to the extent possible, the interlocking and error-correction naturally present in the discrete parts.

Interest in additive manufacturing has recently been spurred by the promise of multi-material printing and the ability to embed functionality and intelligence into

objects. The present invention discloses an alternative to additive manufacturing, introducing an end-to-end workflow in which discrete building blocks are reversibly joined to produce assemblies called digital materials. The present invention describes the design of the bulk-material building blocks and the devices that are assembled from them. The present invention details the design and implementation of an automated assembler, which takes advantage of the digital material structure to avoid positioning errors within a large tolerance. To generate assembly sequences, a novel CAD/CAM workflow is used for designing, simulating, and assembling digital materials. The structures assembled using this process have been evaluated, showing that the joints perform well under varying conditions and that the assembled structures are functionally precise. A very similar evaluation method applied to more standardized material samples has been described [see Luo, Xiangcheng, Chung, D. D. L., Material contacts under cyclic compression, studied in real time by electrical resistance measurement, *Journal of Materials Science*, 35 (2000) 4795-4801]. However, the present invention details an evaluation method for digital materials.

There has been recent interest in fabrication processes and material systems that enable functionality to be embedded within structure. Researchers in the fields of additive manufacturing and digital materials, in particular, have been exploring ways of accomplishing this.

### **Multi-Material Additive Manufacturing**

The recent interest in additive manufacturing has, in part, been spurred by the promise that complex multi-material structures can be printed with embedded functionality. Recent work has demonstrated that 3D printing enables the fabrication of

ultralight lattices [see B. G. Compton and J. a. Lewis, “3D-Printing of Lightweight Cellular Composites,” *Adv. Mater.*, p. n/a–n/a, Jun. 2014], auxetic energy-damping structures [see S. Shan, S. H. Kang, J. R. Raney, P. Wang, L. Fang, F. Candido, J. a. Lewis, and K. Bertoldi, “Multistable Architected Materials for Trapping Elastic Strain Energy,” *Adv. Mater.*, p. n/a–n/a, Jun. 2015], and self-folding chains [see D. Raviv, W. Zhao, C. McKnelly, A. Papadopoulou, A. Kadambi, B. Shi, S. Hirsch, D. Dikovsky, M. Zyracki, C. Olguin, R. Raskar, and S. Tibbits, “Active Printed Materials for Complex Self-Evolving Deformations,” *Sci. Rep.* , vol. 4, p. 7422, 2014]. Commercial 3D printers are able to print objects from a wide range of materials including sintered metals and nylon, UV-cured resin, and thermoplastics like ABS and PLA. However, these printers are generally restricted to printing a single material at a time and only a small number of commercially available printers are able to simultaneously print with multiple materials; those that can, are limited to printing plastics with a relatively narrow range of material properties.

None of these printers, however, have been able match the properties and variety of electronic materials needed to print a full range of electronic devices. While researchers have recently developed conductive ink formulations that enable the controlled deposition of highly-conductive traces [see A. Russo, B. Y. Ahn, J. J. Adams, E. B. Duoss, J. T. Bernhard, and J. A. Lewis, “Pen-on-Paper Flexible Electronics,” *Adv. Mater.* , vol. 23, no. 30, pp. 3426–3430, 2011; D. Zhao, T. Liu, J. G. Park, M. Zhang, J. M. Chen, and B. Wang, “Conductivity enhancement of aerosol-jet printed electronics by using silver nanoparticles ink with carbon nanotubes,” *Microelectron. Eng.* , vol. 96, pp. 71–75, 2012], they have not yet been commercialized (although two are very close to

market [see “Voltera.” [Online]. Available: <http://voltera.io/>. [Accessed: 26-Nov-2015]; “Voxel8.” [Online]. Available: <http://www.voxel8.co/>. [Accessed: 27-Nov-2015]]. Still, these formulations are one to two orders of magnitude less conductive than bulk metal and often require a post-bake processing step to evaporate the solvent, which limits the substrate material choice.

With these conductive inks, researchers have started to show that it is possible to print functional electronics. Using specially formulated anode and cathode inks, researchers are able to print lithium ion [see K. Sun, T. S. Wei, B. Y. Ahn, J. Y. Seo, S. J. Dillon, and J. a. Lewis, “3D printing of interdigitated Li-ion microbattery architectures,” *Adv. Mater.*, vol. 25, no. 33, pp. 4539–4543, 2013] and zinc-air [see E. Malone, K. Rasa, D. Cohen, T. Isaacson, H. Lashley, and H. Lipson, “Freeform fabrication of zinc-air batteries and electromechanical assemblies,” *Rapid Prototyp. J.*, vol. 10, no. 1, pp. 58–69, 2004] batteries. In another study, the conductive inks were conformally printed on 3D substrates to fabricate efficient antennas [see J. J. Adams, E. B. Duoss, T. F. Malkowski, M. J. Motala, B. Y. Ahn, R. G. Nuzzo, J. T. Bernhard, and J. a Lewis, “Conformal printing of electrically small antennas on three-dimensional surfaces,” *Adv. Mater.*, vol. 23, no. 11, pp. 1335–40, Mar. 2011]. Ink-jet printing has also been used in similar ways to deposit highly conductive silver traces to create electromechanical functionalities like an electrostatic motor [see S. B. Fuller, E. J. Wilhelm, and J. M. Jacobson, “Ink-jet printed nanoparticle microelectromechanical systems,” *J. Microelectromechanical Syst.*, vol. 11, no. 1, pp. 54–60, 2002]. While 3D printers are capable of fabricating objects from a wide range of materials, they all fundamentally perform more-or-less the same task of carefully positioning a print head and depositing or fusing a precise amount of

material. If the speed of the positioning is not precisely mapped to the rate of deposition or fusing of material, the fabricated object will have bumps or voids. The accuracy of the final product is therefore ultimately determined by the accuracy of the machine. A model printed on a hobbyist's home 3D printer will come out markedly different from the same model printed on a million dollar commercial 3D printer.

## SUMMARY OF THE INVENTION

### **Digital Material Assembly**

An alternative approach to multi-material additive manufacturing looks to discretize material into individual building blocks. Digital materials are assemblies of individual building blocks, each having a discrete set of possible positions and orientations [see G. A. Popescu, T. Mahale, and N. A. Gershenfeld, "Digital materials for digital printing," *NIP Digit. Fabr....* , pp. 1–4, 2006]. The building blocks structurally interlock with neighboring ones such that they register to a lattice. This approach has many traits that make it a compelling alternative to conventional (analog) manufacturing techniques. For one, errors within a tolerance can be restored, enabling an assembler to assemble an object more accurate than itself. That is to say, two very different assemblers, if given the same building blocks, would assemble precisely the same object within the tolerance of the feature size of the building block. Secondly, since the building blocks structurally interlock, dissimilar materials are easily joined, enabling multi-material fabrication with a much broader range of materials. Finally, when the object is no longer needed, the parts can be disassembled and reused rather than thrown away.

A number of different variations of digital materials and methods of discrete assembly have been explored. MacCurdy et al., for example, assembled functional electronic circuits from individual component building blocks [see R. MacCurdy, a. McNicoll, and H. Lipson, “Bitblox: Printable digital materials for electromechanical machines,” *Int. J. Rob. Res.*, Jul. 2014]. The building blocks themselves were made from printed circuit boards and commercially available press-fit connectors were used to join the blocks to each other. A 3D printer was modified with a part placement head in order to automate the assembly of the blocks. Automated assembly was demonstrated through the assembly of an infrared remote control composed of 17 blocks.

In another work by Hiller et al., a serial voxel assembler was demonstrated, which builds multi-material objects from discrete spherical building blocks [see J. D. Hiller and H. Lipson, “Fully Recyclable Multi-Material Printing,” *Solid Free. Fabr. Symp.*, pp. 98–106, 2009]. The assembler assembled structures from three different materials simultaneously. The voxels were bound together using a liquid adhesive binder and the researchers showed that structures could be recycled by simply dissolving the binder in water. The assembler was able to place parts at a speed of approximately 2 Hz, which was demonstrated by building a dome shape composed of approximately 400 voxels in three minutes.

The present invention introduces an end-to-end workflow for discrete assembly, enabling a new kind of electronic material system. This invention spans part design and production, digital material CAD/CAM tools, and automated assembly workflows. In comparison with existing approaches, this invention uses fundamental building blocks that structurally interlock and shows that complex electronic functionality can be built up

from just two bulk material building block-types. Furthermore, the invention demonstrates how to build an automated serial assembler. The invention further demonstrates that the automated serial assembler can take advantage of the digital material properties to build objects more precise than itself.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a 4-axis discrete assembler.

FIG. 2 is an example of a discrete GIK part with a rotational asymmetry.

FIG. 3 is a structure built from the discrete parts of FIG. 2.

FIG. 4 is a foot used for passively aligning to the structure and temporarily locking the machine in place.

FIG. 5 shows the detail of a “stapler” (onboard part storage).

FIG. 6 is a rack and worm gear mechanism to “place” a part, with the blade in upper-most position (left), and blade in lower-most position (right).

FIG. 7 is a passive toolhead with snap-fit to pick-up part.

FIG. 8 is a series elastic actuator configuration used for force controlled part placement.

FIG. 9 is a part geometry and assembly illustration showing how parts are joined, and an assembly of GIK parts on a finger for scale.

FIG. 10 shows a stapler mechanism section view.

FIG. 11 shows a stapler magazine from below.

FIG. 12 are DMDesign screenshots showing design, simulation, and assembly processes.

FIG. 13 shows the effect of load cycling on joint conductance.

FIG. 14 is scanning electron micrograph showing joint wear.

FIG. 15 is an illustration showing the positioning error tolerance region.

## DETAILED DESCRIPTION OF INVENTION

An embodiment of the present invention positions a toolhead relative to the structure being fabricated using three conventional linear axes: X 102, Y 104, and Z 106 (Figure 1). A fourth C-axis (108) may be necessary if the part has a rotation asymmetry and requires a rotation about the Z-axis between layers (as is the case of the part pictured in Figure 2 and structure pictured in Figure 3). Conventional motion systems including, but not limited to, timing belts, leadscrews, and rack and pinion mechanisms may be used as power transmission between the motors and the positioning stages. The dimensions of Figure 2 (in inches) are .010 202, .1950 204, .010 206, .05 208, and .1250 210. Figure 3 shows a discretely assembled structure 302 and a substrate 304.

Another embodiment of the present invention positions a toolhead relative to a lattice structure along three conventional linear axes of motion (X, Y, and Z), and also includes a foot mechanisms for moving the machine relative to the lattice structure in at least one or more directions. The foot mechanism for moving the machine relative to the lattice structure may in some instances operate independently of the toolhead motion system, or in some instances, may have motions coupled to the toolhead motion system. The foot mechanism for relative motion includes an end-effector for locating and temporarily fixturing to the lattice structure. The locating end-effector includes features for passively locating to the lattice, and may also include a mechanism for locking to the

lattice (Figure 4). The ability of the assembler machine to move relative to the lattice allows the toolhead to operate on a larger volume than that defined by its primary positioning system. The motion system for the foot is composed of conventional motion mechanisms.

While the machine positions using conventional motion systems, the toolhead incorporates alignment features that interface with the structure being built and ensure registration between the tool and the lattice of parts. In this instantiation, the alignment features consist of chamfered or tapered alignment fingers 502 that are inserted into the negative space of the lattice (Figure 5). Figure 5 shows a magazine of parts 504 and a magazine spring 506. An alternative configuration is also possible in which the part being placed contains alignment features such as sufficiently large chamfers or fillets; in this configuration, alignment features on the toolhead are unnecessary.

In such a machine, parts are stored onboard the toolhead in a magazine (in a way similar to that of a conventional stapler) (item 608). A rack 602 and worm gear 604 mechanism is used to drive a blade 606 which pushes a part out of the magazine and into the structure (Figure 6). The bearing block is item 612. The deposited part is item 610. A number of other mechanisms would be capable of serving this same purpose including, but not limited to, a linkage, a rack and pinion, and a leadscrew or ballscrew.

Parts, however, may also be stored off-board the toolhead. In such a machine configuration the active (mechanism) toolhead is replaced with a passive snap-fit or flexural clamp (Figure 7). Parts are stored in a magazine within reach of the passive toolhead such that the machine can pick up a part from the magazine and place a part in the lattice. The strength of the bond between the passive toolhead and the part must be

tuned such that it is stronger than the bond between the magazine and part but weaker than the bond between the part and the structure.

Control can be accomplished simply using industry-standard G-code. This entails using the machine in a position-controlled mode since the drive motors are simply told how far to move during each step of the process. A more advanced configuration might include the use of force sensors to allow a more repeatable localization relative to the lattice. This is particularly useful in the Z-axis of this machine configuration and is accomplished by adding a load cell in series between the toolhead and the drive motor. Instead of driving the toolhead to a known position, the Z-axis would drive the toolhead with a desired downward force (Figure 8). On-board sensing of the forces required to register the toolhead to the lattice, not only allows lower off-axis forces during assembly, but also enables the assembly of much larger structures. The error accumulation in the lattice can be mapped and accounted for in real-time, giving the assembler an unbounded assembly envelope. Without this, the assembly envelope is limited based on error accumulation within the lattice.

Compliance may also be added along and in rotation about the other axes (X,Y, and A – A axis is shown in Fig. 4 of U.S. Provisional Application No. 62/151,709) in order to aid in the registration of the toolhead with the structure. With added compliance in these axes, the required positional accuracy of the machine is significantly reduced and local registration can be performed passively by the alignment features on the toolhead itself.

## **DESIGN**

### **Part Design**

In designing the parts of a digital material system, a number of considerations need to be taken into account, including the level of complexity of the building block. Digital material parts can range in complexity from simple single-material spheres [see Hiller and H. Lipson, “Methods of Parallel Voxel Manipulation for 3D Digital Printing,” in Proceedings of the 18th solid freeform fabrication symposium., 2007, p. 12] to elaborate pre-fabricated modules [see K. Gilpin, A. Knaian, and D. Rus, “Robot pebbles: One centimeter modules for programmable matter through self-disassembly,” 2010 IEEE Int. Conf. Robot. Autom., pp. 2485–2492, May 2010]. The present embodiment focuses on the low-complexity end of this spectrum, fabricating the building blocks from a single material in a one-step fabrication process.

This design choice impacts many other aspects of the part design. Since the building blocks are made from a single material, they should also preferably be two-dimensional and have a simple geometric shape such that they can be easily fabricated from many different materials at many different length-scales. In this case, a meso-scale block size, pictured in Figure 9, was chosen to balance the difficulty of manipulation and assembly with functional density. Figure 9 is an illustration showing how parts are joined (902), and an assembly of GIK parts on a finger for scale (904).

To automate the assembly of the parts, it is desirable to have a build-front, or a single direction from which the parts are inserted. For this reason, the parts have slots on the top and bottom to enable this kind of top-down vertical assembly. This enables parts to connect with neighbors on adjacent layers but not within the same layer. The number of slots (four on each side) is the minimum required to tile the parts orthogonally and maintain the structural integrity of the overall structure. While parts with fewer slots (and

connections between layers) are certainly possible, their assemblies require increased design constraints in order to maintain structural integrity. These building blocks have been described in previous work and are referred to as GIK (Great Invention Kit) parts [see G. A. Popescu, T. Mahale, and N. A. Gershenfeld, “Digital materials for digital printing,” *NIP Digit. Fabr.* . . . , pp. 1–4, 2006].

A critical aspect is ensuring a good connection between the individual building blocks. In this case, that means both that the parts structurally interlock, self-aligning with neighboring parts, and that, for electronic assemblies, the conductive parts are joined with little contact resistance. The slots are sized such that the insertion of one slot into another creates a press-fit joint. The insertion force required for this press-fit is tuned to balance the difficulty of insertion with the strength and reliability of the joint. Experimental evaluation and validation of these joint properties can be done.

Parts are fabricated from two different materials: one insulating and one conductive. For the insulating part-type, a garolite fiber-epoxy composite is used, which is used for its electrical resistance, its structural stiffness and strength, as well as its thermal stability. Also, because it is widely used as a substrate for conventional circuit boards, its dielectric properties are well understood. These parts are produced using a custom-built automated desktop punch-press. In order to produce the insulating parts in mass, an automated desktop punchpress is developed. The machine takes in a strip of the fiber-epoxy composite and stamps out individual parts, advancing the strip between each stamp. The machine is controlled through a javascript interface, enabling online verification of strip-advancement and measurement of tool and die wear. Using this

simple machine, raw materials are able to be processed into digital material feedstock for a stapler assembler.

For the conducting part-type, brass is preferred for its stiffness, hardness, and machinability. Aluminum and copper parts are more ductile, deforming rather than creating a strong press-fit joint. While brass is good for prototyping, tin-plated phosphor-bronze alloy may be the ideal material choice for its soft-plating but high strength and stiffness. The conductive parts are produced using a Wire-EDM; a stack of shim stock is sandwiched between two plates and cut such that 20 parts are made at once.

### **Device Design**

Using building blocks of this type, it is possible to assemble a number of different functional electronic devices. With just two block-types (conducting and insulating), electronic interconnect can be assembled. With the addition of a third resistive block, it is possible to assemble any passive electronic component. Finally, with the addition of blocks with embedded active electronic functionality (such as diodes and transistors) an entire integrated circuit may be assembled.

By strategically placing conductive building blocks within a structure, arbitrary electrical traces can be routed, connecting electrical components placed on the surface of the structure. In this case, the pitch of the digital material lattice is conveniently chosen to match the pitch of small outline integrated circuit (SOIC) surface mount components (1.27mm). An example of this kind of assembly is one in which conductive and insulating parts are used to replace the conventional traces, pads, vias, and layers of a circuit board with a volume of electronic materials to blink an LED using an ATtiny

microcontroller. With the exception of 5V power, which was provided externally by the red and black wires, everything required to blink the LED is onboard.

Going beyond circuit boards, by carefully arranging the placement of the conductive blocks in the structure, passive components themselves may be assembled. For example, by placing the conductive blocks in an interdigitated finger arrangement, a capacitor can be assembled. Similarly, by placing the conductive blocks in a spiral or helix an inductor can be assembled.

### **Assembler Design**

Without the present invention, assemblies of hundreds of components may take many hours to assemble using tweezers. One of the primary aims of this invention is to detail the design and implementation of an automated means of assembly to increase assembly throughput and allow for greater design complexity.

The design of the assembler described in this invention resembles that of conventional fabrication machines in many ways. A 4-axis motion gantry is used to position two toolheads spatially with respect to the structure being built. However, the assembler differs from other fabrication tools in that it takes advantage of the inherent qualities of digital material structures. Unlike conventional machine tools, the assembler can correct positioning errors within a tolerance by registering with the digital material lattice, enabling the assembly of structures more accurate than the assembler itself. Similarly, unlike conventional machine tools, an assembler either places a part successfully or it does not. This kind of error is much easier to detect and correct than, for example, depositing thermoplastic slightly too quickly, as might be the case with a fused deposition modeling (FDM) 3D printer.

The assembler presented in this embodiment differs from existing automated assembly machines in a few ways. Unlike the BitBlox assembler [see R. MacCurdy, a. McNicoll, and H. Lipson, “Bitblox: Printable digital materials for electromechanical machines,” *Int. J. Rob. Res.*, Jul. 2014], which must pick up and place a part, the assembler described in this invention stores the parts onboard in a magazine, potentially doubling the speed of assembly by eliminating traversals to the part supply area between part placements. This assembler also explicitly takes advantage of the error correction capabilities of the digital materials by adding intentional compliance between the toolhead and the structure to allow the toolhead to register to the digital material lattice. In theory, an assembler may be designed to accept a positioning error up to half of the lattice pitch of the digital material assembly. In this case that would be a positioning error of 0.635mm.

## **IMPLEMENTATION**

This assembler can be broken down into three primary subsystems: the motion gantry, the part placement or stapler mechanism, and the part storage or magazine. This section will detail their implementation.

### **Motion Gantry**

A 4-axis motion gantry is used to position the two toolheads in X, Y, Z and C (rotation about Z) spatial coordinates. The motion gantry is constructed from a steel reinforced HDPE frame. The frame was CNC milled to precisely position all holes and pockets. Precision ground steel was then bolted to the frame pieces to add rigidity and mass. The axes use polymer linear guideways for a low friction motion in each axis. The axes are powered by high-torque NEMA-17 stepper motors and driven with GT2 timing

belts. The motor and power transmission elements were specified to nominally provide a 1/16th microstep resolution of 5 $\mu$ m and a maximum operating speed of 50 mm/s with a potential linear force delivery of 70N in each axis.

Some amount of backlash in timing belt transmissions is always present, and needs to be accounted for in order to position precisely. In this case the backlash in the timing belt transmission is measured to be between 125 $\mu$ m and 250 $\mu$ m in the X- and Y-axes. Fortunately, for this invention, it is trivial to compensate for this error by driving the axes so that they always approach a part-placement location from the same direction, effectively nulling the backlash and enabling a positioning repeatability better than 25 $\mu$ m in X- and Y-axes.

To enable the toolhead of the machine to self-align with the digital material structure, intentional compliance is added between the build platform and the toolhead through the use of an XY-flexure mechanism located on the Y-axis. The flexural mechanism, which was fabricated by CNC milling, allows deflections of 0.5mm to occur with approximately 2 N of lateral force.

### **Stapler Mechanism**

The part placement mechanism must be fast, robust, and reliable. A number of potential mechanisms were considered and a worm-driven rack was ultimately selected for its compactness, small number of parts, and high gear ratio. This mechanism is pictured in Figure 10.

In the mechanism 1000, a worm 1006 is driven by a DC gearmotor 1002 with a 100:1 gear reduction (from Pololu). The worm 1006, in turn, drives a piston with an integrated rack (item 1004). The piston 1004 tapers down to a blade which is just

0.25mm thick (the thickness of a single building block). As the motor 1002 is driven, the piston 1004 is forced down, pushing out the next part 1010 in the magazine 1008. Based on the torque of the DC gearmotor 1002 and the efficiency of the rackworm interface (~50%) the piston 1004 is expected to produce roughly 32N of downward force for part-insertion, which is roughly double the expected 12N of force needed to insert a part 1010.

The motor 1002 is run with closed-loop feedback from a magnetic encoder attached to the pre-gear DC motor shaft and is current-limited to 0.5A in software to ensure it does not overheat if stalled. The control algorithm is a basic PID controller, which drives the piston with a trapezoidal velocity profile between the two desired positions (up and down).

Using this mechanism and controller, the maximum part deposition rate was measured at 0.72 Hz. With additional tuning and component refinement this could be tuned to reach 1 Hz.

### **Stapler Magazine**

In order to enable parts to be refilled mid-build, the stapler magazine 1100 is decoupled from the stapler mechanism, allowing the magazine to be removed and reloaded easily. In the prototype, the magazine can hold up to 100 parts. A spring is used to preload the stack of parts against the front of the magazine with a pusher 1106.

The most critical feature of this subsystem is the alignment mechanism to register the toolhead with the lattice. Alignment fingers 1104 on the front of the toolhead are used to correct for positioning errors prior to depositing a part. The pointed fingers reach into the negative space of the lattice to constrain the position in both X- and Y-axes. The

toolhead is made using a variety of fabrication processes including wire-EDM and manual machining.

The magazine 1100 is made to be easily removable from the rest of the toolhead. This is achieved through the use of a repeatable coupling mechanism. The tapered magazine is forced up against two dowel pins 1108 by a conical point setscrew 1102, which interfaces with a conical hole on the front of the stapler magazine 1100. This constrains all 6-degrees of freedom of the stapler magazine 1100 in such a way that it can be removed and reinserted midway through a build without any loss of precision. This mechanism is pictured in Figure 11.

## **CAD/CAM WORKFLOW**

As the size and complexity of discretely assembled structures increases, new software tools for Computer-aided Design (CAD) and Computer-aided Manufacturing (CAM) are helpful. An embodiment of this invention includes the development DMDesign, an end-to-end software workflow for the design, simulation, and toolpathing of discretely assembly of electronic structures. Figure 12 shows four screenshots of an LC structure designed from conductive and insulating parts in several stages of the DMDesign workflow.

Structures are designed from multiple materials in a hierarchical, 3D CAD interface. Within this interface, a user can toggle between an abstract, geometric representation (1202, top left of Figure 12) and a realistic representation (1204, top right of Figure 12) of the parts. Once a structure has been designed, DMDesign allows a user to assess the electronic and structural interconnectivity of the assembly, as well as simulate static, 3D potential fields in and around the assembly (1206, bottom left Figure

12). Additionally, a user may export 3D meshes from their design to evaluate in other simulation packages.

Assembly designs are brought into the CAM workflow to plan and generate toolpathing and communicate in real time with the assembler. DMDesign communicates with the assembler through a CAM protocol called G-Code. The GCode needed to assemble a given design is generated automatically by DMDesign, though users can gain low level control over the G-Code generation process via a scripting interface. Once generated, the G-Code may be simulated virtually to verify that the desired output is achieved (1208, bottom right of Figure 12). Once verified, the G-Code is streamed to the assembler in real-time, and an open communication terminal allows users to take control of the process at any moment.

During the assembly process, the movements and state of the assembler are mirrored by a virtual assembler within DMDesign. This platform was designed with the intention of eventually supporting more back and forth interaction between DMDesign, the assembler, and the partially-assembled structure; applications include real-time sensing for increased part placement accuracy, intermediate calibration routines, and error detection and automatic correction.

## **EVALUATION**

### **Joint Properties**

Study was made of the interface between parts in order to ensure that they produce reliable and repeatable electrical contacts. The quality of the electrical contacts is crucial not only for reliable circuitry, but also for reducing parasitics and improving the

quality of the assembled components. Here, detailed is the measurement and evaluation of the electrical interfaces between parts.

To examine the performance of the joints within a three-dimensional structure, a test specimen is built from purely conductive parts. The structure contains a total of 100 parts with five layers, each containing two rows of ten parts. Using an Instron material testing machine, the sample is loaded in compression and the load varied between 5N and 40N (item 1304), while measuring the conductance across the sample using a four-wire resistive measurement. Over 20 load cycles there is a ratcheting increase in the conductance of the sample from 120 Siemens to almost 220 Siemens, which can be seen in Figure 13, item 1302. As the load is cycled, the conductance measured across the structure increases from 120 Siemens to 220 Siemens (item 1302). This increase in conductance indicates that the surface is being worn, flattening surface micropeaks, and increasing the effective contact area at the joint interfaces.

This flattening of surface micropeaks can be seen in comparing images taken with a scanning electron microscope of a joint before and after use. The before image (pictured on top in Figure 14, item 1402) has much more surface roughness, especially on the joint side-wall, than the after image (pictured on the bottom of Figure 14, item 1404). The unused slot (1402) appears rougher and with more surface asperities than does the worn slot (1404).

This testing indicates that in order to reduce the effect of load cycles on the conductivity of the joints, it is desirable to preload the assembled components in compression. By preloading, the microscopic sliding of the joint faces on each other is reduced and the conductance of the structure changes less with applied load.

## Machine Design

The assembler of the preferred embodiment is designed to exploit the digital material structure to correct positioning errors within a large margin. By using the alignment fingers at the bottom of the toolhead to register to the lattice for final positioning, the assembler should be able to correct for errors up to a theoretical maximum of 0.635mm off in the X- or Y-axes.

To test this, the machine was zeroed such that the fingers were perfectly centered in the negative space of the lattice. The machine was then commanded to move to deviations from this position and then lowered into the structure. The machine was able to accommodate deviations of up to 0.5mm in the X- and Y-axis. When the toolhead is 0.5mm off of center, the tips of the alignment fingers sit just inside the negative space. More than 0.5mm off of center, and the alignment fingers crash on the top flat surface of the top layer of parts in the structure. The maximum tolerable alignment error is illustrated in Figure 15. The alignment fingers are shown at the leftmost-end of their positioning tolerance region with respect to the lattice.

The assembler should not only be error tolerant, but it should also be relatively fast at depositing parts and building volumes.

With default settings, a typical part placement speed for the assembler is approximately 0.2 Hz (or 1 part every 5 seconds). Given this, and the geometry of the parts and the lattice, a volumetric build rate of  $80 \text{ mm}^3 / \text{min}$  can be calculated. This is on par with the build speed of commercial 3D printers, which take a few hours to build a one cubic inch structure.

Of course, with further tuning and testing, the same hardware could be used to assemble objects much faster, potentially up to 1 Hz, at which point the stapler mechanism becomes the rate limiter. Even then, further speed improvements should be possible.

The embodiments discussed above demonstrate an end-to-end workflow for the discrete assembly of electronic digital materials, or non-electronic ones. By using parts that structurally interlock with one another, multi-material structures are able to be assembled with highly conductive electrical pathways, enabling the fabrication functional electronic devices without the need for a binder or thermal annealing. An automated assembler can programmatically assemble arbitrary structures from conductive and insulating block-types. Furthermore, by exploiting the structure of the digital materials, the assembler can be made to be extremely error tolerant.

While the above specification and examples provide a description of the invention, many embodiments of the invention can be made without departing from the spirit and scope of the invention. It is to be understood that the foregoing embodiments are provided as illustrative only, and does not limit or define the scope of the invention. Various other embodiments are also within the scope of the claims.

## CLAIMS

What is claimed is:

1. An apparatus for automated assembly of digital materials made up of individual building blocks as parts, each having a discrete set of possible positions and orientations that structurally interlock with neighboring building blocks such that they form a press-fit joint and register to a lattice, the apparatus comprising:

a multi-axis motion gantry for positioning a toolhead spatially with respect to a structure being built; and

a part placement mechanism used to drive a blade that pushes parts out of a magazine and into the assembled structure, the part placement mechanism having an alignment mechanism to register the toolhead with the lattice, and the magazine containing storage for parts onboard within the part placement mechanism.

2. The apparatus of claim 1, wherein the axes of the multi-axis motion gantry use polymer linear guideways and a flexural mechanism to add intentional compliance between the build-front and the toolhead, to allow the toolhead to register to the digital material lattice, wherein the flexural mechanism is fabricated by CNC milling.

3. The apparatus of claim 1, wherein the multi-axis gantry uses three conventional linear axes (X, Y and Z), and uses a fourth C-axis for rotation about the Z-axis between layers.

4. The apparatus of claim 1, wherein the motion gantry system has a power transmission between the motors and the positioning stages, chosen from the group consisting of timing belts, leadscrews, ballscrews, and rack and pinion mechanisms.

5. The apparatus of claim 1, wherein the motion gantry is constructed from a steel reinforced HDPE frame, the frame being CNC milled to precisely position holes and pockets.

6. The apparatus of claim 1, wherein the a part placement mechanism has a rackworm interface, comprising:

- a DC gearmotor run with a closed-loop feedback from a magnetic encoder attached to a shaft;

- a worm driven by the DC gearmotor;

- a piston with an integrated rack driven by the worm and further driven by a control algorithm with a trapezoidal velocity profile between desired positions;

- a bearing block;

- wherein as the motor is driven, the piston is forced down, pushing out the next part from the magazine.

7. The apparatus of claim 1, wherein the part placement mechanism has a series elastic actuator configuration used for force controlled part placement comprising:

- a controller;

- a motor;

power transmission;  
a load cell; and  
a toolhead.

8. The apparatus of claim 1, wherein the part placement mechanism is chosen from the group consisting of: a rack and worm gear mechanism, linkage, rack and pinion, leadscrew, or ballscrew.

9. The apparatus of claim 1, wherein the magazine further comprises:

a spring to preload the stack of parts against the front of the magazine with a pusher;

a repeatable coupling mechanism having at least one dowel pin and a conical point setscrew, which interfaces with a conical hole on the front of the magazine.

10. The apparatus of claim 1, wherein the magazine can be decoupled from the part placement mechanism via a repeatable coupling mechanism to enable parts to be refilled mid-build.

11. The apparatus of claim 1, wherein the alignment mechanism consists of alignment fingers on the front of the toolhead used to correct for positioning errors prior to depositing a part, the fingers reaching into a negative space of the lattice to constrain the position in both X- and Y-axes.

12. The apparatus of claim 1, wherein the foot mechanism operates independently of the toolhead motion system, and has motions coupled to the toolhead motion system.

13. The apparatus of claim 1, wherein the foot mechanism includes an end-effector for locating and temporarily fixturing to the lattice structure, which includes features for passively locating to the lattice and includes a mechanism for locking to the lattice.

14. The apparatus of claim 1, wherein the assembler can correct positioning errors within a tolerance by registering with the digital material lattice, enabling the assembly of structures more accurate than the assembler itself.

15. The apparatus of claim 1, wherein the building blocks are fabricated from an insulating material.

16. The apparatus of claim 1, wherein the building blocks are fabricated from a conductive material.

17. The apparatus of claim 1, wherein the building blocks have slots on the top and bottom to enable a top-down vertical assembly, and are sized such that the insertion of one slot into another creates a press-fit joint.

18. The apparatus of claim 1, wherein the building blocks connect with neighbors on adjacent layers but not within the same layer.

19. The apparatus of claim 1, wherein the axes are powered by high-torque stepper motors and driven with timing belts.

20. The apparatus of claim 1, wherein the strength of the bond between the passive toolhead and the part is tuned so that it is stronger than the bond between the magazine and part but weaker than the bond between the part and the structure.

21. The apparatus of claim 1, further including force sensors coupled to the blade, having a force sensor output.

22. The apparatus of claim 21, wherein the apparatus uses the force sensor output in a closed loop control system.

23. The apparatus of claim 22, wherein the control system limits compressive force applied by the blade during assembly.

24. The apparatus of claim 22, wherein the control system logs accumulated error from placement of individual parts in real-time.

25. The apparatus of claim 24, wherein the apparatus alters spatial or force parameters for placement of the next part based on the accumulated error, whereby the assembler obtains a substantially unbounded assembly envelope.

26. The apparatus of claim 1, further including a foot mechanism for moving the apparatus relative to the lattice.

27. A method of measuring and evaluating the electrical interfaces between parts of a digital material assembly where the performance of joints within a three-dimensional structure is examined, comprising the steps of:

- preloading conductive digital material components in compression;
- building a test specimen from said components;
- loading the specimen in compression using a material testing machine;
- varying the compression load between a lower range and an upper range, while measuring the conductance across the specimen using a resistive measurement; and
- measuring the ratcheting increase in the conductance of the specimen as the load is cycled.

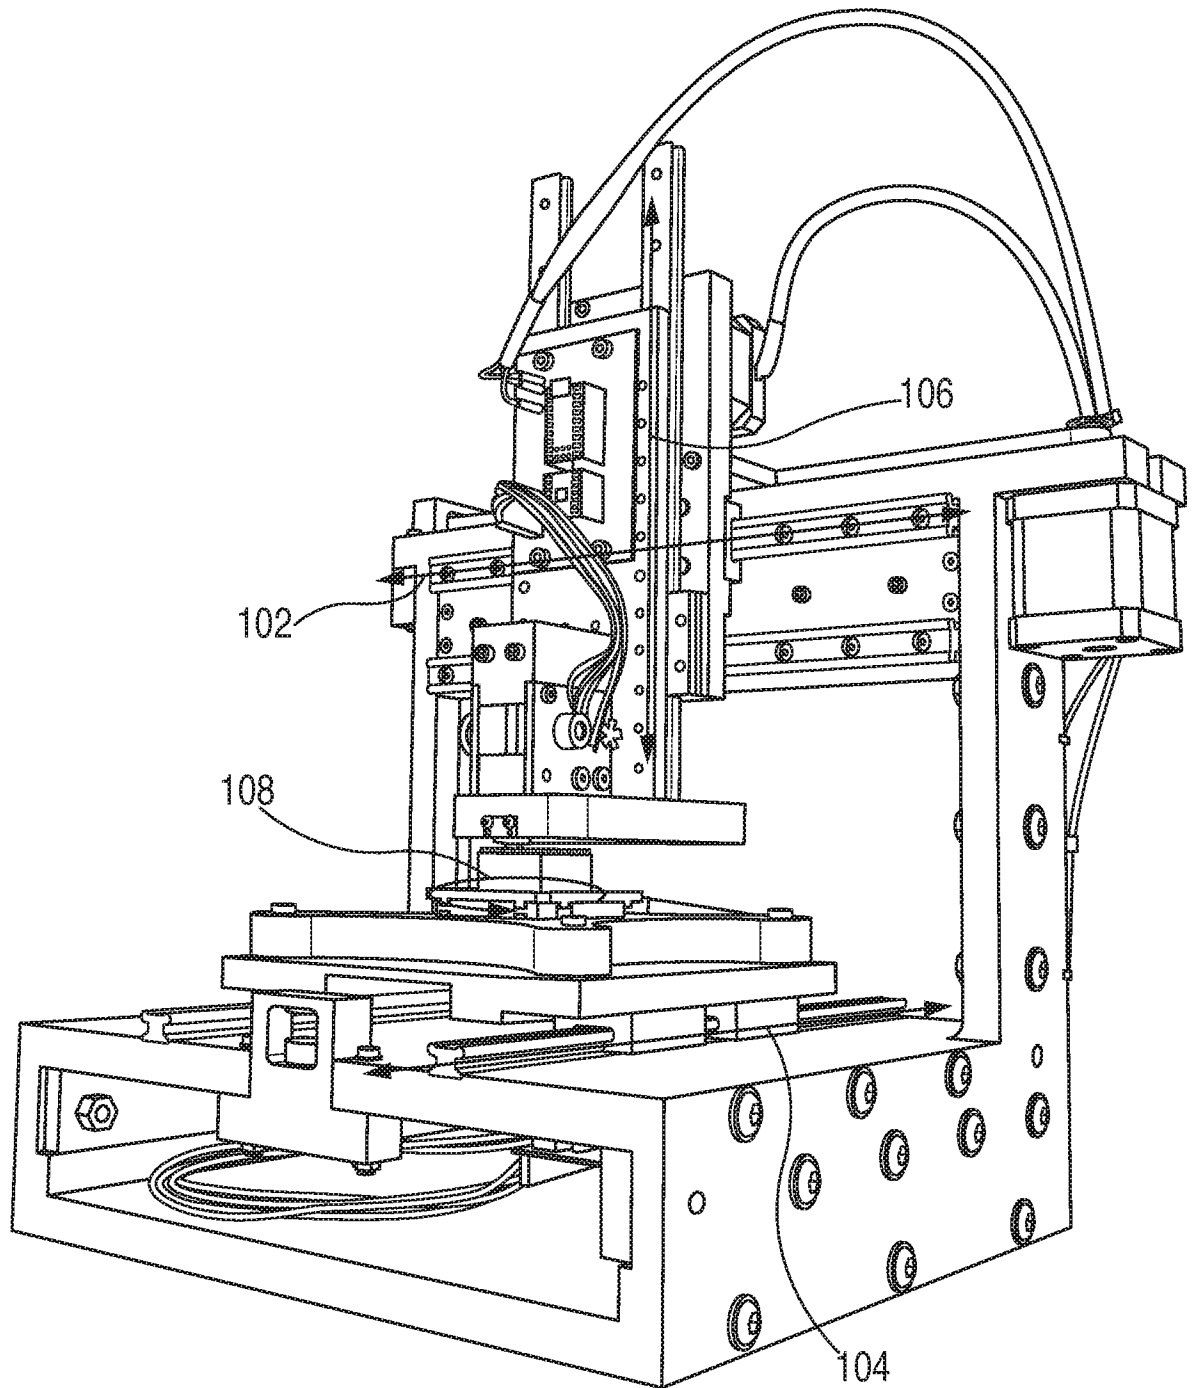


FIG. 1

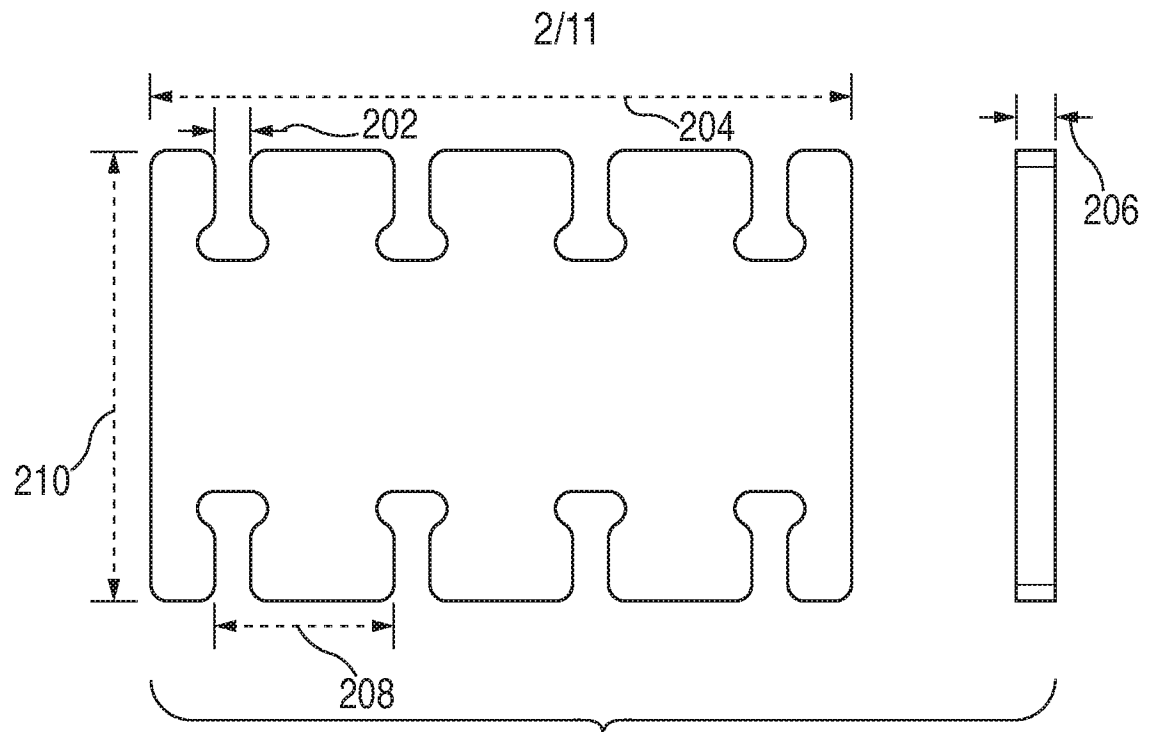


FIG. 2

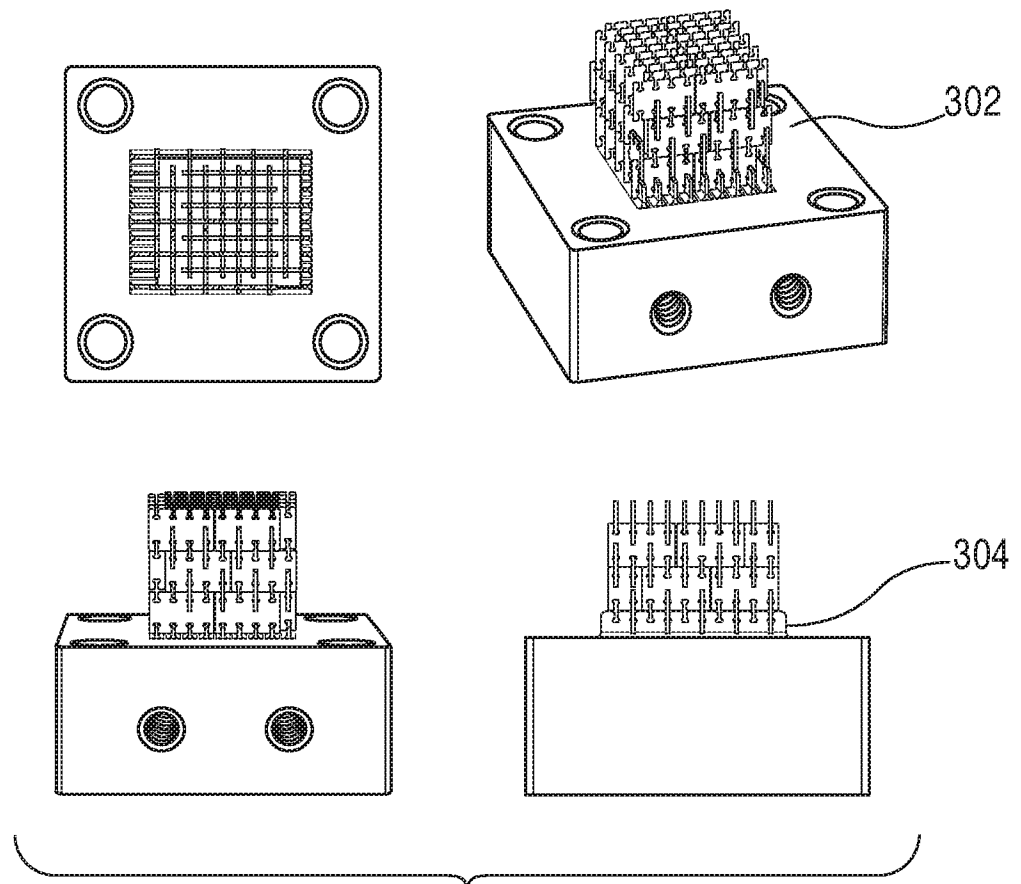


FIG. 3

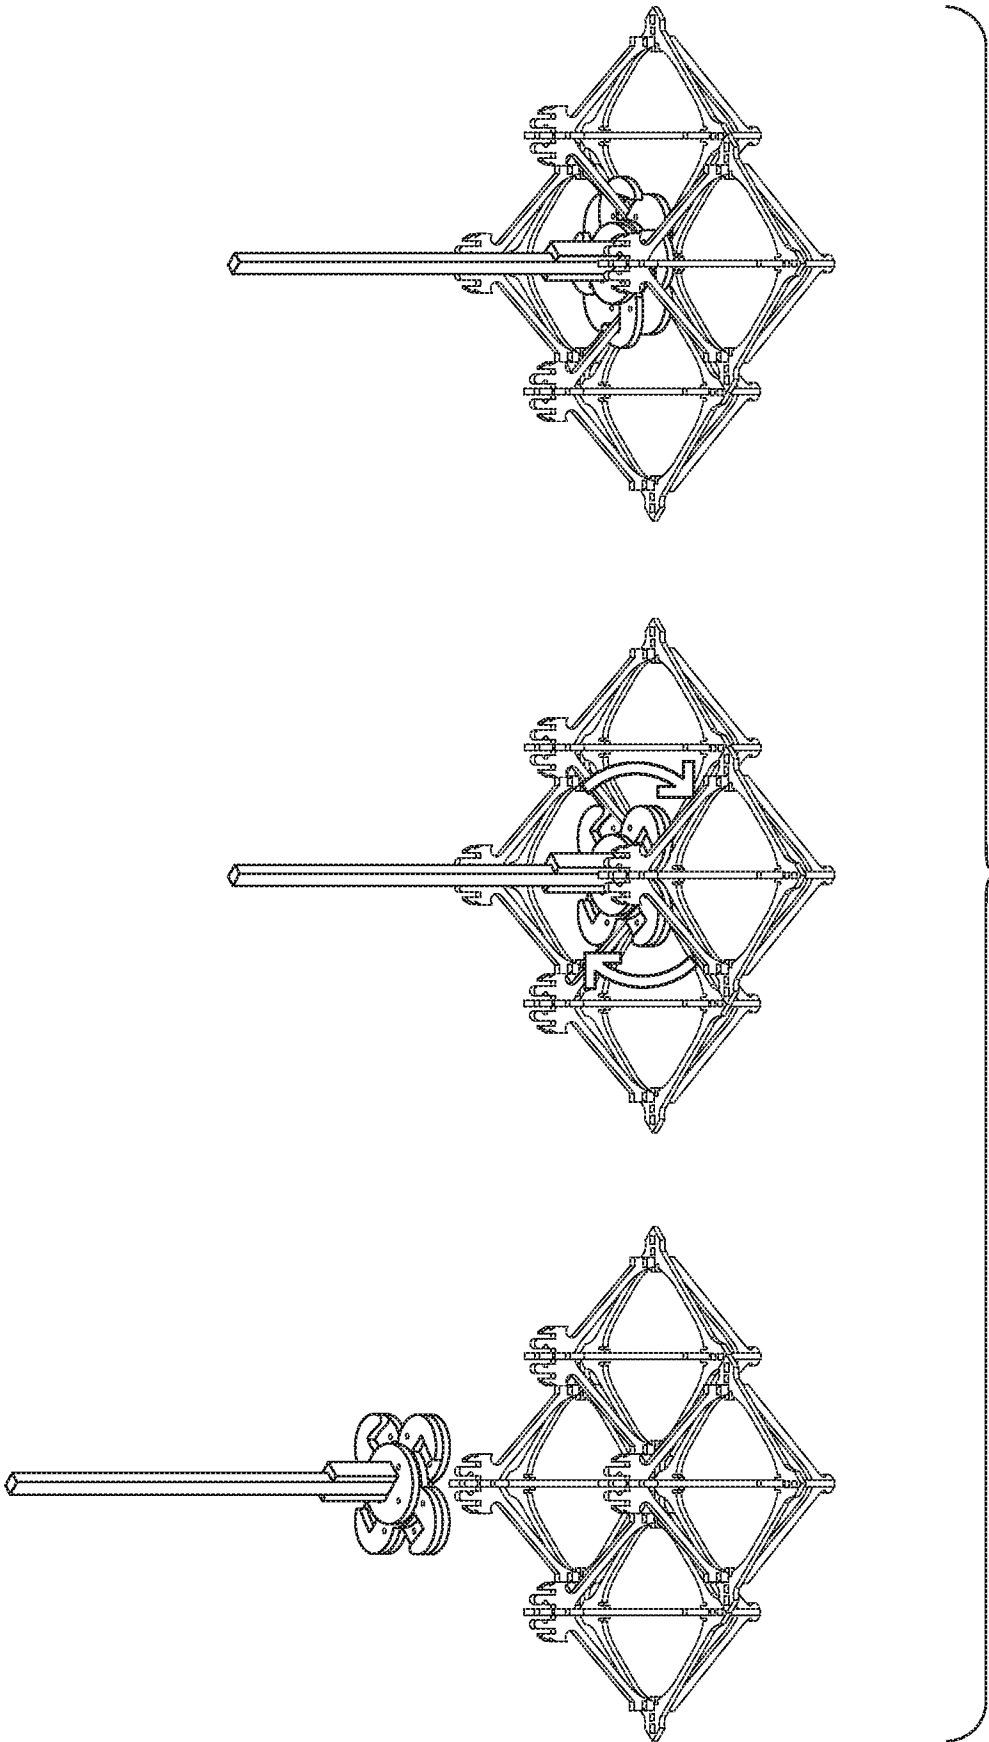


FIG. 4

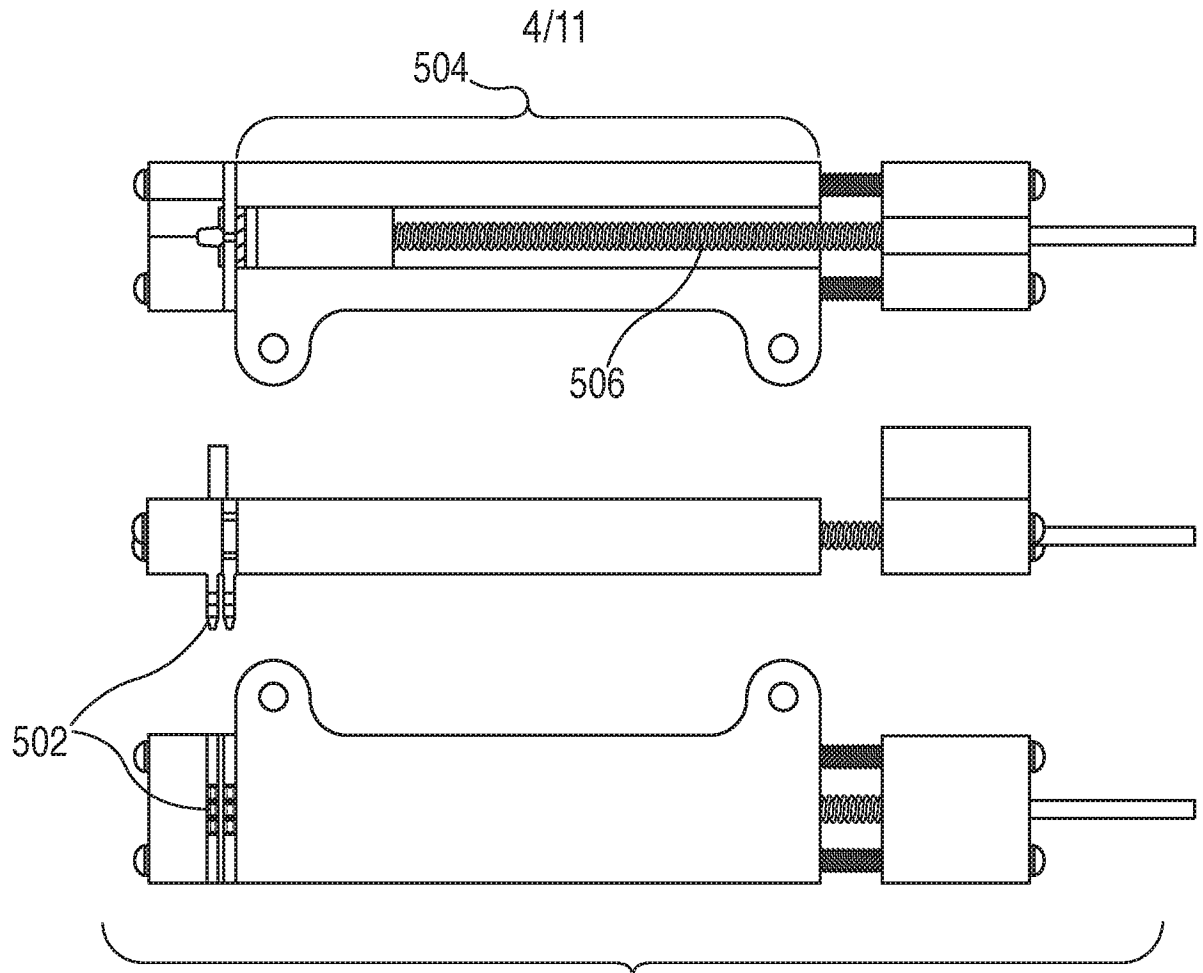


FIG. 5

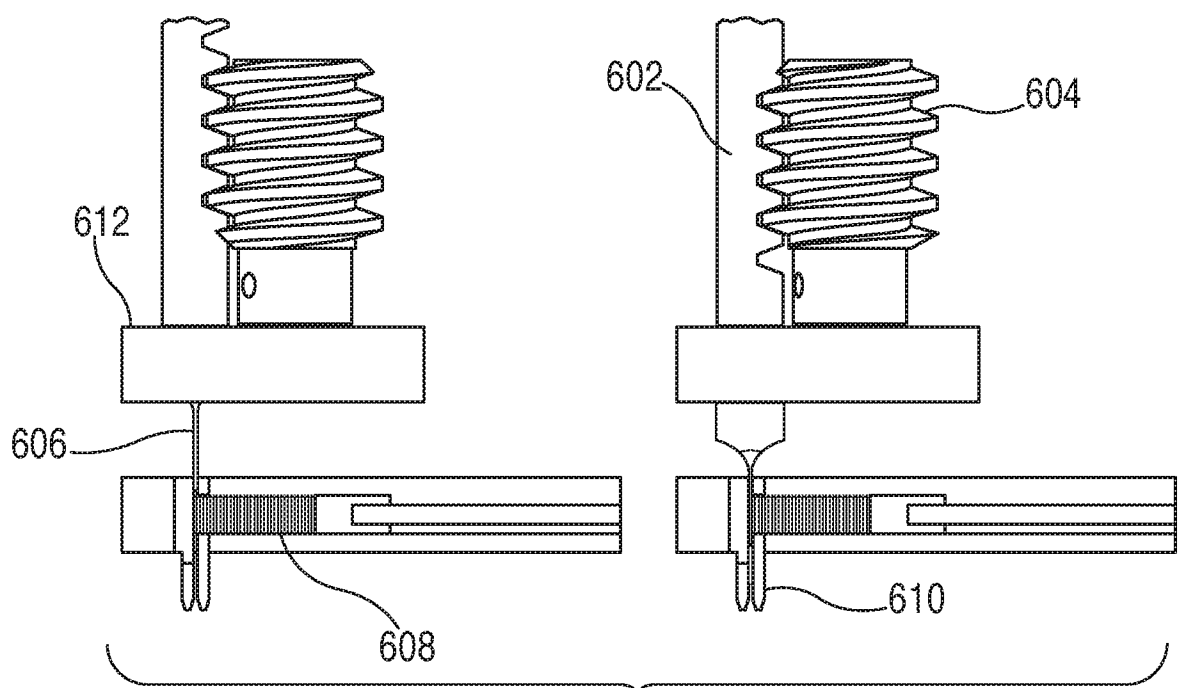
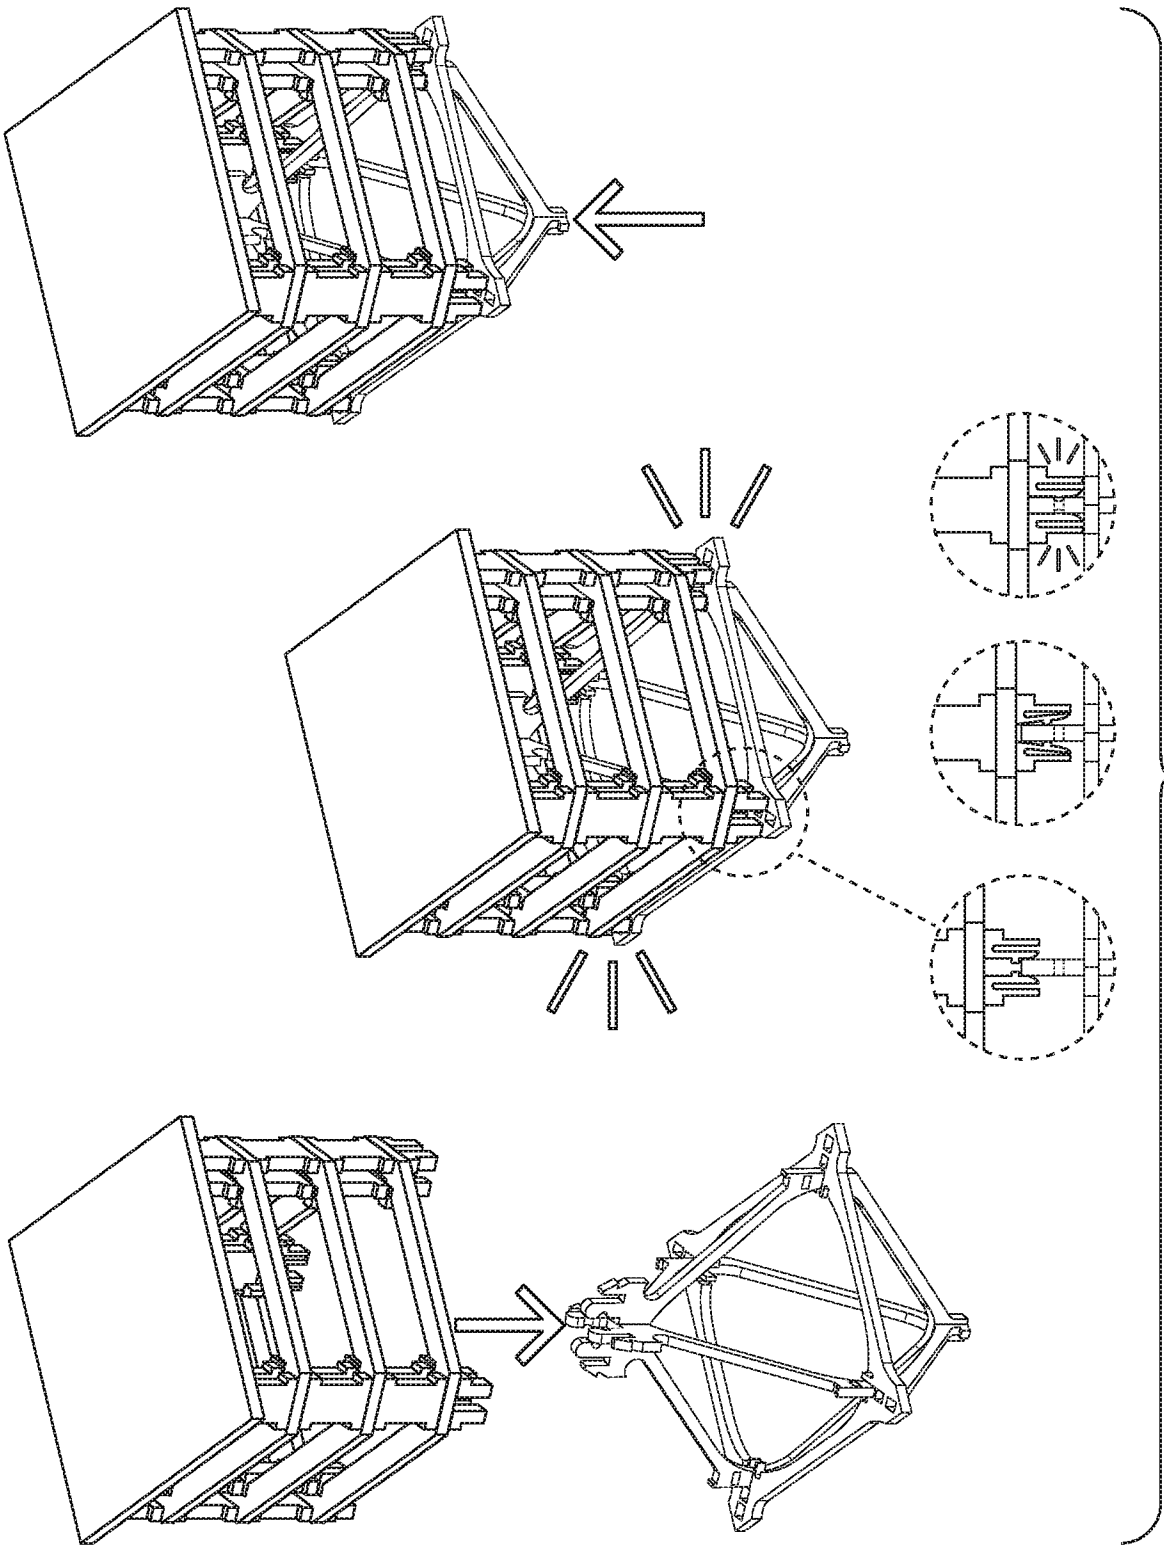


FIG. 6

5/11



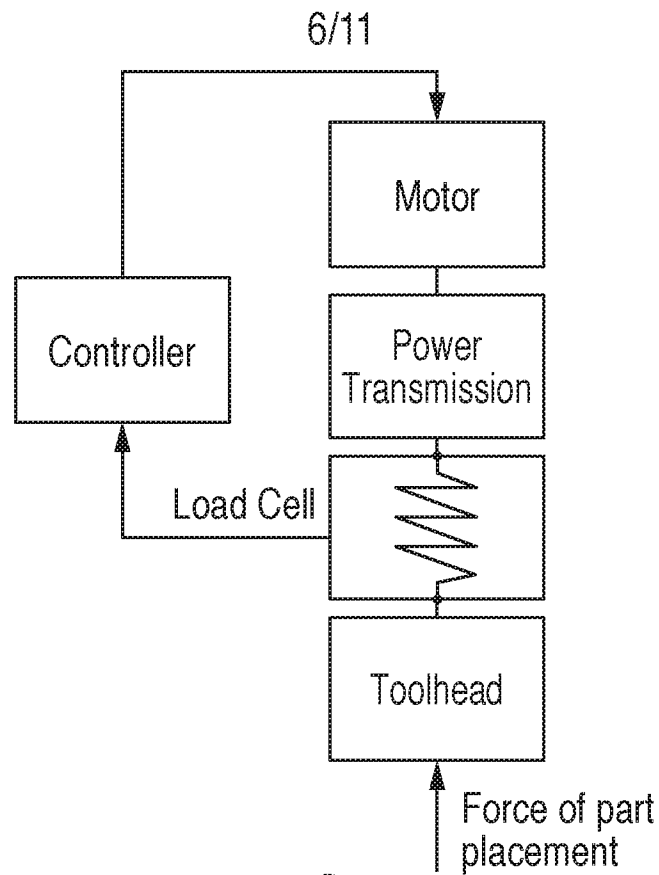


FIG. 8

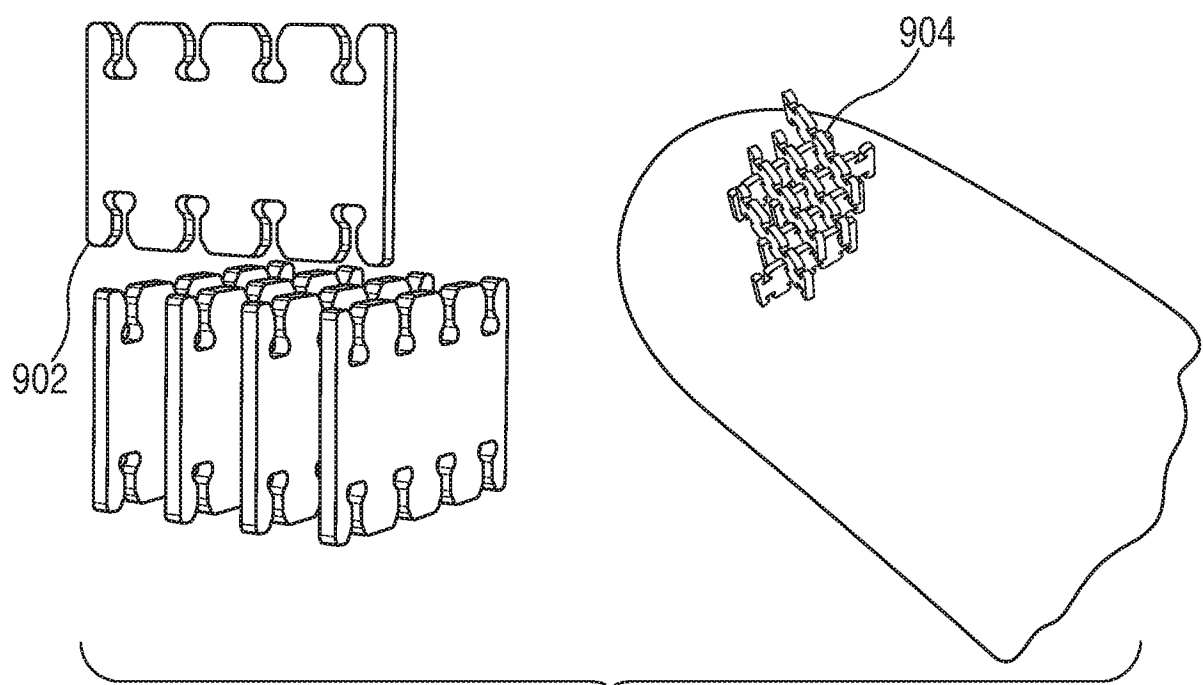


FIG. 9


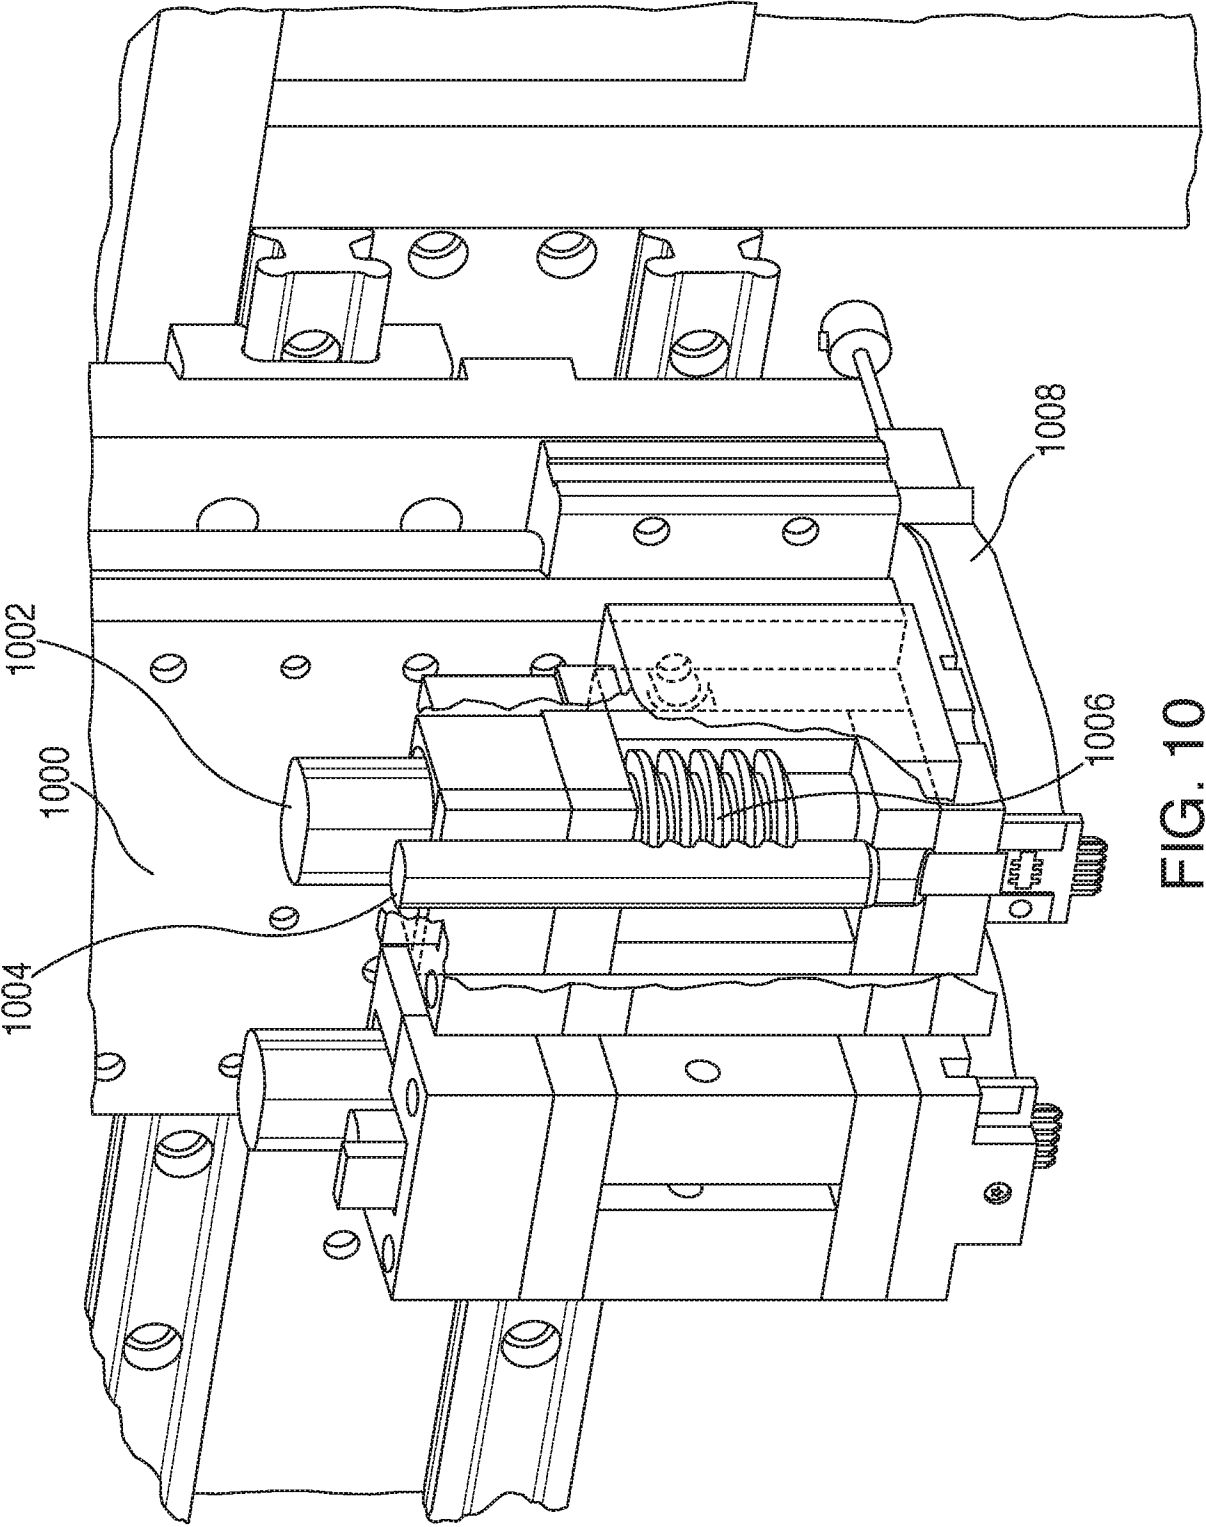


FIG. 10

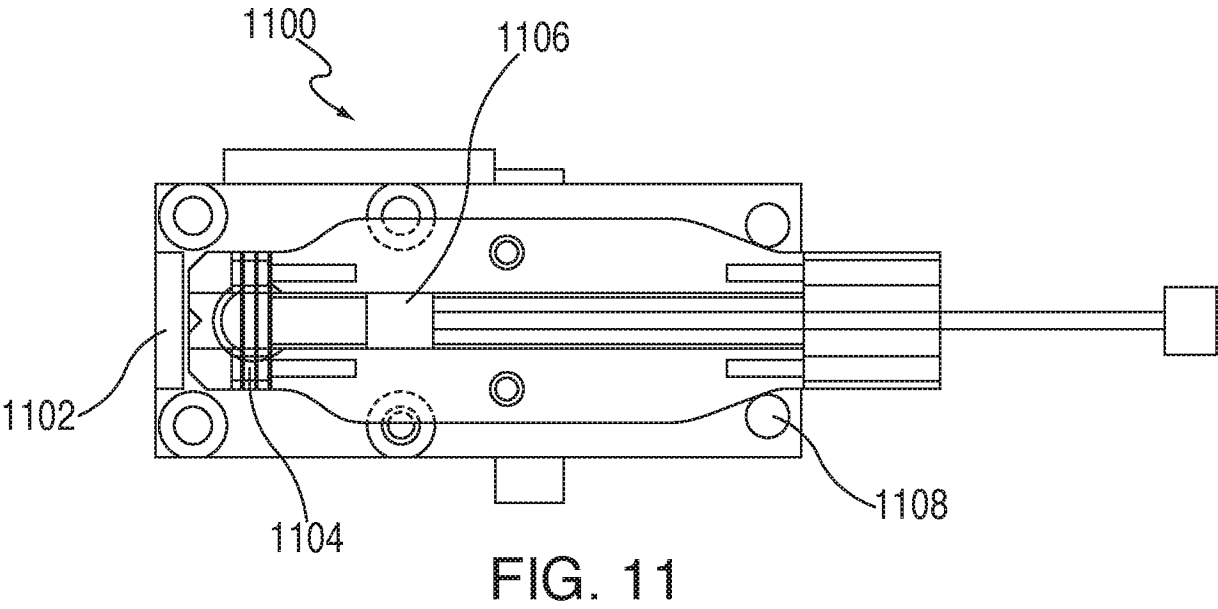

9/11


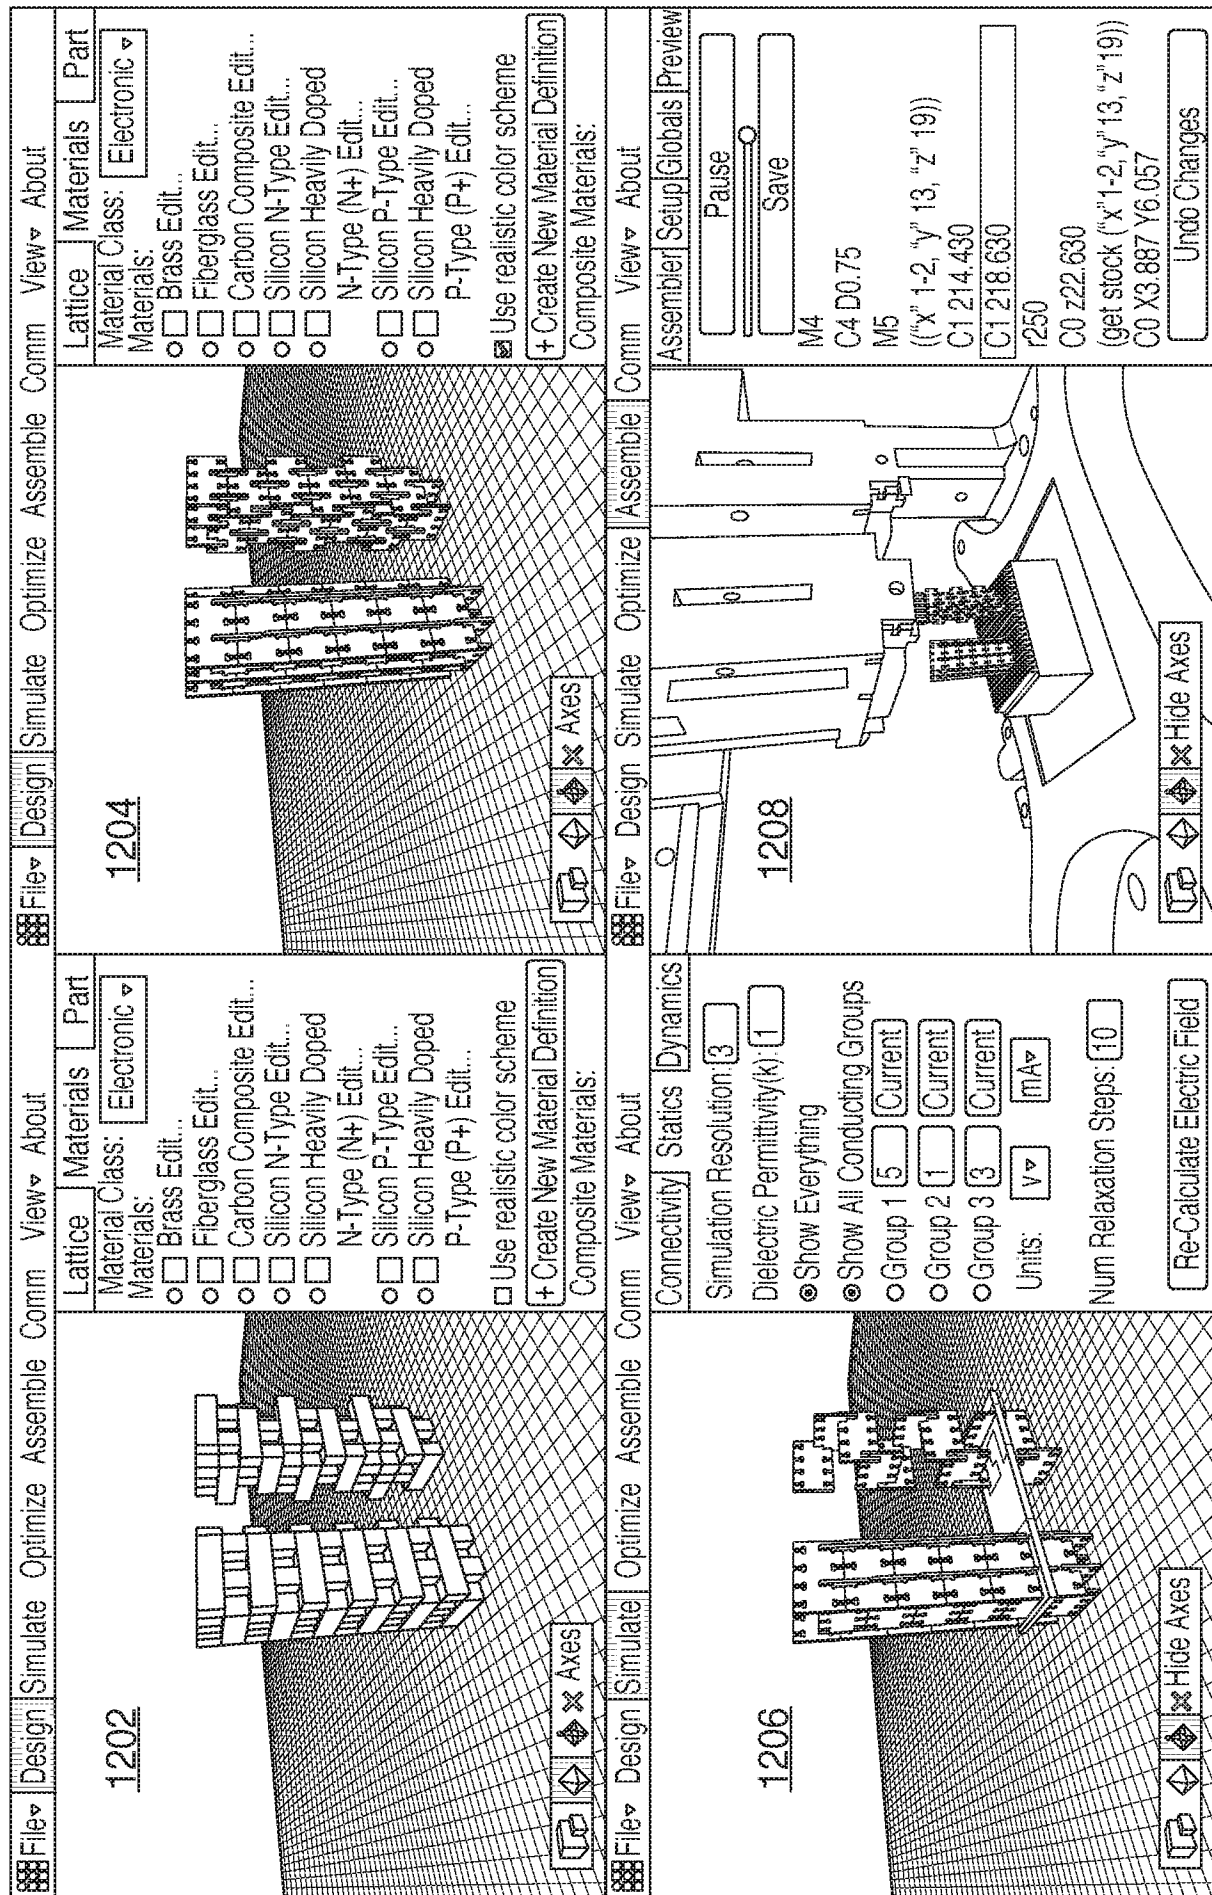


FIG. 12

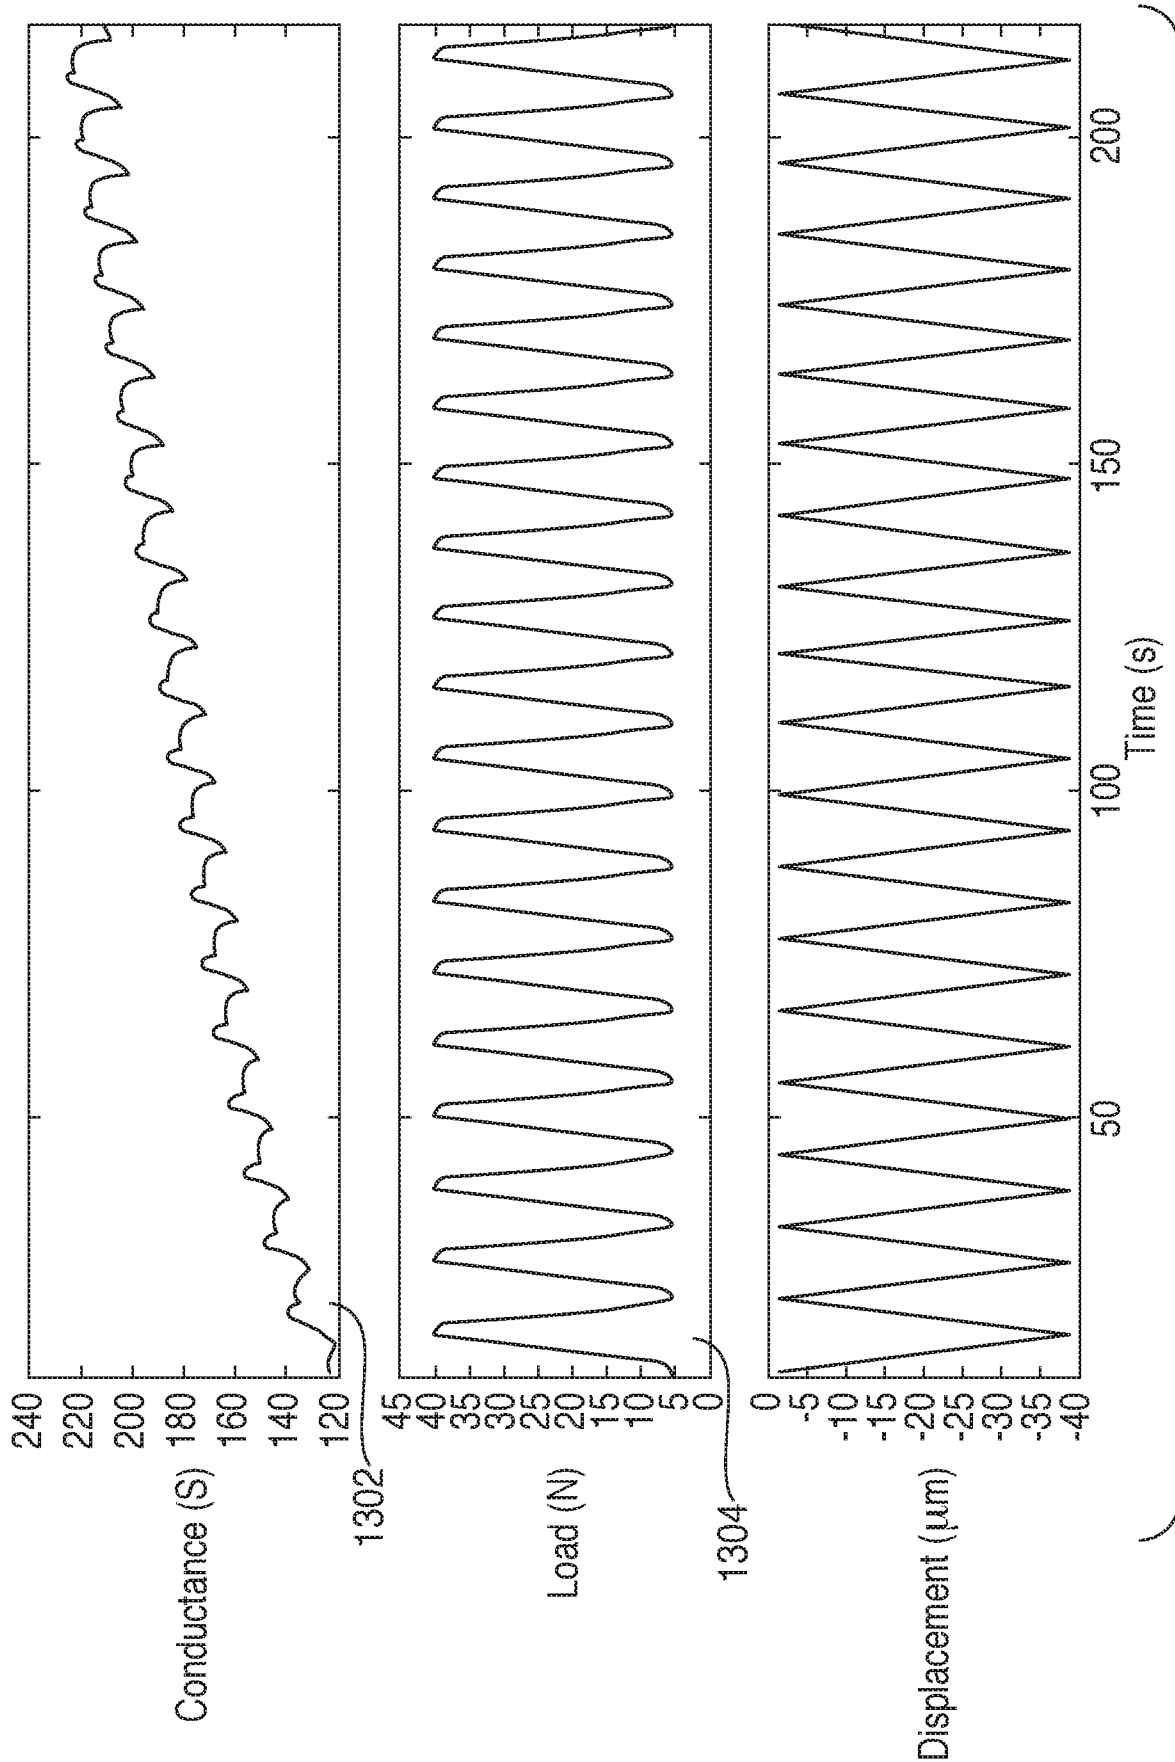

11/11

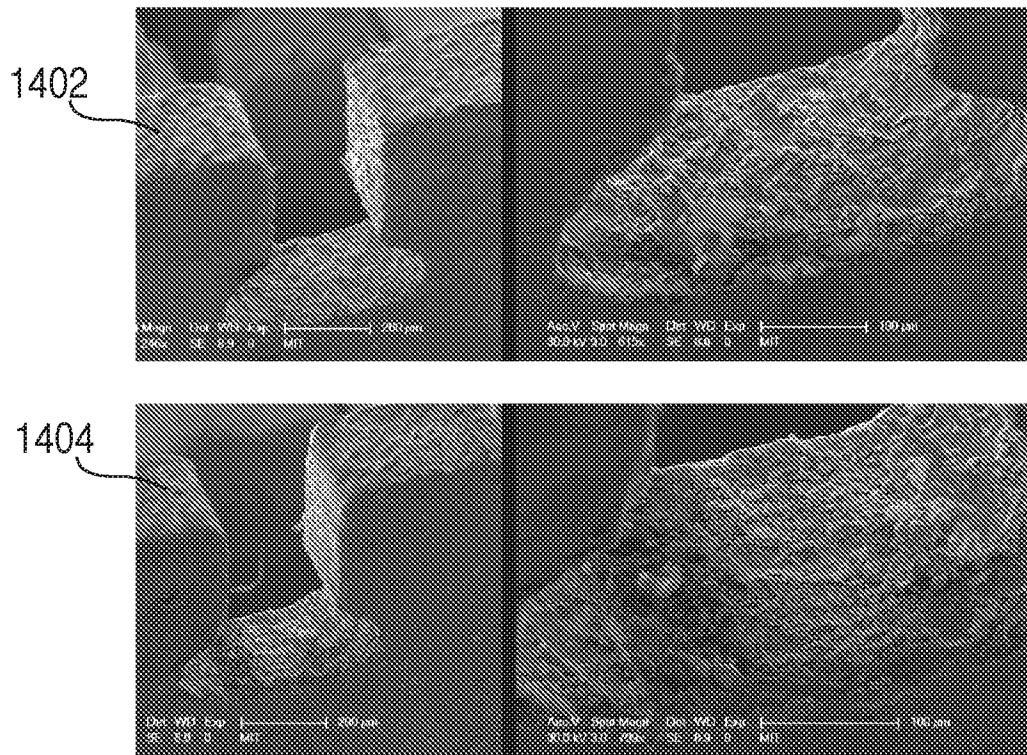


FIG. 14

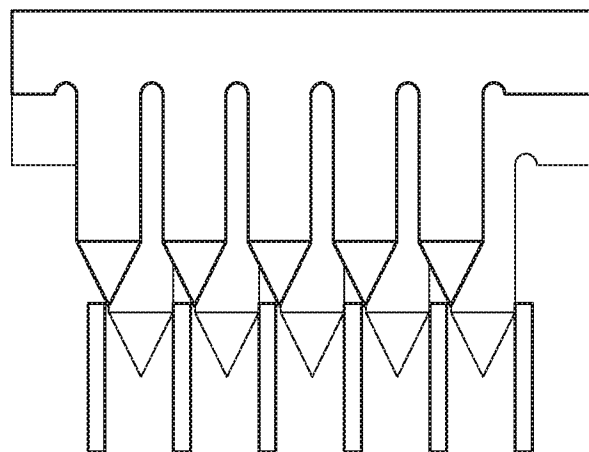


FIG. 15

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2016/028806

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - G06F 17/50; H01L 21/673 (2016.01)

CPC - G06F 17/50; H01L 21/67309 (2016.05)

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC - A63H 33/08; B32B 37/00; F16B 1/00; F16B 1/02; G06F 17/50; H01L 21/673

CPC - A63H 33/08; A63H 33/084; A63H 33/088; B32B 37/00; F16B 1/00; F16B 1/02; G06F 17/50; H01L 21/67309; H01L 21/67333; H01L 21/67346; H01L 21/67379

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
USPC - 403/345; 403/404 (keyword delimited)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PatBase, Google Patents, Google

Search terms used: voxel, assembly, building blocks

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages                              | Relevant to claim No.         |
|-----------|-----------------------------------------------------------------------------------------------------------------|-------------------------------|
| X<br>---  | US 2013/0189028 A1 (GERSHENFELD et al) 25 July 2013 (25.07.2013) entire document                                | 1-5, 8, 12, 15-18, 20, 26     |
| Y         |                                                                                                                 | 6, 7, 9-11, 13, 14, 19, 21-25 |
| Y         | US 2006/0226802 A1 (MARENTETTE) 12 October 2006 (12.10.2006) entire document                                    | 6                             |
| Y         | US 5,650,704 A (PRATT et al) 22 July 1997 (22.07.1997) entire document                                          | 7                             |
| Y         | US 2004/0020092 A1 (CHRISTENSEN) 05 February 2004 (05.02.2004) entire document                                  | 9, 10                         |
| Y         | US 2014/0300211 A1 (PEEK et al) 09 October 2014 (09.10.2014) entire document                                    | 11, 13, 14                    |
| Y         | US 2015/0019019 A1 (OPTOFORCE MUSZAKI FEJLESZTU ES INNOVACIOS KFT) 15 January 2015 (15.01.2015) entire document | 19                            |
| Y         | US 4,133,235 A (GERBER) 09 January 1979 (09.01.1979) entire document                                            | 21-25                         |
| A         | US 5,378,185 A (BAN) 03 January 1995 (03.01.1995) entire document                                               | 1-26                          |
| A         | US 2009/0276070 A1 (BURKES et al) 05 November 2009 (05.11.2009) entire document                                 | 1-26                          |
| A         | US 2008/0109103 A1 (GERSHENFELD et al) 08 May 2008 (08.05.2008) entire document                                 | 1-26                          |

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

|                                                                                                                                                                         |                                                                                                                                                                                                                                                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| * Special categories of cited documents:                                                                                                                                | "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention                                              |
| "A" document defining the general state of the art which is not considered to be of particular relevance                                                                | "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone                                                                     |
| "E" earlier application or patent but published on or after the international filing date                                                                               | "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art |
| "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) | "&" document member of the same patent family                                                                                                                                                                                                    |
| "O" document referring to an oral disclosure, use, exhibition or other means                                                                                            |                                                                                                                                                                                                                                                  |
| "P" document published prior to the international filing date but later than the priority date claimed                                                                  |                                                                                                                                                                                                                                                  |

Date of the actual completion of the international search

09 August 2016

Date of mailing of the international search report

25 AUG 2016

Name and mailing address of the ISA/

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents  
P.O. Box 1450, Alexandria, VA 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300  
PCT OSP: 571-272-7774

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2016/028806

## Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2. ☐ Claims Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
  
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:  
See supplemental page

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:  
1-26

### Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

Continued from Box No. III Observations where unity of invention is lacking

This application contains the following inventions or groups of inventions which are not so linked as to form a single general inventive concept under PCT Rule 13.1. In order for all inventions to be examined, the appropriate additional examination fees must be paid.

Group I, claims 1-26, drawn to an apparatus for automated assembly of digital materials.

Group II, claim 27, drawn to a method of measuring and evaluating the electrical interfaces between parts of a digital material assembly.

The inventions listed as Groups I-II do not relate to a single general inventive concept under PCT Rule 13.1 because, under PCT Rule 13.2, they lack the same or corresponding special technical features for the following reasons: the special technical feature of the Group I invention: a multi-axis motion gantry for positioning a toolhead spatially with respect to a structure being built; and a part placement mechanism used to drive a blade that pushes parts out of a magazine and into the assembled structure as claimed therein is not present in the invention of Group II. The special technical feature of the Group II invention: preloading conductive digital material components in compression; building a test specimen from said components; loading the specimen in compression using a material testing machine; varying the compression load between a lower range and an upper range, while measuring the conductance across the specimen using a resistive measurement; and measuring the ratcheting increase in the conductance of the specimen as the load is cycled as claimed therein is not present in the invention of Group I.

Groups I and II lack unity of invention because even though the inventions of these groups require the technical feature of automated assembly of digital materials, this technical feature is not a special technical feature as it does not make a contribution over the prior art.

Specifically, US 2013/0189028 A1 (GERSHENFELD et al) 25 July 2013 (25.07.2013) teaches automated assembly of digital materials (Para. 20).

Since none of the special technical features of the Group I or II inventions are found in more than one of the inventions, unity of invention is lacking.