



Office de la Propriété  
Intellectuelle  
du Canada

Un organisme  
d'Industrie Canada

Canadian  
Intellectual Property  
Office

An agency of  
Industry Canada

CA 2655657 A1 2008/01/03

(21) **2 655 657**

(12) **DEMANDE DE BREVET CANADIEN**  
**CANADIAN PATENT APPLICATION**

(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2007/06/25  
(87) Date publication PCT/PCT Publication Date: 2008/01/03  
(85) Entrée phase nationale/National Entry: 2008/12/16  
(86) N° demande PCT/PCT Application No.: US 2007/014755  
(87) N° publication PCT/PCT Publication No.: 2008/002542  
(30) Priorités/Priorities: 2006/06/27 (US11/475,459);  
2007/05/23 (US11/805,389)


(51) Cl.Int./Int.Cl. *H02J 1/12* (2006.01)

(71) Demandeur/Applicant:  
JONSSON, STANLEY C., US

(72) Inventeur/Inventor:  
JONSSON, STANLEY C., US

(74) Agent: SMART & BIGGAR

(54) Titre : EOLIENNE DOTEÉE DE PROFILS AÉRODYNAMIQUES A PAS VARIABLE  
(54) Title: WIND TURBINE HAVING VARIABLE PITCH AIRFOILS

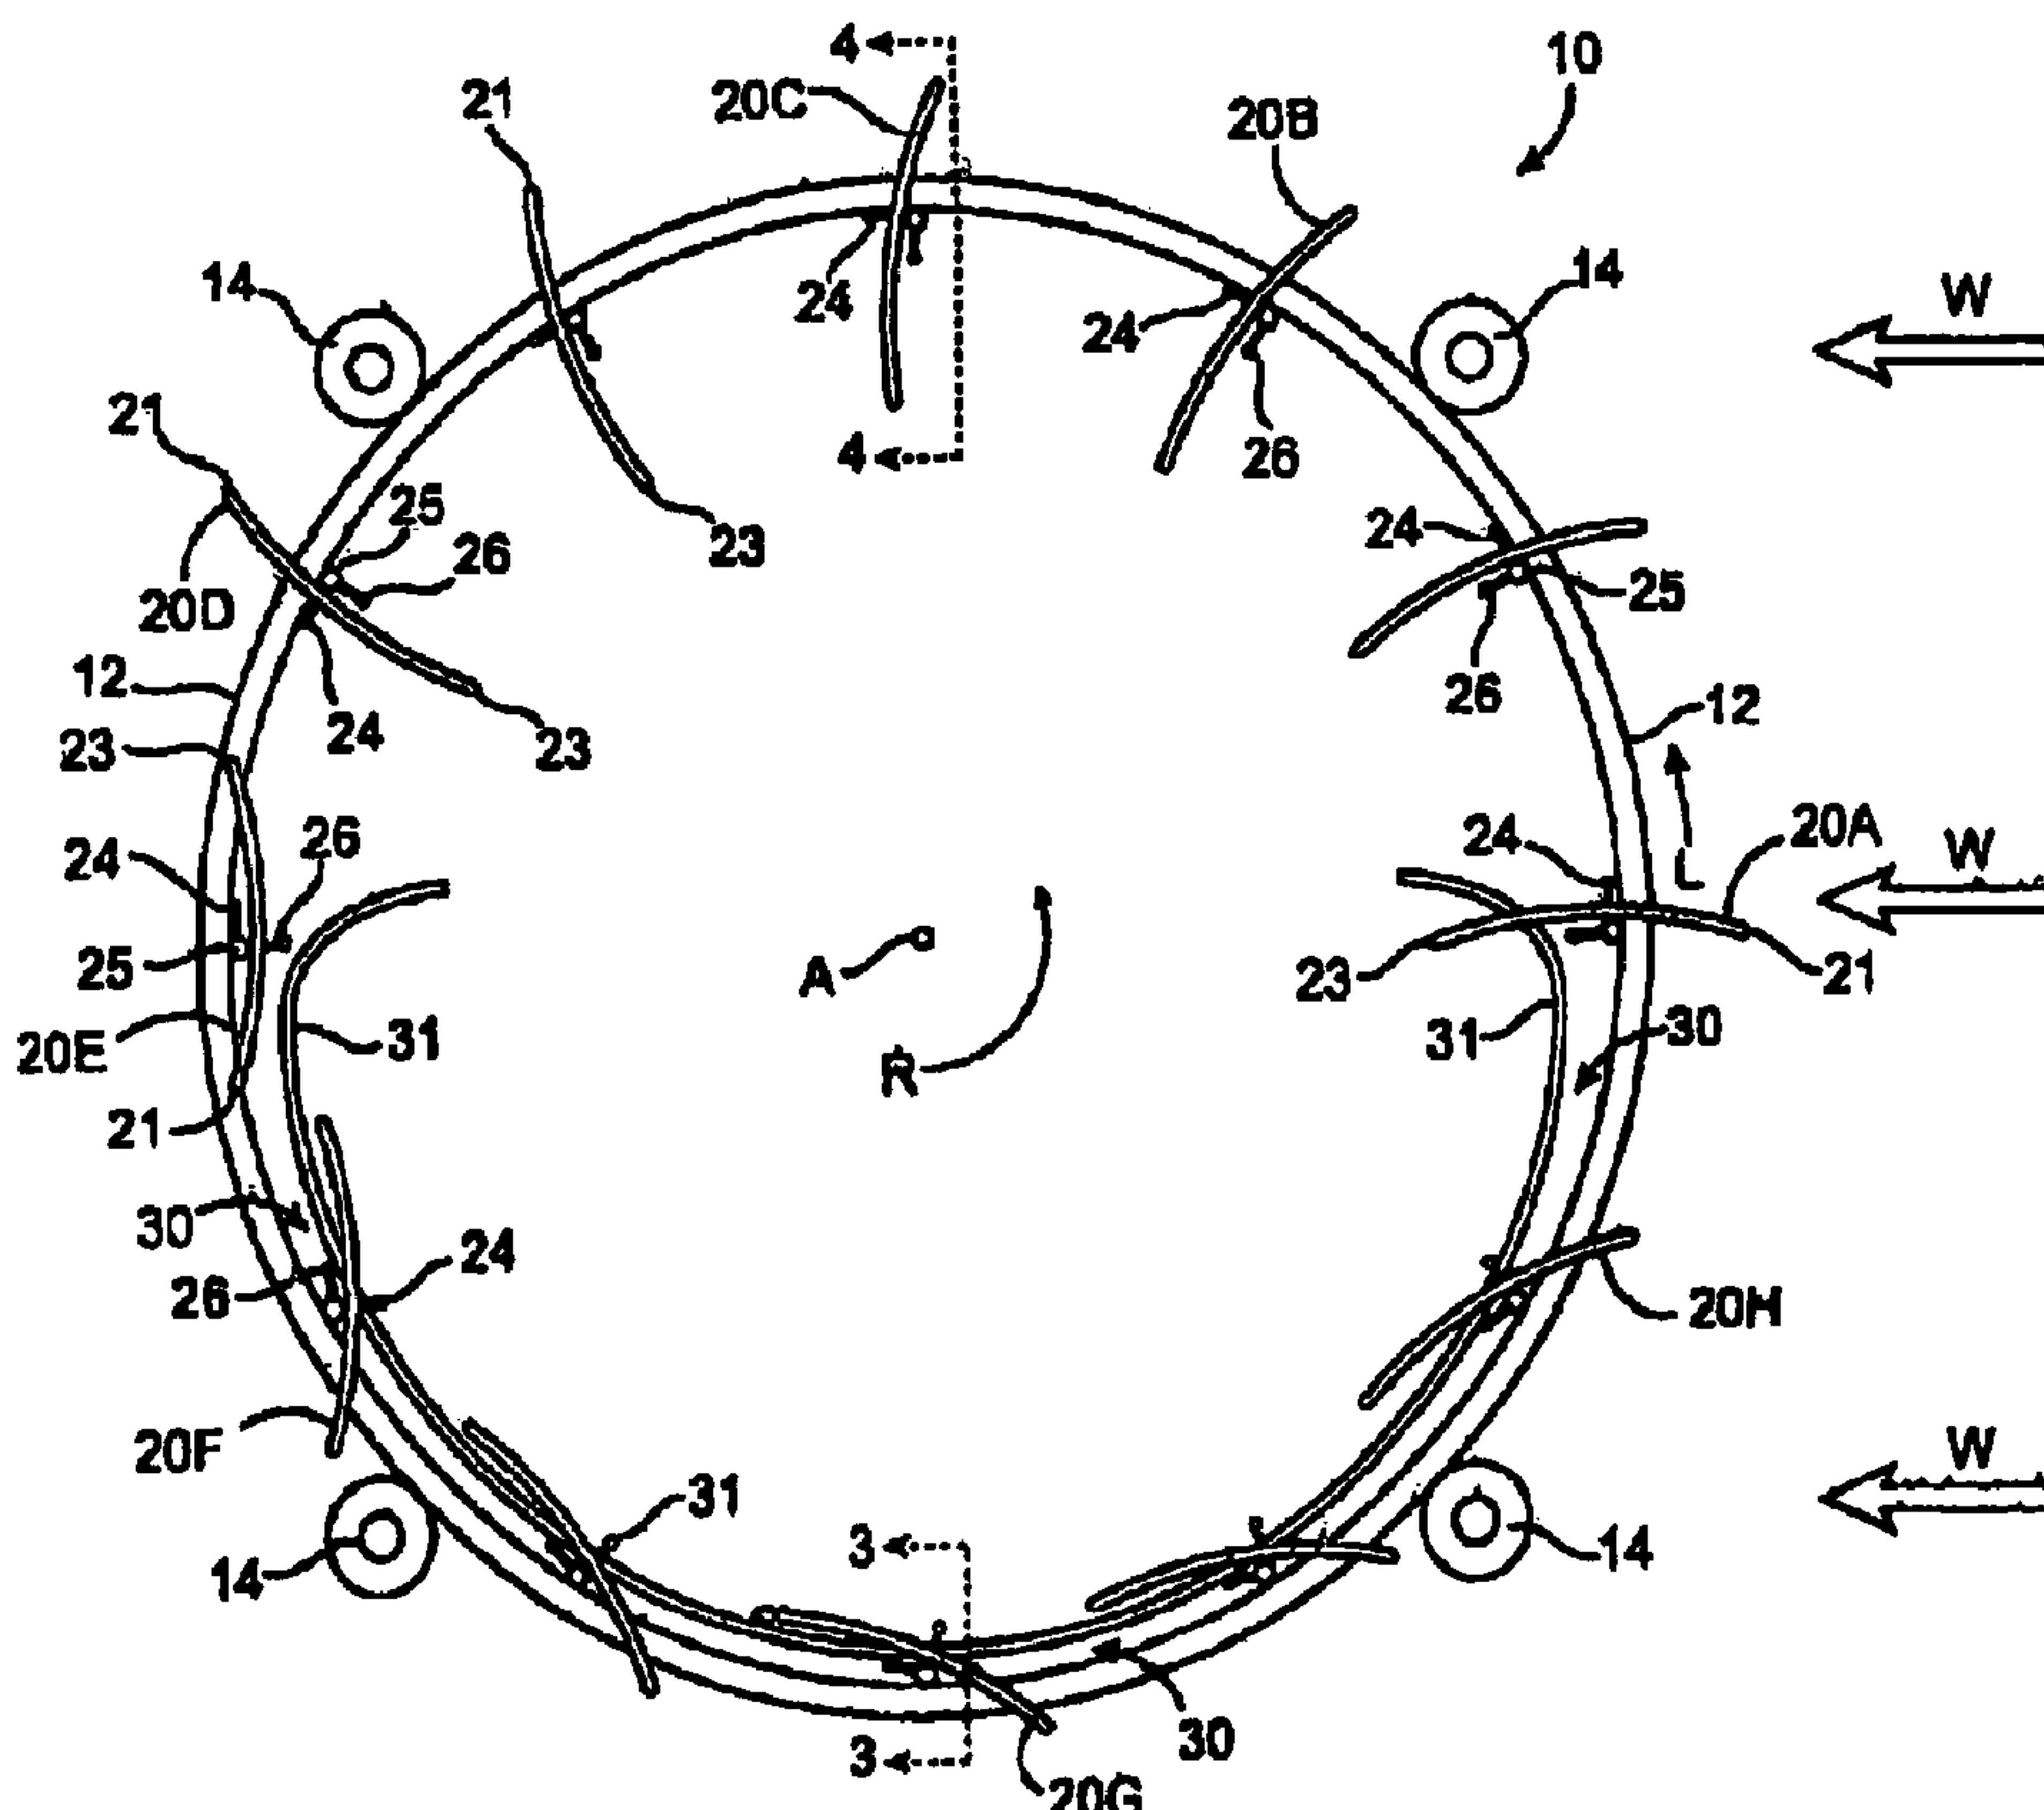

**FIG. 1**

(57) Abrégé/Abstract:

A wind turbine, having: a rotatable frame; a plurality of airfoils mounted to the rotatable frame, wherein the airfoils extend parallel to an axis of rotation of the rotatable frame, and wherein the airfoils are individually pivotable with respect to the rotatable frame; and a



**(57) Abrégé(suite)/Abstract(continued):**

mechanism that holds each of the airfoils in a high lift / high drag position when the airfoil moves in a direction of air flow. The wind turbine may optionally include a rotational stop to prevent rotation of the airfoil from a high drag position to a low drag position when the airfoil is moving in the direction of the wind flow.

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
3 January 2008 (03.01.2008)

PCT

(10) International Publication Number  
WO 2008/002542 A3

## (51) International Patent Classification:

H02J 1/12 (2006.01)

AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

## (21) International Application Number:

PCT/US2007/014755

## (22) International Filing Date: 25 June 2007 (25.06.2007)

## (25) Filing Language: English

## (26) Publication Language: English

## (30) Priority Data:

11/475,459 27 June 2006 (27.06.2006) US  
11/805,389 23 May 2007 (23.05.2007) US

## (71) Applicant and

(72) Inventor: JONSSON, Stanley, C [US/US]; 442 Hillcrest Road, San Mateo, California 94402 (US).

(74) Agents: HECKADON, David, R et al.; GORDON &amp; REES LLP, 101 West Broadway, Suite 1600, San Diego, California 92101 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Published:

— with international search report

(88) Date of publication of the international search report: 28 August 2008

## (54) Title: WIND TURBINE HAVING VARIABLE PITCH AIRFOILS

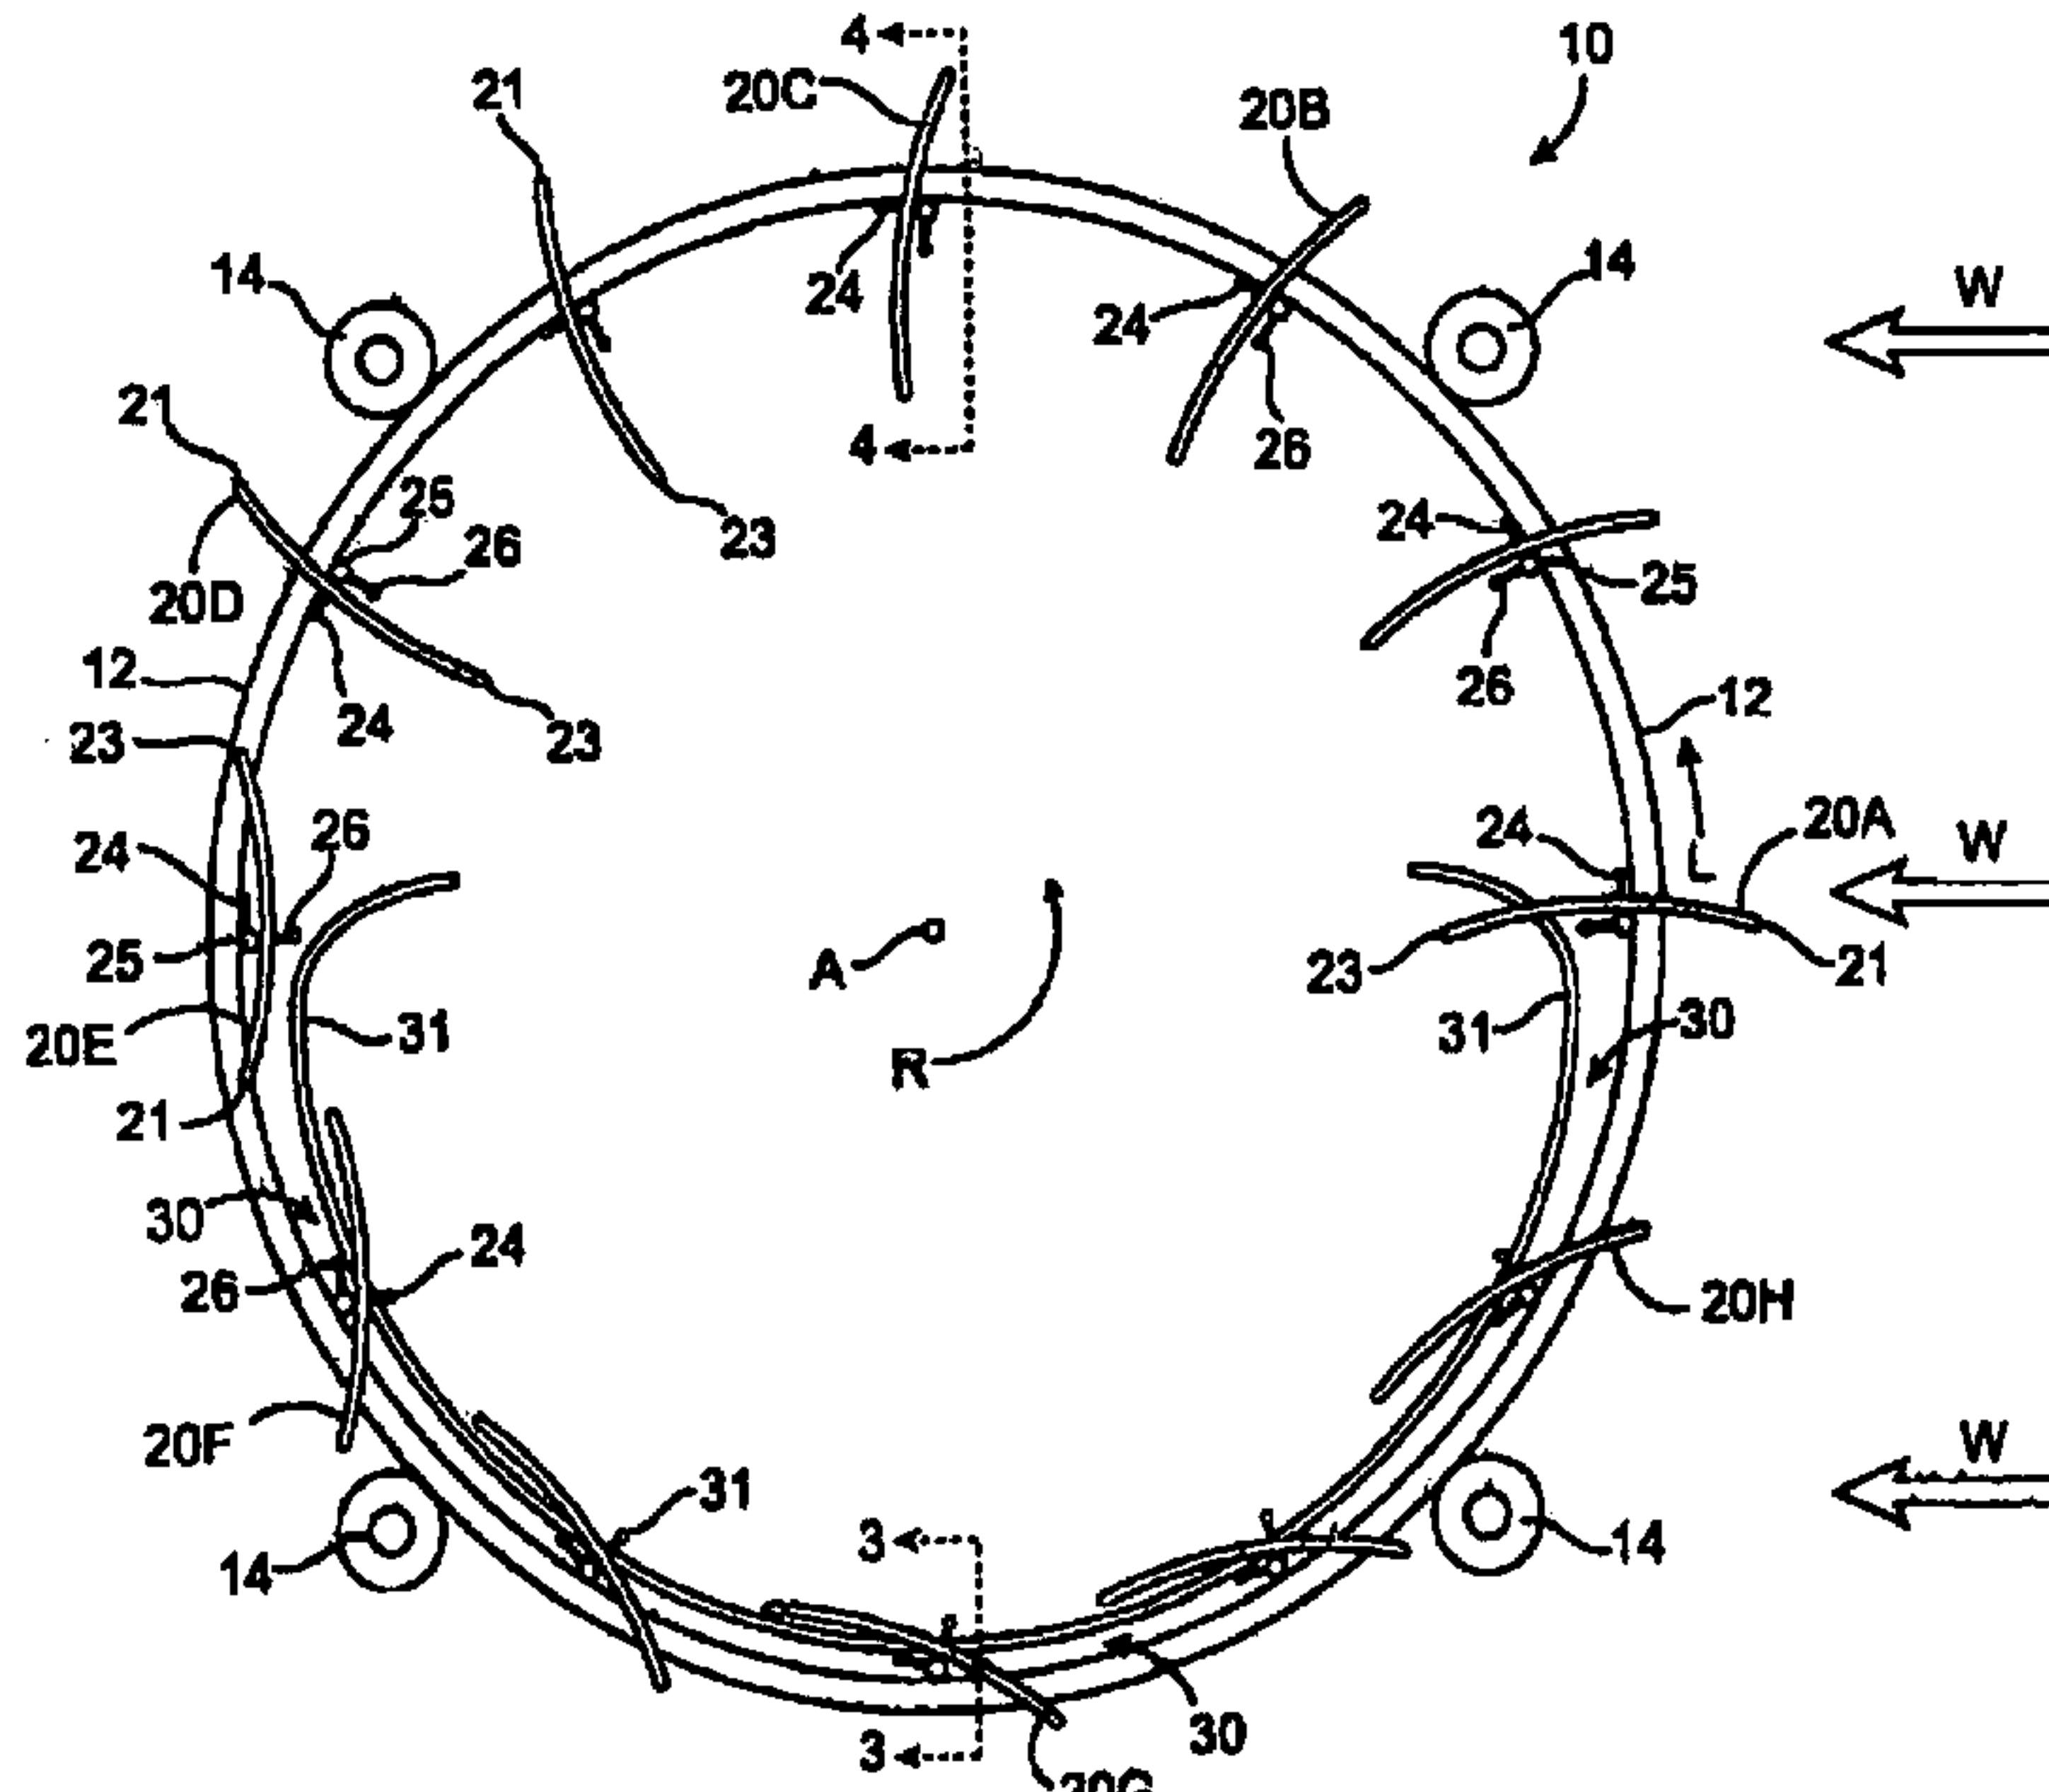


FIG. 1

(57) Abstract: A wind turbine, having: a rotatable frame; a plurality of airfoils mounted to the rotatable frame, wherein the airfoils extend parallel to an axis of rotation of the rotatable frame, and wherein the airfoils are individually pivotable with respect to the rotatable frame; and a mechanism that holds each of the airfoils in a high lift / high drag position when the airfoil moves in a direction of air flow. The wind turbine may optionally include a rotational stop to prevent rotation of the airfoil from a high drag position to a low drag position when the airfoil is moving in the direction of the wind flow.

WO 2008/002542 A3

**WIND TURBINE HAVING VARIABLE PITCH AIRFOILS****TECHNICAL FIELD:**

5 The present invention relates generally to electricity producing wind turbines, and in particular to wind turbines having airfoils.

**BACKGROUND OF THE INVENTION:**

Many conventional wind turbine designs already exist for producing electricity. Most commonly, such designs involve a single large propeller mounted at the top end of a 10 vertical mast. Air flow across the propeller causes the propeller to turn, which in turn rotates a generator to produce electricity.

Such conventional wind turbines suffer numerous disadvantages. First, they involve large propellers that must be mounted a considerable distance above the ground. Thus, they require a tall and sturdy mast to which the propeller is mounted. A second 15 disadvantage of large rotating propeller blade systems is that they tend to kill a large number of birds. A third disadvantage of such designs is that the generator is typically positioned at the center of the rotating blades. Thus, the generator is mounted at the top of the mast along with the propeller. This requires the mast to be sufficiently strong to support both the propeller and the generator. As a result, it is difficult to access the turbine for 20 repairs and servicing. A fourth disadvantage of conventional propellers is that the blades rotate in a direction perpendicular to the wind direction. As a result, propeller blade velocity through the air increases with the distance from the center of rotation of the propeller. This unfortunately requires a variable and complex blade section geometry.

**SUMMARY OF THE INVENTION:**

25 The present invention provides a wind turbine, with: a rotatable frame; a plurality of airfoils mounted to the rotatable frame, the wherein the airfoils extend parallel to an axis of rotation of the rotatable frame, and wherein the airfoils are individually pivotable with respect to the rotatable frame; and a mechanism that holds each of the airfoils in a high lift / high drag position when the airfoil moves in the direction of air flow.

In accordance with the present invention, spaces between the airfoils open when the airfoils are moving in the direction of the airflow, but close when the airfoils are moving in a direction opposite to the direction of the airflow. In one embodiment, the leading and trailing edges of successive airfoils are in contact with one another when the airfoils move 5 in a direction opposite to the direction of air flow.

Optionally, the wind turbine may also comprise a rotational stop connected to each of the airfoils to limit pivoting of the airfoils with respect to the rotatable frame to prevent rotation of the air foil from a high drag position to a low drag position when the airfoil is 10 moving in the direction of the air flow. Specifically, the rotational stop limits pivoting of the airfoils with respect to the rotatable frame to prevent rotation of the air foil from a high lift / high drag position to a low drag position when the airfoil is moving in the direction of the air flow.

15        Optionally as well, the wind turbine may also comprise a channel extending around a portion of the rotatable frame; and a guide on each of the plurality of airfoils, the guide being dimensioned to pass through the channel, wherein the guide prevents rotation of the airfoil with respect to the rotatable frame as the airfoil moves in a direction opposite to the direction of air flow. Specifically, the guide moving in the channel positions the airfoil 20 at the low drag position as the airfoil moves in a direction opposite to the direction of air flow.

Airflow perpendicular to the axis of rotation of the rotatable frame causes the rotatable frame to rotate. The wind turbine is preferably positioned horizontally such that it rotates about a vertical axis. Alternatively, however, the wind turbine may be positioned 25 vertically such that it rotates about a horizontal axis.

A first advantage of the present invention is that, by using airfoils, both "lift" and "drag" may be used to turn the rotatable frame. Specifically, lift caused by air flow over the airfoil causes the rotatable frame to rotate when the airfoils are oriented such that their leading and trailing edges are aligned with the direction of the wind when the airfoil is 30 positioned furthest into the direction of the wind. In addition, drag caused by air flow over the airfoil causes the rotatable frame to rotate when the leading and trailing edges of the

airfoil are perpendicular to the direction of the wind when the airfoil is moving in the direction of the wind.

In one embodiment of the invention where spaces between the airfoils close when the airfoils are moving in a direction opposite to the direction of the airflow. This is

5 particularly advantageous in that it would eliminate airflow between successive airfoils, thereby reducing drag on the rotating turbine. This can be achieved by having the leading and trailing edges of successive airfoils contact with one another when the airfoils move in a direction opposite to the direction of air flow.

10 A second advantage of using airfoils is that the same airfoil cross section can be used across the entire width of the airfoil. Therefore, power output of the wind turbine can be increased simply by increasing the width of the airfoils. In contrast, with conventional propeller systems, it is necessary to increase the diameter of the propellers to increase system power output.

15 A third advantage of the present invention is that a generator drive wheel may be positioned to contact the outer perimeter of the rotatable frame of the device. In contrast, existing wind turbines operate with their generator drive in contact with a rotating mechanism that is disposed at the center of a rotating propeller. As a result, the present

20 system offers gearing advantages due to the comparatively large sized circular frame in contact with the comparatively small sized drive wheel. As a result, power is efficiently generated by the wind turbine due to minimal friction losses translating power into generator rotation.

A fourth advantage is that the present invention has a low center of gravity.

25 Therefore, the present wind turbine is very stable. Moreover, the present system does not require a strong, heavy mast to support a propeller and turbine some distance above the ground. This considerably reduces the weight and size limitations of the present system, resulting in cost savings as compared to traditional designs. Furthermore, having the generator drive wheel (and the turbine itself) positioned close to the ground permits easy

30 access for turbine / drive system repairs and servicing.

A fifth advantage of the present airfoil design is that each of the airfoils experience the same wind velocity along the entire length of their leading edge. Equal wind velocity at all points along the leading edge of the airfoil allows a single simplified airfoil cross section along the entire airfoil length. Thus, the wind turbine horizontal width and not 5 its vertical diameter determines power generation. Moreover, having the airfoils disposed at the perimeter of the device results in the longest possible torque lever arm. This results in the most torque per unit of airfoil force generation.

**BRIEF DESCRIPTION OF THE FIGURES:**

Fig. 1 is a top plan view of the wind turbine.

10 Fig. 2 is a top perspective view of the wind turbine.

Fig. 3 is a sectional side elevation view of one of the airfoils 20 mounted onto rotatable frame 12 taken along line 3-3 in Fig. 1.

Fig. 4 is a sectional side elevation view of another of the airfoils 20 mounted onto rotatable frame 12 taken along line 4-4 in Fig. 1.

15 Fig. 5 is a top plan view of a second embodiment of the wind turbine.

**DETAILED DESCRIPTION OF THE FIGURES:**

Figs. 1 and 2 are top plan and perspective views of the present invention, the operation of which can be understood, as follows.

Wind turbine 10 includes a rotatable frame 12 having a plurality of airfoils 20 attached thereto. Airfoils 20 are mounted to pivot with respect to rotatable frame 12, as will be fully explained. Rotatable frame 12 may be a circular ring as shown. Rotatable frame 12 may be supported by a plurality of wheels 14 and 16, as shown. In one embodiment shown in Fig. 2, rotatable frame 12 may have a recessed groove 13 in which wheels 14 are received. Wheels 16 support underneath rotatable frame 12, as also shown.

25 As will be explained, wind moving in direction W acts upon the various pivotable airfoils 20 to cause rotatable frame 12 to move in a counterclockwise direction, thus rotating in direction R around vertical axis of rotation A. As such, rotatable frame 12 circles around axis A while the individual airfoils 20 pivot to point in different directions

with respect to rotatable frame 12, as will be fully explained. An optional generator drive wheel 15 (or wheel 14 or 16) in contact with moving rotatable frame 12 may be used for power generation. Alternatively, rotatable frame 12 may itself comprise a rotor of an electric generator.

5 As can be seen, airfoils 20 are mounted to rotatable frame 12 such that they extend parallel to the axis of rotation A of rotatable frame. An optional rotational stop 24 is provided that holds each of airfoils 20 in a high drag position when the airfoil 20 moves in the direction of air flow (i.e.: in direction W). As will be shown, rotational stop 24 selectively prevents rotation of airfoil 20 with respect to rotatable frame 12 at various

10 locations when airfoil 20 rotates around axis A. At some locations, rotational stop 24 orients airfoil 20 at a position such that lift caused by air flow over airfoil 20 causes rotatable frame 12 to rotate. At other locations, rotational stop 24 orients airfoils 20 at a position such that drag caused by air flow over airfoil 20 causes rotatable frame 12 to rotate. As will be explained, rotational stops 24 limits pivoting of airfoils 20 with respect to rotatable frame 12

15 to prevent rotation of the individual airfoils 20 from a high drag position to a low drag position when the airfoil is moving in the direction of the air flow W.

Wind turbine 10 also optionally comprises a channel 30 extending around a portion of the rotatable frame 12. Channel 30 is seen as a gap between rotatable frame 12 and member 31. A guide 26 may also be provided on each of individual airfoils 20. As seen

20 in Fig. 1, guides 26 are dimensioned to pass along through channel 30 when rotatable frame 12 rotates in direction R. Guides 26 prevent rotation of airfoils 20 with respect to rotatable frame 12 as airfoils 20 move along through channel 30 (i.e. in a direction opposite to the direction of air flow W). Thus, guides 26 position airfoils 20 at low drag positions as the airfoils 20 move in a direction opposite to the direction of air flow W.

25 The operation of wind turbine 10 is best understood by viewing the orientation of the various airfoils 20 at locations around rotatable frame 12, as follows.

Airfoil 20A is positioned furthest into the direction of the wind. Airfoil 20A is free to rotate about its pivot. When wind W passes over airfoil 20A, airfoil 20A will rotate such that its leading edge 21 and its trailing edge 22 are aligned with the direction of the

30 wind W. As a result of wind W passing over airfoil 20A, lift is produced as shown by arrow L. As such, lift L urges rotatable frame 12 to rotate in direction R.

Individual airfoils 20 are preferably set to rotate about an axis 25 that is positioned closer to their leading edge 21 than to their trailing edge 23. Accordingly, when the airfoil reaches position illustrated as 20B, wind W will tend to cause airfoil 20B to rotate about its own axis of rotation 25 in a counterclockwise direction. However, rotational stop

5 24 will prevent such rotation, causing airfoil 20B to increase its angle of attack against the wind.

By the time airfoil 20 reaches the position illustrated by airfoil 20C, the airfoil is positioned perpendicular to wind flow W. Thus, airfoil 20C provides considerable drag, further urging rotatable frame 12 to rotate in direction R.

10 As frame 12 rotates, the airfoil will eventually reach the position illustrated by airfoil 20D. At such time, wind W pushing on the trailing edge 22 of the airfoil will cause the airfoil to "flip over" to the position shown by airfoil 20E.

15 Next, when the airfoil reaches the position shown by airfoil 20F, member 31 will contact the end of guide 26, as shown. Member 31 defines a channel 30 next to a portion of rotatable frame 12, as shown. Member 31 holds guide 26 such that airfoil 20 is not able to, rotate with respect to rotatable frame 12 as the airfoil moves from the position shown by airfoil 20F to 20G to 20H. Thus, member 31 and guide 26 operate together to hold airfoil 20 is a "low drag" position as it moves opposite to the direction of wind W.

20 Finally, immediately after the airfoil leaves the position shown by airfoil 20H, guide 26 will no longer contact member 31, and the airfoil will be free once again to pivot with respect to rotatable frame 12. Therefore, as airfoil 20 leaves position 20H, the wind W will act to push the trailing edge 23 of the airfoil to the position shown by airfoil 20A (i.e.: with the leading end 21 and the trailing edge 23 aligned in the direction of wind W).

25 Although the present wind turbine is shown in a horizontal orientation (i.e.: rotating about a vertical axis of rotation A), the present invention can also be constructed in a vertical orientation (i.e.: rotating about a horizontal axis of rotation).

Figs. 3 and 4 show sectional views through the present invention. Fig. 3 illustrates airfoil 20C, and Fig. 4 illustrates airfoil 20G. In that attached Figs, like reference numerals represent like elements.

Fig. 5 is an illustration of a second embodiment of the invention. Fig. 5 is similar to Fig. 1, in that spaces between airfoils (20A, 20B, 20C, 20D and 20E) open when the airfoils are moving in the direction of wind W. However, as seen in the embodiment of Fig. 5, these spaces between successive airfoils (20E, 20F, 20G and 20H) close when the airfoils are

5 moving in the direction opposite to wind W. As a result, there is no airflow between successive airfoils 20 when these airfoils are rotating into the wind (i.e.: moving from position 20E to position 20H). This has the advantageous affect of reducing drag on the turbine, thereby increasing its efficiency.

10 In one embodiment, the leading and trailing edges of successive airfoils 20 are dimensioned to be in contact with one another when the airfoils move in the direction opposite to the direction of air flow, as is seen in Fig. 5. It is to be understood that this same effect of closing the spaces between successive airfoils 20 (as the airfoils move from position 20E to 20H) can either be achieved by varying the length and also by varying the or  
15 spacing between the individual airfoils 20.

**WHAT IS CLAIMED IS:**

1. A wind turbine, comprising:
  - a rotatable frame;
  - a plurality of curved\_airfoils mounted to the rotatable frame, wherein the curved\_airfoils extend parallel to an axis of rotation of the rotatable frame, and wherein the curved\_airfoils are individually pivotable with respect to the rotatable frame; and
  - a mechanism that holds each of the curved airfoils in a high lift / high drag position when the airfoil moves in a direction of air flow.
2. The wind turbine of claim 1, wherein the mechanism comprises:
  - 10 a rotational stop connected to each of the curved\_airfoils to limit pivoting of the curved airfoils with respect to the rotatable frame to prevent rotation of the curved airfoil from a high drag position to a low drag position when the curved airfoil is moving in the direction of the air flow.
  3. The wind turbine of claim 2, wherein the rotational stop orients the curved airfoils at a position such that lift caused by air flow over the curved airfoil causes the rotatable frame to rotate.
  4. The wind turbine of claim 2, wherein the rotational stop orients the curved airfoils at a position such that drag caused by air flow over the curved airfoil causes the rotatable frame to rotate.
- 20 5. A wind turbine, comprising:
  - a rotatable frame;
  - a plurality of airfoils mounted to the rotatable frame, wherein the airfoils extend parallel to an axis of rotation of the rotatable frame, and wherein the airfoils are individually pivotable with respect to the rotatable frame;
  - 25 a mechanism that holds each of the airfoils in a high lift / high drag position when the airfoil moves in a direction of air flow;
  - a channel extending around a portion of the rotatable frame; and
  - 30 a guide on each of the plurality of airfoils, the guide being dimensioned to pass through the channel, wherein the guide prevents rotation of the airfoil with respect to the rotatable frame as the airfoil moves in a direction opposite to the direction of flow.

6. The wind turbine of claim 5, wherein the guide positions the airfoil at the low drag position as the airfoil moves in a direction opposite to the direction of air flow.

7. The wind turbine of claim 1, wherein air flow perpendicular to the axis of rotation of the rotatable frame causes the rotatable frame to rotate.

5 8. The wind turbine of claim 1, wherein the rotatable frame rotates about a vertical axis.

9. The wind turbine of claim 1, wherein each curved airfoil pivots about an axis positioned closer to the leading edge of the curved airfoil than to the trailing edge of the curved airfoil.

10 10. The wind turbine of claim 1, further comprising:  
a generator drive wheel in contact with the rotatable frame.

11. The wind turbine of claim 1, wherein the rotatable frame is a rotor of an electric generator.

12. A wind turbine, comprising:  
15 a rotatable frame;  
a plurality of airfoils mounted to the rotatable frame, wherein the airfoils extend parallel to an axis of rotation of the rotatable frame, wherein the airfoils are individually pivotable with respect to the rotatable frame, and wherein the airfoils are permitted to rotate with respect to the rotatable frame when moving in the direction of the 20 air flow; and  
a mechanism that holds each of the airfoils in a high lift / high drag position when the airfoil moves in a direction of air flow.

13. A wind turbine, comprising:  
a rotatable frame;  
25 a plurality of airfoils mounted to the rotatable frame, wherein the airfoils extend parallel to an axis of rotation of the rotatable frame, wherein the airfoils are individually pivotable with respect to the rotatable frame, and wherein the airfoils are not

permitted to rotate with respect to the rotatable frame when moving against the direction of the air flow; and

a mechanism that holds each of the airfoils in a high lift / high drag position when the airfoil moves in a direction of air flow.

5

14. A wind turbine, comprising:

a rotatable frame;

a plurality of airfoils mounted to the rotatable frame, the wherein the airfoils extend parallel to an axis of rotation of the rotatable frame, and wherein the airfoils are individually 10 pivotable with respect to the rotatable frame; and

a mechanism that holds each of the airfoils in a high lift / high drag position when the airfoil moves in a direction of air flow, wherein the airfoils are dimensioned such that leading and trailing edges of successive airfoils are in contact with one another when the airfoils move in a direction opposite to the direction of air flow.

15

15. The wind turbine of claim 14, wherein the mechanism comprises:

a rotational stop connected to each of the airfoils to limit pivoting of the airfoils with respect to the rotatable frame to prevent rotation of the air foil from a high drag position to a low drag position when the airfoil is moving in the direction of the air flow.

20

16. The wind turbine of claim 15, wherein the rotational stop orients the airfoils at a position such that lift caused by air flow over the airfoil causes the rotatable frame to rotate.

25

17. The wind turbine of claim 15, wherein the rotational stop orients the airfoils at a position such that drag caused by air flow over the airfoil causes the rotatable frame to rotate.

18. The wind turbine of claim 14, further comprising:

a channel extending around a portion of the rotatable frame; and

a guide on each of the plurality of airfoils, the guide being dimensioned to pass through the channel, wherein the guide prevents rotation of the airfoil with respect to the rotatable frame as the airfoil moves in a direction opposite to the direction of air flow.

19. The wind turbine of claim 18, wherein the guide positions the airfoil at the 5 low drag position as the airfoil moves in a direction opposite to the direction of air flow.

20. The wind turbine of claim 14, wherein air flow perpendicular to the axis of rotation of the rotatable frame causes the rotatable frame to rotate.

21. The wind turbine of claim 14, wherein the rotatable frame rotates about a vertical axis.

10 22. The wind turbine of claim 14, wherein each airfoil pivots about an axis positioned closer to the leading edge of the airfoil than to the trailing edge of the airfoil.

23. The wind turbine of claim 14, further comprising:  
a generator drive wheel in contact with the rotatable frame.

24. The wind turbine of claim 14, wherein the rotatable frame is a rotor of an 15 electric generator.

25. The wind turbine of claim 14, wherein the airfoils are permitted to rotate with respect to the rotatable frame when moving in the direction of the air flow.


26. The wind turbine of claim 14, wherein the airfoils are not permitted to rotate with respect to the rotatable frame when moving against the direction of the air flow.

20 27. The wind turbine of claim 14, wherein the airfoils are curved.

28. The wind turbine of claim 27, wherein the airfoils are shaped to provide lift in a direction perpendicular to the direction of airflow over the airfoil.


1/4

+

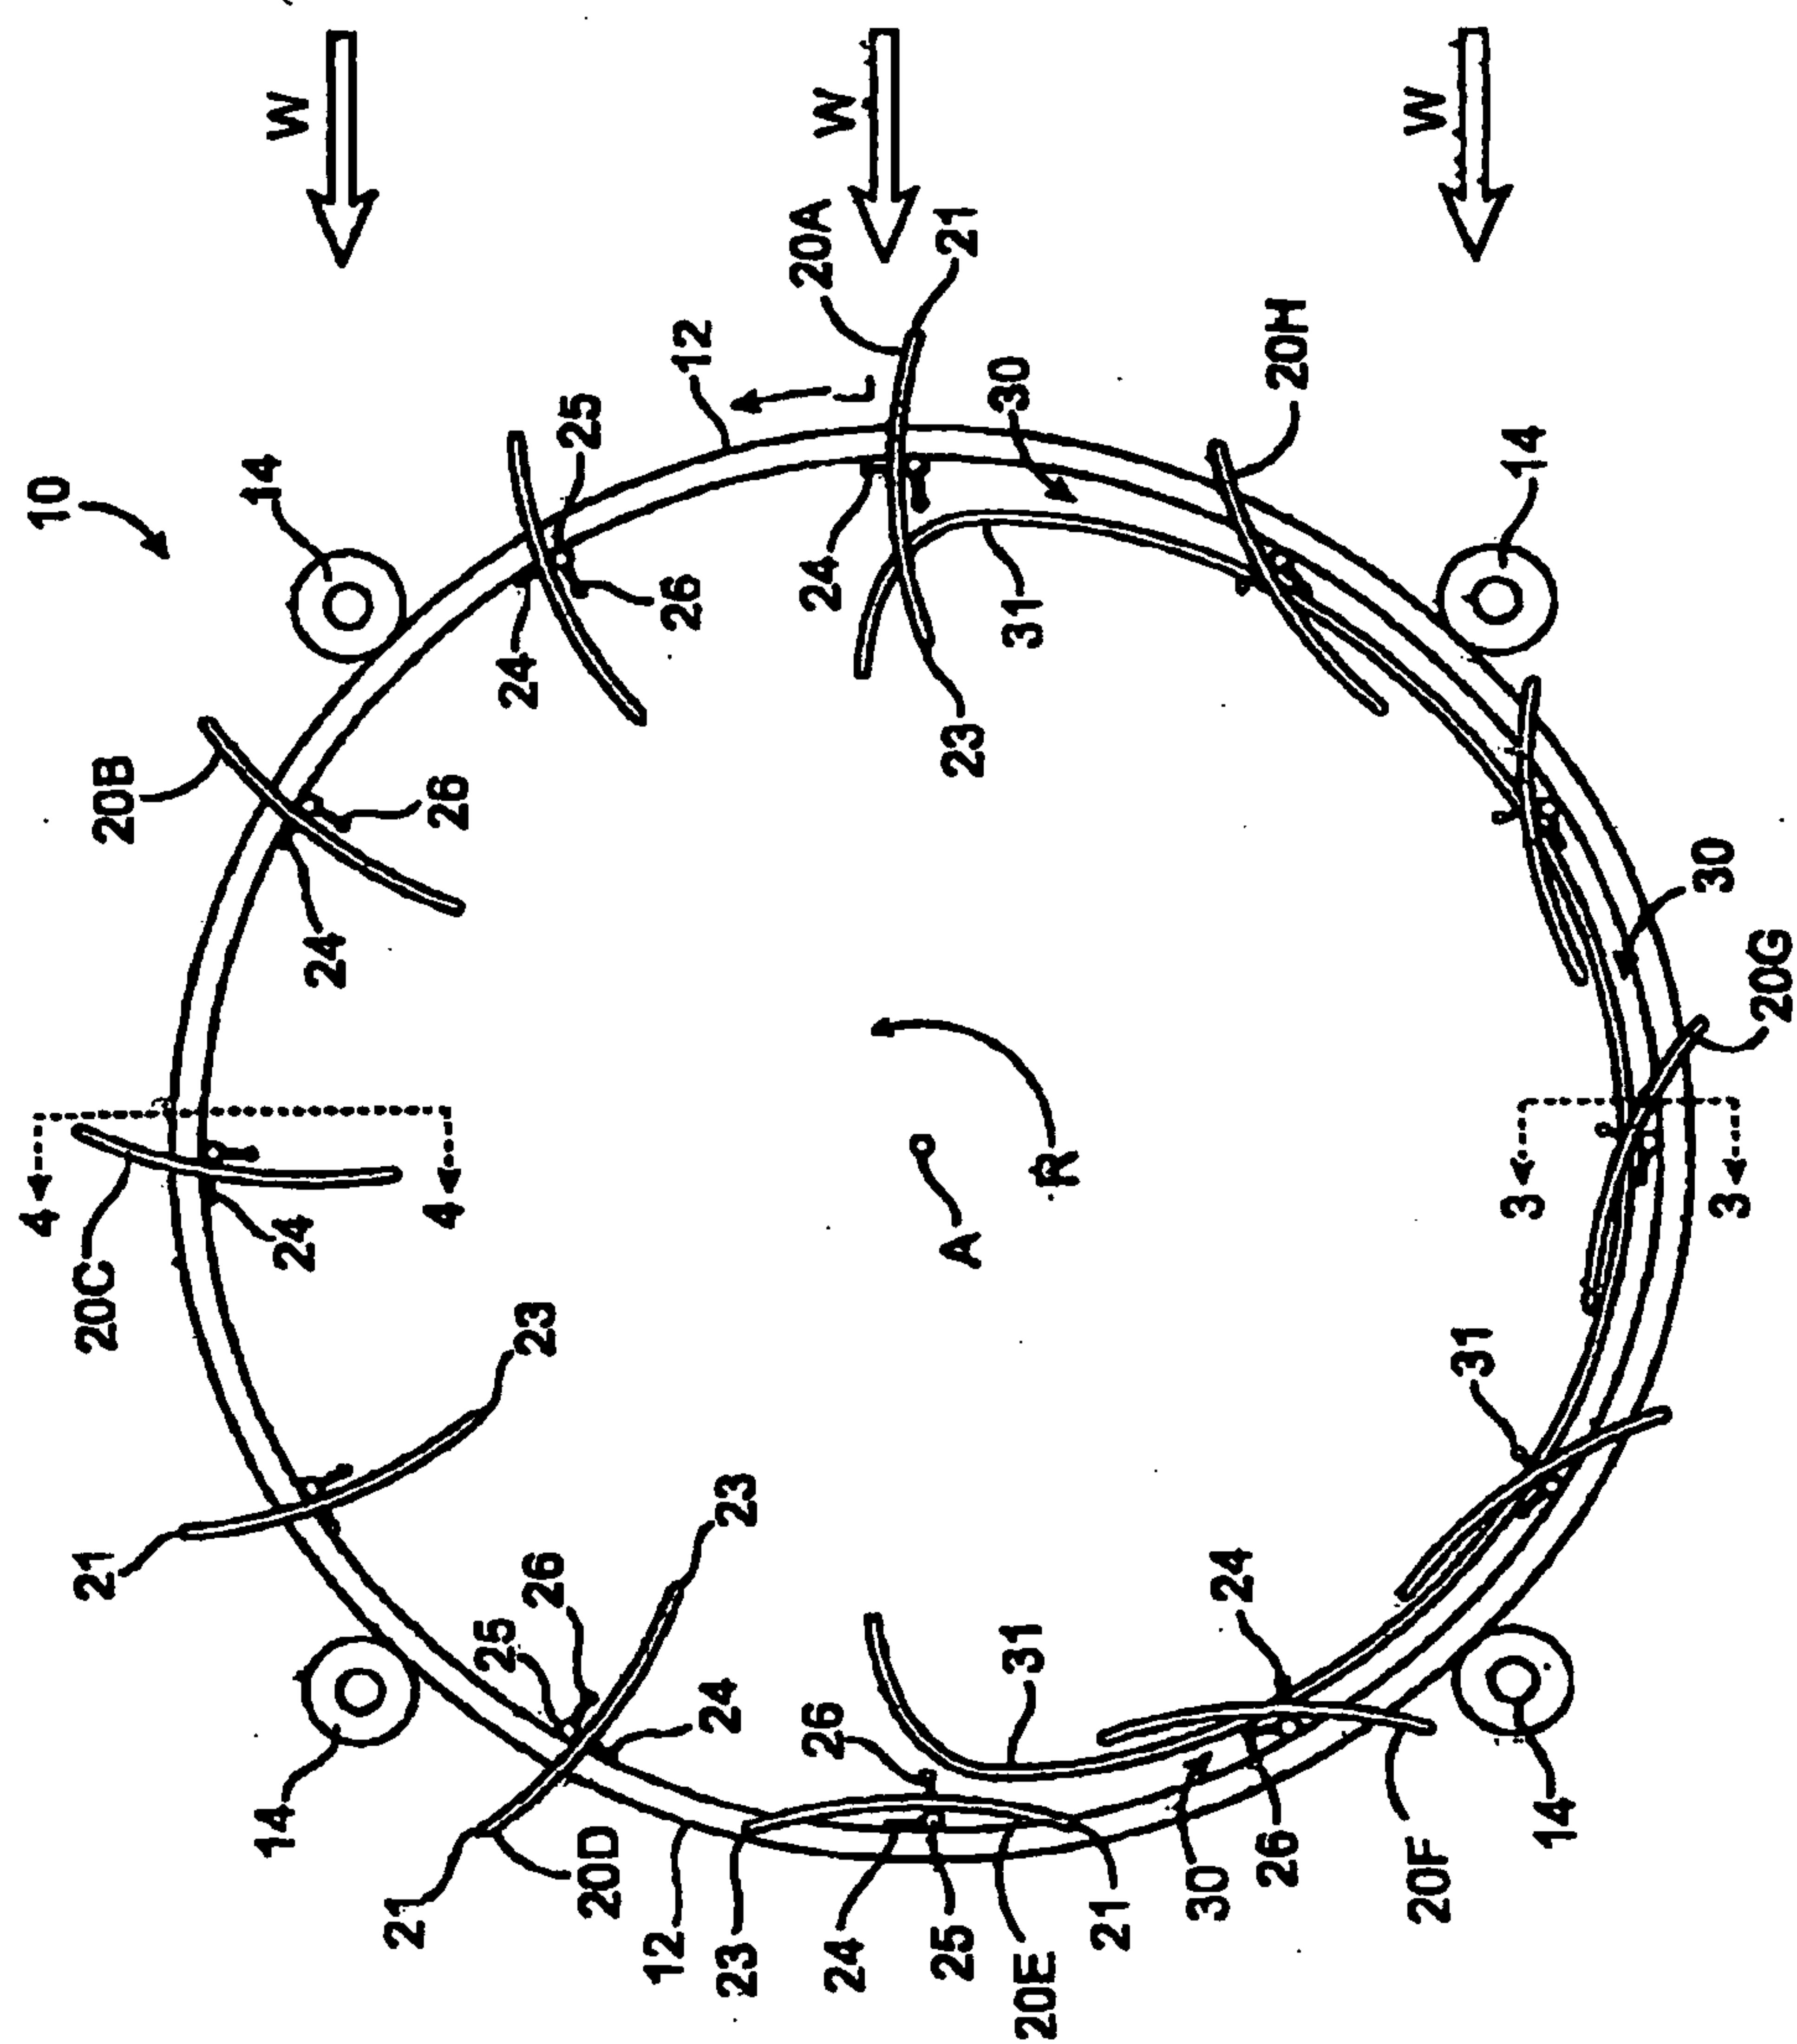

2/4

+

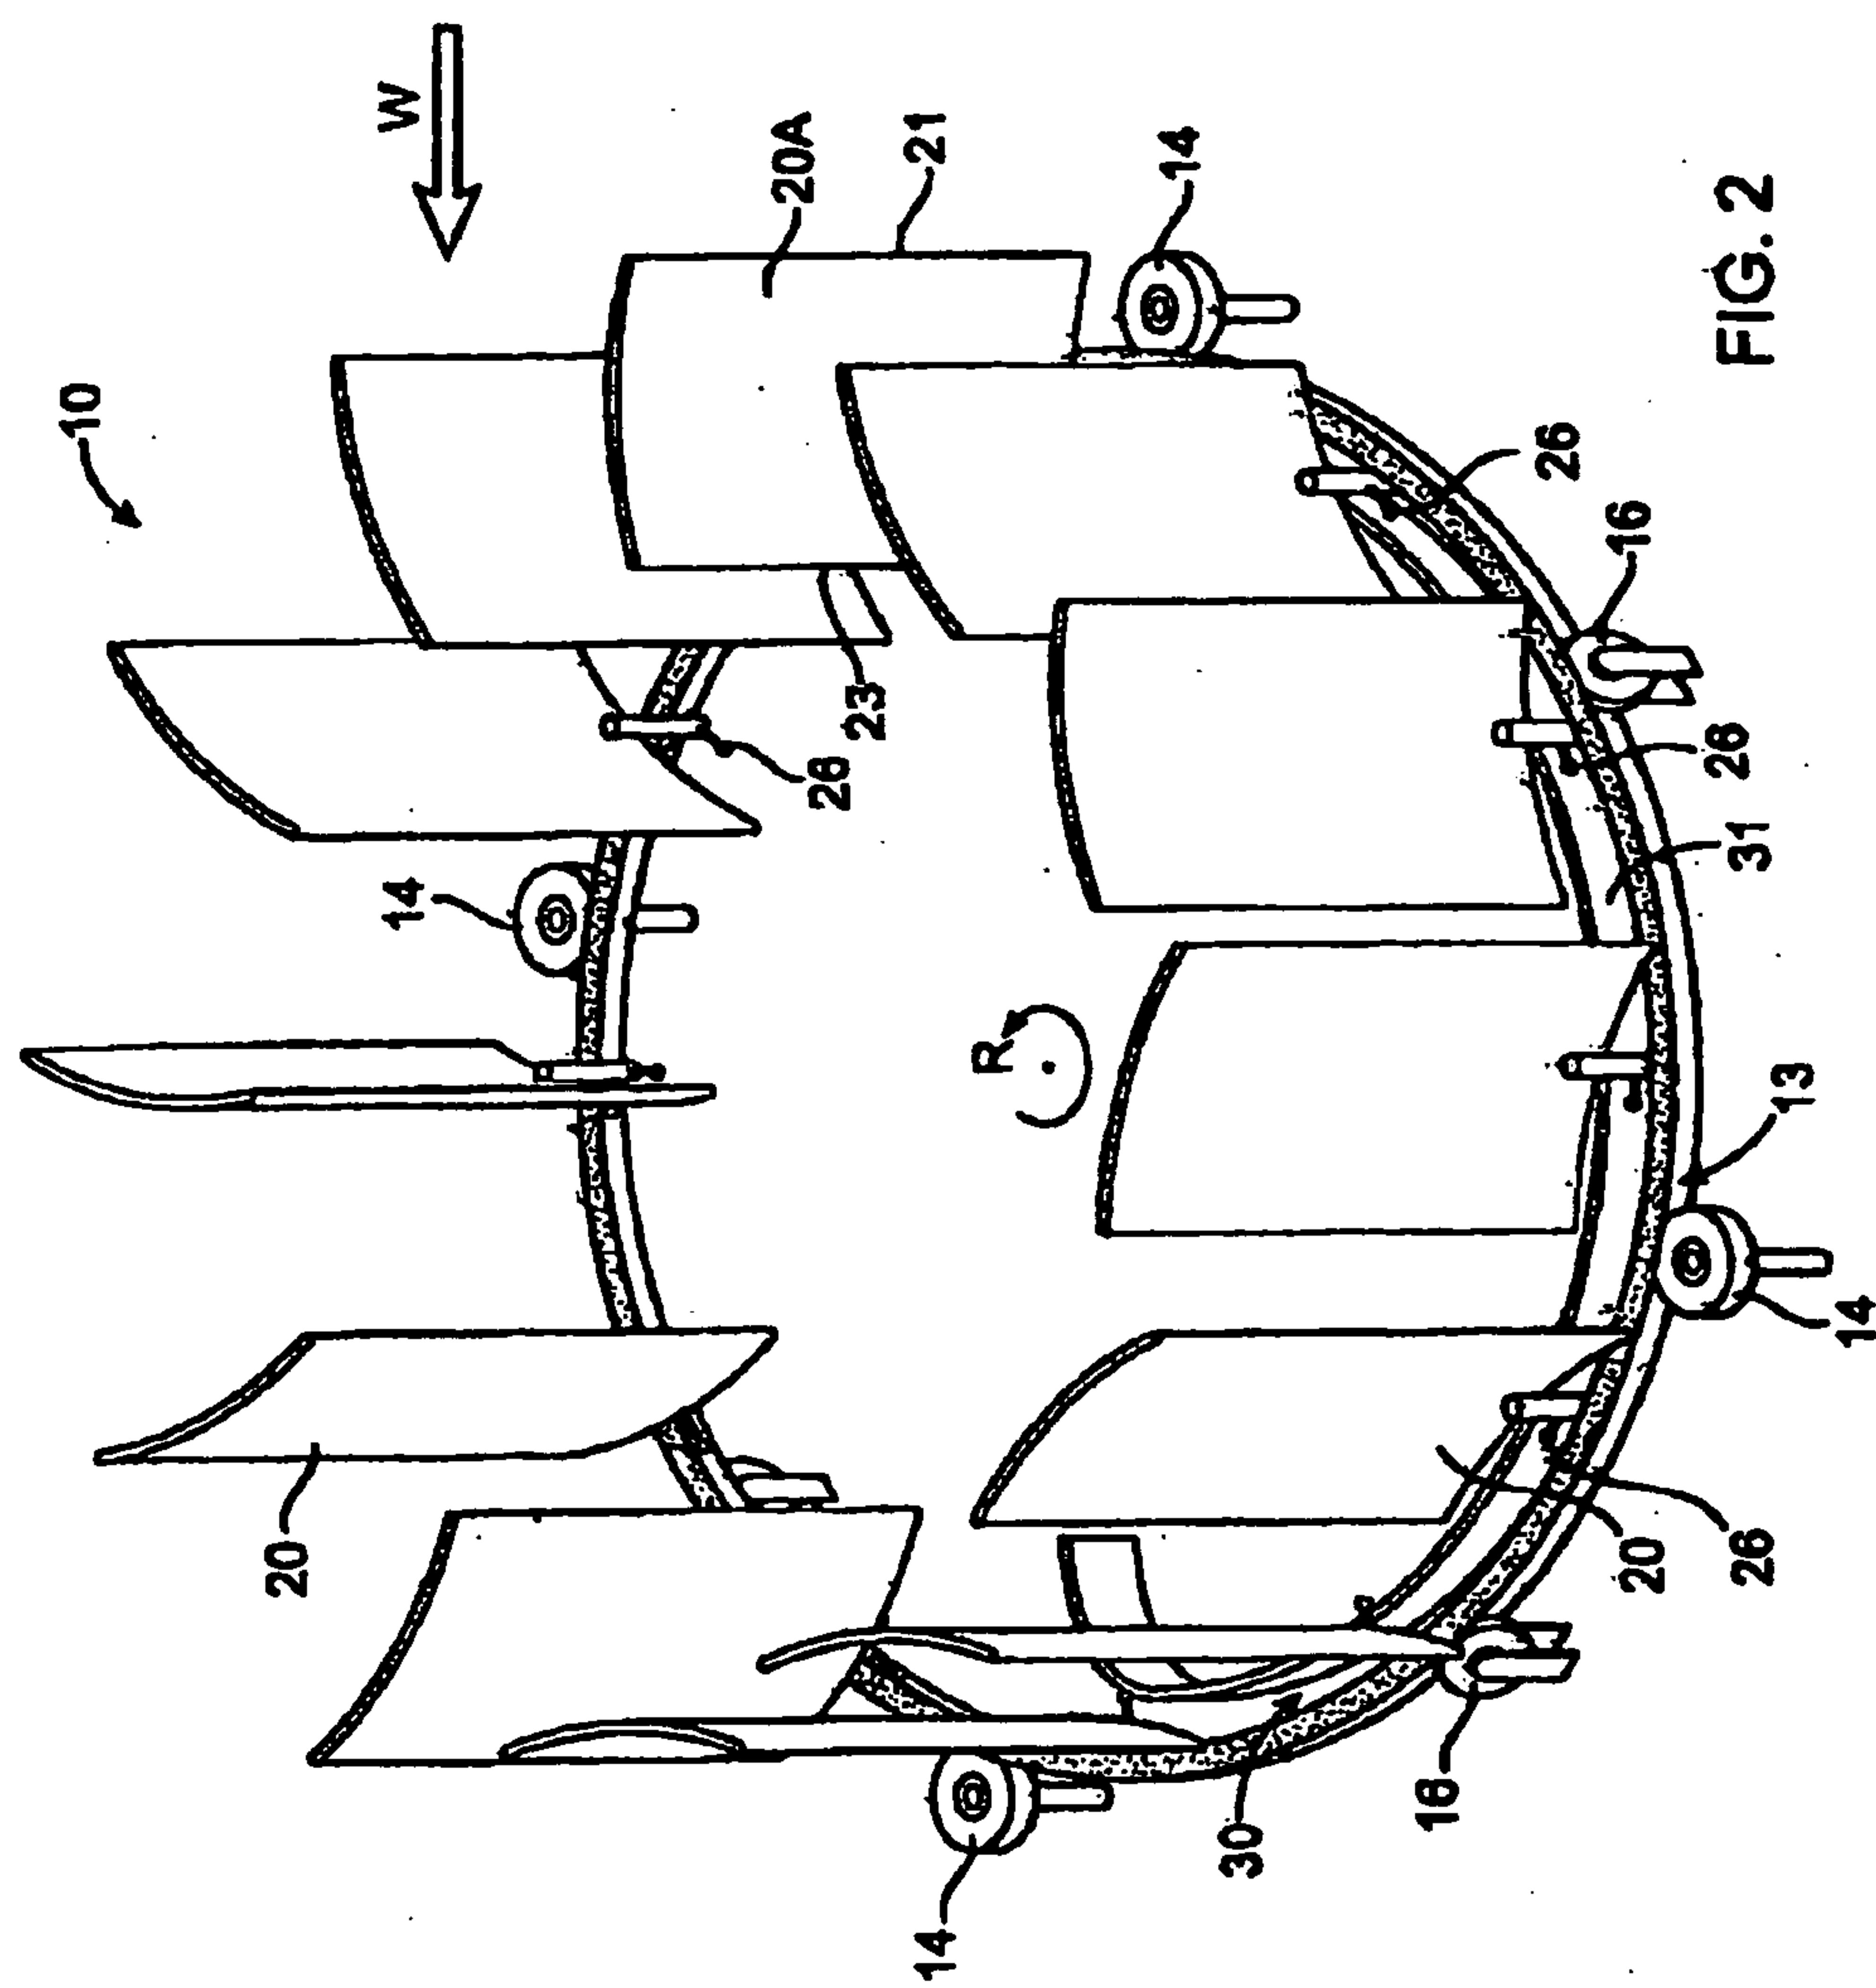

+

3/4

+

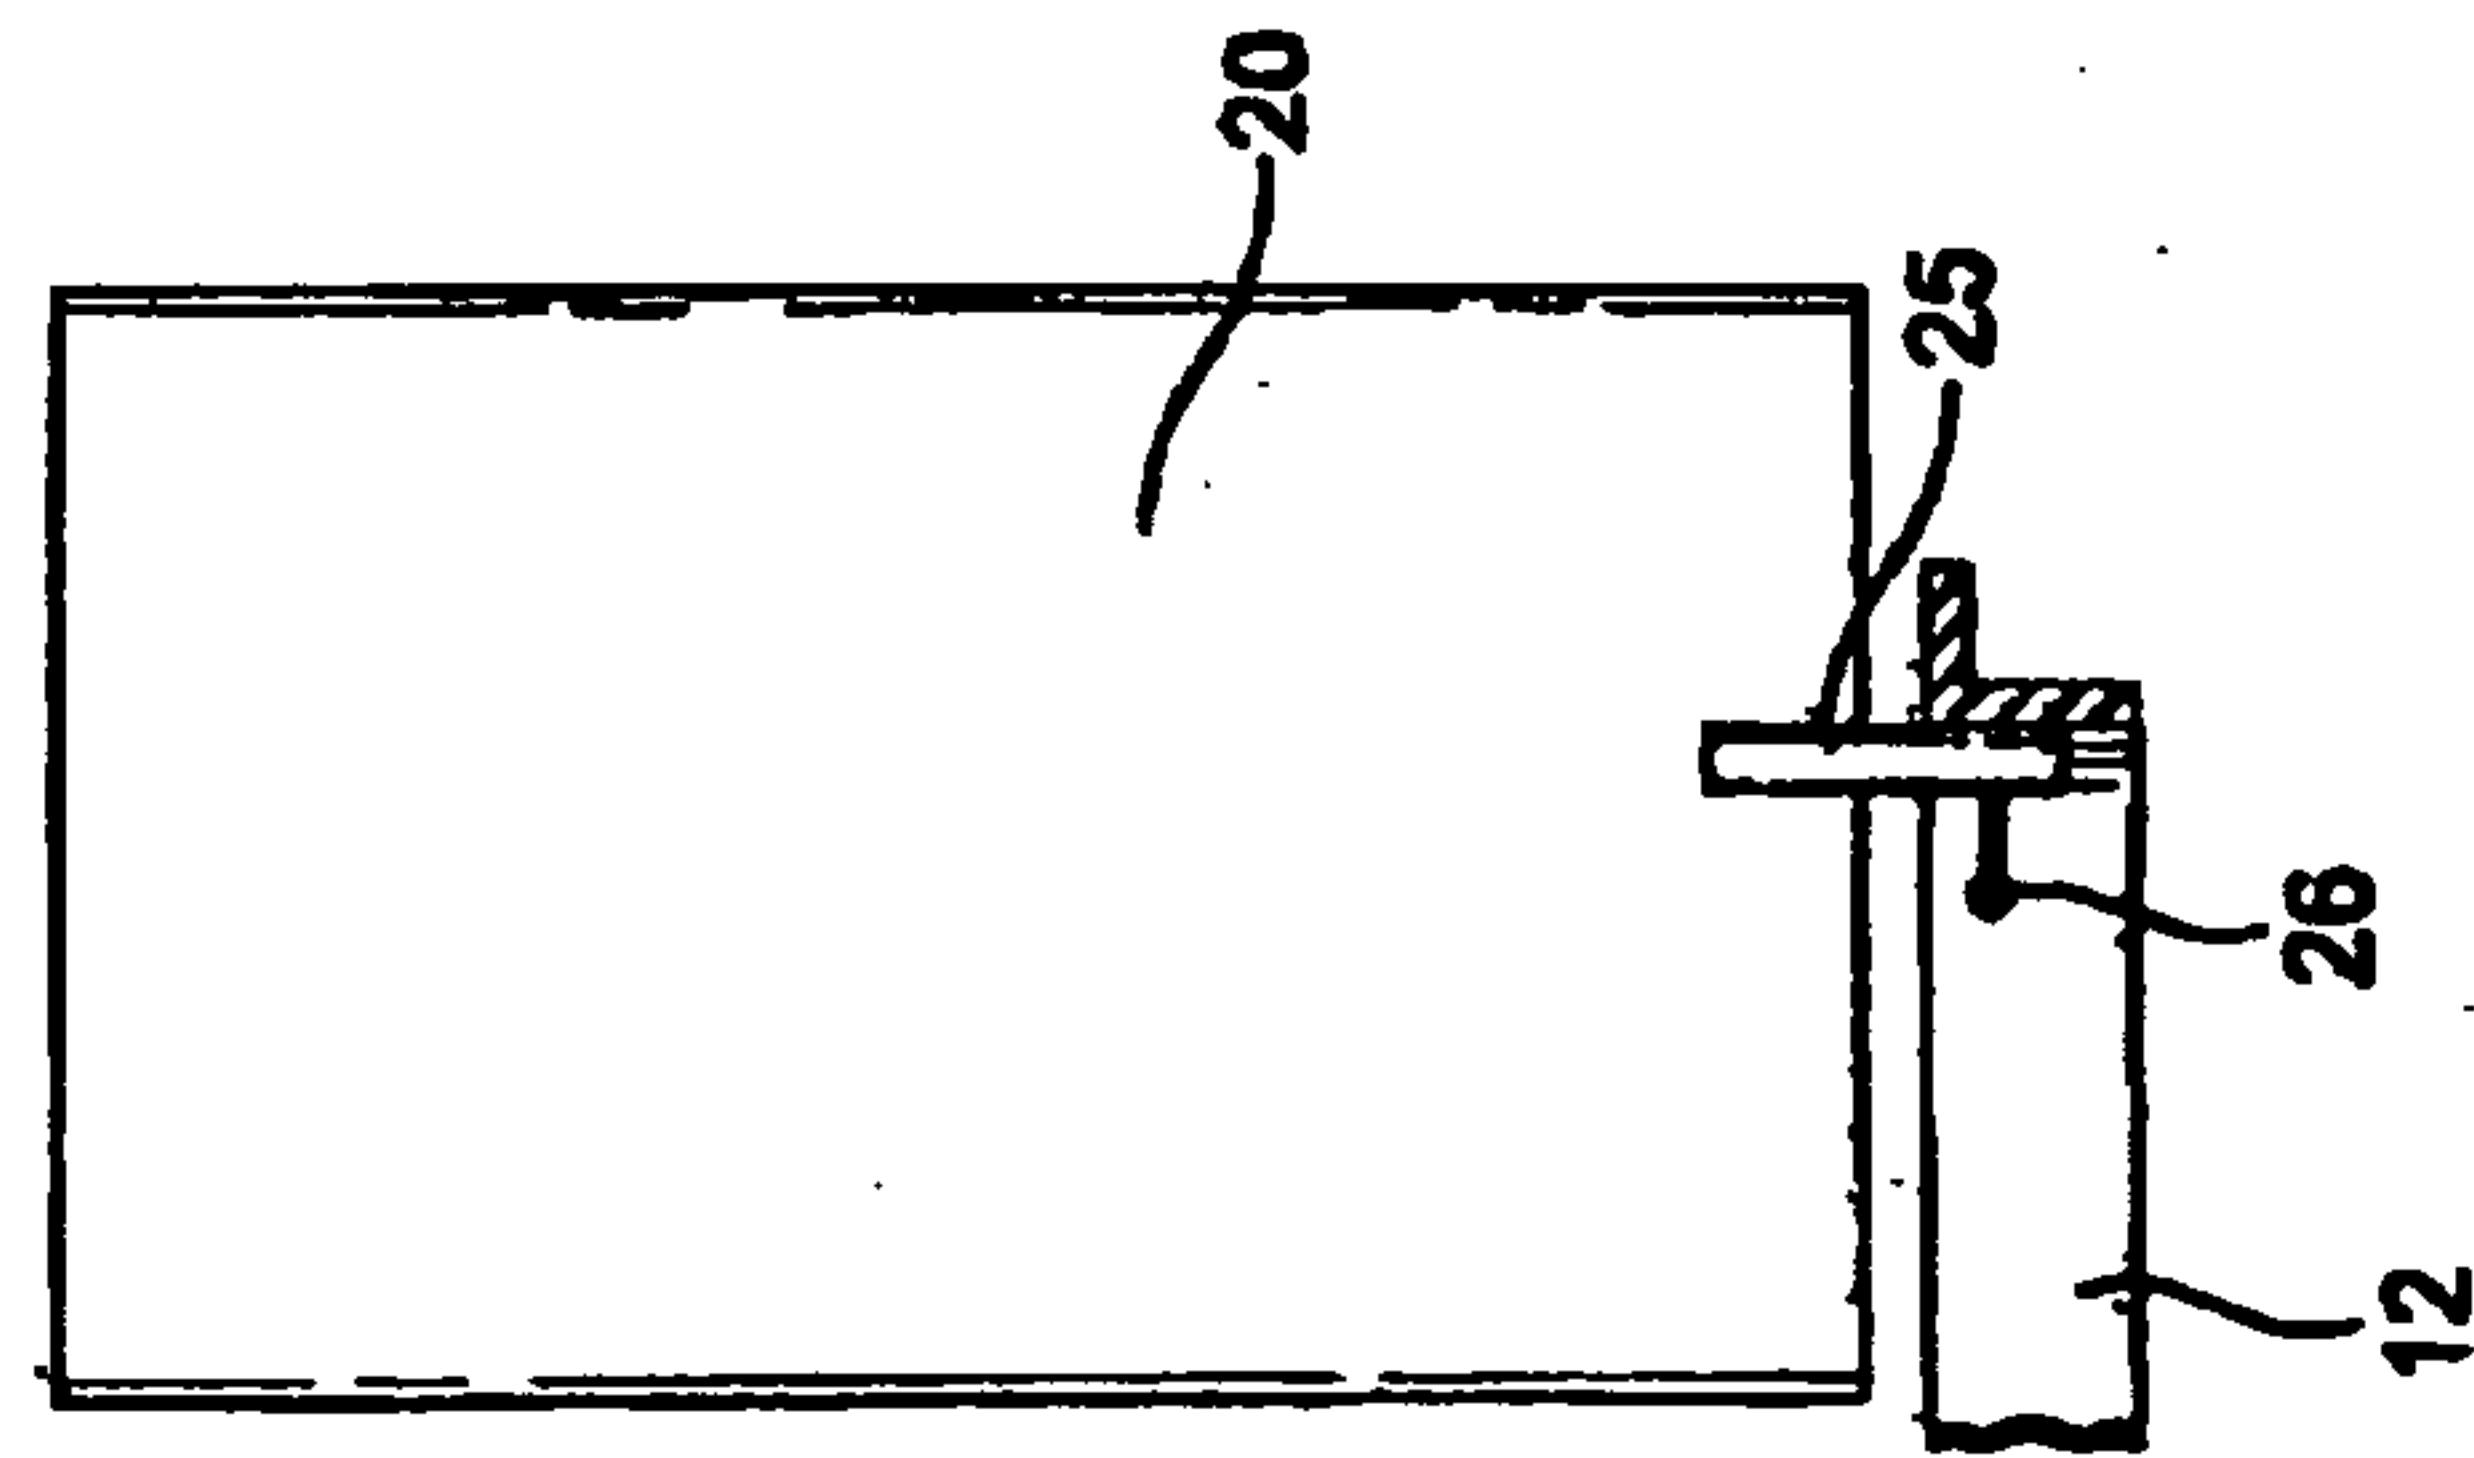


FIG. 4

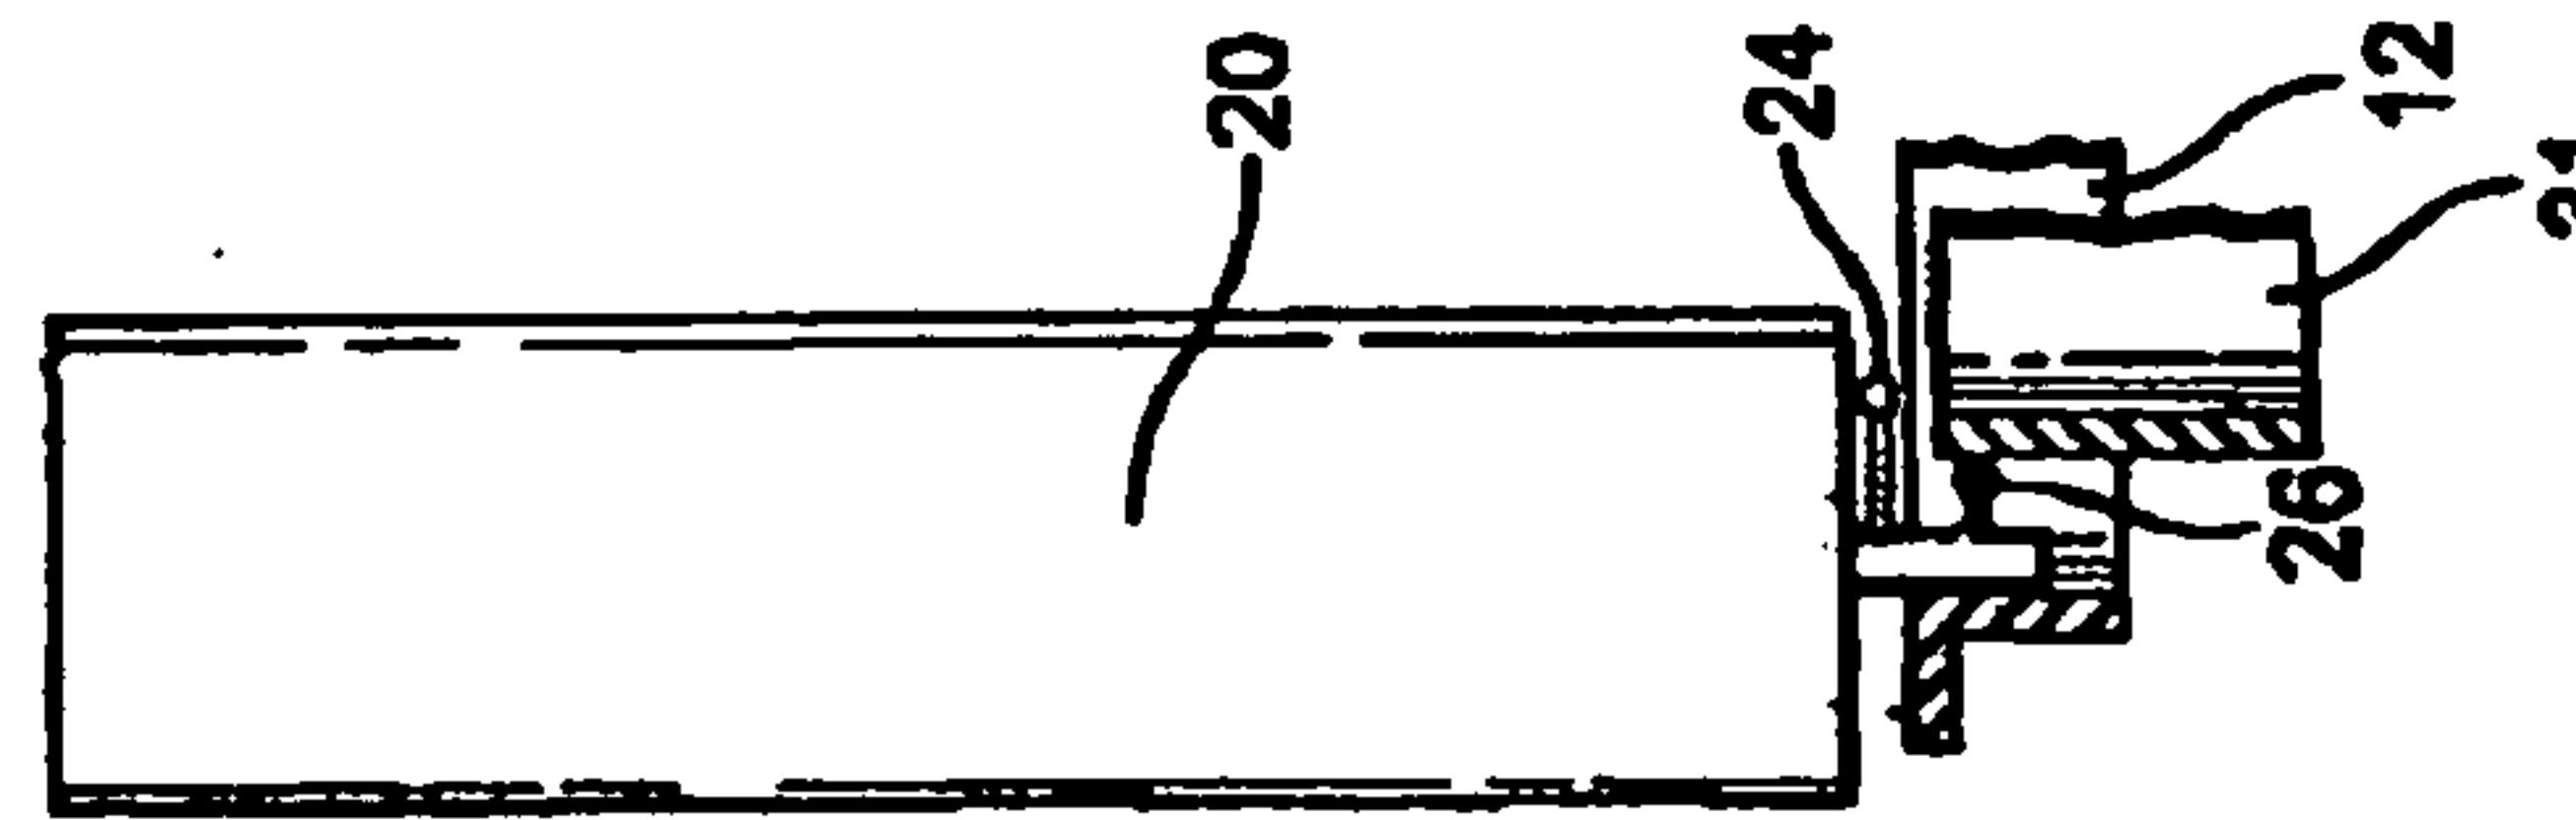


FIG. 3

+

4/4

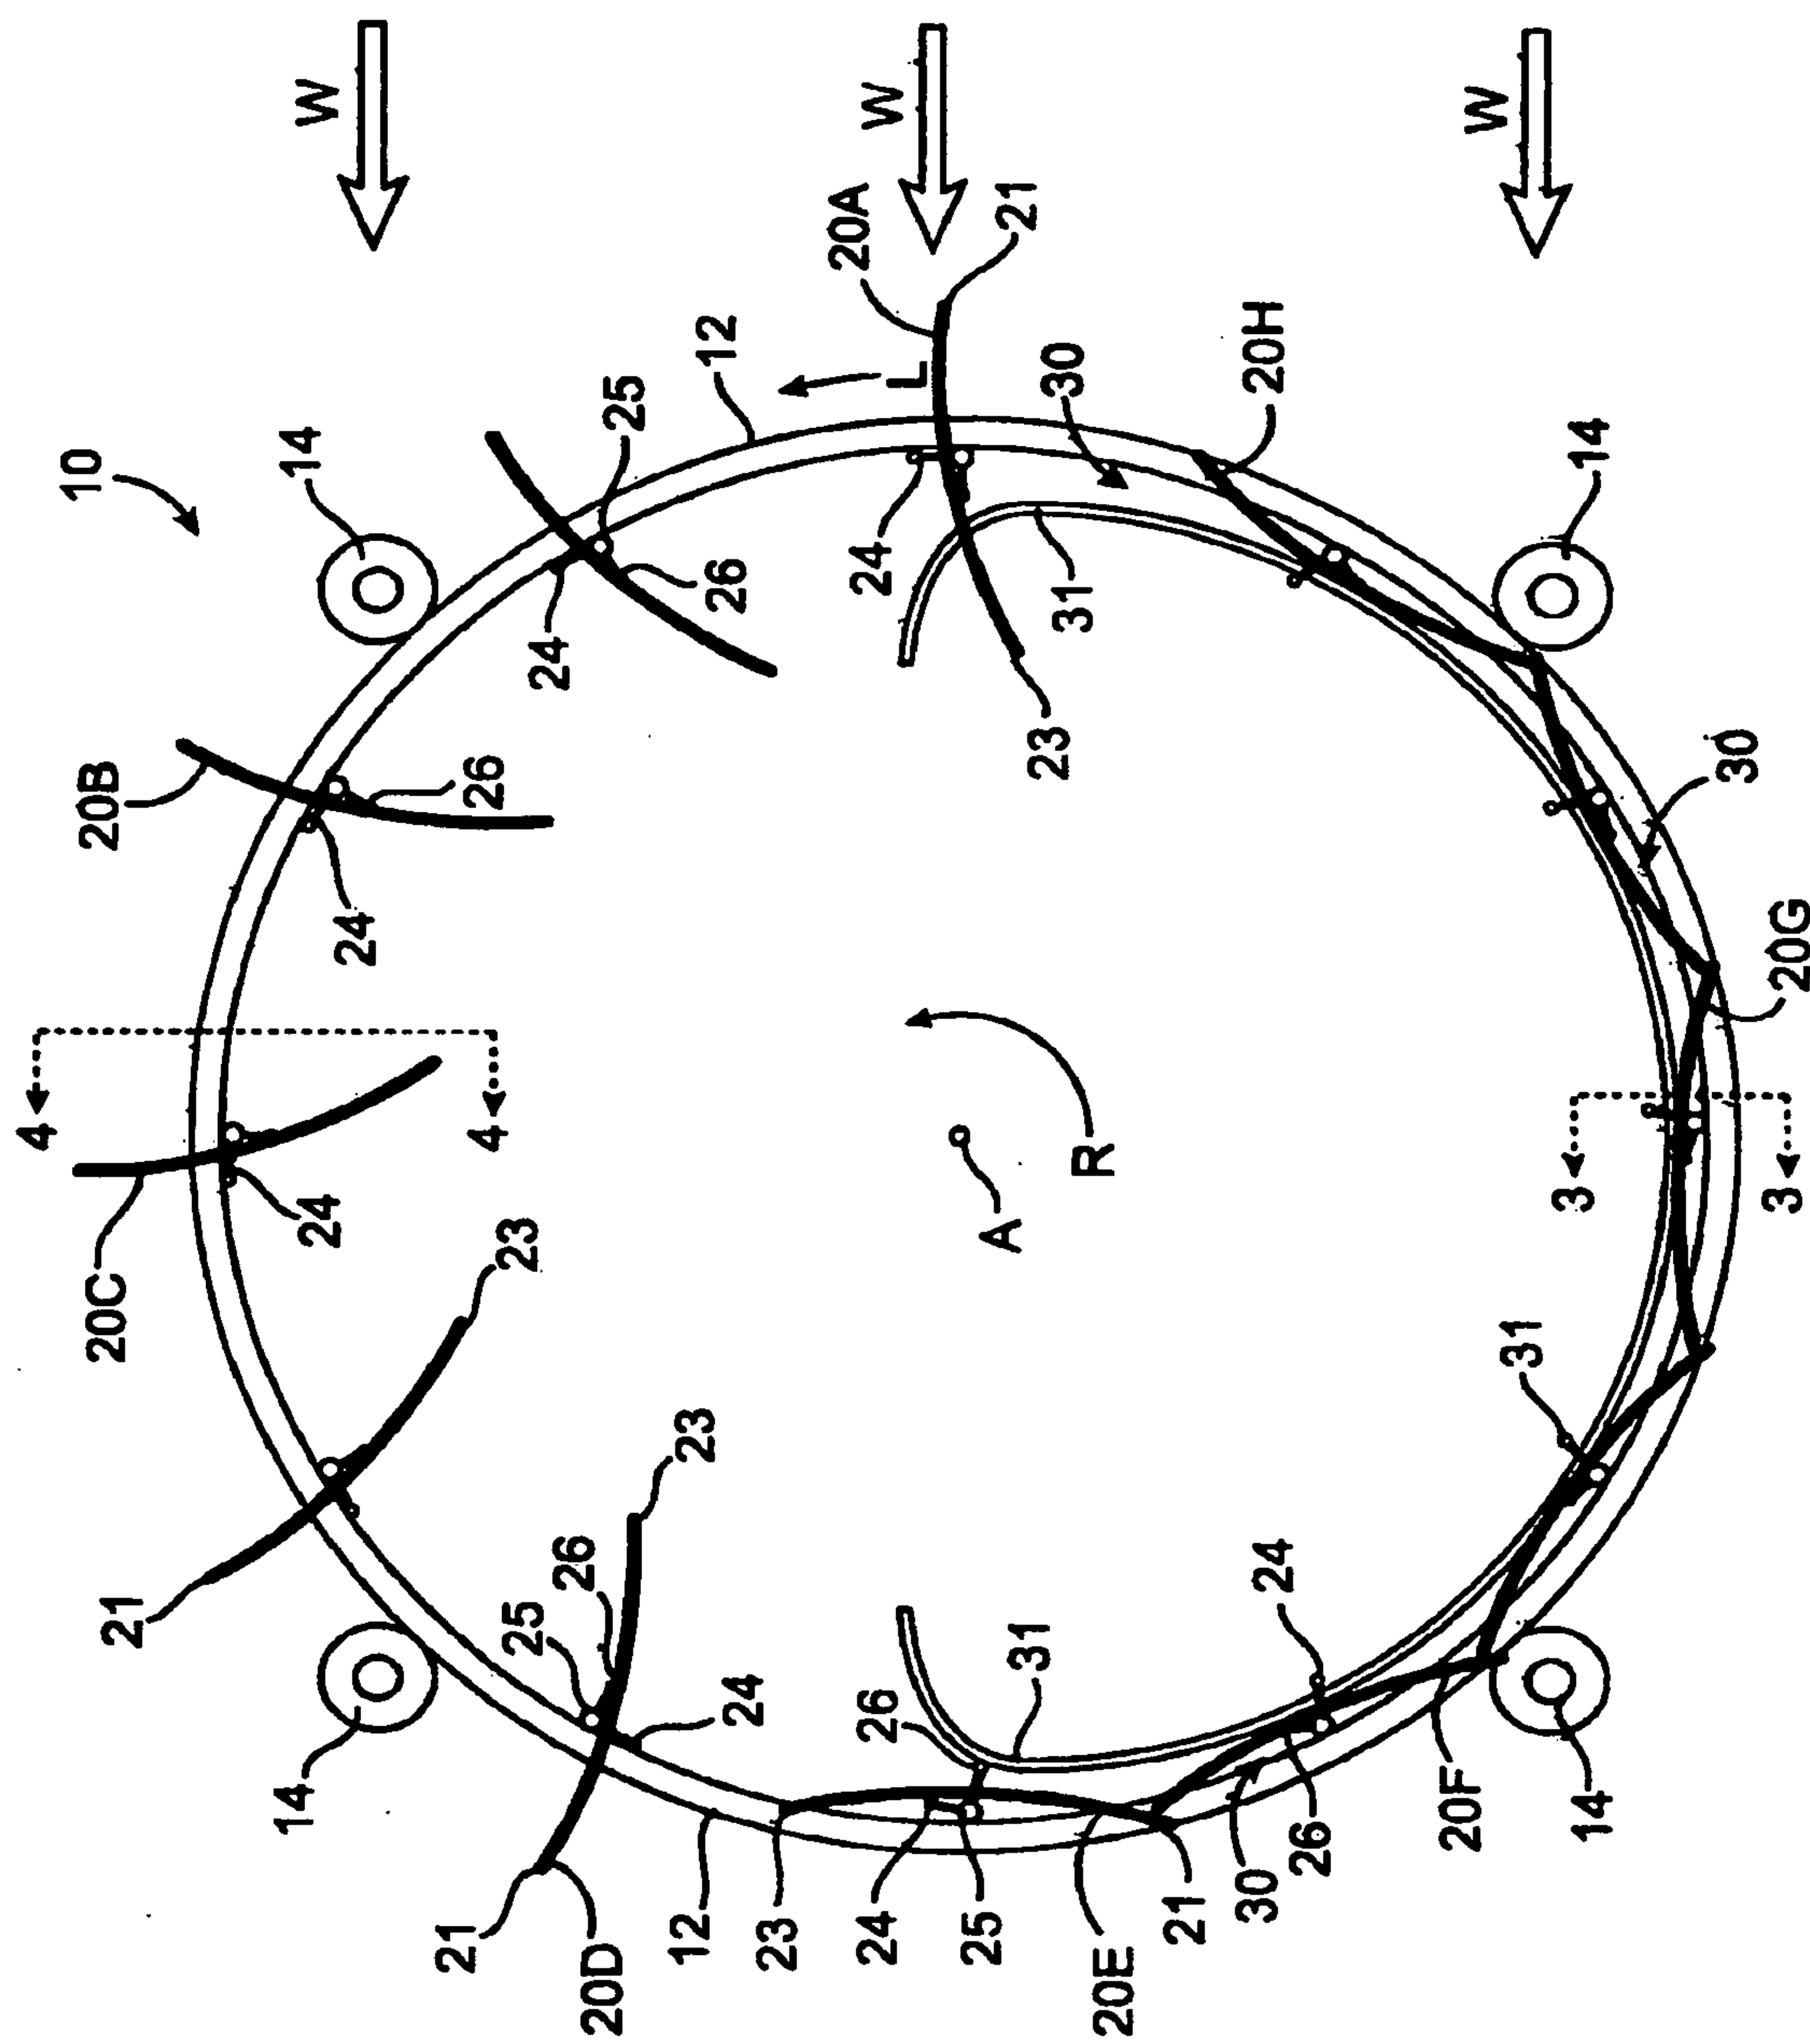


FIG. 5

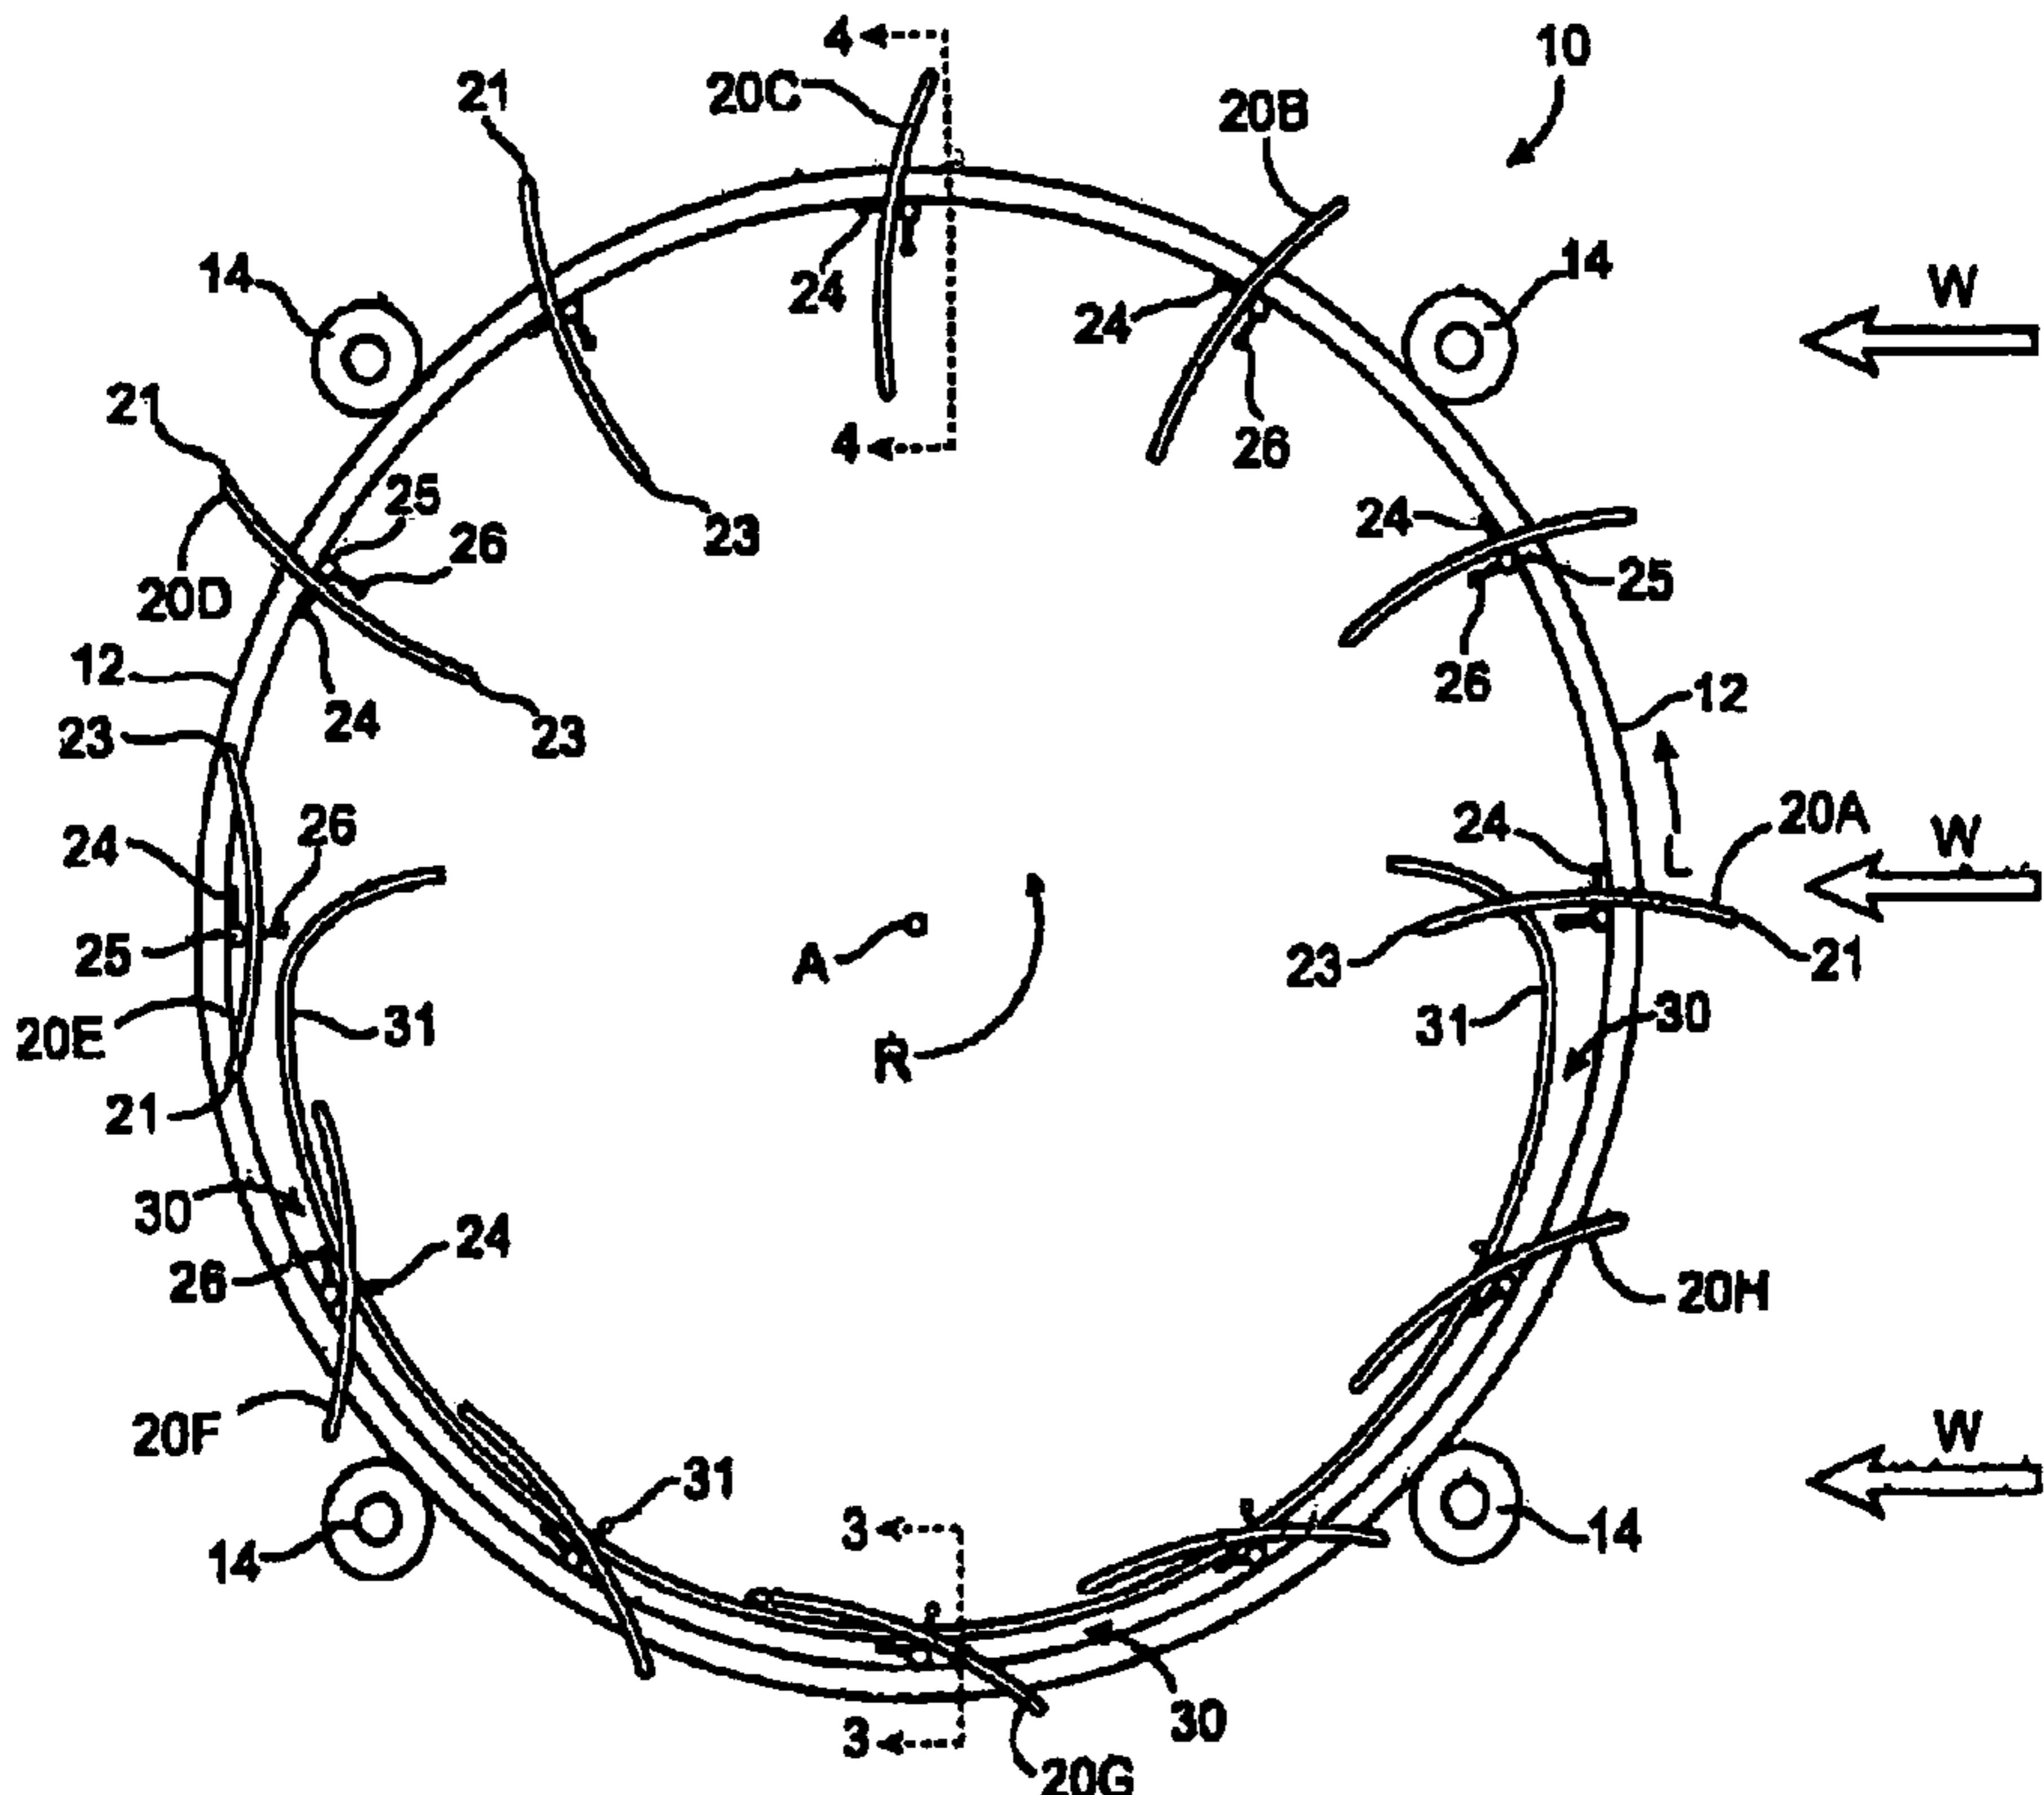


FIG. 1