

G. W. STEARNS.

Improvement in Hand Rakes.

No. 123,369.

Patented Feb. 6, 1872.

Fig. 1.

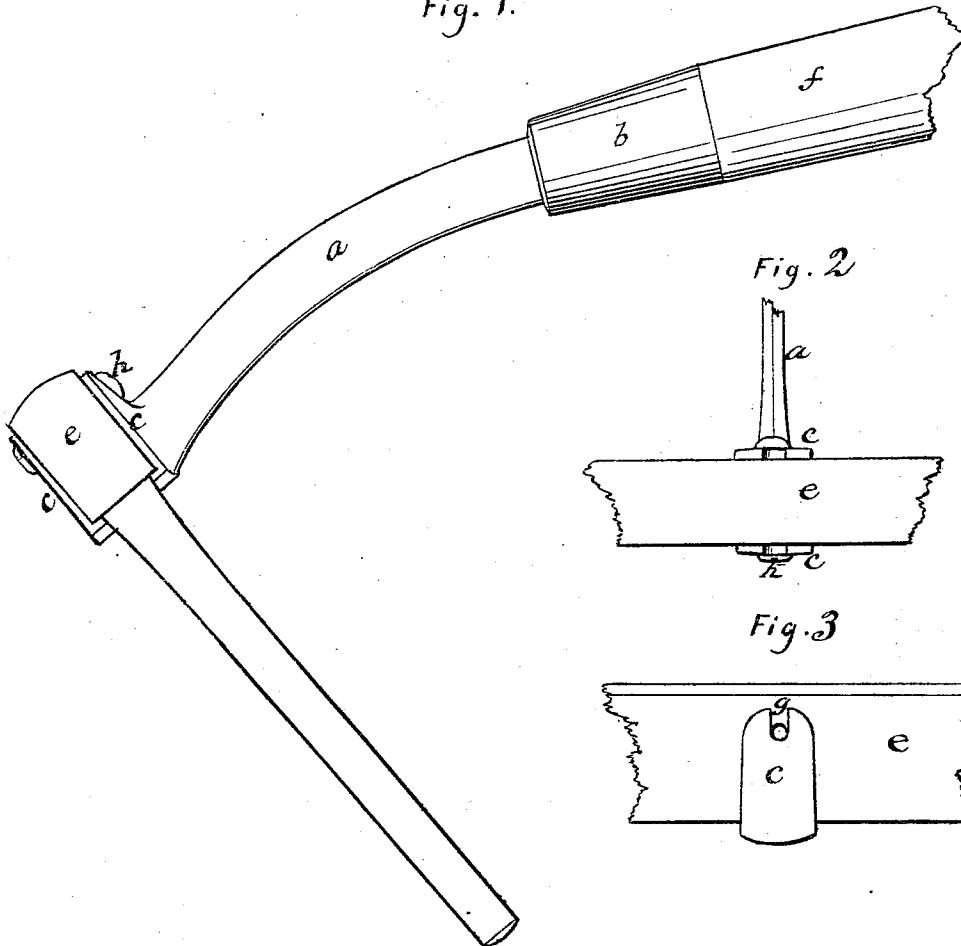


Fig. 2.


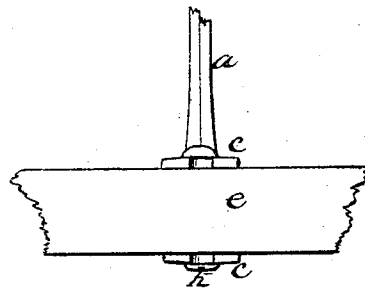


Fig. 3.

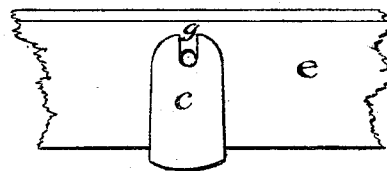

Witnesses.

Sydney E. Smith.
Arthur D. Kerr.

Inventor.

George W. Stearns
By his Attorney
J. C. Robbins

UNITED STATES PATENT OFFICE.

GEORGE W. STEARNS, OF LEBANON, NEW HAMPSHIRE, ASSIGNOR TO HIMSELF AND DAVID W. MARSTON, OF SAME PLACE.

IMPROVEMENT IN HAND-RAKES.

Specification forming part of Letters Patent No. 123,369, dated February 6, 1872.

To all whom it may concern:

Be it known that I, GEORGE W. STEARNS, of Lebanon, in the county of Grafton and State of New Hampshire, have invented a new and improved metallic-attachment contrivance for effecting a firm combination of a wooden rake-head with its wooden handle and at the same time giving to said combination the proper degree of inclination of the rake-handle with the rake-teeth.

The following is a full and clear description of said invention, reference being had to the accompanying drawing which forms a portion of this specification, Figure 1 being a side view of a hay-rake whose head and handle are combined with each other by means of my said improved metallic-attachment contrivance; and Figs. 2 and 3 are views of sectional portions thereof.

Said attachment contrivance has a curved shank, *a*, which terminates at one end in a socket, *b*, for the reception of the rake-handle *f*, while the opposite end thereof terminates in a jaw-shaped head, *c c*, for the reception of the rake-head *e*. The socket *b* of said attachment contrivance is cast by the assistance of a core in the usual manner. The jaw-shaped head of said contrivance is molded and cast without the aid of a core; and to prevent the necessity and expense of drilling rivet-holes in the ears *c c* of said head slits *g* are cast opposite to each other in said ears, as shown in Fig. 3. A rake-head of proper size having been placed within the jaw-shaped head of my said attachment contrivance, either before or after the rivet-

hole has been formed in said rake-head, next receives the rivet *h*, whose ends project outwardly through the slits in the jaw-ears *c c*, and are of the proper length for the following operation of heading the same down upon the said jaw-ears. To insure a more perfect union between the jaw-shaped head of the attachment contrivance and the wooden rake-head, the outer angles of the slits *g* in the jaw-ears *c c* may be slightly reamed out at the bases of said slits. If preferred, the rivet *h* may be inserted in the rivet-hole in the rake-head before the said head is placed within the jaw-shaped head of the attachment contrivance, to be combined therewith. The rake-handle may be combined with the outer end of the shank *a* of the attachment contrivance by the aid of a socket or a flanged and pointed shank, or in any other manner that may be preferred.

I claim as my invention—

A new manufacture in the shape of an improved hay-rake whose head and handle are combined with each other by means of the within-described metallic-attachment contrivance, substantially as set forth.

In testimony that the foregoing is a full and clear specification of my new manufacture in the shape of a metallic contrivance for effecting a strong and perfect union between wooden rake-heads and their handles I hereunto subscribe my name.

GEORGE W. STEARNS.

Witnesses:

MILO L. STEARNS,
ELIEL PECK.