



(51) International Patent Classification:

E21B 21/08 (2006.01) *E21B 37/00* (2006.01)
E21B 21/10 (2006.01)

(21) International Application Number:

PCT/IB2020/000161

(22) International Filing Date:

13 February 2020 (13.02.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

16/280,364 20 February 2019 (20.02.2019) US
62/902,471 19 September 2019 (19.09.2019) US
16/686,955 18 November 2019 (18.11.2019) US

(71) Applicant: STANG TECHNOLOGIES LTD. [CA/CA];
P.O. Box 598, Macklin, Saskatchewan S0L 2C0 (CA).

(72) Inventors: STANG, Jonathan, M.; P.O. Box 598, Macklin, Saskatchewan S0L 2C0 (CA). MAGNER, Daryl, E.; 9731 W. 57th Place, Arvada, CO 80002 (US).

(74) Agent: DEETH WILLIAMS WALL LLP; c/o FEATHER, Thomas E., 150 York Street, Suite 400, Toronto, Ontario M5H 3S5 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

(54) Title: MUTLI-CYCLE WELLBORE CLEAN-OUT TOOL

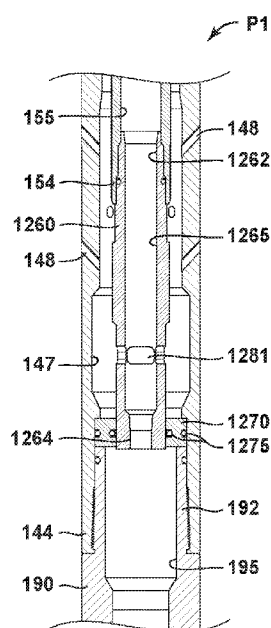


FIG. 12-P1

(57) Abstract: A clean-out tool and method of cleaning out a wellbore. The clean-out tool is placed at the end of a coiled tubing or other conveyance string. The clean-out tool comprises a tubular housing providing an elongated bore through which fluid flows. The tubular housing has back-jetting ports disposed at an upward angle therein. The clean-out tool is configured to operate in a back-jetting mode when the clean-out fluid is pumped into the tubular housing at a first flow rate. In this mode, at least a portion of clean-out fluid flows through the bore, up an annular region and then through the back jetting ports. The clean-out tool is further configured to operate in a fluid flow-through mode when the clean-out fluids are pumped into the bore of the tubular housing at a second flow rate. In this mode, all of the clean-out fluid flows through the clean-out tool.

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

MULTI-CYCLE WELLBORE CLEAN-OUT TOOL

BACKGROUND OF THE INVENTION

[0001] This section is intended to introduce various aspects of the art, which may be associated with exemplary embodiments of the present disclosure. This discussion is believed to assist in providing a framework to facilitate a better understanding of particular aspects of the present disclosure. Accordingly, it should be understood that this section should be read in this light, and not necessarily as admissions of prior art.

Field of the Invention

[0002] The present disclosure relates to the field of hydrocarbon recovery operations. More specifically, the invention relates to wellbore completions and remediation operations. Further still, the invention relates to a tool that may be connected to a string of coiled tubing (or other working string) and used for wellbore clean-out.

Technology in the Field of the Invention

[0003] During the course of a wellbore operation, it is sometimes desirable to clean out the wellbore. For example, after a well is completed and before a string of production tubing is hung, the operator may wish to run a clean-out tool down the hole to circulate out cement chips, sand, and other debris. For this operation, a clean-out tool is used.

[0004] In addition, it is sometimes desirable to clean out a producing well that has become filled with sand. Such incidents may occur because the well is producing from an unconsolidated formation, or due to a poorly designed fracturing operation.

[0005] In either of these instances, a simple nozzle may be run into a wellbore at the end of a coiled tubing string. A coiled tubing connector may be used to connect the coiled tubing string with the nozzle. An aqueous circulating fluid is pumped down the working string, through the nozzle and then up the back side (or annulus) of the working string. Preferably, a

surfactant, an acid or other chemical is injected down the coiled tubing string following the aqueous circulating fluid as part of the clean-out.

[0006] A separate type of tool that also involves circulating fluid down a working string is an abrasive perforating tool. Abrasive perforating tools utilize custom lateral jetting ports that allow a fluid containing abrasive particles, e.g., sand, to be pumped downhole through the working string at high pressures and then out of the jetting ports laterally. The abrasive fluid erodes through the surrounding casing at a designated depth, then through the cement, and out into the surrounding rock formation. This is an alternative to explosive charge perforating or so-called plasma perforating.

[0007] Some abrasive perforating tools offer a clean-out function using reverse circulation. In one aspect, an abrasive perforating tool may be part of a bottom hole assembly containing a reverse ball check valve. The BHA components include a so-called CT connector, a disconnect, a stabilizer, an abrasive cutting sub having at least one jetting nozzle, the reverse ball check valve, and then the nozzle. A schematic view of such a device is shown in Figure 1 of U.S. Patent No. 9,115,558, the entirety of which is incorporated herein by reference.

[0008] The reverse ball check valve of the '558 patent includes a pin and a ball. When fluid is pumped down the coiled tubing, the reverse ball check valve is forced closed, preventing fluid from exiting the nozzle at the bottom of the BHA. Fluid is then directed through the lateral jetting ports for hydraulic perforating. Subsequently, when sand or other particulates are required to be cleaned out, a "reverse clean-out" procedure is conducted.

[0009] To perform the reverse clean-out, an aqueous fluid is injected down the back side of the coiled tubing. The fluid is pumped downhole where it then flows back up the BHA, through the reverse ball check valve, through the bore of the coiled tubing string and back up to the surface. The fluid returns will include the abrasive fluid used in the perforating process. A somewhat schematic reverse clean-out flow for a BHA having a known reverse ball check valve is shown in Figure 2 of the '558 patent.

[0010] As described in greater detail in the '558 patent, the use of reverse flow clean-out valves is often impractical in connection with horizontal wellbores. This is because of the significant likelihood of fill material gathering around the outer diameter of the BHA during the reverse circulation phase. In this respect, the BHA cannot take advantage of gravity to bring the fill material down to the nozzle as is present in a vertical well. Depending on the size of the wellbore, the length of the horizontal leg of the well and the cleanout medium used, the annular velocity (governed by gauge pressure at the surface) likely will not be high enough to sweep the entire fill to the end of the bottom hole assembly.

[0011] Due to this limitation, the '558 patent disclosed a novel abrasive perforating tool capable of being cycled during pumping operations to provide clean-out. Beneficially, fluids can be pumped down the bore of the working string in the same direction for both abrasive perforating and for clean-out, using a cycling mechanism. This allows for a multi-cycle adjustment of tool function carried out by manipulating pumping rates.

[0012] A need exists for a downhole tool that operates with a similar cycling mechanism for wellbore clean-out but without the abrasive perforating function. A need further exists for a downhole flow diverter tool that not only provides for wellbore clean-out, but which permits the operation of a separate hydraulically actuated tool further down the tool string, such as a positive displacement motor.

BRIEF SUMMARY OF THE INVENTION

[0013] A multi-cycle clean-out tool for controlling a direction of a clean-out fluid within a wellbore is first provided herein. The wellbore is lined with a string of production casing. Optionally, the wellbore further includes a string of production tubing. In this case, the multi-cycle clean-out tool is dimensioned to be run into the production tubing.

[0014] The clean-out tool is designed to be run into a wellbore from the surface. A conveyance medium such as a coiled tubing string is used. In this instance, a CT connector may be provided to connect the coiled tubing string to the clean-out tool.

[0015] The clean-out tool first includes a tubular housing. The tubular housing provides an elongated bore through which clean-out fluid may flow. The tubular housing includes one or more back jetting ports disposed at an upward angle therein. The upward angle is preferably at 15° to 60°, and more preferably at 45°, relative to the longitudinal central axis of the tool.

[0016] The tubular housing may comprise an upper sub having an upper end and a lower end. The upper end may serve as a box end that threadedly connects to the CT connector or other bottom hole assembly. The tubular housing may further comprise a lower sub also having an upper end and a lower end. The first end of the lower sub is abutted to a lower end of the seat, while the lower end may be threadedly connected to a downhole tool such as a nozzle or a positive displacement motor.

[0017] The clean-out tool also includes a piston. The piston defines a short cylindrical body that is disposed at an upstream end of the tubular housing. The piston has an orifice configured to deliver fluids from the coiled tubing string to the elongated bore of the housing. Of interest, the piston forms a pressure shoulder as fluids are injected through the coiled tubing string.

[0018] The clean-out tool additionally includes a tubular mandrel. The tubular mandrel is slidably positioned within the housing. The mandrel has a proximal end connected to or otherwise acted upon by the piston, and an open distal end, wherein the distal end forms a plunger. In one embodiment, the plunger is a separate body threadedly or adhesively connected to the distal end of the mandrel. Of interest, one or more slots are provided equi-radially just above a lower end of the plunger.

[0019] The clean-out tool further includes a seat. The seat is disposed along the tubular housing below the distal end of the mandrel. As shown in the Figure 12 series of drawings, the seat has a central through-opening that is dimensioned to receive the plunger when the piston and connected tubular mandrel slide from a raised position to a lowered position along the tubular housing. The central through-opening provides a means for sealingly receiving the plunger.

[0020] The plunger and the central through-opening of the seat remain engaged in overlapping relation during the entire fluid circulation operation, with the degree of overlap changing as the piston, the mandrel and the connected plunger move between the raised and lowered positions.

[0021] In one optional arrangement, a lower end of the plunger provides a restricted opening, creating a pressure drop during use. Alternatively, the lower end of the plunger may be completely closed off. In either arrangement, a separate nozzle may be disposed below the tubular housing for wellbore cleanout. In another embodiment, a positive displacement motor is disposed below the tubular housing.

[0022] A lower annular region is formed between the mandrel and the surrounding tubular housing. The lower annular region provides fluid communication between the elongated bore of the tubular housing and the back jetting ports when the radial slots of the plunger are above the seat. However, when the plunger is moved to its lowered position, the radial slots will pass across the seat, precluding clean-out fluid from flowing back up the lower annular region. In this case, all clean-out fluid will pass through the plunger below the seat.

[0023] In a preferred embodiment, the wellbore clean-out tool includes a spring. The spring resides in an upper annular region between the tubular mandrel and the surrounding tubular housing above the lower annular region. The spring is pre-loaded in compression to bias the mandrel and connected plunger in the raised position. The upper annular region (with the spring) and the lower annular region (with the back-jetting ports) are sealingly separated.

[0024] The clean-out tool is configured to cycle a position of the mandrel and connected plunger in response to fluid pumping rate into the wellbore. Preferably, the clean-out tool is configured to cycle between two operating modes – a back-jetting mode and a flow-through mode. In the back-jetting mode, clean-out fluid is pumped into the bore of the tubular housing at a first flow rate. In this mode, at least a portion of the clean-out fluid flows through the mandrel, back up the lower annular region, and then through the back-jetting ports. This

leaves the remaining portion of the clean-out fluid to flow through the seat and out of the clean-out tool.

[0025] The clean-out tool is also configured to cycle to a flow-through mode. This occurs when the clean-out fluid is pumped into the bore of the tubular housing at a second higher flow rate, above an activation rate. In this mode, all (or certainly substantially all) of the clean-out fluid flows through the mandrel, through the seat, and out of the bottom of the clean-out tool.

[0026] Preferably, the clean-out tool may further be configured to remain in a back-jetting mode when the clean-out fluid is pumped into the bore of the tubular housing at a rate higher than the first flow rate. In this position, a similar portion of the clean-out fluid flows through the mandrel, back up the annular region, and through the back jetting ports.

[0027] In the preferred embodiment, the mandrel and connected plunger remain in a raised position during run-in. The plunger is maintained a sufficient distance above the seat to permit sufficient fluid to travel through radial slots in the plunger, and then up to the back jetting ports without a significant pressure drop. Once the pump rate is raised to an activation rate (referred to above as the “second flow rate”), the plunger is lowered to a point along or through the central through-opening of the seat, providing for the flow-through mode. More specifically, the radial slots move below the seat when the mandrel and connected plunger move to its lowered position.

[0028] The relative ratio of fluid that flows through the back jetting ports and that flows through the bottom of the tool during the back-jetting mode is a matter of design’s choice. This ratio can be adjusted based on the cross-sectional area of the radial slots in the plunger, the cross-sectional area of the lower annular region, the cumulative cross-sectional area of the back jetting ports, the size of the flow through area in the seat, and the flow restriction from downhole tool that may be below the clean-out tool as part of a bottom hole assembly.

[0029] To provide for the cycling of injection modes, the wellbore clean-out tool also includes a sequencing mechanism. The sequencing mechanism is responsive to a sequence

of flow rates applied above the piston. In one aspect, the sequencing mechanism comprises a cylindrical body configured to cycle the mandrel between its back-jetting mode (wherein the flow of clean-out fluids is split according to the operator's needs) and its flow-through mode (wherein all clean-out fluids exit through the seat). In one aspect, an intermediate position is provided wherein the mandrel and connected plunger reside between the raised position and the lowered position but the mandrel remains in its back-jetting mode.

[0030] Preferably, the sequencing mechanism is a J-slot sequencing mechanism. The J-slot mechanism will cooperate with one or perhaps two pins that are disposed along the tubular housing as a J-slot collar. The pins are configured to ride in slots along the J-slot mechanism to cycle the mandrel and connected plunger between the raised position and the lowered position. In this instance, the pins are fixed from axial movement and ride in the slots of the J-slot channel of the mandrel to restrict axial movement of the mandrel on alternating downward strokes.

[0031] Preferably, the clean-out tool will only cycle between a single back-jetting mode and the flow-through mode. This may be worked out by providing a J-slot mechanism that is configured to cycle between three settings, comprising:

(i) a first setting wherein the pin resides in a first slot that places the plunger in the raised position in response to the biasing mechanical force exerted by the spring on the mandrel at the first rate, or any rate below the first rate, allowing the clean-out tool to remain in its back-jetting mode as a default position;

(ii) a second setting wherein the pin moves higher in the first slot in response to the injection of fluids into the wellbore at an increased pumping rate so that the plunger advances to an intermediate position, restricting the plunger from moving down the tubular housing to keep the plunger in its back-jetting mode;

(iii) the first setting again wherein the pin resides in a second slot that keeps the plunger in the raised position in response to the upward biasing force of the spring while pumping at the first rate, or at any rate below the first rate; and

(iv) a third setting wherein the pin moves higher along a third slot in response to the injection of fluids into the wellbore at a second increased rate, or at any rate higher than the second rate, and wherein the plunger slides from the raised position to the lowered position, placing the clean-out tool in its flow-through mode wherein all clean-out fluid flows entirely through the mandrel and the seat.

[0032] A method of cleaning out a wellbore using a clean-out tool is also provided. The method first includes running a clean-out tool into the wellbore. The clean-out tool is run in on a lower end of a string of coiled tubing. The clean-out tool is arranged in accordance with the clean-out tool as described above, in any of its embodiments.

[0033] The method additionally includes locating the clean-out tool at a selected depth along the wellbore. Preferably, the wellbore has been completed with a string of production tubing. In this instance, the clean-out tool is run into the production tubing in order to clean out fill that may have accumulated within the production tubing and casing.

[0034] The method further includes pumping a clean-out fluid down the coiled tubing and into the bore of the tubular housing. This injection is done at a first flow rate. This injection causes a portion of the clean-out fluid to flow into the plunger, out of the radial ports of the plunger, and then back up the tubular housing where this portion will pass through the lower annular region and then exit the clean-out tool through the back jetting ports. The remaining portion of clean-out fluid will flow out of the seat. This is a back-jetting mode.

[0035] The method also includes further pumping the clean-out fluid down the coiled tubing and into the bore of the tubular housing at a second flow rate. Here, the second flow rate is higher than the first flow rate. This increases a hydraulic force acting on the pressure shoulder of the piston, and causes the mandrel and connected plunger to slide downward along the tubular housing.

[0036] As the mandrel and connected plunger move down the tubular housing, the distance of the radial slots in the plunger to the seat will reduce. In this position, the seat

does not restrict the portion of flow exiting the radial slots, which will flow back up the lower annular region and through the back jetting ports. At this point the clean-out tool remains in its back-jetting mode.

[0037] Optionally, flow is dropped back down to the first flow rate. Pump rate is then increased through the clean-out tool, thus increasing hydraulic pressure, until the fluid is pumped at or above the second flow rate. Using a sequencing mechanism, the mandrel and connected plunger move down the tubular housing until the radial slots have cleared the seat. In this position, all of the clean-out fluid now flows through the plunger as located below the seat. This is a flow-through mode. The mandrel may be cycled between the back-jetting mode and the flow-through mode using a sequencing mechanism that is sensitive to pump rate.

[0038] The sequencing mechanism is preferably a J-slot mechanism. In one aspect, the J-slot mechanism has slots that cycle the plunger between the back-jetting mode and the flow-through mode. The J-slot mechanism is configured to:

- (i) maintain the clean-out tool in its raised position while pumping at or below the first pump rate, placing the clean-out tool in a back-jetting mode wherein at least a portion of the clean-out fluid flows through the back jetting ports;

- (ii) maintain the clean-out tool in an intermediate position while increasing pump rate above the first pump rate (which may meet or exceed a second pump rate), and wherein the same portion of the clean-out fluid flows through the mandrel, up the lower annular region and through the back jetting ports;

- (iii) upon dropping the pump rate back down to or below the first pump rate, allowing the spring to move the clean-out tool back to its raised position, which again is the back-jetting mode;

- (iv) upon raising the pump rate to a rate that meets or exceeds the second pump rate (the “activation rate”), move the clean-out tool to its lowered position, placing the clean-out tool in a flow-through mode wherein all clean-out fluid is forced through the seat and downstream of the clean-out tool; and

(v) repeat the cycle of steps (i) through (iv).

BRIEF DESCRIPTION OF THE DRAWINGS

[0039] So that the manner in which the present inventions can be better understood, certain illustrations, charts and/or flow charts are appended hereto. It is to be noted, however, that the drawings illustrate only selected embodiments of the inventions and are therefore not to be considered limiting of scope, for the inventions may admit to other equally effective embodiments and applications.

[0040] Figure 1A is a cross-sectional view of a clean-out tool (or “flow diverter”) of the present invention, in one embodiment. In this view, the clean-out tool is in its run-in position. During the injection of a clean-out fluid, a significant portion of the injected fluid flows to back jetting ports, while the remainder of the fluid flows through the end of the tool.

[0041] Figure 1B is a second cross-sectional view of the clean-out tool of Figure 1A. Here, the clean-out tool has been cycled to an intermediate position. In this position, a significant portion of the injected fluid continues to flow to the back jetting ports while the remainder of the fluid flows through the end of the tool.

[0042] Figure 1C is a third cross-sectional view of the clean-out tool of Figure 1A. Here, the tool has been cycled to its fully lowered position. In this position, a plunger has landed on a seat, and all of the injected fluid travels through the clean-out tool with virtually no clean-out fluid being diverted to the back jetting ports.

[0043] Figure 2A is a cross-sectional view of a clean-out tool of the present invention, in a second embodiment. In this view, the clean-out tool is again in its run-in position wherein a significant portion of injected clean-out fluid flows to back jetting ports, while a remaining portion flows through the end of the tool. In this embodiment, a more restricted orifice (or central flow-through opening) is used in the seat.

[0044] Figure 2B is a second cross-sectional view of the flow diverter of Figure 2A. Here, the flow diverter has been cycled to an intermediate position. In this position, a significant

portion of the injected fluid continues to flow to the back jetting ports while the remainder of the fluid flows through the end of the tool.

[0045] Figure 2C is a third cross-sectional view of the flow diverter of Figure 2A. Here, the tool has been cycled to its lowered position. In this position, the plunger has landed on the seat, with virtually no clean-out fluid being diverted to the back jetting ports.

[0046] Figure 3A is a perspective view of a positive displacement motor as may be placed below the clean-out tool of either Figure 1A or Figure 2A.

[0047] Figure 3B is an example of a suitable sliding sleeve shifting tool that may be used as part of a bottom hole assembly with the flow diverter of Figure 2A.

[0048] Figure 3C is an example of a bridge plug that may be set, retrieved or drilled out using a bottom hole assembly that includes the flow diverter of Figure 2A.

[0049] Figure 4A is a side view of a j-slot mechanism. In this view, pins are in a default position along the slots.

[0050] Figure 4B is another side view of the j-slot mechanism of Figure 4A. In this view, the pins have advanced along the channel and are in an intermediate position.

[0051] Figure 4C is another side view of the j-slot mechanism of Figure 4A. In this view, the pins have advanced along the channel to a second slot but have returned to the default position of Figure 4A.

[0052] Figure 4D is still another side view of the j-slot mechanism of Figure 4A. In this view, the pins have advanced to a new slot along the channel and are now in a fully raised position. In this position, the piston and connected mandrel have moved the plunger of the clean-out tool to its lowered position such that the plunger will land on the seat per Figure 1C or Figure 2C.

[0053] Figure 5A is side view of the mandrel of Figures 1A and 2A. So called J-slots are visible along the outer diameter of the mandrel. These are part of the sequencing mechanism.

[0054] Figure 5B is a cross-sectional view of the mandrel of Figure 5A. The view of the J-slots is retained in phantom.

[0055] Figure 6A is cross-sectional view of a J-slot collar. The J-slot collar includes a pair of opposing pins that ride in the J-slots of Figure 5A. The J-slot collar is also part of the sequencing mechanism.

[0056] Figure 6B is a perspective view of the J-slot collar of Figure 6A.

[0057] Figure 7 is a cross-sectional view the back jet housing of Figures 1A and 2A. Back jetting ports are visible in the body of the housing.

[0058] Figure 8A is a side view of the piston assembly of Figures 1A and 2A.

[0059] Figure 8B is a cross-sectional view of the piston assembly of Figure 8A.

[0060] Figure 8C is a perspective view of the piston assembly of Figure 8A.

[0061] Figure 9A is a side view of the plunger of Figures 1A and 2A.

[0062] Figure 9B is a cross-sectional view of the plunger of Figure 9A.

[0063] Figure 9C is a perspective view of the plunger of Figure 9A.

[0064] Figure 10A is a side view of the stem of Figures 1A, 1B and 1C.

[0065] Figure 10B is cross-sectional view of the stem of Figure 10A.

[0066] Figure 10C is a perspective view of the stem of Figure 10A, taken from the distal end.

[0067] Figure 11A is a side view of the of the combined stem and seat of Figures 1A, 1B and 1C.

[0068] Figure 11B is a cross-sectional view of the combined stem and seat of Figure 11A.

[0069] Figure 12A is a cross-sectional view of a clean-out tool of the present invention, in a third embodiment. In this view, the clean-out tool (or “flow diverter”) is again in its run-in position wherein a significant portion of injected clean-out fluid flows to back jetting ports, while a remaining portion flows through the end of the tool. In this embodiment, no stem is provided with the seat.

[0070] Figure 12A-P1 is an enlarged cross-sectional view of portion P1 of Figure 12A. The relationship between the plunger and seat is more clearly seen.

[0071] Figure 12B is a cross-sectional view of the clean-out tool of Figure 12A. Here, the clean-out tool has been cycled to an intermediate position. In this position, a significant portion of the injected fluid continues to flow to the back jetting ports while the remainder of the fluid flows through the end of the tool.

[0072] Figure 12B-P2 is an enlarged cross-sectional view of portion P2 of Figure 12B. Here, it can be seen that the plunger has approached the seat.

[0073] Figure 12C is a third cross-sectional view of the clean-out tool of Figure 12A. Here, the tool has been cycled to its lowered position. In this position, radial slots along the plunger have passed through the seat, causing virtually all clean-out fluid to flow through the seat and through the bottom of the clean-out tool.

[0074] Figure 12C-P3 is an enlarged cross-sectional view of portion P3 of Figure 12B. Here, it can be seen that the plunger has passed across the seat.

[0075] Figure 12-P4 is another enlarged cross-sectional view of portion P1 of Figure 12A. The radial slots once again are positioned above the seat. However, in this arrangement a lower portion of the plunger has a restricted flow-through channel.

[0076] Figure 12-P5 is still another enlarged cross-sectional view of portion P1 of Figure 12A. The radial slots once again are positioned above the seat. However, in this arrangement a lower portion of the plunger has a closed off bottom.

[0077] Figure 13 is a cross-sectional view of a wellbore. Here, the wellbore has received the clean-out tool of Figure 1A.

[0078] Figure 14 is a flow chart showing operational steps for controlling a flow of fluid through the clean-out tool, in one arrangement.

DETAILED DESCRIPTION OF CERTAIN EMBODIMENTS

Definitions

[0079] For purposes of the present application, it will be understood that the term “hydrocarbon” refers to an organic compound that includes primarily, if not exclusively, the elements hydrogen and carbon. Hydrocarbons may also include other elements, such as, but not limited to, halogens, metallic elements, nitrogen, carbon dioxide, and/or sulfuric components such as hydrogen sulfide.

[0080] As used herein, the term “hydrocarbon fluids” refers to a hydrocarbon or mixtures of hydrocarbons that are gases or liquids. For example, hydrocarbon fluids may include a hydrocarbon or mixtures of hydrocarbons that are gases or liquids at formation conditions, at processing conditions, or at ambient condition.

[0081] As used herein, the terms “produced fluids,” “reservoir fluids” and “production fluids” refer to liquids and/or gases removed from a subsurface formation, including, for example, an organic-rich rock formation. Produced fluids may include both hydrocarbon fluids and non-hydrocarbon fluids. Production fluids may include, but are not limited to, oil, natural gas, pyrolyzed shale oil, synthesis gas, a pyrolysis product of coal, nitrogen, carbon dioxide, hydrogen sulfide and water.

[0082] As used herein, the term “fluid” refers to gases, liquids, and combinations of gases and liquids, as well as to combinations of gases and fines, combinations of liquids and fines, and combinations of gases, liquids, and fines.

[0083] As used herein, the term “wellbore fluids” means water, hydrocarbon fluids, formation fluids, or any other fluids that may be within a wellbore during a production operation.

[0084] As used herein, the term “subsurface” refers to geologic strata occurring below the earth's surface.

[0085] As used herein, the term “formation” refers to any definable subsurface region regardless of size. The formation may contain one or more hydrocarbon-containing layers, one or more non-hydrocarbon containing layers, an overburden, and/or an underburden of any geologic formation. A formation can refer to a single set of related geologic strata of a specific rock type, or to a set of geologic strata of different rock types that contribute to or are encountered in, for example, without limitation, (i) the creation, generation and/or entrapment of hydrocarbons or minerals, and (ii) the execution of processes used to extract hydrocarbons or minerals from the subsurface region.

[0086] As used herein, the term “wellbore” refers to a hole in the subsurface made by drilling or insertion of a conduit into the subsurface. The term “well,” when referring to an opening in the formation, may be used interchangeably with the term “wellbore.”

Description of Selected Specific Embodiments

[0087] **Figure 1A** is a cross-sectional view of a clean-out tool (or “flow diverter”) **100** of the present invention, in one embodiment. The clean-out tool **100** is used to inject fluids into a wellbore for clean-out. An illustrative wellbore is shown at **1300** in **Figure 13** and is discussed below.

[0088] The clean-out tool **100** defines a generally tubular body formed from a series of components. As shown, the clean-out tool **100** has a first (or upstream) end **102** and a second (or downstream) end **104**. A central bore **105** is formed within the body extending from the first end **102** to the second end **104**.

[0089] As will be discussed, the clean-out tool **100** is configured to cycle a position of a mandrel **155** and connected plunger **160** in response to fluid pumping rates into the wellbore **1200** by an operator. In this way, a flow of clean-out fluid through the tool **100** may be adjusted. In the view of **Figure 1A**, the clean-out tool **100** is in its run-in position wherein a portion of the injected fluid flows through the tool **100** from the top (or upstream) end **102** to the bottom (or downstream) end **104** en route to a next downhole tool or to the bottom of the wellbore **1300**, as the case may be. At the same time, at least some of the injected fluid will exit a back jet housing **140** and exit the clean-out tool **100** through radial back jetting ports **148**.

[0090] The clean-out tool **100** first includes a top sub **110**. The top sub **110** defines a tubular body wherein a first (or upstream) end **112** comprises female threads while a second (or downstream) end **114** comprises male threads. The female threads are configured to threadedly connect to a bottom hole assembly (or “BHA”) above (not shown). The upper BHA, in turn, is connected to a string of coiled tubing or other working string, such as through a CT connector (not shown).

[0091] The clean-out tool **100** next includes a spring housing **120**. The spring housing **120** also defines a generally tubular body wherein a first (or upstream) end **122** comprises female threads while a second opposite end **124** comprises male threads. The first end **122** of the spring housing **120** threadedly connects to the second (or downstream) end **114** of the top sub **110**.

[0092] The clean-out tool **100** also includes a spring **125**. The spring **125** resides along an inner diameter of the spring housing **120**. The spring **125** is held in compression within the tool **100**. In one aspect, the spring **125** is an Inconel[®] spring. Alternatively, the spring material is 17-7 stainless steel. Of interest, a shoulder **126** resides along an inner diameter of the spring housing **120**. The shoulder **126** serves as a face against which the spring **125** resides.

[0093] Moving down the tool **100**, the clean-out tool **100** next includes a mandrel seal sub **130**. The mandrel seal sub **130** also defines a generally tubular body wherein a first (or upstream) end **132** comprises female threads while a second opposite (or downstream) end **134**

comprises male threads. The upstream end **132** threadedly connects to the second (or downstream) end **124** of the spring housing **120**. Of interest, the mandrel seal sub **130** encompasses a portion of a sequencing mechanism **400**, discussed below.

[0094] The clean-out tool **100** also comprises a back jet housing **140**. The back jet housing **140** also defines a generally tubular body wherein a first (or upstream) end **142** comprises female threads while a second (or downstream) opposite end **144** also comprises female threads. The back jet housing **140** resides downstream from the top sub **110** and the spring housing **120**. The first end **142** of the back jet housing **140** threadedly connects to the second end **134** of the mandrel seal sub **130**.

[0095] Of importance, the back jet housing **140** comprises one or more back jetting ports **148**. The back jetting ports **148** are placed within the back jet housing **140** at an upward angle. Preferably, the angle is between 10° and 60°, and more preferably at about 45° from the central longitudinal axis. The back jetting ports **148** may be also be disposed radially about the back jet housing **140**, such as at 15° radially. Preferably, a plurality of back jetting ports **148** are placed radially around the back jet housing **140** along at least two levels, and optionally at different angles.

[0096] The top sub **110**, the spring housing **120**, the mandrel seal sub **130**, the back jet housing **140** and the lower sub **190** together make up a tubular housing for the clean-out tool **100**. Of interest, a shoulder **146** resides along an inner diameter of the back jet housing **140**. The shoulder **146** forms a profile above the back jetting ports **148**. A separate shoulder **136** resides at the bottom end **134** of the mandrel seal sub **130**. O-rings are placed inside the bottom end **134**, helping to keep clean-out fluid from flowing from the annular area between the mandrel **155** and the spring housing **120** and to the ports **148** during the flow-through mode.

[0097] The clean-out tool **100** additionally includes a piston assembly **150**. The piston assembly **150** defines a series of components that are configured to slide together along the spring housing **120** in response to fluid pressure. The piston assembly **150** includes an orifice retainer **151**, a piston body **156**, a piston orifice **153** and a piston scraper retainer **157**. The

piston assembly **150** essentially serves as a pressure shoulder, moving down the spring housing **120** in response to fluid pressure applied from the surface.

[0098] It is observed here that while it is pressure that moves the piston assembly **150** down, it is also accurate to refer to changes in flow rate that actuate the piston assembly **150**. This is because the piston orifice **153** is configured according to a desired flow rate to cause the tool **100** to change between modes. In this respect, the orifice **153** is sized to generate the required differential pressure across itself to function. External pressures do not have an impact on the piston assembly **150**; only pressure from the flow rate through the orifice **153** changes the tool mode.

[0099] The orifice retainer **151** secures the piston assembly **150** in place below the top sub **110**. The orifice retainer **151** abuts the lower end **114** of the top sub **110** to hold the piston assembly **150** in place. Various o-rings (not numbered) may be disposed around the piston body **156** and the piston orifice **153** to prevent pressure communication between the areas above and below the piston assembly **150**. Additional details concerning the piston assembly **150** are provided below in connection with **Figures 8A** through **8C**.

[00100] As stated above, the piston assembly **150** is operatively connected to a mandrel **155**. The mandrel **155** has an upper (or upstream) end **152** connected to the piston assembly **150**, and a lower (or downstream) end **154**. The upper end **152** of the mandrel **155** is threadedly connected to the piston body **156**. The piston assembly **150** and connected mandrel **155** reside within the inner diameter of the spring housing **120**.

[00101] In operation, hydraulic pressure (generated by fluid flow through the piston orifice **153**) acts on the shoulder that is the upper side of the piston assembly **150** above the piston orifice **153**. In response, the piston assembly **150** and connected mandrel **155** move down the tubular housing together. Specifically, the piston assembly **150** (and connected mandrel **155**) moves from its raised position (shown in **Figure 1A**), to an intermediate position (shown in **Figure 1B**) and then to a lowered position (shown in **Figure 1C**).

[00102] An annular area **145** is reserved between the mandrel **155** and the surrounding back jet housing **140**. The annular area **145** has an upper portion where the spring **125** resides, and a lower portion where back jetting ports **148** are placed. Appropriate o-rings reside around and inside the downstream end **134** of the mandrel seal sub **130** to provide a fluid seal between the upper and lower annular regions **145**. The annular region the spring **125** resides in is pressure balanced via ports **129** in the mandrel **155**. These ports **129** let the fluid volume inside the spring housing **120** change as the piston body **156** moves up and down.

[00103] It is observed that the back jet housing **140** has an enlarged inner diameter portion **147**. This has the effect of increasing the cross-sectional area of the lower portion of the annular region **145**. The larger cross-sectional area of the enlarged inner diameter portion **147** enables a free flow of clean-out fluid en route to the ports **148**. Clean-out fluid is used to clean the wellbore within the casing, preferably at the conclusion of or in conjunction with a completion operation. Alternatively, clean-out fluid may be used to clean production tubing following a period of production or other wellbore operation.

[00104] At the lower end **154** of the mandrel **155** is a plunger **160**. The plunger **160** defines a short tubular body having an upper (or upstream) end **162** and an opposing lower (or downstream) end **164**. A bore **165** is formed from the upper **162** to the lower **164** end, allowing the clean-out fluid to flow through the plunger **160**. The upper end **162** comprises male threads that connect to the lower end **154** of the mandrel **155**. In this way, the plunger **160** moves up and down along the bore **105** of the clean-out tool **100** with the mandrel **155**.

[00105] As a next component, the clean-out tool **100** includes a lower sub **190**. The lower sub **190** defines an elongated tubular body having an upper end **192** and a lower end **194**. The upper end **192** comprises male threads that connect to the bottom end of the back jet housing **140**. The lower sub **190** forms a bore **195** that is in fluid communication with and forms a part of the bore **105**.

[00106] Finally, the clean-out tool **100** comprises a seat **170**. The seat **170** shown in **Figure 1A** is a standard seat having a flow-through orifice **175** (shown in **Figure 11B**). The seat **170** is configured to receive the lower end **164** of the plunger **160** when the piston body **150** is

moved to a lowered position (seen in **Figure 1C**). Specifically, the lower end **164** of the plunger **160** lands on a high-density, elastomeric annular seal **171** residing within the seat **170**. The orifice **175** is sized to provide little to no restriction in downhole fluid flow.

[00107] In a preferred embodiment, the orifice **175** of the seat **170** receives a stem **180**. The stem **180** defines an elongated tubular body. The stem **180** has a proximal (or upper) end **182** (shown in **Figures 10A** and **10B**) and a distal (or downstream) end **184**. A bore **185** extends from the proximal end **182** to the distal end **184**. Flow-through slots **181** are provided along the stem **180**. Preferably, four equi-radially disposed slots **181** are provided. Additional details concerning the stem **180** are provided and discussed below in connection with **Figures 10A-10C**.

[00108] In the view of **Figure 1A**, the piston body **150** is at its uppermost position. This is its default (or raised) position wherein the orifice retainer **151** is abutting the lower end **114** of the top sub **110**. The piston body **150** is held in this default position due to the upward mechanical force provided by the spring **125**.

[00109] As noted, a piston o-ring may be disposed around the piston body **156** to prevent pressure communication between the area above the piston body **156** and below the piston body **156** when fluid is passing through the orifice **153**. Additionally, an orifice o-ring may be disposed around the orifice **153** to prevent pressure communication between the area above the orifice **153** and below the orifice **153** when fluid is passing through the orifice **153**. The aperture size of the orifice **153** defines the activation rate. Thus, one aspect of using the multi-cycle wellbore clean-out tool **100** involves the selection of the aperture size of the piston orifice **153**.

[00110] In the raised position of **Figure 1A**, fluid is injected by an operator into the bore **105** of the clean-out tool **100** under a first pressure. The first pressure correlates to a first flow rate. Those of ordinary skill in the art will understand that there is a correlation between flow rate, tubular dimension and pressure. At the first flow rate, the hydraulic pressure acting on the piston assembly **150** is not great enough to cause the piston assembly **150** to compress the spring **125**.

[00111] In the position of **Figure 1A**, the plunger **160** extends only partially over the stem **180**. Specifically, the plunger **160** remains above the four radially-disposed slots **181**. As clean-out fluid is injected into the wellbore **1200** at the first flow rate, fluid will pass through the bore **165** of the plunger **160**. A portion of the injected fluid will travel through the slots **181**, back up the annular region **145** and up to the back jetting ports **148**. The remaining portion of the fluid will flow through the stem **180**, below the seat **170** and optionally on to other tools downhole.

[00112] In one optional embodiment of the invention, a back pressure valve (not shown) is placed below the lower sub **190**. The back pressure valve can either be threaded to the distal end **194** of the lower sub **190** or it can be used as the lower sub **190** itself. The back pressure valve works on the principle of biasing force of a spring which blocks the flow of fluids through a passage. The pressure of the fluids above act on an area and against the spring. The user can adjust the force of the spring, which in turn will adjust the force it takes to open an area of flow to the tools below the sub **190**.

[00113] In the present application, a back pressure valve can be configured to divert all of the flow to the back jetting ports **148** up to a pre-determined pressure, set by the operator. For example, if the planned back jetting rate corresponds to a 200 psi pressure drop across the back jetting ports **148**, the back pressure valve can be set to open at 300 psi. When the tool **100** is in its back-jetting mode, all of the flow will go to the ports **148**. When the plunger **160** contacts the seat **170** for flow-through mode, the back pressure valve will be forced open at 300 psi and will provide a pressure indication. This is useful when the operator wants to pump a fluid that it does not want to go through the tools below when in back-jetting mode, such as an acid or nitrogen.

[00114] In an alternate embodiment, and as discussed below in connection with **Figures 12A** through **12C**, a stem is not used in the seat; instead, a plunger **1260** with radial slots **1281** is used within clean-out tool **1200**. In this embodiment, the radial slots **1281** are disposed above the seat **1270** when the clean-out tool **1200** is in its initial or intermediate position, and then moves below the seat **1270** when the clean-out tool **1200** is in its lowered position. No

through-bore is provided below the radial slots **1281**. In this way, clean-out fluid communicates exclusively with either the back jetting housing **140** or to the tools below the seat **1270** separately.

[00115] In another embodiment, a positive displacement motor is used below the lower sub **190**, wherein the motor has a high off-bottom pressure. In this instance, virtually all of the injected fluid in the plunger's raised position will be diverted to the back jetting ports **148**.

[00116] For the embodiment of **Figure 1A**, it is understood that the percentage of fluids flowing back through the ports **148** during the back-jetting mode is a function of various factors. These include the diameter of the ports **148**, the number of the ports **148**, the combined cross-sectional area of the flow through slots **181**, and the cross-sectional area of the annular region **145**. In addition, the total volume of fluid pumped through the clean-out tool **100** is a function of the inner diameter of the piston orifice **153** and the diameter of the bore **105**. Therefore, as part of a method of cleaning out a wellbore herein, the operator determines the number of ports to be used, the size of the ports, the inner diameter of the piston orifice **153**, the area of the slots **181**, the diameter of the bore **155** and the size of the annular region **145** around the bore **155**. These steps are indicated at Box **1460** of the flow chart of **Figure 14**, discussed below.

[00117] Once the wellbore clean-out tool **100** is run into the wellbore **1300**, the operator will begin pumping. During pumping, the operator will increase the pump rate. This will apply a greater hydraulic force to the shoulder of the piston assembly **150** and will start to overcome the biasing force of the spring **125** (plus any friction created by o-rings). The piston assembly **150**, the mandrel **155** and its connected plunger **160** will then start to move down the bore **105**.

[00118] **Figure 1B** is a cross-sectional view of the clean-out tool **100** of **Figure 1A**. Here, the clean-out tool **100** is translating (that is, sliding down the spring housing **120**) to its intermediate position. This is done by increasing the hydraulic force acting on the piston assembly **150**. The increased hydraulic force is achieved by increasing pump rate of the hydraulic fluid into the wellbore from the surface. In response to the increased pressure (or

increasing pump rate), the piston body **150** and connected plunger **160** have slid down to a position where the lower end **164** of the plunger **160** approaches the radial slots **181** in the stem **180**. However, it is important to note that in this intermediate position the radial slots **181** remain exposed to the lower annular region **147** and the tool **100** continues to operate in its back-jetting mode.

[00119] **Figure 1C** is a third cross-sectional view of the clean-out tool of **Figure 1A**. Here, the clean-out tool **100** has been cycled to its lowered position. This is done by further increasing the pump rate above an activation rate, thereby increasing the hydraulic force acting on the shoulder that is the piston assembly **150**. As the plunger **160** moves below the radial slots **181**, substantially all of the clean-out fluid will flow down through the seat **170**, into the bore **195** of the lower sub **190**, and out of the tool **100**.

[00120] The cycling of the tool **100** between its raised position (**Figure 1A**), its intermediate position (**Figure 1B**) and its lowered position (**Figure 1C**) is preferably accomplished by using a sequencing mechanism. The sequencing mechanism is preferably a J-slot mechanism as shown in **Figures 4A-4D**, discussed below. The sequencing mechanism **400** allows the operator to cycle the flow rates to move the tool **100** between settings so that:

- (i) in a first setting, the plunger **160** is in a raised position in response to the biasing mechanical force exerted by the spring **125** on the mandrel **155**, placing the clean-out tool in a back-jetting mode;

- (ii) in a second setting, pumping rate is increased and the J-slot mechanism **400** advances to a next slot, allowing the plunger **160** to move down no more than to its intermediate position and allowing the operator to inject hydraulic fluid into the bore **105** of the tubular housing **110** and through the piston orifice **153** at a second rate, or at any rate higher than the second rate, and keeping the clean-out tool in its back-jetting mode;

- (iii) in the first setting again, hydraulic pumping rate is reduced to its first rate, or any rate below the first rate, and the clean-out tool **100** remains in its back-jetting mode; and

(iv) in a third setting, the plunger **160** is forced down into a lowered position in response to the injection of hydraulic fluid through the piston assembly **150** and into the clean-out tool **100** at a second rate, or at any rate higher than the second rate, moving the J-slot mechanism **400** to a next slot and causing the plunger **160** to slide from the raised position to the lowered position, placing the clean-out tool **100** in its flow-through mode.

[00121] It is observed in **Figure 1C** that the piston body **150** has lowered the plunger **160** down to a position where the plunger **160** has landed onto the seat **170**. In this position, all of the injected fluids travel through the lower end **184** of the stem **180** and to the bottom end **104** of the clean-out tool **100**, with essentially no fluids being diverted to the back jetting ports **148**.

[00122] In the diverter tool **100** of **Figures 1A – 1C**, the stem **180** is a standard-sized stem that simply receives the plunger **160** when the piston body **150** is urged down to its lowered position. The **O.D.** of the stem **180** is configured to slidably receive the lower end **164** of the plunger **160** until the plunger **160** passes below the slots **181** in the stem **180**. This may be referred to as “landing the plunger on the seat” as the plunger **160** is contacting a seal which is considered as integral to the seat **170**. No significant pressure drop takes place through the standard stem **180**. However, the operator may believe that the standard stem **180** allows too much fluid to pass through the bottom end **104** of the clean-out tool **100**, limiting the amount of pressure provided by fluids passing through the back jetting ports **148**. In this instance, the operator may choose to use a restricted orifice seat. This is done by reducing the **I.D.** of the stem **180**.

[00123] **Figure 2A** is a cross-sectional view of a clean-out tool **200** of the present invention, in a second embodiment. In this view, the clean-out tool **200** is again in its run-in position wherein a substantial portion of injected fluid flows to the back jetting ports **148**, while the remaining fluid flows through the lower sub **190** of the tool **200** en route to a next downhole tool. The clean-out tool **200** is built in accordance with the clean-out tool **100** described above. However, in this design a restricted orifice stem **280** has been placed below the plunger **160** in

lieu of the stem **180**. The restricted orifice stem **280** has a more restrictive through opening **285**, limiting the amount of working fluid that can pass through the stem **280**.

[00124] Beneficially, the stem **280** provides a better indicator at the surface as to the position of the plunger **160** (via pump pressure) during cycling. Also as noted, the use of the restricted-orifice stem **280** and its flow-through opening **285** directs a greater percentage of injected fluid to the back jetting ports **148**. For example, in the embodiment of **Figure 2A** the percentage of redirected fluid might be 30% to 40%, or 40% to 50%, or 50% to 90% of the injected fluid. This is true even where the components below the tool **100** have low back pressure.

[00125] As with the clean-out tool **100** of **Figure 1A**, the clean-out tool **200** of **Figure 2A** is configured to move from its raised position (**Figure 2A**) down to its lowered position (**Figure 2C**). This again is done through the use of a cycling mechanism, such as the J-slot mechanism **400** shown in **Figures 4A** through **4D**.

[00126] **Figure 2B** is a cross-sectional view of the clean-out tool **200** of **Figure 2A**. Here, the clean-out tool **200** is translating from its raised position to its intermediate position. En route, a portion of the injected fluid will continue to be diverted through the radial slots **181** and on to the back jetting ports **148**. As with the embodiment of **Figure 1B**, a portion of the hydraulic fluid will flow back up the lower annular region **147**, and then through the back jetting ports **148**. The remaining portion of injected fluid will continue to flow down through the stem **280**, into the bore **195** of the lower sub **190**, and out of the tool **200**. Because the orifice **285** is restricted, this will urge a greater portion of injected clean-out fluid to travel back to the back jetting ports **148**.

[00127] **Figure 2C** is a third cross-sectional view of the flow diverter **200** of **Figure 2A**. Here, the flow diverter **200** has been cycled to its fully lowered position. In this position, all of the injected fluid travels through the flow diverter **200**, with substantially no clean-out fluid being diverted to the back jetting ports **148**. This may be done by increasing hydraulic pressure within the bore **105** of the clean-out tool **200** from the first pressure to the second greater activation pressure. Hydraulic pressure again is increased by increasing pump rate from the surface.

[00128] It is observed that in each of the views of **Figures 1A – 1C** and **2A – 2C**, no tool is shown below the lower sub **190**. However, the bottom end **194** of the sub **190** is configured to threadedly connect to a separate tool that may be placed in the wellbore **1300** below the clean-out tool **100** or **200**. For example, a positive displacement motor (presented in **Figure 3**) may be placed downstream from the clean-out tool **200**. In this instance, the restricted-orifice stem **280** replaces the standard-sized stem **180** to provide an improved feedback signal through pressure increase of approximately 200 psi (with 1.01 SG Fluid) at the same pump-rate to indicate the flow-through mode. Additionally, the restricted-orifice stem **280** provides a secondary function of limiting the flow to the motor **300** while in back-jetting mode.

[00129] **Figure 3** is a perspective view of a positive displacement motor **300**. This provides an example of a tool that may be connected to the lower sub **190**. Preferably, the positive displacement motor **300** would be used in connection with the embodiment **200** of **Figures 2A – 2C**. It is understood that the positive displacement motor **300** is merely illustrative; other positive pressure tools may be placed downstream of the seat **170**.

[00130] It can be seen that the motor **300** includes an elongated tubular body **310**. The body **310** defines a fluid in-take end **312** and a fluid outlet end **314**. The positive displacement motor **300** operates with a rotor and a stator residing within the tubular body **310**. In one aspect, the positive displacement motor **300** is used as an agitator, sending pressure pulses across the wellbore downhole while cleaning. In another aspect, a small drill bit (not shown) is connected to the outlet end **314**, and is turned by the rotor of the motor **300**. The drill bit may also be used for clean-out.

[00131] In any instance, the use of the restricted-orifice stem **280** is particularly appropriate if the “off-bottom” pressure of the positive displacement motor **300** is low. However, depending upon the characteristics of the positive displacement motor **300**, the larger orifice **185** provided in the standard stem **180** may also be acceptable to use.

[00132] As an alternative to the motor **300** of **Figure 3**, a separate nozzle may be placed below the lower sub **190**. In this instance, a standard stem **180** would be used. The separate nozzle is preferably the Helix™ nozzle provided by Coil Solutions Inc. of Calgary, Alberta.

The nozzle would be used for wellbore clean-out below the tool **100**. In an alternative embodiment, a sliding sleeve shifting tool is placed below the lower sub **190**.

[00133] In order to move the clean-out tool **100** or **200** through its position cycles, the operator may increase pressures incrementally. Based upon piston orifice **153** I.D., stem **180** or **280** I.D. and total back jetting port **148** through-opening area, the operator will know at what rate to pump for each cycle. For example, the operator will know a second rate to pump that places the plunger **160** at its lowest, or seated position (**Figures 1C** and **2C**). The difference in tubular pressure between the two modes at the same pump rate serves as a position indicator for cycling.

[00134] To enhance the cycling, a sequencing mechanism such as a J-slot mechanism may be provided. A J-slot mechanism is a cylindrical device having a circuitous channel forming slots. One or more pins ride along the slots, rotating from slot-to-slot in response to changes in fluid pressure.

[00135] **Figure 4A** is a side view of a portion of a J-slot mechanism **400**. It can be seen that a pair of pins **482** reside in respective lower slots **484A**. This is a slot position that would correlate with the default, or raised position of the plunger **160** as presented in **Figures 1A** and **2A**. In this position, the pump rate is below the activation rate. This cycle position will allow injected fluid to flow to the back jet housing **140** while sending the remaining portion of the fluid on through the bottom end **194** of the lower sub **190**.

[00136] **Figure 4B** is another side view of the J-slot mechanism **400** of **Figure 4A**. In this view, the pins **482** have advanced one slot **484B**. In slot **484B**, the pins **482** are in an intermediate position. This is a slot position that would correlate to the operator increasing pump rate from the surface as shown in **Figures 1B** and **2B**. In this position, the location of the J-slot pins **482** restricts the movement of the plunger **160** while allowing the flow-rate to beneficially move above the activation rate. In other words, the plunger **160** will not advance along the stem **180** even when the pump rate is well above the activation rate, allowing vigorous back jetting through ports **148**.

[00137] Figure 4C is another side view of the J-slot mechanism 400 of Figure 4A. In this view, pumping rate has been dropped back below the activation rate, causing the pins 482 to follow along the channel and to advanced one slot 484A. In this position 484A, the plunger 160 has returned to its raised position per Figures 1A and 2A.

[00138] Figure 4D is still another side view of the J-slot mechanism 400 of Figure 4A. In this view, the pump rate has again been increased above the activation rate, causing the pins 482 to advance along the channel to a next slot 484D. In this position, the plunger 160 is seated, isolating the back jetting ports 148 from fluid injection per Figures 1C and 2C. In this position, the operator may inject at high rates to operate a motor 300 or to direct all fluids through a downhole jetting nozzle (not shown). Once the plunger 160 has landed, increases in pump rate will not move the pins 482 any higher in slots 484D.

[00139] The pins 482 advance from slot-to-slot in response to alternating cycles of the piston body 150 and connected internals moving longitudinally. The pins 482 cause the piston assembly 150 and connected internals to ratchet, or rotate, in a circular path. Also, the component housing the J-slot pin or pins 482 may ratchet, or rotate, in a circular path. The J-slot grooves (484A, 484B, 484D) are configured so that the piston body 150 and connected internals travel is unrestricted in the upward direction so that every time the flow rate is brought below the activation rate the plunger 160 is in its raised position and cannot seal against the seat 170 or 270. Additionally, on alternating cycles of the flow rate being brought to or above the activation rate, the J-slot grooves (484A, 484B, 484D) restrict the travel of the piston body 150 and connected internals so the plunger 160 cannot seal against the seat 170 or 270.

[00140] Beneficially, the annular area 145 communicating to the back jetting ports 148 remains open for clean-out at rates above the activation rate. On opposite alternating cycles of the flow rate being brought to or above the activation rate, the J-slot grooves (484D) allow the piston body 150 and connected internals to travel further down so that the plunger 160 passes across the radial slots 181 of the stem 280 (Figure 2B) and then the plunger 160 contacts the seat 270 (Figure 2C), enabling full flow-through to any tools (such as motor 300) disposed below the clean-out tool 200.

[00141] **Figure 5A** is side view of the mandrel **155** of **Figures 1A** and **2A**. So called J-slots **410** are visible along the outer diameter of the mandrel **155**.

[00142] **Figure 5B** is a cross-sectional view of the mandrel **155** of **Figure 5A**. In both **Figures 5A** and **5B**, slot **484D** of the J-slots **410** is visible. Here, the J-slots **410** are shown in phantom.

[00143] It is understood that the J-slots **410** of **Figures 5A** and **5B** are part of the sequencing mechanism **400**. The J-slots **410** work in tandem with a J-slot collar (shown at **420** in **Figure 6A**).

[00144] **Figure 6A** is cross-sectional view of a J-slot collar **420**. The J-slot collar **420** includes a pair of opposing pins **482** that ride in the J-slots **410** of **Figure 5A**.

[00145] **Figure 6B** is a perspective view of the J-slot collar **420** of **Figure 6A**. Visible in this view is one of the pins **482** extending inwardly into a bore **425**.

[00146] **Figure 7** is a cross-sectional view of the back jet housing **140** of **Figures 1A** and **2A**. The proximal (or upstream) end **142** and the distal (or downstream) end **144** are visible. It is observed that the back jet housing **140** defines a wall **141** forming a bore **145**. The bore **145** extends from the proximal **142** to the and distal **144** end. The back jetting ports **148** are visible in the wall **141** making up the housing **140**.

[00147] **Figure 8A** is a side view of the piston assembly **150** of **Figures 1A** and **2A**.

[00148] **Figure 8B** is a cross-sectional view of the piston assembly **150** of **Figure 8A**.

[00149] **Figure 8C** is a perspective view of the piston assembly **150** of **Figure 8A**. The piston assembly **150** will be discussed with reference to **Figures 8A – 8C** together.

[00150] The piston assembly **150** includes an orifice retainer **151**, a piston body **156**, a piston orifice **153** and a piston scraper retainer **157**. The piston orifice **153** resides below the orifice retainer **151**. The piston orifice **153** comprises a shoulder, with the shoulder being exposed to fluid pressure above the fluid assembly **150**. The piston orifice **153** includes a

central through-opening that permits working fluids to flow through the piston assembly **150** during clean-out operations. Piston scrapers (not shown) may be disposed around the piston body **156** to ensure debris is not able to reach the piston body o-ring.

[00151] Figure **9A** is a side view of the plunger **160** of **Figures 1A** and **2A**.

[00152] Figure **9B** is a cross-sectional view of the plunger **160** of **Figure 9A**.

[00153] Figure **9C** is a perspective view of the plunger of **Figure 9A**, taken from a distal end. The plunger **160** will be discussed with reference to **Figures 9A – 9C** together.

[00154] As noted above, the plunger **160** has an upper end **162**, a lower end **164** and a bore **165** formed there between. The bore **165** has an inner diameter (**ID**). The **ID** is dimensioned to slidably receive the stem **180** when moving between its back-jetting mode and its flow-through mode. The plunger **160** is made up of a wall **161** that forms the bore **165**.

[00155] Figure **10A** is a side view of the stem **180** of **Figures 1A, 1B** and **1C**.

[00156] Figure **10B** is cross-sectional view of the stem **180** of **Figure 10A**.

[00157] Figure **10C** is a perspective view of the stem **180** of **Figure 10A**, taken from the distal end. The stem **180** will be discussed with reference to **Figures 10A, 10B** and **10C** together.

[00158] The stem **180** defines an elongated tubular body. The stem **180** has a proximal (or upper) end **182** and a distal (or downstream) end **184**. A bore **185** extends from the proximal end **182** to the distal end **184**. Through-openings (or “slots”) **181** are provided along the stem **180**. In the arrangement of **Figures 10A-10C**, four equi-radially disposed slots **181** are provided.

[00159] The proximal end **182** of the stem **180** has an outer diameter **OD**. The **OD** is dimensioned to be slidably received within the **ID** of the plunger **160**. When the piston assembly **150** and connected plunger **160** are in their raised or intermediate position (or back-jetting mode), the bottom of the plunger **160** resides above the slots **181**. In this position,

jetting fluids are split, with a portion of fluids flowing through the through-openings **181** and back up to the back jetting ports **148**, and a portion flowing on down through the bore **185** of the stem **180**.

[00160] When the piston assembly **150** and connected plunger **160** are in their lowered (or flow through) mode, the bottom of the plunger **160** advances past the slots **181**. In this position, most (and preferably all) of the jetting fluids flow down through the bore **185** of the stem **180** and to a tool below. In either the back-jetting mode or the flow-through mode the plunger **160** is disposed over the **OD** of the stem **180**. In other words, the stem **180** is always overlapping the plunger **160** to at least some extent. In one embodiment, when the piston assembly **150** and connected mandrel **155** are in their upper position, the plunger **160** will overlap with the stem **180** by about $\frac{1}{2}$ ".

[00161] In the arrangement shown in **Figures 1A-1C** and **2A-2C**, the stem **180**, **280** is received within the plunger **160**. However, the alternate telescopic relationship may also be employed, that is, the plunger **160** is received within the stem **180**.

[00162] **Figure 11A** is a side view of the combined seat **170** and stem **180** of **Figures 1A**, **1B** and **1C**.

[00163] **Figure 11B** is a cross-sectional view of the combined seat **170** and stem **180** of **Figure 11A**.

[00164] It can be seen that a shoulder of the seat **170** rests on the proximal end **192** of the lower sub **190**. In this respect, the distal end **184** of the stem **180** flanges out to serve as a base for threadedly connecting the stem **180** and seat **170**. An annular seal **171** is placed between an inner diameter of the seat **170** and an outer diameter of the stem **180**. The seat **170** and stem **180** are connected to form an integral body, supported by the lower sub **190**.

[00165] As noted above, an annular seal **171** is placed along an inner diameter of the seat **170** and an outer diameter of the stem **180**. The annular seal **171** represents an enlarged, high density o-ring that may be fabricated, for example, from synthetic rubber and fluoropolymer

elastomers. An example is a polymer seal provided by The Chemours Company FC, LLC of Wilmington, Delaware. Seals and o-rings are available from The Chemours Company under the Viton[®] brand.

[00166] With the tool designs of **Figures 1A** and **2A**, once the tool **100** or **200** shifted modes and the plunger **160** landed on the seat **170** (more specifically, the annular seal **171**) the pump-rate should be increased by approximately 10% for the plunger **160** to provide sufficient compression on the Viton[®] material in order to create a true fluid seal. This all happens within the pump-rate specified for the orifice size the tool **100** or **200** is configured with; however, some users may see the pressure increase (indicated flow-thru/milling mode) and assume the transition was complete, but this is not necessarily the case since there would still be fluid weeping out of the annular ports **181** at this time. With the third embodiment **1200**, once the mandrel **155** and connected plunger **1260** move down and the radial slots **1281** the plunger **1260** have crossed the ID seals **1275** in the seat **1270**, the mode change is complete and will coincide with the moment the user observes the pressure indication.

[00167] As an alternative to the clean-out tool **100** and its annular seal **171**, a third embodiment of a clean-out tool is presented herein. In this embodiment, the annular seal **171** and the stem **180** are removed. This alternative clean-out tool is presented at **1200** in **Figures 12A, 12B** and **12C**.

[00168] **Figure 12A** is a cross-sectional view of the clean-out tool **1200**, in the third embodiment. In this view, the clean-out tool (or “flow diverter”) **1200** is again in its run-in position wherein a significant portion of injected clean-out fluid flows to back jetting ports **148**, while a remaining portion flows through the end of the tool **1200**. Specifically, a portion of the clean-out fluids flow through the bore **195** of the lower sub **190**.

[00169] The clean-out tool **1200** is built in accordance with the clean-out tool **100** described above. However, in **Figure 12A** a new seat design **1270** is provided. Of importance, the stem **180** from **Figure 1A** has been removed from the seat **1270**. In addition, the slots **181** that previously resided within the stem **180** are now placed within a modified plunger **1260**.

[00170] The seat **1270** represents an essentially tubular body secured proximate the lower end **144** of the back jet housing **140**. Specifically, the seat **1270** resides along an inner diameter of the back jet housing **140**, and sits on top of the top end **192** of the lower sub **190**. O-rings (not numbered) are suitably placed along the inner and outer diameters of the seat **1270**. In this way, seals are placed along the interfaces with the back jet housing **140** and the lower sub **190**. In addition, the through-opening of the seat **1270** is dimensioned to slidably receive the plunger **160**.

[00171] **Figure 12A-P1** is a cross-sectional view of portion **P1** of **Figure 12A**. **P1** represents an enlarged view of area **P1**, showing the relationship between a modified plunger **1260** and the modified seat **1270**. The modified plunger **1260** has an upper (or upstream) end **1262** and an opposing lower (or downstream) end **1264**. A bore **1265** is formed from the upper **1262** to the lower **1264** end, allowing the clean-out fluid to flow through the plunger **1260**. The upper end **1262** comprises male threads that connect to the lower end **154** of the mandrel **155**. In this way, the modified plunger **1260** still moves up and down along the bore **105** of the clean-out tool **1200** with the mandrel **155**.

[00172] It can be seen that the plunger **1260** has only partially entered the through-opening of the seat **1270**. This is the default, or run-in position of the clean-out tool **1200**. Here, the clean-out tool **1200** is in its back-jetting (or “clean-out”) mode. In the back-jetting mode, the operator pumps clean-out fluid into the working string and the bore **105** of the tubular housing below the activation rate.

[00173] In the arrangement of **Figure 12A**, the radial slots **1281** are positioned above the seat **1270**. This allows a significant portion of the clean-out fluids to flow back up the annular region **145** around the mandrel **155**, and through the jetting ports **148**. Beneficially, no stem **180** is required.

[00174] **Figure 12B** is a second cross-sectional view of the clean-out tool **1200** of **Figure 12A**. Here, the clean-out tool **1200** is translating from its raised position to an intermediate position. In this position, a significant portion of the injected fluid continues to flow through

the radial slots **1281** and on to the back jetting ports **148**. The remaining portion of injected fluid will continue to flow down through the seat **1270** and the end of the tool **1200**.

[00175] **Figure 12B-P2** is an enlarged cross-sectional view of portion **P2** of **Figure 12B**. Here, it can be seen that the plunger **1260** has approached the seat **1270**. However, the radial slots **1281** still reside above the seat **1270**.

[00176] **Figure 12C** is a third cross-sectional view of the clean-out tool **1200** of **Figure 12A**. Here, the flow diverter tool **1200** has been cycled to its fully lowered position. In this position, the plunger **1260** has landed on the seat **1270**. Specifically, a shoulder **1278** along the plunger **1260** has landed on an upper end of the seat **1270**.

[00177] **Figure 12C-P3** is an enlarged cross-sectional view of portion **P3** of **Figure 12B**. Here, it can be seen that the plunger **1260** has passed across the seat **1270**. The radial slots **1281** have passed the seat **1270**, forcing all clean-out fluids to flow through the bottom of the tool. In this position, virtually no clean-out fluid is diverted to the back jetting ports **148**.

[00178] The benefit to this third embodiment **1200** is that the tool does not rely on the Viton[®] seal **171** to close off flow to the back-jetting ports **148**. This avoids the potential issue of the seal **171** degrading over time. Instead, much smaller o-rings **1275** (or, optionally, PTFE seals energized by o-rings) are provided along the inner and outer diameters of the seat **1270**, providing a more reliable design.

[00179] In one aspect, an inner diameter of the plunger **1260** below the radial slots **1281** can be tuned to adjust a flow split of clean-out fluid while the clean-out tool **1200** is in its back-jetting mode. This enables the inner diameter of the plunger **1260** below the radial slots **1281** to be reduced completely to zero in order to direct the entire flow to the back-jetting ports during back-jetting mode.

[00180] **Figure 12-P4** is another enlarged cross-sectional view of portion **P1** of **Figure 12A**. The radial slot **1281** once again are positioned above the seat **1270**. However, in this arrangement a lower portion **1264'** of the plunger **1260** has a restricted flow-through channel

1268. This is similar to what was done with the distal end **184** of the stem **180** shown in **Figures 2A, 2B and 2C.**

[00181] **Figure 12-P5** is still another enlarged cross-sectional view of portion **P1** of **Figure 12A.** The radial slots **1281** once again are positioned above the seat **1270.** However, in this arrangement a lower portion **1264''** of the plunger **1260** is closed off. In this instance, the lower portion **1264''** is a solid body. The solid body may be fabricated from steel, plastic or an elastomeric material.

[00182] Of interest, in the embodiment of **Figure 12-P5,** when the clean-out tool **1200** is in its the second setting, the operator may vigorously inject a working fluid into the tubular housing **110** to clean out the wellbore without losing a portion of the working fluid through the seat **1270.**

[00183] In any embodiment, the clean-out tool **100, 200, 1200** (with or without tool **300** or some bottom hole assembly below) is intended to be run into a wellbore. **Figure 13** is a cross-sectional view of an illustrative wellbore **1300.** The wellbore **1300** penetrates into a subsurface formation **1350.** The wellbore **1300** has been completed as a cased-hole completion for producing hydrocarbon fluids. More importantly for purposes of the present disclosure, the wellbore **1300** has received a multi-cycle clean-out tool such as the tool **1200** of **Figure 12A.**

[00184] It can be seen that the wellbore **1300** has been completed with a series of pipe strings referred to as casing. First, a string of surface casing **1310** has been cemented into the formation **1350.** The cement resides in an annular region **1315** around the casing **1310,** forming an annular sheath **1312.** The surface casing **1310** has an upper end in sealed connection with a bottom wellhead valve **1364.**

[00185] Next, at least one intermediate string of casing **1320** is cemented into the wellbore **1300.** The intermediate string of casing **1300** is in sealed fluid communication with a top wellhead valve **1362.** A cement sheath **1322** resides in an annular region **1325** of the wellbore **1300.** The combination of the casing **1310 / 1320** and the cement sheaths **1312, 1322** in the annular regions **1315, 1325** strengthens the wellbore **1300** and facilitates the isolation of

aquitards and formations behind the casing **1310 / 1320**. It is understood that a wellbore **1300** may, and typically will, include more than one string of intermediate casing.

[00186] Finally, a production string **1330** is provided. The production string **1330** is hung from the intermediate casing string **1320** using a liner hanger **1331**. The production string **1330** is a liner that is not tied back to the surface **1301**. In the arrangement of **Figure 13**, a cement sheath **1332** is provided around the liner **1330**. The cement sheath **1332** fills an annular region **1335** between the liner **1330** and the surrounding rock matrix in the subsurface formation **1350**.

[00187] The production liner **1330** has a lower end **1334** that extends to an end **1354** (or “toe”) of the wellbore **1300**. For this reason, the wellbore **1300** is said to be completed as a cased-hole well. Those of ordinary skill in the art will understand that for production purposes, the liner **1330** will be perforated after cementing to create fluid communication between a bore **1345** of the liner **1330** and the surrounding rock matrix making up the subsurface formation **1350**. In one aspect, the production string **1330** is not a liner but is a casing string that extends back to the surface. In this instance, the cement sheath **1332** will not be extended to the surface **1301**.

[00188] As an alternative, end **1354** of the wellbore **1300** may include joints of sand screen (not shown). The use of sand screens with gravel packs allows for greater fluid communication between the bore **1345** of the liner **1330** and the surrounding rock matrix **1350** while still providing support for the wellbore **1300**. In this instance, the wellbore **1300** would include a slotted base pipe as part of the sand screen joints. Of course, the sand screen joints would not be cemented into place.

[00189] It is also noted that the bottom end **1354** of the wellbore **1300** is completed substantially horizontally. This is a common orientation for wells that are completed in so-called “tight” or “unconventional” formations. Indeed, in the United States well over half of all wells are now completed horizontally. In the wellbore **1300** of **Figure 13**, the horizontal portion extends along a “pay zone” **1355**.

[00190] Horizontal completions not only dramatically increase exposure of the wellbore to the producing rock face, but also enable the operator to create fractures that are substantially transverse to the direction of the wellbore. Those of ordinary skill in the art may understand that a rock matrix will generally “part” in a direction that is perpendicular to the direction of least principal stress. For deeper wells, that direction is typically substantially vertical. However, the present inventions have equal utility in vertically completed wells or in multi-lateral deviated wells.

[00191] When completed, the wellbore **1300** will include a string of production tubing (not shown). However, before that is done, it is desirable to clean out the wellbore **1300**. Accordingly, the wellbore **1300** includes the clean-out tool **1200** as shown in **Figures 12A-12C**.

[00192] It is noted that the clean-out tool **1200** is connected to a string of coiled tubing **1340**. The coiled tubing string **1340** serves as a working string for delivering an aqueous fluid under high pressures downhole. Such pressures may exceed 500 psi, or even 3,000 psi. The clean-out tool **1200** is preferably extended along the horizontal leg of the wellbore **1300** through the pay zone **1355**.

[00193] A lubricator **1360** or frac tree is placed over the wellbore **1300**. The lubricator **1360** is positioned at the surface **1301** to control wellbore pressures during a completion (or other wellbore) operation and to isolate tools such as a string of coiled tubing **1340** being moved into and back out of the wellbore **1300**. A surfactant may be added to the clean-out fluid to assure that the fluid moves through the clean-out tool **1200** and up the wellbore **1300**. Preferably, the fluid is filtered to minimize plugging of back jetting ports **148**.

[00194] In one aspect, the coiled tubing string **1340** is dimensioned to be inserted into a string of production tubing (not shown). In this way, the production tubing may be cleaned out after a period of production.

[00195] Using any of the flow diverters **100, 200** or **1200** described above, a method **1400** of conducting a wellbore operation is also provided. The method **1400** is presented in the flow chart of **Figure 14**.

[00196] The method **1400** first includes providing a wellbore. This is indicated at Box **1410**. The wellbore is being completed for the production of hydrocarbon fluids. Of interest, the wellbore has been formed with a string of casing, including a string of production casing along a selected subsurface formation.

[00197] The wellbore may be completed vertically. Alternatively, the wellbore may be a deviated well formed from a lateral drilling operation. More preferably, the wellbore is completed horizontally as shown in **Figure 13**. However, the methods are not limited to the orientation of the wellbore unless expressly stated in the claims.

[00198] It is understood that for purposes of Box **1410**, the term “providing” includes but is not limited to “forming” or “completing.” The term “providing” may also mean that a service company accesses a wellbore that has already been drilled and completed, or accesses a wellbore that has been undergoing production operations for a period of time.

[00199] The method **1400** also includes running a clean-out tool into the wellbore. This is provided in Box **1420**. The clean-out tool is run into the wellbore at the lower end of a string of coiled tubing **1340**. The clean-out tool may be constructed in accordance with any of the embodiments **100, 200, 1200** described above. Particularly, the clean-out tool is a multi-cycle tool having a tubular housing that includes an elongated bore. Fluids are pumped from the surface, down the string of coiled tubing, and into the bore.

[00200] The clean-out tool includes one or more back jetting ports. At least some of the ports are disposed at an upward angle. In this way, injected clean-out fluids flow through the ports and exit the clean-out tool at an upward angle to sweep any particles or debris in the casing toward the surface (or at least upstream).

[00201] The method **1400** additionally includes locating the clean-out tool. This is seen at Box **1430**. The clean-out tool is located at a selected depth along a tubular body within the wellbore. Subsurface formation **1355** of **Figure 13** is an example of a location or depth for the clean-out tool. The term “depth” may include “total depth” a selected distance along a horizontal wellbore.

[00202] The method **1400** further includes pumping a clean-out fluid down the coiled tubing string. This is provided at Box **1440**. The fluid is a hydraulic fluid that is pumped into the wellbore under pressure. The fluid is pumped down the coiled tubing and into the bore of the tubular housing making up the clean-out tool at a first flow rate. The first flow rate is below an activation rate. The pumping at the first flow rate causes at least a portion of clean-out fluid to flow through the mandrel, through radial slots, back up the lower annular region and through the back jetting ports. This step of Box **1440** is illustrated in **Figure 12A**.

[00203] It is again noted that in the arrangement of **Figure 12-P4**, the lower end **1264'** of the plunger **1260** is significantly restricted. In this instance, a majority of the clean-out fluid flows back through the back jetting ports when the clean-out tool is in its back-jetting mode. In the arrangement of **Figure 12-P5**, the lower end **1264''** of the plunger **1260** is completely closed off. In this instance, all clean-out fluid flows back through the back jetting ports when the clean-out tool is in its back-jetting mode

[00204] The method **1400** also includes further pumping the clean-out fluid down the coiled tubing and into the bore of the tubular housing at a second flow rate. This is shown at Box **1450**. The second flow rate is higher than the first flow rate. In this instance, the higher flow rate increases a hydraulic force acting on a pressure shoulder of a piston, causing a mandrel and connected plunger to slide along a tubular housing such that the plunger passes along a through-opening in the seat. The radial slots in the plunger move below the seat. The result is that all of the injected clean-out fluid now flows through a distal end of the tool. This step of Box **1450** is illustrated in **Figure 12C**.

[00205] To effectuate the method **1400**, it is preferred that a sequencing mechanism be placed along the tubular housing. The sequencing mechanism may be a J-slot mechanism. The J-slot mechanism may be configured to cycle between three settings. Those include:

(i) a first setting wherein a pin associated with the J-slot mechanism resides in a first slot that places the plunger in a raised position in response to a biasing mechanical force exerted by a spring on the mandrel while pumping at a first rate, placing the clean-out tool in a back-jetting mode (shown in **Figures 1A, 2A and 12A**);

(ii) a second setting wherein the pin moves higher in the first slot in response to the injection of fluids into the wellbore at a second increased rate, placing the plunger into an intermediate position while allowing the tool to remain in its back-jetting mode (shown in **Figures 1B, 2B and 12B**);

(iii) the first setting again wherein the pin resides in a second slot that keeps the plunger in the raised position in response to the upward biasing force of the spring; and

(iv) a third setting wherein the pin moves higher along a third slot in response to the injection of fluids into the wellbore at a second increased rate, and wherein the plunger slides from the raised position to the lowered position, placing the clean-out tool in its flow-through mode (shown in **Figures 1C, 2C and 12C**).

[00206] It is observed that the second increased rate is an activation rate. The pump rate in both the second setting and the third setting may be higher than the activation rate.

[00207] Additional steps may be taken in connection with the method **1400**. These relate to tuning the various openings along the tool in order to provide a desired total cross-sectional area of fluid flow. Such steps are presented in Box **1460**.

[00208] For example, Box **1460** may include a step of adjusting an aperture size of an orifice associated with the piston. This has the effect of varying flow rates associated with the raised and lowered positions. In order for the clean-out tool to change modes, the piston

orifice needs to be sized small enough to ensure the required activation rate will be achievable during the operation. Although the clean-out tool will change modes correctly, sizing the piston orifice too small for a planned pump-rate will cause excessive and unnecessary pressure drop that may limit the total flow capacity of the operation in back-jetting mode. Optimally, the piston orifice is sized appropriately to ensure the activation rate will be achievable in both modes throughout the operation with minimal back-pressure.

[00209] Additionally, in connection with the first two embodiments herein the step of Box **1460** may also include adjusting a through-opening size of an orifice associated with the seat. Preferably, the orifice is part of a stem placed within the seat. In connection with the third embodiment herein, the step of Box **1460** may include adjusting a through-opening size at the bottom of the plunger. In both instances, a larger through-opening enables more working fluid to flow through the bore of the clean-out tool and less fluid to back flow to the back jetting ports during back-jetting mode. Reciprocally, a smaller through-opening allows less fluid to flow through the bore of the clean-out tool and more fluid to back flow to the back jetting ports during back-jetting (or “clean-out”) mode.

[00210] Additionally, Box **1460** may also include a step of adjusting a size of the back jetting ports. When used with a clean-out tool below the seat, such as a Helix™ nozzle, the back jetting ports should be sized large enough to provide a significantly reduced pressure drop to enable increasing the annular velocity and desirable rate split between the back-jet housing and the Helix while in back-jetting mode. At the same time, the ports should be small enough to provide ample flow restriction for effective jetting.

[00211] Additionally, in connection with the first two embodiments herein the Box **1460** may include the step of selecting a cross-sectional area for the flow through the radial slots in the stem. The process of selecting total cross-sectional areas through which clean-out fluids may flow is shown in Box **1460**.

[00212] It is observed that while Box **1460** is shown at the end of the flow chart for the method **1400** of **Figure 14**, it is understood that these steps may and likely will be taken during tool design and before the tool is run into the wellbore in Box **1420**.

[00213] As can be seen, unique multi-cycle wellbore clean-out tools have been provided. The clean-out tools act as a flow diverter that increases the efficiency of fill removal operations. Fluid flow can also be sent through the tool to an optional bottom hole assembly below while having fluid communication with a back-jetting housing. The cycling of fluid flow modes is possible an unlimited number of times and does not require dropping a ball or reversing circulation.

[00214] The modes of the clean-out tool may be manipulated through a combination of flow rate and sequence. Feedback is received at the surface through pump pressure indication. In a first setting, flow rate to the clean-out tool is below an activation rate. This allows the fluid flow to be in communication with the back jet housing as well as a nozzle or any bottom hole assembly or other tool that may be placed below the clean-out tool. In other words, the flow is split between the back jetting ports and a downstream nozzle. This is shown in **Figures 1A, 2A and 12A** as well as **Figure 4A**.

[00215] An activation rate is selected for moving the clean-out tool from its first setting to a second setting. In the second setting, the mandrel and connected plunger begin to slide down the tubular housing towards the seat. The activation rate is based on orifice cross-sectional area selection and may be pre-determined for a specific application.

[00216] In the second setting, the plunger will not pass through the seat; instead, downward movement will be restricted by the sequencing mechanism. The use of a sequencing mechanism for cycling allows the operator to pump at a high flow rate (that is, above the activation rate) during back-jetting mode, increasing annular velocity for fill removal in the second setting. Additionally, orientation and selected cross-sectional area of the ports in the back-jetting housing aids in sweeping solids from the casing. This is shown in **Figures 1B, 2B and 12B** as well as **Figure 4B**.

[00217] To advance the sequencing mechanism, the operator will reduce the pump rate back down to or below the first rate. The clean-out tool defaults back to its back-jetting mode.

[00218] In a third setting, flow rate is moved back up to, and above, the activation rate. This will advance the sequencing mechanism and allow the plunger to fully land on the seat. This is shown in **Figures 1C** and **2C** as well as **Figure 4C**. Alternatively, this will allow the radial slots in the plunger to pass across the seat as shown in **Figure 12C**. In this position the clean-out tool is in its flow-through mode. The tool will direct the entire flow through to the nozzle or BHA below. Confirmation of this mode is given through an increase of pump pressure due to the entire flow now exiting through the bottom of the clean-out tool as opposed to a split between the back-jetting ports and the bottom of the clean-out tool.

[00219] In the scenario of a plunger **1260** where no through-bore is provided below the radial slots **1281**, the clean-out tool **1200** will need to be configured to provide a difference in pressures between a majority of the flow rate being directed to the back-jetting ports versus through to the bottom-hole assembly below. In this way, a surface indication of the clean-out tool's mode may be detected.

[00220] To return to the back-jetting mode, the flow rate may be reduced to a minimum pump-rate until pump pressure has stabilized. The tool will remain in back-jetting mode (**Figures 1B**, **2B** and **12B**) following a subsequent increase in flow rates, even above the activation rate. The tool will continue to remain in this back-jetting mode when the flowrate is lowered down to the minimum pump-rate (**Figures 1A**, **2A** and **12A**).

[00221] As can be seen, an improved flow diverter tool **100**, **200**, **1200** for wellbore clean-out operations has been provided. The tool can be used for almost any coiled tubing application wherein fluid is circulated downhole.

[00222] In one aspect, the clean-out tool is part of a bottom hole assembly that includes a downhole tool. The downhole tool is threadedly (or otherwise operatively) connected to the lower end of the lower sub. An upper end of the lower sub supports or is abutted against or otherwise resides proximate to the seat.

[00223] In one embodiment, the downhole tool is a positive displacement motor. The positive displacement motor is configured to rotate a connected mill bit in response to

hydraulic pressure received when the clean-out tool is in its clean-out mode. In a preferred application, the downhole tool is a positive displacement motor, such as motor **300** and is used for a milling operation.

[00224] Generally, milling operations are used to remove scale, cement or consolidated fill in a wellbore. Milling operations may also be conducted to remove plugs that have been placed in the well bore. For milling, the operator may mill a first plug using the fluid flow-through mode, then switch the tool to back to its back-jetting mode to circulate out cuttings at a higher rate. The tool can then be cycled back to the fluid flow-through mode and continue to the next plug for milling again. The tool allows for higher circulation rates without over-running the motor, achieving higher annular velocities.

[00225] Alternatively, a nozzle may be placed below the flow diverter tool. The nozzle may be any type of nozzle such as a so-called wash nozzle, a hydraulic jetting nozzle, a high pressure rotary nozzle or a pulsating wash tool. The nozzle serves to agitate fill that may have collected in the wellbore, facilitating clean-out in the wellbore while the tool is translated.

[00226] It is observed that various nozzles alternative to the Helix™ nozzle mentioned above may be used below the clean-out tool **100, 200, 1200**. For example, a nozzle for jet drilling such as is disclosed in U.S. Patent No. 6,668,948 may be used. Alternatively, any of the rotary nozzles as disclosed in U.S. Patent Publ. No. 2016/0160619 may be employed. Alternatively still, the internally rotating nozzle of U.S. Patent No. 9,845,641 may be used.

[00227] As an alternative to a nozzle, the lower sub may be threadedly connected to a bottom hole assembly that includes a sliding sleeve shifting tool. The clean-out tool allows the operator to generate a back jetting flow rate above the activation rate of the sliding sleeve shifting tool for wellbore cleanout while the bottom hole assembly is in the wellbore. This may be done without prematurely activating the sliding sleeve shifting tool. The sliding sleeve shifting tool may be part of a BHA containing an extended reach tool, such as an NOV® agitator tool. Wellbore clean-out can be conducted to a target depth before activating the sliding sleeve shifting tool at its activation rate.

[00228] Figure 3B presents an example of a suitable sliding sleeve shifting tool **300B**. This illustrative tool **300B** is a bi-directional shifting tool that is available from Hunting Energy Services, LLC of Houston, Texas.

[00229] In one application, the flow diverter tool **100, 200, 1200** is run into a lateral bore hole. In this instance, a whipstock is placed immediately below the lateral bore hole and the flow diverter tool is then run into the wellbore and against the concave face of the whipstock.

[00230] The flow diverter tool **100, 200, 1200** may also be used in connection with drilling operations. Specifically, the tool can be placed along a coiled tubing string wherein a well is being deepened, or wherein a side tracking operation is being conducted. In operation, the operator drills out a section of the well with the flow diverter tool in the fluid flow-through mode using a milling tool or a drill bit. The operator then switches the tool to its back-jetting mode and circulates out cuttings at a higher pumping rate. The operator then switches back to the fluid flow-through mode and drills another section of the wellbore. In a drilling operation, the tool again allows for higher circulation rates without over running the motor, achieving higher annular clean-out velocities.

[00231] The flow diverter tool **100, 200, 1200** may further be used with a back pressure valve during underbalanced situations. In such situations the operator may use a column of nitrogen to lighten the hydrostatic head. After milling a plug and any fill that is encountered, the operator switches back to the back-jetting mode. During this mode, the operator can circulate nitrified fluid down the working string without circulating through the motor. It is noted that with many motors, nitrogen can shorten the life of the stator. Upon circulating the string back to fluid again the operator can switch modes and continue the milling operation.

[00232] Of interest, the flow diverter tool **100, 200, 1200** can also be run with setting tools or shifting tools. These include sliding sleeves and multi-stage frac sleeves. The flow diverter tool allows high clean-out circulations rates without activating a completion tool below, e.g., circulating above a shifting tool at a rate above the activation rate of the shifting tool -- without the possibility of activating the shifting mechanism in the tool.

[00233] In a specific example, the operator may set a resettable bridge plug for a multi-stage fracturing operation with the flow diverter tool **100, 200, 1200** installed above the resettable bridge plug. In this instance, circulation remains possible through the back jetting ports without activating a hydraulically activated bridge plug below. In the case of a mechanically set plug, the flow diverter allows the operator to switch between circulating through the bottom of the plug when the plug is not set, and circulating above the plug when the plug is set.

[00234] **Figure 3C** presents an example of a suitable bridge plug **300C**. This illustrative tool **300C** is a Crownstone™ GTV tubing-retrievable well barrier (or retrievable bridge plug) that is available from Baker Hughes (a GE Company) also of Houston, Texas.

[00235] In another embodiment, the flow diverter tool **100, 200, 1200** can be run in connection with an acid stimulation operation. In this instance, a high pressure jetting tool may be run below the flow diverter to remove scale, or clean perforations prior to acidizing. If the rate the formation takes the stimulation fluid is not a limiting factor, the tool can be shifted to divert flow to the larger back jet ports and the rate at which the job is pumped can be increased reducing time and increasing efficiency.

[00236] The use of a back pressure valve may also be useful where a sensitive tool is positioned on the tool string below the flow diverter, and the operator wishes to ensure that the sensitive tool will not activate when in back-jetting mode. Basically, any operation where a tool below may restrict the amount of flow that is reasonably possible with the current work string. The tool can increase operational efficiency by either eliminating unneeded trips out of the hole to change tools or reduce operational time by allowing the operator to increase the flow rate and subsequently complete the job faster.

[00237] Further, variations of the tool and of methods for cleaning out a wellbore may fall within the spirit of the claims, below. It will be appreciated that the inventions are susceptible to other modifications, variations and changes without departing from the spirit thereof.

1. A multi-cycle clean-out tool for controlling a direction of a clean-out fluid within a wellbore, the wellbore having been lined with a string of production casing, and the clean-out tool comprising:

a tubular housing providing an elongated bore through which fluids may be injected, the tubular housing having one or more back jetting ports;

a piston disposed at an upstream end of the tubular housing, the piston forming a pressure shoulder and having an orifice configured to deliver clean-out fluid from a wellbore conveyance tubing to the elongated bore of the housing;

a tubular mandrel slidably positioned within the housing, the mandrel having a proximal end connected to or acted upon by the piston, and an open distal end forming a plunger;

one or more radial slots disposed along the plunger; and

a seat disposed along the tubular housing below the distal end of the tubular mandrel, the seat being configured to slidably receive the plunger when the piston and connected tubular mandrel slide from a raised position (a “back-jetting mode”) wherein the radial slots are above the seat, to a lowered position (a “flow-through mode”) wherein the radial slots are along or below the seat;

and wherein the clean-out tool is configured to cycle a position of the mandrel and connected plunger in response to changes in fluid pumping rate into the conveyance tubing, with the mandrel and connected plunger moving between the back-jetting mode wherein at least a portion of the clean-out fluid flows through the back jetting ports, and the flow-through mode wherein the clean-out fluid flows entirely through the plunger and below the seat.

2. The wellbore clean-out tool of claim 1, wherein

the plunger is configured to move in telescopic relation to the seat in response to the changes in fluid pumping rate.

3. The wellbore clean-out tool of claim 2, wherein the tubular housing comprises:

an upper sub having a first upper end and a second lower end; and

a lower sub having a first upper end abutted to the seat, and a lower end threadedly connected to a downhole tool.

4. The wellbore clean-out tool of claim 3, wherein the downhole tool is (i) a hydraulic nozzle, (ii) a bridge plug, (iii) a sliding sleeve shifting tool, or (iv) a positive displacement motor.

5. The wellbore clean-out tool of claim 2, wherein:

a lower annular region is formed between the mandrel and the surrounding tubular housing providing fluid communication between the elongated bore of the tubular housing and the back jetting ports;

the plunger defines a tubular body having an outer diameter;

the through opening of the seat comprises an inner diameter dimensioned to closely receive the outer diameter of the plunger; and

at least a portion of the plunger overlaps with the through-opening of the seat when the piston and connected mandrel are in the raised position.

6. The wellbore clean-out tool of claim 2, wherein:

the at least one radial slot comprises a plurality of radially-disposed slots; and

an inner diameter of the plunger below the radial slots is tuned to adjust a flow split of clean-out fluid between the back jetting ports and the seat while the clean-out tool is in its back-jetting mode.

7. The wellbore clean-out tool of claim 6, wherein:

a lower end of the plunger is completely closed off to flow; and

the radially-disposed slots reside above the lower end of the plunger such that all clean-out fluid flows back through the back jetting ports when the clean-out tool is in its back-jetting mode.

8. The wellbore clean-out tool of claim 2, wherein:

the wellbore further comprises a string of production tubing; and
the clean-out tool is dimensioned to be run into or through the string of production tubing.

9. The wellbore clean-out tool of claim 2, further comprising:

a spring residing in an upper annular region between the tubular mandrel and the surrounding tubular housing above the lower annular region, the spring being pre-loaded in compression to bias the mandrel and connected plunger in the back-jetting mode; and

a sequencing mechanism comprising a cylindrical body, wherein the sequencing mechanism is responsive to a sequence of the fluid pumping rates applied above the piston;

and wherein at least one of the one or more back jetting ports is disposed along the tubular housing at an upward angle.

10. The wellbore clean-out tool of claim 9, wherein the sequencing mechanism is configured to cycle the mandrel and connected plunger between:

its raised position wherein the clean-out tool is in the back-jetting mode;

an intermediate position wherein the clean-out tool remains in its back-jetting mode,
and

its lowered position wherein the clean-out tool is in its flow-through mode.

11. The wellbore clean-out tool of claim 10, wherein:

the sequencing mechanism is a J-slot sequencing mechanism;

the J-slot sequencing mechanism cooperates with at least one pin disposed along the tubular housing configured to ride in slots along the cylindrical body to cycle the mandrel and connected plunger between the raised position, the intermediate position and the lowered position;

and wherein the pin is fixed from axial movement and rides in J-slots of the mandrel to restrict axial movement of the mandrel on alternating downward strokes.

12. The wellbore clean-out tool of claim 11, wherein the J-slot mechanism and spring are configured to:

(i) maintain the mandrel and connected plunger in its raised position while pumping at or below a first pump rate, placing the clean-out tool in the back-jetting mode wherein at least a portion of the clean-out fluid flows through the mandrel, up the lower annular region, and through the back jetting ports;

(ii) maintain the mandrel and connected plunger in its intermediate position while increasing pump rate above the first pump rate, wherein the clean-out tool remains in its back-jetting mode;

(iii) upon dropping the pump rate back down to or below the first pump rate, maintaining the mandrel and connected plunger in its raised position;

(iv) upon raising the pump rate to a rate that meets or exceeds a second pump rate, move the mandrel and connected plunger to its lowered position, placing the clean-out tool in its flow-through mode wherein all clean-out fluid is forced to exit below the seat and downstream of the clean-out tool; and

(v) repeat the cycle of steps (i) through (iv).

13. The wellbore clean-out tool of claim 11, wherein the J-slot mechanism is configured to cycle between three settings, comprising:

(i) a first setting wherein the pin resides in a first slot that places the mandrel and connected plunger in the raised position in response to the biasing mechanical force exerted by the spring on the mandrel while pumping at a first rate, placing the clean-out tool in its back-jetting mode;

(ii) a second setting wherein the pin moves higher in the first slot in response to the injection of the clean-out fluid into the conveyance tubing at an increased pump rate, while the plunger remains in intermediate position that keeps the clean-out tool in its back-jetting mode;

(iii) the first setting again wherein the pin resides in a second slot that keeps the plunger in the raised position in response to the biasing mechanical force exerted by the spring; and

(iv) a third setting wherein the pin moves higher in a third slot in response to the injection of the clean-out fluid into the conveyance tubing at a second increased rate, or at any rate higher than the second rate, and wherein the plunger slides from the raised position to the lowered position, placing the clean-out tool in its flow-through mode.

14. A method of cleaning out a wellbore using a clean-out tool, the wellbore having been lined with a string of production casing along a selected subsurface formation, and the method comprising:

running a clean-out tool into the wellbore on a lower end of a string of coiled tubing, the clean-out tool comprising:

a tubular housing providing an elongated bore through which fluids are injected, the tubular housing having one or more back jetting ports;

a piston disposed at an upstream end of the tubular housing, the piston forming a pressure shoulder and having an orifice configured to deliver clean-out fluid from the coiled tubing string to the elongated bore of the housing;

a tubular mandrel slidably positioned within the housing, the mandrel having a proximal end connected to or acted upon by the piston, and an open distal end forming a plunger;

one or more radial slots disposed along the plunger; and

a seat disposed along the tubular housing below the distal end of the tubular mandrel, the seat being dimensioned to slidably receive the plunger when the piston and connected tubular mandrel slide from a raised position (a “back-jetting mode”) wherein the radial slots are above the seat, to a lowered position (a “flow-through mode”) wherein the radial slots are along or below the seat;

locating the clean-out tool at a selected depth along the wellbore;

pumping clean-out fluid down the coiled tubing and into the bore of the tubular housing at a first flow rate, thereby causing at least a portion of the clean-out fluid to flow

through the mandrel, up a lower annular region and through the back jetting ports while a remaining portion flows through a distal end of the tubular housing; and

further pumping the clean-out fluid down the coiled tubing and into the bore of the tubular housing at a second flow rate that is higher than the first flow rate, thereby increasing a hydraulic force acting on the pressure shoulder of the piston and causing the mandrel and connected plunger to slide along the tubular housing such that the plunger advances through the seat, thereby forcing all of the injected clean-out fluid to flow through the distal end of the tubular housing.

15. The method of claim 14, wherein:

the at least one radial slot comprises a plurality of radially-disposed slots;

the plunger is configured to move in telescopic relation to the seat in response to the changes in fluid flow rate; and

in the raised position, the radial slots reside above the seat, while in the lowered position the radial slots reside along or below the seat.

16. The method of claim 15, wherein the tubular housing comprises:

an upper sub having a first upper end and a second lower end; and

a lower sub having a first upper end proximate to the seat, and a lower end threadedly connected to a downhole tool.

17. The method of claim 16, wherein the downhole tool is (i) a hydraulic nozzle, (ii) a bridge plug, (iii) a sliding sleeve shifting tool, or (iv) a positive displacement motor.

18. The method of claim 15, wherein the clean-out tool further comprises:

a lower annular region formed between the mandrel and the surrounding tubular housing providing fluid communication between the elongated bore of the tubular housing and the back jetting ports;

the plunger defines a tubular body having an outer diameter;

the through-opening of the seat comprises an inner diameter dimensioned to closely receive the outer diameter of the plunger; and

at least a portion of the plunger overlaps the through-opening of the seat when the plunger is in its raised position.

19. The method of claim 18, wherein:

the inner diameter of the plunger below the radial slots is tuned to adjust a flow split of clean-out fluid between the back jetting ports and the seat while the clean-out tool is in its raised position.

20. The method of claim 18, wherein:

a lower end of the plunger is completely closed off to flow; and

the radially-disposed slots reside above the lower end of the plunger such that all clean-out fluid flows back through the back jetting ports when the clean-out tool is in its back-jetting mode.

21. The method of claim 18, wherein:

the wellbore comprises a string of production tubing, and

running a clean-out tool into the wellbore comprises running the coiled tubing string and connected clean-out tool into the string of production tubing.

22. The method of claim 18, wherein the clean-out tool further comprises:

a spring residing in an upper annular region between the tubular mandrel and the tubular housing above the lower annular region, the spring being pre-loaded in compression to bias the mandrel and connected plunger in the first raised position; and

a sequencing mechanism comprising a cylindrical body, wherein the sequencing mechanism is responsive to a sequence of flow rates applied above the piston;

and wherein at least one of the one or more back jetting ports is disposed along the tubular housing at an upward angle.

23. The method of claim 22, wherein the sequencing mechanism is configured to cycle the mandrel and connected plunger between:

a raised position wherein the clean-out tool is in the back-jetting mode;

an intermediate position wherein the clean-out tool remains in its back-jetting mode and the radial ports of the plunger remain above the seat even though flow rate is above an activation rate, and

a lowered position wherein the clean-out tool is in the fluid flow-through mode.

24. The wellbore clean-out tool of claim 23, wherein:

the sequencing mechanism is a J-slot sequencing mechanism;

the J-slot sequencing mechanism cooperates with at least one pin disposed along the tubular housing configured to ride in slots along the cylindrical body to cycle the mandrel and connected plunger between the raised position, the intermediate position and the lowered position;

and wherein the pin is fixed from axial movement and rides in the J-slots of the mandrel to restrict axial movement of the mandrel on alternating downward strokes.

25. The method of claim 24, wherein the J-slot mechanism and spring are configured to:

(i) maintain the clean-out tool in its raised position while pumping at or below a first pump rate, placing the clean-out tool in the back-jetting mode wherein at least a portion of the clean-out fluid flows through the mandrel, up the lower annular region, and through the back jetting ports;

(ii) maintain the clean-out tool in its intermediate position while increasing pump rate above the first pump rate, and wherein the same portion of the clean-out fluid flows through the mandrel, up the lower annular region and through the back jetting ports;

(iii) upon dropping the pump rate back down to or below the first pump rate, maintaining the clean-out tool in its raised position;

(iv) upon raising the pump rate to a rate that meets or exceeds a second pump rate, move the clean-out tool to its lowered position, placing the clean-out tool in its flow-through

mode wherein all clean-out fluid is forced through the plunger below the seat and downstream of the clean-out tool; and

(v) repeat the cycle of steps (i) through (iv).

26. The method of claim 25, wherein step (v) is done without reverse circulating in the wellbore.

27. The method of claim 24, wherein the J-slot mechanism and spring are configured to cycle between three settings, comprising:

(i) a first setting wherein the pin resides in a first slot that places the mandrel and connected plunger in the raised position in response to the biasing mechanical force exerted by the spring on the mandrel while pumping at a first rate, placing the clean-out tool in its back-jetting mode;

(ii) a second setting wherein the pin moves higher in the first slot in response to the pumping of the clean-out fluid into the coiled tubing at an increased pumping rate, so that the plunger advances to the intermediate position while remaining in its back-jetting mode;

(iii) the first setting again wherein the pin resides in a second slot that allows the plunger to remain in the raised position; and

(iv) a third setting wherein the pin moves higher in the second slot in response to the injection of the clean-out fluid into the coiled tubing at a second increased rate, or at any rate higher than the second rate, and wherein the plunger slides from the raised position to the lowered position, placing the clean-out tool in its flow-through mode.

28. The method of claim 27, further comprising:

adjusting an aperture size of the orifice associated with the piston, thereby accommodating flow rate variations associated with the raised and lowered positions of the mandrel.

29. The method of claim 18, further comprising:
selecting a cross-sectional area of the piston orifice,
selecting a cross-sectional area of the one or more back jetting ports;
selecting a cross-sectional area of the radial slots in the plunger;
selecting a cross-sectional area of the plunger below the radial slots of the plunger;
selecting a cross-sectional area of the lower annular region; or
combinations thereof, before running the clean-out tool into the wellbore.
30. The method of claim 29, further comprising:
monitoring a pressure of the clean-out fluid from the surface as it is injected into the tubular housing; and
receiving confirmation that the clean-out tool has entered its flow-through mode when pressure reaches a designated level.
31. A method of cleaning out a wellbore using a clean-out tool, comprising:
(a) placing a clean-out tool in the wellbore along a string of production casing, the clean-out tool comprising:
a tubular housing providing an elongated bore through which fluids may flow, the tubular housing having one or more back jetting ports disposed at an upward angle therein;
a piston disposed at an upstream end of the housing, the piston forming a pressure shoulder and having an orifice configured to deliver fluids from a conveyance string in the wellbore to the elongated bore of the housing;
a tubular mandrel slidably positioned within the housing, the mandrel having a proximal end connected to or acted upon by the piston, and an open distal end forming a plunger;
one or more radial slots disposed along the plunger;
a seat disposed along the tubular housing below the distal end of the tubular mandrel, the seat being dimensioned to slidably receive the plunger

when the piston and connected mandrel slide from a raised position (a “back-jetting mode”) wherein the radial slots are above the seat to a lowered position (a “flow-through mode”) wherein the radial slots are along or below the seat; and

a lower sub having a first upper end proximate to the seat, and a lower end threadedly connected to a downhole tool such that the clean-out tool and the downhole tool together form a bottom hole assembly (“BHA”);

(b) locating the BHA within the wellbore;

(c) pumping the clean-out fluid down the wellbore and into the clean-out tool at or above an activation rate, causing the tubular mandrel and connected plunger to move to its lowered position;

(d) continuing to pump the clean-out fluid down the wellbore and into the clean-out tool at a rate above the activation rate in order to initiate operation of the downhole tool; and

(e) pumping the clean-out fluid down the wellbore and into the clean-out tool at a rate below the activation rate, causing the tubular mandrel and connected plunger to move to the raised position so that at least a portion of the clean-out fluid flows through the back jetting ports, while also discontinuing operation of the downhole tool.

32. The method of claim 31, wherein the clean-out tool further comprises:

a lower annular region formed between the mandrel and the surrounding tubular housing providing fluid communication between the elongated bore of the tubular housing and the back jetting ports;

a J-slot mechanism responsive to the fluid flow rates and configured to cycle between the back-jetting mode and the flow-through mode.

33. The method of claim 32, wherein:

the plunger defines a tubular body having an outer diameter;

the seat comprises a through-opening dimensioned to closely and telescopically receive the outer diameter of plunger;

the one or more radial slots comprise a plurality of radially-disposed slots above a lower end of the plunger, providing fluid communication between the bore and the lower annular region;

the lower end of the plunger slidably overlaps with the through-opening of the seat when the piston and connected mandrel are in the raised position;

in the raised position, radial slots of the plunger reside above the seat; and

in the lowered position, the radial slots of the plunger reside along or below the seat.

34. The method of claim 33, wherein:

the downhole tool is a milling tool or comprises a drill bit; and

operating the downhole tool comprises (i) milling a plug within the wellbore, (ii) milling out debris along the wellbore, or (iii) drilling a formation to extend the wellbore.

35. The method of claim 33, further comprising:

lightening a hydrostatic head formed by the clean-out fluid during the back-jetting mode.

36. The method of claim 33, wherein:

a setting tool resides within the wellbore downstream from the downhole tool; and

the method comprises cleaning out the wellbore while the clean-out tool is in its back-jetting mode without activating the setting tool.

37. The method of claim 33, wherein:

a resettable bridge plug resides within the wellbore downstream from the downhole tool; and

the method comprises:

cleaning out the wellbore while the clean-out tool is in its back-jetting mode and while the resettable bridge plug is not set;

placing the clean-out tool in its flow-through mode; and

cleaning out the wellbore while the clean-out tool is in its flow-through mode while the resettable bridge plug is set.

39. The method of claim 32, wherein:
the downhole tool is a hydraulic nozzle; and
operating the downhole tool comprises injecting acid into the clean-out tool as the clean-out fluid.
40. The method of claim 32, wherein:
the downhole tool is a sliding sleeve shifting tool; and
operating the downhole tool comprises:
cleaning out the wellbore while the clean-out tool is in its back-jetting mode and without activating the sliding sleeve shifting tool;
placing the clean-out tool in its flow-through mode; and
shifting a sliding sleeve associated with the sliding sleeve shifting tool in the wellbore while the clean-out tool is in its flow-through mode.

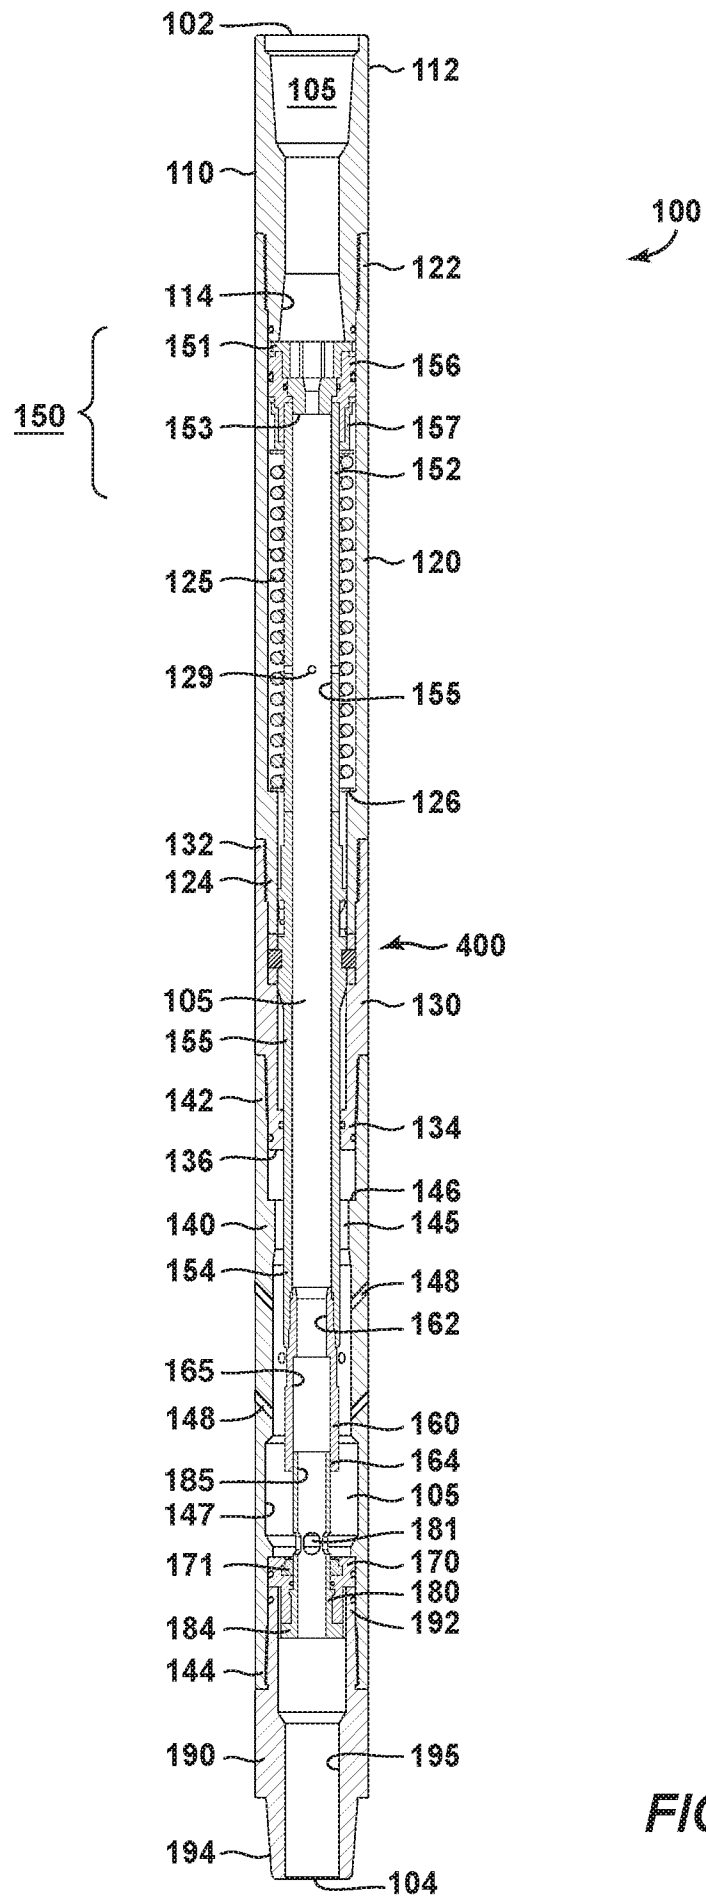


FIG. 1A

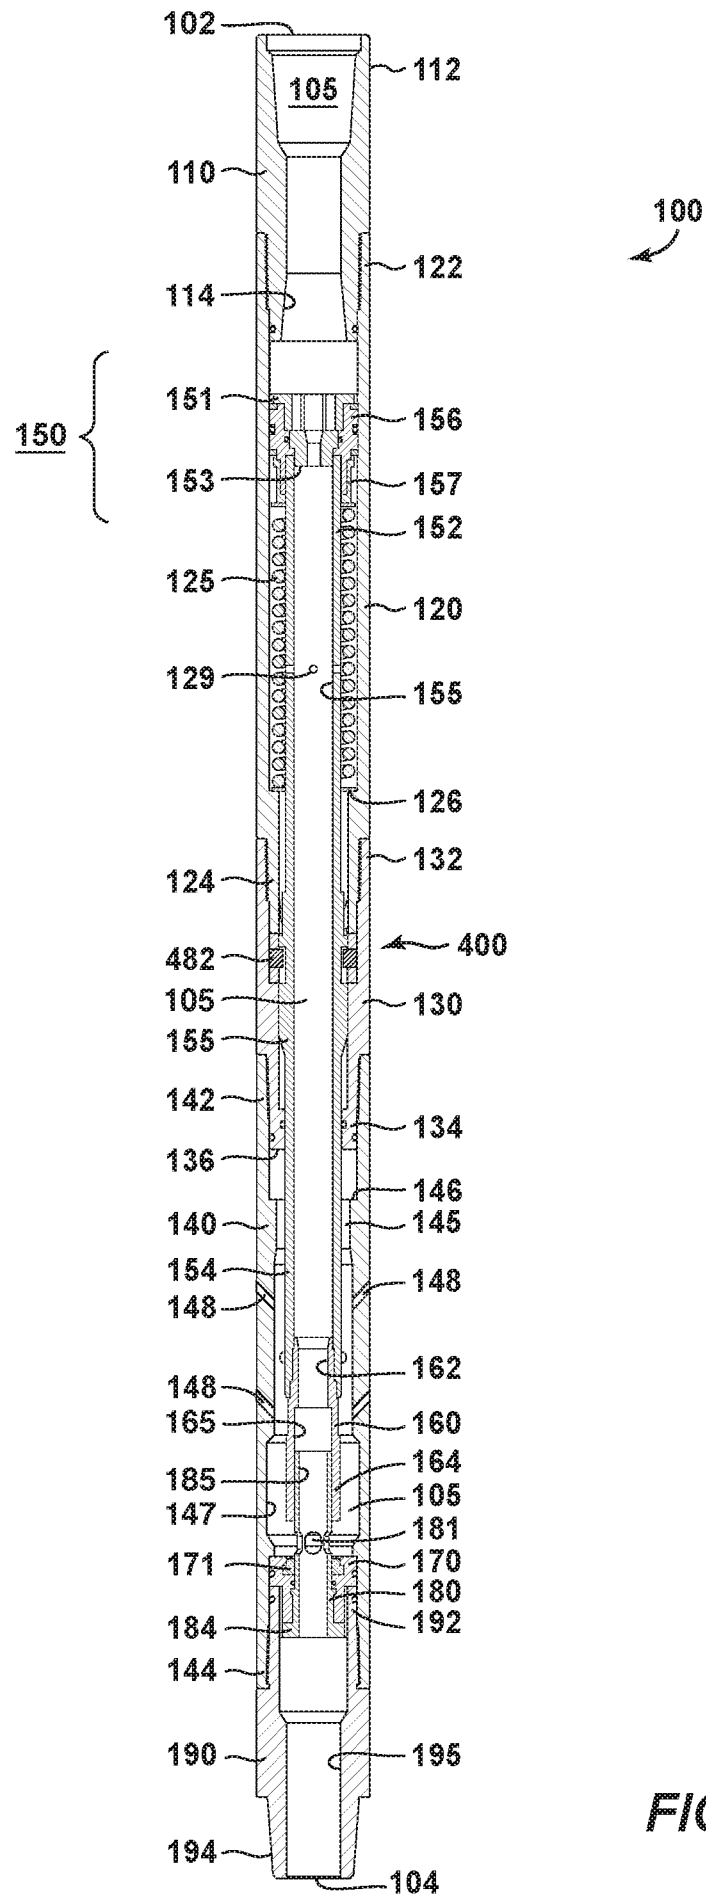


FIG. 1B

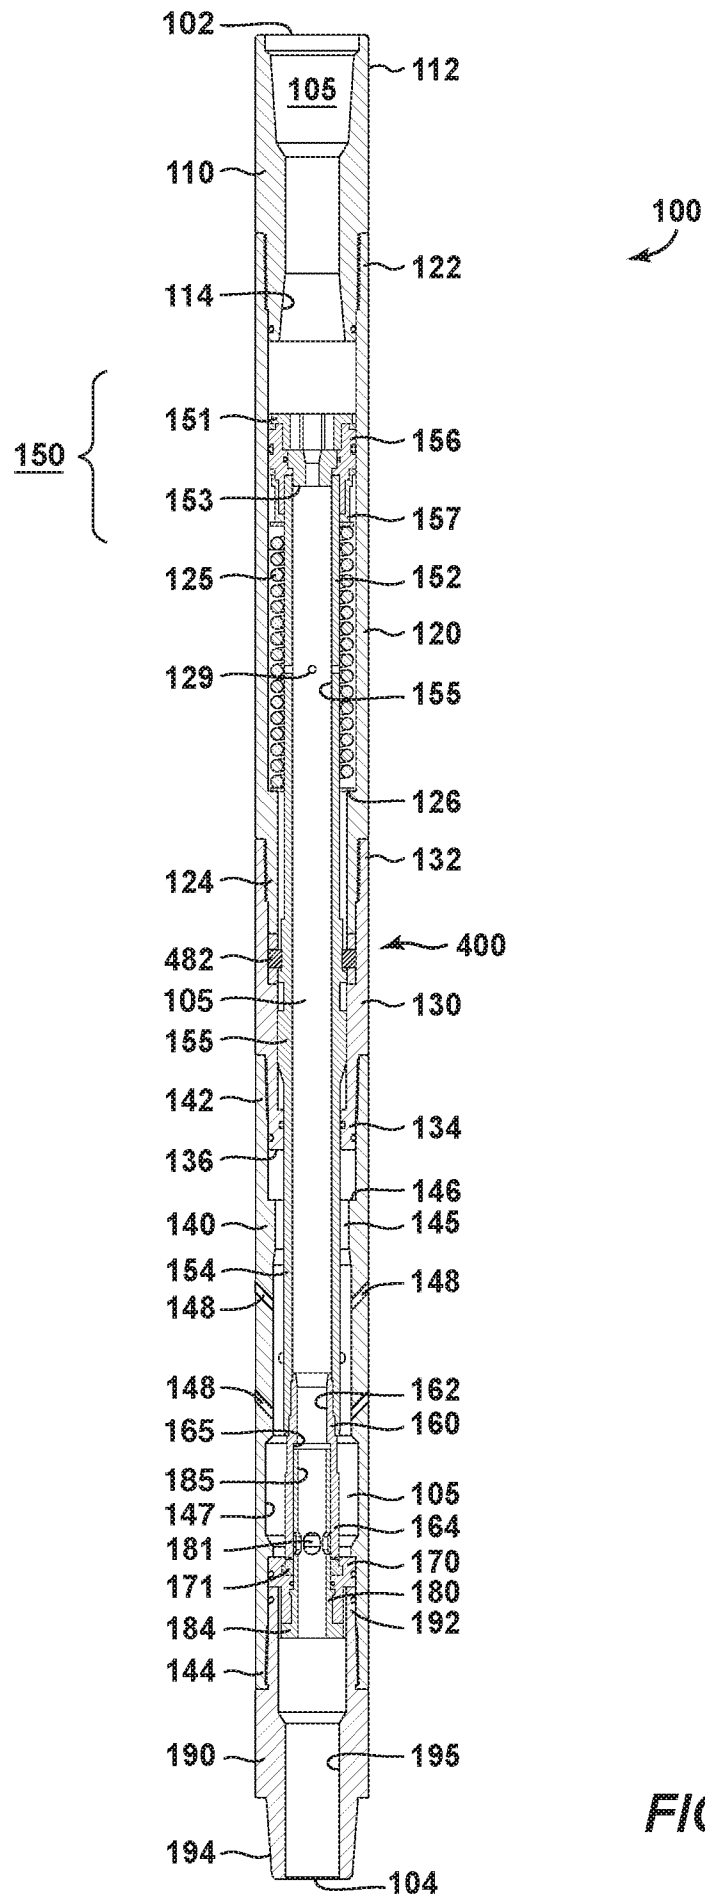


FIG. 1C

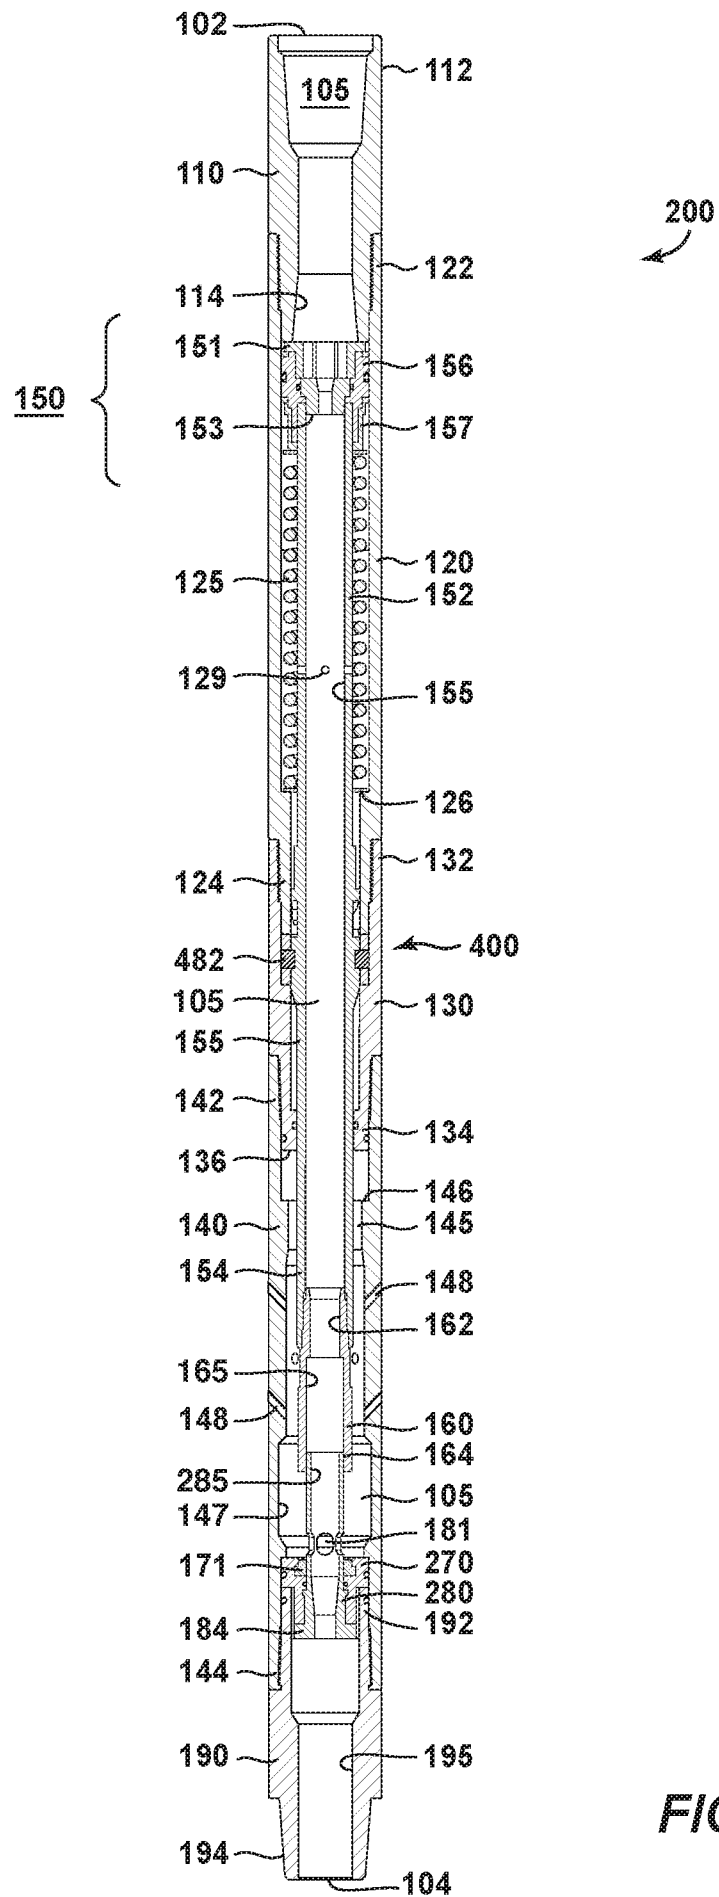


FIG. 2A

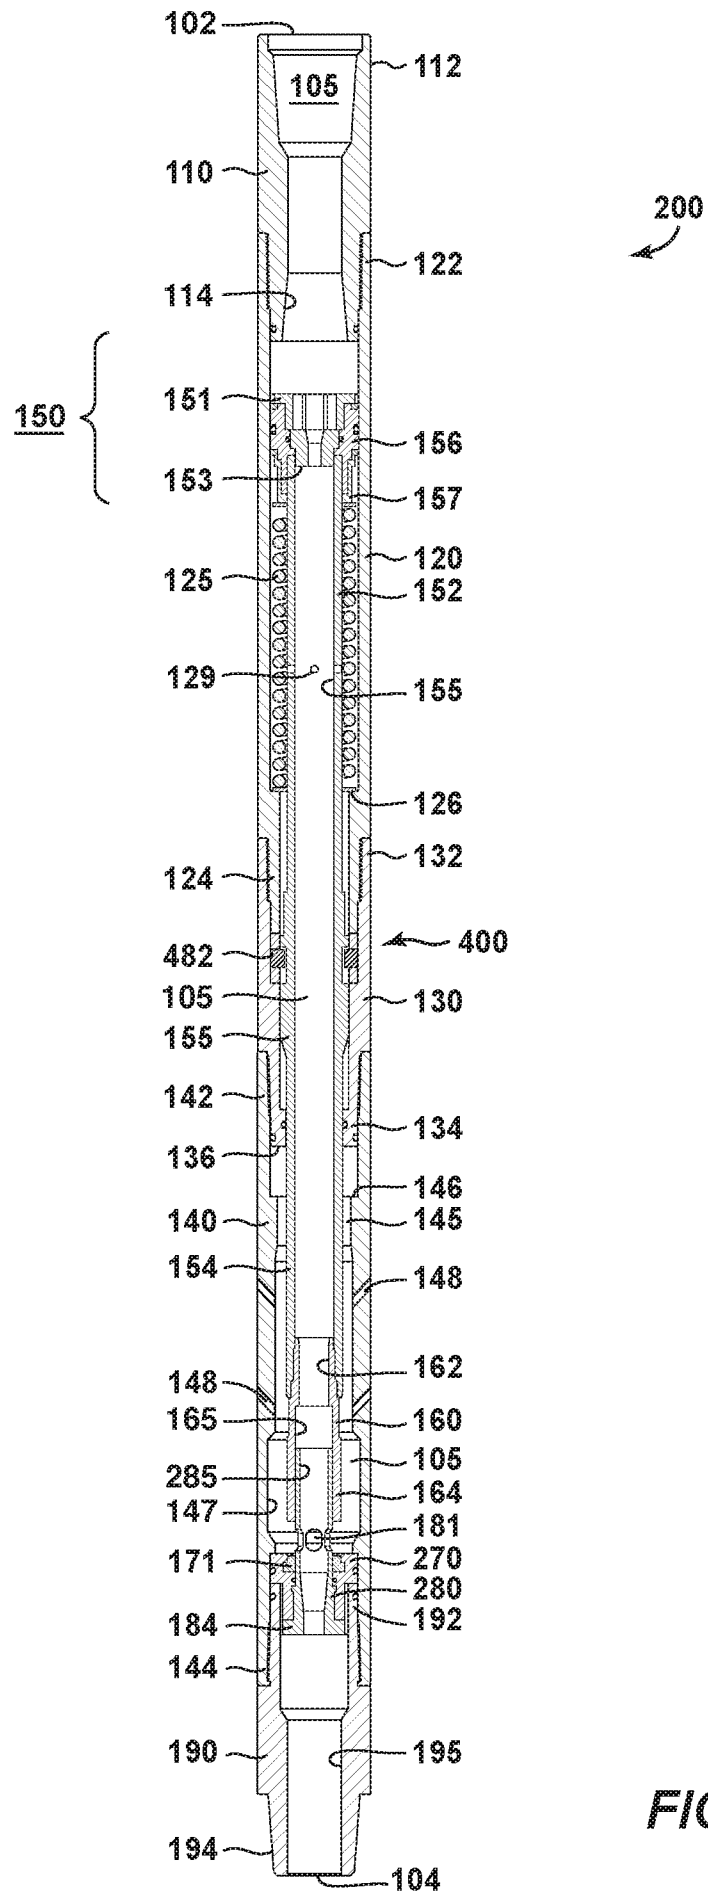


FIG. 2B

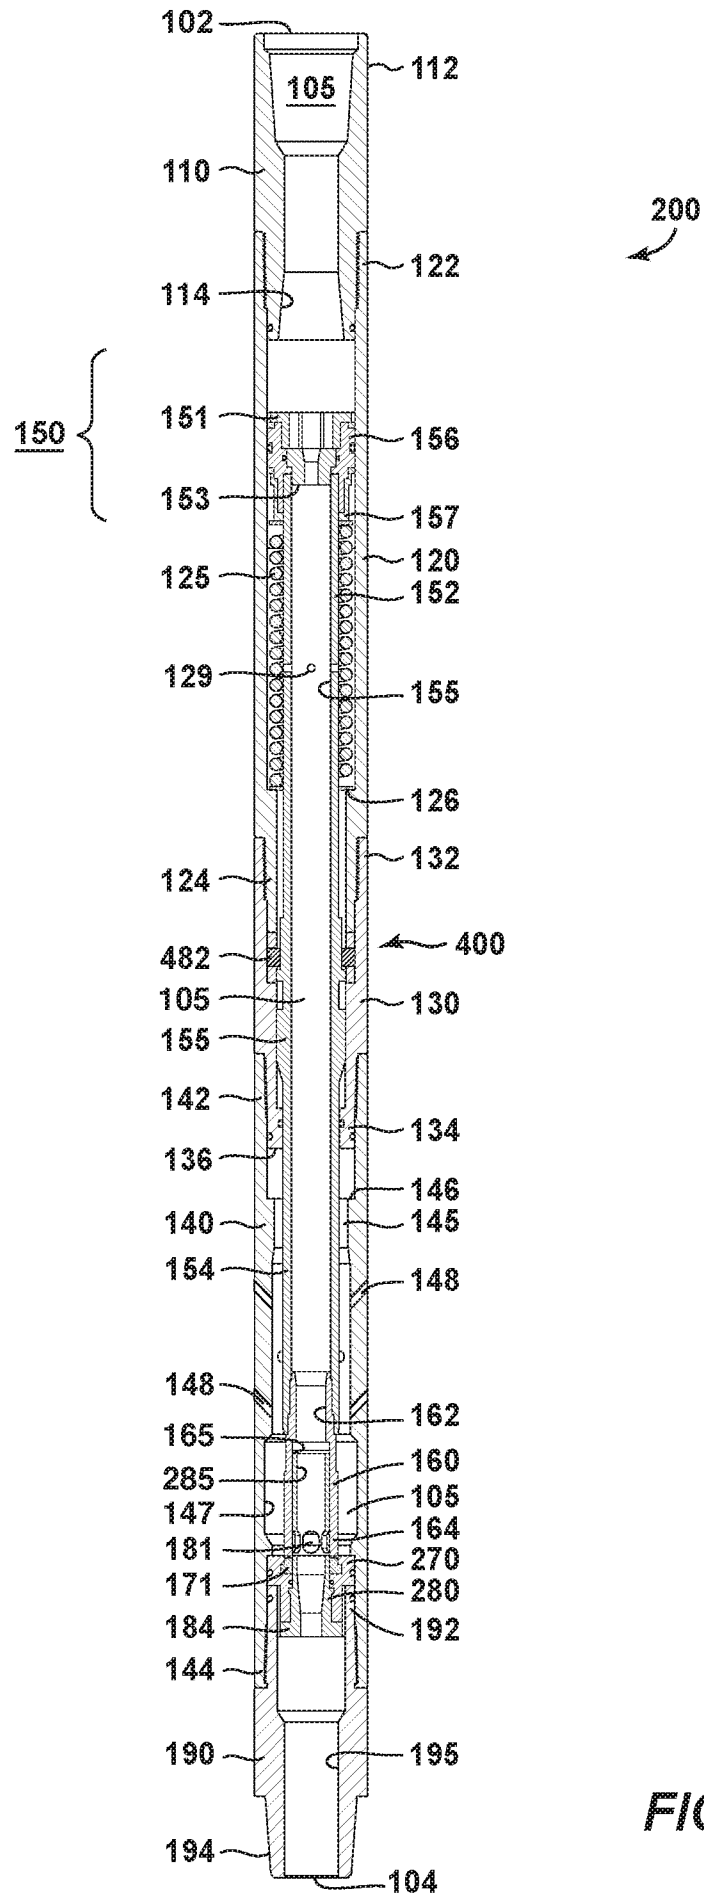


FIG. 2C

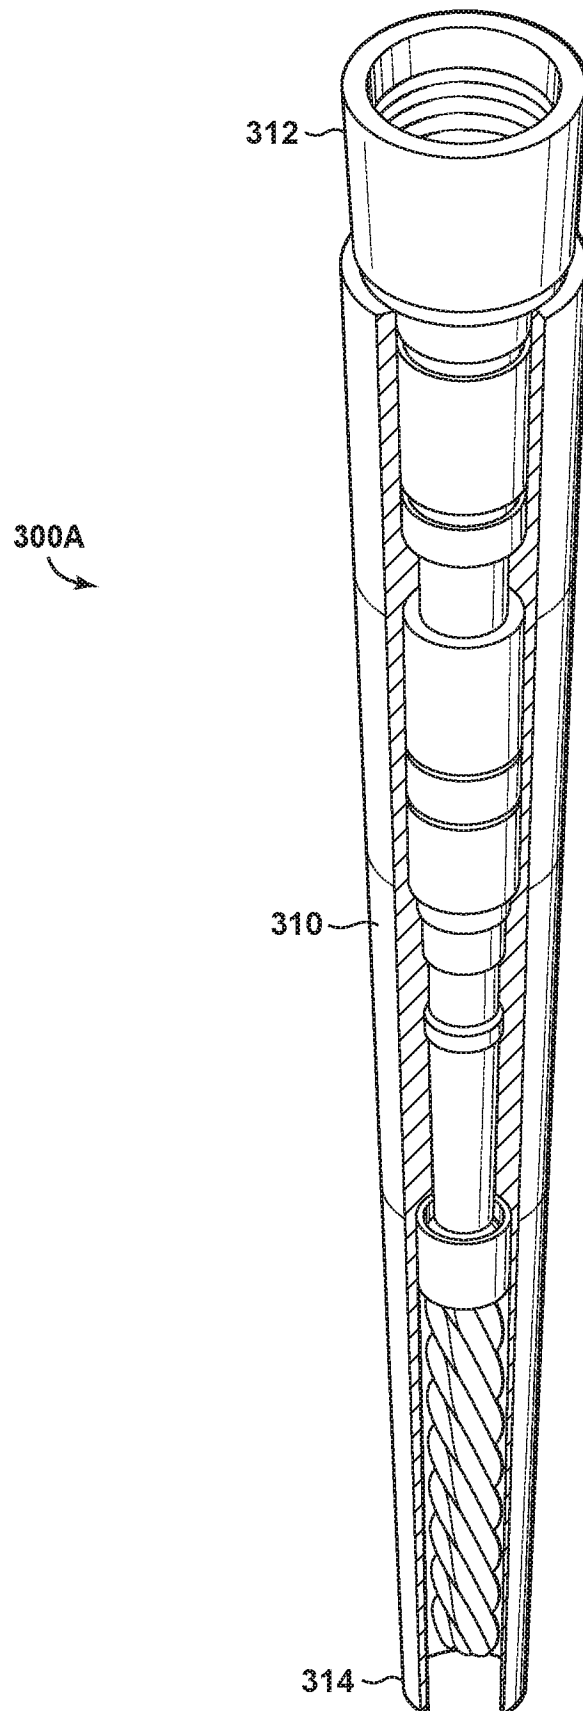


FIG. 3A

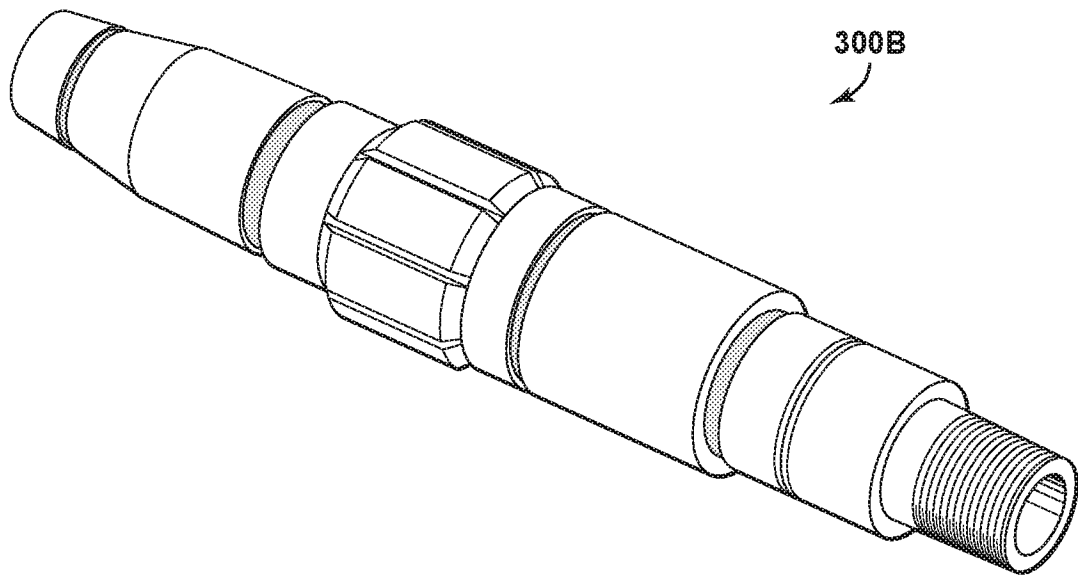


FIG. 3B

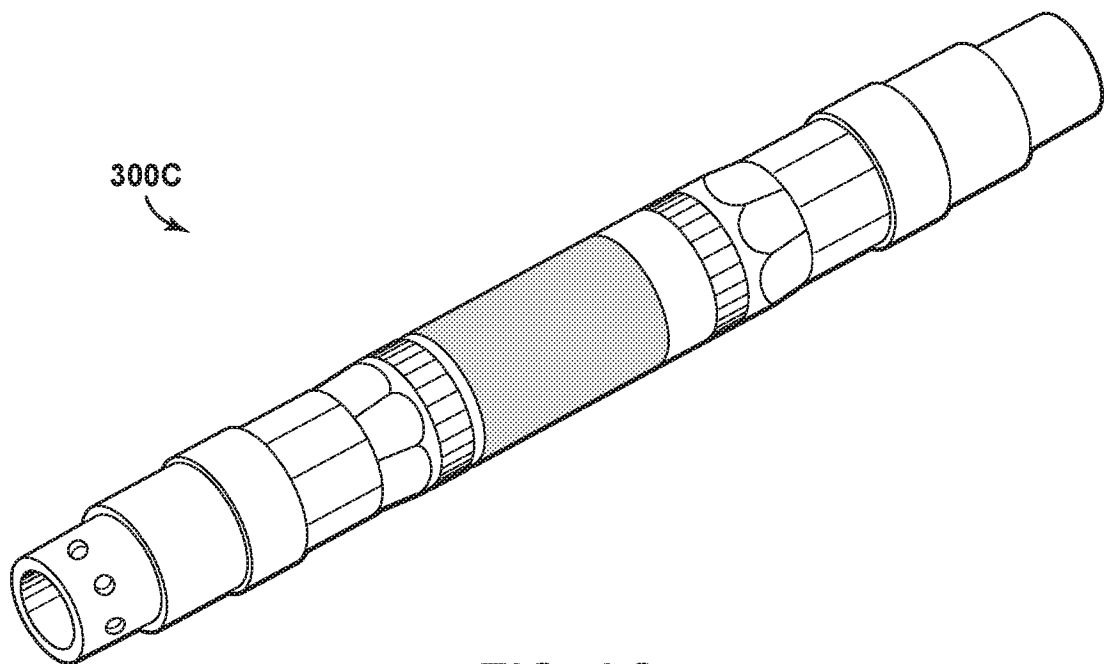


FIG. 3C

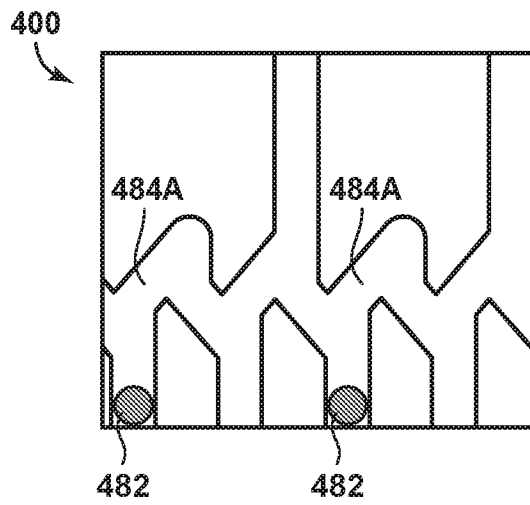


FIG. 4A

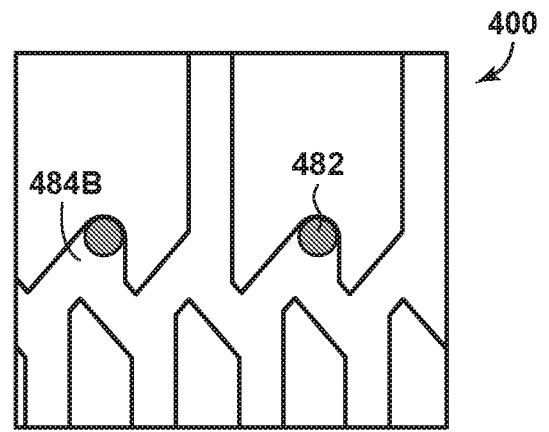


FIG. 4B

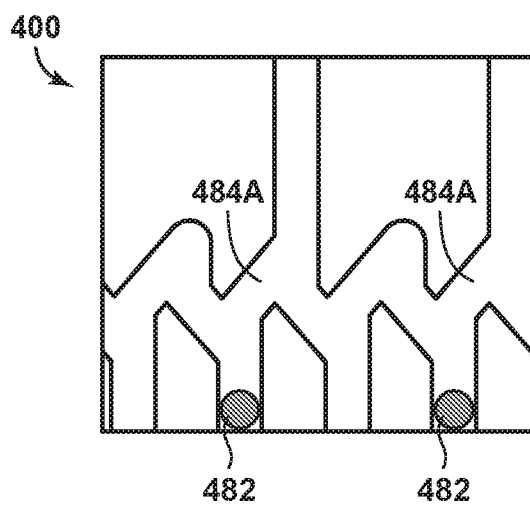


FIG. 4C

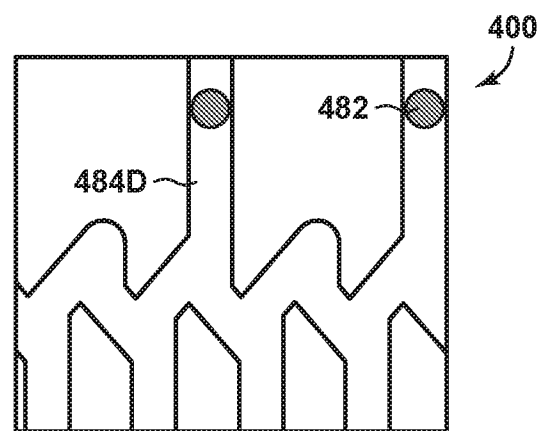


FIG. 4D

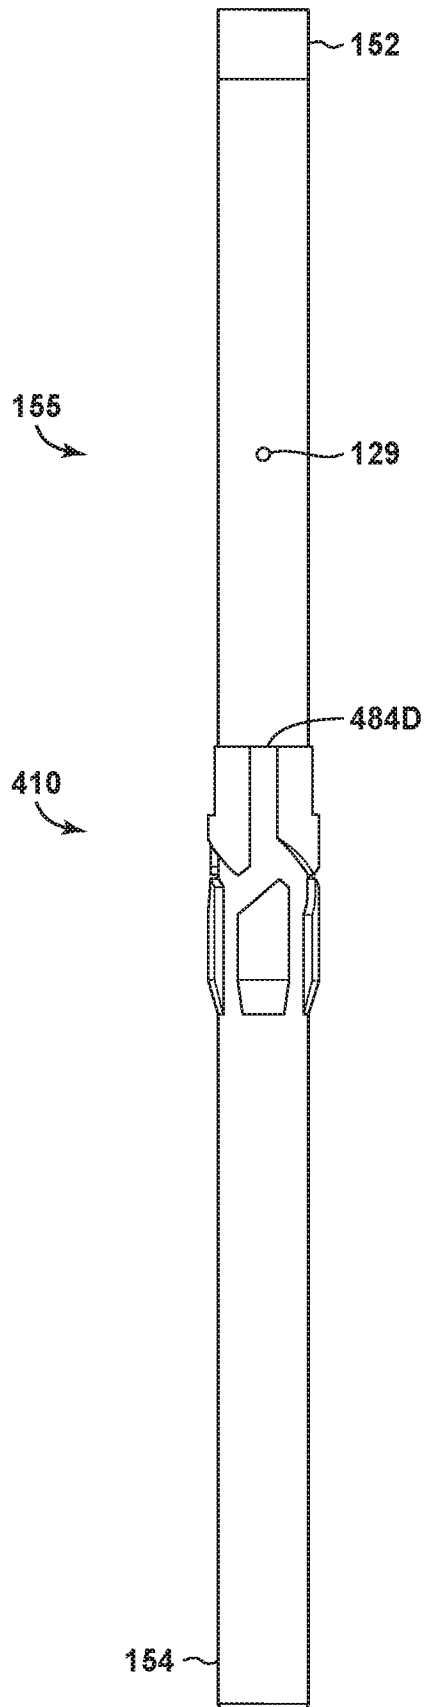


FIG. 5A

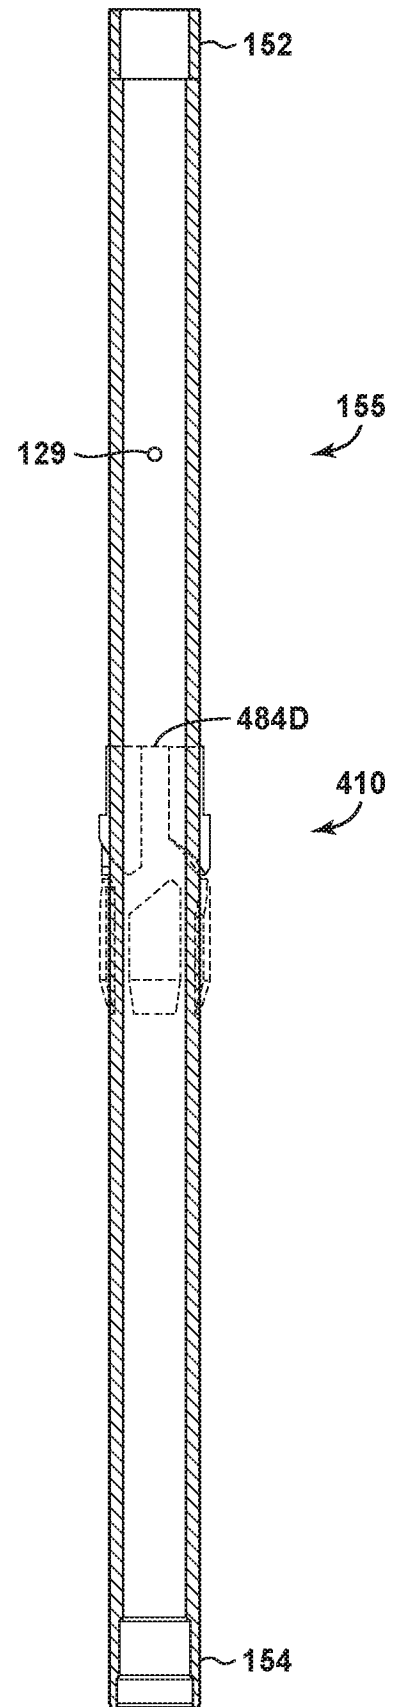


FIG. 5B

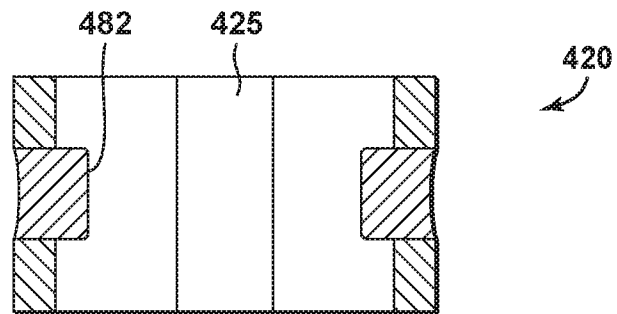


FIG. 6A

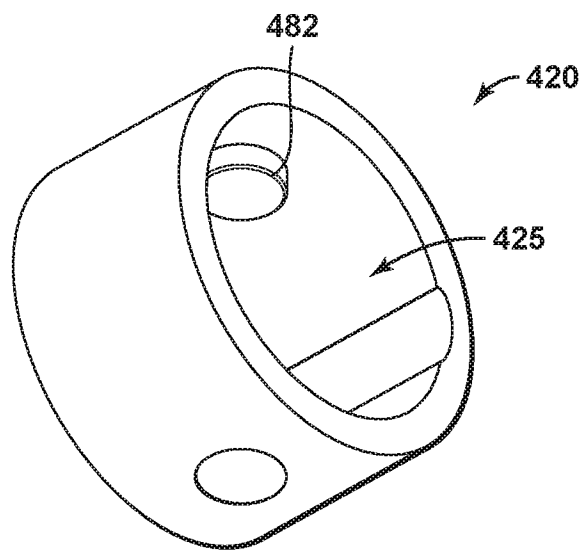


FIG. 6B

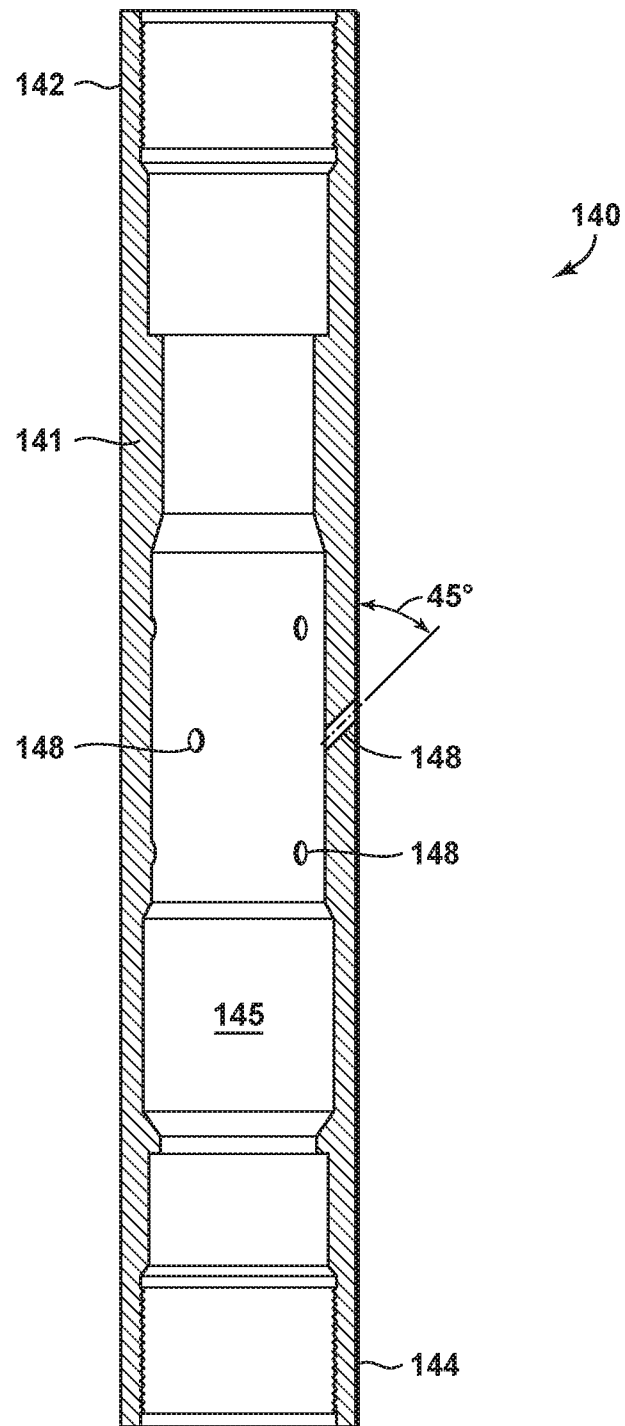


FIG. 7

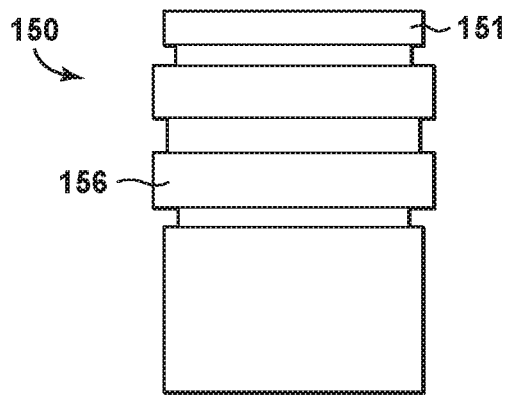


FIG. 8A

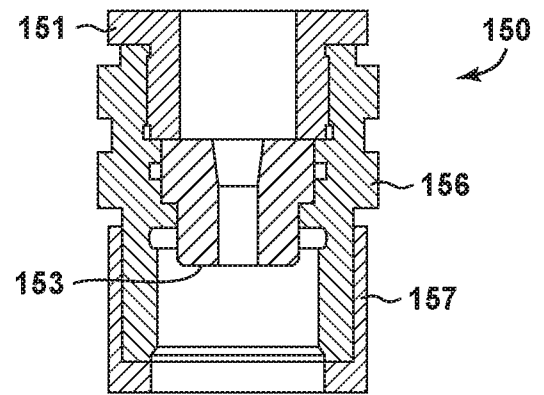


FIG. 8B

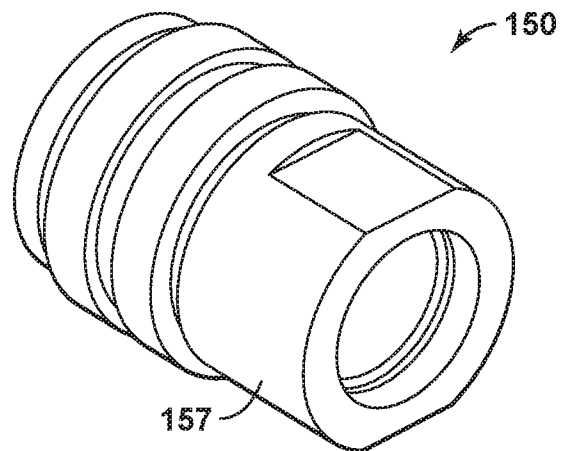


FIG. 8C

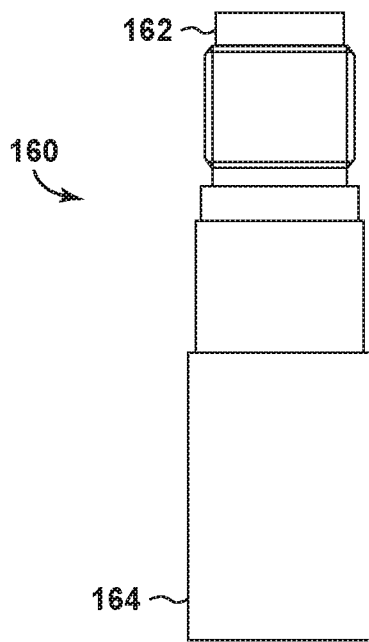


FIG. 9A

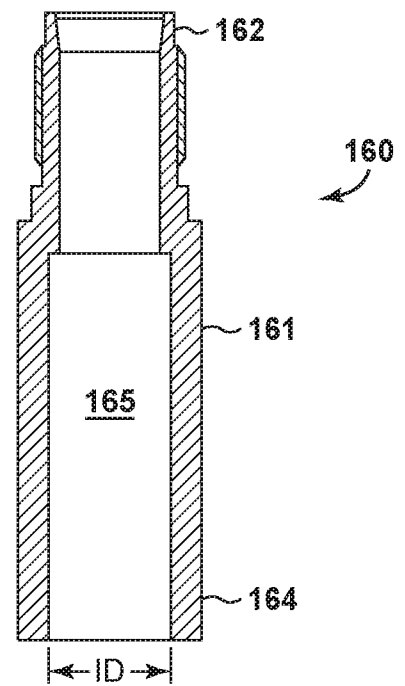


FIG. 9B

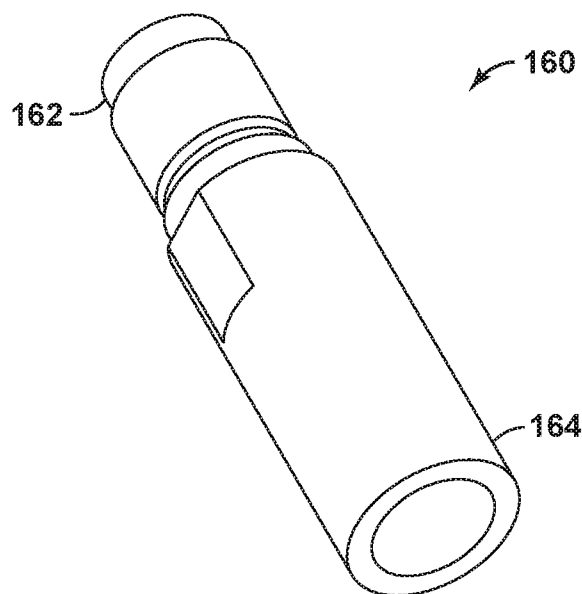


FIG. 9C

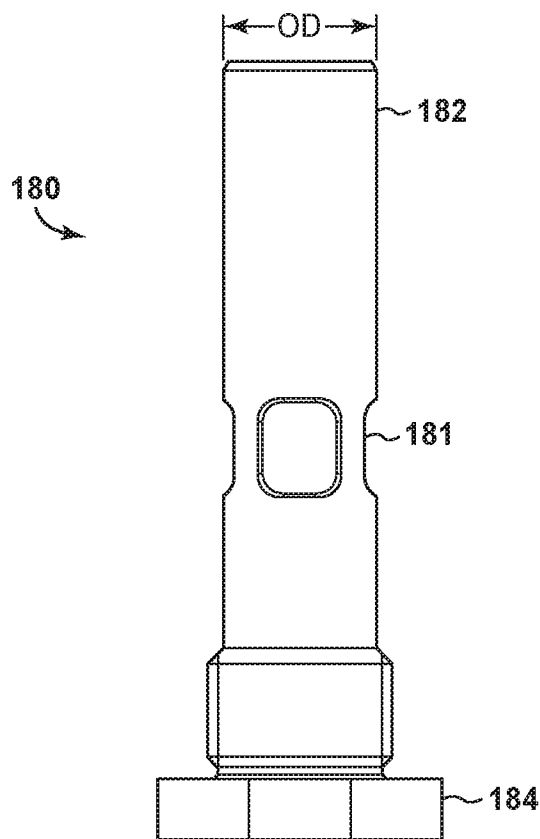


FIG. 10A

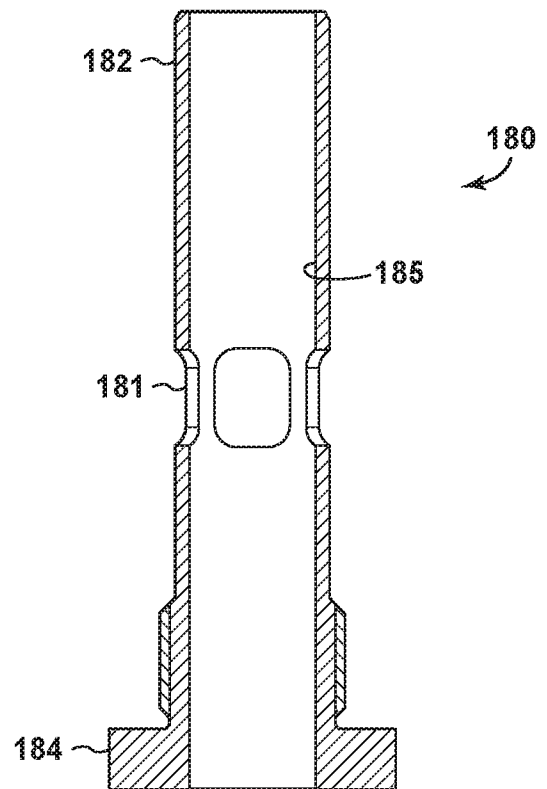


FIG. 10B

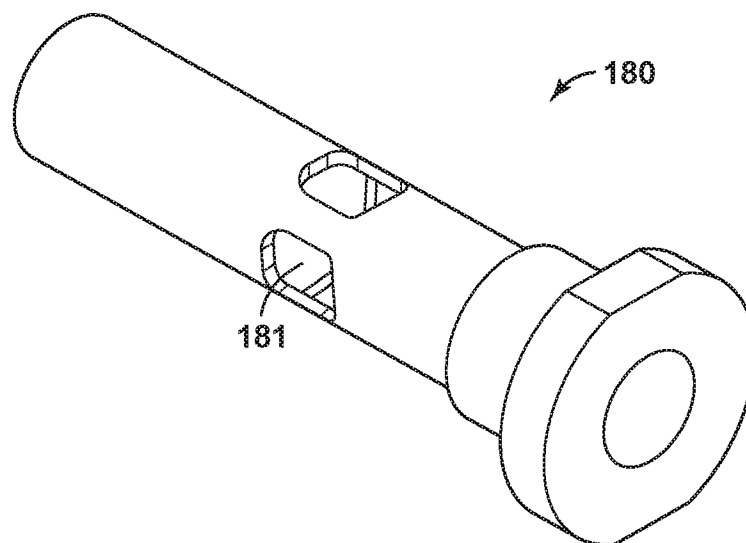


FIG. 10C

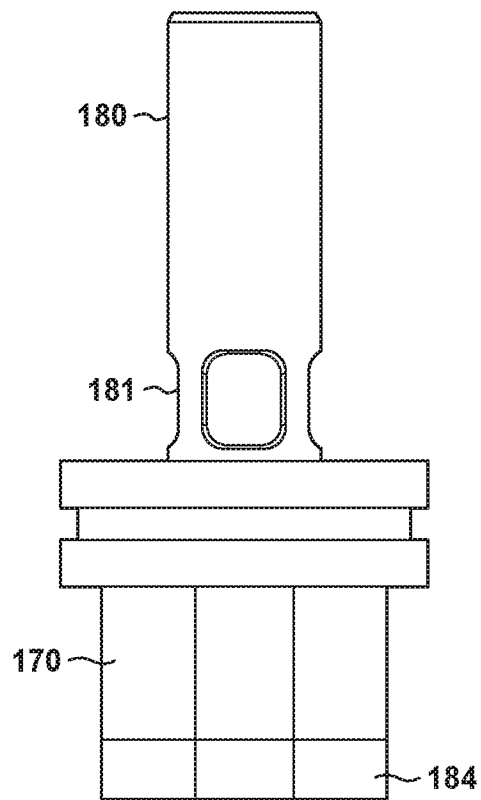


FIG. 11A

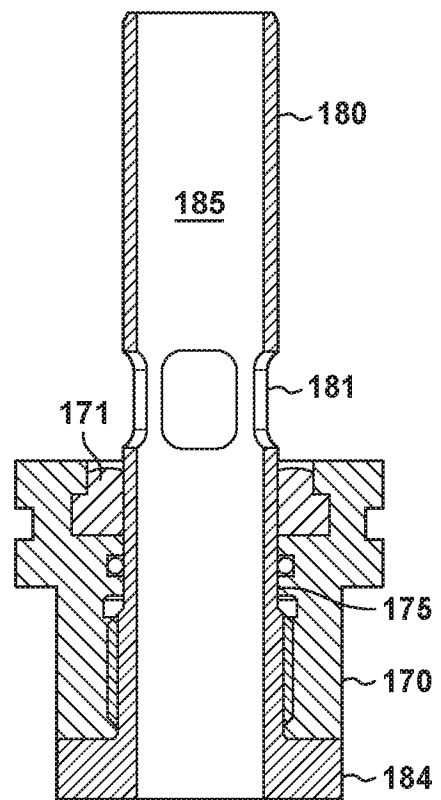
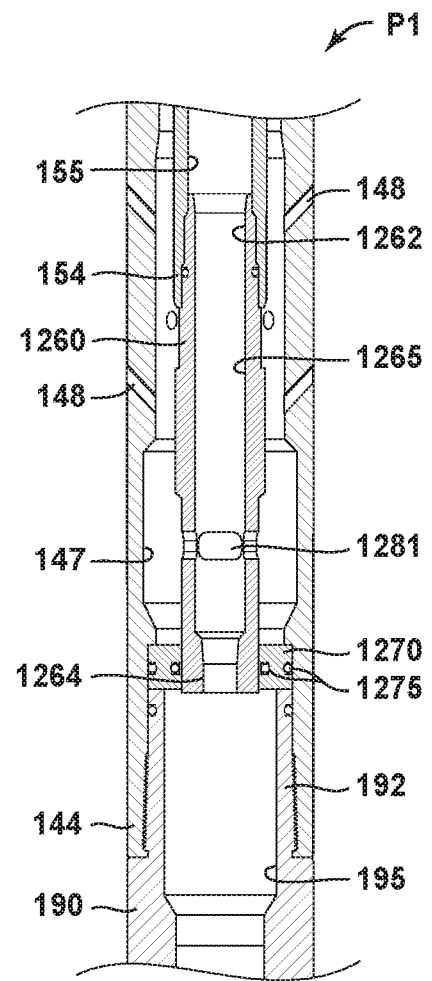
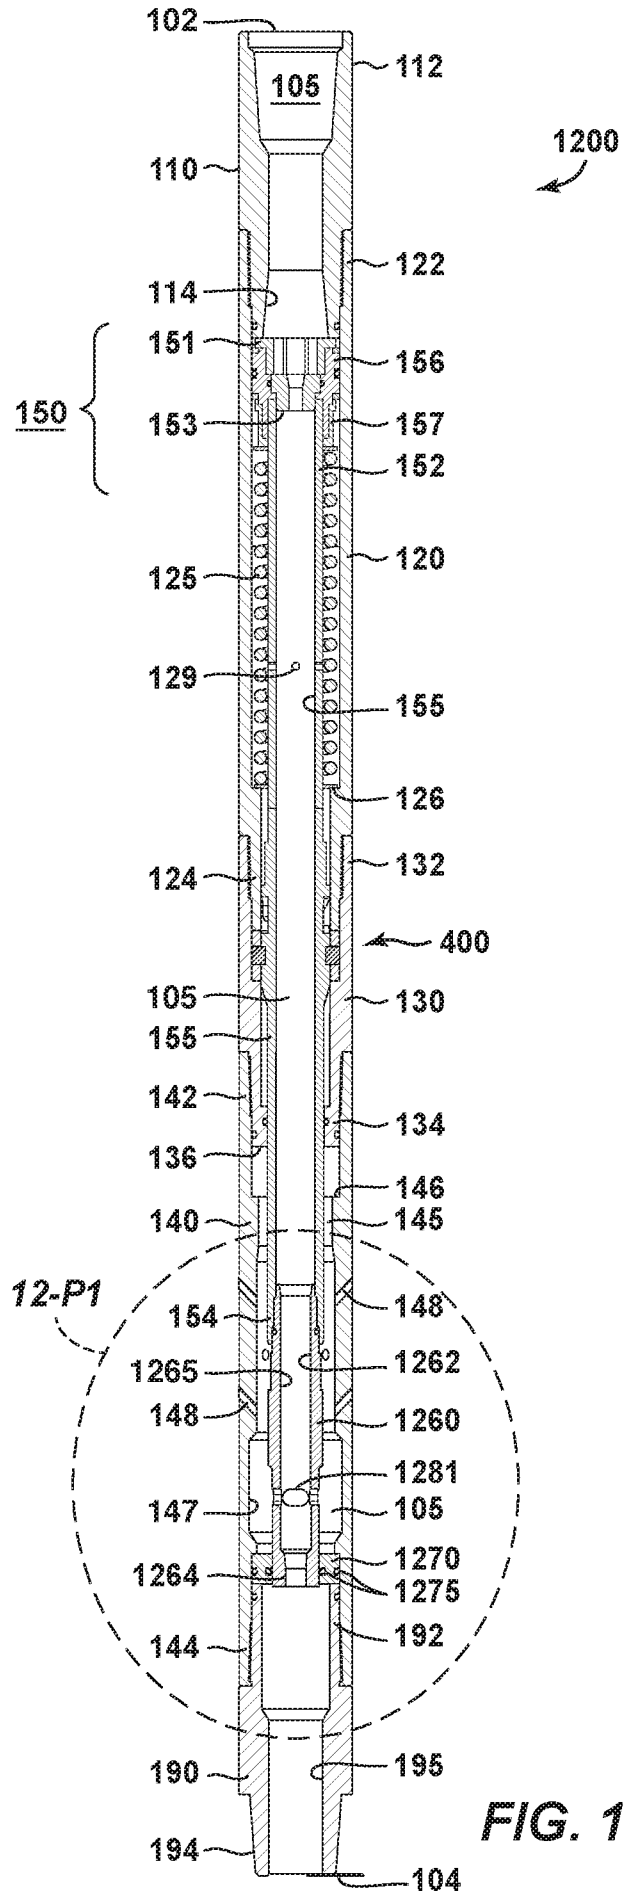
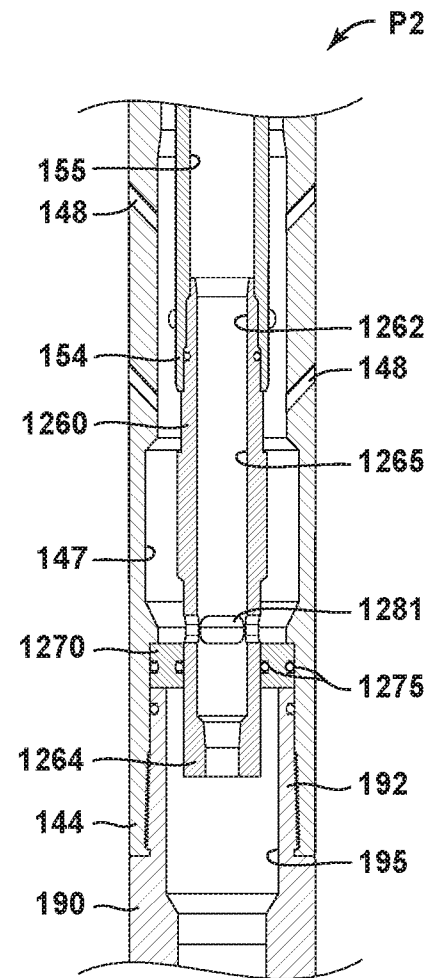
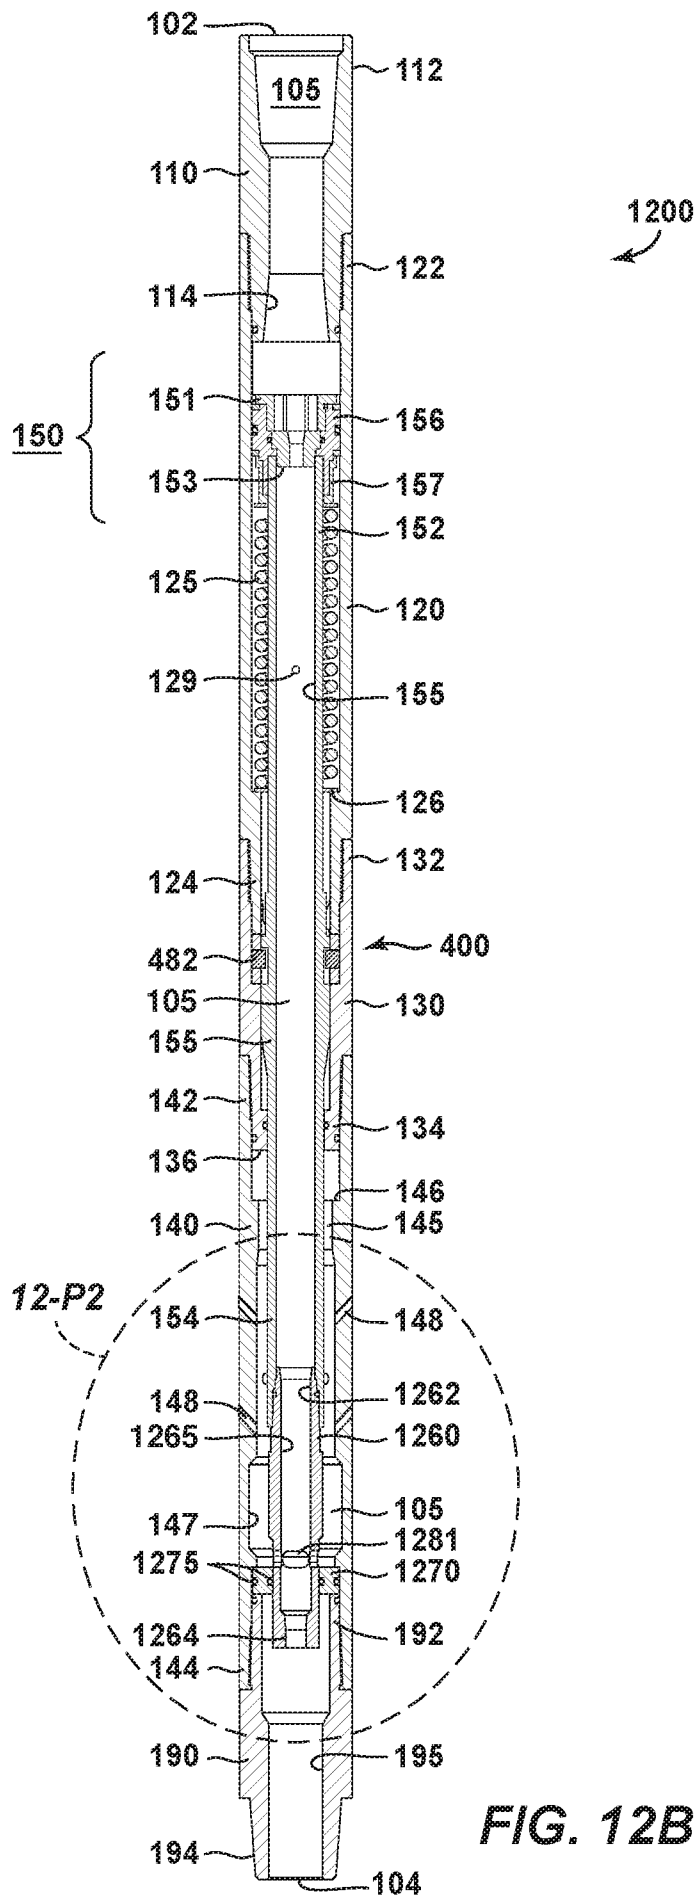
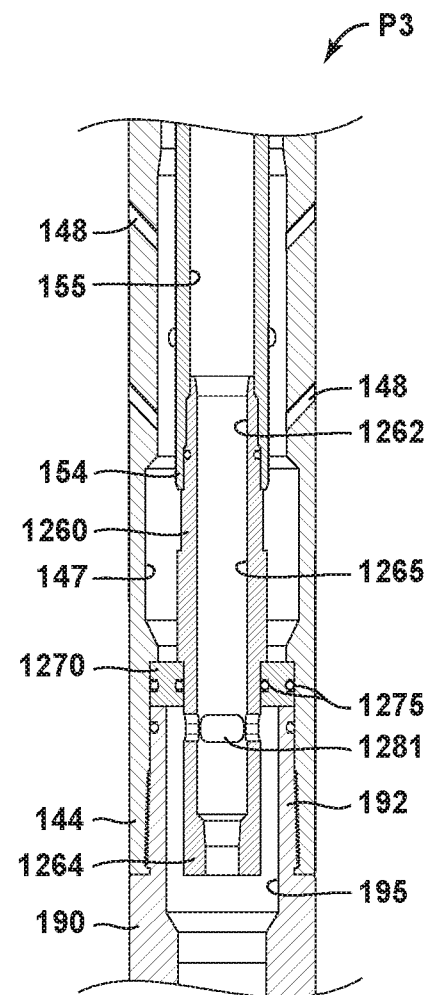
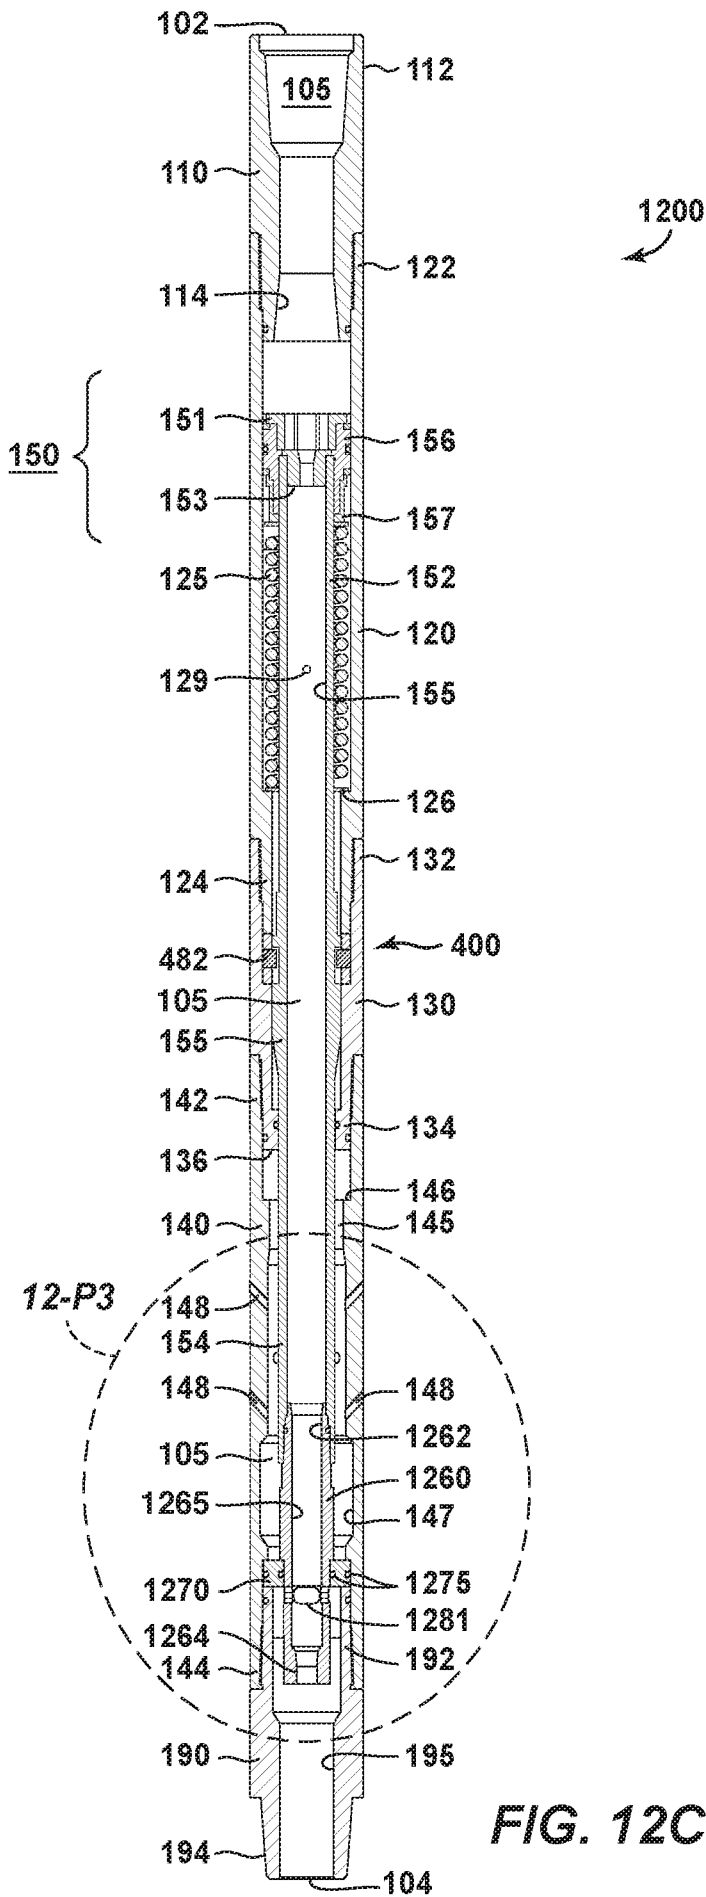


FIG. 11B







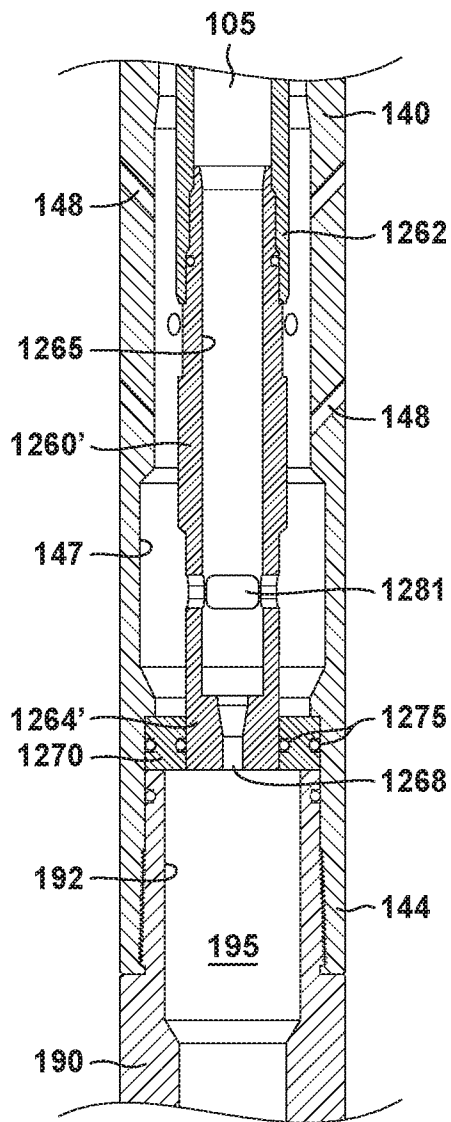


FIG. 12-P4

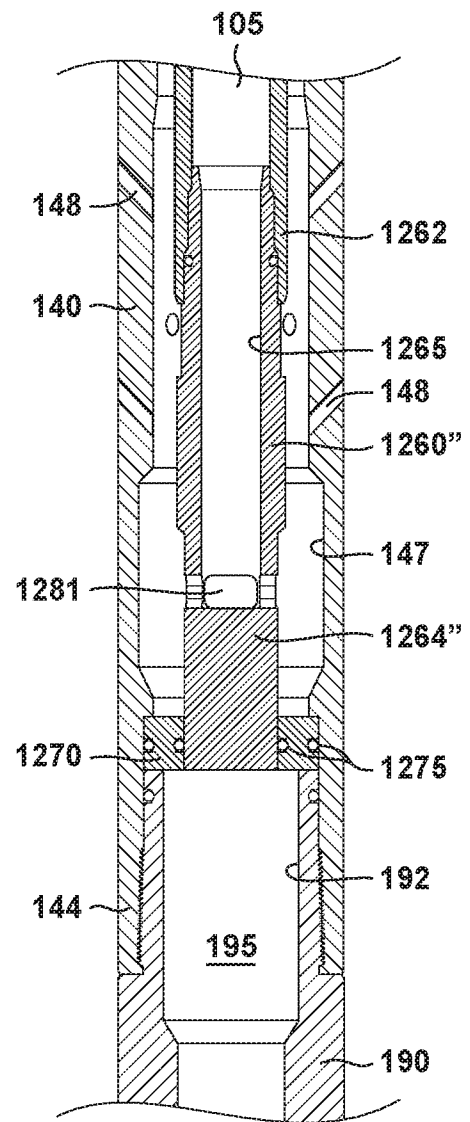
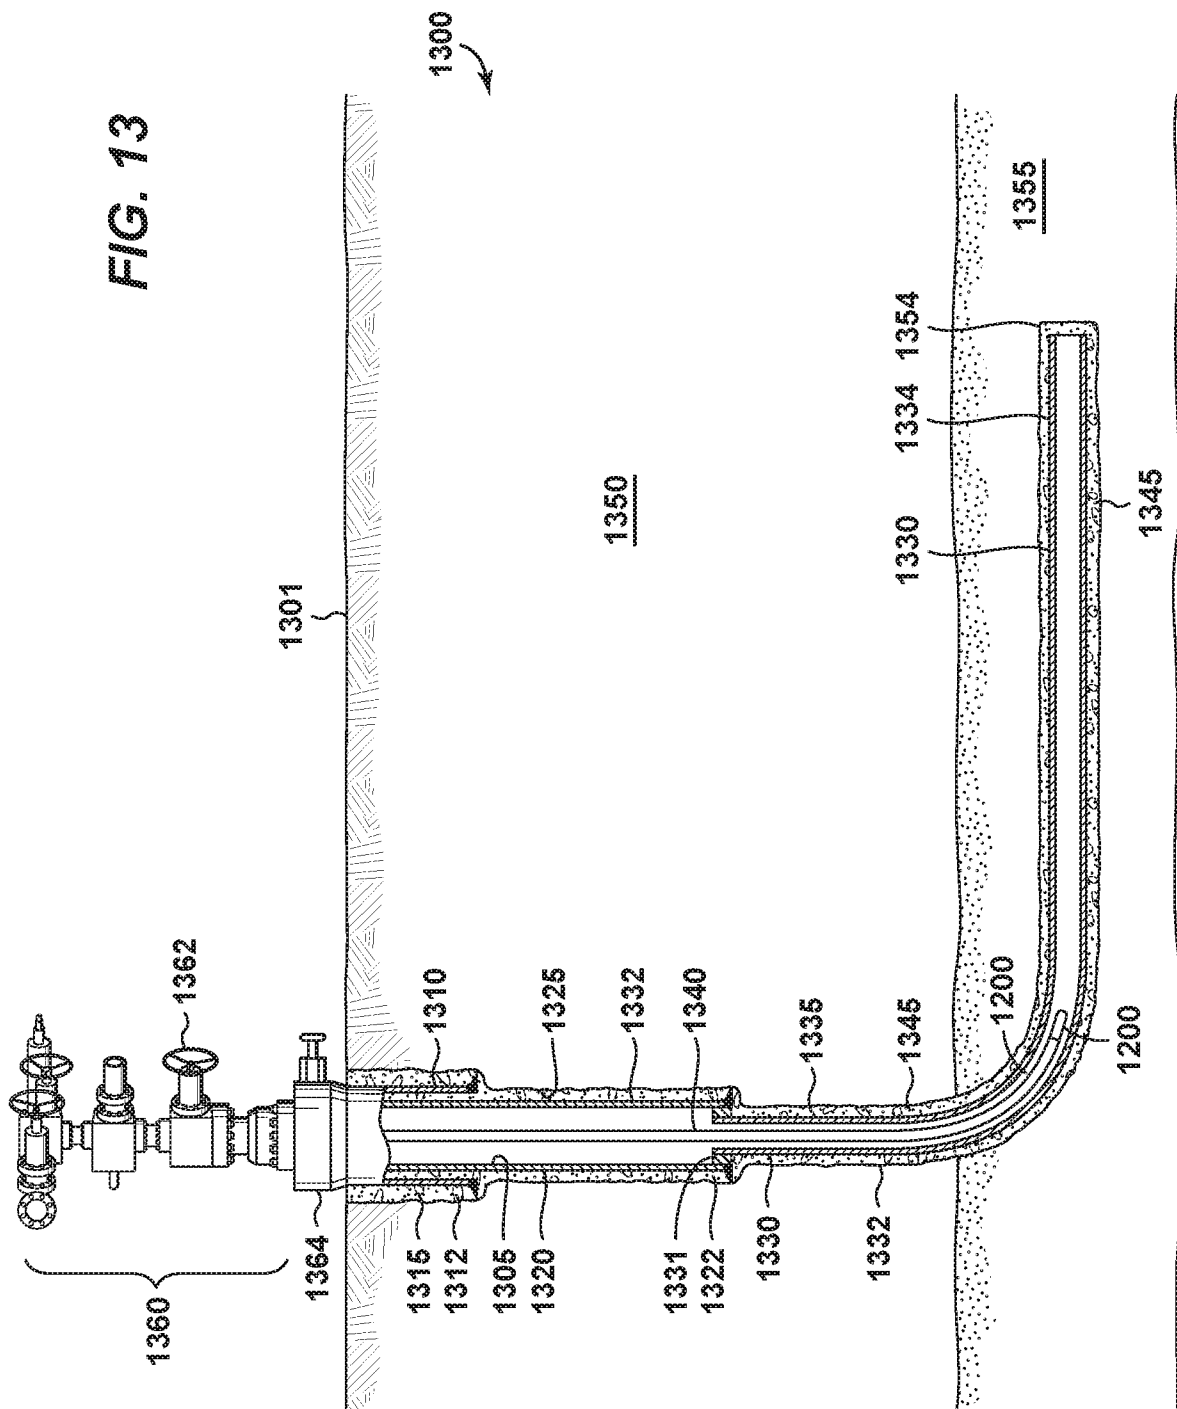
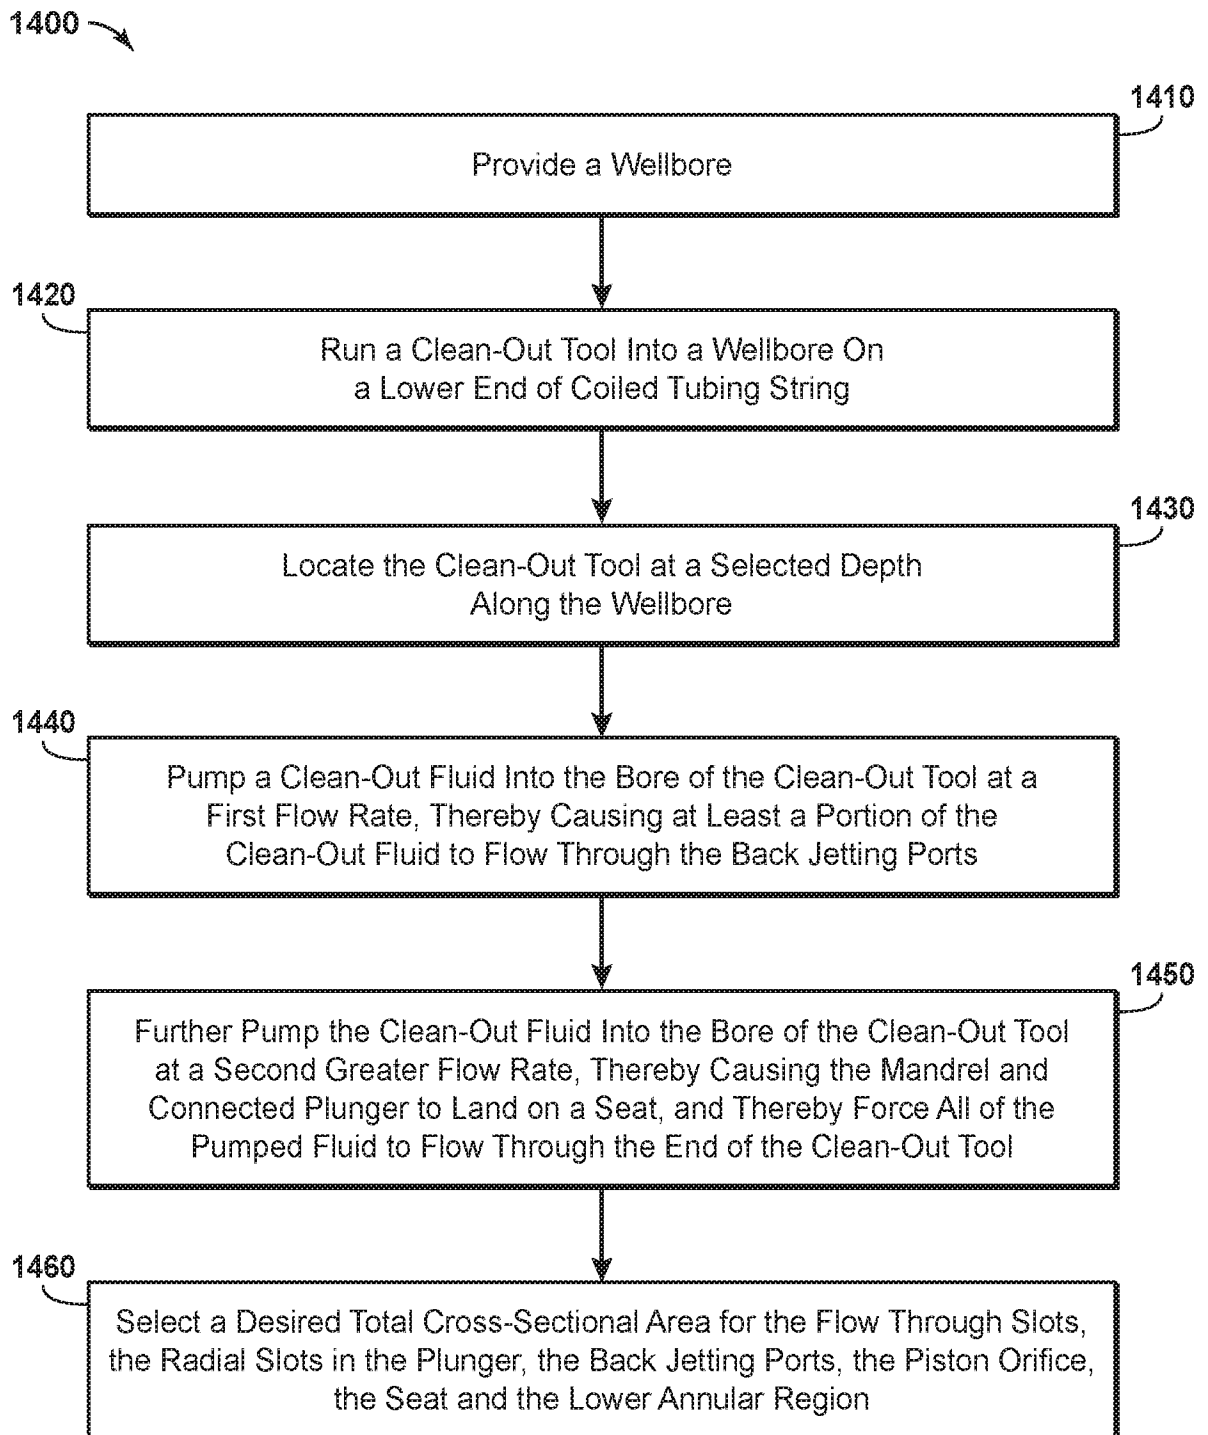


FIG. 12-P5



**FIG. 14**

INTERNATIONAL SEARCH REPORT

International application No.
PCT/IB2020/000161

A. CLASSIFICATION OF SUBJECT MATTER
IPC: **E21B 21/08** (2006.01), **E21B 21/10** (2006.01), **E21B 37/00** (2006.01)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC: **E21B 21/08** (2006.01), **E21B 21/10** (2006.01), **E21B 37/00** (2006.01)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used)
Databases: Questel Orbit, Canadian Patents Database

Search terms: back, jetting, ports, piston, clean-out, multi, tubular

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US9115558B2 (STANG, J.), 25 August 2015 (25-08-2015) *whole document*	1-40
A	US20110203847A1 (RANDALL, B. et al) 25 August 2011 (25-08-2011) * whole document*	1-40
A	US20180371857A1 (MOJA, A.) 27 December 2018 (27-12-2018) * whole document*	1-40

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "D" document cited by the applicant in the international application earlier application or patent but published on or after the international filing date "E" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "L" document referring to an oral disclosure, use, exhibition or other means "O" document published prior to the international filing date but later than the priority date claimed "P"	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family
--	--

Date of the actual completion of the international search

Date of mailing of the international search report
09 July 2020 (09-07-2020)

Name and mailing address of the ISA/CA
Canadian Intellectual Property Office
Place du Portage I, C114 - 1st Floor, Box PCT
50 Victoria Street
Gatineau, Quebec K1A 0C9
Facsimile No.: 819-953-2476

Authorized officer

Jim Triantafillou (819) 934-4268

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/IB2020/000161

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
US9115558B2	25 August 2015 (25-08-2015)	US2012205108A1 CA2747042A1 CA2747042C	16 August 2012 (16-08-2012) 23 January 2012 (23-01-2012) 23 February 2016 (23-02-2016)
US2011203847A1	25 August 2011 (25-08-2011)	US8752651B2 AU2016223210A1 AU2016223210B2 AU2016223211A1 AU2016223211B2 AU2016223213A1 AU2016223213B2 AU2016223213C1 AU2016223214A1 AU2016223214B2 AU2018253608A1 AU2018253608B2 AU2019200875A1 AU2019200875B2 AU2019200877A1 CA2732675A1 CA2732675C CA2748994A1 CA2748994C CA2919649A1 CA2919649C CA2919665A1 CA2919665C CA2919666A1 CA2919666C CA2919674A1 CA2919674C CA3031514A1 CA3031820A1 CN107407129A CN107407129B CN107407141A CN107407141B CN107429542A CN107429542B CN107429552A CN107429552B CN109915011A CN110067534A GB201713514D0 GB2550790A GB201713587D0 GB2550795A GB2550795B GB201713596D0 GB2550797A GB201713449D0 GB2553673A GB2553673B GB201803897D0 GB2562576A GB2562576B GB201820229D0	17 June 2014 (17-06-2014) 03 August 2017 (03-08-2017) 08 November 2018 (08-11-2018) 03 August 2017 (03-08-2017) 06 December 2018 (06-12-2018) 03 August 2017 (03-08-2017) 28 February 2019 (28-02-2019) 06 June 2019 (06-06-2019) 03 August 2017 (03-08-2017) 31 January 2019 (31-01-2019) 22 November 2018 (22-11-2018) 27 February 2020 (27-02-2020) 28 February 2019 (28-02-2019) 16 April 2020 (16-04-2020) 28 February 2019 (28-02-2019) 25 August 2011 (25-08-2011) 05 November 2013 (05-11-2013) 22 August 2012 (22-08-2012) 05 November 2013 (05-11-2013) 24 August 2016 (24-08-2016) 26 February 2019 (26-02-2019) 24 August 2016 (24-08-2016) 25 June 2019 (25-06-2019) 24 August 2016 (24-08-2016) 16 July 2019 (16-07-2019) 24 August 2016 (24-08-2016) 16 July 2019 (16-07-2019) 24 August 2016 (24-08-2016) 24 August 2016 (24-08-2016) 30 October 2018 (30-10-2018) 01 December 2017 (01-12-2017) 05 July 2019 (05-07-2019) 01 December 2017 (01-12-2017) 10 March 2020 (10-03-2020) 21 June 2019 (21-06-2019) 30 July 2019 (30-07-2019) 04 October 2017 (04-10-2017) 29 November 2017 (29-11-2017) 11 October 2017 (11-10-2017) 29 November 2017 (29-11-2017) 16 October 2019 (16-10-2019) 11 October 2017 (11-10-2017) 29 November 2017 (29-11-2017) 04 October 2017 (04-10-2017) 14 March 2018 (14-03-2018) 05 June 2019 (05-06-2019) 25 April 2018 (25-04-2018) 21 November 2018 (21-11-2018) 16 October 2019 (16-10-2019) 23 January 2019 (23-01-2019)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB2020/000161

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
		GB2566627A	20 March 2019 (20-03-2019)
		GB2566627B	04 September 2019 (04-09-2019)
		GB201910229D0	28 August 2019 (28-08-2019)
		GB2572724A	09 October 2019 (09-10-2019)
		GB2572724B	01 January 2020 (01-01-2020)
		NO20171412A1	31 August 2017 (31-08-2017)
		NO20171413A1	31 August 2017 (31-08-2017)
		NO20171414A1	31 August 2017 (31-08-2017)
		NO20171415A1	31 August 2017 (31-08-2017)
		US2011290561A1	01 December 2011 (01-12-2011)
		US8991522B2	31 March 2015 (31-03-2015)
		US2015176332A1	25 June 2015 (25-06-2015)
		US9856700B2	02 January 2018 (02-01-2018)
		US2016160619A1	09 June 2016 (09-06-2016)
		US9976351B2	22 May 2018 (22-05-2018)
		US2016160568A1	09 June 2016 (09-06-2016)
		US10227825B2	12 March 2019 (12-03-2019)
		US2016160595A1	09 June 2016 (09-06-2016)
		US10260299B2	16 April 2019 (16-04-2019)
		US2016153239A1	02 June 2016 (02-06-2016)
		US10309205B2	04 June 2019 (04-06-2019)
		US2018209258A1	26 July 2018 (26-07-2018)
		US10323493B2	18 June 2019 (18-06-2019)
		US2019032405A1	31 January 2019 (31-01-2019)
		US10597944B2	24 March 2020 (24-03-2020)
		US2019032406A1	31 January 2019 (31-01-2019)
		US2019153841A1	23 May 2019 (23-05-2019)
		US2019162060A1	30 May 2019 (30-05-2019)
		WO2016137663A1	01 September 2016 (01-09-2016)
		WO2016137664A1	01 September 2016 (01-09-2016)
		WO2016137666A1	01 September 2016 (01-09-2016)
		WO2016137667A1	01 September 2016 (01-09-2016)
		WO2019140287A2	18 July 2019 (18-07-2019)
		WO2019140287A3	15 August 2019 (15-08-2019)
		WO2019140336A1	18 July 2019 (18-07-2019)
US2018371857A1	27 December 2018 (27-12-2018)	US10605017B2	31 March 2020 (31-03-2020)
		CA2996578A1	22 December 2018 (22-12-2018)
		CA3051077A1	24 March 2020 (24-03-2020)
		US2019353007A1	21 November 2019 (21-11-2019)
		US10605051B2	31 March 2020 (31-03-2020)