



(51) International Patent Classification:

B29C 67/00 (2006.01) *B33Y 40/00* (2015.01)
B33Y 30/00 (2015.01) *B33Y 50/02* (2015.01)

(21) International Application Number:

PCT/US2016/032133

(22) International Filing Date:

12 May 2016 (12.05.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **HEWLETT-PACKARD DEVELOPMENT COMPANY, L.P.** [US/US]; 11445 Compaq Center Drive West, Houston, Texas 77070 (US).

(72) Inventors: **VALLES, Marius**; Cami de Can Graells, 1-21, Sant Cugat del Valles, 08174 Barcelona (ES). **MACH, Joan**; Cami de Can Graells, 1-21, Sant Cugat del Valles, 08174 Barcelona (ES). **MARTIN VIDAL, Pau**; Cami de Can Graells, 1-21, Sant Cugat del Valles, 08174 Barcelona (ES). **TEXIDO, Rafael**; Cami de Can Graells, 1-21, Sant Cugat del Valles, 08174 Barcelona (ES).

(74) Agent: **HP INC.** et al.; Intellectual Property, 3390 E. Harmony Road, Mail Stop 35, Fort Collins, Colorado 80528 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: 3D BUILD PLATFORM REFILL OPENING AND CAP

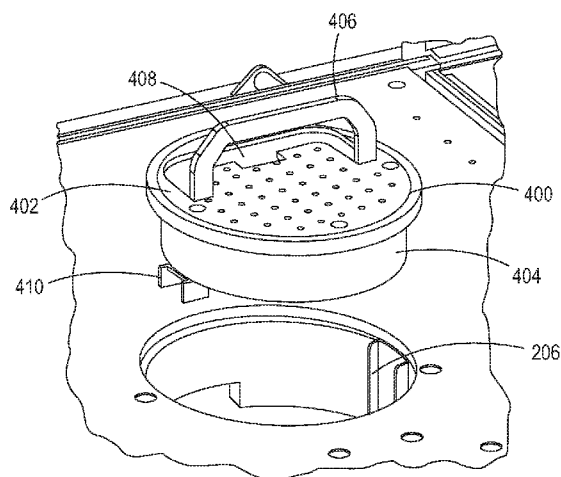


FIG. 4

(57) Abstract: In example implementations, an apparatus includes a build platform and a cap. The build platform has an opening on a top surface to fill a build material storage unit. The cap is inserted into the opening to seal the opening. A top surface of the cap and the top surface of the build platform have a uniform thermal conductivity when the cap is inserted into the opening.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to the identity of the inventor (Rule 4.17(i))*
- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

- *with international search report (Art. 21(3))*

3D BUILD PLATFORM REFILL OPENING AND CAP

BACKGROUND

[0001] Three dimensional (3D) printers, also referred to as additive manufacturing machines, commonly operate by using a material to generate a 3D object layer-by-layer. In some 3D printing systems, powder is delivered to a build platform from a powder storage unit. A layer of the powder is leveled and excess powder can be recycled. Portions of the layer of powder can be printed and fused using an energy source. The 3D printing system can operate at high temperatures to melt and fuse the portions of powder that are printed when building a part.

BRIEF DESCRIPTION OF THE DRAWINGS

- [0002] FIG. 1 is a block diagram of a side view of an example of a 3D printing system of the present disclosure;
- [0003] FIG. 2 is a block diagram of an example build unit of the 3D printing system;
- [0004] FIG. 3 is a cross-sectional diagram of an example build unit;
- [0005] FIG. 4 is isometric view of an example of a cap;
- [0006] FIG. 5 is a side view of an example handle on the cap;
- [0007] FIG. 6 is an isometric view of an example of the cap in an opening in a top surface of a build platform;
- [0008] FIG. 7 is a cross-sectional diagram of an example of the opening in the top surface of the build platform;
- [0009] FIG. 8 is a cross-sectional diagram of an example of a supply hose connected to the opening; and

[0010] FIG. 9 is a flow diagram of an example method for supplying build material through an opening in a top surface of a build platform.

DETAILED DESCRIPTION

[0011] The present disclosure discloses examples of a build platform on a build unit that includes an opening in a top surface of the build platform and a cap. The build unit has an opening in a top surface of a build platform of the build unit. The opening may provide access to an enclosed build material storage unit within the build unit and below the build platform. As a result, the build material storage unit may be refilled with build material via a gravity fill as quickly as possible. Any clouds of dust are contained within the build material storage unit and do not form in the print zone over the build platform.

[0012] The opening in the top surface of the build platform provides easy access to the powder storage unit. For example, the opening allows an operator to easily view a powder level remaining in the powder storage unit. In addition, the powder may be periodically changed or the powder storage unit may be periodically cleaned. As a result, the opening allows for easy access to the powder storage unit.

[0013] In addition, when the opening is plugged with a cap, the top surface and the cap may be designed to have uniform thermal conductivity to ensure that the entire top surface has an even temperature profile. For example, integrity of the part being printed can be compromised if a cool spot forms over the cap, or there are large temperature differences between the cap and the top surface of the build platform.

[0014] FIG. 1 illustrates an example of a 3D printing system 100. The 3D printing system may include a build unit 102, a printer or 3D printer 104 and a build material supply/post-processing component 106. In one implementation, the build unit 102 may store a build material that is used to build a part using additive printing/processing layer by layer. The build material may be a powder (e.g., a metallic powder, a ceramic powder, and the like). In addition, the build unit 102 may provide a vertically movable build platform upon which the part is built. The build material may be delivered up from the sides of the build unit 102

onto the build platform. The build platform may move lower after each layer is printed.

[0015] In one example, the build unit 102 may be connected to the build material supply/post-processing component 106 to receive the build material. For example, FIG. 1 shows the build material supply/post-processing component 106 with the build unit 102 connected.

[0016] After the build unit 102 receives the build material, the build unit 102 may be disconnected from the build material supply/post-processing component 106 and connected to the printer 104. FIG. 1 shows the printer 104 with the build unit 102 connected.

[0017] In some implementations, the printer 104 may have a first print head for applying a fusing agent to areas of the build material that will be fused to print a layer of the part that is being printed. The first print head may also apply a detailing agent on some areas of the build material to help prevent the build material from fusing in the areas that will not be fused. Then the printer 104 may have a second print head that applies energy to fuse the areas of the build material with the fusing agent. The build platform of the build unit 102 may be lowered and a new layer of build material may be added on top of the layer of build material that was printed. The process may be repeated until the part is completed.

[0018] The build unit 102 may be removed from the printer 104 after printing of the part has completed. The build unit 102 can then be connected to the build material supply/post-processing component 106 again to extract the part. In addition, the build material supply/post-processing component 106 may also recover and recycle the unfused build material.

[0019] Although the build unit 102 is shown as being a separate component from the printer 104, it should be noted that the build unit 102 may be part of the printer 104. For example, the build material may be supplied in the printer 104 and the build platform may be part of the printer 104 rather than being deployed as part of a removable build unit such as the build unit 102.

[0020] FIG. 2 illustrates an example block diagram of the build unit 102 that includes an opening 206 on a top surface 212 of a build platform 210. In one

example, feed trays 204 may be located on each side of the build platform 210.

[0021] In one implementation, the build platform 210 may be vertically movable within the build unit 102. For example, as build material is placed on the build platform 210, printed and fused, the build platform 210 may be lowered to receive another layer of build material. Then the process may be repeated until the 3D part is completely printed.

[0022] In some implementations, the opening 206 may be easily accessible by a user or a technician. In other words, a user does not need to climb a ladder or a contraption above the build unit 102 to access the opening 206. In one example, the opening 206 may be located at a height of less than six feet high. For example, the opening 206 may be located at a counter height of approximately four feet to five feet high.

[0023] FIG. 3 illustrates a cross-sectional diagram of the build unit 102. A build material storage unit 208 may be located below the opening 206 and the top surface 212 of the build platform. The build material storage unit 208 may be enclosed and store a build material used to print a part via the additive process of the 3D printing system 100.

[0024] In one implementation, the build material may be fed up the sides of the build material storage unit 208 via an auger that dispenses the build material through the feed trays 204. The build material may be dispensed into a print zone 302.

[0025] As discussed above, the build material storage unit 208 may be enclosed and located below the build platform 210. As a result, the build material storage unit 208 may be quickly filled with build material via a gravity fill system. In addition, no hazardous dust clouds of build material may form in the print zone 302 from quickly pouring the build material into the build material storage unit 208.

[0026] In one embodiment, the opening 206 may also provide easy access to the build material storage unit 208. For example, an operator may quickly view the build material level by looking into the opening 206. In addition, the opening 206 may provide easy access to change the build material or clean the inside of the build material storage unit 208.

[0027] In one example, the opening 206 may be a circular shape and located in a center of the top surface 212 of the build platform 210. However, it should be noted that the opening 206 may be any shape and located anywhere on the top surface 212 of the build platform 210.

[0028] FIG. 4 illustrates an isometric view of an example of a cap 400 that may be inserted into the opening 206 to plug or seal the opening 206. In one example, the cap 400 may include a top portion 402, a body portion 404 and a handle 406. The top portion 402 may be coupled to the body portion 404 (or molded as a single integral piece) and may have a shape that corresponds to the opening 206. For example, if the opening 206 is circular, the top portion 402 and the body portion 404 may also have a corresponding circular shape of similar dimensions (e.g., length, width, diameter, and the like) as the opening 206.

[0029] In one implementation, the top portion 402 and the body portion 404 may be fabricated from a conductive material that has a conductivity similar to the top surface 212 of the build platform 210. In other words, the cap 400 may be a conductive cap. In one example, the top portion 402 and the body portion 404 may be fabricated from a same metal as the top surface 212 of the build platform 210. In other words, if the top surface 212 of the build platform 210 is made from aluminum, a metal alloy, and the like, then the top portion 402 and the body portion 404 may be fabricated from the same aluminum, metal alloy, and the like. As a result, the entire top surface 212, including a top surface of the top portion 402 of cap 400, may have the same thermal conductivity and no differences in temperature gradients may be formed on the top surface 212 of the build platform 210. In other words, the top portion 402 of the cap 400 and the top surface 212 of the build platform 210 may have a uniform thermal conductivity.

[0030] In one implementation, the body portion 404 may include a mating mechanism 410 to mate with a corresponding mechanism in the opening 206. For example, the mating mechanism 410 may be a mechanical connection such as a twist and lock mechanism, or threads to allow the cap 400 to be screwed in, a lock with springs and ball plungers, magnets, and the like.

[0031] In some implementations, the mating mechanism 410 may be oriented such that the handle 406 is positioned to fall in a direction of movement of a spreader of the printer 104 when the cap 400 is inserted into the opening 206. In other words, the mating mechanism 410 may ensure that the handle 406 is in a position such that as a build material spreader moves over the build platform 210, the spreader may knock down the handle 406 without interfering with the movement of the spreader.

[0032] In one example, the handle 406 may be coupled to the top portion 402. The top portion 402 may also include a cavity 408. The cavity 408 may have a similar shape (e.g., the shape of the outer perimeter and thickness) as the handle 406. The handle 406 may rest in the cavity 408 such that the top surface 212, the top portion 402 and the handle 406 are all co-planar during operation of the printer 104. In other words, the top surface 212, the top portion 402 and the handle 406 lie on a single plane or the same plane. Said another way, the top surface of the handle 406 when resting in the cavity 408 is not lower than the top surface of the top portion 402 of the cap 400. As a result, the top portion 402 and the handle 406 may not interfere with operation of the rollers and printer carriage of the printer 104. In addition, the top portion 402 and the handle 406 may not cause changes in elevation in the layers of build material that are spread across the top of the build platform.

[0033] FIG. 5 illustrates a side view of an example of the handle 406. In one implementation, the handle 406 may be designed to have a range of motion of less than 90 degrees relative to the top surface 212 of the build platform to 0 degrees when resting in the cavity 408.

[0034] For example, FIG. 5 illustrates an angle 502 measured between a dashed line 504 and the top surface 212. The dashed line 504 is illustrated as being at an angle of 90 degrees relative to the top surface 212. The handle 406 may be designed to have a range of motion that does not reach the dashed line 504 to a resting position flush in the cavity 408.

[0035] The design of the range of motion of the handle 406 ensures that the handle 406 will fall via gravity. The range of motion of the handle 406, the design of the mating mechanism 410 that ensures that the handle 406 falls in a

direction of movement of the spreader into the cavity 408, and the cap 400 may be designed to ensure no component interferes with the movement of the spreader or other mechanical portions of the printer 102 during processing of the build material.

[0036] For example, FIG. 6 illustrates an example of the cap 400 that is inserted into the opening 206 in the top surface 212 of the build platform 210. The handle 406 may reset in the cavity 408 such that the top portion 402 of the cap 400 is flush, co-planar, or on the same plane, with the top surface 212 of the build platform 210. In other words, when build material is laid on top of the build platform 210 and flattened by the spreader, no changes of elevation would exist in the build material.

[0037] FIG. 7 illustrates a cross-sectional diagram of an example of the opening 206 in the top surface 212 of the build platform 210. In one embodiment, the opening 206 may include a corresponding mating mechanism 708. For example, the mating mechanism 410 of the cap 400 may align and mate with the corresponding mating mechanism 708 of the opening 206. As described above, in some implementations, the corresponding mating mechanism 708 may be aligned such that when the cap 400 is inserted into the opening, the handle 406 will fall in a direction of movement of the spreader.

[0038] In one example, the opening may include a bottom ring 706. The surface of the bottom ring 706 may include a hose valve opening mechanism 702 and a magnet 704. FIG. 8 illustrates an example of a supply hose 802 that is inserted into the opening 206 to fill the build material storage unit 208 with build material. The hose 802 may include a valve 804 to prevent loose build material from spilling out of the hose 802. The hose 802 may also include a sensor 806 to detect the magnet 704.

[0039] In one example, the sensor 806 may detect the magnet 704 indicating that the hose 802 has been inserted into the opening 206 properly. In one example, the hose valve opening mechanism 702 may comprise a hook that protrudes perpendicular to a surface of the bottom ring 706. The hook may turn and lock the valve 804 into an open position. As a result, when the hose 802 is properly inserted into the opening 206 (e.g., as indicated by the sensor 806

detecting the magnet 704) the valve 804 may be opened and ready for filling the build material storage unit 208.

[0040] FIG. 9 illustrates a flow diagram of an example method 900 for supplying build material through an opening in a top surface of a build platform. In one example, the blocks of the method 900 may be performed the build unit 102 or the 3D print system 100.

[0041] At block 902, the method 900 begins. At block 904, the method 900 provides for a conductive cap to be removed from an opening in a top surface of a 3D build platform. For example, the conductive cap may be removed to allow for access to the opening. The 3D build platform may be located on top of a movable build unit. The build unit may be moved into a build material supply/post-processing component of a 3D printing system after the conductive cap is removed.

[0042] In one example, the conductive cap may be removed with a handle that is coupled to a top surface of the conductive cap. The handle may rest in a cavity in the top surface of the conductive cap and be designed to automatically fall into the cavity even if the handle is accidentally left up.

[0043] At block 906, the method 900 provides for a supply hose to be inserted into the opening. In one example, the supply hose may be part of the build material supply/post-processing component of a 3D printing system. The supply hose may be used to fill the build material storage unit in the build unit with build material that is used to print a 3D part.

[0044] At block 908, a presence sensor is triggered to determine that the supply hose is connected. In one example, the build unit may not contain any sensors due to the high operating temperatures used in 3D printing. Rather, the sensors may be contained in the supply hose. The opening in the build unit may contain a magnet that is detected by the presence sensor on the supply hose to indicate that the supply hose has been properly inserted into the opening.

[0045] In addition, the opening may contain a hose valve opening mechanism that opens a valve at an end of the supply hose. For example, an end of the supply hose may have a valve to prevent loose or excess build

material from spilling out of the supply hose. The hose valve opening mechanism may cause the mechanical valve on the end of the supply hose to open and remain open.

[0046] At block 910, build material is supplied into an enclosed build material storage unit below the 3D build platform. In one example, the build material may be supplied via a gravity fill. In other words, the build material may be poured from a source that is located above the opening in the build unit.

[0047] In addition, the build material may be poured at a maximum speed or without any pouring speed control. Since the build material storage unit is enclosed below the top surface of the build platform, any clouds of build material will remain inside the build material storage unit. The build material may be supplied into the build material storage unit as quickly as possible without fear of forming potentially dangerous clouds of build material.

[0048] At block 912, the conductive cap is replaced into the opening in the top surface of the 3D build platform. For example, the supply hose may be disconnected and the build unit may be removed from the build material supply/post-processing component. The conductive cap may be placed into the opening and the build unit may be moved to the printer to build the 3D part. For example, the handle may be used to align a mating mechanism on the conductive cap with a corresponding mating mechanism in the opening. After the conductive cap is inserted, the handle may be lowered into the cavity in the top surface of the conductive cap. When the handle is lowered, the handle, the top surface of the conductive cap and the top surface of the build platform of the build unit may be co-planar. At block 914, the method 900 ends.

[0049] It will be appreciated that variants of the above-disclosed and other features and functions, or alternatives thereof, may be combined into many other different systems or applications. Various presently unforeseen or unanticipated alternatives, modifications, variations, or improvements therein may be subsequently made by those skilled in the art which are also intended to be encompassed by the following claims.

CLAIMS

1. An apparatus, comprising:
 - a build platform having an opening on a top surface to fill a build material storage unit; and
 - a cap to seal the opening, wherein when the cap is inserted into the opening, a top surface of the cap and the top surface of the build platform have a uniform thermal conductivity.
2. The apparatus of claim 1, wherein the cap comprises:
 - a top portion;
 - a body portion coupled to the top portion, wherein the body portion comprises a mating mechanism to mate with an opening in the top surface of the build platform; and
 - a handle coupled to the top portion, wherein the handle rests in a cavity in the top portion.
3. The apparatus of claim 2, wherein the top portion and the handle are coplanar with the top surface of the build platform when the handle rests in the cavity in the top portion.
4. The apparatus of claim 2, wherein the mating mechanism comprises at least one of: a twist and lock mechanism or threads.
5. The apparatus of claim 2, wherein the handle comprises a range of motion from less than 90 degrees relative to the top surface of the build platform to 0 degrees resting in the cavity.
6. The apparatus of claim 1, wherein the build platform is vertically movable within the apparatus.

7. An apparatus, comprising:
 - a build platform for a 3D printer;
 - an enclosed build material storage below the build platform; and
 - an opening in a top surface of the build platform that provides access to the enclosed build material storage, wherein the opening comprises:
 - a bottom ring;
 - a hose valve opening mechanism coupled to the bottom ring for opening a valve on a supply hose that rests against the bottom ring; and
 - a magnet that provides feedback that the supply hose is connected.
8. The apparatus of claim 7, wherein the opening comprises a mating mechanism to mate with a cap.
9. The apparatus of claim 8, wherein the mating mechanism aligns the cap such that a handle on the cap falls down in a direction that a spreader moves.
10. The apparatus of claim 7, wherein the hose valve opening mechanism comprises a hook that protrudes perpendicular to a surface of the bottom ring.
11. The apparatus of claim 7, wherein the supply hose includes a presence sensor to detect the magnet when the supply hose is correctly connected into the opening.
12. The apparatus of claim 7, wherein the opening comprises a mating mechanism to mate with a cap that fills the opening.
13. A method, comprising:
 - removing a conductive cap from an opening in a top surface of a three dimensional (3D) build platform;
 - inserting a supply hose into the opening;
 - triggering a presence sensor to determine that the supply hose is

connected;

supplying build material into an enclosed build material storage below the 3D build platform at an uncontrolled rate; and

replacing the conductive cap into the opening in the top surface of the 3D build platform.

14. The method of claim 13, wherein the triggering the presence sensor comprises connecting the supply hose such that the presence sensor detects a magnet in the opening.

15. The method of claim 13, wherein the conductive cap is removed via a handle that rests in a cavity in a top surface of the conductive cap.

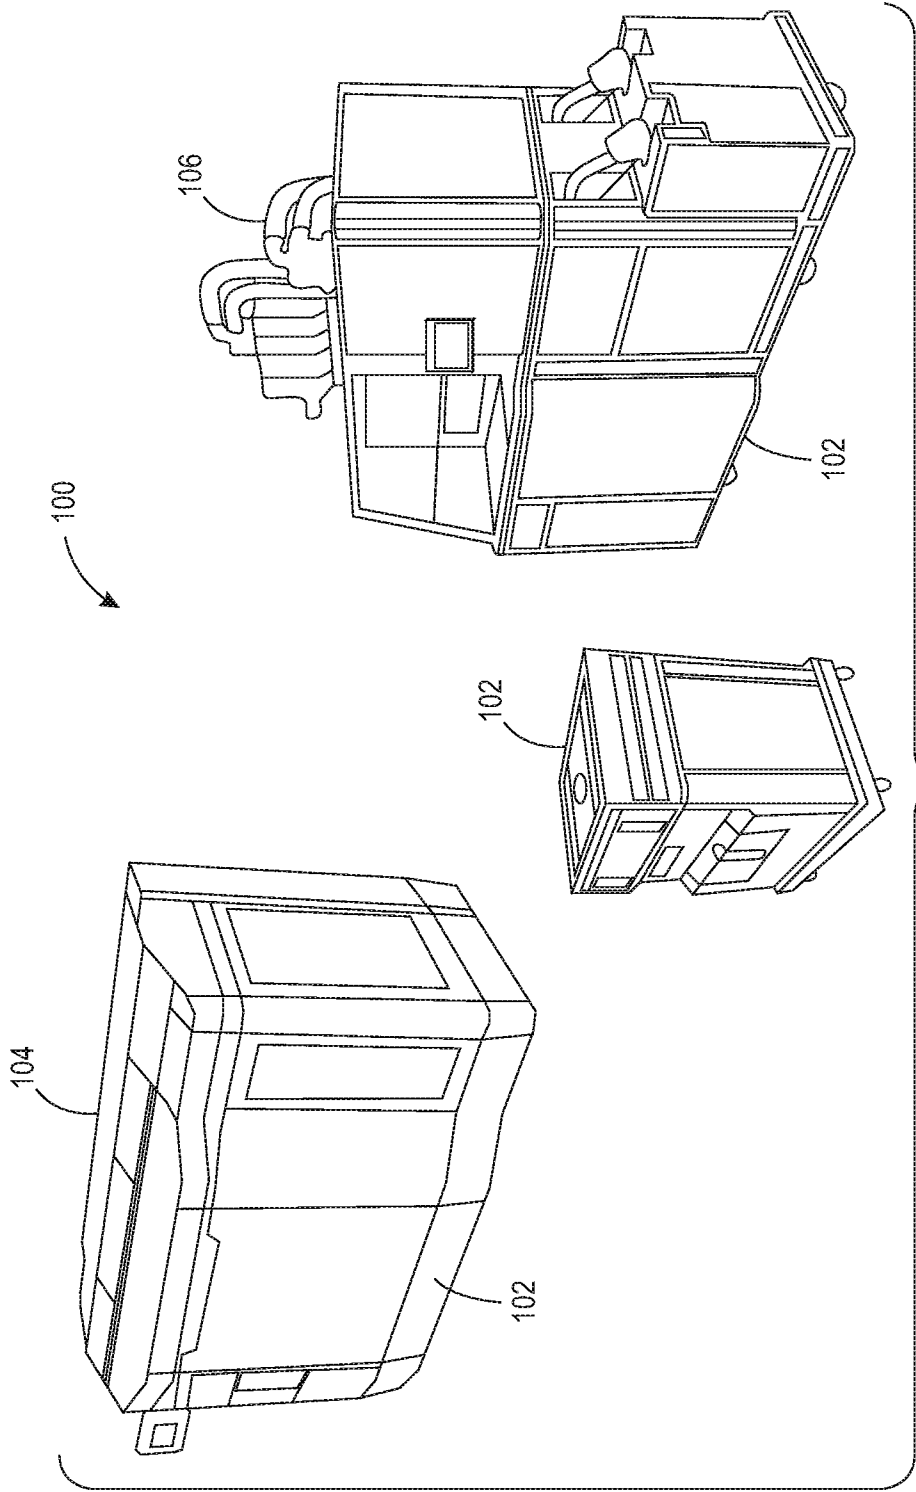


FIG. 1

2/6

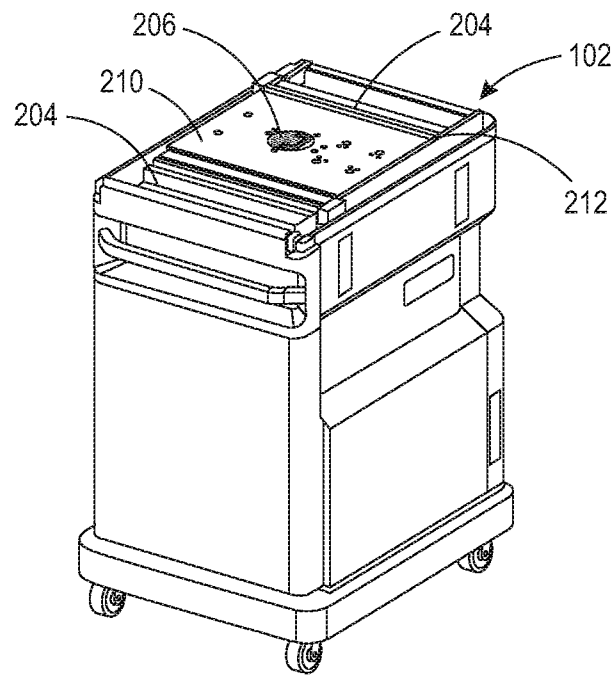


FIG. 2

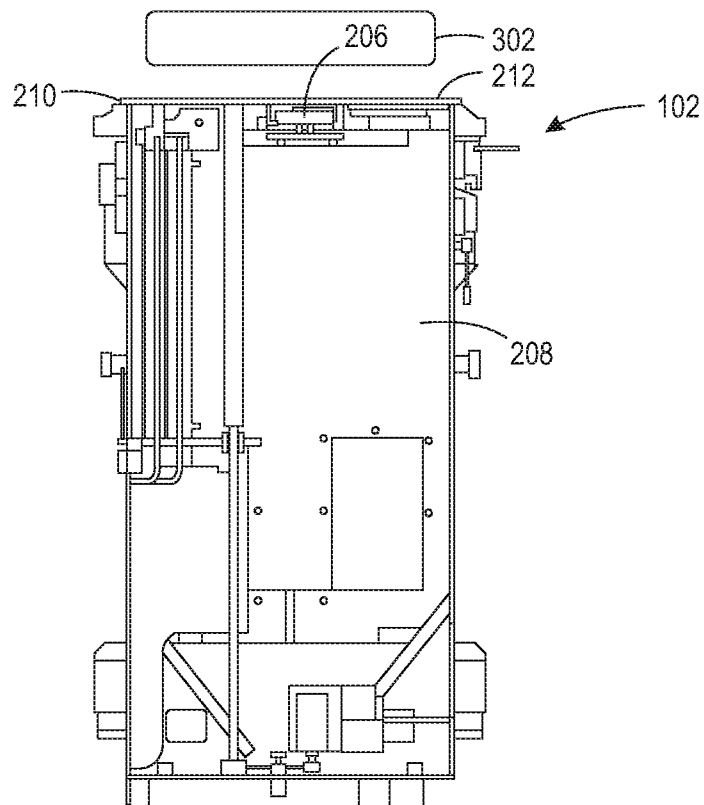


FIG. 3

3/6

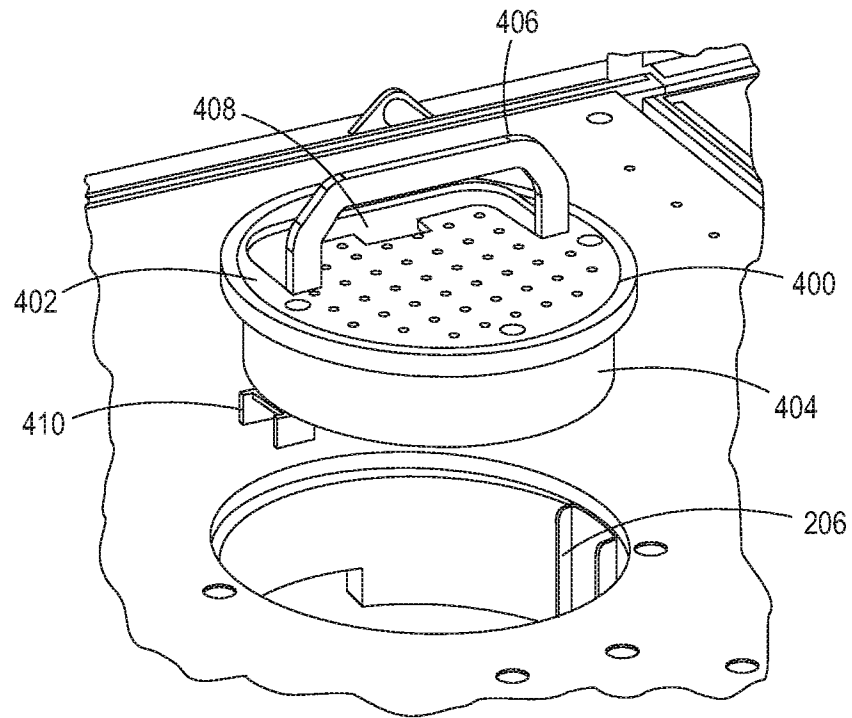


FIG. 4

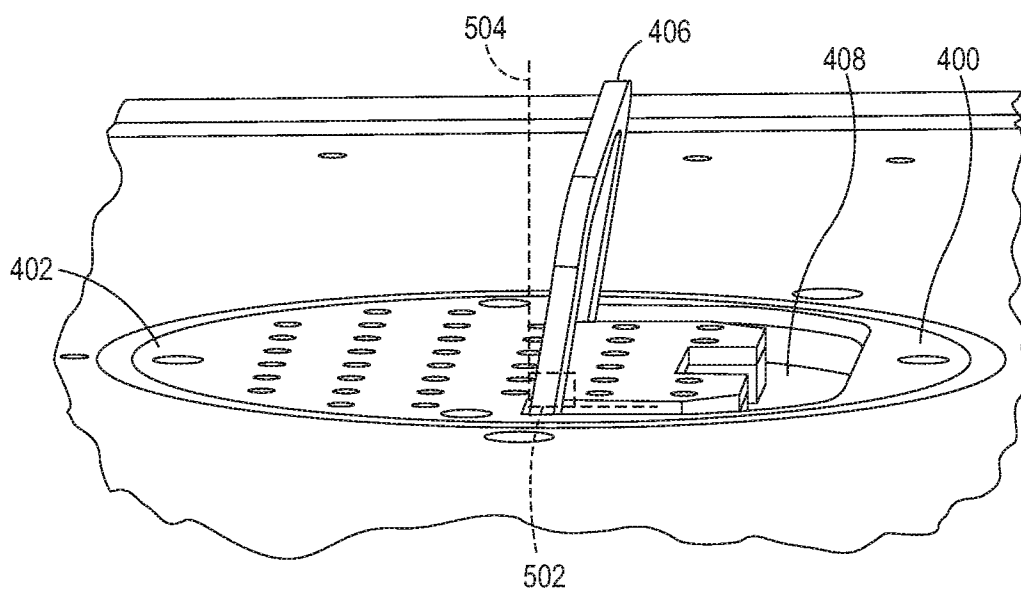


FIG. 5

4/6

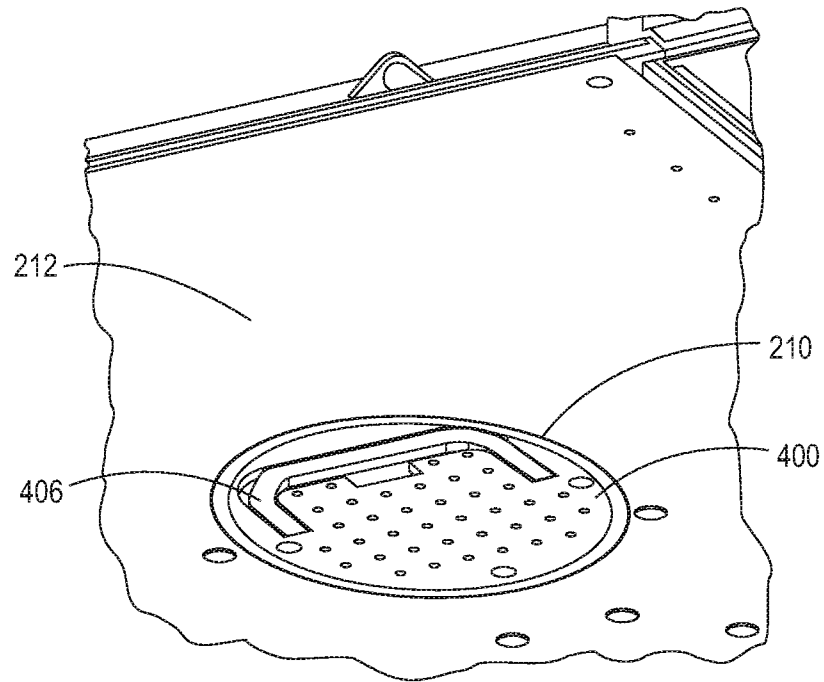


FIG. 6

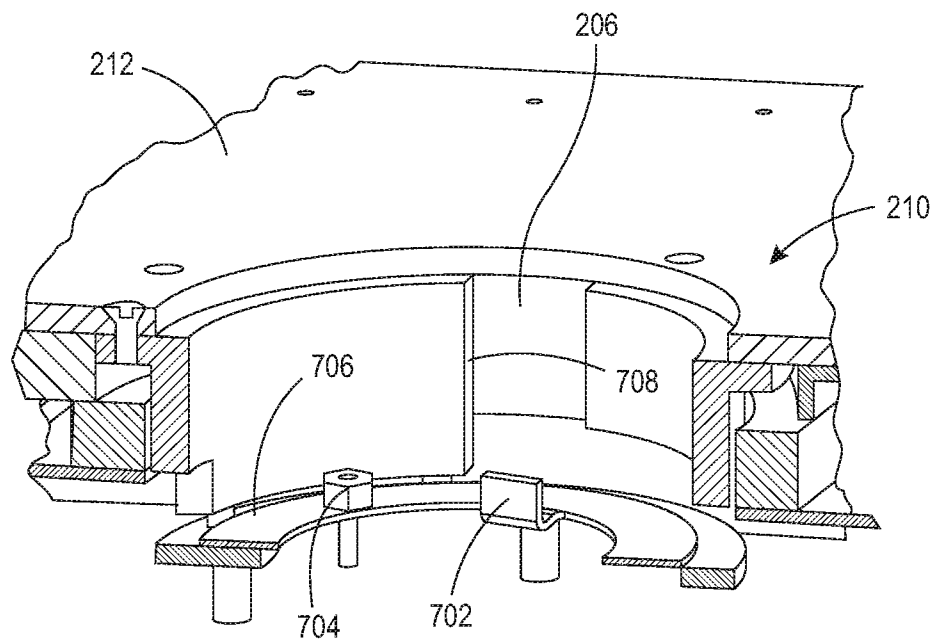


FIG. 7

5/6

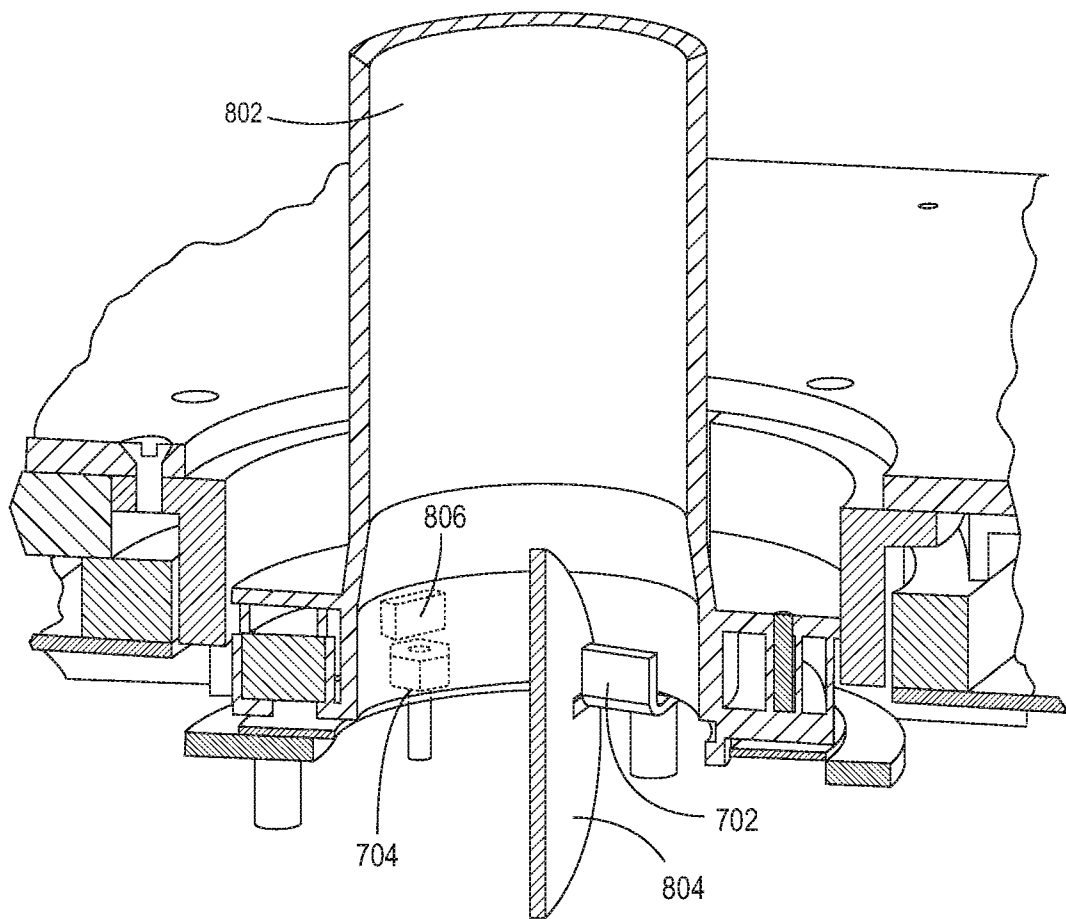


FIG. 8

6/6

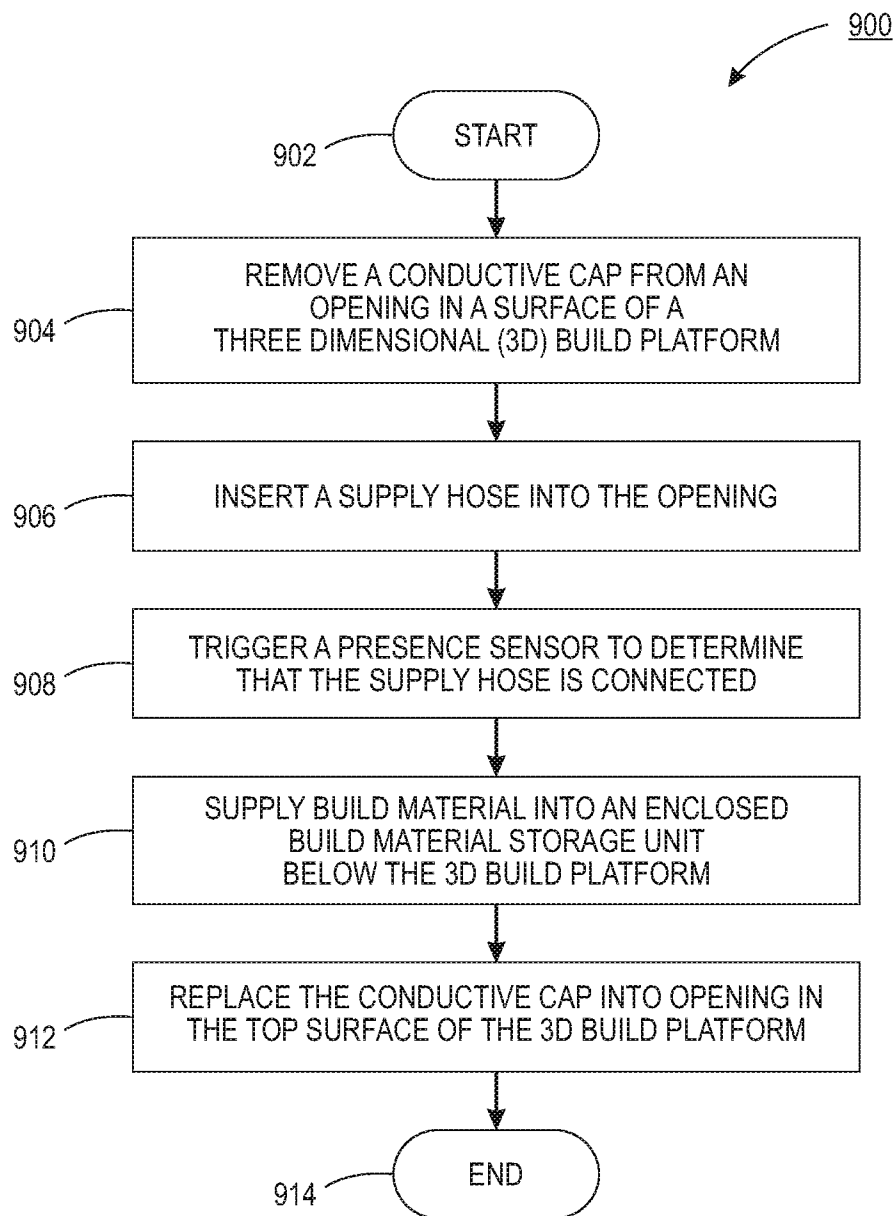


FIG. 9

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2016/032133**A. CLASSIFICATION OF SUBJECT MATTER****B29C 67/00(2006.01)i, B33Y 30/00(2015.01)i, B33Y 40/00(2015.01)i, B33Y 50/02(2015.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B29C 67/00; B05D 3/02; B23K 26/14; B22F 3/16; B28B 7/36; B65B 1/04; B29C 35/08; G03G 21/10; B22F 3/105; B05C 13/00; B33Y 30/00; B33Y 40/00; B33Y 50/02

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: build platform, opening, build material storage unit, cap, thermal conductivity, 3D printer

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2011-0089610 A1 (ALI EL-SIBLANI et al.) 21 April 2011 See paragraphs [0101]-[0105], claims 27, 44 and figures 8-9.	1-15
A	KR 10-2009-0014395 A (Z CORPORATION) 10 February 2009 See paragraphs [0068]-[0069], claims 1, 9 and figure 1.	1-15
A	JP 2010-265530 A (PANASONIC ELECTRIC WORKS CO., LTD.) 25 November 2010 See paragraphs [0023]-[0029], claim 1 and figure 1.	1-15
A	US 2011-0059247 A1 (JUNICHI KUZUSAKO et al.) 10 March 2011 See paragraphs [0025]-[0032], [0057]-[0065], claim 1 and figures 1, 3.	1-15
A	US 2016-0107232 A1 (SODICK CO., LTD.) 21 April 2016 See paragraphs [0037]-[0039], claim 1 and figure 1.	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

03 February 2017 (03.02.2017)

Date of mailing of the international search report

03 February 2017 (03.02.2017)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea



Facsimile No. +82-42-481-8578

Authorized officer

CHO, Ki Yun

Telephone No. +82-42-481-5655



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2016/032133

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2011-0089610 A1	21/04/2011	AU 2011-318589 A1 EP 2629949 A1 US 2013-0140741 A1 US 8372330 B2 US 9486944 B2 WO 2012-054099 A1	06/06/2013 28/08/2013 06/06/2013 12/02/2013 08/11/2016 26/04/2012
KR 10-2009-0014395 A	10/02/2009	CN 101495294 A CN 101495294 B EP 2024168 A2 EP 2024168 B1 EP 2450177 A1 EP 2450177 B1 JP 2009-538226 A JP 5243413 B2 KR 10-1537494 B1 US 2008-0006334 A1 US 2008-0006958 A1 US 2008-0060330 A1 US 7828022 B2 US 7971991 B2 US 7979152 B2 WO 2007-139938 A2 WO 2007-139938 A3	29/07/2009 13/03/2013 18/02/2009 22/08/2012 09/05/2012 08/05/2013 05/11/2009 24/07/2013 16/07/2015 10/01/2008 10/01/2008 13/03/2008 09/11/2010 05/07/2011 12/07/2011 06/12/2007 26/06/2008
JP 2010-265530 A	25/11/2010	JP 5355213 B2	27/11/2013
US 2011-0059247 A1	10/03/2011	EP 2305454 A1 EP 2305454 A4 JP 5400042 B2 WO 2009-145069 A1	06/04/2011 09/01/2013 29/01/2014 03/12/2009
US 2016-0107232 A1	21/04/2016	CN 105522148 A DE 102015116923 A1 JP 2016-078375 A JP 5841650 B1	27/04/2016 21/04/2016 16/05/2016 13/01/2016