



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2279355 C 2007/01/02

(11)(21) **2 279 355**

(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**


(86) Date de dépôt PCT/PCT Filing Date: 1997/01/31
(87) Date publication PCT/PCT Publication Date: 1998/08/06
(45) Date de délivrance/Issue Date: 2007/01/02
(85) Entrée phase nationale/National Entry: 1999/07/30
(86) N° demande PCT/PCT Application No.: SE 1997/000152
(87) N° publication PCT/PCT Publication No.: 1998/033969

(51) Cl.Int./Int.Cl. *D21B 1/02* (2006.01),
B27L 11/08 (2006.01)
(72) Inventeur/Inventor:
SELTMAN, JOACHIM, W.O., SE
(73) Propriétaire/Owner:
SELTMAN, JOACHIM, W.O., SE
(74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : PROCÉDE POUR OBTENIR DU BOIS AYANT DE FAIBLES CONNEXIONS DE FIBRES
(54) Title: METHOD TO OBTAIN WOOD WITH WEAK FIBRE CONNECTIONS

(57) **Abrégé/Abstract:**

The invention relates to a method and to an arrangement for obtaining wood in which the tracheids have less ability to bind to each other. The end surface of the wood is irradiated with pulsed laser light of such strength, and with such a number of pulses, that lignin-related cellulose and hemicellulose bonds break up along the light-conducting middle lamella to a depth which is sufficient to ensure that reduction of the wood (to paper pulp) via mechanical processes can be done more quickly, more gently and with greater energy efficiency.

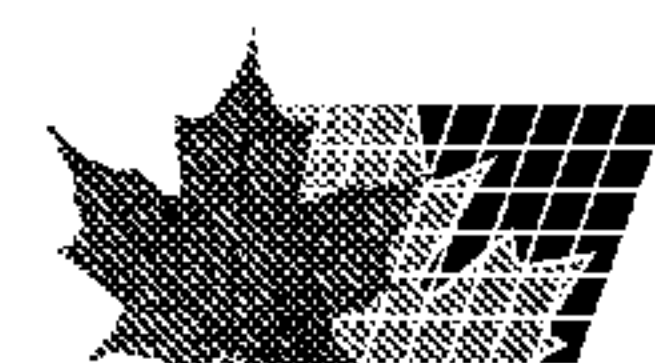

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : D21B 1/02	A1	(11) International Publication Number: WO 98/33969 (43) International Publication Date: 6 August 1998 (06.08.98)
(21) International Application Number: PCT/SE97/00152 (22) International Filing Date: 31 January 1997 (31.01.97) (71)(72) Applicant and Inventor: SELTMAN, Joachim [SE/SE]; Bondestigen 29, S-144 00 Rönninge (SE). (74) Agent: STENSTRÖM, Jesper; H. Albihs Patentbyrå AB, P.O. Box 3137, S-103 62 Stockholm (SE).		(81) Designated States: CA, JP, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>In English translation (filed in Swedish).</i>
(54) Title: METHOD TO OBTAIN WOOD WITH WEAK FIBRE CONNECTIONS (57) Abstract The invention relates to a method and to an arrangement for obtaining wood in which the tracheids have less ability to bind to each other. The end surface of the wood is irradiated with pulsed laser light of such strength, and with such a number of pulses, that lignin-related cellulose and hemicellulose bonds break up along the light-conducting middle lamella to a depth which is sufficient to ensure that reduction of the wood (to paper pulp) via mechanical processes can be done more quickly, more gently and with greater energy efficiency.		

METHOD TO OBTAIN WOOD WITH WEAK FIBRE CONNECTIONS

The present invention relates to a method for separating fibres from a section of wood.

When producing mechanical pulp from wood, the fibres are separated from the wood by means of the wood being pressed against a grindstone or metal disc. Water is added to the process, on the one hand to carry off the excess heat and on the other hand to conduct the wood fibres away.

At a defined flow of water, the temperature can be held in the range of 100 - 200°C, preferably around 150°C. This facilitates the process of extraction of the fibres from the unit of wood since on the one hand the latter is moistened and on the other hand it is heated. However, the heating must not attain such a level as to cause an undesired molecular breakdown of the cellulose. On the other hand, the morphological complex of cellulose, hemicellulose and lignin is to be loosened.

By means of this method, the fibre is not damaged as much as it is in cold grinding, with a great deal of water, where essentially all the excess heat is carried off. In cold grinding, the fibre is broken off or torn off at too many locations, and the paper produced from cold-ground pulp thus loses strength. A moderate shredding of the fibre is aimed for, however, in order to increase the opacity of the paper, compared to chemical pulp.

An object of the invention is to free fibre from wood in a gentle way. Another object is to separate fibre more quickly. Yet another object of the invention is to separate the fibre in a manner which is more energy-efficient.

The abovementioned objects are achieved using a

- 2 -

method for separating fibres from a section of wood, wherein the wood is irradiated with light of such high light intensity, depending on the quality of the wood and the light wavelength used, that bonds break up along middle lamellas in the irradiated wood, so that the bonds between the fibres are loosened, after which the fibres are separated mechanically from the section of wood.

Further characteristics and developments of the method are indicated described herein.


According to the invention, the wood is irradiated with pulsed light having a high pulse power. On irradiating the end surface, the light penetrates several centimetres into the wood and breaks some of the bonds which are holding the fibres in the wood structure. At long wavelengths of the pulsed light, heating effects occur which give rise to vaporization of liquid in the wood. The vapour formed assists in cracking the fibre. The subsequent mechanical grinding process frees the fibres more gently and utilizes less energy. An energy saving of 10% would mean about 200 kWh less energy per tonne of pulp.

Wood is made up of fibres which are bound to each other along areas which are called middle lamellas. This expression is familiar to a specialist in the field. The middle lamellas for the most part comprise lignin-related cellulose and hemicellulose bonds which thus constitute a binding agent. The fibres are in turn made up of fibrils which are also connected to each other by means of lignin-related cellulose and hemicellulose bonds.

According to a development of the invention, the wood is irradiated using pulsed light which has a wavelength in

- 2a -

the range of 150-300 nm. When the light at this wavelength range, and with a predetermined power, passes through the air on its way towards the wood, ozone is formed. The ozone penetrates the wood together with the pulsed light and breaks down lignin-related cellulose and hemicellulose bonds in the wood. This irradiation process means that the paper which is made from the paper pulp is less transparent, which is desirable for newsprint paper, for example. The predetermined energy of the pulsed light should at least correspond to the same order of magnitude as the binding energy of the lignin-related cellulose and hemicellulose bonds. Energy of this magnitude is created using, for example, an excimer laser, which is

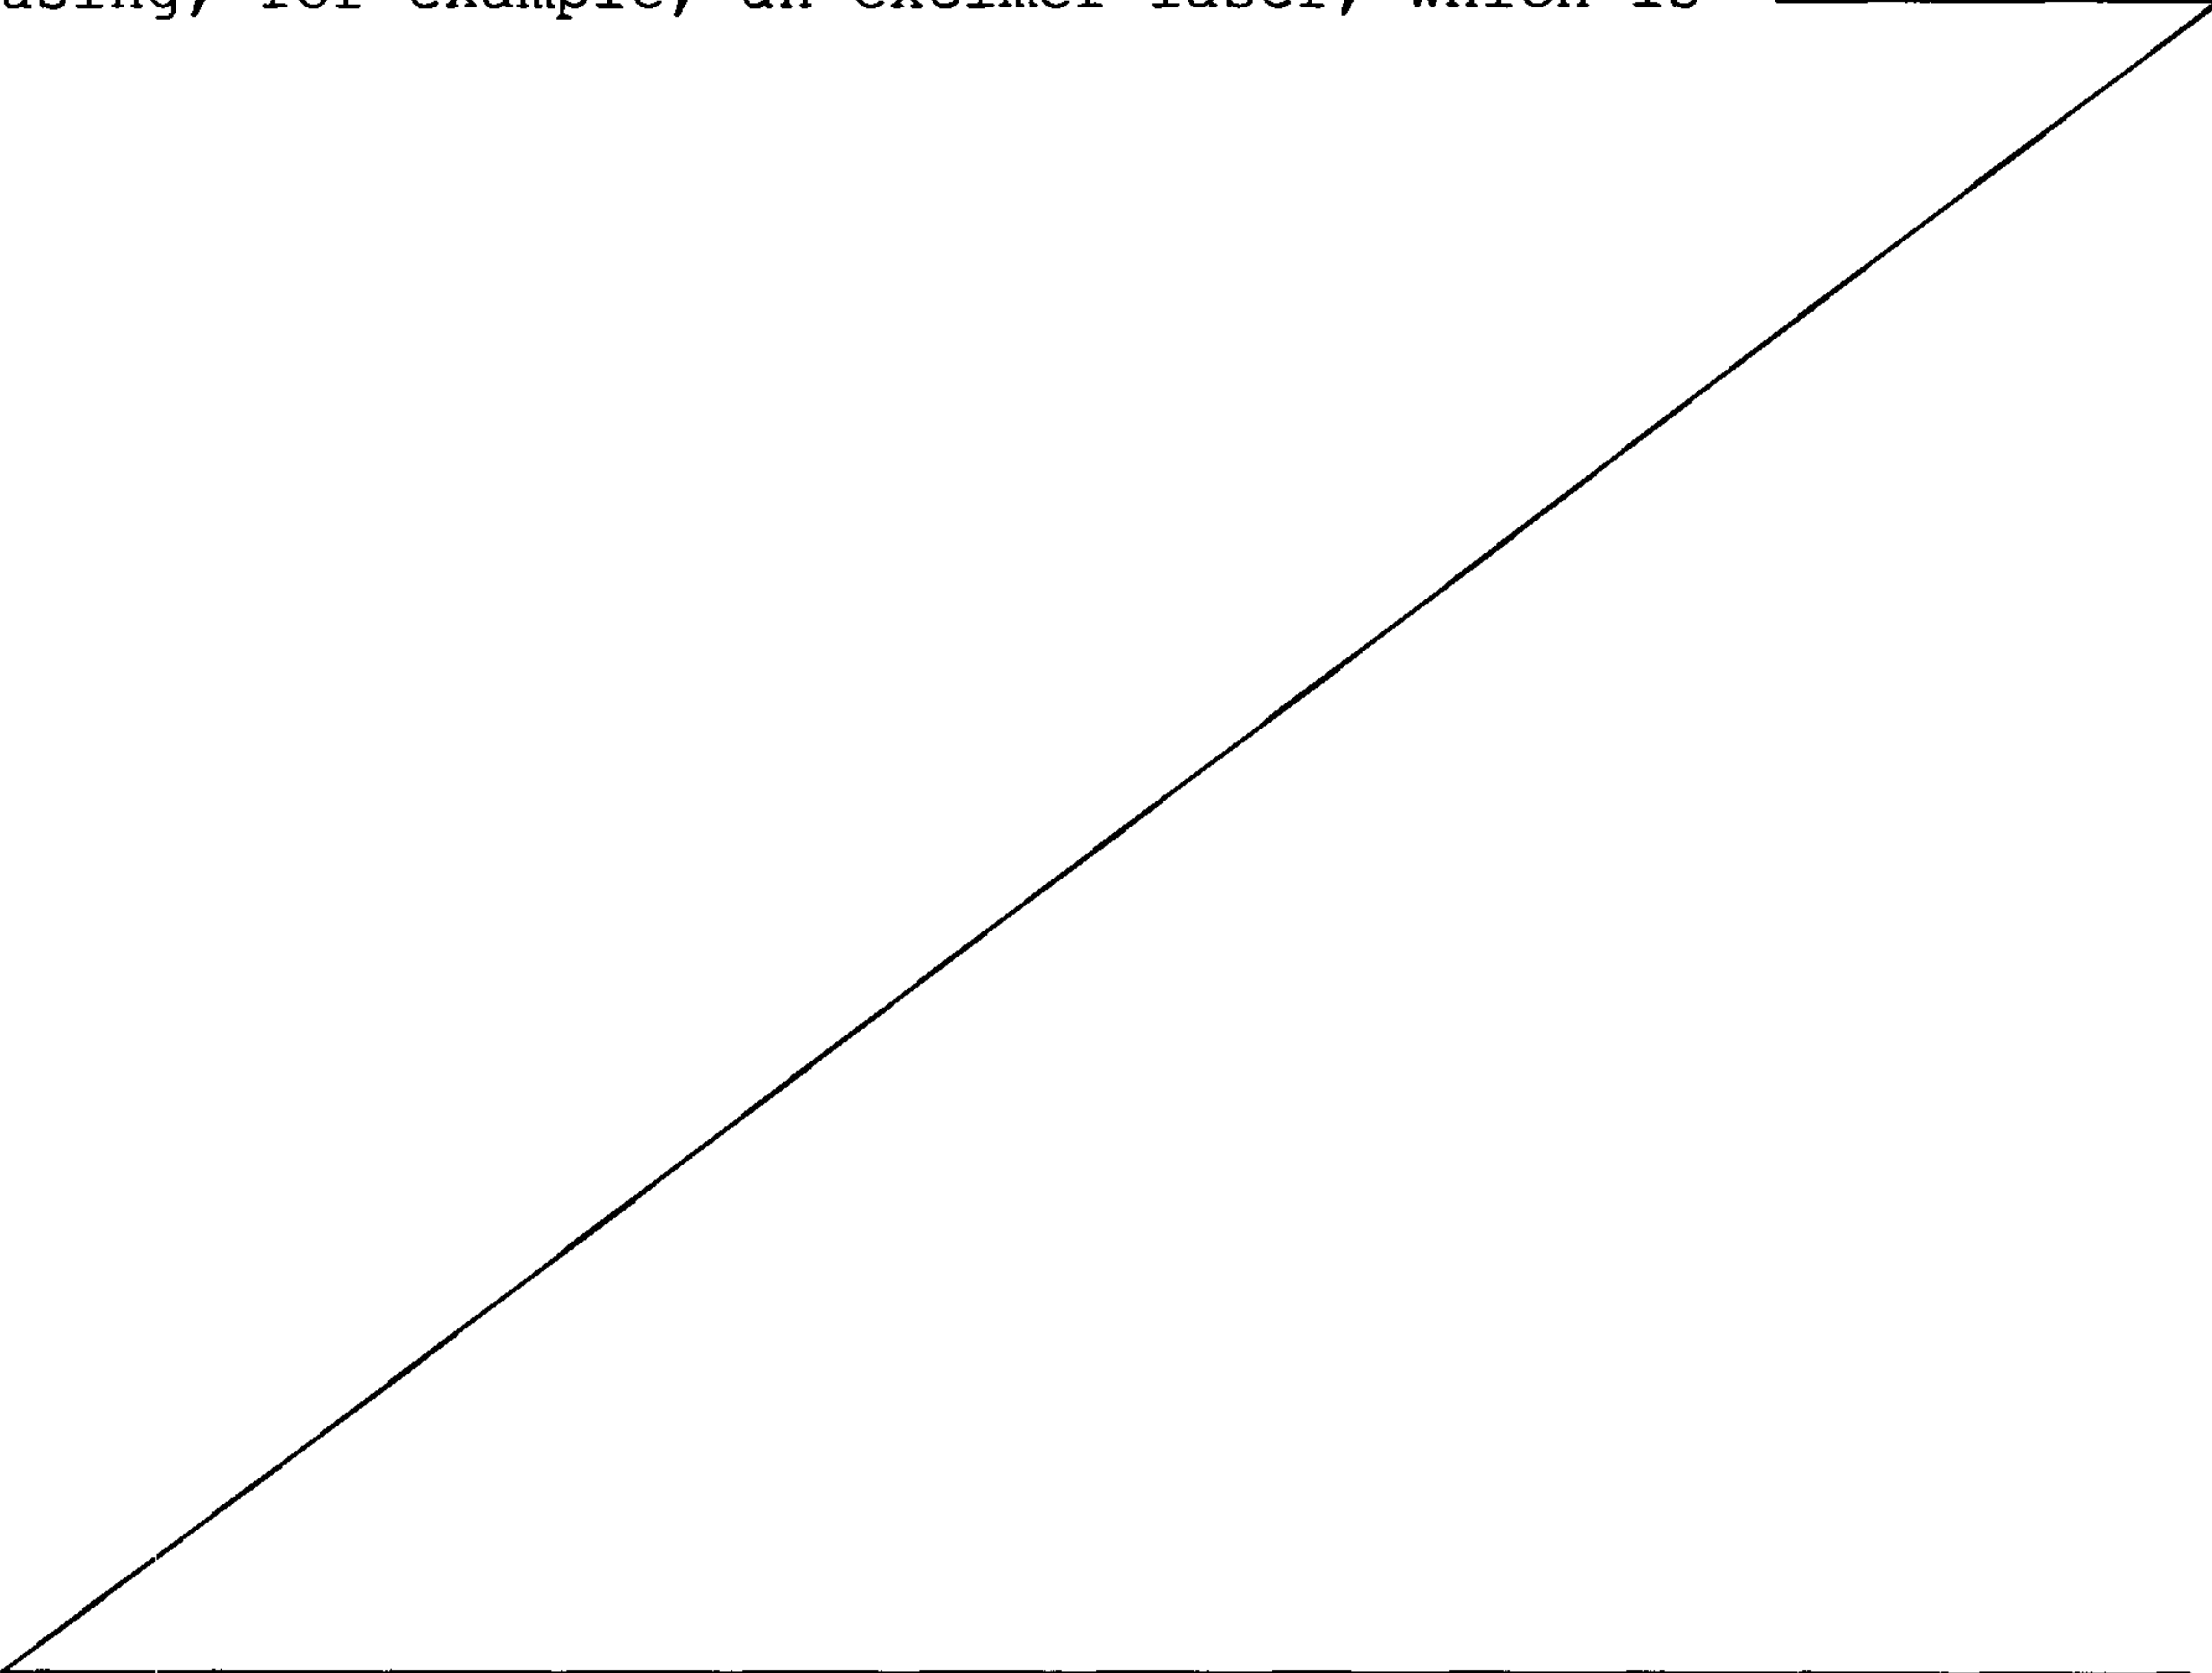

WO 98/33969

PCT/SE97/00152

- 3 -

known per se to the specialist and which does not therefore need to be discussed in any more detail here.

During the irradiation process, liquid is preferably added to the wood in fluid form or in the form of vapour in order to prevent the broken-up lignin-related cellulose and hemicellulose bonds from attempting to create new bonds.

According to one embodiment, the process for manufacturing mechanical pulp from wood can be carried out as follows. Wood is cut into sections of a predetermined size, which can be adapted to the size permitted by the machine in which the process is being carried out. The wood is irradiated with pulsed light directed at one surface of the wood, which surface can be an end surface of the wood. The surface can consist of a transverse cut, a tangential cut or a radial cut through the wood. These cuts are defined by a specialist in the field. The pulsed light reaches a defined depth in the section of wood. Thereafter, the fibres are separated mechanically from the section of wood. This mechanical separation can be carried out by means of a suitable machining process, such as grinding, milling, or planing. The mechanical separation of the fibres should not substantially exceed the depth in the section of wood to which the pulsed light has reached.

During the mechanical separation, water is preferably added in order, on the one hand, to carry off the heat which arises during the machining process, and, on the other hand, to carry away the fibres which have been separated from the section of wood. The water should be added to the machining process at a flow velocity which is such that the temperature of the section of wood can be held in the range of 100 - 200°C.

The process for manufacturing mechanical pulp then continues with alternate irradiation and mechanical separation.

During the irradiation using pulsed light, the lignin-related cellulose and hemicellulose bonds which bind together the fibrils of the fibres are also loosened. This means that in the mechanical separation
5 the fibres can more easily be split or crack along their longitudinal direction. Because the lignin in the middle lamellas and in the area between the fibrils is loosened or removed by the irradiation or light exposure with the pulsed light, the finished paper is
10 less transparent.

After the mechanical separation of the fibres, these can be treated with light of a predetermined wavelength in order to remove remains of lignin from the fibres and to expose fibrils to the desired extent.

15 Pulsed light is preferably used for the irradiation of the wood, but it is conceivable that the light does not need to be pulsed. As an alternative, continuous irradiation of the wood can be carried out.

It is also conceivable for a laser of the so-called YAG type or TEA type to be used as a step in the
20 manufacturing process in order to raise the irradiated surface of the wood.

- 5 -

Patent Claims

1. Method for separating fibres from a section of wood, wherein the wood is irradiated with light of such high light intensity, depending on the quality of the wood and the light wavelength used, that bonds break up along middle lamellas in the irradiated wood, so that the bonds between the fibres are loosened, after which the fibres are separated mechanically from the section of wood.
2. Method according to Claim 1, wherein the wood is irradiated on an end surface, using light which has a wavelength chosen from infrared to ultraviolet, until a certain proportion of the bonds are broken.
3. Method according to Claim 1 or 2, wherein the light treatment is carried out using UV laser light.
4. Method according to claim 3 wherein the UV laser light is from an excimer laser.
5. Method according to any one of claims 1 to 4, wherein the wood is irradiated with a light wavelength which is chosen such that ozone is formed in the air surrounding the wood, and the ozone gas formed contributes to the breaking up and loosening of the bonds between the fibres.
6. Method according to any one of claims 1 to 5, wherein the wood is irradiated with the light in pulsed form and with a sufficient number of pulses to ensure that the bonds between the

- 6 -

fibres are loosened.

7. Method according to any one of claims 1 to 6, wherein liquid in fluid form is added to the wood during the light irradiation.

8. Method according to any one of claims 1 to 6, wherein liquid in the form of vapour is added to the wood during the light irradiation.

9. Method according to any one of claims 1 to 8, wherein the fibres are separated from the section of wood by means of a grinding process.

10. Method according to any one of claims 1 to 9, wherein a predetermined flow of liquid is added to the separation process.

11. Method according to any one of claims 1 to 10, wherein the fibres, after being mechanically separated, are treated with light at a predetermined wavelength in order to remove residues of lignin from the fibres and to expose fibrils.