

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(10) International Publication Number  
**WO 2012/080296 A1**

(43) International Publication Date  
21 June 2012 (21.06.2012)

(51) International Patent Classification:

*C09K 8/60* (2006.01)      *C09K 8/86* (2006.01)  
*C09K 8/72* (2006.01)

A&M University, 3116 TAMU - 603 Richardson Building,  
College Station, TX 77843-3116 (US).

(21) International Application Number:

PCT/EP2011/072693

(74) Agent: **DE VRIES, Adriaan Jacobus c.s.**; Akzo Nobel  
N.V., Legal, IP & Compliance, P.O. Box 9300, NL-6800  
SB Arnhem (NL).

(22) International Filing Date:

14 December 2011 (14.12.2011)

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/424,182      17 December 2010 (17.12.2010)      US  
11151725.6      21 January 2011 (21.01.2011)      EP  
61/496,111      13 June 2011 (13.06.2011)      US

(71) Applicant (*for all designated States except US*): **AKZO NOBEL CHEMICALS INTERNATIONAL B.V.** [NL/NL]; Stationsstraat 77, NL-3811 MH Amersfoort (NL).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **NASR-EL-DIN, Hisham** [CA/US]; 2911 Colton Place, College Station, Texas 77845 (US). **DE WOLF, Cornelia, Adriana** [NL/NL]; Kraaiheide 59, NL-6961 PC Eerbeek (NL). **NASR-EL-DIN MAHMOUD, Mohamed, Ahmed** [EG/SA]; KFUPM - Mail Box 1688, Dhahran, 31261 (SA). **BOUWMAN, Albertus, Jacobus, Maria** [NL/NL]; Wethouder Nasslaan 51, NL-6923 PL Groessen (NL). **GEORGE, Noble, Thekkemelathethil** [IN/US]; c/o Harold Vance Department of Petroleum Engineering, Texas

Published:

— *with international search report (Art. 21(3))*



WO 2012/080296 A1

(54) Title: PROCESS AND FLUID TO IMPROVE THE PERMEABILITY OF SANDSTONE FORMATIONS USING A CHELATING AGENT

(57) Abstract: The present invention relates to a process for treating a sandstone formation comprising introducing a fluid containing glutamic acid N,N-diacetic acid or a salt thereof (GLDA) and having a pH of between 1 and 14 into the formation. The invention in addition relates to a fluid and a kit of parts suitable for use in the above process containing glutamic acid N,N-diacetic acid or a salt thereof (GLDA), a corrosion inhibitor, a surfactant, and optionally a mutual solvent.

Process and fluid to improve the permeability of sandstone formations using a chelating agent

The present invention relates to a process for treating sandstone formations with a fluid containing glutamic acid N,N-diacetic acid or a salt thereof (GLDA), and to the said fluid.

Subterranean formations from which oil and/or gas can be recovered can contain several solid materials contained in porous or fractured rock formations. The naturally occurring hydrocarbons, such as oil and/or gas, are trapped by the overlying rock formations with lower permeability. The reservoirs are found using hydrocarbon exploration methods and often one of the purposes of withdrawing the oil and/or gas therefrom is to improve the permeability of the formations. The rock formations can be distinguished by their major components, and one category is formed by the so-called sandstone formations, which contain siliceous materials like quartz as the major constituent and which in addition may contain various amounts of clays (aluminosilicates such as kaolinite or illite) or alkaline aluminosilicates such as feldspars, and zeolites, as well as carbonates (calcite, dolomite, ankerite) and iron-based minerals (hematite and pyrite).

20

In sandstone there normally is an amount of calcium carbonate and one way to make sandstone more permeable is to perform a so-called acidizing step, wherein an acid solution is pumped into the formation. Acidizing of sandstone formations is generally performed for one of three purposes: 1) to open or "break down" perforations, 2) to remove acid-soluble scales, and 3) to increase permeability in the near-wellbore area, such as removing formation damage resulting from previous actions.

25

High-temperature sandstone acidizing is very challenging because of the complex reactions that occur between the treatment fluids and the sandstone formation minerals, which in addition may lead to consequential side reactions. Such reactions are more likely to occur at elevated temperatures and can result in potentially damaging precipitation reactions.

Gdanski, R.D. and Shuchart, C.E. (1998). "Advanced Sandstone-Acidizing Designs with Improved Radial Models," *SPE Production & Facilities* 13 (4): 272-278. DOI: 10.2118/52397-PA have shown that essentially all clays are unstable in HCl above 250°F (corresponding with about 121°C).

Several documents disclose the use of chelating agents in acidizing sandstone formations instead of using HCl. For example, Frenier, W.W., Brady, M., Al-Harthy, S. et al. (2004), "Hot Oil and Gas Wells Can Be Stimulated without Acids," *SPE Production & Facilities* 19 (4): 189-199. DOI: 10.2118/86522-PA, show that formulations based on the hydroxyethylaminocarboxylic acid family of chelating agents can be used to increase production of oil and gas from wells in a variety of different formations, such as carbonate and sandstone formations.

Parkinson, M., Munk, T., Brookley, J., Caetano, A., Albuquerque, M., Cohen, D., and Reekie, M. (2010), "Stimulation of Multilayered HighCarbonate-Content Sandstone Formations in West Africa Using Chelant-Based Fluids and Mechanical Diversion," Paper SPE 128043 presented at the SPE International Symposium and Exhibition on Formation Damage, Lafayette, Louisiana, 10-12 February. DOI: 10.2118/128043-MS, disclose the use of HEDTA to stimulate sandstone formations. The Pinda formation in West Africa has a wide range of carbonate content (varying from 2% to nearly 100%) and the formation temperature is 300°F (about 149°C). The results show that Na<sub>3</sub>HEDTA was more effective in stimulating the reservoir than the traditional treatment with 7.5 wt% HCl. The document also discloses a

formulation containing HEDTA with 0.2% corrosion inhibitor, 0.2% surfactant, and 0.4% de-emulsifier.

5 However, there is still a need to find a process and a stimulation fluid that further improve the permeability of a sandstone formation and avoid the disadvantages of working with strong inorganic acids at the elevated temperatures inherent for a large number of subterranean formations. In addition, there is a need to provide a process and a stimulation fluid which ensure better removal of the near-wellbore damage without depositing precipitates in the formation, as well as better  
10 prevention of well production decline due to solids movements. Preferably, the stimulation fluid is biodegradable in both fresh and seawater and has a favourable eco-tox profile.

The present invention provides a process for treating a sandstone formation comprising introducing a fluid containing glutamic acid N,N-diacetic acid or a salt  
15 thereof (GLDA) and having a pH of between 1 and 14 into the formation. Preferably, the fluid in the process contains 5-30 wt% of GLDA.

The term "treating" in this application is intended to cover any treatment of the  
20 formation with the fluid. It specifically covers treating the sandstone formation with the fluid to achieve at least one of (i) an increased permeability, (ii) the removal of small particles, and (iii) the removal of inorganic scale, and so enhance the well performance and enable an increased production/recovery of oil and/or gas from the formation. At the same time, it may cover cleaning of the wellbore and  
25 descaling of the oil/gas production well and production equipment.

Although GLDA has a lower stability constant for all metals than HEDTA and is therefore considered to have a smaller chelating capacity than HEDTA, it was surprisingly found that the process of the invention using a solution containing

GLDA instead of HEDTA further improves the permeability of sandstone formations. Also, GLDA appears to have a good selectivity for dissolving carbonates in the sandstone formation.

5 In addition, the present invention provides a stimulation fluid suitable for use in a process to treat sandstone or to make sandstone formations permeable for liquids, i.e. a process to remove carbonate from sandstone. The fluid of the invention is a fluid containing GLDA, a corrosion inhibitor, a surfactant, and optionally a mutual solvent.

10

Finally, the present invention relates to a kit of parts for a treatment process consisting of several stages, such as the pre-flush, main treatment and postflush stage, wherein one part of the kit of parts for one stage of the treatment process, contains a fluid containing GLDA, a corrosion inhibitor, and a surfactant, and the  
15 other part of the kit of parts for the other stage of the treatment process, contains a mutual solvent, or wherein one part contains a fluid containing glutamic acid N,N-diacetic acid or a salt thereof (GLDA) and a corrosion inhibitor, and the other part contains a mutual solvent and a surfactant. A pre- or post-flush is a fluid stage pumped into the formation prior to or after the main treatment. The purposes of the  
20 pre- or post-flush include but are not limited to adjusting the wettability of the formation, displacing formation brines, adjusting the salinity of the formation, dissolving calcareous material and dissolving iron scales. Such a kit of parts can be conveniently used in the process of the invention, wherein the part containing a fluid containing mutual solvent and, in one embodiment, a surfactant is used as a  
25 preflush and/or postflush fluid and the other part containing a fluid containing GLDA, a corrosion inhibitor, and, in one embodiment, a surfactant is used as the main treatment fluid.

For several reasons when treating a subterranean formation a surfactant is added to main treatment fluids or in a separate fluid during the treatment, such surfactant helps to make the formation water-wet, thereby making the main treatment more efficient and allowing a better and deeper contact of the main treatment fluid with the subterranean formation. In addition, adding a surfactant makes the treatment fluids that are commonly aqueous better capable of transporting non-aqueous materials like crude oil.

Besides being able to provide the improved permeability of sandstone formations in the above process, the fluid of the invention and the kit of parts of the invention in addition have the advantage of a good biodegradability and eco-tox profile, and a high acidity without any deposit formation. At the same time, it was found that in the fluid of the invention and the kit of parts of the invention the presence of GLDA ensures that smaller amounts of some usual additives such as corrosion inhibitors, corrosion inhibitor intensifiers, anti-sludge agents, iron control agents, scale inhibitors are needed to still achieve a similar effect to that of state of the art stimulation fluids, reducing the chemicals burden of the process and creating a more sustainable way to produce oil and/or gas. Under some conditions these additives are even completely redundant. It should be realized that in state of the art treatment fluids for sandstone formations often an anionic surfactant is present as well as a cationic corrosion inhibitor, which means a certain extent of mutual neutralization and hence deterioration of the other's effectivity. As it has now been found that fluids on the basis of GLDA require much less corrosion inhibitor, the fluids of the invention and the kit of parts of the invention are easier to formulate and the above drawbacks can be avoided more easily. In addition, in the fluids and the kit of parts of the invention there is an unexpected compatibility of the ingredients, surfactants, and corrosion inhibitors, as well as a synergistic effect with bactericides and/or biocides.

In this respect, reference is made to S. Al-Harthy et al., "Options for High-Temperature Well Stimulation," *Oilfield Review* Winter 2008/2009, 20, No. 4, where the use of tri sodium N-hydroxyethyl ethylenediamine N,N',N'-triacetic acid (HEDTA) is disclosed to have much lower undesired corrosion side effects than a  
5 number of other chemical materials, like HCl and mud acid, that play a role in the oil industry wherein the use of chromium steel is common practice.

It has now been found that over the whole pH range of 1 to 14, preferably of 3 to 13, GLDA gives an even lower corrosion of chromium-containing materials than  
10 HEDTA, especially in the relevant low pH range of 3 to 7, even under the industry limit value of 0.05 lbs/sq.ft (for a 6 hour test period), without the addition of any corrosion inhibitors. Accordingly, the invention covers a fluid containing GLDA that gives an unexpectedly reduced chromium corrosion side effect, and a sandstone formation treatment process wherein corrosion of the chromium-containing  
15 equipment is significantly prevented, and an improved process to clean and/or descale chromium-containing equipment. Also, because of the above beneficial effect, the invention covers fluids in which the amount of corrosion inhibitor and corrosion inhibitor intensifier can be greatly reduced compared to the state of the art fluids and processes, while still avoiding corrosion problems in the equipment.

20

As a further benefit it was found that the fluids and the kit of parts of the present invention, which in many embodiments are water-based, perform as well in an oil saturated environment as in an aqueous environment. This can only lead to the conclusion that the fluids of the invention are extremely compatible with (crude) oil.

25

It may be noted that WO 2009/086954 discloses fluids containing at least 10 wt% of GLDA and the use thereof in dissolving carbonate formations in a well. However, this document is silent on the use of such fluids in sandstone formations, which is only one type of formation, let alone on the complexity of treating a sandstone

formation with acidic fluids to produce oil and/or gas as explained above due to the high amount of sandstone minerals that may interact with the acid.

The fluids of the invention and the fluids in the kit of parts of the invention preferably contain 5-30 wt% of GLDA, more preferably 10-20 wt%. The fluids may be free of, but preferably contain more than 0 wt% up to 2 wt%, more preferably 0.1-1 wt%, even more preferably 0.1-0.5 wt%, of corrosion inhibitor. The fluids may be free of, but preferably contain more than 0 and up to 5 wt% of surfactant, more preferably more than 0 up to 2 wt%. Finally, they may be free of, but preferably contain more than 0 and up to 5 wt% of mutual solvent.

All the above wt% and vol% ranges and numbers are based on the total fluid.

Salts of GLDA that can be used are their alkali metal, alkaline earth metal, or ammonium full and partial salts. Also mixed salts containing different cations can be used. Preferably, the sodium, potassium, and ammonium full or partial salts of GLDA are used.

The fluids of the invention and the fluids in the kit of parts of the invention are preferably aqueous fluids, i.e. they preferably contain water as a solvent, wherein water can be e.g. fresh water, produced water or seawater, though other solvents may be added as well, as further explained below.

The fluids of the invention and the fluids in the kit of parts of the invention preferably contain a nonionic or anionic surfactant. Even more preferably, the surfactant is anionic.

The nonionic surfactant in the fluid of the invention and the fluids in the kit of parts of the invention is preferably selected from the group consisting of alkanolamides, alkoxyated alcohols, alkoxyated amines, amine oxides, alkoxyated amides,

alkoxylated fatty acids, alkoxylated fatty amines, alkoxylated alkyl amines (e.g., cocoalkyl amine ethoxylate), alkyl phenyl polyethoxylates, lecithin, hydroxylated lecithin, fatty acid esters, glycerol esters and their ethoxylates, glycol esters and their ethoxylates, esters of propylene glycol, sorbitan, ethoxylated sorbitan, 5 polyglycosides and the like, and mixtures thereof. Alkoxylated alcohols, preferably ethoxylated alcohols, optionally in combination with (alkyl) polyglycosides, are the most preferred nonionic surfactants.

The anionic (sometimes zwitterionic, as two charges are combined into one compound) surfactant is preferably selected from the group of sulfonates, 10 hydrolyzed keratin, sulfosuccinates, taurates, betaines, modified betaines, alkylamidobetaines (e.g., cocoamidopropyl betaine).

The process of the invention can be performed at basically any temperature that is encountered when treating a subterranean formation. The process of the invention 15 is preferably performed at a temperature of between 35 (about 2°C) and 400°F (about 204°C). More preferably, the fluids are used at a temperature where they best achieve the desired effects, which means a temperature of between 77 (about 25°C) and 300°F (about 149°C).

20 High-temperature applications may benefit from the presence of an oxygen scavenger in an amount of less than about 2 volume percent of the solution.

In one embodiment, the process can be performed at an increased pressure, which means a pressure higher than atmospheric pressure. In many instances it is 25 preferred to pump the fluids into the formation under pressure. Preferably, the pressure used is below fracture pressure, i.e. the pressure at which a specific formation is susceptible to fracture. Fracture pressure can vary a lot depending on the formation treated, but is well known by the person skilled in the art.

In one embodiment, the pH of the fluids of the invention and the fluids in the kit of parts of the invention can range from 1 to 14, preferably 1.7 to 14. More preferably, however, it is between 3.5 and 13, as in the very acidic ranges of 1.7 to 3.5 and the very alkaline range of 13 to 14, some undesired side effects may be caused by the fluids in the formation, such as too fast dissolution of carbonate giving excessive CO<sub>2</sub> formation or an increased risk of reprecipitation. For a better carbonate dissolving capacity it is preferably acidic. On the other hand, it must be realized that highly acidic solutions are more expensive to prepare. Consequently, the solution even more preferably has a pH of 3.5 to 8.

10

The fluid and the fluids in the kit of parts of the invention may contain other additives that improve the functionality of the stimulation action and minimize the risk of damage as a consequence of the said treatment, as is known to anyone skilled in the art.

15

The fluid of the invention and the fluids in the kit of parts of the invention may in addition contain one or more of the group of anti-sludge agents, (water-wetting or emulsifying) surfactants, corrosion inhibitor intensifiers, foaming agents, viscosifiers, wetting agents, diverting agents, oxygen scavengers, carrier fluids, fluid loss additives, friction reducers, stabilizers, rheology modifiers, gelling agents, scale inhibitors, breakers, salts, brines, pH control additives such as further acids and/or bases, bactericides/biocides, particulates, crosslinkers, salt substitutes (such as tetramethyl ammonium chloride), relative permeability modifiers, sulfide scavengers, fibres, nanoparticles, consolidating agents (such as resins and/or tackifiers), combinations thereof, or the like.

25

The mutual solvent is a chemical additive that is soluble in oil, water, acids (often HCl based), and other well treatment fluids. Mutual solvents are routinely used in a range of applications, controlling the wettability of contact surfaces before, during

and/or after a treatment, and preventing or breaking emulsions. Mutual solvents are used, as insoluble formation fines pick up organic film from crude oil. These particles are partially oil-wet and partially water-wet. This causes them to collect material at any oil-water interface, which can stabilize various oil-water emulsions.

5 Mutual solvents remove organic films leaving them water-wet, thus emulsions and particle plugging are eliminated. If a mutual solvent is employed, it is preferably selected from the group which includes, but is not limited to, lower alcohols such as methanol, ethanol, 1-propanol, 2-propanol, and the like, glycols such as ethylene glycol, propylene glycol, diethylene glycol, dipropylene glycol, polyethylene glycol, 10 polypropylene glycol, polyethylene glycol-polyethylene glycol block copolymers, and the like, and glycol ethers such as 2-methoxyethanol, diethylene glycol monomethyl ether, and the like, substantially water/oil-soluble esters, such as one or more C2-esters through C10-esters, and substantially water/oil-soluble ketones, such as one or more C2-C10 ketones, wherein substantially soluble means soluble 15 in more than 1 gram per liter, preferably more than 10 grams per liter, even more preferably more than 100 grams per liter, most preferably more than 200 grams per liter. The mutual solvent is preferably present in an amount of 1 to 50 wt% on total fluid. In one embodiment of the process of the present invention, the mutual solvent is not added to the same fluid as the treatment fluid containing GLDA but 20 introduced into the subterranean formation in or as a preflush fluid.

A preferred water/oil-soluble ketone is methyl ethyl ketone.

A preferred substantially water/oil-soluble alcohol is methanol.

A preferred substantially water/oil-soluble ester is methyl acetate.

25 A more preferred mutual solvent is ethylene glycol monobutyl ether, generally known as EGMBE

The amount of glycol solvent in the solution is preferably about 1 wt% to about 10 wt%, more preferably between 3 and 5 wt%. More preferably, the ketone solvent

may be present in an amount from 40 wt% to about 50 wt%; the substantially water-soluble alcohol may be present in an amount within the range of about 20 wt% to about 30 wt%; and the substantially water/oil-soluble ester may be present in an amount within the range of about 20 wt% to about 30 wt%, each amount  
5 being based upon the total weight of the solvent in the fluid.

Further surfactants that can be added to the fluid or during the process of the invention can be any surfactant known in the art and can be nonionic, cationic, anionic, zwitterionic. Preferably, the surfactant is nonionic or anionic. Even more  
10 preferably, the surfactant is anionic.

The nonionic surfactant of the present composition is preferably selected from the group consisting of alkanolamides, alkoxyated alcohols, alkoxyated amines, amine oxides, alkoxyated amides, alkoxyated fatty acids, alkoxyated fatty amines, alkoxyated alkyl amines (e.g., cocoalkyl amine ethoxylate), alkyl phenyl  
15 polyethoxylates, lecithin, hydroxylated lecithin, fatty acid esters, glycerol esters and their ethoxylates, glycol esters and their ethoxylates, esters of propylene glycol, sorbitan, ethoxylated sorbitan, polyglycosides and the like, and mixtures thereof. Alkoxyated alcohols, preferably ethoxylated alcohols, optionally in combination  
20 with (alkyl) polyglycosides, are the most preferred nonionic surfactants.

The anionic (sometimes zwitterionic, as two charges are combined into one compound) surfactants may comprise any number of different compounds, including sulfonates, hydrolyzed keratin, sulfosuccinates, taurates, betaines,  
25 modified betaines, alkylamidobetaines (e.g., cocoamidopropyl betaine).

Examples of surfactants that are also foaming agents that may be utilized to foam and stabilize the treatment fluids of this invention include, but are not limited to, betaines, amine oxides, methyl ester sulfonates, alkylamidobetaines such as

cocoamidopropyl betaine, alpha-olefin sulfonate, trimethyl tallow ammonium chloride, C8 to C22 alkyl ethoxylate sulfates, and trimethyl coco ammonium chloride.

5 Suitable surfactants may be used in a liquid or powder form.

Where used, the surfactants may be present in the fluid in an amount sufficient to prevent incompatibility with formation fluids, other treatment fluids, or wellbore fluids at reservoir temperature.

10 In an embodiment where liquid surfactants are used, the surfactants are generally present in an amount in the range of from about 0.01% to about 5.0% by volume of the fluid.

In one embodiment, the liquid surfactants are present in an amount in the range of from about 0.1% to about 2.0% by volume of the fluid, more preferably between 0.1 and 1 volume%.

15 In embodiments where powdered surfactants are used, the surfactants may be present in an amount in the range of from about 0.001% to about 0.5% by weight of the fluid.

20 The antisludge agent can be chosen from the group of mineral and/or organic acids used to stimulate sandstone hydrocarbon-bearing formations. The function of the acid is to dissolve acid-soluble materials so as to clean or enlarge the flow channels of the formation leading to the wellbore, allowing more oil and/or gas to flow to the wellbore.

25 Problems are caused by the interaction of the (usually concentrated, 20-28%) stimulation acid and certain crude oils (e.g. asphaltic oils) in the formation to form sludge. Interaction studies between sludging crude oils and the introduced acid show that permanent rigid solids are formed at the acid-oil interface when the

aqueous phase is below a pH of about 4. No films are observed for non-sludging crudes with acid.

5 These sludges are usually reaction products formed between the acid and the high molecular weight hydrocarbons such as asphaltenes, resins, etc.

Methods for preventing or controlling sludge formation with its attendant flow problems during the acidization of crude-containing formations include adding "anti-sludge" agents to prevent or reduce the rate of formation of crude oil sludge, which anti-sludge agents stabilize the acid-oil emulsion and include alkyl phenols, 10 fatty acids, and anionic surfactants. Frequently used as the surfactant is a blend of a sulfonic acid derivative and a dispersing surfactant in a solvent. Such a blend generally has dodecyl benzene sulfonic acid (DDBSA) or a salt thereof as the major dispersant, i.e. anti-sludge, component.

15 The carrier fluids are aqueous solutions which in certain embodiments contain a Bronsted acid to keep the pH in the desired range and/or contain an inorganic salt, preferably NaCl or KCl.

Corrosion inhibitors may be selected from the group of amine and quaternary ammonium compounds and sulfur compounds. Examples are diethyl thiourea 20 (DETU), which is suitable up to 185°F (about 85°C), alkyl pyridinium or quinolinium salt, such as dodecyl pyridinium bromide (DDPB), and sulfur compounds, such as thiourea or ammonium thiocyanate, which are suitable for the range 203-302°F (about 95-150°C), benzotriazole (BZT), benzimidazole (BZI), dibutyl thiourea, a 25 proprietary inhibitor called TIA, and alkyl pyridines.

In general, the most successful inhibitor formulations for organic acids and chelating agents contain amines, reduced sulfur compounds or combinations of a nitrogen compound (amines, quats or polyfunctional compounds) and a sulfur

compound. The amount of corrosion inhibitor is preferably between 0.1 and 2 volume%, more preferably between 0.1 and 1 volume% on total fluid.

5 One or more corrosion inhibitor intensifiers may be added, such as for example formic acid, potassium iodide, antimony chloride, or copper iodide.

One or more salts may be used as rheology modifiers to modify the rheological properties (e.g., viscosity and elastic properties) of the treatment fluids. These salts may be organic or inorganic.

10 Examples of suitable organic salts include, but are not limited to, aromatic sulfonates and carboxylates (such as p-toluene sulfonate and naphthalene sulfonate), hydroxynaphthalene carboxylates, salicylate, phthalate, chlorobenzoic acid, phthalic acid, 5-hydroxy-1-naphthoic acid, 6-hydroxy-1-naphthoic acid, 7-  
15 hydroxy-1-naphthoic acid, 1-hydroxy-2-naphthoic acid, 3-hydroxy-2-naphthoic acid, 5-hydroxy-2-naphthoic acid, 7-hydroxy-2-naphthoic acid, 1,3-dihydroxy-2-naphthoic acid, 3,4-dichlorobenzoate, trimethyl ammonium hydrochloride, and tetramethyl ammonium chloride.

Examples of suitable inorganic salts include water-soluble potassium, sodium, and ammonium halide salts (such as potassium chloride and ammonium chloride),  
20 calcium chloride, calcium bromide, magnesium chloride, sodium formate, potassium formate, cesium formate, and zinc halide salts. A mixture of salts may also be used, but it should be noted that preferably chloride salts are mixed with chloride salts, bromide salts with bromide salts, and formate salts with formate salts.

25

Wetting agents that may be suitable for use in this invention include crude tall oil, oxidized crude tall oil, surfactants, organic phosphate esters, modified imidazolines and amidoamines, alkyl aromatic sulfates and sulfonates, and the like, and

combinations or derivatives of these and similar such compounds that should be well known to one of skill in the art.

The foaming gas may be air, nitrogen or carbon dioxide. Nitrogen is preferred.

5

Gelling agents in a preferred embodiment are polymeric gelling agents.

Examples of commonly used polymeric gelling agents include, but are not limited to, biopolymers, polysaccharides such as guar gums and derivatives thereof, cellulose derivatives, synthetic polymers like polyacrylamides and viscoelastic surfactants, and the like. These gelling agents, when hydrated and at a sufficient concentration, are capable of forming a viscous solution.

When used to make an aqueous-based treatment fluid, a gelling agent is combined with an aqueous fluid and the soluble portions of the gelling agent are dissolved in the aqueous fluid, thereby increasing the viscosity of the fluid.

15

Viscosifiers may include natural polymers and derivatives such as xantham gum and hydroxyethyl cellulose (HEC) or synthetic polymers and oligomers such as poly(ethylene glycol) [PEG], poly(diallyl amine), poly(acrylamide), poly(aminomethyl propyl sulfonate) [AMPS polymer], poly(acrylonitrile), poly(vinyl acetate), poly(vinyl alcohol), poly(vinyl amine), poly(vinyl sulfonate), poly(styryl sulfonate), poly(acrylate), poly(methyl acrylate), poly(methacrylate), poly(methyl methacrylate), poly(vinyl pyrrolidone), poly(vinyl lactam), and co-, ter-, and quater-polymers of the following (co-)monomers: ethylene, butadiene, isoprene, styrene, divinyl benzene, divinyl amine, 1,4-pentadiene-3-one (divinyl ketone), 1,6-heptadiene-4-one (diallyl ketone), diallyl amine, ethylene glycol, acrylamide, AMPS, acrylonitrile, vinyl acetate, vinyl alcohol, vinyl amine, vinyl sulfonate, styryl sulfonate, acrylate, methyl acrylate, methacrylate, methyl methacrylate, vinyl pyrrolidone, and vinyl lactam. Yet other viscosifiers include clay-based viscosifiers, especially laponite and other small fibrous clays such as the polygorskites

25

(attapulgite and sepiolite). When using polymer-containing viscosifiers, the viscosifiers may be used in an amount of up to 5% by weight of the fluid.

5 Examples of suitable brines include calcium bromide brines, zinc bromide brines, calcium chloride brines, sodium chloride brines, sodium bromide brines, potassium bromide brines, potassium chloride brines, sodium nitrate brines, sodium formate brines, potassium formate brines, cesium formate brines, magnesium chloride brines, sodium sulfate, potassium nitrate, and the like. A mixture of salts may also be used in the brines, but it should be noted that preferably chloride salts are  
10 mixed with chloride salts, bromide salts with bromide salts, and formate salts with formate salts.

The brine chosen should be compatible with the formation and should have a sufficient density to provide the appropriate degree of well control.

15 Additional salts may be added to a water source, e.g., to provide a brine, and a resulting treatment fluid, in order to have a desired density.

The amount of salt to be added should be the amount necessary for formation compatibility, such as the amount necessary for the stability of clay minerals, taking into consideration the crystallization temperature of the brine, e.g., the temperature  
20 at which the salt precipitates from the brine as the temperature drops.

Preferred suitable brines may include seawater and/or formation brines.

Salts may optionally be included in the fluids of the present invention for many purposes, including for reasons related to compatibility of the fluid with the  
25 formation and the formation fluids.

To determine whether a salt may be beneficially used for compatibility purposes, a compatibility test may be performed to identify potential compatibility problems.

From such tests, one of ordinary skill in the art will, with the benefit of this disclosure, be able to determine whether a salt should be included in a treatment

fluid of the present invention.

Suitable salts include, but are not limited to, calcium chloride, sodium chloride, magnesium chloride, potassium chloride, sodium bromide, potassium bromide, ammonium chloride, sodium formate, potassium formate, cesium formate, and the like. A mixture of salts may also be used, but it should be noted that preferably  
5 chloride salts are mixed with chloride salts, bromide salts with bromide salts, and formate salts with formate salts.

The amount of salt to be added should be the amount necessary for the required density for formation compatibility, such as the amount necessary for the stability of  
10 clay minerals, taking into consideration the crystallization temperature of the brine, e.g., the temperature at which the salt precipitates from the brine as the temperature drops.

Salt may also be included to increase the viscosity of the fluid and stabilize it, particularly at temperatures above 180°F (about 82°C).

15

Examples of suitable pH control additives which may optionally be included in the treatment fluids of the present invention are acid compositions and/or bases.

A pH control additive may be necessary to maintain the pH of the treatment fluid at a desired level, e.g., to improve the effectiveness of certain breakers and to reduce  
20 corrosion on any metal present in the wellbore or formation, etc.

One of ordinary skill in the art will, with the benefit of this disclosure, be able to recognize a suitable pH for a particular application.

In one embodiment, the pH control additive may be an acid composition.

Examples of suitable acid compositions may comprise an acid, an acid-generating  
25 compound, and combinations thereof.

Any known acid may be suitable for use with the treatment fluids of the present invention.

Examples of acids that may be suitable for use in the present invention include, but are not limited to, organic acids (e.g., formic acids, acetic acids, carbonic acids,

citric acids, glycolic acids, lactic acids, ethylene diamine tetraacetic acid ("EDTA"), hydroxyethyl ethylene diamine triacetic acid ("HEDTA"), and the like), inorganic acids (e.g., hydrochloric acid, hydrofluoric acid, phosphonic acid, p-toluene sulfonic acid, and the like), and combinations thereof. Preferred acids are HCl and organic acids.

5 Examples of acid-generating compounds that may be suitable for use in the present invention include, but are not limited to, esters, aliphatic polyesters, ortho esters, which may also be known as ortho ethers, poly(ortho esters), which may also be known as poly(ortho ethers), poly(lactides), poly(glycolides), poly(epsilon-caprolactones), poly(hydroxybutyrates), poly(anhydrides), or copolymers thereof.

Derivatives and combinations also may be suitable.

The term "copolymer" as used herein is not limited to the combination of two polymers, but includes any combination of polymers, e.g., terpolymers and the like. Other suitable acid-generating compounds include: esters including, but not limited to, ethylene glycol monoformate, ethylene glycol diformate, diethylene glycol diformate, glyceryl monoformate, glyceryl diformate, glyceryl triformate, methylene glycol diformate, and formate esters of pentaerythritol.

The pH control additive also may comprise a base to elevate the pH of the fluid.

20 Generally, a base may be used to elevate the pH of the mixture to greater than or equal to about 7.

Having the pH level at or above 7 may have a positive effect on a chosen breaker being used and may also inhibit the corrosion of any metals present in the wellbore or formation, such as tubing, screens, etc.

25 In addition, having a pH greater than 7 may also impart greater stability to the viscosity of the treatment fluid, thereby enhancing the length of time that viscosity can be maintained.

This could be beneficial in certain uses, such as in longer-term well control and in diverting.

Any known base that is compatible with the gelling agents of the present invention can be used in the fluids of the present invention.

Examples of suitable bases include, but are not limited to, sodium hydroxide, potassium carbonate, potassium hydroxide, sodium carbonate, and sodium bicarbonate.

One of ordinary skill in the art will, with the benefit of this disclosure, recognize the suitable bases that may be used to achieve a desired pH elevation.

In some embodiments, the treatment fluid may optionally comprise a further chelating agent.

When added to the treatment fluids of the present invention, the chelating agent may chelate any dissolved iron (or other divalent or trivalent cations) that may be present in the aqueous fluid and prevent any undesired reactions being caused.

Such chelating agents may e.g. prevent such ions from crosslinking the gelling agent molecules.

Such crosslinking may be problematic because, inter alia, it may cause filtration problems, injection problems and/or again cause permeability problems.

Any suitable chelating agent may be used with the present invention.

Examples of suitable chelating agents include, but are not limited to, citric acid, nitrilotriacetic acid ("NTA"), any form of ethylene diamine tetraacetic acid ("EDTA"), hydroxyethyl ethylene diamine triacetic acid ("HEDTA"), diethylene triamine pentaacetic acid ("DTPA"), propylene diamine tetraacetic acid ("PDTA"), ethylene diamine-N,N"-di(hydroxyphenyl acetic) acid ("EDDHA"), ethylene diamine-N,N"-di(hydroxy-methylphenyl acetic) acid ("EDDHMA"), ethanol diglycine ("EDG"), trans-1,2-cyclohexylene dinitrilotetraacetic acid ("CDTA"), glucoheptonic acid, gluconic acid, sodium citrate, phosphonic acid, salts thereof, and the like.

In some embodiments, the chelating agent may be a sodium or potassium salt.

Generally, the chelating agent may be present in an amount sufficient to prevent undesired side effects of divalent or trivalent cations that may be present, and thus

also functions as a scale inhibitor.

One of ordinary skill in the art will, with the benefit of this disclosure, be able to determine the proper concentration of a chelating agent for a particular application.

5 In some embodiments, the fluids of the present invention and the fluids in the kit of parts of the invention may contain bactericides or biocides, inter alia, to protect the subterranean formation as well as the fluid from attack by bacteria. Such attacks can be problematic because they may lower the viscosity of the fluid, resulting in poorer performance, such as poorer sand suspension properties, for example.

10 Any bactericides known in the art are suitable. Biocides and bactericides protecting against bacteria that may attack GLDA or sulfates are preferred.

An artisan of ordinary skill will, with the benefit of this disclosure, be able to identify a suitable bactericide and the proper concentration of such bactericide for a given  
15 application.

Examples of suitable bactericides and/or biocides include, but are not limited to, phenoxyethanol, ethylhexyl glycerine, benzyl alcohol, methyl chlorisothiazolinone, methyl isothiazolinone, methyl paraben, ethyl paraben, propylene glycol, bronopol, benzoic acid, imidazolidinyl urea, a 2,2-dibromo-3-nitrilopropionamide, and a 2-  
20 bromo-2-nitro-1,3-propane diol. In one embodiment, the bactericides are present in the fluid in an amount in the range of from about 0.001% to about 1.0% by weight of the fluid.

Fluids of the present invention also may comprise breakers capable of reducing the  
25 viscosity of the fluid at a desired time.

Examples of such suitable breakers for fluids of the present invention include, but are not limited to, oxidizing agents such as sodium chlorites, sodium bromate, hypochlorites, perborate, persulfates, and peroxides, including organic peroxides. Other suitable breakers include, but are not limited to, suitable acids and peroxide

breakers, triethanol amine, as well as enzymes that may be effective in breaking. The breakers can be used as is or encapsulated.

Examples of suitable acids include, but are not limited to, hydrochloric acid, hydrofluoric acid, formic acid, acetic acid, citric acid, lactic acid, glycolic acid, etc.

- 5 A breaker may be included in a treatment fluid of the present invention in an amount and form sufficient to achieve the desired viscosity reduction at a desired time.

The breaker may be formulated to provide a delayed break, if desired.

- 10 The fluids of the present invention also may comprise suitable fluid loss additives. Such fluid loss additives may be particularly useful when a fluid of the present invention is used in a fracturing application or in a fluid used to seal a formation against invasion of fluid from the wellbore.

- Any fluid loss agent that is compatible with the fluids of the present invention is  
15 suitable for use in the present invention.

Examples include, but are not limited to, starches, silica flour, gas bubbles (energized fluid or foam), benzoic acid, soaps, resin particulates, relative permeability modifiers, degradable gel particulates, diesel or other hydrocarbons dispersed in fluid, and other immiscible fluids.

- 20 Another example of a suitable fluid loss additive is one that comprises a degradable material.

- Suitable examples of degradable materials include polysaccharides such as dextran or cellulose; chitins; chitosans; proteins; aliphatic polyesters; poly(lactides); poly(glycolides); poly(glycolide-co-lactides); poly(epsilon-caprolactones); poly(3-  
25 hydroxybutyrates); poly(3-hydroxybutyrate-co-hydroxyvalerates); poly(anhydrides); aliphatic poly(carbonates); poly(ortho esters); poly(amino acids); poly(ethylene oxides); poly(phosphazenes); derivatives thereof; or combinations thereof.

In some embodiments, a fluid loss additive may be included in an amount of about 5 to about 2,000 lbs/Mgal (about 600 to about 240,000 g/Mliter) of the fluid.

In some embodiments, the fluid loss additive may be included in an amount from about 10 to about 50 lbs/Mgal (about 1,200 to about 6,000 g/Mliter) of the fluid.

In certain embodiments, a stabilizer may optionally be included in the fluids of the present invention.

It may be particularly advantageous to include a stabilizer if a chosen fluid is experiencing viscosity degradation.

One example of a situation where a stabilizer might be beneficial is where the BHT (bottom hole temperature) of the wellbore is sufficient to break the fluid by itself without the use of a breaker.

Suitable stabilizers include, but are not limited to, sodium thiosulfate, methanol, and salts such as formate salts and potassium or sodium chloride.

Such stabilizers may be useful when the fluids of the present invention are utilized in a subterranean formation having a temperature above about 200°F (about 93°C). If included, a stabilizer may be added in an amount of from about 1 to about 50 lbs/Mgal (about 120 to about 6,000 g/Mliter) of fluid.

Scale inhibitors may be added to the fluids of the present invention, for example, when such fluids are not particularly compatible with the formation waters in the formation in which they are used.

These scale inhibitors may include water-soluble organic molecules with carboxylic acid, aspartic acid, maleic acids, sulfonic acids, phosphonic acid, and phosphate ester groups including copolymers, ter-polymers, grafted copolymers, and derivatives thereof.

Examples of such compounds include aliphatic phosphonic acids such as diethylene triamine penta (methylene phosphonate) and polymeric species such as polyvinyl sulfonate.

The scale inhibitor may be in the form of the free acid but is preferably in the form of mono- and polyvalent cation salts such as Na, K, Al, Fe, Ca, Mg, NH<sub>4</sub>. Any scale

inhibitor that is compatible with the fluid in which it will be used is suitable for use in the present invention.

Suitable amounts of scale inhibitors that may be included in the fluids of the present invention may range from about 0.05 to 100 gallons per about 1,000  
5 gallons (i.e. 0.05 to 100 liters per 1,000 liters) of the fluid.

Any particulates such as proppant, gravel that are commonly used in subterranean operations in sandstone formations may be used in the present invention (e.g., sand, gravel, bauxite, ceramic materials, glass materials, wood, plant and  
10 vegetable matter, nut hulls, walnut hulls, cotton seed hulls, cement, fly ash, fibrous materials, composite particulates, hollow spheres and/or porous proppant).

It should be understood that the term "particulate" as used in this disclosure includes all known shapes of materials including substantially spherical materials, oblong, fibre-like, ellipsoid, rod-like, polygonal materials (such as cubic materials),  
15 mixtures thereof, derivatives thereof, and the like.

In some embodiments, coated particulates may be suitable for use in the treatment fluids of the present invention. It should be noted that many particulates also act as diverting agents. Further diverting agents are viscoelastic surfactants and in-situ  
20 gelled fluids.

Oxygen scavengers may be needed to enhance the thermal stability of the GLDA. Examples thereof are sulfites and ethorbates.

25 Friction reducers can be added in an amount of up to 0.2 vol%. Suitable examples are viscoelastic surfactants and enlarged molecular weight polymers.

Crosslinkers can be chosen from the group of multivalent cations that can crosslink polymers such as Al, Fe, B, Ti, Cr, and Zr, or organic crosslinkers such as polyethylene amides, formaldehyde.

- 5 Sulfide scavengers can suitably be an aldehyde or ketone.

Viscoelastic surfactants can be chosen from the group of amine oxides or carboxyl butane based surfactants.

- 10 In the process of the invention the fluid can be flooded back from the formation. Even more preferably, (part of) the solution is recycled.

It must be realized, however, that GLDA, being biodegradable chelating agents, will not completely flow back and therefore is not recyclable to the full extent.

15

The invention is further illustrated by the Examples below.

### Examples

- 20 General procedure for core flooding experiments

Figure 1 shows a schematic diagram for the core flooding apparatus. For each core flooding test a new piece of core with a diameter of 1.5 inches and a length of 6 or 20 inches was used. The cores were placed in the coreholder and shrinkable seals were used to prevent any leakage between the holder and the core.

- 25 An Enerpac hand hydraulic pump was used to pump the brine or test fluid through the core and to apply the required overburden pressure. The temperature of the preheated test fluids was controlled by a compact bench top CSC32 series, with a 0.1° resolution and an accuracy of  $\pm 0.25\%$  full scale  $\pm 1^\circ\text{C}$ . It uses a type K thermocouple and two Outputs (5 A 120 Vac SSR). A back pressure of 1,000 psi  
30 was applied to keep CO<sub>2</sub> in solution.

The back pressure was controlled by a Mity-Mite back pressure regulator model S91-W and kept constant at 300 - 400 psi less than the overburden pressure. The pressure drop across the core was measured with a set of FOXBORO differential pressure transducers, models IDP10-A26E21F-M1, and monitored by lab view software. There were two gauges installed with ranges of 0-300 psi and 0-1500 psi, respectively.

Before running a core flooding test, the core was first dried in an oven at 300°F and weighted. Subsequently the core was saturated with 5 wt% NaCl brine at a 2,000 psi overburden pressure and 1,000 psi back pressure. The pore volume was calculated from the difference in weight of the dried and saturated core divided by the brine density.

The core permeability before and after the treatment was calculated from the pressure drop using Darcy's equation for laminar, linear, and steady-state flow of Newtonian fluids in porous media:

$$K = (122.81q\mu L)/(\Delta p D^2)$$

where K is the core permeability, md, q is the flow rate, cm<sup>3</sup>/min.,  $\mu$  is the fluid viscosity, cP, L is the core length, in.,  $\Delta p$  is the pressure drop across the core, psi, and D is the core diameter, in.

Prior to the core flooding tests the cores were pre-heated to the required test temperature for at least 3 hours.

In the Examples solutions of 15 wt% HCl and of HEDTA and GLDA (both 0.6 M and having a pH of about 4 or 7) were investigated on Berea and/or Bandera sandstone cores to determine the functionality of those chelating agents with the Berea and Bandera sandstone core at 150 (about 66°C) and 300°F (about 149°C) and 5 cm<sup>3</sup>/min. HEDTA and GLDA were obtained from AkzoNobel Functional Chemicals BV. MGDA was obtained from BASF Corporation.

Below Table 1 indicates the mineral composition of both sandstone formations.

<b>Table 1—Mineral Composition of Berea and Bandera Sandstone Cores</b>		
<b><u>Mineral</u></b>	<b><u>Berea</u></b>	<b><u>Bandera</u></b>
Quartz	86	57
Dolomite	1	16
Calcite	2	--
Feldspar	3	--
Kaolinite	5	3
Illite	1	10
Chlorite	2	1
Plagioclase	--	12

Example 1

5 Stimulating Berea sandstone with HCl, GLDA, MGDA, and HEDTA solutions

Figure 2 shows the normalized pressure drop across the core for 0.6M HEDTA (pH = 4) and 0.6M GLDA (pH = 4) at 300°F (about 149°C) and 5 cm<sup>3</sup>/min using Berea sandstone cores. Both chelating agents have almost the same trend. After injecting 2 PV (pore volumes), GLDA was more compatible than HEDTA (it is suspected that there was some fines migration in this phase using HEDTA), and after injecting 5 PV, the normalized pressure drop was the same for the two chelating agents. On the basis of these results it can be concluded that both HEDTA and GLDA at pH 4 are compatible with the Berea sandstone core.

15

Figure 3 shows the permeability ratio (final core permeability/initial core permeability) for 15 wt% HCl, and for 0.6M HEDTA, 0.6 M MGDA, 0.6M GLDA at pH 4 in Berea sandstone. The permeability ratio was 1.70 for GLDA, 1.25 for

HEDTA, 0.9 for MGDA, and 0.9 for HCl, showing the improved ability of GLDA over HEDTA, MGDA, and HCl in stimulating Berea sandstone cores at low pH.

### Example 2

5

Figure 4 compares the permeability ratio of 0.6 M GLDA and 0.6 M HEDTA under identical conditions in Berea sandstone. Irrespective of the conditions (pH=3.8 or 6.8 and temperature=150 or 300°F), the permeability ratio after stimulation with GLDA is significantly better than after stimulation with HEDTA. Analyses of the effluent samples showed the main difference between HEDTA and GLDA is the amount of magnesium and aluminium that is dissolved. At pH=3.8 and 150°F GLDA dissolves over 2 times the amount of aluminium compared to HEDTA and over 3 times as much magnesium. This indicates that GLDA not only acts on the calcium carbonate inside the sandstone core, but also on the dolomite and, surprisingly, on the clays (alumino silicates) as well. In contrast to HCl, the interaction of GLDA with the clays does not lead to a reduction of the permeability, but to improved permeability.

15

### Example 3

20

Figure 5 shows the permeability ratio for the Berea sandstone cores treated with 0.4M, 0.6M, and 0.9M GLDA/pH 4 at 5 cm<sup>3</sup>/min and 300°F. GLDA at 0.6M concentration almost gave the same permeability enhancement as that at 0.9M concentration. Since the Berea sandstone cores do not have much carbonate to dissolve (3 wt% calcite and dolomite), there is no need to increase the concentration to 0.9M. At 0.4M concentration, GLDA gave less permeability enhancement compared to that at 0.6M, because it has low dissolving capacity at that low concentration.

25

#### Example 4

Figure 6 shows the permeability ratio for the Berea sandstone cores treated by 0.4M, 0.6M, and 0.9M GLDA/pH 11 at 5 cm<sup>3</sup>/min and 300°F. Similar results were  
5 obtained as in the case of GLDA at pH 4, increasing the concentration of GLDA/pH 11 from 0.4 to 0.6M gave the almost the same enhancement in permeability ratio.

#### Example 5

Stimulating Bandera Sandstone Cores with HCl, HEDTA, MGDA and GLDA  
10 solutions

Fig. 7 shows the permeability ratio (final core permeability/initial core permeability) for 15 wt% HCl, and for 0.6M HEDTA, 0.6M MGDA, and 0.6M GLDA at pH 4 in Bandera sandstone. The permeability ratio for GLDA was 1.96, 1.17 for HEDTA, 1  
15 for MGDA, and only 0.18 for HCl. GLDA clearly dissolved more calcium than HEDTA or MGDA at pH 4 and improved the Bandera core permeability more than HEDTA or MGDA. HCl was clearly found to cause damage to the Bandera sandstone core due to the clay appearing unstable in HCl at the reaction conditions.

20

GLDA at low pH value (4) thus performed better than HEDTA or MGDA in both Berea and Bandera sandstone cores at 300°F (about 149°C). GLDA at pH 4 improved the core permeability 1.4 times more than HEDTA did with Berea sandstone cores, and 1.7 times more in the case of Bandera sandstone cores,  
25 while MGDA did not improve the permeability in any of these cores, which indicates that GLDA is a more suitable chelating agent for stimulating sandstone cores than HEDTA or MGDA. The permeability results found for HCl were even worse than those for HEDTA or MGDA, and GLDA performed much better in both cores than HCl.

Example 6

A beaker glass was filled with 400 ml of a solution of a chelating agent as indicated in Table 2 below, i.e. about 20 wt% of the monosodium salt of about pH 3.6. This  
5 beaker was placed in a Burton Corblin 1 liter autoclave.

The space between the beaker and the autoclave was filled with sand. Two clean steel coupons of Cr13 (UNS S41000 steel) were attached to the autoclave lid with a PTFE cord. The coupons had been cleaned with isopropyl alcohol and weighted before the test. The autoclave was purged three times with a small amount of N<sub>2</sub>.  
10 Subsequently the heating was started or, in the case of high-pressure experiments, the pressure was first set to c. 1,000 psi with N<sub>2</sub>. The 6-hour timer was started directly after reaching a temperature of 149°C. After 6 hours at 149°C the autoclave was cooled quickly with cold tap water in c. 10 minutes to <60°C. After cooling to <60°C the autoclave was depressurized and the steel coupons were  
15 removed from the chelate solution. The coupons were flushed with a small amount of water and isopropyl alcohol to clean them. The coupons were weighted again and the chelate solution was retained.

Table 2: Acid/Chelate solutions:

20

Chelate	Active ingredient and Content	pH as such
GLDA	20.4 wt% GLDA-NaH <sub>3</sub>	3.51
HEDTA	22.1 wt% HEDTA-NaH <sub>2</sub>	3.67
MGDA	20.5 wt% MGDA-NaH <sub>2</sub>	3.80

In the scheme of Table 3 the results of the corrosion study of 13Cr steel coupons (UNS S41000) are shown for the different solutions.

25

Table 3: Corrosion data for different chelate or acid solutions

Test	Chelate	pH	Temp. °C	Pressure (PSI)	Assay after corrosion test	6Hrs corrosion lbs/sq.ft
#01	GLDA	3.5	160	-	18.4wt% as GLDA-NaH <sub>3</sub>	0.0013
#02	GLDA	3.5	149	-	20.1wt% as GLDA-NaH <sub>3</sub>	0.0008
#03	HEDTA	3.7	149	-	24.4 wt% as HEDTA-NaH <sub>2</sub>	0.3228
#04	GLDA	3.5	149	>1000	20.1wt% as GLDA-NaH <sub>3</sub>	0.0009
#05	HEDTA	3.7	149	>1000	16.0wt% as HEDTA-NaH <sub>2</sub>	0.5124
#06	MGDA	3.6	149	>1000	22.7wt% as MGDA-NaH <sub>2</sub>	0.0878

The corrosion rates of HEDTA (pH 3.7) at 149°C and pressure 1,000 psi are significantly higher than of MGDA (pH 3.8) and much higher compared to GLDA (pH 3.5). The corrosion rates of both HEDTA (pH 3.7) and MGDA (pH 3.8) at 149°C and pressure 1,000 psi are higher than the generally accepted limit value in the oil and gas industry of 0.05 lbs/sq.ft (6-hour test period), which means that they will need a corrosion inhibitor for use in this industry. As MGDA is significantly better than HEDTA, it will require a much decreased amount of corrosion inhibitor for acceptable use in the above applications when used in line with the conditions of this Example. The 6-hour corrosion of GLDA for 13Cr steel (stainless steel S410, UNS 41000) at 149°C (300°F) is well below the generally accepted limit value in the oil and gas industry of 0.05 lbs/sq.ft. It can thus be concluded that it is possible to use GLDA in this field without the need to add a corrosion inhibitor.

### Example 7

Corrosion tests with anionic surfactants and/or corrosion inhibitors were performed according to the method described in Example 6. The surfactant, Witconate NAS-8, was selected from the group of anionic water-wetting surfactants. Witconate NAS-8 consists of 36% 1-octanesulfonic acid, sodium salt, 60% water, and 4% sodium sulfate. Armohib 31 represents a group of widely used corrosion inhibitors for the oil and gas industry and consists of alkoxyated fatty amine salts, alkoxyated organic acid, and N,N'-dibutyl thiourea, with 100% active ingredients. The corrosion inhibitor and anionic surfactant are available from AkzoNobel Surface Chemistry.

Figure 8 clearly shows the difference in corrosion behaviour between GLDA and HEDTA. Without additives GLDA shows no corrosion, whereas the corrosion rate of HEDTA is 0.2787 lbs/sq. ft, which is far above the generally accepted limit of 0.05 lbs/sq ft. Upon addition of the corrosion inhibitor the corrosion rates of HEDTA and GLDA are similar. Addition of an anionic surfactant leads to an increase in the corrosion rate to unacceptable rates of 0.7490 lbs/sq.ft for GLDA and 0.9592 lbs/sq.ft for HEDTA, indicating the corrosive character of this anionic surfactant itself. When both 0.5 vol% corrosion inhibitor and 6 vol% anionic surfactant are combined with HEDTA, the corrosion rate is reduced to 0.2207 lbs/sq. ft, which is still far too much. In contrast, the corrosion rate of GLDA decreases to acceptable rates under identical conditions, indicating the surprisingly gentle character of GLDA for this metallurgy. Even when the amount of corrosion inhibitor is increased to 1.5 vol%, the corrosion rate of HEDTA is still 3 times more than the acceptable rate. For GLDA the corrosion rate increases when the amount of corrosion inhibitor is increased to 1.5 vol%, indicating that the optimum corrosion inhibitor concentration under these conditions is around 0.5 vol%, which is significantly lower than the amount required for HEDTA.

### Example 8

To study the influence of the concentration of the anionic surfactant more corrosion experiments were performed according to the method described in example 6, with  
5 the corrosion inhibitor and anionic surfactant described in example 7. Figure 9 shows the comparison between the corrosion rates of HEDTA and GLDA with 1.5 vol% Armohib 31 and 2 to 6 vol% Witconate NAS-8. The amount of corrosion inhibitor was not optimized to achieve a corrosion rate below the acceptable limit of 0.05 lbs/sq. ft, but figure 9, clearly shows that GLDA is significantly less corrosive  
10 than HEDTA under identical conditions, especially at lower concentrations of surfactant. It was noted that the optimal concentration of corrosion inhibitor to get an acceptable corrosion rate would be higher than 1.5 vol% for HEDTA, but lower than 1.5 vol% for GLDA.

### 15 Example 9

The effect of saturating cores with oil was studied at 300°F. The cores were saturated first with water and then flushed with oil at 0.1 cm<sup>3</sup>/min, three pore volumes of oil were injected into the core, and after that the cores were left in the  
20 oven at 200°F for 24 hours and 15 days.

The core flooding experiments for the cores saturated with oil at  $S_{wi}$  were acquired by treating them with 0.6M GLDA at an injection rate of 2 cm<sup>3</sup>/min and 300°F. The Indiana core that was treated with 0.6M GLDA at pH 4 had a pore volume of 22 cm<sup>3</sup> and the residual water after flushing the core with oil was 5 cm<sup>3</sup> ( $S_{wi} = 0.227$ ).  
25 After soaking the core for 15 days and then flushing it with water at 300°F and 2 cm<sup>3</sup>/min only 6 cm<sup>3</sup> of the oil was recovered and the volume of residual oil was 10 cm<sup>3</sup> ( $S_{or} = 0.46$ ); this is a high fraction of the pore volume indicating an oil-wet core. The pore volume to breakthrough ( $PV_{bt}$ ) for the cores that were treated with GLDA was 3.65 PV for the water-saturated core, and 3.10 PV for the oil-saturated core.

The presence of oil in the core reduced the  $PV_{bt}$  for the cores treated with 0.6M GLDA at pH of 4, thus the GLDA performance was enhanced in the oil-saturated cores by creating a dominant wormhole. The enhancement in the performance can be attributed to the reduced contact area exposed to the reaction with GLDA. 2D  
5 CT scan images showed that the wormhole diameter was not affected by saturating the core with oil or water.

This Example demonstrates that GLDA is similarly compatible with oil as with water.

#### 10 Example 10

The effect of saturating cores with oil and water on the performance of GLDA was studied using the method described in example 9. A solution of 0.6M GLDA of pH 4 at 5 cm<sup>3</sup>/min and 300°F was used in the core flooding experiments. The  $PV_{bt}$  was 4  
15 PV in the water-saturated cores.

The core flooding experiments were repeated using oil-saturated cores with the same solution, giving again a  $PV_{bt}$  of 4 PV in the case of oil-saturated cores. This demonstrates again that GLDA is similarly compatible with oil as with water.

## Claims

1. Process for treating a sandstone formation comprising introducing a fluid containing glutamic acid N,N-diacetic acid or a salt thereof (GLDA) and having a pH of between 1 and 14 into the formation.
2. Process of claim 1, wherein the temperature is between 35 and 400°F (about 2 and 204°C).
3. Fluid suitable for use in the process of claim 1 or 2 having a pH between 1 and 14 containing 5 – 30 wt% on the basis of total fluid of glutamic acid N,N-diacetic acid or a salt thereof (GLDA), a corrosion inhibitor, a surfactant, and optionally a mutual solvent.
4. Fluid of claim 3 in addition containing one or more components from the group of anti-sludge agents, (water-wetting or emulsifying) surfactants, corrosion inhibitor intensifiers, foaming agents, viscosifiers, wetting agents, diverting agents, oxygen scavengers, carrier fluids, fluid loss additives, friction reducers, stabilizers, rheology modifiers, gelling agents, scale inhibitors, breakers, salts, brines, pH control additives, bactericides/biocides, particulates, crosslinkers, salt substitutes, relative permeability modifiers, sulfide scavengers, fibres, nanoparticles, and consolidating agents.
5. Fluid of claim 3 or 4, wherein the surfactant is a nonionic or anionic surfactant.
6. Fluid of any one of claims 3 to 5, wherein the surfactant is present in an amount of 0.1 to 2 volume% on total fluid.

7. Fluid of any one of claims 3 to 6, wherein the corrosion inhibitor is present in an amount of more than 0 up to 2 volume%, preferably 0.1 to 2 volume%, on total fluid.
- 5 8. Fluid of any one of claims 3 to 7 containing water as a solvent.
9. Fluid of any one of claims 3 to 8, wherein the mutual solvent is present in an amount of 1 to 50 wt% on total fluid.
- 10 10. Fluid of any one of claims 3 to 9 having a pH of 3.5 to 13.
11. Fluid of any one of claims 3 to 10, wherein the mutual solvent is selected from the group of lower alcohols such as methanol, ethanol, 1-propanol, 2-propanol, glycols such as ethylene glycol, propylene glycol, diethylene glycol, 15 dipropylene glycol, polyethylene glycol, polypropylene glycol, polyethylene glycol-polyethylene glycol block copolymers, glycol ethers such as 2-methoxyethanol, diethylene glycol monomethyl ether, substantially water/oil-soluble esters, such as C2-C10 esters, and substantially water/oil-soluble ketones, such C2-C10 ketones.
- 20 12. Kit of parts wherein one part contains a fluid containing glutamic acid N,N-diacetic acid or a salt thereof (GLDA), a corrosion inhibitor, and a surfactant, and the other part contains a mutual solvent, or wherein one part contains a fluid containing glutamic acid N,N-diacetic acid or a salt thereof (GLDA) and a 25 corrosion inhibitor and the other part contains a mutual solvent and a surfactant.
13. Kit of parts of claim 12, wherein the fluid in the one part has a pH between 1 and 14 and contains 5 – 30 wt% on the basis of total fluid of glutamic acid 30 N,N-diacetic acid or a salt thereof (GLDA).

14. Kit of parts of claim 12 or 13, wherein the fluid of either part in addition contains one or more components from the group of anti-sludge agents, (water-wetting or emulsifying) surfactants, corrosion inhibitor intensifiers, foaming agents, viscosifiers, wetting agents, diverting agents, oxygen scavengers, carrier fluids, fluid loss additives, friction reducers, stabilizers, rheology modifiers, gelling agents, scale inhibitors, breakers, salts, brines, pH control additives, bactericides/biocides, particulates, crosslinkers, salt substitutes, relative permeability modifiers, sulfide scavengers, fibres, nanoparticles, and consolidating agents.
15. Kit of parts of any one of claims 12 to 14, wherein the surfactant is a nonionic or anionic surfactant.
16. Kit of parts of any one of claims 12 to 15, wherein the surfactant is present in an amount of 0.1 to 2 volume% on total fluid in the part in which it is contained.
17. Kit of parts of any one of claims 12 to 16, wherein the corrosion inhibitor is present in an amount of 0.1 to 2 volume% on total fluid in the part in which it is contained.
18. Kit of parts of any one of claims 12 to 17 wherein the fluids in one or both parts contain water as a solvent.
19. Kit of parts of any one of claims 12 to 18, wherein the mutual solvent is present in an amount of 1 to 50 wt% on total fluid in the part in which it is contained.
20. Kit of parts of any one of claims 12 to 19, wherein the fluid in the one part has a pH of 3.5 to 13.

21. Kit of parts of any one of claims 12 to 20, wherein the mutual solvent is selected from the group of lower alcohols such as methanol, ethanol, 1-propanol, 2-propanol, glycols such as ethylene glycol, propylene glycol, diethylene glycol, dipropylene glycol, polyethylene glycol, polypropylene glycol, polyethylene glycol-polyethylene glycol block copolymers, glycol ethers such as 2-methoxyethanol, diethylene glycol monomethyl ether, substantially water/oil-soluble esters, such as C2-C10 esters, and substantially water/oil-soluble ketones, such C2-C10 ketones.

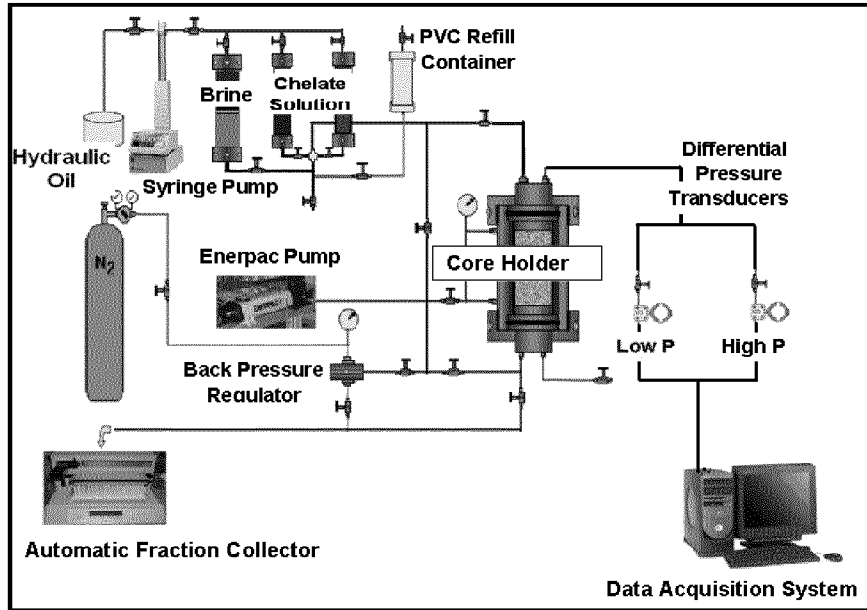


Fig. 1- Core flooding set-up.

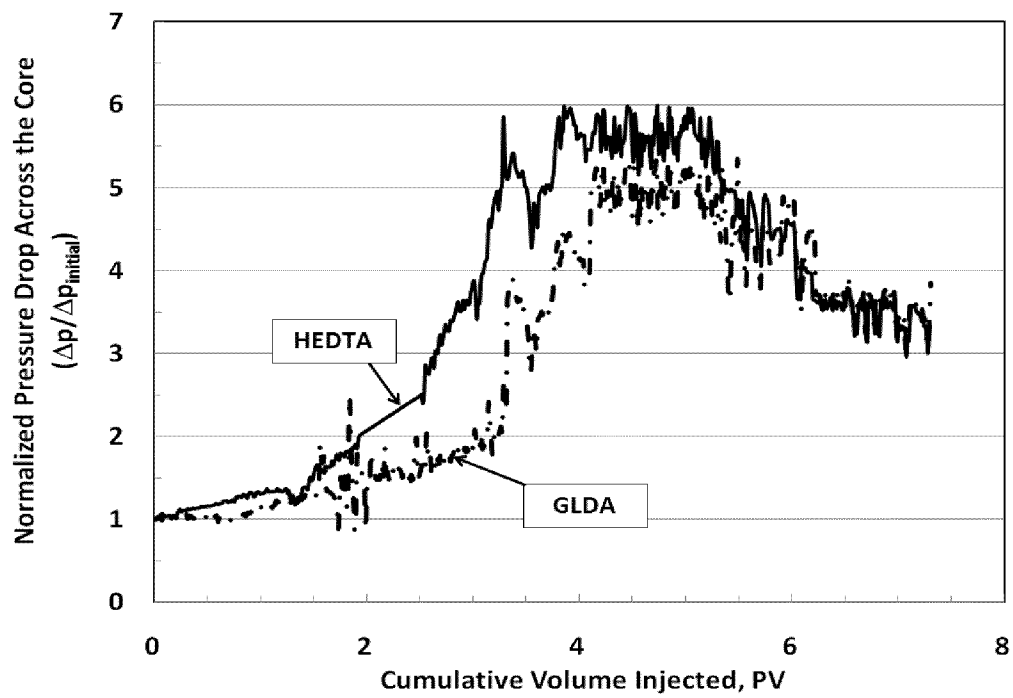


Fig. 2 - Pressure drop across the core during the core flooding experiment for 0.6M GLDA (pH = 4) and 0.6M HEDTA (pH = 4) at 300°F and 5 cm<sup>3</sup>/min using Berea sandstone cores.

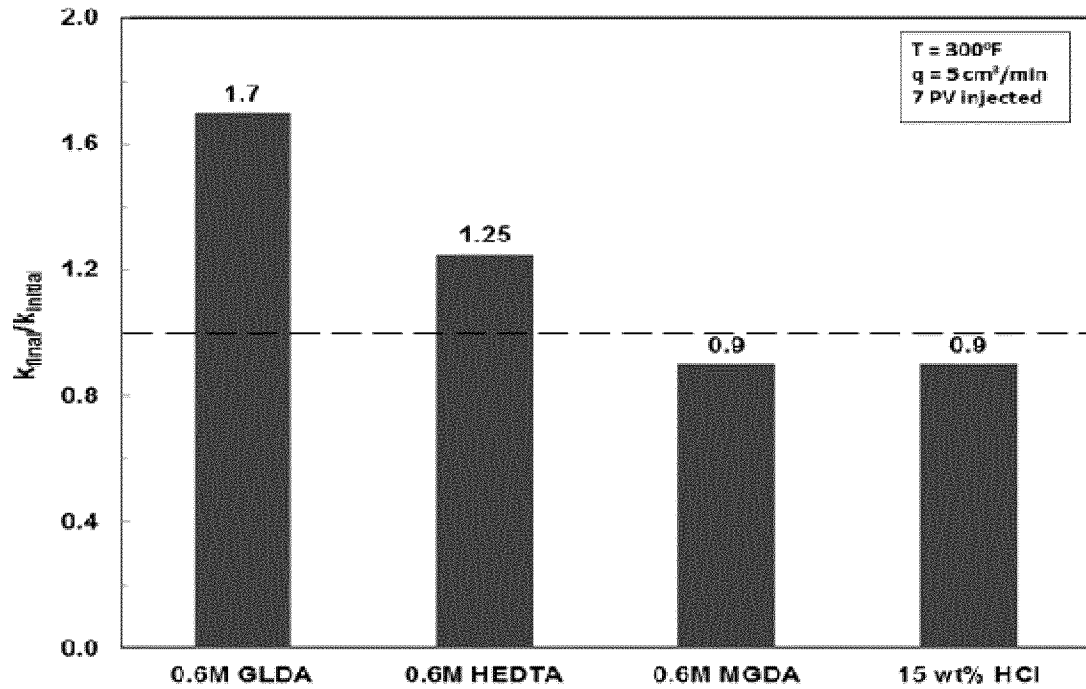


Fig. 3 - Permeability ratio for the Berea sandstone cores treated with 15 wt% HCl and 0.6M chelating agent (pH =4) at 300°F and 5 cm<sup>3</sup>/min.

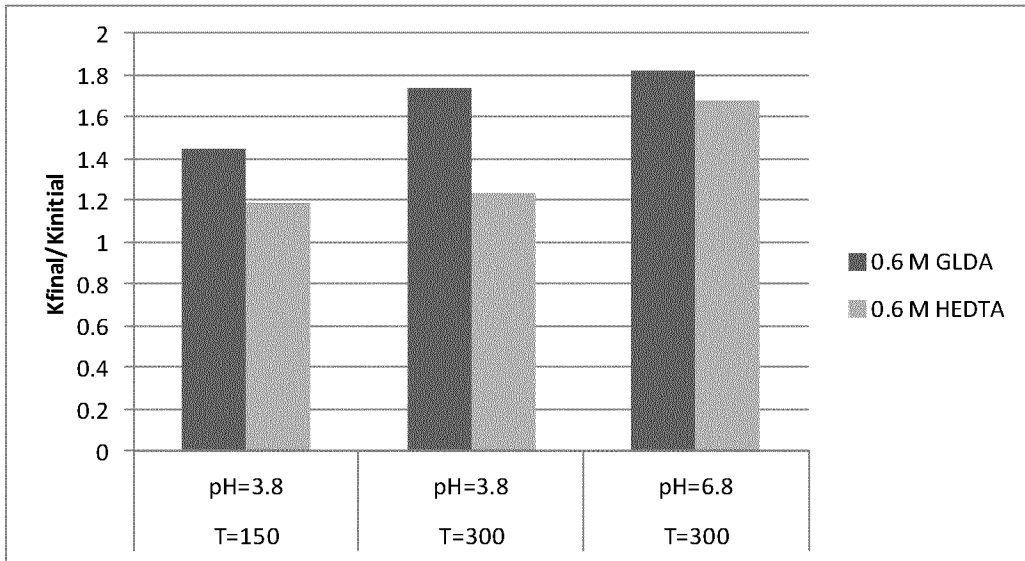


Fig. 4 - Permeability ratio for the Berea sandstone cores treated with 0.6M chelating agent at pH=3.8 or pH=6.8 and at 150 or 300°F and 5 cm<sup>3</sup>/min.

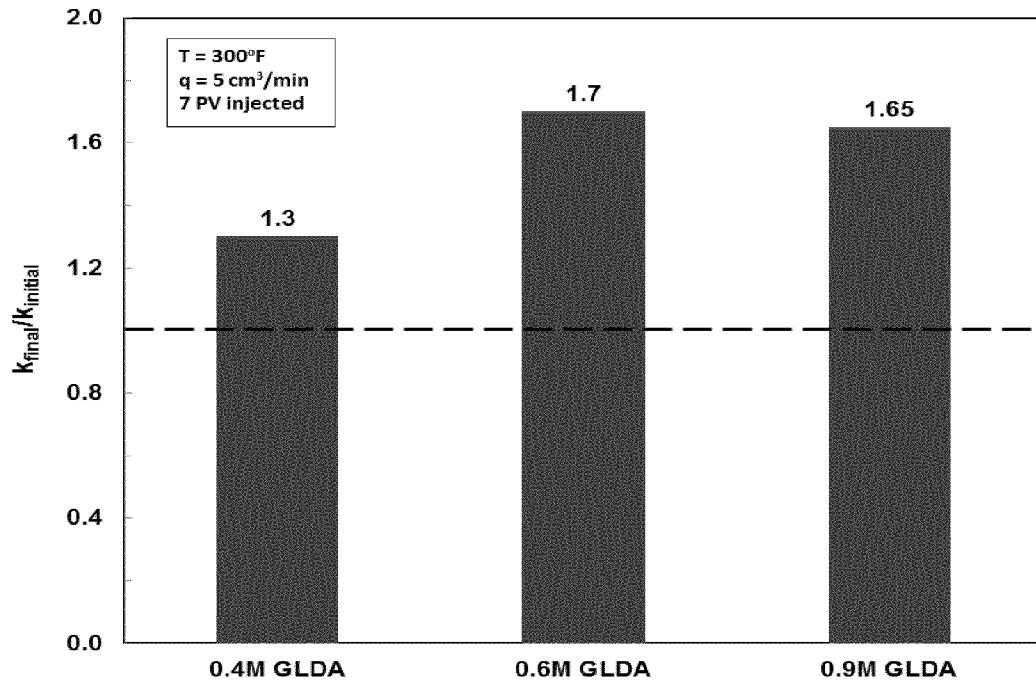


Fig. 5 - Permeability ratio for the Berea sandstone cores after treatment by different GLDA concentration.

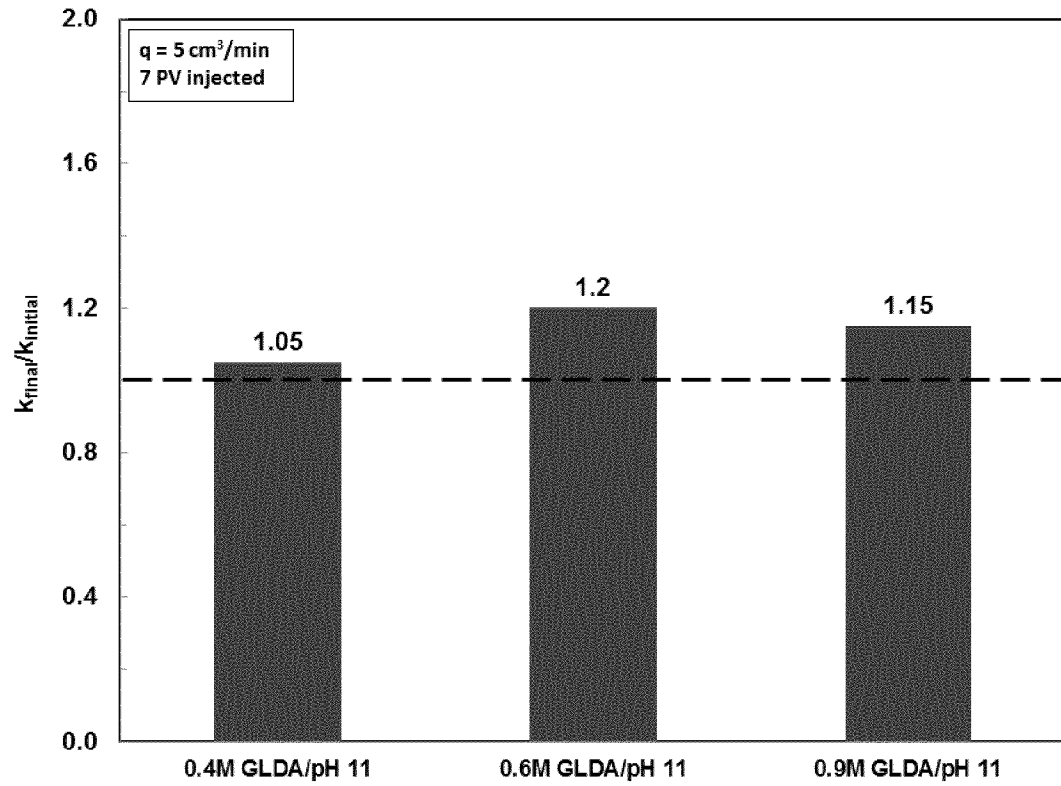


Fig. 6 - Permeability ratio for the Berea sandstone cores after treatment by different GLDA concentration.

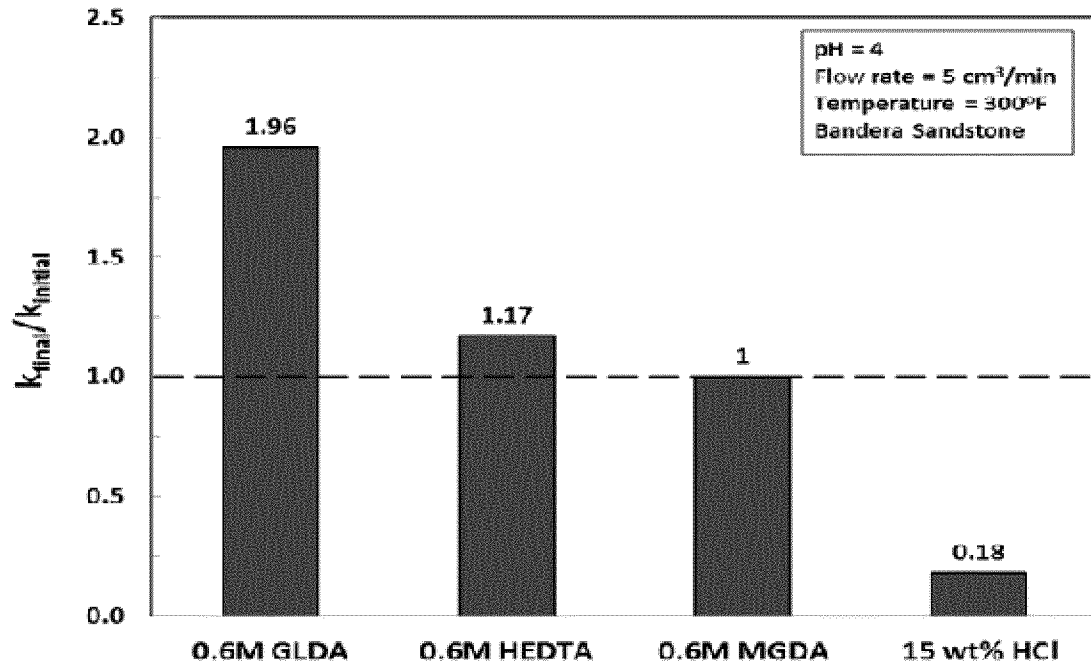


Fig. 7 - Permeability ratio for the Bandera sandstone cores treated with 15 wt% HCl and 0.6M chelate (pH =4) at 300°F and 5 cm<sup>3</sup>/min.

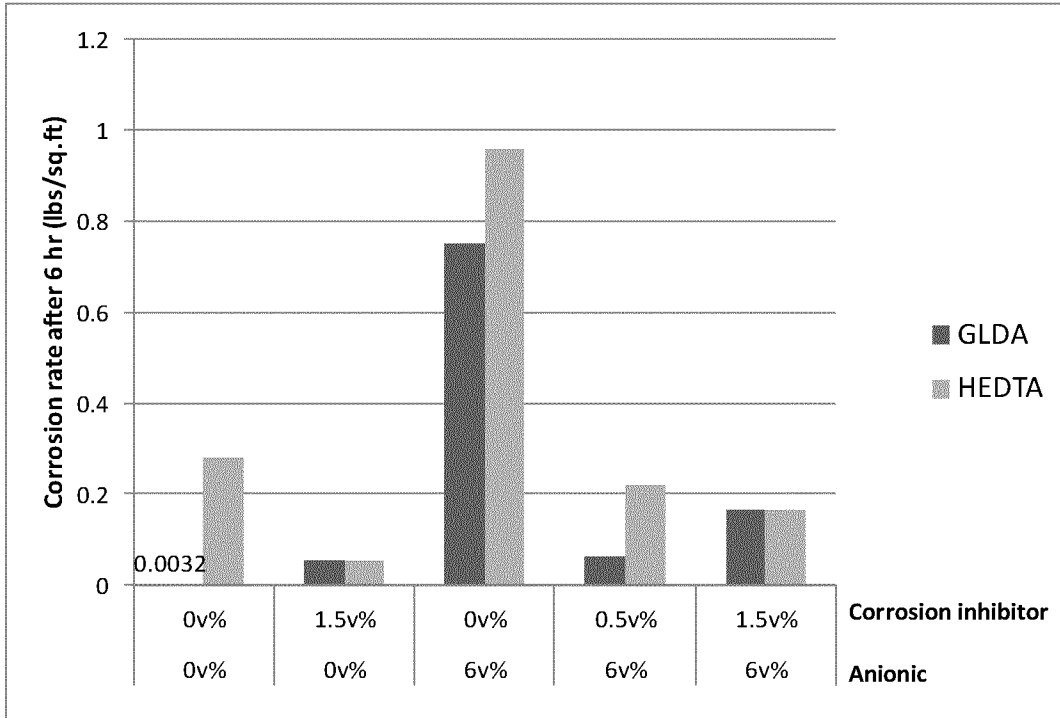


Fig. 8 - The corrosion rate after a 6-hour corrosion test at 325°F (=163°C) of 0.6 M GLDA and HEDTA at pH=3.8 and 1,000psi nitrogen (N<sub>2</sub>) pressure, with 0-1.5 vol% corrosion inhibitor (Armohib 31; 100wt% active ingredient) and 0 or 6 vol% anionic surfactant (Witconate NAS-8; 36wt% active ingredient)

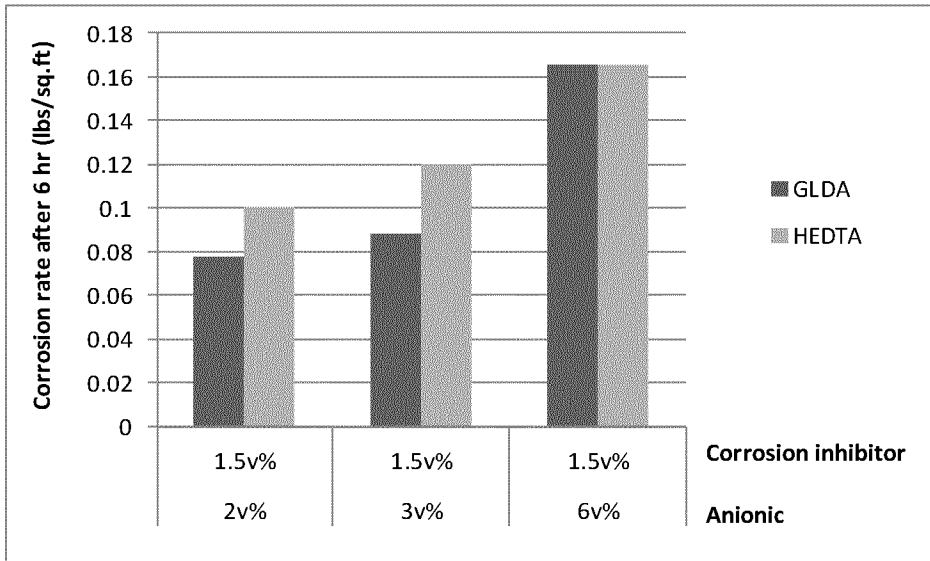


Fig. 9 - The corrosion rate after a 6-hour corrosion test at 325°F (=163°C) of 0.6 M GLDA and HEDTA at pH=3.8 and 1,000psi nitrogen (N<sub>2</sub>) pressure, with 1.5 vol% corrosion inhibitor (Armohib 31; 100wt% active ingredient) and 2-6 vol% anionic surfactant (Witconate NAS-8; 36wt% active ingredient)

INTERNATIONAL SEARCH REPORT

International application No  
PCT/EP2011/072693

A. CLASSIFICATION OF SUBJECT MATTER  
INV. C09K8/60 C09K8/72 C09K8/86  
ADD.  
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED  
Minimum documentation searched (classification system followed by classification symbols)  
C09K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)  
EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2009/086954 A1 (AKZO NOBEL NV [NL]; DE WOLF CORNELIA ADRIANA [NL]; LEPAGE JAMES N [US]) 16 July 2009 (2009-07-16) claims 1-5 page 2, line 21 - page 3, line 4	1-21
X	WO 2009/137399 A2 (MI LLC [US]; NAVARRO-MASCARELL RAUL [GB]; LUYSTER MARK [US]) 12 November 2009 (2009-11-12) paragraph [0008] - paragraph [0009] paragraph [0017] paragraph [0027] - paragraph [0031] claims 1, 7, 8	1-21

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search  8 March 2012	Date of mailing of the international search report  19/03/2012
---	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer  Zimpfer, Emmanuel
--	---

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/EP2011/072693

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2009/024518 A1 (AKZO NOBEL NV [NL]; BOONSTRA TJERK OEDSE [NL]; HEUS MARTIN [NL]) 26 February 2009 (2009-02-26) claims 1, 12 page 9, line 8 - line 11 -----	1-21
A	WO 2008/089262 A1 (MI LLC [US]; FREEMAN MICHAEL A [US]; HORTON ROBERT L [US]; CONN LEE [U]) 24 July 2008 (2008-07-24) claims 1, 7, 9 -----	1-21

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/EP2011/072693

## Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1.  Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2.  Claims Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
  
3.  Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1.  As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2.  As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
3.  As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4.  No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

### Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.

**FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210**

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1, 2

Independent claim 1 relates to a process for treating a sandstone formation comprising introducing a fluid containing glutamic acid N,N-diacetic acid or a salt thereof (GLDA) and having a pH of between 1 and 14 into the formation.

---

2. claims: 3-11

Independent claim 3 claims a fluid suitable for use in the process of claim 1 or 2 having a pH between 1 and 14 containing 5 - 30 wt% on the basis of total fluid of glutamic acid N,N-diacetic acid or a salt thereof (GLDA), a corrosion inhibitor, a surfactant, and optionally a mutual solvent.

---

3. claims: 12-21

Independent claim 12 relates to a kit of parts wherein one part contains a fluid containing glutamic acid N,N-diacetic acid or a salt thereof (GLDA), a corrosion inhibitor, and a surfactant, and the other part contains a mutual solvent, or wherein one part contains a fluid containing glutamic acid N,N-diacetic acid or a salt thereof (GLDA) and a corrosion inhibitor and the other part contains a mutual solvent and a surfactant.

---

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/EP2011/072693
---

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2009086954 A1	16-07-2009	CA 2711634 A1	16-07-2009
		CN 101918510 A	15-12-2010
		EP 2229423 A1	22-09-2010
		JP 2011512421 A	21-04-2011
		US 2010276152 A1	04-11-2010
		WO 2009086954 A1	16-07-2009
		-----	
WO 2009137399 A2	12-11-2009	CA 2723586 A1	12-11-2009
		CN 102083938 A	01-06-2011
		EA 201071270 A1	30-06-2011
		EP 2297268 A2	23-03-2011
		US 2011061870 A1	17-03-2011
		WO 2009137399 A2	12-11-2009
-----			
WO 2009024518 A1	26-02-2009	CA 2696669 A1	26-02-2009
		CN 101784513 A	21-07-2010
		CN 101784514 A	21-07-2010
		EP 2176213 A1	21-04-2010
		EP 2176215 A1	21-04-2010
		JP 2010536727 A	02-12-2010
		JP 2010536728 A	02-12-2010
		KR 20100061687 A	08-06-2010
		US 2010222610 A1	02-09-2010
		US 2010324334 A1	23-12-2010
		WO 2009024518 A1	26-02-2009
		WO 2009024519 A1	26-02-2009
		-----	
WO 2008089262 A1	24-07-2008	NONE	
-----			