



(51) International Patent Classification:

A61H 33/02 (2006.01) B01F 5/04 (2006.01)
B01F 3/04 (2006.01) B05B 7/04 (2006.01)

(21) International Application Number:

PCT/US2019/036451

(22) International Filing Date:

11 June 2019 (11.06.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/690,384 27 June 2018 (27.06.2018) US

(71) Applicant: **AS AMERICA, INC.** [US/US]; One Centennial Avenue, Piscataway, NJ 08854 (US).

(72) Inventors: **NIIMI, Hirotaka**; 205, 1-14-17 Nishitsutsu-jigaoka, Chofu-shi, Tokyo 182-0006 (JP). **KOLEKAR, Nitin S.**; 128A Rutgers Road, Piscataway, NJ 08854 (US). **HELMSTETTER, Christopher**; 102 Saint James Drive, Langhorne, PA 19047 (US).

(74) Agent: **STEVENSON, Tyler, A.** et al.; AS America, Inc., One Centennial Avenue, Piscataway, NJ 08854 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: JET NOZZLE

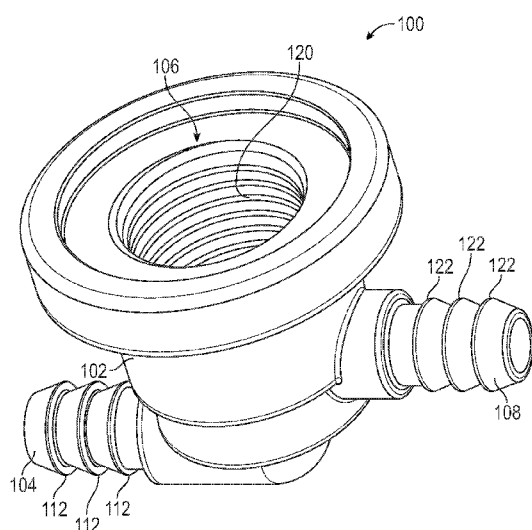


FIG. 1

(57) Abstract: A jet nozzle includes a single-piece body having a water inlet with a first inlet channel coaxial with a first inlet axis, a gas inlet with a second inlet channel coaxial with a second inlet axis, and an outlet coaxial with an outlet axis, the single-piece body defining a fluid passageway from the first inlet channel to the outlet. A channel wall having a water channel is positioned in the fluid passageway between the first inlet channel and the outlet, the water channel being coaxial with the outlet axis and having a diameter that is smaller than a diameter of the first inlet channel. The second inlet axis is substantially perpendicular to and intersects the outlet axis at a point within the water channel.

Jet Nozzle

The present invention, according to some embodiments, relates to jet nozzles which may be used to introduce water into, for example, bath tubs, hot tubs, spas, pools, etc.

Background

Jet nozzles may be used to introduce water in a variety of structures including, for example, bath tubs, hot tubs, spas, pools, and the like. The jet nozzles can be installed into the walls and/or floor of the structures and be configured to output water under pressure to create effects that are desirable to users for relaxation, massage, hydrotherapy, etc. In some instances, the jet nozzles may be further configured to aerate the water by incorporating air into the water stream by using, for example, a Venturi effect.

A difficulty faced with certain existing jet nozzles is that the jet nozzles may not be dimensioned to fit into tight areas. Accordingly, portions of the jet nozzles may protrude from the body of the tub and can be subjected to damage during installation. For example, in some situations a jet nozzle that protrudes significantly from the outer surface of a tub may be knocked from the tub when the tub is being moved through a doorway or other confined space prior to installation.

Some jet nozzles are also constructed from multiple components which may be configured to move relative to each other. For example, some jet nozzles are configured such that the direction of a water and/or air inlet may be rotated with respect to other portions of the jet nozzle. Other jet nozzles include separate movable components which are configured to allow for variable flow. The use of such multiple components, however, necessitates more complex fabrication techniques and may also contribute to the larger overall dimensions of the jet nozzle.

Summary

The present invention, in some embodiments, provides a jet nozzle which can overcome one or more of the difficulties described above. In some embodiments, a jet nozzle according to the present invention has a smaller size than certain existing jet nozzles and is configured to be flush with an outer surface of a tub or protrude minimally (e.g., less than two inches) from an outer surface of the tub. In further embodiments, a jet nozzle according to the present invention may

have a unitary construction, for example, being fabricated (e.g., molded) as a single piece. The present invention, according to additional embodiments, includes a tub including one or more jet nozzles as described herein. The tub may be, for example, a bath tub, a hot tub, a spa tub, etc. In some embodiments, a jet nozzle according to the present invention includes a single-piece body having a water inlet with a first inlet channel coaxial with a first inlet axis, a gas inlet with a second inlet channel coaxial with a second inlet axis, and an outlet coaxial with an outlet axis, the single-piece body defining a fluid passageway from the first inlet channel to the outlet. In some embodiments, a channel wall defining a water channel that is positioned in the fluid passageway between the first inlet channel and the outlet, the water channel being coaxial with the outlet axis and having a diameter that is smaller than a diameter of the first inlet channel. In some embodiments, the second inlet axis is perpendicular to and intersects the outlet axis at a point within the water channel. In some embodiments, a mixing chamber coaxial with the outlet axis and positioned in the fluid passageway between the water channel and the outlet, the mixing chamber being in flow communication with the gas inlet and having a diameter greater than the diameter of the water channel.

In some embodiments, a jet nozzle further includes an air chamber in flow communication with and disposed between the second inlet channel and the mixing chamber. In some such embodiments, the air chamber surrounds the channel wall. In some embodiments, the first inlet axis is parallel to the second inlet axis. In some embodiments, the first inlet axis intersects the outlet axis at a point located within the first inlet channel. In some embodiments, the water inlet and the gas inlet extend away from the outlet axis in substantially opposite directions. In further embodiments, the water inlet and the gas inlet are fixed relative to each other.

Brief Description of the Drawings

The disclosure described herein is illustrated by way of example and not by way of limitation in the accompanying figures. For simplicity and clarity of illustration, features illustrated in the figures are not necessarily drawn to scale. For example, the dimensions of some features may be exaggerated relative to other features for clarity. Further, where considered appropriate, reference labels have been repeated among the figures to indicate corresponding or analogous elements.

FIG. 1 shows a perspective view of a jet nozzle according to an embodiment of the present invention;

FIG. 2 shows an elevational view of the jet nozzle of **FIG. 1**;

FIG. 3 shows a plan view of the jet nozzle of **FIG. 1**;

FIG. 4 shows a side cross-sectional view of the jet nozzle of **FIG. 3** taken across the plane designated by line 4-4;

FIG. 5A shows a side view of a jet nozzle according to the current state of the art;

FIGS. 5B-5F shows side views of jet nozzles according to certain embodiments of the present invention;

FIG. 6A shows a side cross-sectional view of the jet nozzle of **FIG. 5A**;

FIGS. 6B-6F show side cross-sectional views of the jet nozzles of **FIGS. 5B-5F**, respectively;

FIG. 7A shows a perspective cross-sectional view of the jet nozzle of **FIG. 5A**;

FIGS. 7B-7F show perspective cross-sectional views of the jet nozzles of **FIGS. 5B-5F**, respectively; and

FIGS. 8A-8E provide example measurements (in inches) of a jet nozzle according to an embodiment of the present invention.

Detailed Description

The present subject matter will now be described more fully hereinafter with reference to the accompanying Figures, in which representative embodiments are shown. The present subject matter can, however, be embodied in different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided to describe and enable one of skill in the art. All publications, patent applications, patents, and other references mentioned herein are incorporated by reference in their entirety.

Referring to the drawings in detail, wherein like reference numerals indicate like elements throughout, there is shown in **FIGS. 1-4** a jet nozzle, generally designated **100**, in accordance with an exemplary embodiment of the present invention. The overall height of the nozzle **100** may be reduced, as compared to existing nozzles, in order to minimize how far the nozzle **100** projects from a tub. Reducing the height of the nozzle **100** may help in preventing damage to the nozzle **100** while installing a tub and allow for the tub to be more easily installed in spaces having tight tolerances. In some embodiments, the height of the nozzle **100** is reduced by providing an interior nozzle or water channel **116** having a channel wall **114** that at least partially overlaps with the outlet of the gas channel **124** as discussed in further detail below. In some embodiments, the height of the nozzle **100** is reduced by manufacturing the nozzle **100** as a single unitary component as discussed in further detail below.

In some embodiments, jet nozzle **100** includes a body **102** which defines a fluid passageway from a water inlet **104** to an outlet **106**. In some embodiments, jet nozzle **100** further includes an air inlet **108** which is configured to receive and conduct air or other gas into the fluid passageway. In some embodiments, jet nozzle **100** including body **102**, water inlet **104**, air inlet **108**, and outlet **106** can be fabricated as a single, unitary component. For example, in some embodiments, the entirety of jet nozzle **100** as illustrated in **FIGS. 1-4** can be molded as a single component, can be produced by 3D printing (additive manufacturing) as a single component, milled or machined from a monolithic material, or otherwise fabricated as a single piece using other known manufacturing techniques. Jet nozzle **100** may be made from a rigid material, for example, a hard plastic, composite material, or metal according to some embodiments.

In some embodiments water inlet **104** is configured to couple with a fluid source (e.g., tub recirculation pump, plumbed water line, etc.) and receive fluid (e.g., water) therefrom. Water inlet **104**, in some embodiments, may be configured to directly connect to piping or tubing that conveys fluid from the fluid source. For example, water inlet **104** may be configured to be inserted into and form a push-connection with a flexible hose or tubing. In some embodiments, an exterior portion of water inlet **104** is provided with one or more (e.g., three or more) hose barbs **112** which are configured to help secure water inlet **104** within the end of the hose or tubing.

As best illustrated in **FIG. 4**, in some embodiments, water inlet **104** includes an inlet channel **110** which is coaxial with a first inlet axis **A1** that is centrally disposed through inlet channel **110**. Inlet channel **110** may have a length **L1** that is for example, about 1.0 inch to about 1.7 inches, about 1.1 inches to about 1.6 inches, about 1.2 inches to about 1.5 inches, about 1.3 inches to about 1.4 inches, or about 1.31 inches to about 1.33 inches. In some embodiments, length **L1** is or about 1.320 inches $\pm$ 0.005 inches. Inlet channel **110** may further have a diameter **D1** that is, for example, about 0.20 inches to about 0.30 inches, about 0.22 inches to about 0.28 inches, or about 0.24 inches to about 0.26 inches. In some embodiments diameter **D1** is or about 0.250 inches $\pm$ 0.005 inches. Diameter **D1**, in some embodiments, may be the broadest diameter of inlet channel **110**. In some embodiments, inlet channel **110** is configured such that a ratio of length **L1** to diameter **D1** is about 5 to about 5.5, about 5.1 to about 5.4, about 5.2 to about 5.3, or about 5.28. In some embodiments, a distance **H1** from the end of outlet **106** to first inlet axis **A1** is about 1.30 to about 1.55 inches, about 1.35 to about 1.50 inches, or about 1.40 inches to about 1.45 inches. In some embodiments, distance **H1** is or about 1.433 inches $\pm$ 0.005 inches.

In some embodiments, jet nozzle **100** includes a restriction tube or water channel **116** between water inlet **104** and outlet **106** which is configured to channel fluid from water inlet **104** towards outlet **106**. In some embodiments, water channel **116** is defined by a channel wall **114** that is connected to and in flow communication with inlet channel **110**. Channel wall **114**, in some embodiments, extends within body **102** to an open end **118** and is perpendicular or substantially perpendicular to water inlet **104**. In some embodiments, channel wall **114** is configured as a tube which is disposed about outlet axis **A2** such that channel wall **114** and water channel **116** are coaxial with an outlet axis **A2** as shown in **FIG. 4**. According to the illustrated embodiment, outlet axis **A2** is centrally disposed through water channel **116**. In some embodiments, outlet axis **A2** is perpendicular or substantially perpendicular to first inlet axis **A1** such that the fluid path from inlet channel **110** to water channel **116** includes a perpendicular turn. In some embodiments, first inlet axis **A1** intersects with outlet axis **A2** at a point **X1** within inlet channel **110**. In some embodiments, a distance between the outlet axis **A2** to an end of water inlet **104** is or about 1.20 inches $\pm$ 0.01 inches.

The water channel **116** may have a reduced diameter as compared to the inlet channel **110** to increase the velocity of the fluid and form a jet. In some embodiments, water channel **116** includes a diameter **D2** that is less than diameter **D1** of inlet channel **110**. In some embodiments, diameter **D2** is, for example, less than about 0.20 inches. In some embodiments, diameter **D2** is about 0.150 inches to about 0.199 inches, about 0.160 inches to about 0.199 inches, about 0.170 inches to about 0.199 inches, about 0.180 inches to about 0.199 inches, or about 0.190 inches to about 0.199 inches. In some embodiments, diameter **D2** is about 0.188 inches to about 0.198 inches, about 0.190 inches to about 0.196 inches, or about 0.192 inches to about 0.194 inches. In some embodiments, diameter **D2** is or about 0.193 inches $\pm$ 0.005 inches. In some embodiments, jet nozzle **100** is configured such that a ratio of diameter **D2** to diameter **D1** is about 0.70 to about 0.85, about 0.71 to about 0.84, about 0.72 to about 0.83, about 0.73 to about 0.82, about 0.74 to about 0.81, about 0.75 to about 0.80, about 0.76 to about 0.79, or about 0.77 to about 0.78. In some embodiments, the ratio of diameter **D2** to diameter **D1** is or about 0.772. In some embodiments, diameter **D2** is constant through the entire length of water channel **116**. In other embodiments, water channel **116** tapers to diameter **D2**.

In some embodiments, as fluid (e.g., water) flows through inlet channel **100** and water channel **116**, the fluid velocity increases because of the smaller diameter **D2** (and smaller cross-sectional area) of water channel **116**. This in turn creates a Venturi effect, according to some

embodiments, resulting in a decrease in static pressure in the fluid and causing air to be drawn through air inlet **108** and incorporated into the fluid stream, as will be further described herein.

In some embodiments, water channel **116** extends from inlet channel **100** to end **118** of channel wall **114**. In some embodiments end **118** of channel wall **114** opens to a chamber **120** defined in body **102** of jet nozzle **100** which in turn leads to outlet **106**. In some embodiments, end **118** of channel wall **114** extends to and/or is positioned within chamber **120** such that chamber **120** surrounds at least a portion of channel wall **114**. In some embodiments, end **118** of channel wall **114** includes a beveled or chamfered edge which, for example, may be configured to direct the flow of air or other gas around end **118**. Chamber **120**, in some embodiments, is coaxial with channel wall **114** and outlet axis **A2** and may have a diameter **D3** that is larger than each of diameters **D1** and **D2**. As shown in the illustrated embodiments, outlet axis **A2** may be centrally disposed through chamber **120** and outlet **106**. Diameter **D3** may be, for example, about 0.80 inches to about 1.00 inches, about 0.830 inches to about 0.960 inches, or about 0.837 inches to about 0.949 inches according to some embodiments. In some embodiments, chamber **120** may have internally threaded walls as illustrated which are configured to engage with a separate jet head (not shown) having a corresponding external thread. In some embodiments, the separate jet head may help control or direct the flow of fluid exiting outlet **106**. The jet head may include, for example, one or more apertures through which the fluid from chamber **120** may flow. In some embodiments, the separate jet head may be screwed into chamber **120** through outlet **106** by rotating the jet head relative to chamber **120** about outlet axis **A2**.

In some embodiments, air may be mixed with the fluid stream in chamber **120** during use of jet nozzle **100** to aerate the fluid stream before the fluid stream exits outlet **106**. Chamber **120** may therefore serve as a mixing chamber according to some embodiments. As described previously, in some embodiments jet nozzle **100** includes an air inlet **108** which is configured to receive and conduct air or other gas into the fluid passageway of jet nozzle **100**. In some embodiments, air inlet **108** is configured to couple with a gas source (e.g., air pump, pressurized gas source, atmospheric gas, etc.) and receive air or other gas therefrom. Air inlet **108**, in some embodiments, may be configured to directly connect to piping or tubing that conveys gas from a gas source. For example, air inlet **108** may be configured to be inserted into and form a push-connection with a flexible hose or tubing. In some embodiments, air inlet **108** may extend in a direction that is generally opposite of water inlet **104**, e.g., radially opposite with respect to outlet axis **A2**. The term "opposite direction" may mean wherein a first inlet axis and a second inlet axis are substantially parallel. In some embodiments, air inlet **108** and water inlet **104** are fixed and are not capable of moving relative to

each other. As illustrated in **FIGS. 1-3**, in some embodiments an exterior portion of air inlet **108** is provided with one or more (e.g., three or more) hose barbs **122** which are configured to help secure air inlet **108** within the end of a hose or tubing.

Referring again to **FIG. 4**, the water channel **116** may at least partially overlap with the gas channel **124** positioning the water inlet **104** closer to the air inlet **108** and resulting in an overall reduction of height for the jet nozzle **100**. In some embodiments air inlet **108** defines a gas channel **124** which is coaxial with a second inlet axis **A3** that is centrally disposed through gas channel **124**. In some embodiments gas channel **124** extends to an open end **128** which may connect to an air chamber **126** that at least partially surrounds the outside of channel wall **114**. In some embodiments, channel wall **114** extends perpendicularly (e.g., along axis **A2**) beyond open end **128** of gas channel **124**, such that, for example, end **118** of channel wall **114** is positioned at a location past open end **128**. In some embodiments, end **118** of channel wall **114** is positioned between open end **128** and outlet **106**. In some embodiments, end **118** of channel wall **114** extends within chamber **120**. In some embodiments, such configurations allow jet nozzle **100** to have a smaller overall dimension along axis **A2**. Furthermore, in some embodiments, jet nozzle **100** is configured such that air exiting gas channel **124** impinges on the outside of channel wall **114** which can create turbulent flow and subsequent mixing with the water flowing from channel wall **114** in chamber **120** (e.g., as visualized in the flow paths shown in **FIGS. 17A-17D**). For example, during use of jet nozzle **100**, according to some embodiments, the flow of air or other gas through gas channel **124** of air inlet **108** may be laminar or substantially laminar within gas channel **124**. As the air or other gas exits open end **128** of gas channel **124** the air or other gas enters air chamber **126** and is forced to flow around the outside of channel wall **114** positioned therein. In some such embodiments, the flow of air or other gas may become turbulent within air chamber **126** as a result. The air or other gas is then allowed to mix with the water stream exiting from water channel **116** at chamber **120** forming an aerated water stream that exits outlet **106** of jet nozzle **100**.

Second inlet axis **A3**, in some embodiments, may be parallel and coplanar to but not coaxial with first inlet axis **A1**. In some embodiments, second inlet axis **A3** is perpendicular to outlet axis **A2**. In some embodiments, second inlet axis **A3** intersects with outlet axis **A2** at a point **X2** that is between inlet channel **110** and outlet **106**. In some embodiments, second inlet axis **A3** intersects with outlet axis **A2** at a point **X2** that is between inlet channel **110** and chamber **120**. In some embodiments, second inlet axis **A3** intersects with outlet axis **A2** at a point **X2** that is between point **X1** and end **118** of channel wall **114**. In some embodiments, second inlet axis **A3** intersects with outlet axis **A2** at a point **X2** within water channel **116**.

In some embodiments, a distance between the outlet axis **A2** and an end of gas inlet **108** is or about 1.357 inches $\pm$ 0.005 inches. In some embodiments, the distance between point **X1** and point **X2** (e.g., a perpendicular distance between first inlet axis **A1** and second inlet axis **A2**) is about 0.40 inches to about 0.60 inches, about 0.42 inches to about 0.58 inches, about 0.44 inches to about 0.56 inches, about 0.46 inches to about 0.54 inches, or about 0.48 inches to about 0.52 inches. In some embodiments, the distance between point **X1** and point **X2** is or about 0.50 inches. In some embodiments, a distance **H2** from the end of outlet **106** to second inlet axis **A2** is less than **H1**. In some embodiments, distance **H2** is about 0.80 to about 1.05 inches, about 0.85 to about 1.00 inches, or about 0.90 inches to about 0.95 inches. In some embodiments, distance **H2** is or about 0.933 inches $\pm$ 0.005 inches.

In some embodiments, gas channel **124** may have a diameter **D4** that is substantially the same as diameter **D1**. In other embodiments, diameter **D4** may be less than or greater than diameter **D1**. In some embodiments, for example, **D4** is from about 0.20 inches to about 0.30 inches, about 0.22 inches to about 0.28 inches, or about 0.24 inches to about 0.26 inches. In some embodiments diameter **D4** is or about 0.250 inches $\pm$ 0.005 inches. Diameter **D4**, in some embodiments, may be the broadest diameter of gas channel **124**. In some embodiments, a ratio of diameter **D4** to diameter **D1** is about 0.90 to about 1.10, about 0.95 to about 1.05, or about 1.00.

In some embodiments, gas channel **124** connects to and is in flow communication with chamber **120** of jet nozzle **100** such that gas (e.g., air) received through air inlet **108** moves from gas channel **124** to chamber **120** during use. In some embodiments, as discussed, jet nozzle **100** includes an air chamber **126** in the fluid path between gas channel **124** and chamber **120**. In some embodiments, air chamber **126** may surround channel wall **114** or at least a portion of channel wall **114**. In some embodiments, air chamber **126** is an annular chamber that is coaxial with channel wall **114** and outlet axis **A2**. In other embodiments, air chamber **126** need not be coaxial with and/or does not surround channel wall **114** (e.g., configuration shown in FIG. 6C and 7C).

In use, according to certain embodiments of the present invention, water flows from a pressurized fluid source (e.g., water pump, plumbing line, etc.) through water inlet **104** and channel wall **114** of jet nozzle **100**. In some embodiments, a Venturi effect is created as the water stream passes through the smaller-diameter channel wall **114**. Without wishing to be bound by theory, the Venturi effect causes air to be drawn through air inlet **108** and air chamber **126** and into chamber **120**, where it is allowed to mix, at least partially, with the water exiting end **118** of channel wall **114**.

to create an aerated water stream. The aerated water stream may then exit through outlet **106** of jet nozzle **100** as described. In some embodiments, a separate jet head is inserted through outlet **106** and through which the aerated water stream flows as it exits jet nozzle **100**.

Further example measurements of a jet nozzle according to an embodiment of the present invention are provided in **FIGS. 8A-8D**. The measurement values are in units of inches unless otherwise specified and should be considered as including tolerances of ± 0.005 inches. **FIG. 8A** provides example measurements for a jet nozzle similar to the embodiment shown in **FIG. 2**. **FIG. 8B** is a cross-sectional view of the example jet nozzle shown in **FIG. 8A**. **FIG. 8C** provides an enlarged detail of the area indicated by the circle shown in **FIG. 8B** which refers to **DETAIL C**. **FIG. 8D** provides an enlarged detail of the area indicated by the circle shown in **FIG. 8B** which refers to **DETAIL A**. **FIG. 8E** provides an enlarged detail of the area indicated by the circle shown in **FIG. 8B** which refers to **DETAIL B**.

FIGS. 5A-7F compare the geometries of a jet nozzle according to the state of the art (**FIGS. 5A, 6A, and 7A**) with various jet nozzles in accordance with embodiments of the present invention (**FIGS. 5B-5F, 6B-6F, and 7B-7F**). As can be seen from these figures, jet nozzles according to embodiments of the present invention can have a smaller overall dimension (e.g., height) when compared to the jet nozzle of the state of the art, which allows them to fit into smaller spaces and permit easier installation. The below table provides computational fluid dynamics (CFD) data of the jet nozzles shown in **FIGS. 5A-5F**.

<u>Jet Nozzle</u>	<u>Force at Outlet (N)</u>	<u>Water Area % at Outlet</u>
5A	0.539	10.9
5B	0.464	12.5
5C	0.467	12.3
5D	0.475	12.4
5E	0.476	12.7
5F	0.475	12.1

Exiting the outlet are pure water, pure air and water/air mixture. The Force at Outlet is a measure of the force of pure water at the outlet in Newtons (N). The Force at Outlet results are comparable. The Water Area % at Outlet represents the amount of pure water area relative to the total outlet area. Jet nozzles 5B-5F of the present invention exhibit improved Water Area % at Outlet compared to 5A. This will provide for a more soothing and less “needle-like” force on skin.

In some embodiments, a distance from an end of the outlet to the first inlet axis is from any of about 1.30 inches, about 1.31 inches, about 1.32 inches, about 1.33 inches, about 1.34 inches, about 1.35 inches, about 1.36 inches, about 1.37 inches, about 1.38 inches, or about 1.39 inches, to any of about 1.40 inches, about 1.41 inches, about 1.42 inches, about 1.43 inches, about 1.44 inches, about 1.45 inches, about 1.46 inches, about 1.47 inches, about 1.48 inches, about 1.49 inches, about 1.50 inches, about 1.51 inches, about 1.52 inches, about 1.53 inches, about 1.54 inches, about 1.55 inches, or more. In some embodiments, distance from the end of the outlet to the first inlet axis is or about 1.433 inches $\pm$ 0.005 inches.

In some embodiments, a distance from the end of the outlet to the second inlet axis is from any of about 0.80 inches, about 0.81 inches, about 0.82 inches, about 0.83 inches, about 0.84 inches, about 0.85 inches, about 0.86 inches, about 0.87 inches, about 0.88 inches, about 0.89 inches, or about 0.90 inches, to any of about 0.91 inches, about 0.92 inches, about 0.93 inches, about 0.94 inches, about 0.95 inches, about 0.96 inches, about 0.97 inches, about 0.98 inches, about 0.99 inches, about 1.00 inches, about 1.01 inches, about 1.02 inches, about 1.03 inches, about 1.04 inches or about 1.05 inches, or more. In some embodiments, distance from the end of the outlet to the second inlet axis is or about 0.933 inches $\pm$ 0.005 inches.

In some embodiments the first inlet axis and second inlet axis are substantially parallel and will have a “substantially perpendicular” distance therebetween. In some embodiments, this substantially perpendicular distance is from any of about 0.40 inches, about 0.41 inches, about 0.42 inches, about 0.43 inches, about 0.44 inches, about 0.45 inches, about 0.46 inches, about 0.47 inches, about 0.48 inches, about 0.49 inches, about 0.50 inches, about 0.51 inches, or about 0.52 inches, to any of about 0.53 inches, about 0.54 inches, about 0.55 inches, about 0.56 inches, about 0.57 inches, or about 0.58 inches, about 0.59 inches, about 0.60 inches, or more.

In some embodiments, one or more jet nozzles according to the present invention may be provided in a kit to be retrofitted onto existing bathtubs, hot tubs, spas, basins, pools, etc. In some embodiments, the kits may also include various tools for installing the one or more jet nozzles and/or tubing for connecting the one or more jet nozzles to the fluid and/or gas sources. In some embodiments, jet nozzles according to embodiments of the present invention may be pre-installed onto the bathtubs, hot tubs, spas, basins, pools, etc.

It should be understood that various changes, substitutions, and alterations can be made herein without departing from the spirit and scope of the invention as defined by the appended claims. It should also be apparent that individual elements identified herein as belonging to a particular embodiment may be included in other embodiments of the invention. Moreover, the scope of the present application is not intended to be limited to the particular embodiments of the process, machine, manufacture, and composition of matter, means, methods and steps described in the specification. As one of ordinary skill in the art will readily appreciate from the disclosure herein, processes, machines, manufacture, composition of matter, means, methods, or steps that perform substantially the same function or achieve substantially the same result as the corresponding embodiments described herein may be utilized according to the present invention.

The term "flow communication" or "fluid communication" means for example configured for liquid or gas flow there through. The terms "upstream" and "downstream" indicate a direction of gas or fluid flow, that is, gas or fluid will flow from upstream to downstream.

The articles "a" and "an" herein refer to one or to more than one (e.g. at least one) of the grammatical object. Any ranges cited herein are inclusive. The term "about" used throughout is used to describe and account for small fluctuations. For instance, "about" may mean the numeric value may be modified by $\pm 0.05\%$, $\pm 0.1\%$, $\pm 0.2\%$, $\pm 0.3\%$, $\pm 0.4\%$, $\pm 0.5\%$, $\pm 1\%$, $\pm 2\%$, $\pm 3\%$, $\pm 4\%$, $\pm 5\%$, $\pm 6\%$, $\pm 7\%$, $\pm 8\%$, $\pm 9\%$, $\pm 10\%$ or more. All numeric values are modified by the term "about" whether or not explicitly indicated. Numeric values modified by the term "about" include the specific identified value. For example "about 5.0" includes 5.0.

The term "substantially" is similar to "about" in that the defined term may vary from for example by $\pm 0.05\%$, $\pm 0.1\%$, $\pm 0.2\%$, $\pm 0.3\%$, $\pm 0.4\%$, $\pm 0.5\%$, $\pm 1\%$, $\pm 2\%$, $\pm 3\%$, $\pm 4\%$, $\pm 5\%$, $\pm 6\%$, $\pm 7\%$, $\pm 8\%$, $\pm 9\%$, $\pm 10\%$ or more of the definition; for example the term "substantially perpendicular" may mean the 90° perpendicular angle may mean "about 90° ". The term "generally" may be equivalent to "substantially".

All U.S. patent applications, published patent applications and patents referred to herein are hereby incorporated by reference.

Claims

1. A jet nozzle comprising

a single-piece body including a water inlet having a first inlet channel coaxial with a first inlet axis, a gas inlet having a second inlet channel coaxial with a second inlet axis, and an outlet coaxial with an outlet axis, the single-piece body defining a fluid passageway from the first inlet channel to the outlet;

a channel wall having a water channel positioned in the fluid passageway between the first inlet channel and the outlet, the water channel being coaxial with the outlet axis and having a diameter that is smaller than a diameter of the first inlet channel; and

a mixing chamber coaxial with the outlet axis and positioned in the fluid passageway between the water channel and the outlet, the mixing chamber being in flow communication with the gas inlet and having a diameter greater than the diameter of the water channel,

wherein the second inlet axis is substantially perpendicular to and intersects the outlet axis at a point within the water channel.

2. The jet nozzle of claim 1, further comprising an air chamber in flow communication with and disposed between the second inlet channel and the mixing chamber.

3. The jet nozzle of claim 2, wherein the air chamber surrounds the channel wall.

4. The jet nozzle of claim 1, wherein first inlet axis is substantially parallel to the second inlet axis.

5. The jet nozzle of claim 1, wherein the first inlet axis intersects the outlet axis at a point located within the first inlet channel.

6. The jet nozzle of claim 1, wherein the mixing chamber includes a wall having an internal screw thread.

7. The jet nozzle of claim 6, wherein the water inlet and the gas inlet are fixed relative to each other.

8. The jet nozzle of claim 1, wherein the water inlet and the gas inlet extend away from the outlet axis in substantially opposite directions.

9. The jet nozzle of any one of claims 1-8, wherein a distance from an end of the outlet to the first inlet axis is from about 1.30 to about 1.55 inches.
10. The jet nozzle of claim 9, wherein the distance from the end of the outlet to the first inlet axis is 1.433 inches $\pm$ 0.005 inches.
11. The jet nozzle of any one of claims 1-8, wherein a distance from the end of the outlet to the second inlet axis is less than the distance from the end of the outlet to the first inlet axis.
12. The jet nozzle of any of claims 1-8, wherein a distance from the end of the outlet to the second inlet axis is from about 0.80 to about 1.05 inches.
13. The jet nozzle of claim 12, the distance from the end of the outlet to the second inlet axis is 0.933 inches $\pm$ 0.005 inches.
14. The jet nozzle of any one of claims 1-8, wherein a substantially perpendicular distance between the first inlet axis and the second inlet axis is from about 0.40 inches to about 0.60 inches.
15. The jet nozzle of claim 14, wherein the substantially perpendicular distance between the first inlet axis and the second inlet axis is about 0.50 inches.
16. The jet nozzle of any one of claims 1-8, wherein a diameter of the second inlet channel is substantially the same as the diameter of the first inlet channel.
17. The jet nozzle of any one of claims 1-8, wherein the single-piece body is molded as a single component.
18. A tub comprising one or more jet nozzles according to any one of claims 1-8.
19. The tub of claim 18, selected from the group consisting of a bath tub, a hot tub, and a spa tub.

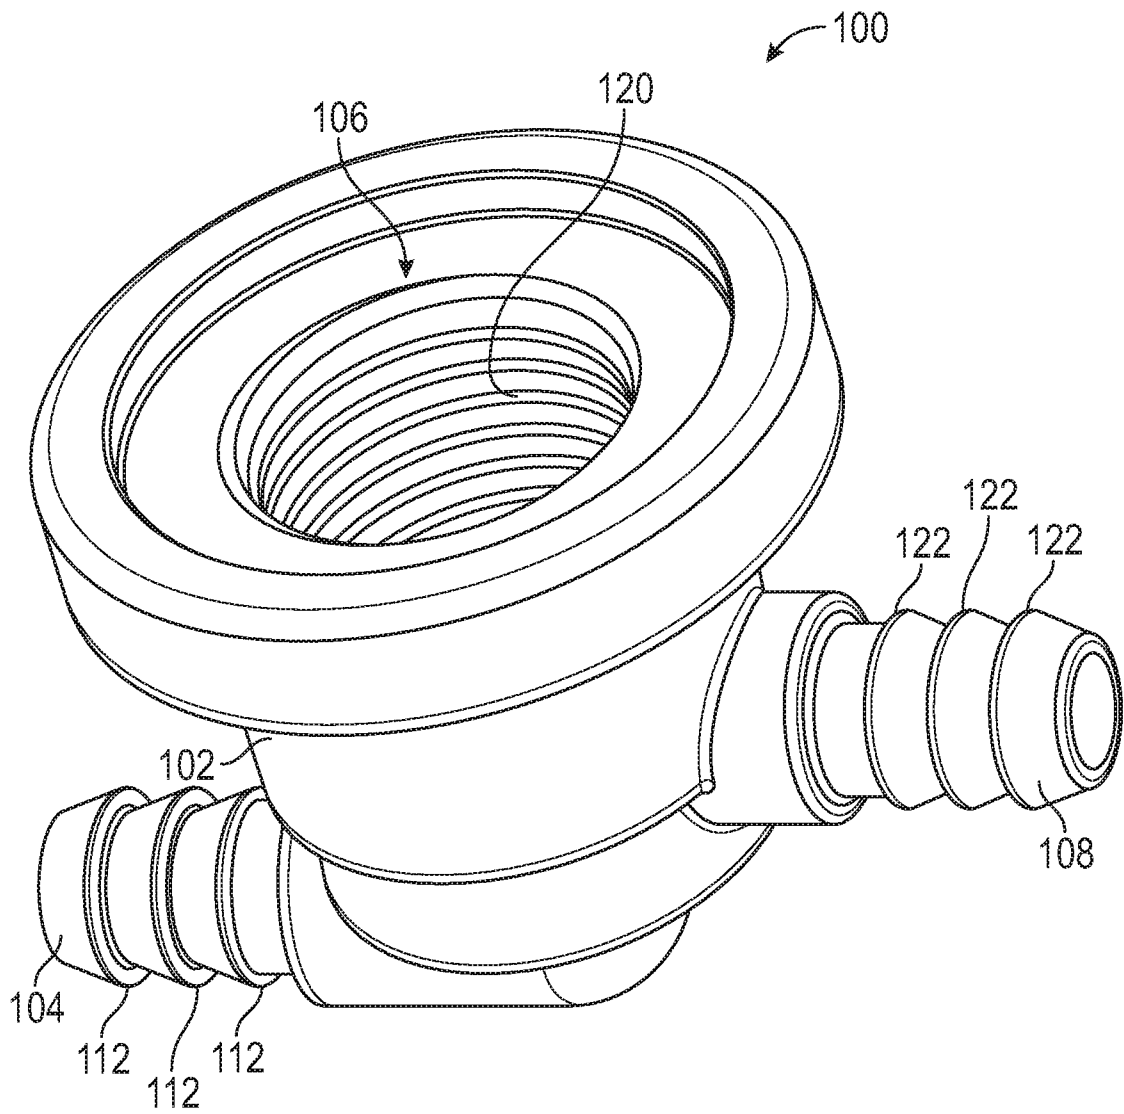


FIG. 1

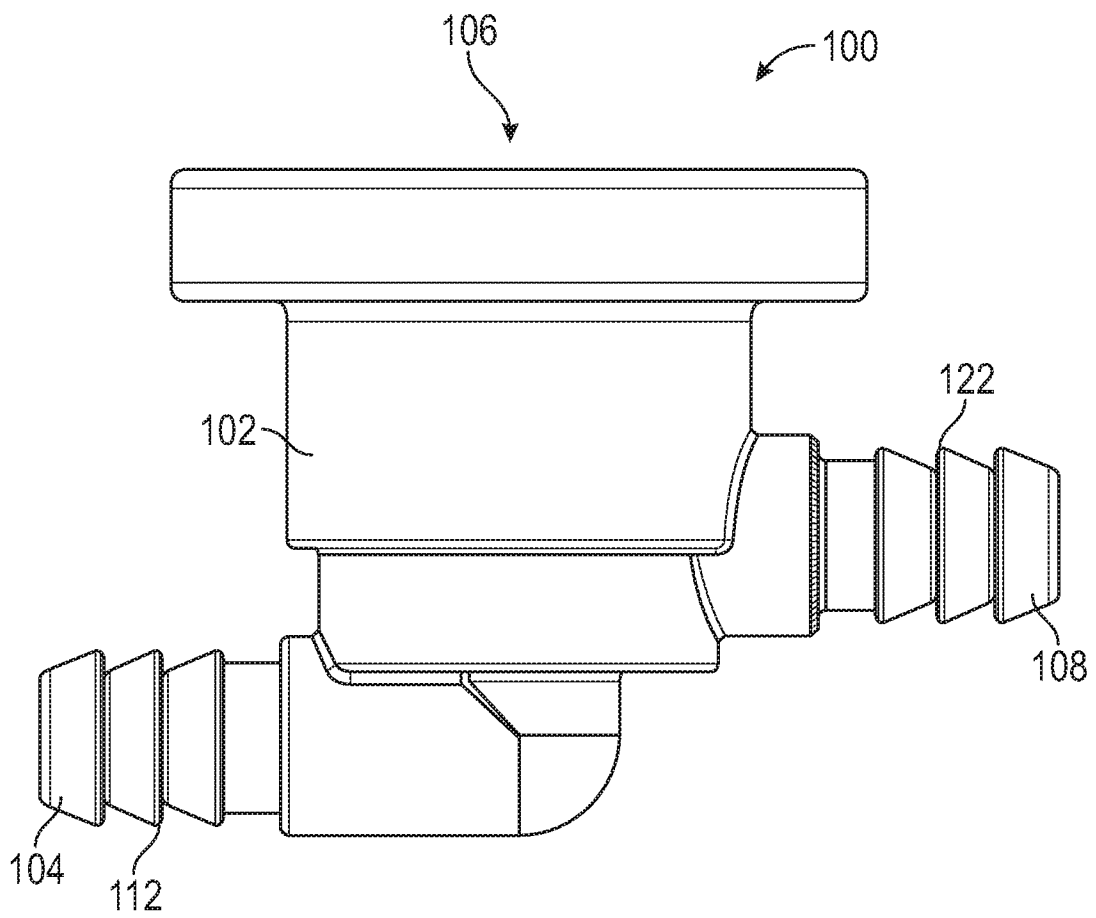


FIG. 2

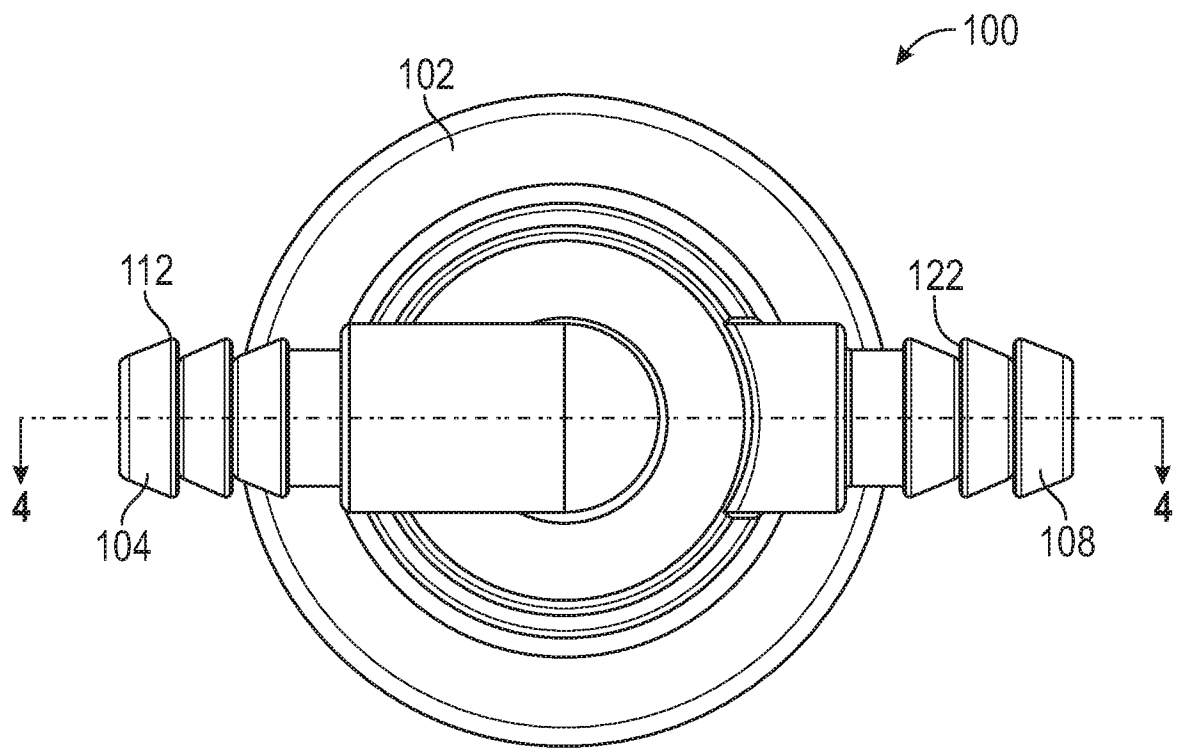


FIG. 3

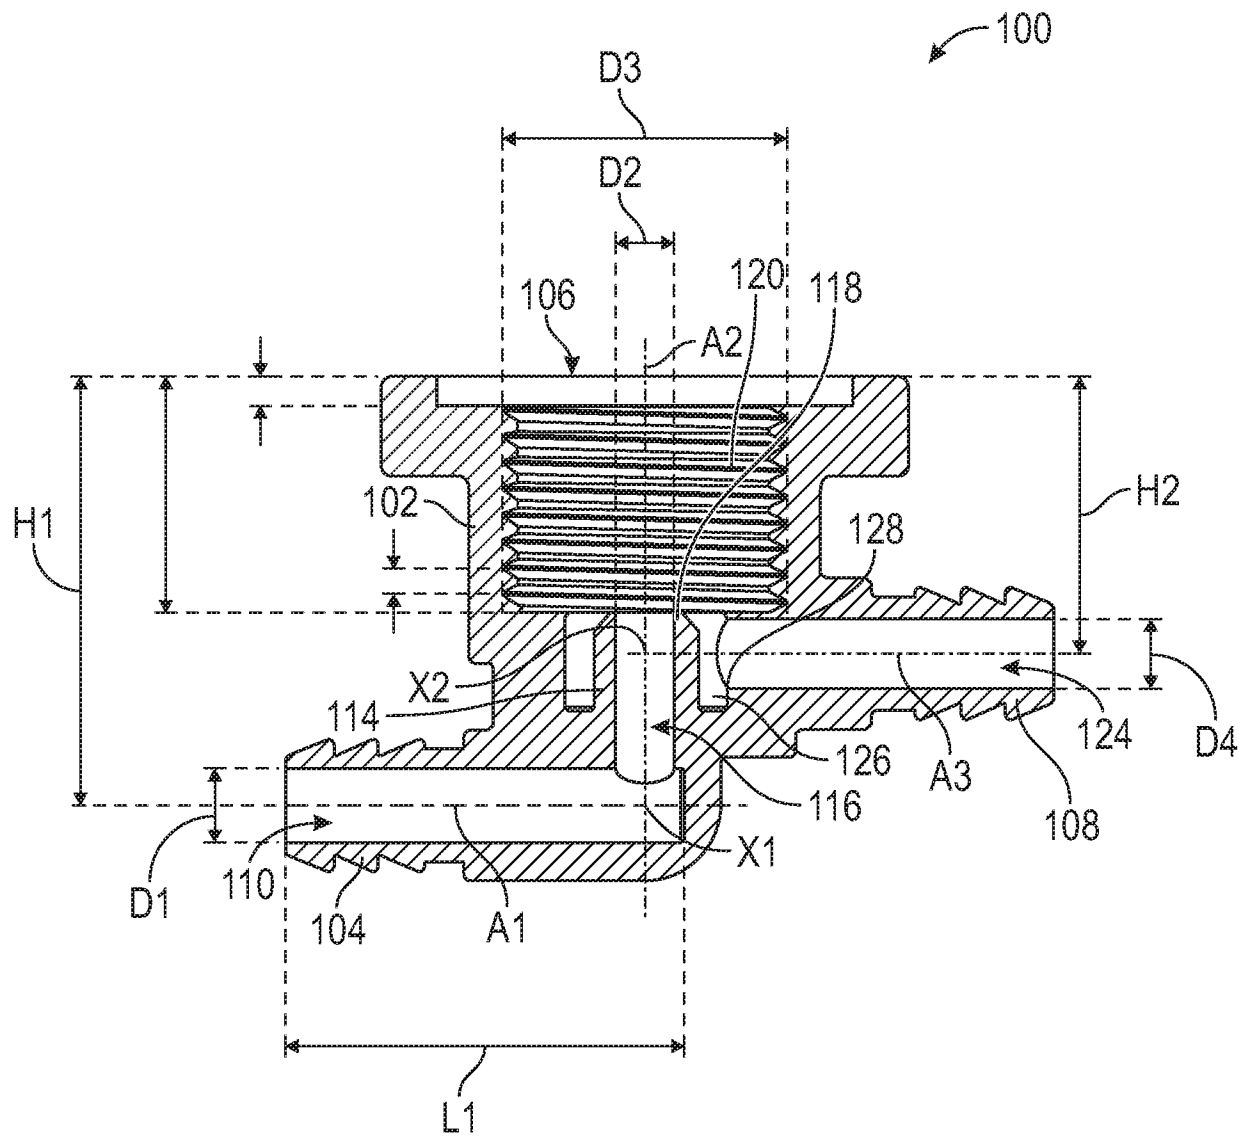


FIG. 4

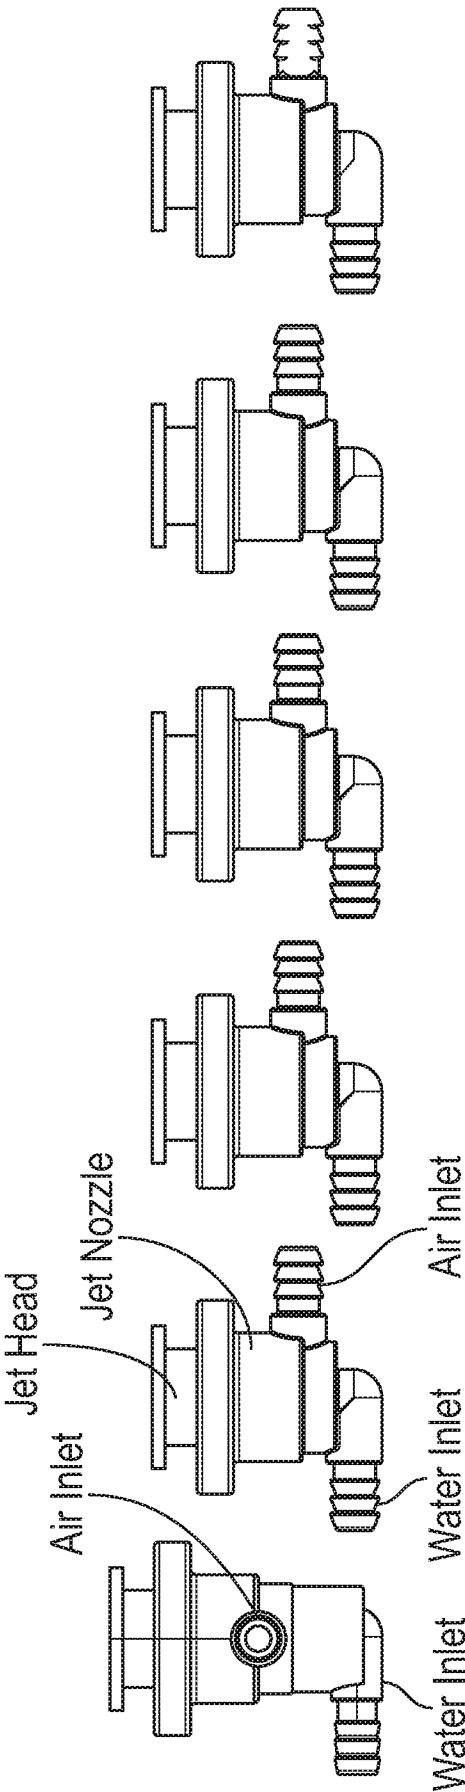


FIG. 5A

FIG. 5B

FIG. 5C

FIG. 5D

FIG. 5E

FIG. 5F

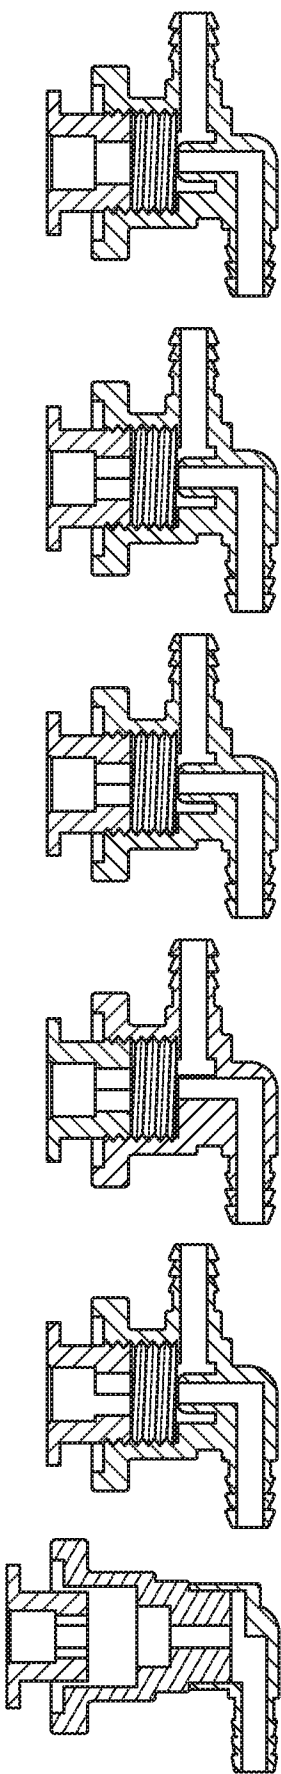


FIG. 6A


FIG. 6B

FIG. 6C

FIG. 6D

FIG. 6E

FIG. 6F

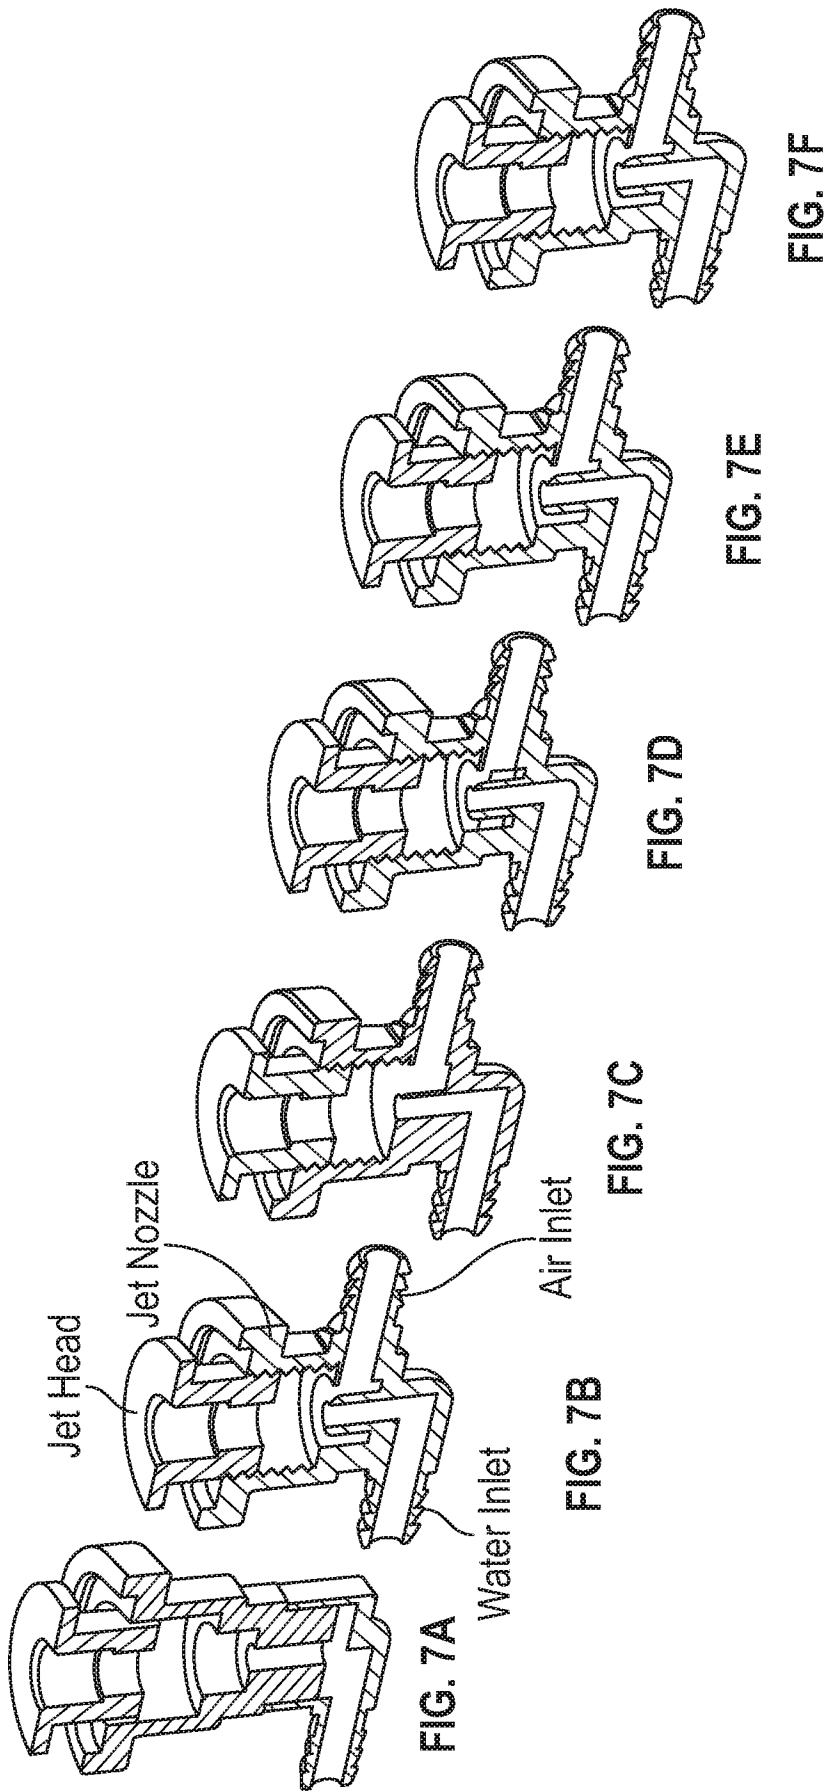

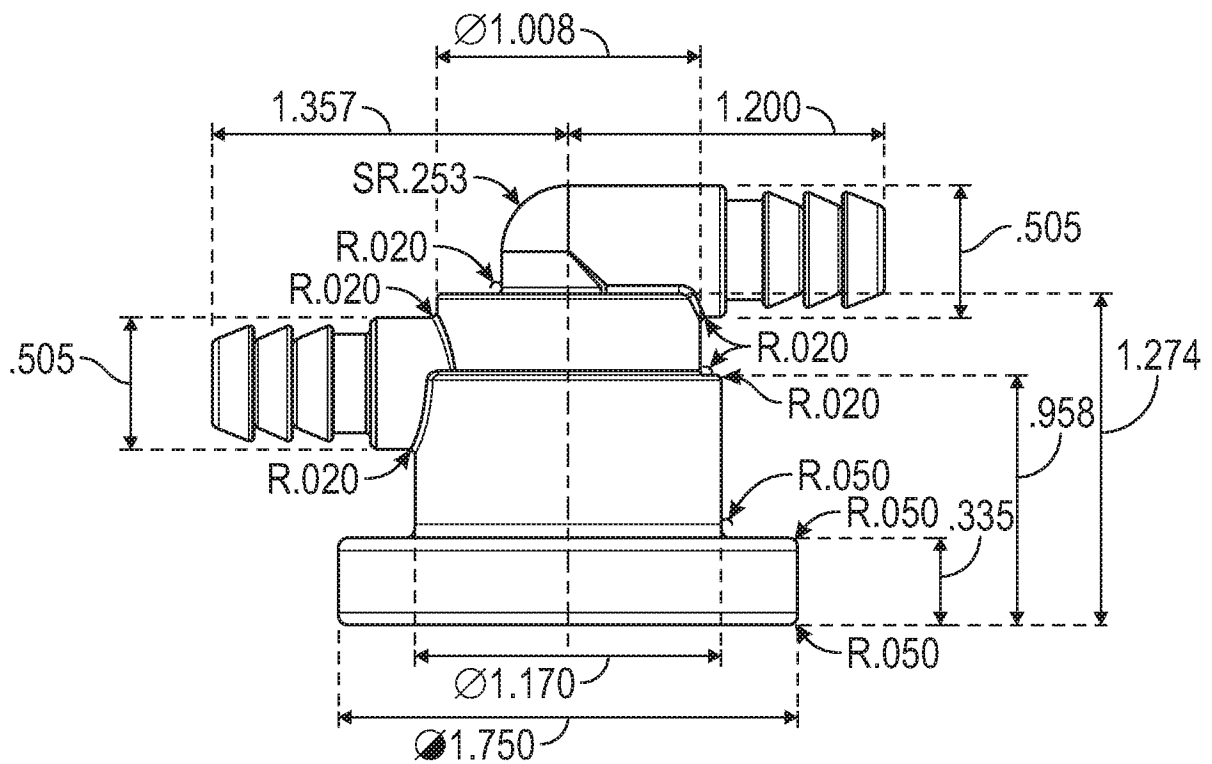


FIG. 8A

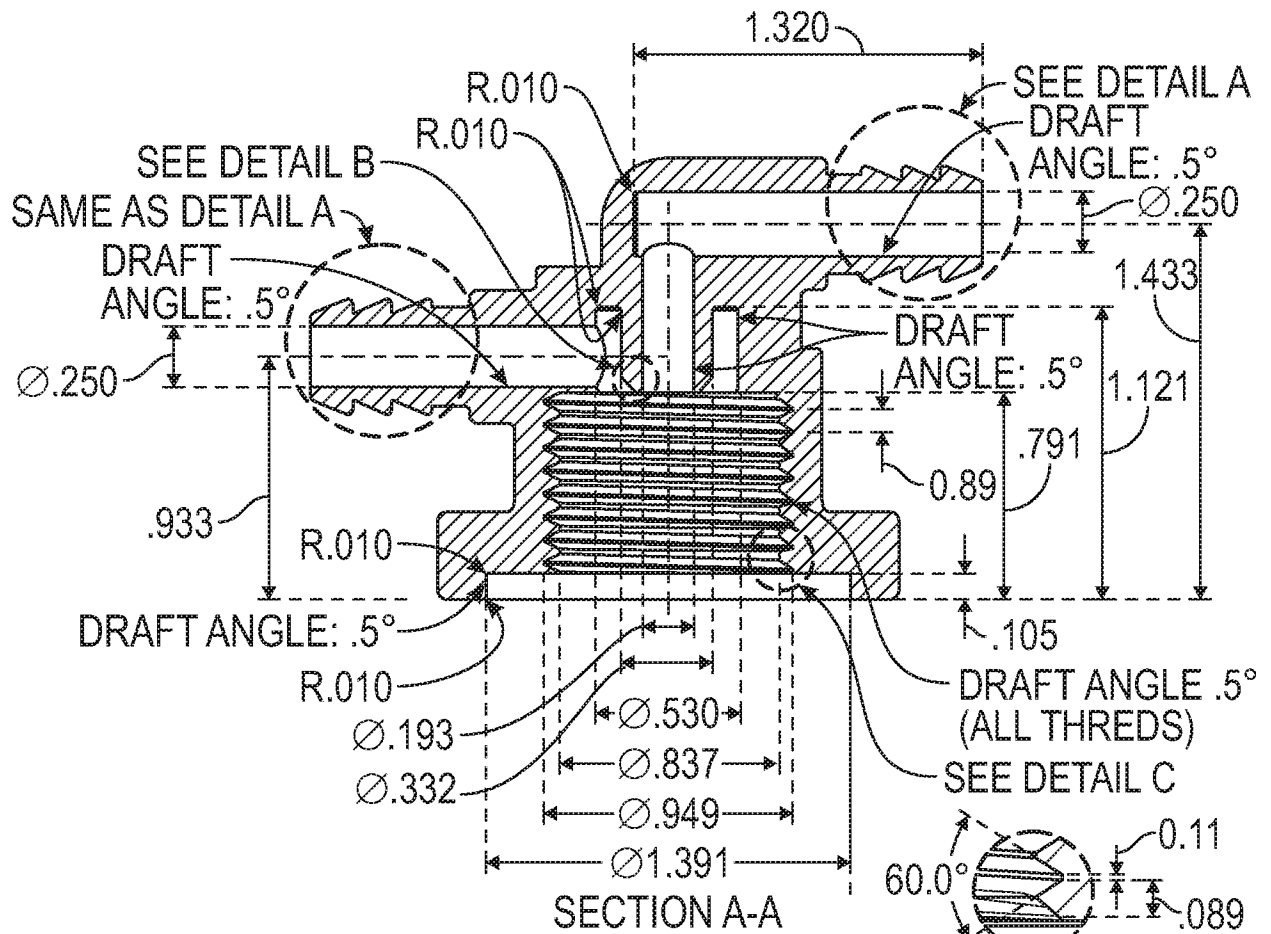


FIG. 8B



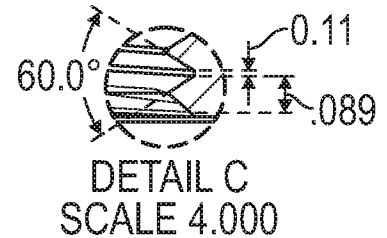


FIG. 8C

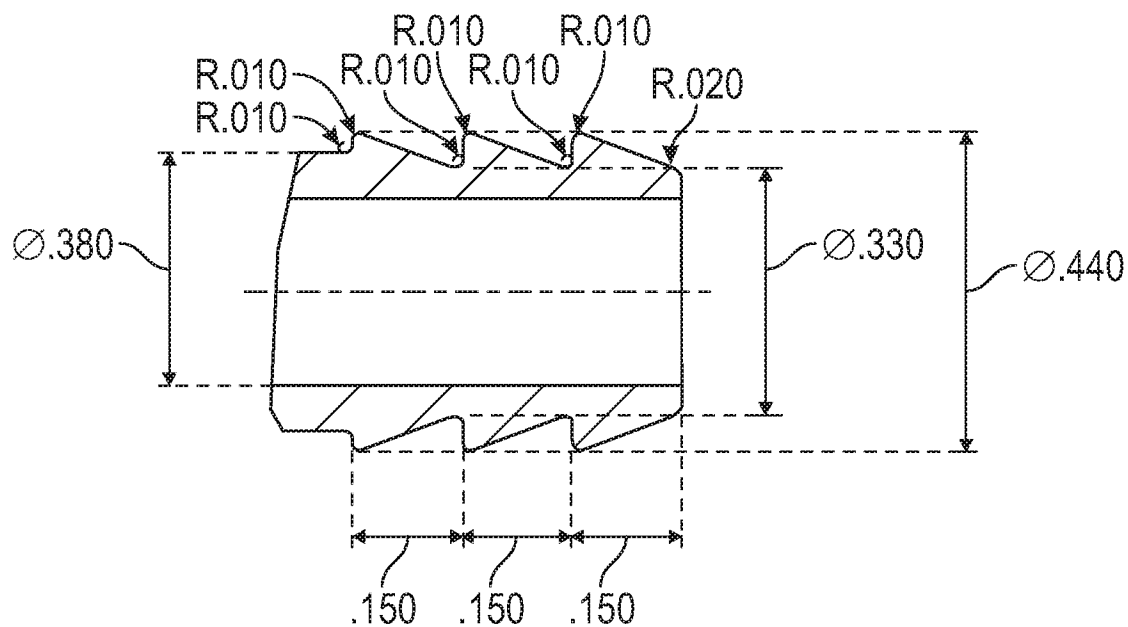

DETAIL A
SCALE 4.000

FIG. 8D

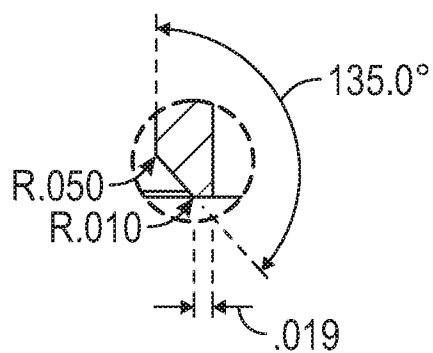

DETAIL B
SCALE 4.000

FIG. 8E

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US19/36451

A. CLASSIFICATION OF SUBJECT MATTER

IPC - A61H 33/02; B01F 3/04, 5/04; B05B 7/04 (2019.01)

CPC - A61H 33/027, 33/6021, 33/6063; B01F 3/04099, 5/0405; B05B 7/0416, 7/0441, 7/045

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

See Search History document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

See Search History document

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

See Search History document

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 88/08058 A1 (HENKIN M L et al) 20 October 1988; figure 11; page 2, lines 5-10; page 13, lines 1-35	1-16, 18-19
X	US 4,985,943 A (TOBIAS S et al) 22 January 1991; figures 2, 4, 7; column 4, lines 10-15	1-8, 11, 17-19
A	EP 0 557 233 A1 (IBERSPA, S.A.) 25 August 1993; entire document	1-19
A	US 5,809,648 A (KURTH M J et al) 22 September 1998; entire document	1-19
A	US 4,928,885 A (NAKAO H) 29 May 1990; entire document	1-19
A	DE 20 2015 008 977 U1 (WUSCHIK G) 6 September 2016; entire document	1-19

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents.

"A" document defining the general state of the art which is not considered to be of particular relevance

"D" document cited by the applicant in the international application

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

07 August 2019 (07.08.2019)

Date of mailing of the international search report

29 August 2019 (29.08.2019)

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Shane Thomas

Telephone No. PCT Helpdesk: 571-272-4300