



(51) International Patent Classification:

G02F 1/167 (2006.01) G02F 1/1676 (2019.01)

(21) International Application Number:

PCT/US2020/060370

(22) International Filing Date:

13 November 2020 (13.11.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/935,455 14 November 2019 (14.11.2019) US

(71) Applicant: **E INK CORPORATION** [US/US]; Attn: IP Department, 1000 Technology Park Drive, Billerica, Massachusetts 01821-4165 (US).

(72) Inventors: **TELFER, Stephen J.**; c/o E Ink Corporation, 1000 Technology Park Drive, Billerica, Massachusetts

01821-4165 (US). **WHITESIDES, Thomas H.**; c/o E Ink Corporation, 1000 Technology Park Drive, Billerica, Massachusetts 01821-4165 (US).

(74) Agent: **BEAN, Brian D.**; c/o E Ink Corporation, 1000 Technology Park Drive, Billerica, Massachusetts 01821-4165 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(54) Title: ELECTRO-OPTIC MEDIA INCLUDING OPPOSITELY CHARGED PARTICLES AND VARIABLE TRANSMISSION DEVICE INCORPORATING THE SAME

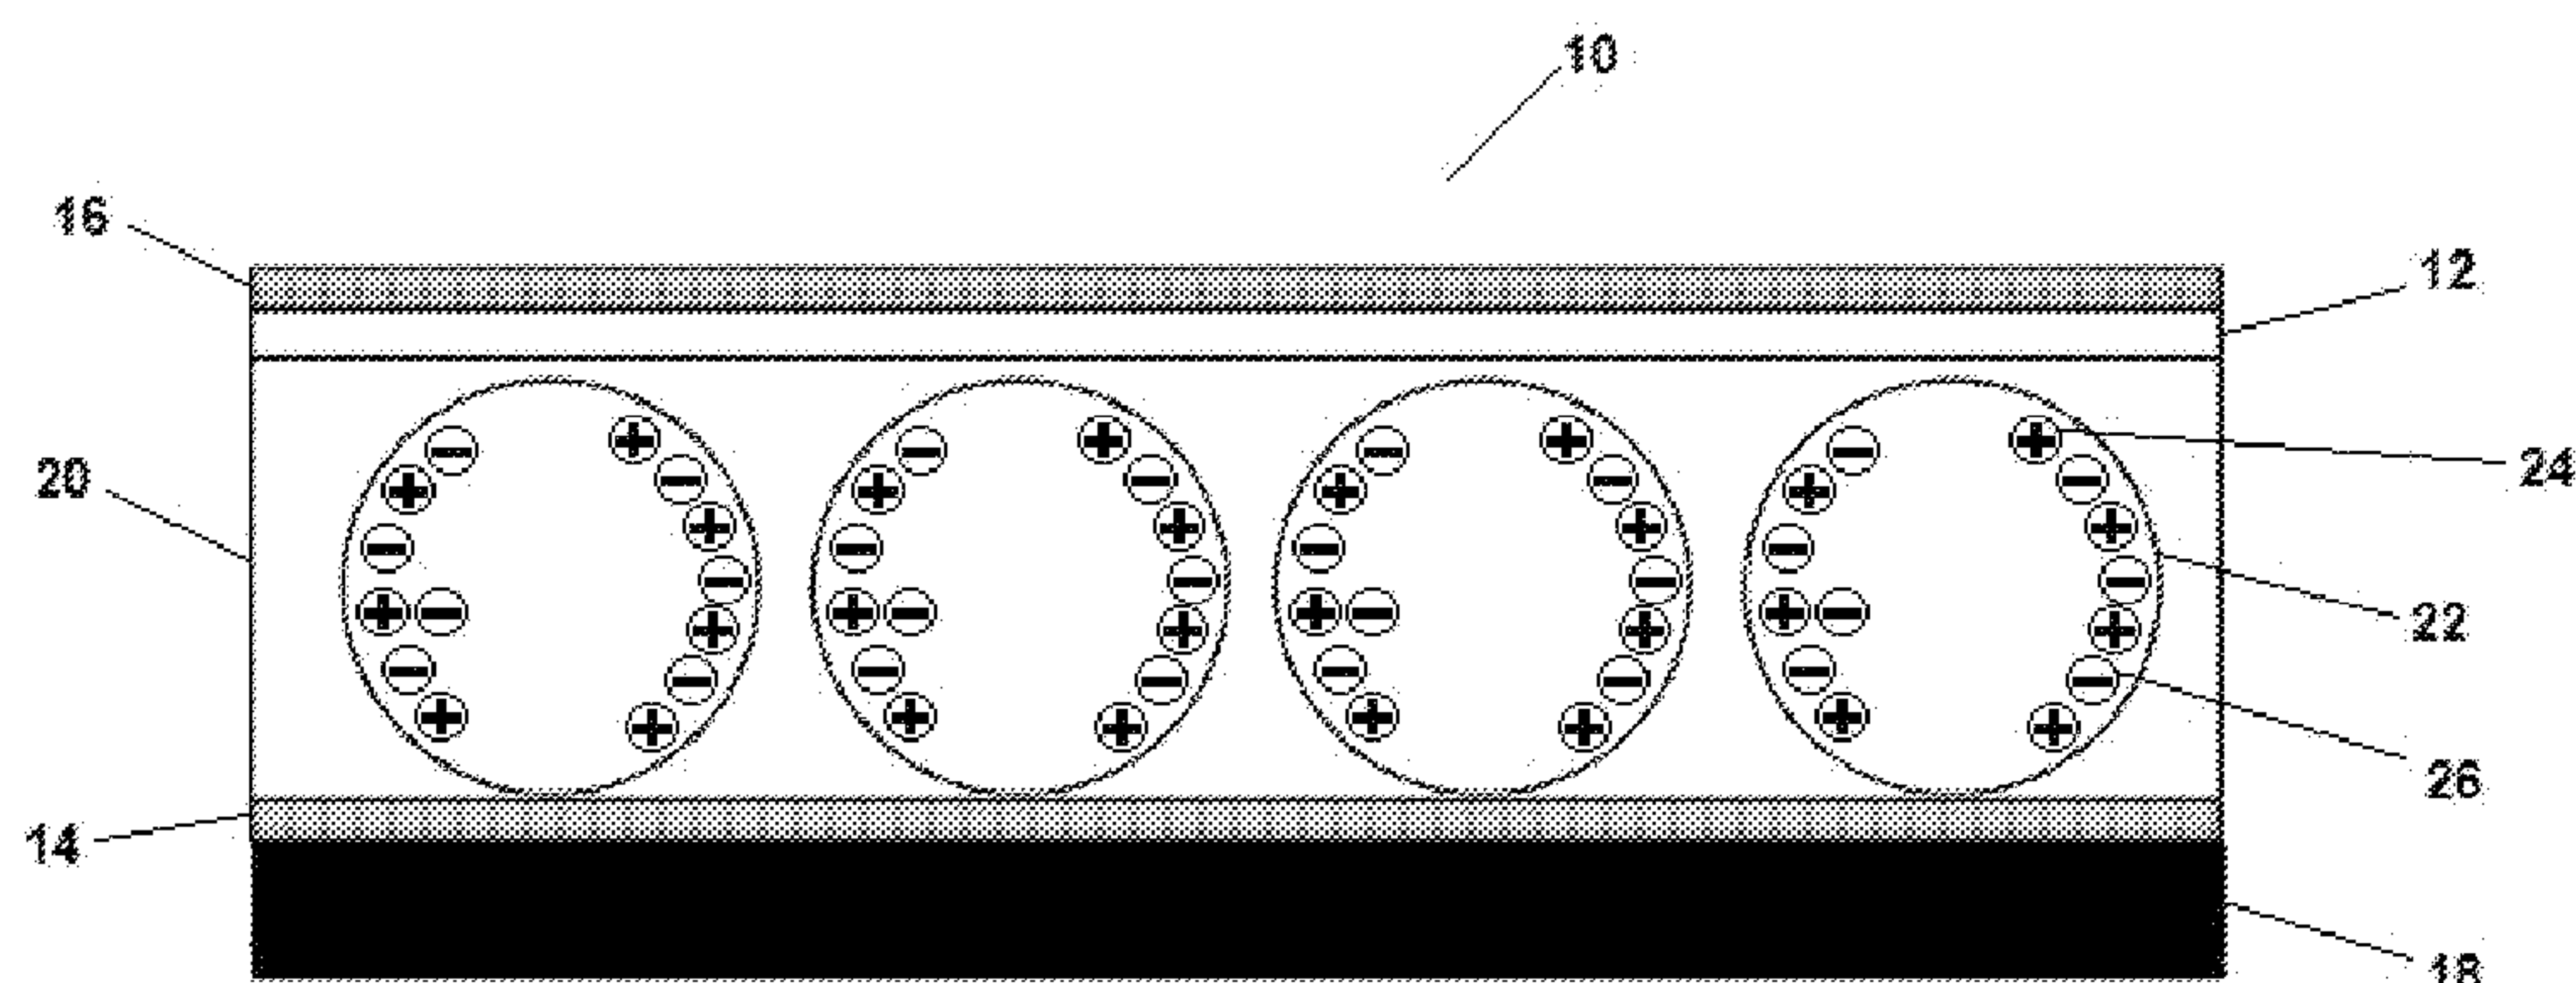


Figure 3

(57) Abstract: A variable transmission electro-optic medium includes an encapsulated bistable dispersion containing a plurality of electrically charged particles and a fluid, the charged particles being movable by application of an electric field and capable of being switched between an open state and a closed state. The plurality of electrically charged particles may include a first set of charged particles and a second set of charged particles, such that a color of the first set of charged particles is the same as a color of the second set of charged particles, and the first set of charged particles has a polarity that is opposite to a polarity of the second set of charged particles.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*

ELECTRO-OPTIC MEDIA INCLUDING OPPOSITELY CHARGED PARTICLES AND VARIABLE TRANSMISSION DEVICE INCORPORATING THE SAME

RELATED APPLICATIONS

[Para 1] This application claims priority to U.S. Provisional Application No. 62/935,455, filed November 14, 2019. All patents and publications disclosed herein are incorporated by reference in their entireties.

BACKGROUND OF INVENTION

[Para 2] Light modulators represent a potentially important market for electro-optic media. As the energy performance of buildings and vehicles becomes increasingly important, electro-optic media can be used as coatings on windows (including skylights and sunroofs) to enable the proportion of incident radiation transmitted through the windows to be electronically controlled by varying the optical state of the electro-optic media. Effective implementation of such "variable-transmissivity" ("VT") technology in buildings is expected to provide (1) reduction of unwanted heating effects during hot weather, thus reducing the amount of energy needed for cooling, the size of air conditioning plants, and peak electricity demand; (2) increased use of natural daylight, thus reducing energy used for lighting and peak electricity demand; and (3) increased occupant comfort by increasing both thermal and visual comfort. Even greater benefits would be expected to accrue in an automobile, where the ratio of glazed surface to enclosed volume is significantly larger than in a typical building. Specifically, effective implementation of VT technology in automobiles is expected to provide not only the aforementioned benefits but also (1) increased motoring safety, (2) reduced glare, (3) enhanced mirror performance (by using an electro-optic coating on the mirror), and (4) increased ability to use heads-up displays. Other potential applications of VT technology include privacy glass and glare-guards in electronic devices.

[Para 3] U.S. Patent No. 7,327,511 describes variable transmission devices including charged pigment particles that are distributed in a non-polar solvent and encapsulated. These variable transmission devices can be driven to an open state with an AC driving voltage whereby the charged pigment particles are driven to the capsule walls. Accordingly, such variable transmission devices are useful for viewing surfaces where it is desirable to alter the transmissivity at will, such as privacy glass, sunroofs, and windows on buildings.

[Para 4] The '511 patent describes various factors which are important in adapting electrophoretic media for optimum performance in variable transmission devices. One important factor is minimizing haze. In this application, "haze" refers to the percentage of diffuse transmitted light (light that is scattered as it is transmitted), compared to total transmitted light. When using encapsulated electro-optic media, the haze can be reduced by index-matching the binder to be as close as possible to the index of refraction of the capsules retaining the switching medium.

[Para 5] Another property of electrophoretic media is bistability. The terms "bistable" and "bistability" are used herein in their conventional meaning in the art to refer to displays comprising display elements having first and second display states differing in at least one optical property, and such that after any given element has been driven, by means of an addressing pulse of finite duration, to assume either its first or second display state, after the addressing pulse has terminated, that state will persist for at least several times, for example at least four times, the minimum duration of the addressing pulse required to change the state of the display element. It is shown in U.S. Patent No. 7,170,670 that some particle-based electrophoretic displays capable of gray scale are stable not only in their extreme black and white states but also in their intermediate gray states, and the same is true of some other types of electro-optic displays. This type of display is properly called "multi-stable" rather than bistable, although for convenience the term "bistable" may be used herein to cover both bistable and multi-stable displays.

[Para 6] One method of maintaining the bistability of an electrophoretic medium is to ensure a weak attractive force between particles is present. For example, the aforementioned U.S. Pat. No. 7,170,670 describes an electrophoretic medium in which weak flocculation of particles is achieved by the addition to the fluid of a high molecular weight polymer, such as polyisobutylene, that is believed to cause depletion flocculation of the electrophoretic particles. Although this approach can give substantial improvements in bistability, the addition of the polymer to the fluid inevitably increases the viscosity of the fluid, and hence increases the switching time of the display, since the increased viscosity of the fluid reduces the rate of movement of the electrophoretic particles at any given electric field. A high concentration of the high molecular weight polymer also contributes to haze.

[Para 7] Thus, there is a need for improved bistable formulations of electrophoretic media that may be used in variable transmission devices.

SUMMARY OF INVENTION

[Para 8] In one aspect, a variable transmission electro-optic medium comprises an encapsulated bistable dispersion containing a plurality of electrically charged particles and a fluid, the charged particles being movable by application of an electric field and capable of being switched between an open state and a closed state. The plurality of electrically charged particles comprise a first set of charged particles and a second set of charged particles, such that a color of the first set of charged particles is the same as a color of the second set of charged particles, and the first set of charged particles has a polarity that is opposite to a polarity of the second set of charged particles.

[Para 9] In some embodiments, the variable transmission electro-optic medium comprises less than 10% of a stabilizing agent by weight of the dispersion. For example, the dispersion may be free of the stabilizing agent, which may be polyisobutylene, polystyrene, or poly(lauryl)methacrylate. In some embodiments, the color of first and second set of charged particles is selected from the group consisting of red, green, blue, cyan, magenta, yellow, white, and black. In some embodiments, the fluid is colorless. In some embodiments, the fluid is a color selected from the group consisting of red, green, blue, cyan, magenta, yellow, black and white. In some embodiments, a weight ratio of the first set of charged particles to the second set of charged particles within the dispersion is greater than 1.0. In some embodiments, the dispersion is encapsulated within a plurality of capsules and the medium further comprises a binder. In some embodiments, the variable transmission electro-optic medium is disposed between two light-transmissive electrodes. In some embodiments, the variable transmission electro-optic medium includes a polymeric sheet comprising a plurality of sealed microcells and the dispersion is encapsulated within the plurality of sealed microcells. In some embodiments, the variable transmission electro-optic medium includes a continuous polymeric phase and the dispersion is provided in a plurality of droplets encapsulated in the continuous polymeric phase.

[Para 10] In a second aspect, a variable transmission electro-optic medium comprising an encapsulated bistable dispersion including a plurality of electrically charged particles and a fluid, the charged particles being movable by application of an electric field and capable of being switched between an open state and a closed state, wherein the plurality of electrically charged particles comprises a first set of charged particles and a second set of charged particles, the first set of charged particles being light-transmissive and having an index of refraction that matches the index of refraction of the fluid, and the second set of charged particles having a

charge polarity that is opposite to a polarity of the first set of charged particles. In some embodiments, the index of refraction of the fluid and the index of refraction of the first set of charged particles is between 1.51 and 1.57 at 550 nm.

[Para 11] In some embodiments, the variable transmission electro-optic medium comprises less than 10% of a stabilizing agent by weight of the dispersion. For example, the dispersion may be free of the stabilizing agent, which may be polyisobutylene, polystyrene, or poly(lauryl)methacrylate. In some embodiments, the color of the second set of charged particles is selected from the group consisting of red, green, blue, cyan, magenta, yellow, white, and black. In some embodiments, the fluid is colorless. In some embodiments, a weight ratio of the first set of charged particles to the second set of charged particles within the dispersion is greater than 1.0. In some embodiments, the dispersion is encapsulated within a plurality of capsules and the medium further comprises a binder. In some embodiments, the variable transmission electro-optic medium is disposed between two light-transmissive electrodes. In some embodiments, the variable transmission electro-optic medium includes a polymeric sheet comprising a plurality of sealed microcells and the dispersion is encapsulated within the plurality of sealed microcells. In some embodiments, the variable transmission electro-optic medium includes a continuous polymeric phase and the dispersion is provided in a plurality of droplets encapsulated in the continuous polymeric phase.

[Para 12] These and other aspects of the present invention will be apparent in view of the following description.

BRIEF DESCRIPTION OF DRAWINGS

[Para 13] The drawing Figures depict one or more implementations in accord with the present concepts, by way of example only, not by way of limitations. The drawings are not to scale. In the figures, like reference numerals refer to the same or similar elements.

[Para 14] Figure 1 is a schematic cross-sectional side view of an electro-optic display in a closed state according to an embodiment of the invention.

[Para 15] Figure 2 is a schematic cross-sectional side view of the electro-optic display of Figure 1 in an intermediate state.

[Para 16] Figure 3 is a schematic cross-sectional side view of the electro-optic display of Figure 1 in an open state.

DETAILED DESCRIPTION

[Para 17] In the following detailed description, numerous specific details are set forth by way of examples in order to provide a thorough understanding of the relevant teachings. However, it should be apparent to those skilled in the art that the present teachings may be practiced without such details.

[Para 18] Generally, the various embodiments of the present invention provide electrophoretic media that may be incorporated into a variable transmission electro-optic device. In one embodiment, the electrophoretic media includes a bistable dispersion containing a plurality of charged particles having opposite charge polarity, but the same or substantially similar optical properties, such as color. The term "electro-optic", as applied to a material or a device, is used herein in its conventional meaning in the imaging art to refer to a material having first and second display states differing in at least one optical property, the material being changed from its first to its second display state by application of an electric field to the material.

[Para 19] Referring now to Figure 1, a variable transmission electro-optic device 10 containing a electrophoretic medium according to a first embodiment of the present invention is illustrated. The top layer 16 comprises a layer of light transmissive conductive material and may also include a light-transmissive protective sheet. For example, top layer 16 may comprise a glass or more preferably a flexible plastic sheet, such as polyethylene terephthalate, that is coated with a thin layer of a conductive material, such as a conductive metal, e.g. indium tin oxide, or a conductive polymer, e.g. PEDOT:PSS, for example. The term "light-transmissive" is used herein with respect to the various layers of the display to mean that the layer thus designated transmits sufficient light to enable an observer, looking through that layer, to observe the change in display states of the electro-optic medium, which will normally be viewed through the electrically-conductive layer and adjacent substrate (if present); in cases where the electro-optic medium displays a change in reflectivity at non-visible wavelengths, the term "light-transmissive" should of course be interpreted to refer to transmission of the relevant non-visible wavelengths.

[Para 20] Below the top layer 16 is a layer of electrophoretic medium 20. Devices utilizing particle-based electrophoretic media can have attributes of good brightness and contrast, wide viewing angles, state bistability, and low power consumption when compared with liquid crystal displays, for example. The electrophoretic materials used in the various embodiments of the present invention are preferably solid in the sense that the materials have solid external

surfaces, although the materials may, and often do, have internal liquid- or gas-filled spaces, and is preferably an encapsulated electrophoretic material.

[Para 21] The electrophoretic material is preferably bistable. The terms "bistable" and "bistability" are used herein in their conventional meaning in the art to refer to displays comprising display elements having first and second display states differing in at least one optical property, and such that after any given element has been driven, by means of an addressing pulse of finite duration, to assume either its first or second display state, after the addressing pulse has terminated, that state will persist for at least several times, for example at least four times, the minimum duration of the addressing pulse required to change the state of the display element.

[Para 22] A layer comprising a second light transmissive electrode 14 is located on an opposing side of the layer of electrophoretic medium 20 relative to the first electrode 16. The electrode layers apply a potential across the layer of electrophoretic medium, so that the medium switches between an open state (light-transmissive) and a closed state (opaque) upon application of an electric field in a so-called "shutter mode." See, for example, U.S. Patents Nos. 5,872,552; 6,130,774; 6,144,361; 6,172,798; 6,271,823; 6,225,971; and 6,184,856.

[Para 23] The electrode layers may be provided in several forms. For example, the electrode layer may be a continuous layer of conductive material. Alternatively, the electrodes may be divided into a plurality of segments of conductive material, such that each segment is independently controllable. In another embodiment, one or both of the electrode layers may be patterned to define the pixels of the display. For example, one electrode layer may be patterned into elongate row electrodes and the other into elongate column electrodes running at right angles to the row electrodes, the pixels being defined by the intersections of the row and column electrodes. Alternatively, and more commonly, one electrode layer has the form of a single continuous electrode and the other electrode layer is patterned into a matrix of pixel electrodes, each of which may be independently addressed and defines one pixel of the device.

[Para 24] A substrate layer 18 may be provided as the bottom layer. The substrate 18 may comprise a temporary release sheet, which will be described in greater detail below, but the bottom substrate 16 is preferably another light transmissive protective sheet that may be the same or similar to the protective sheet incorporated in the top electrode layer 16 in the final manufactured device 10. In some embodiments, the substrate 18 is a light-transmissive supporting substrate, such as glass or a clear polymer. In some embodiments, the electro-optic

device 10 will be disposed between two panes of glass, therefore providing a window whose transmission can be controlled electronically.

[Para 25] As illustrated in Figure 1, when a DC field is applied to the device, the charged particles 24, 26 within a capsule 22 move toward one of the two electrodes 14, 16 depending on the polarity and magnitude of the applied electric field. For example in Figure 1, the first set of particles 24 having a positive polarity are attracted to the top electrode 16, while the second set of particles 26 having a negative polarity are attracted to the bottom electrode 14, thereby changing the optical state of the device 10 to opaque and preventing light from being transmitted through the layer of electro-optic medium 20.

[Para 26] Briefly switching the polarity of the electric field applied by the electrodes 14, 16 should allow the particles 24, 26 to mix in the middle of the capsules 22, as illustrated in Figure 2. This will allow positively charged particles 24 to form hetero-agglomerations with negatively charged particles 26, thereby switching the device 10 to an intermediate optical state, wherein the amount of light that is able to be transmitted through the layer of electrophoretic media 20 is greater than the closed state.

[Para 27] Now referring to Figure 3, when an alternating electric field is applied to one of the electrodes 14, 16, the charged pigment particles 24, 26 may also mix and hetero-agglomerate similar to the intermediate state illustrated in Figure 2, but the hetero-agglomerations of particles 24, 26 will also be driven to the side walls of the capsules 22, resulting in an aperture through the capsules 22 for the transmission of light through the layer of electrophoretic medium 20, thereby switching the device 10 to an open state.

[Para 28] As noted above, the electro-optic medium used in the various embodiments of the present invention is preferably an encapsulated electrophoretic medium. Numerous patents and applications assigned to or in the names of the Massachusetts Institute of Technology (MIT), E Ink Corporation, E Ink California, LLC and related companies describe various technologies used in encapsulated electrophoretic and other electro-optic media. Encapsulated electrophoretic media comprise numerous small capsules, each of which itself comprises an internal phase containing electrophoretically-mobile particles in a fluid medium, and a capsule wall surrounding the internal phase. Typically, the capsules are themselves held within a polymeric binder to form a coherent layer positioned between two electrodes. Alternatively, the charged particles and the fluid are not encapsulated within microcapsules, but instead are retained within a plurality of cavities formed within a carrier medium, typically a polymeric film. The technologies described in these patents and applications include:

- (a) Electrophoretic particles, fluids and fluid additives; see for example U.S. Patents Nos. 7,002,728 and 7,679,814;
- (b) Capsules, binders and encapsulation processes; see for example U.S. Patents Nos. 6,922,276 and 7,411,719;
- (c) Microcell structures, wall materials, and methods of forming microcells; see for example United States Patents Nos. 7,072,095 and 9,279,906;
- (d) Methods for filling and sealing microcells; see for example United States Patents Nos. 7,144,942 and 7,715,088;
- (e) Films and sub-assemblies containing electro-optic materials; see for example U.S. Patents Nos. 6,982,178 and 7,839,564;
- (f) Backplanes, adhesive layers and other auxiliary layers and methods used in displays; see for example U.S. Patents Nos. 7,116,318 and 7,535,624;
- (g) Color formation and color adjustment; see for example U.S. Patents Nos. 7,075,502 and 7,839,564;
- (h) Methods for driving displays; see for example U.S. Patents Nos. 7,012,600 and 7,453,445;
- (i) Applications of displays; see for example U.S. Patents Nos. 7,312,784 and 8,009,348; and
- (j) Non-electrophoretic displays, as described in U.S. Patent No. 6,241,921 and U.S. Patent Applications Publication No. and 2015/0277160; and applications of encapsulation and microcell technology other than displays; see for example U.S. Patent Application Publications Nos. 2015/0005720 and 2016/0012710.

[Para 29] Many of the aforementioned patents and applications recognize that the walls surrounding the discrete microcapsules in an encapsulated electrophoretic medium could be replaced by a continuous phase, thus producing a so-called polymer-dispersed electrophoretic display, in which the electrophoretic medium comprises a plurality of discrete droplets of an electrophoretic fluid and a continuous phase of a polymeric material, and that the discrete droplets of electrophoretic fluid within such a polymer-dispersed electrophoretic display may be regarded as capsules or microcapsules even though no discrete capsule membrane is associated with each individual droplet; see for example, the aforementioned U.S. Patent No. 6,866,760. Accordingly, for purposes of the present application, such polymer-dispersed electrophoretic media are regarded as sub-species of encapsulated electrophoretic media.

[Para 30] An encapsulated electrophoretic display typically does not suffer from the clustering and settling failure mode of traditional electrophoretic devices and provides further advantages, such as the ability to print or coat the display on a wide variety of flexible and rigid substrates. (Use of the word "printing" is intended to include all forms of printing and coating, including, but without limitation: pre-metered coatings such as patch die coating, slot or extrusion coating, slide or cascade coating, curtain coating; roll coating such as knife over roll coating, forward and reverse roll coating; gravure coating; dip coating; spray coating; meniscus coating; spin coating; brush coating; air knife coating; silk screen printing processes; electrostatic printing processes; thermal printing processes; ink jet printing processes; electrophoretic deposition (See U.S. Patent No. 7,339,715); and other similar techniques.) Thus, the resulting display can be flexible. Further, because the display medium can be printed (using a variety of methods), the display itself can be made inexpensively.

[Para 31] Whether encapsulated in a microcapsule, microcell, or droplet within a continuous polymeric phase, the dispersions containing the plurality of charged particles also contain a fluid, as well as other optional additives. The dispersion fluid is preferably a liquid, but electrophoretic media can be produced using gaseous fluids; see, for example, Kitamura, T., et al., "Electrical toner movement for electronic paper-like display", IDW Japan, 2001, Paper HCS1-1, and Yamaguchi, Y., et al., "Toner display using insulative particles charged triboelectrically", IDW Japan, 2001, Paper AMD4-4). See also U.S. Patents Nos. 7,321,459 and 7,236,291.

[Para 32] The charged pigment particles may be of a variety of colors and compositions. In some embodiments, all of the charged particles, regardless of charge polarity, may have the same or similar optical properties, such as color. In other embodiments, the first and second sets of oppositely charged particles may have different optical properties. In some embodiments, the first set of particles is colored (e.g., white, e.g., black) while the other set of particles is light-transmissive, and index-matched to meet the index of refraction of the internal phase of the electrophoretic medium. Additionally, the charged pigment particles may be functionalized with surface polymers to improve state stability. Such pigments are described in U.S. Patent No. 9,921,451, which is incorporated by reference in its entirety. For example, if the charged particles are of a white color, they may be formed from an inorganic pigment such as TiO₂, ZrO₂, ZnO, Al₂O₃, Sb₂O₃, BaSO₄, PbSO₄ or the like. They may also be polymer particles with a high refractive index (>1.5) and of a certain size (>100 nm) to exhibit a white color, to be substantially light-transmissive, or composite particles engineered to have

a desired index of refraction. Such particles may include, for example, poly(pentabromophenyl methacrylate), poly(2-vinylnaphthalene), poly(naphthyl methacrylate), poly(α-methylstyrene), poly(N-benzyl methacrylamide) or poly(benzyl methacrylate). Black charged particles, they may be formed from CI pigment black 26 or 28 or the like (e.g., manganese ferrite black spinel or copper chromite black spinel) or carbon black. Other colors (non-white and non-black) may be formed from organic pigments such as CI pigment PR 254, PR122, PR149, PG36, PG58, PG7, PB28, PB15:3, PY83, PY138, PY150, PY155 or PY20. Other examples include Clariant Hostaperm Red D3G 70-EDS, Hostaperm Pink E-EDS, PV fast red D3G, Hostaperm red D3G 70, Hostaperm Blue B2G-EDS, Hostaperm Yellow H4G-EDS, Novoperm Yellow HR-70-EDS, Hostaperm Green GNX, BASF Irgazine red L 3630, Cinquasia Red L 4100 HD, and Irgazin Red L 3660 HD; Sun Chemical phthalocyanine blue, phthalocyanine green, diarylide yellow or diarylide AAOT yellow. Color particles can also be formed from inorganic pigments, such as CI pigment blue 28, CI pigment green 50, CI pigment yellow 227, and the like. The surface of the charged particles may be modified by known techniques based on the charge polarity and charge level of the particles required, as described in U.S. Pat. Nos. 6,822,782, 7,002,728, 9,366,935, and 9,372,380 as well as US Publication No. 2014-0011913, the contents of all of which are incorporated herein by reference in their entireties.

[Para 33] The particles may exhibit a native charge, or may be charged explicitly using a charge control agent, or may acquire a charge when suspended in a solvent or solvent mixture. Suitable charge control agents are well known in the art; they may be polymeric or non-polymeric in nature or may be ionic or non-ionic. Examples of charge control agent may include, but are not limited to, Solsperse 17000 (active polymeric dispersant), Solsperse 9000 (active polymeric dispersant), OLOA® 11000 (succinimide ashless dispersant), Unithox 750 (ethoxylates), Span 85 (sorbitan trioleate), Petronate L (sodium sulfonate), Alcolac LV30 (soy lecithin), Petrostep B100 (petroleum sulfonate) or B70 (barium sulfonate), Aerosol OT, polyisobutylene derivatives or poly(ethylene co-butylene) derivatives, and the like. In addition to the suspending fluid and charged pigment particles, internal phases may include stabilizers, surfactants and charge control agents. A stabilizing material may be adsorbed on the charged pigment particles when they are dispersed in the solvent. This stabilizing material keeps the particles separated from one another so that the variable transmission medium is substantially non-transmissive when the particles are in their dispersed state.

[Para 34] As is known in the art, dispersing charged particles (typically a carbon black, as described above) in a solvent of low dielectric constant may be assisted by the use of a surfactant. Such a surfactant typically comprises a polar "head group" and a non-polar "tail group" that is compatible with or soluble in the solvent. In the present invention, it is preferred that the non-polar tail group be a saturated or unsaturated hydrocarbon moiety, or another group that is soluble in hydrocarbon solvents, such as for example a poly(dialkylsiloxane). The polar group may be any polar organic functionality, including ionic materials such as ammonium, sulfonate or phosphonate salts, or acidic or basic groups. Particularly preferred head groups are carboxylic acid or carboxylate groups. In some embodiments, dispersants, such as polyisobutylene succinimide and/or sorbitan trioleate, and/or 2-hexyldecanoic acid are added.

[Para 35] The dispersion may contain one or more stabilizers. Stabilizers suitable for use in the dispersions made according to the various embodiments of the present invention include, but are not limited to, polyisobutylene and polystyrene. However, only a relatively low concentration of stabilizer may be necessary. A low concentration of stabilizer may assist in maintaining the media in the closed (opaque) or intermediate state, but the size of the heteroagglomerates of the oppositely charged particles in the open state would be effectively stable without the presence of a stabilizer. For example, the dispersions incorporated in the various embodiments of the present invention may contain, with increasing preference in the amounts listed, less than or equal to 10%, 9%, 8%, 7%, 6%, 5%, 4%, 3%, 2%, and 1% stabilizer based on the weight of the dispersion. In some embodiments, the dispersion may be free of stabilizer.

[Para 36] In some embodiments, the concentration of stabilizer may also be reduced by providing a dispersion in which the concentration of a first set of charged particles is greater than the concentration of a second set of charged particles having an opposite polarity and encapsulating the dispersion in a charged microcapsule. For example, in one embodiment, a dispersion may be prepared having a first set of positively charged particles and a second set of negatively charged particles, wherein the concentration of the first set of positively charged particles is greater than the negatively charged particles. When the dispersion is encapsulated in a microcapsule having a negatively charged capsule wall and switched to an open state, the heteroagglomerates may have a net positive charge because of the presence of more positively charged particles within the heteragglomerates. As a result, the heteroagglomerates will be attracted to the negatively charged capsule wall, thereby improving the stability of the open state when an electric field is removed. The weight ratio of the first set of charged particles to the second set of charged particles within the dispersion may be greater than 1.0, more

preferably, with increasing preference in the ratios listed, greater than or equal to 1.5, 2.0, 2.5, 3.0, 3.5, 4.0, 4.5, 5.0, 10.0, and 20.0.

[Para 37] The fluids used in the variable transmission media of the present invention will typically be of low dielectric constant (preferably less than 10 and desirably less than 3). The fluids are preferably solvents that have low viscosity, relatively high refractive index, low cost, low reactivity, and low vapor pressure/ high boiling point. The fluids are preferably light transmissive and may or not have an optical property, such as color (e.g. red, green, blue, cyan, magenta, yellow, white, and black), that differs from the optical properties of at least one of the sets of charged particles of the dispersion. Examples of solvents include, but are not limited to, aliphatic hydrocarbons such as heptane, octane, and petroleum distillates such as Isopar ® (Exxon Mobil) or Isane® (Total); terpenes such as limonene, e.g., l-limonene; and aromatic hydrocarbons such as toluene. A particularly preferred solvent is limonene, since it combines a low dielectric constant (2.3) with a relatively high refractive index (1.47). The index of refraction of the internal phase may be modified with the addition of the index matching agents. For example, the aforementioned United States Patent No. 7,679,814 describes an electrophoretic medium suitable for use in a variable transmission device in which the fluid surrounding the electrophoretic particles comprises a mixture of a partially hydrogenated aromatic hydrocarbon and a terpene, a preferred mixture being d-limonene and a partially hydrogenated terphenyl, available commercially as Cargille® 5040 from Cargille-Sacher Laboratories, 55 Commerce Rd, Cedar Grove N.J. 07009. In the encapsulated media made according to various embodiments of the present invention, it is preferred that the refractive index of the encapsulated dispersion match as closely as possible to that of the encapsulating material to reduce haze. In most instances, it is beneficial to have an internal phase with an index of refraction between 1.51 and 1.57 at 550 nm, preferably about 1.54 at 550 nm. In embodiments using a light-transmissive particle that is index matched to the internal phase, the light-transmissive particle will also have an index of refraction between 1.51 and 1.57 at 550 nm, preferably about 1.54 at 550 nm.

[Para 38] In a preferred embodiment of the present invention, the encapsulated fluid may comprise one or more nonconjugated olefinic hydrocarbons, preferably cyclic hydrocarbons. Examples of nonconjugated olefinic hydrocarbons include, but are not limited to terpenes, such as limonene; phenyl cyclohexane; hexyl benzoate; cyclododecatriene; 1,5-dimethyl tetralin; partially hydrogenated terphenyl, such as Cargille® 5040; phenylmethylosiloxane oligomer; and combinations thereof. A most preferred composition for the encapsulated fluid according to

an embodiment of the present invention comprises cyclododecatriene and a partially hydrogenated terphenyl.

[Para 39] In some embodiments of the invention, the amount of stabilizing agent included in the encapsulated fluid may be lower than is traditionally used in electrophoretic displays. See, for contrast, U.S. Patent No. 7,170,670. Such stabilizing agents may be large molecular weight free polymers such as polyisobutylene, polystyrene, or poly(lauryl)methacrylate. Accordingly, in some embodiments, the encapsulated fluid (i.e., dispersion) further comprises less than 10% of a stabilizing agent by weight of the dispersion. In some embodiments, the dispersion is free of the stabilizing agent. It is found that by reducing the presence of large molecular-weight polymers, the haze is improved, making the final product more pleasing.

[Para 40] Electrophoretic media comprising microcapsules also generally include a binder to assist in the coating of the electrophoretic media onto a substrate. A mixture of fish gelatin and a polyanion, such as acacia has been found to be an excellent binder for use with capsules formed from a coacervate of (pig) gelatin and acacia. Polyanions that may be included in the binder with fish gelatin include, but are not limited to, carbohydrate polymers, such as starch and cellulose derivatives, plant extracts (e.g. acacia), and polysaccharides (e.g. alginate); proteins, such as gelatin or whey protein; lipids, such as waxes or phospholipids; and combinations thereof.

[Para 41] The gelatin-based capsule walls have been described in many of the E Ink and MIT patents and applications mentioned above. The gelatin is available from various commercial suppliers, such as Sigma Aldrich or Gelitia USA. It can be obtained in a variety of grades and purity depending upon the needs of the application. Gelatin primarily comprises collagen that has been collected from animal products (cow, pig, poultry, fish) and hydrolyzed. It comprises a mixture of peptides and proteins. In many of the embodiments described herein, the gelatin is combined with acacia (gum arabic), which is derived from the hardened sap of the acacia tree. Acacia is a complex mixture of glycoproteins and polysaccharides, and it is often used as a stabilizer in foodstuffs. The pH of aqueous solutions of acacia and gelatin can be tuned to form a polymer-rich coacervate phase that can encapsulate droplets of a non-polar internal phase.

[Para 42] Capsules incorporating gelatin/acacia may be prepared as follows; see, for example U.S. Patent No. 7,170,670, incorporated by reference in its entirety. In this process, an aqueous mixture of gelatin and/or acacia is emulsified with a hydrocarbon internal phase (or other water-immiscible phase which it is desired to encapsulate) to encapsulate the internal phase. The

solution may be heated to 40 °C prior to emulsification - to dissolve the gelatin. The pH is typically lowered to form a coacervate after the desired drop size distribution is achieved. Capsules are formed upon controlled cooling and mixing of the emulsion - typically to room temperature or lower. Proper mixing and certain encapsulation formulations (e.g. gelatin & acacia concentrations & pH) to discretely gel the coacervate around the internal phase droplets in a uniform manner are achieved if the wetting and spreading conditions are correct, which is largely dictated by the internal phase composition. The process yields capsules in the range of 20-100 μ m and often incorporates over 50 per cent of the starting materials into useable capsules. The capsules produced are then separated by size by sieving or other size exclusion sorting.

[Para 43] The manufacture of a multi-layer electro-optic display normally involves at least one lamination operation. For example, in several of the aforementioned MIT and E Ink patents and applications, there is described a process for manufacturing an encapsulated electrophoretic display in which an encapsulated electrophoretic medium comprising capsules in a binder is coated on to a flexible substrate comprising indium-tin-oxide (ITO) or a similar conductive coating (which acts as one electrode of the final display) on a plastic film, the capsules/binder coating being dried to form a coherent layer of the electrophoretic medium firmly adhered to the substrate. Separately, a backplane, containing the second electrode layer and an appropriate arrangement of conductors to connect the electrodes to drive circuitry, is prepared. To form the final display, the substrate having the capsule/binder layer thereon is laminated to the backplane using a lamination adhesive. In one preferred form of such a process, the backplane is itself flexible and is prepared by printing the electrodes and conductors on a plastic film or other flexible substrate. The obvious lamination technique for mass production of displays by this process is roll lamination using a lamination adhesive.

[Para 44] The aforementioned U.S. Patent No. 6,982,178 describes a method of assembling a solid electro-optic display (including an encapsulated electrophoretic display) which is well adapted for mass production. Essentially, this patent describes a so-called "front plane laminate" ("FPL") which comprises, in order, a light-transmissive electrically-conductive layer; a layer of a solid electro-optic medium in electrical contact with the electrically-conductive layer; an adhesive layer; and a release sheet. Typically, the light-transmissive electrically-conductive layer will be carried on a light-transmissive substrate, which is preferably flexible, in the sense that the substrate can be manually wrapped around a drum (say) 10 inches (254 mm) in diameter without permanent deformation. The substrate will

typically be a polymeric film, and will normally have a thickness in the range of about 1 to about 25 mil (25 to 634 μm), preferably about 2 to about 10 mil (51 to 254 μm). The electrically-conductive layer is conveniently a thin metal or metal oxide layer of, for example, aluminum or ITO, or may be a conductive polymer. Poly(ethylene terephthalate) (PET) films coated with aluminum or ITO are available commercially, for example as "aluminized Mylar" ("Mylar" is a Registered Trade Mark) from E.I. du Pont de Nemours & Company, Wilmington DE, and such commercial materials may be used with good results in the front plane laminate.

[Para 45] Assembly of an electro-optic display using such a front plane laminate may be effected by removing the release sheet from the front plane laminate and contacting the adhesive layer with the backplane under conditions effective to cause the adhesive layer to adhere to the backplane, thereby securing the adhesive layer, layer of electro-optic medium and electrically-conductive layer to the backplane. This process is well-adapted to mass production since the front plane laminate may be mass-produced, typically using roll-to-roll coating techniques, and then cut into pieces of any size needed for use with specific backplanes.

[Para 46] U.S. Patent No. 7,561,324 describes a so-called "double release sheet" which is essentially a simplified version of the front plane laminate of the aforementioned U.S. Patent No. 6,982,178. One form of the double release sheet comprises a layer of a solid electro-optic medium sandwiched between two adhesive layers, one or both of the adhesive layers being covered by a release sheet. Another form of the double release sheet comprises a layer of a solid electro-optic medium sandwiched between two release sheets. Both forms of the double release film are intended for use in a process generally similar to the process for assembling an electro-optic display from a front plane laminate already described, but involving two separate laminations; typically, in a first lamination the double release sheet is laminated to a front electrode to form a front sub-assembly, and then in a second lamination the front sub-assembly is laminated to a backplane to form the final display, although the order of these two laminations could be reversed if desired.

[Para 47] U. S. Patent No. 7,839,564 describes a so-called "inverted front plane laminate", which is a variant of the front plane laminate described in the aforementioned U.S. Patent No. 6,982,178. This inverted front plane laminate comprises, in order, at least one of a light-transmissive protective layer and a light-transmissive electrically-conductive layer; an adhesive layer; a layer of a solid electro-optic medium; and a release sheet. This inverted front plane laminate is used to form an electro-optic display having a layer of lamination adhesive between the electro-optic layer and the front electrode or front substrate; a second, typically

thin layer of adhesive may or may not be present between the electro-optic layer and a backplane. Such electro-optic displays can combine good resolution with good low temperature performance.

[Para 48] The lamination adhesive may be present between any of the layers of the display stack, and the presence of this lamination adhesive layer affects the electro-optic characteristics of the displays. In particular, the electrical conductivity of the lamination adhesive layer affects both the low temperature performance and the resolution of the display. The low temperature performance of the display can (it has been found empirically) be improved by increasing the conductivity of the lamination adhesive layer, for example by doping the layer with tetrabutylammonium hexafluorophosphate or other materials as described in the aforementioned U.S. Patent Nos. 7,012,735 and 7,173,752. In some embodiments, multiple layers of optically-clear adhesives may be used to maintain light transparency for the stack of light-transmissive electrodes, electro-optic medium, and supporting substrates.

[Para 49] While preferred embodiments of the invention have been shown and described herein, it will be understood that such embodiments are provided by way of example only. Numerous variations, changes, and substitutions will occur to those skilled in the art without departing from the spirit of the invention. Accordingly, it is intended that the appended claims cover all such variations as fall within the spirit and scope of the invention.

All of the contents of the aforementioned patents and applications are incorporated by reference herein in their entireties.

We claim:

1. A variable transmission electro-optic medium comprising an encapsulated bistable dispersion including a plurality of electrically charged particles and a fluid, the charged particles being movable by application of an electric field and capable of being switched between an open state and a closed state,
wherein the plurality of electrically charged particles comprise a first set of charged particles and a second set of charged particles, a color of the first set of charged particles is the same as a color of the second set of charged particles, and the first set of charged particles has a polarity that is opposite to a polarity of the second set of charged particles.
2. The variable transmission electro-optic medium of claim 1, wherein the dispersion further comprises less than 10% of a stabilizing agent by weight of the dispersion.
3. The variable transmission electro-optic medium of claim 2, wherein the dispersion is free of the stabilizing agent.
4. The variable transmission electro-optic medium of claim 2, wherein the stabilizing agent is selected from the group consisting of polyisobutylene and polystyrene.
5. The variable transmission electro-optic medium of claim 1, wherein the color of first and second set of charged particles is selected from the group consisting of red, green, blue, cyan, magenta, yellow, white, and black.
6. The variable transmission electro-optic medium of claim 1, wherein the fluid is colorless.
7. The variable transmission electro-optic medium of claim 1, wherein a color of the fluid is selected from the group consisting of red, green, blue, cyan, magenta, yellow, black and white.
8. The variable transmission electro-optic medium of claim 1, wherein a weight ratio of the first set of charged particles to the second set of charged particles within the dispersion is greater than 1.0.

9. The variable transmission electro-optic medium of claim 1, wherein the dispersion is encapsulated within a plurality of capsules and the medium further comprises a binder.
10. A device comprising a layer of the variable transmission electro-optic medium of claim 9 disposed between two light-transmissive electrodes.
11. The variable transmission electro-optic medium of claim 1 further comprising a polymeric sheet comprising a plurality of sealed microcells and the dispersion is encapsulated within the plurality of sealed microcells.
12. A device comprising a layer of the variable transmission electro-optic medium of claim 11 disposed between two light-transmissive electrodes.
13. The variable transmission electro-optic medium of claim 1 further comprising a continuous polymeric phase and the dispersion is provided in a plurality of droplets encapsulated in the continuous polymeric phase.
14. A device comprising a layer of the variable transmission electro-optic medium of claim 13 disposed between two light-transmissive electrodes.
15. A variable transmission electro-optic medium comprising an encapsulated bistable dispersion including a plurality of electrically charged particles and a fluid, the charged particles being movable by application of an electric field and capable of being switched between an open state and a closed state,
wherein the plurality of electrically charged particles comprises a first set of charged particles and a second set of charged particles, the first set of charged particles being light-transmissive and having an index of refraction that matches the index of refraction of the fluid, and the second set of charged particles having a charge polarity that is opposite to a polarity of the first set of charged particles.
16. The variable transmission electro-optic medium of claim 15, wherein the dispersion further comprises less than 10% of a stabilizing agent by weight of the dispersion.

17. The variable transmission electro-optic medium of claim 16, wherein the dispersion is free of the stabilizing agent.
18. The variable transmission electro-optic medium of claim 15, wherein the color of the second set of charged particles is selected from the group consisting of red, green, blue, cyan, magenta, yellow, white, and black.
19. The variable transmission electro-optic medium of claim 15, wherein the fluid is colorless.
20. The variable transmission electro-optic medium of claim 15, wherein the index of refraction of the fluid and the index of refraction of the first set of charged particles is between 1.51 and 1.57 at 550 nm.

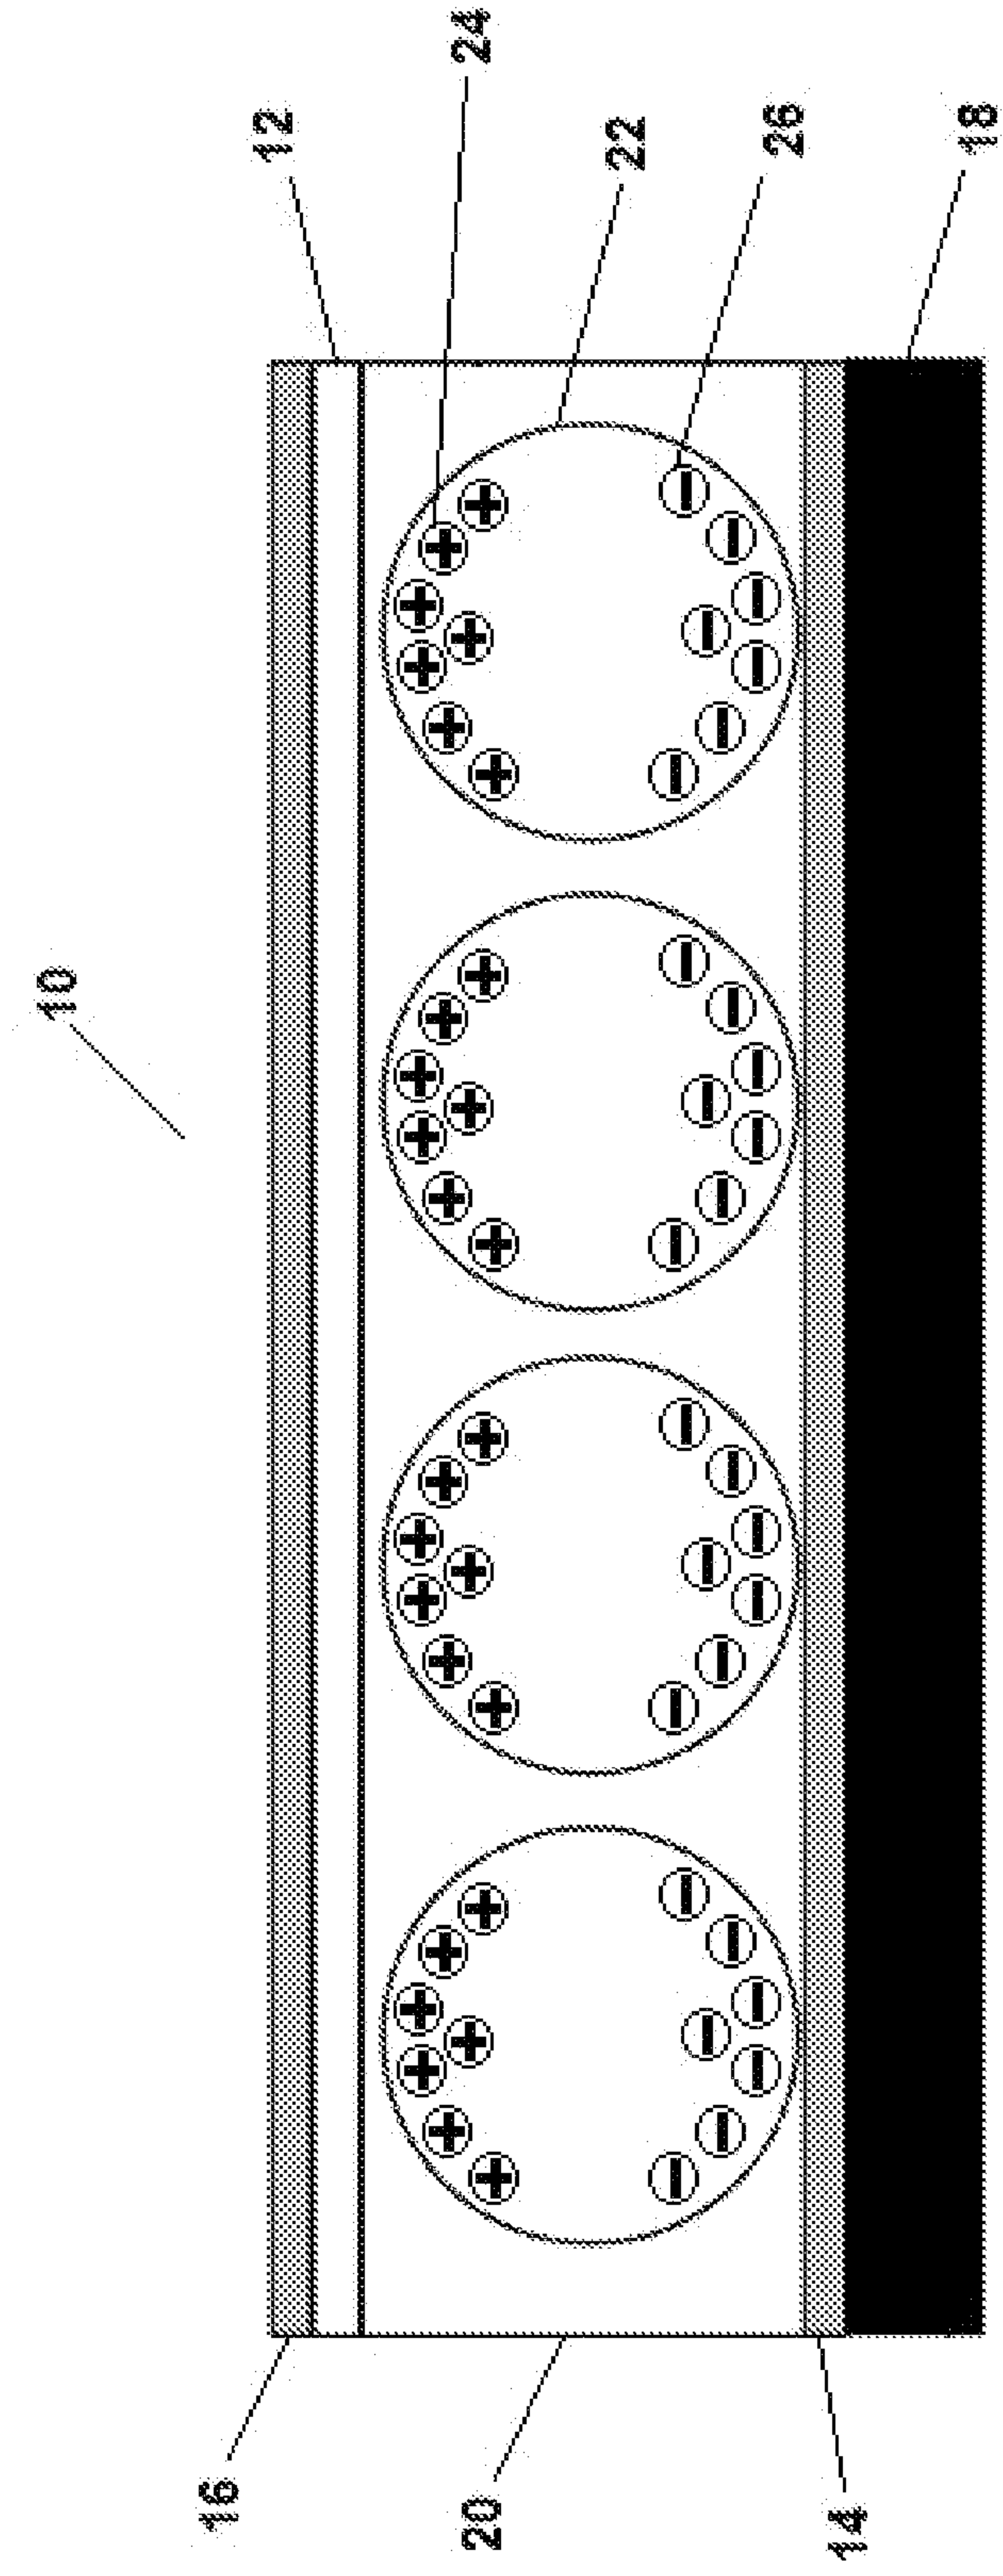


Figure 1

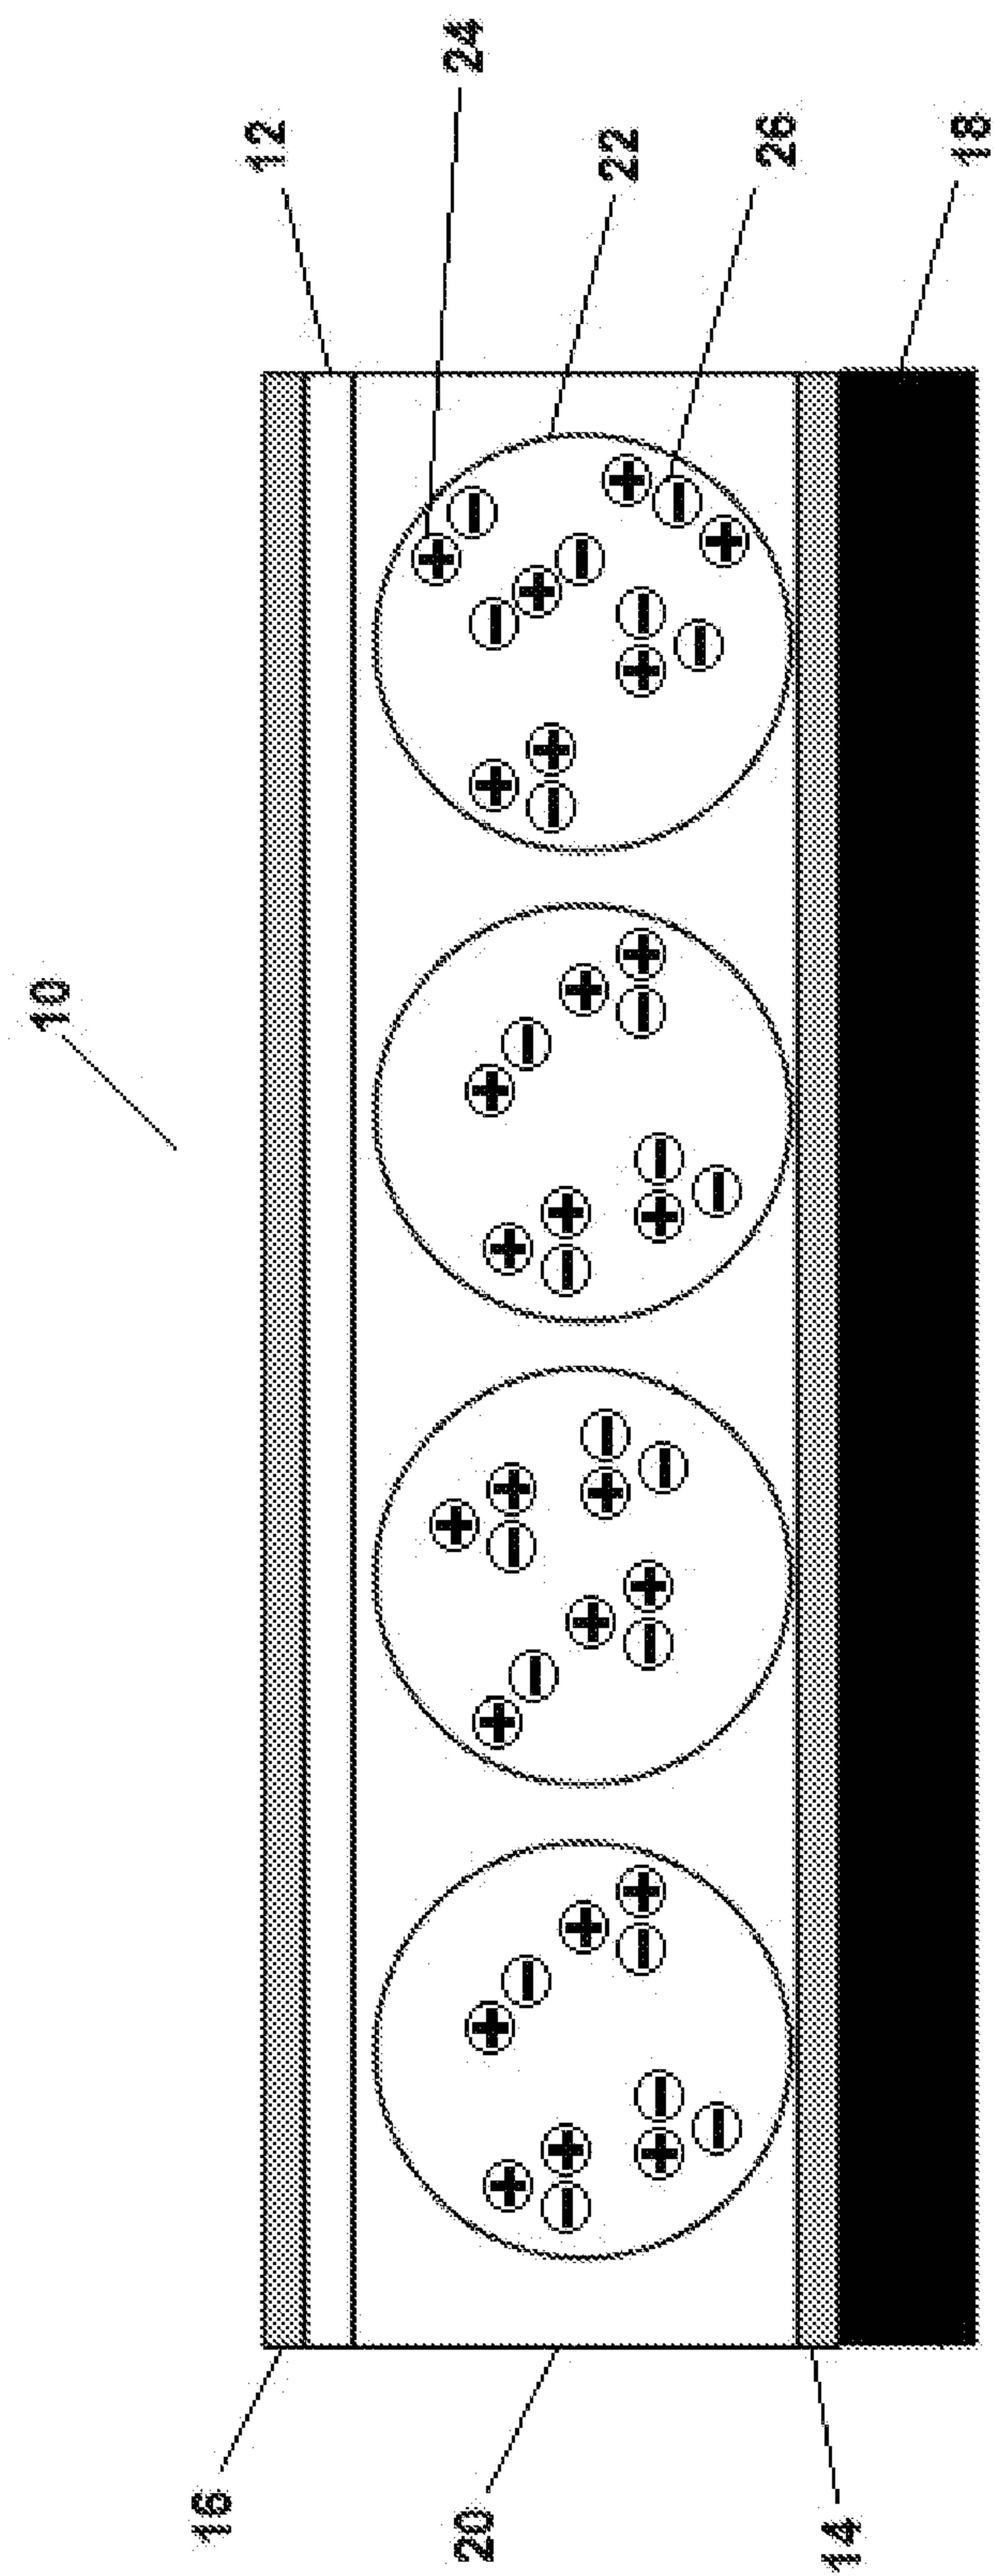


Figure 2

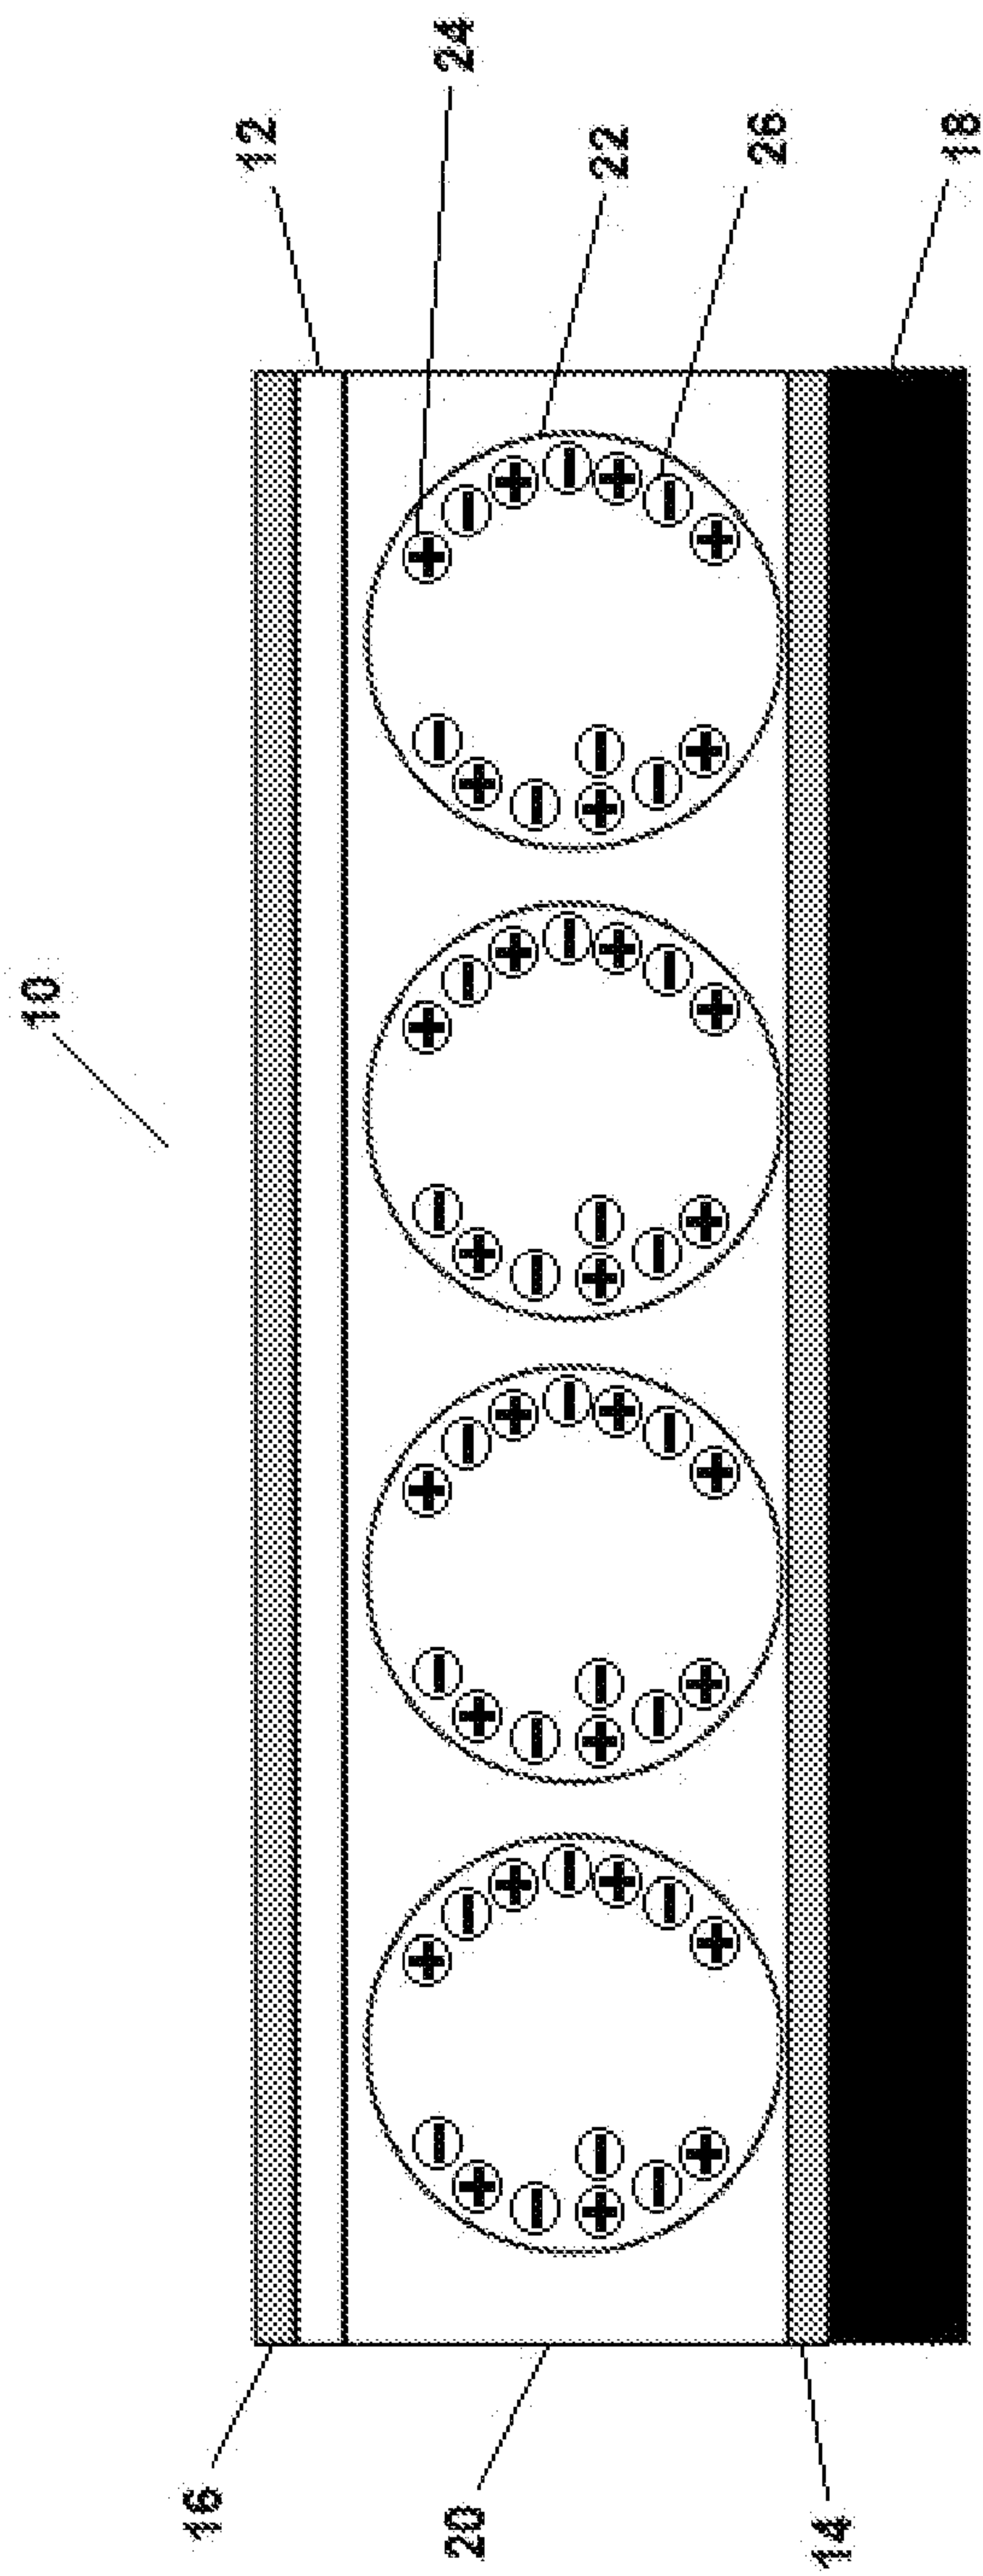


Figure 3

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2020/060370

A. CLASSIFICATION OF SUBJECT MATTER

G02F 1/167(2006.01)i; G02F 1/1676(2019.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G02F 1/167(2006.01); G02F 1/133(2006.01); G09G 3/34(2006.01); H01J 9/24(2006.01)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: electro-optic medium, particles, fluid, electric field, color, polarity

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2016-0085132 A1 (E INK CORPORATION) 24 March 2016 (2016-03-24) paragraphs [0008]-[0009], [0011], [0020], [0022], [0028], [0031]-[0039], [0073], [0135], [0198] and figure 1	1,5-7,9,11,13,15,18-20
Y		8,10,12,14
A		2-4,16-17
Y	US 2011-0080633 A1 (HITOSHI YAMAMOTO et al.) 07 April 2011 (2011-04-07) paragraphs [0061]-[0142], [0295] and figure 1	8,10,12,14
A	US 2013-0250400 A1 (SIPIX IMAGING, INC.) 26 September 2013 (2013-09-26) paragraphs [0030]-[0063] and figure 1	1-20
A	KR 10-2011-0120126 A (IMAGE & MATERIALS, INC.) 03 November 2011 (2011-11-03) paragraphs [0023]-[0097] and figure 1	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
“A” document defining the general state of the art which is not considered to be of particular relevance	“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
“D” document cited by the applicant in the international application	“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
“E” earlier application or patent but published on or after the international filing date	“&” document member of the same patent family
“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	
“O” document referring to an oral disclosure, use, exhibition or other means	
“P” document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

25 February 2021

Date of mailing of the international search report

26 February 2021

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon
35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

YANG, Jeong Rok

Telephone No. +82-42-481-5709

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2020/060370

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2007-0002008 A1 (SIMON W. TAM) 04 January 2007 (2007-01-04) paragraphs [0009]-[0034] and figure 1	1-20

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/US2020/060370

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
US	2016-0085132	A1	24 March 2016	CN	106687856	A	17 May 2017
				CN	106687856	B	13 December 2019
				CN	110824805	A	21 February 2020
				EP	3191892	A1	19 July 2017
				EP	3191892	A4	10 October 2018
				EP	3191892	B1	01 January 2020
				EP	3633662	A1	08 April 2020
				JP	2017-526980	A	14 September 2017
				JP	2018-077513	A	17 May 2018
				JP	6272623	B2	31 January 2018
				JP	6501862	B2	17 April 2019
				KR	10-1824723	B1	02 February 2018
				KR	10-2017-0033446	A	24 March 2017
				KR	10-2018-0014228	A	07 February 2018
				KR	10-2061435	B1	31 December 2019
				TW	201617711	A	16 May 2016
				TW	201730656	A	01 September 2017
				TW	201825996	A	16 July 2018
				TW	I591412	B	11 July 2017
				TW	I625584	B	01 June 2018
				TW	I646382	B	01 January 2019
				US	10509293	B2	17 December 2019
				US	10657869	B2	19 May 2020
				US	10678111	B2	09 June 2020
				US	2017-287377	A1	05 October 2017
				US	2018-136533	A1	17 May 2018
				US	2018-136534	A1	17 May 2018
				US	9921451	B2	20 March 2018
				WO	2016-040627	A1	17 March 2016
US	2011-0080633	A1	07 April 2011	JP	2011-100107	A	19 May 2011
				US	8238020	B2	07 August 2012
US	2013-0250400	A1	26 September 2013	TW	201344321	A	01 November 2013
				TW	I498656	B	01 September 2015
				US	10288975	B2	14 May 2019
				US	2015-0248045	A1	03 September 2015
				US	2018-0059500	A1	01 March 2018
				US	9052564	B2	09 June 2015
				US	9835926	B2	05 December 2017
				WO	2013-142554	A1	26 September 2013
KR	10-2011-0120126	A	03 November 2011	KR	10-1203388	B1	21 November 2012
				WO	2011-136474	A2	03 November 2011
				WO	2011-136474	A3	12 January 2012
US	2007-0002008	A1	04 January 2007	CN	1892777	A	10 January 2007
				CN	1892777	B	06 October 2010
				CN	1892777	C	10 January 2007
				EP	1742194	A1	10 January 2007
				JP	2007-017969	A	25 January 2007
				KR	10-0830106	B1	20 May 2008
				KR	10-2007-0004460	A	09 January 2007