

(43) International Publication Date
3 October 2013 (03.10.2013)

(51) International Patent Classification:

F21V 5/04 (2006.01) F21Y 113/00 (2006.01)
F21Y 101/02 (2006.01)

(21) International Application Number:

PCT/EP2013/056192

(22) International Filing Date:

25 March 2013 (25.03.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

201220126714.3 28 March 2012 (28.03.2012) CN

(71) Applicant: OSRAM GMBH [DE/DE]; Marcel-Breuer-Straße 6, 80807 München (DE).

(72) Inventors: LUO, Yabin; 5F, Hantang Building, OCT (Overseas Chinese Town), Shenzhen, Guangdong 518053 (CN). LU, Yuan; 5F, Hantang Building, OCT (Overseas Chinese Town), Shenzhen, Guangdong 518053 (CN). YANG, Canbang; 5F, Hantang Building, OCT (Overseas Chinese Town), Shenzhen, Guangdong 518053 (CN). HUANG, Zouya; 5F, Hantang Building, OCT Overseas Chinese Town, Shenzhen, Guangdong 518053 (CN).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

— with international search report (Art. 21(3))

(54) Title: LENS AND ILLUMINATION DEVICE COMPRISING THE LENS

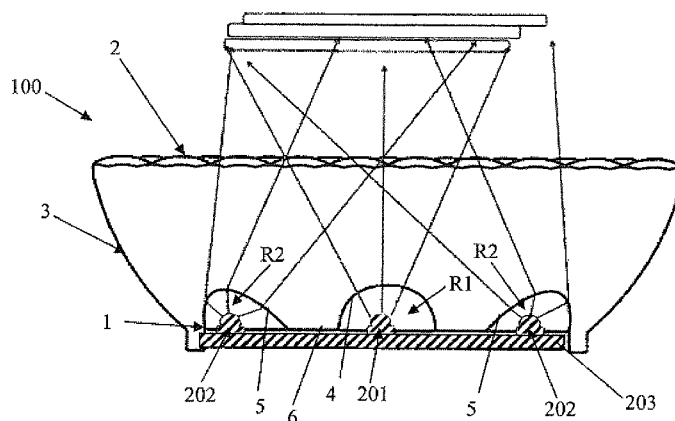


Figure 2

(57) Abstract: The present invention relates to a lens (100) for an illumination device (200), the lens comprising a bottom wall (1), a top wall (2), and a circumferential wall (3), the circumferential wall connecting the bottom wall and the top wall, wherein a plurality of regions of the bottom wall respectively arch towards the top wall to define at least one first accommodation cavity (R1) having an inner wall as a first incident surface (4), and at least one second accommodation cavity (R2) having an inner wall as a second incident surface (5), the first and second incident surfaces being designed as different curved surfaces for receiving first incident light and second incident light, respectively. The lens according to the present invention can be manufactured with a low cost, and is particularly applicable to an illumination device having multi-color light sources. The lens can achieve fine adjustment to the color of the mixed light of the multi-color light sources, improve the light mixing effect of the illumination device to obtain uniform light distribution, and improve the light efficiency. In addition, the present invention also relates to an illumination device comprising the lens.

Description

Lens and Illumination Device Comprising the Lens

5 **Technical Field**

The present invention relates to a lens and an illumination device comprising the lens.

Background Art

With the development of LED illumination techniques, more and
10 more people use an LED illumination device as a light source
for applications to various environments. As for an illumination
device with a fixed light source, the characteristics of
light emitted by the light source are generally set, for ex-
ample, spectral power distribution, color temperature (CCT)
15 and color rendering index (CRI), and so on. However, in many
specific application environments such as hotels, malls, or
residential buildings, it is often required to adjust the hue
of the output light of the illumination device, especially
the CCT, to change the lighting atmosphere according to the
20 need or the mood of people, for example, the illumination de-
vice emits warm white light when a user spends his leisure
time, and emits cool white light when a user studies and
works.

In the existing illumination devices, the lens mounted in the
25 illumination device only has an incident surface in a single
shape, for receiving incident light emitted from light
sources with different colors. These light sources with dif-
ferent colors have different color temperatures, and most of
the incident light directly goes through the lens to emit
30 scatteredly, which makes it impossible to deflect the optical

path of the light emitted to the lens via the same incident surface in a desired direction, viz. it is impossible to make fine adjustment to the optical path. Thus, the color mixing effect cannot be improved via the lens, the system efficiency of the illumination device mounted with the lens is thereby limited, and more energy consumption is required for light adjustment and light mixing. For example, as shown in Fig. 1, when the illumination device 200 has a first light source in the center and two second light sources on both sides, respectively, first and second incident light respectively emitted from the first and second light sources enters the lens 100 via incident surfaces, as the incident surfaces have the same curved surface profile, it is impossible to make fine adjustment to the optical path of the incident light through the lens, and it is also difficult to mix light by means of the lens. The light emitted through the lens does not have an ideal color, and the obtained light distribution pattern has, for example, merely an elongated shape, rather than an ideal circular shape.

20 **Summary of the Invention**

One object of the present invention lies in providing a lens. The lens according to the present invention can be manufactured with a low cost, and is particularly applicable to an illumination device having multi-color light sources. The lens can achieve fine adjustment to the color of the mixed light of the multi-color light sources, improve the light mixing effect of the illumination device to obtain uniform light distribution, and improve the light efficiency.

The object of the present invention is realized by a lens for an illumination device, the lens comprising a bottom wall, a top wall, and a circumferential wall, the circumferential

wall connecting the bottom wall and the top wall, wherein, a plurality of regions of the bottom wall respectively arch towards the top wall to define at least one first accommodation cavity having an inner wall configured as a first incident surface, and at least one second accommodation cavity having an inner wall configured as a second incident surface, the first incident surface and the second incident surface being designed as different curved surfaces for receiving first incident light and second incident light, respectively. In a preferred embodiment, "first and second incident light" indicates two or more kinds of incident light having different color temperatures, for example, multiple kinds of incident light having different colors that can be mixed into natural white light. By configuring the first and second incident surfaces for respectively receiving first and second incident light as curved surfaces having different profile, fine adjustment can be made to the color of the light obtained after primary mixing of the first incident light and the second incident light. In addition, the first and second incident light are mixed, which lays a good foundation for the final mixing of the first and second incident light through the lens, and light efficiency is further improved by adjusting the optical paths of the first and second incident light in the lens.

In a preferred design solution of the present invention, the first incident surface is a symmetrical curved surface, and the second incident surface is an asymmetrical curved surface. The first incident surface configured as a symmetrical curved surface corresponds to the first incident light, and the second incident surface configured as an asymmetrical curved surface provides great design flexibility, so as to adjust different designs of the second incident surface according to the expected color of the light obtained by mixing

the first and second incident light.

In a preferred design solution of the present invention, the top wall is an emergent surface consisting of a micro-lens array. The first and second incident light adjusted via the
5 first and second incident surfaces can be adjusted for a second time via the micro-lens array, which thereby further ensures the light mixing effect of the first and second incident light, and further improves the light distribution.

In a preferred design solution of the present invention, the
10 accommodation cavities are arranged to be separated from each other. That is, the bottom wall comprises a connecting surface capable of connecting the first and second accommodation cavities or connecting two first accommodation cavities or two second accommodation cavities. The smaller the interval
15 between the accommodation cavities is and the more the accommodation cavities are, the higher the possibility of fine adjustment is, the more uniform the pattern is, and the better the light mixing effect is.

According to a preferred embodiment of the present invention,
20 the first incident surface is a rotationally symmetrical curved surface. Preferably, the first incident surface is a spherical surface. In this way, the first incident light can go through the first incident surface and emit uniformly and symmetrically towards, for example, the emergent surface con-
25 figured as a micro-lens array.

In a preferred design solution of the present invention, the second incident surface is a non-rotationally symmetrical curved surface, a vertex of the non-rotationally symmetrical curved surface, in a cross section, being located on a side,
30 away from the first incident surface, of a midline of a pro-

jection of the second incident surface on a horizontal plane. The second incident light entering the lens through the second incident surface needs to be adjusted, and based on the design of non-rotational symmetry of the second incident surface, it is feasible to make the second incident light deflection towards the first incident surface as much as possible, so as to make fine adjustment to the second incident light. Thus, the first and second incident light having different colors can be well mixed within the lens, and the emergent light after mixing is made to concentratively emit towards the same region through the emergent surface of the lens, so as to enable the emergent light to have the desired color and obtain favorable light distribution. Preferably, the second incident surface is a free curved surface. Particularly preferably, the second incident surface has, in a cross section, a curve profile defined by the formula $y = -1E-08x^6 + 2E-06x^5 - 0.0001x^4 + 0.0032x^3 - 0.0633x^2 + 1.4584x + 1E-06$.

According to a design solution of the present invention, the circumferential wall is configured as a total internal reflection surface having a free curved surface profile. The circumferential wall can receive incident light refracted via the incident surfaces, for example, the second incident surface, and reflect the incident light, so as to make further fine adjustment to the optical path of the incident light in the lens. The free curved surface of the circumferential wall can be defined by, for example, an appropriate higher-order equation.

According to a design solution of the present invention, the number of the second accommodation cavity is more than one, and the second accommodation cavities are uniformly arranged around the first accommodation cavity. For example, the lens

comprises one first accommodation cavity and two second accommodation cavities, the two second accommodation cavities are preferably symmetrically arranged on both sides of the first accommodation cavity, respectively; when the lens comprises three or more second accommodation cavities, these second accommodation cavities can be arranged to uniformly surround the first accommodation cavity with the first accommodation cavity as the center. This design of symmetric arrangement of the first and second accommodation cavities helps to obtain uniform light distribution.

In a preferred design solution of the present invention, the number of the first accommodation cavity is more than one, and the first accommodation cavities are arranged in an array in a central region of the bottom wall. When the lens comprises a plurality of first accommodation cavities, these first accommodation cavities constitute an accommodation cavity array in the center to ensure that the first incident light can centrally and uniformly go through the lens and emit towards the object to be illuminated. The plurality of second accommodation cavities arranged to surround these first accommodation cavities cause the optical path of the second incident light in the lens to deflect towards the center, which thereby makes fine adjustment to the optical path of the second incident light, such that the optical path of the second incident light and the optical path of the first incident light converge in the lens, and ideal light mixing effect is thereby obtained, to finely adjust the color of the emergent light, to obtain, for example, cool white color or warm white color.

The other object of the present invention lies in providing an illumination device comprising the above lens. The illumination device has high light efficiency and uniform light

distribution, and is capable of achieving superior light mixing effect with low energy consumption.

In a preferred design solution of the present invention, the illumination device comprises at least one first light source and at least one second light source, and is characterized by further comprising a lens as described above. The first and second light sources can provide first and second incident light having different colors, respectively. The incident light is preferably sufficiently mixed after being converged via the lens, and thereby, the emergent light which uniformly emits towards the object to be illuminated has the desired color.

In a preferred design solution of the present invention, light emitted from the at least one first light source and light emitted from the at least one second light source have different color temperatures. The first and second light sources can provide the first incident light and the second incident light having different colors. The color temperature of the first incident light is, for example, 2700K, the color temperature of the second incident light is, for example, 6500K, and they can be mixed into natural white light.

In a preferred design solution of the present invention, the illumination device further comprises a circuit board carrying the first and second light sources, and a heat sink, wherein the first light source is accommodated in the first accommodation cavity of the lens, and the second light source is accommodated in the second accommodation cavity of the lens. For example, the lens and the circuit board can be directly fixed together using, for example, a fixing member, or mechanical connecting structures, with matched shapes, of the lens and the circuit board. In this preferred case, the first

accommodation cavity is enclosed by the circuit board, and the first light source is correspondingly accommodated therein; and the second accommodation cavity is also enclosed by the circuit board, and the second light source is correspondingly accommodated therein.

According to the present invention, the heat sink comprises an accommodation portion for placing the lens and the circuit board. For the sake of compactness of the illumination device, the lens and the circuit board can be combined into one piece and placed in the heat sink. The heat sink can be designed, for example, into a cup shape or a ring shape, so as to surround or contact, in an area as large as possible, the member on the circuit board which generates heat at work, which thereby not only supports the circuit board, but also achieves superior heat transfer. When, for example, the light source is an LED chip, the illumination device is a retrofit lamp which can replace the conventional incandescent lamp.

According to the present invention, the heat sink is configured as a circular structure having heat dissipating ribs on a circumferential wall, and the accommodation portion is arranged in the center of the heat sink. The cooling effect of the illumination device can be further improved by means of the heat dissipating ribs, to ensure the normal operation of the illumination device.

According to the present invention, the circuit board comprises control circuits controlling a working state of the first and second light sources, respectively. The person skilled in the art can design the control circuit based on the principle of switching circuit or PWM circuit. The on and off of the first and second light sources are controlled through the control circuit, and the intensity of the driving

currents thereof is preferably controlled, which thereby can change the colors of the first and second light sources and achieve light adjusting effect.

5 The illumination device according to the present invention has a simple structure and superior light adjusting effect, and can achieve uniform light distribution.

Brief Description of the Drawings

The accompanying drawings constitute a part of the present Description and are used to provide further understanding of
10 the present invention. Such accompanying drawings illustrate the embodiments of the present invention and are used to describe the principles of the present invention together with the Description. In the accompanying drawings, the same components are represented by the same reference numbers. As
15 shown in the drawings:

Fig. 1 is a sectional view of an illumination device according to an embodiment in the prior art;

Fig. 2 is a sectional view of a lens according to an embodiment of the present invention;

20 Fig. 3 is a first detailed view of the embodiment in Fig. 2;

Fig. 4 is a second detailed view of the embodiment in Fig. 2;
and

Fig. 5 is a sectional view of an illumination device according to an embodiment of the present invention.

Detailed Description of the Embodiments

Fig. 2 is a sectional view of a lens according to an embodiment of the present invention. The lens 100 for an illumination device 200 (see Fig. 3) comprises a bottom wall 1, a top wall 2, and a circumferential wall 3. A plurality of regions of the bottom wall 1 respectively arch towards the top wall 2 to define at least one first accommodation cavity R1 and at least one second accommodation cavity R2, wherein an inner wall of the first accommodation cavity R1 is a first incident surface 4, and an inner wall of the second accommodation cavity R2 is a second incident surface 5. The first accommodation cavity R1 and the second accommodation cavity R2 can be either configured to be adjacent to each other, or configured to be separated from each other as shown in the present embodiment. A connecting surface 6 on the bottom wall 1 connects the first accommodation cavities R1 and the second accommodation cavities R2. In the present embodiment, the first and second incident surfaces 4, 5 receive first and second incident light having different colors, viz. having different color temperatures, respectively, for example, in order to make the emergent light through the lens become natural white light, the first incident light can be warm white light having the color temperature of 2700K, and the second incident light can be cool white light having the color temperature of 6500K. For the sake of clarity, the at least one first light source 201 and the at least one second light source 202 providing the first and second incident light, and the circuit board 203 carrying the light sources are shown in hatching lines.

Different from the embodiment in the prior art shown in Fig. 1, the first incident surface 4 and the second incident surface 5 shown in Fig. 2 are different curved surfaces, in this

way, the optical paths of the first and second incident light can be adjusted, and thereby, the incident light having different colors can be mixed as sufficiently as possible in the lens after the primary refraction via the first incident surface 4 and the second incident surface 5, such that the emergent light emitted from the top surface 2 has ideal color and uniform light distribution, for example, can form round light spots. In the embodiment shown in Fig. 2, one first accommodation cavity R1 is in the center of the bottom wall 1, and the inner wall of the first accommodation cavity R1 is a symmetrical curved surface, such that it serves as the first incident surface 4 for receiving the first incident light from the first light source 201; and two second accommodation cavities R2 are symmetrically arranged on the two sides of the first accommodation cavity R1, and their inner walls are both configured as an asymmetrical curved surface, such that they serve as the second incident surfaces 5 for receiving the second incident light from the second light source 202. In addition, in order to further ensure superior light mixing effect and uniformity of light distribution, the top wall 2 is an emergent surface consisting of a micro-lens array. The first and second incident light is refracted for two times by the bottom wall 1 and the top wall 2 of the lens 100, which can ensure superior light mixing effect, and uniform light distribution on the object to be illuminated.

In the embodiment shown in the figure, the first incident light uniformly emits towards the top wall 2 of the lens 100 through, for example, the first incident surface 4 configured as a spherical surface. The vertex of the second incident surface 5 is, in a cross section, located on a side, away from the first incident surface 4, of a midline of a projection of the second incident surface 5 on a horizontal plane, that is, the angle between the second incident surface 5 and

the horizontal plane is smaller on the side towards the first incident surface 4, and is greater on the side away from the first incident surface 4. The second incident light on the two sides is refracted by the second incident surface 4, and the refracted optical path deflects towards the optical axis of the first incident light in the center, and the first incident light and the second incident light are mixed sufficiently. The different designs of the first and second incident surfaces 4, 5 lay a good foundation for the fine adjustment of the color of different light obtained after the multi-color incident light is mixed in the lens 100, and by adjusting the optical paths of the first and second incident light in the lens, the light efficiency is further improved.

In an embodiment which is not shown, there can be only one first accommodation cavity R1 and one second accommodation cavity R2 on the bottom wall 1.

In another embodiment which is not shown, there can be a plurality of second accommodation cavities R2, for example, three or more, on the bottom wall 1. These second accommodation cavities R2 are arranged to uniformly surround the first accommodation cavity R1 in a circumferential direction.

In another embodiment which is not shown, when there are a plurality of first accommodation cavities R1 and a plurality of second accommodation cavities R2 on the bottom wall 1, the plurality of first accommodation cavities R1 are concentrically arranged in the center of the bottom wall 1, and the second accommodation cavities R2 are arranged to uniformly surround the first accommodation cavities R1 in a circumferential direction. In this case, the more concentrative the first and second accommodation cavities R1, R2 are arranged, the better the light mixing effect is.

Fig. 3 is a first detailed view of the embodiment in Fig. 2, which clearly shows the second incident surface 5 and the circumferential wall 3 of the lens 100, and the optical path of the second incident light in the lens 100. In the present embodiment, the second incident surface 5 can be configured as a free curved surface, and particularly preferably, the second incident surface 5 has, in a cross section, a curve profile defined by the formula:

$$y = -1E-08x^6 + 2E-06x^5 - 0.0001x^4 + 0.0032x^3 - 0.0633x^2 + 1.4584x + 1E-06.$$

Similar to the second incident surface 5, the circumferential wall 3 configured as a total internal reflection surface can further be a free curved surface defined by, for example, a higher-order equation, so as to carry out total internal reflection which is beneficial to light mixing. In the present embodiment, the circumferential wall 3 can reflect the second incident light refracted by the second incident surface 5, so as to make fine adjustment to the optical path thereof, which is beneficial to sufficient light mixing.

Fig. 4 is a second detailed view of the embodiment in Fig. 2, which clearly shows the top wall 2 of the lens 100 and the optical path going through the top wall 2. The top wall 2 serving as the emergent surface is configured as a micro-lens array, and in this way, a further fine adjustment and mixing can be made to the light that has been finely adjusted and mixed in the lens 100, wherein the light includes light directly emitting towards the top wall 2 through the first and second incident surfaces 4, 5, and a small amount of light reflected by the circumferential wall 3. Thus, the lens 100 provides the way for multi-times of light mixing for the first and second incident light having different colors.

Fig. 5 is a sectional view of an illumination device according to an embodiment of the present invention. The illumination device 200 with adjustable color temperature comprises at least one first light source 201, at least one second

5 light source 202, and the lens 100 as shown in Fig. 2. The at least one first light source 201 and the at least one second light source 202 are fixed on the circuit board 203, and are respectively arranged in the first accommodation cavity R1 and the second accommodation cavity R2 of the lens 100. The illumination device 200 further comprises a heat sink 204,
10 and the lens 100 and the circuit board 203 can be integrately arranged in an accommodation portion R of the heat sink, so as to minimize the structural space of the illumination device 200. It is feasible to preferably configure the heat
15 sink 204 as a circular structure having heat dissipating ribs on a circumferential wall, and the accommodation portion R is located in the center of the heat sink 204. The heat sink 204 can further have other suitable structures. In this way, the heat sink can be in thermal conduct with the heat generating
20 member on the circuit board in a large area, so as to improve the cooling effect of the illumination device 200. In the present embodiment, the first and second light sources 201, 202 can be LED chips, and in this case, the illumination device 200 can be designed as a retrofit lamp.

25 The circuit board 203 comprises control circuits controlling a working state of the first and second light sources 201, 202, respectively. The person skilled in the art can design the control circuit based on the principle of switching circuit or PWM circuit. The on and off of the first and second
30 light sources are controlled through the control circuit, and the intensity of the driving currents thereof is preferably controlled, which thereby can change the colors of the first and second light sources and achieve light adjusting and

light mixing.

For example, when the first light source 201 emits warm white light having a color temperature of 2700K, and the second light source 202 emit cool white light having a color temperature of 6500K, the illumination device 200 in the present embodiment can emit mixed natural white light having a color temperature of 4000K, and the light sources 201, 202 can be respectively controlled such that the illumination device 200 emits, for example, warm white light of 2700K, or cool white light of 6500K. Thus, the color temperature of the white light emitted from the illumination device 200 in the present embodiment is adjustable in the range of 2700-6500K. The illumination device 200 shown in Fig. 5 and other illumination devices 200 according to the present invention are applicable to, for example, AR111 type lamp (LED) or MR16 type lamp (LED).

When the first and second light sources 201, 202 are monochromatic light sources, the embodiment shown in Fig. 5 is further applicable.

The above is merely preferred embodiments of the present invention but not to limit the present invention. For the person skilled in the art, the present invention may have various alterations and changes. Any alterations, equivalent substitutions, improvements, within the spirit and principle of the present invention, should be covered in the protection scope of the present invention.

List of reference signs

1		bottom wall
2		top wall
3		circumferential wall
5	4	first incident surface
	5	second incident surface
	6	connecting surface
	100	lens
	200	illumination device
10	201	first light source
	202	second light source
	203	circuit board
	204	heat sink
	R	accommodation portion
15	R1	first accommodation cavity
	R2	second accommodation cavity

Claims

1. A lens for an illumination device (200), the lens (100) comprising a bottom wall (1), a top wall (2), and a circumferential wall (3), the circumferential wall (3) connecting the bottom wall (1) and the top wall (2), characterized in that, a plurality of regions of the bottom wall (1) respectively arch towards the top wall (2) to define at least one first accommodation cavity (R1) having an inner wall configured as a first incident surface (4), and at least one second accommodation cavity (R2) having an inner wall configured as a second incident surface (5), the first incident surface (4) and the second incident surface (5) being configured as different curved surfaces for receiving first incident light and second incident light, respectively.
2. The lens according to Claim 1, characterized in that, the first incident surface (4) is a symmetrical curved surface, and the second incident surface (5) is an asymmetrical curved surface.
3. The lens according to Claim 1 or 2, characterized in that, the top wall (2) is configured as an emergent surface consisting of a micro-lens array.
4. The lens according to Claim 1 or 2, characterized in that, the accommodation cavities are arranged to be separated from each other.
5. The lens according to Claim 2, characterized in that, the first incident surface (4) is a rotationally symmetrical curved surface.
6. The lens according to Claim 5, characterized in that,

the first incident surface (4) is a spherical surface.

7. The lens according to Claim 2, characterized in that, the second incident surface (5) is a non-rotationally symmetrical curved surface, a vertex of the non-rotationally symmetrical curved surface, in a cross section, being located on
5 a side, away from the first incident surface (4), of a mid-line of a projection of the second incident surface (5) on a horizontal plane.

8. The lens according to Claim 7, characterized in that,
10 the second incident surface (5) is a free curved surface.

9. The lens according to Claim 8, characterized in that, the second incident surface (5) has, in a cross section, a curve profile defined by the formula:

$$y = -1E-08x^6 + 2E-06x^5 - 0.0001x^4 + 0.0032x^3 - 0.0633x^2 + 1.4584x + 1E-06.$$

15

10. The lens according to Claim 1, characterized in that, the circumferential wall (3) is configured as a total internal reflection surface having a free curved surface profile.

11. The lens according to Claim 1 or 2, characterized in
20 that, the number of the second accommodation cavity (R2) is more than one, and the second accommodation cavities (R2) are uniformly arranged around the first accommodation cavity (R1).

12. The lens according to Claim 11, characterized in that,
25 the number of the first accommodation cavity (R1) is more than one, and the first accommodation cavities (R1) are arranged in an array in a central region of the bottom wall(1).

13. An illumination device comprising at least one first light source (201) and at least one second light source (202), characterized by further comprising a lens (100) according to any of Claims 1-12.

5 **14.** The illumination device according to Claim 13, characterized in that, light emitted from the at least one first light source (201) and light emitted from the at least one second light source (202) have different color temperatures.

15. The illumination device according to Claim 13 or 14,
10 characterized by further comprising a circuit board (203) carrying the first and second light sources (201, 202), and a heat sink (204), wherein the first light source (201) is accommodated in the first accommodation cavity (R1) of the lens (100), and the second light source (202) is accommodated in
15 the second accommodation cavity (R2) of the lens (100).

16. The illumination device according to Claim 15, characterized in that, the heat sink (204) comprises an accommodation portion (R) accommodating the lens (100) and the circuit board (203).

20 **17.** The illumination device according to Claim 15, characterized in that, the heat sink (204) is configured as a circular structure having heat dissipating ribs on a circumferential wall, and the accommodation portion (R) is arranged in the center of the heat sink (204).

25 **18.** The illumination device according to Claim 15, characterized in that, the circuit board (203) comprises control circuits controlling a working state of the first and second light sources (201, 202), respectively.

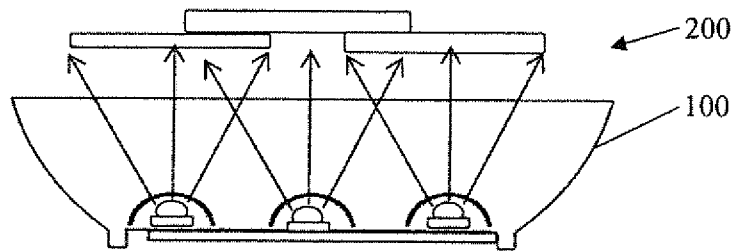


Figure 1

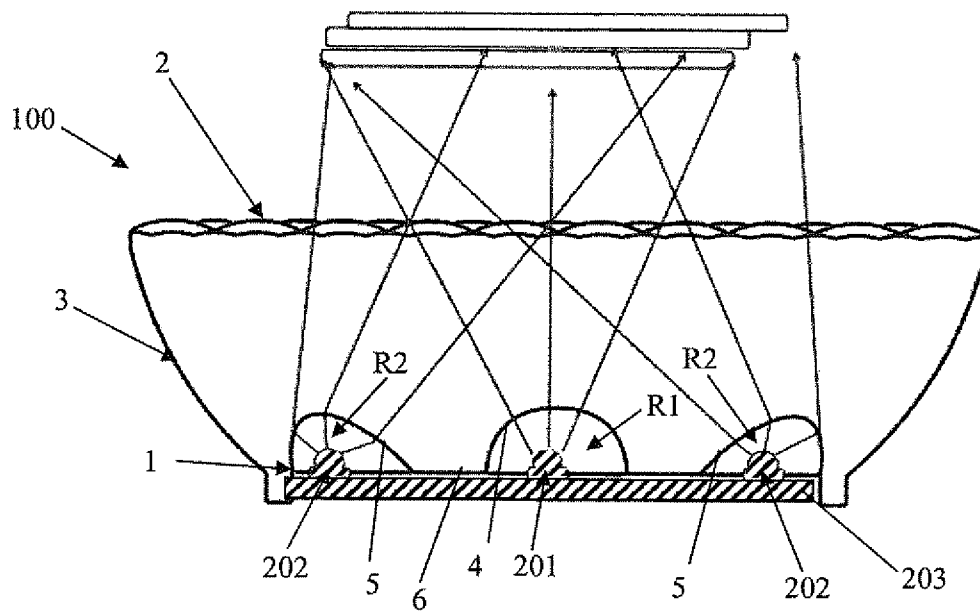
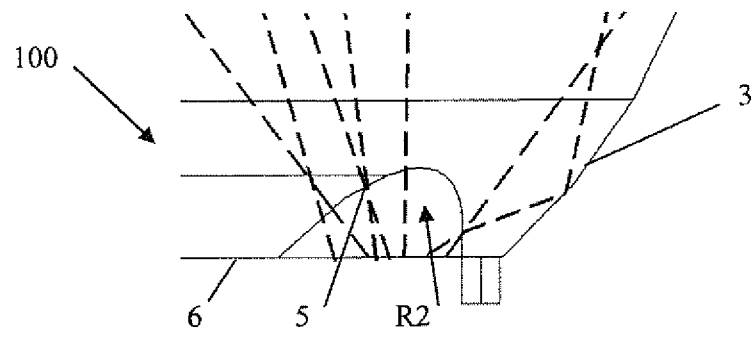
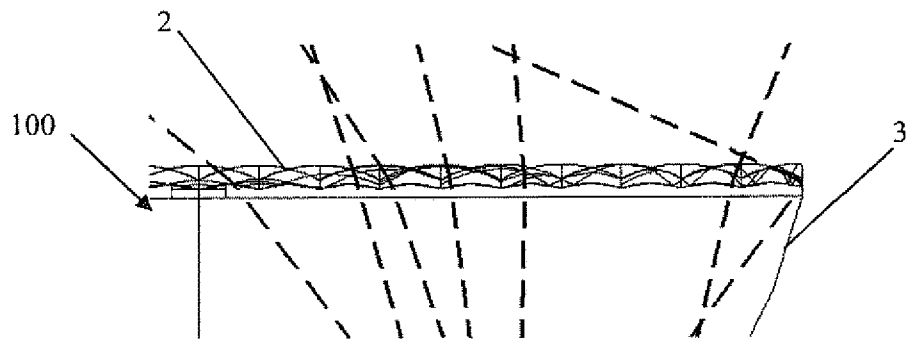
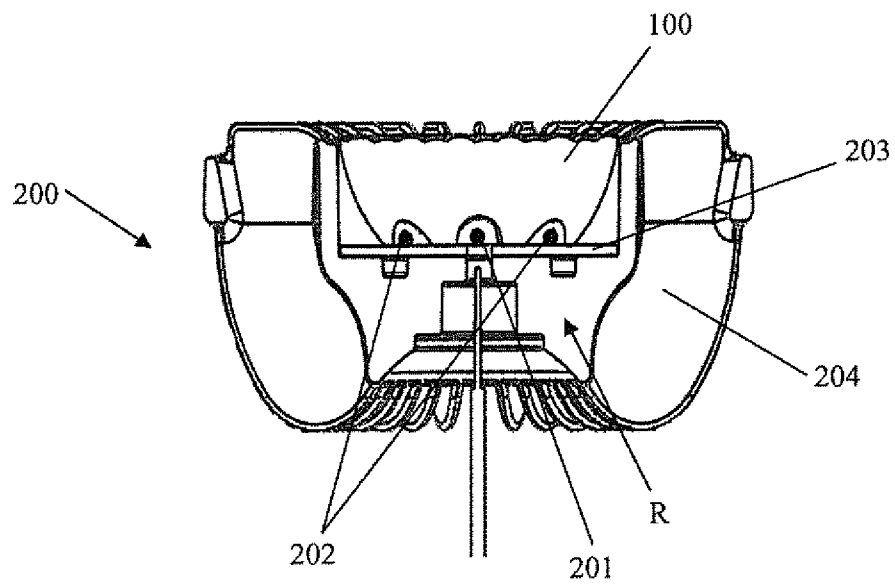


Figure 2

**Figure 3****Figure 4****Figure 5**

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2013/056192

A. CLASSIFICATION OF SUBJECT MATTER

INV. F21V5/04
ADD. F21Y101/02 F21Y113/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
F21V F21Y

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 03/044870 A1 (GEORGES MIREILLE [FR]; NOERDINGER CLAUDE [FR]) 30 May 2003 (2003-05-30)	1,4,12, 13
Y	figures 8, 9 page 5, line 33 - line 39	18
Y	US 2005/168987 A1 (TAMAOKI SATOSHI [JP] ET AL) 4 August 2005 (2005-08-04) paragraphs [0277] - [0283]; figure 52	1-3,5-8, 10,11, 13-17
Y	DE 20 2011 050024 U1 (UNITY OPTO TECHNOLOGY CO [TW]) 14 July 2011 (2011-07-14) figures 1, 2, 4A paragraphs [0015], [0019] - [0023] -/-	1,3,10, 11,13-17



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

10 June 2013

Date of mailing of the international search report

17/06/2013

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Sacepe, Nicolas

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2013/056192

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2006/083016 A1 (OKAMURA TAKEAKI [JP] ET AL) 20 April 2006 (2006-04-20) figures 1, 2 paragraphs [0021] - [0027] -----	2,5-8
Y	WO 2007/142947 A2 (LED LIGHTING FIXTURES INC [US]; VAN DE VEN ANTONY PAUL CREE LED LIGHTI) 13 December 2007 (2007-12-13) figures 1, 2 paragraphs [0002], [0031] - [0037], [0056] -----	18
A	EP 2 119 955 A1 (COEMAR SPA [IT]) 18 November 2009 (2009-11-18) figure 1 paragraphs [0016], [0018], [0020] - [0022] -----	1-3,5-8, 10,11, 13,15-17

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2013/056192

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 03044870	A1	30-05-2003	AU 2002222025 A1 10-06-2003
		WO 03044870 A1	30-05-2003
US 2005168987	A1	04-08-2005	CA 2380356 A1 01-02-2001
		CN 1376314 A	23-10-2002
		EP 1213773 A1	12-06-2002
		EP 2131404 A2	09-12-2009
		NO 20020396 A	06-03-2002
		US 6961190 B1	01-11-2005
		US 2005168987 A1	04-08-2005
		US 2008137333 A1	12-06-2008
		WO 0108228 A1	01-02-2001
DE 202011050024	U1	14-07-2011	DE 202011050024 U1 14-07-2011
		TW M409362 U	11-08-2011
		US 2012236565 A1	20-09-2012
US 2006083016	A1	20-04-2006	JP 4335719 B2 30-09-2009
		JP 2005268131 A	29-09-2005
		US 2006083016 A1	20-04-2006
WO 2007142947	A2	13-12-2007	CN 101454613 A 10-06-2009
		EP 2035745 A2	18-03-2009
		JP 2009539228 A	12-11-2009
		KR 20090019872 A	25-02-2009
		TW 200806917 A	01-02-2008
		US 2007278974 A1	06-12-2007
		WO 2007142947 A2	13-12-2007
EP 2119955	A1	18-11-2009	EP 2119955 A1 18-11-2009
		US 2009268455 A1	29-10-2009