




(86) Date de dépôt PCT/PCT Filing Date: 2003/07/01
 (87) Date publication PCT/PCT Publication Date: 2004/01/15
 (45) Date de délivrance/Issue Date: 2012/10/09
 (85) Entrée phase nationale/National Entry: 2004/03/01
 (86) N° demande PCT/PCT Application No.: KR 2003/001292
 (87) N° publication PCT/PCT Publication No.: 2004/006231
 (30) Priorités/Priorities: 2002/07/02 (KR10-2002-0037947);
 2002/09/10 (KR10-2002-0054762)

(51) Cl.Int./Int.Cl. *G11B 7/007* (2006.01),
G11B 20/00 (2006.01), *G11B 20/12* (2006.01),
G11B 23/28 (2006.01), *G11B 7/005* (2006.01)
 (72) Inventeurs/Inventors:
 KIM, JIN YONG, KR;
 SUH, SANG WOON, KR
 (73) Propriétaire/Owner:
 LG ELECTRONICS INC., KR
 (74) Agent: ROBIC

(54) Titre : DISQUE OPTIQUE A HAUTE DENSITE ET PROCEDE DE RESTRICTION DE LA LECTURE DE CE DISQUE
 DANS UN LECTEUR OPTIQUE
 (54) Title: HIGH-DENSITY OPTICAL DISC AND METHOD FOR RESTRICTING PLAYBACK OF THE HIGH-DENSITY
 OPTICAL DISC IN OPTICAL DISC APPARATUS

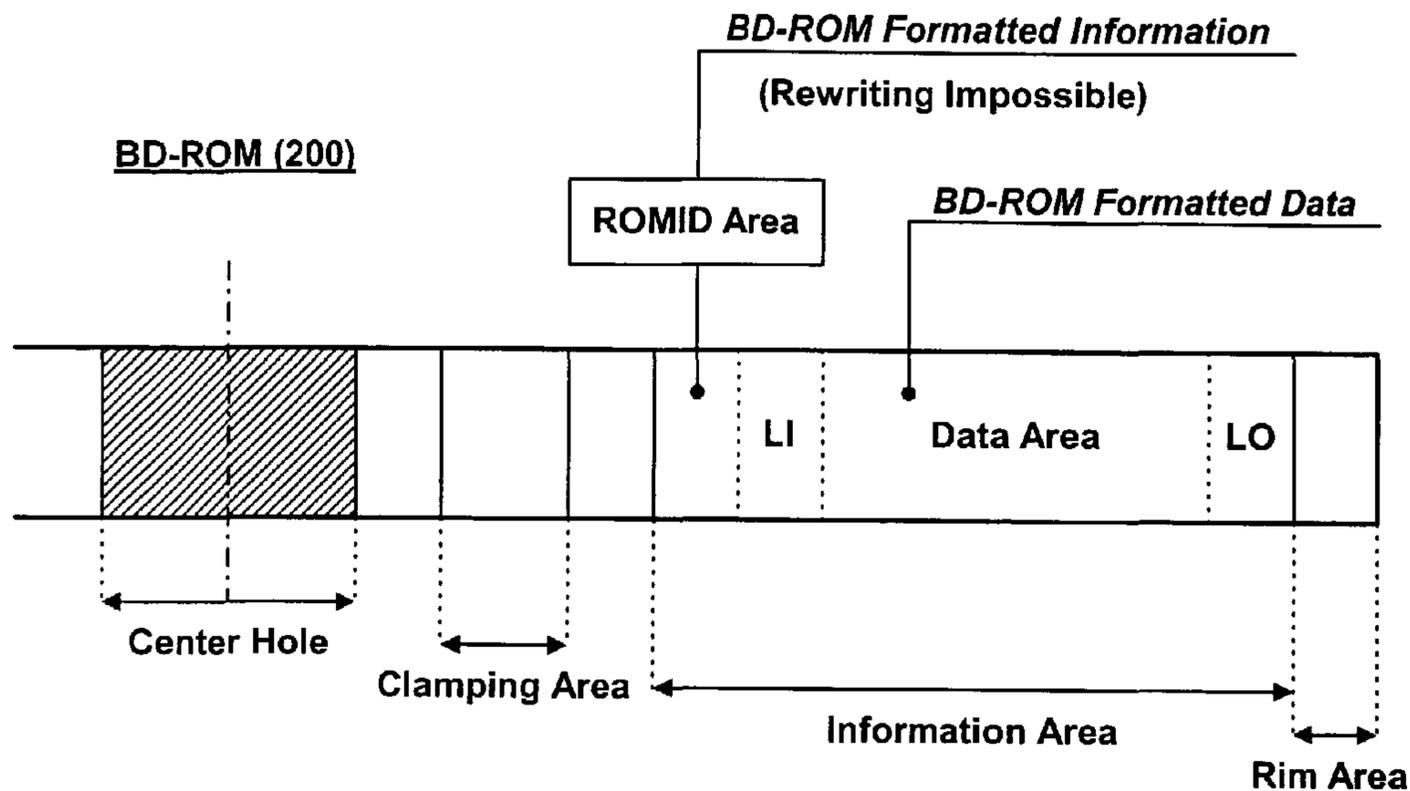

(57) **Abrégé/Abstract:**

A high-density optical disc such as BD-ROM (Blu-ray Disc ROM) or BD-R (Blu-ray Disc Recordable) having a function for preventing unauthorized duplication of data written therein, and a method for restricting playback of illegally duplicated optical discs are disclosed. In accordance with the invention, the optical disc is additionally recorded with disc identification information, adapted to identify the kind of the optical disc, in the form of physical marks, on a particular area thereof. The method of the invention includes the steps of detecting and identifying disc identification information from an optical disc at an initial stage of a servo operation carried out by an optical disc apparatus adapted to play back the optical disc, while identifying the format of data read out from the optical disc, thereby determining whether or not the read-out data was illegally duplicated on the optical disc, and forcibly restricting a data reproduction operation of the optical disc apparatus, based on the result of the determination. Accordingly, it is possible to efficiently prevent unauthorized duplication of data, recorded on a high-density optical disc such as BD-ROM, onto BD-RE or BD-R, while efficiently preventing reproduction of the illegally duplicated data.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number
WO 2004/006231 A1

- (51) International Patent Classification⁷: **G11B 7/007** (74) Agent: **PARK, Lae Bong**; 1Fl., Dongun Bldg., 413-4, Dogaok 2-dong, Kangnam-gu, Seoul 135-272 (KR).
- (21) International Application Number: PCT/KR2003/001292 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 1 July 2003 (01.07.2003) (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
10-2002-0037947 2 July 2002 (02.07.2002) KR
10-2002-0054762 10 September 2002 (10.09.2002) KR
- (71) Applicant (*for all designated States except US*): **LG ELECTRONICS INC.** [KR/KR]; 20, Yoido-dong, Youngdungpo-gu, Seoul 150-010 (KR).
- (72) Inventors; and
(75) Inventors/Applicants (*for US only*): **KIM, Jin Yong** [KR/KR]; 109-602, Seonkyung Apt., Yatap-dong, Bundang-gu, Seongnam, Kyunggi-do 463-928 (KR). **SUH, Sang Woon** [KR/KR]; 110-709, Hyundai Apt., 1346, Seocho 2-dong, Seocho-gu, Seoul 137-861 (KR).
- Published:**
— with international search report
For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: HIGH-DENSITY OPTICAL DISC AND METHOD FOR RESTRICTING PLAYBACK OF THE HIGH-DENSITY OPTICAL DISC IN OPTICAL DISC APPARATUS

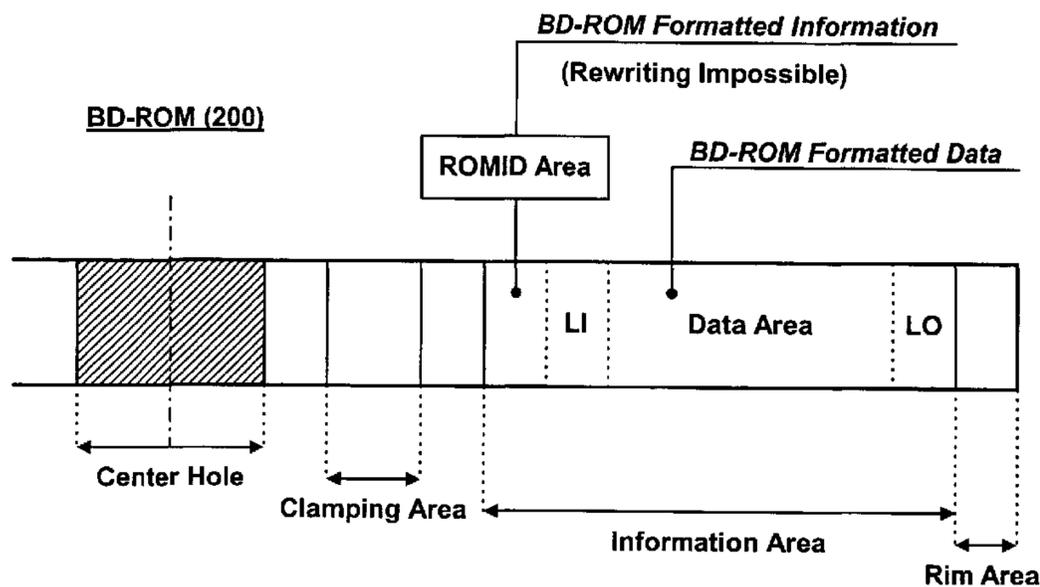

(57) Abstract: A high-density optical disc such as BD-ROM (Blu-ray Disc ROM) or BD-R (Blu-ray Disc Recordable) having a function for preventing unauthorized duplication of data written therein, and a method for restricting playback of illegally duplicated optical discs are disclosed. In accordance with the invention, the optical disc is additionally recorded with disc identification information, adapted to identify the kind of the optical disc, in the form of physical marks, on a particular area thereof. The method of the invention includes the steps of detecting and identifying disc identification information from an optical disc at an initial stage of a servo operation carried out by an optical disc apparatus adapted to play back the optical disc, while identifying the format of data read out from the optical disc, thereby determining whether or not the read-out data was illegally duplicated on the optical disc, and forcibly restricting a data reproduction operation of the optical disc apparatus, based on the result of the determination. Accordingly, it is possible to efficiently prevent unauthorized duplication of data, recorded on a high-density optical disc such as BD-ROM, onto BD-RE or BD-R, while efficiently preventing reproduction of the illegally duplicated data.

WO 2004/006231 A1

DESCRIPTION

HIGH-DENSITY OPTICAL DISC AND METHOD FOR RESTRICTING PLAYBACK OF THE HIGH-DENSITY OPTICAL DISC IN OPTICAL DISC APPARATUS

5 1. Technical Field

The present invention relates to a high-density optical disc such as BD-ROM (Blu-ray Disc ROM) which has a function for preventing unauthorized duplication of data written therein, and a method for restricting playback of illegally duplicated optical
10 discs.

2. Background Art

Recently, standardization of new high-density rewritable optical discs has rapidly progressed, for example, BD-RE (Blu-Ray Disc Rewritable), which can store a large quantity of high-quality
15 video and audio data. As a result, products associated with such discs have also been developed. Such products are expected to be commercially available in near future.

Referring to Fig. 1, the disc structure of a general BD-RE is shown. As shown in Fig. 1, the BD-RE has a center hole and a
20 clamping area which are adapted to allow the optical disc to be loaded in position in an optical disc apparatus. The optical disc also has an information area for recording disc management information and data thereon.

A lead-in area (LI), a data area, and a lead-out area (LO)
25 are assigned to the information area. And a burst cutting area (BCA) is assigned to the area preceding the lead-in area. The BCA, which is not a writable area, contains information modulated into a format unique to BD-RE.

Referring to Fig. 2, an example of an optical disc apparatus

applicable to BD-RE is shown. As shown in Fig. 2, the optical disc apparatus includes an optical pickup 10, a video disc recorder (VDR) system 11, and an encoder 12. This optical disc apparatus performs a data recording operation for encoding and modulating data, externally inputted thereto, into a format unique to BD-RE, and then recording the modulated data on a data area assigned to the information area of the BD-RE. The optical disc apparatus also performs a data reproduction operation for reading out data streams recorded on the data area, and processing the read-out data streams to reproduce original video and audio data.

10 The optical disc apparatus having the above mentioned configuration can record A/V data of a movie or broadcasted program in a BD-RE 100, and subsequently reproduce the recorded A/V data from the BD-RE 100 in the form of high-quality video and audio.

Meanwhile, development and standardization of high-density read-only optical discs such as BD-ROM and write-once Blu-ray discs such as BD-R (Blu-ray Disc Recordable) have recently been progressed. However, there is no solution for effectively preventing unauthorized duplication of data streams, written on a BD-ROM, onto other optical discs such as BD-RE or BD-R. Accordingly, such a solution is strongly demanded.

20 **3. Disclosure of Invention**

The present invention has been made in view of the above-mentioned problems, and an object of the invention is to provide a high-density optical disc such as BD-ROM capable of preventing unauthorized duplication of data streams, written thereon, onto a BD-RE or BD-R, and a method for restricting playback of high-density optical discs duplicated illegally in an optical disc apparatus.

In accordance with another aspect, the present invention provides a method of forming a recording medium, comprising:

forming an information area for recording disc management information and/or data; and

recording disc identification information identifying a type of computer readable medium in an area preceding a lead-in area of the recording medium, the type being selected from a set of media types, the set of media types including Read-Only, Recordable and Rewritable type; and

forming physical mark. as a pit type, the pit type selected from at least one of wobbled pits and straight pits, wherein the physical mark provides control information for controlling a reproduction of data recorded as straight pits on a data area of the recording medium and is formed along a modulated unique pattern, wherein if the pit type is wobbled pits, at least a part of the wobbled pits forming the physical mark is shifted from a central line of the wobbled pits, and wherein the modulated unique pattern represents encryption information used in encrypting data of the data area.

According to another aspect of the invention, there is provided a method of reproducing data from a recording medium including a lead-in area, a data area and a lead-out area, comprising:

detecting physical mark information recorded as a pit type from an area preceding the lead-in area and disc identification information identifying a type of computer readable medium, the pit type having been selected from at least one of wobbled pits and straight pits in the area preceding the lead-in area that is not writable by end user recorders, the type being selected from a set of media types, the set of media types including Read-Only, Recordable and Rewritable type, the physical mark information being formed along a modulated unique pattern, wherein if the pit type selected was wobbled pits, at least a part of the wobbled pits forming the physical mark information is shifted from a central line of the wobbled pits; and

controlling a reproduction of data recorded as straight pits from the data area based on the detected physical mark information.

According to another aspect of the invention, there is provided an apparatus for reproducing data from a recording medium including a lead-in area, a data area and a lead-out area, comprising:

an optical pickup configured to detect physical mark information recorded as a pit type from an area preceding the lead-in area and disc identification information identifying a type of recording medium, the pit type selected from at least one of wobbled pits and straight pits in the area preceding the lead-in area that is not writable by end user recorders, the type being selected from a set of media types, the set of media types including Read-Only, Recordable and Rewritable type, the physical mark information being formed along a modulated unique pattern, wherein if the pit type is wobbled pits, at least a part of the wobbled pits forming the physical mark information is shifted from a central line of the wobbled pits; and

10 a controller configured to control a reproduction of data recorded as straight pits from the data area based on the detected physical mark information.

4. Brief Description of Drawings

The accompanying drawings, which are included to provide a further understanding of the invention, illustrate the preferred embodiments of the invention, and together with the description, serve to explain the principles of the present invention.

Fig. 1 is a diagram illustrating the disc structure of a general BD-RE;

20 Fig. 2 is a schematic block diagram illustrating the configuration of a general BD-RE recorder;

Fig. 3 is a diagram illustrating the disc structure of a BD-ROM according to the present invention;

Fig. 4 is a schematic view illustrating physical disc identification information recorded in the form of a wobbled pit pattern in accordance with the present invention;

Fig. 5 is a diagram illustrating the disc structure of a BD-R according to the present invention;

Fig. 6 is a schematic view illustrating physical disc _____

identification information recorded in the form of aligned pit strings in accordance with the present invention;

Fig. 7 is a table for comparing data recording formats of BD-ROM, BD-RE, BD-R, and BD-R for authoring;

5 Fig. 8 is a schematic block diagram illustrating the configuration of an optical disc apparatus to which a playback restricting method according to the present invention is applied; and

Figs. 9a and 9b are flow charts illustrating sequential 10 processes of the playback restricting method carried out in the optical disc apparatus in accordance with the present invention.

Features, elements, and aspects of the invention that are referenced by the same numerals in different figures represent the same, equivalent, or similar features, elements, or aspects 15 in accordance with one or more embodiments.

5. Modes for Carrying out the Invention

Hereinafter, preferred embodiments of a high-density optical disc according to the present invention, and a method for restricting playback of the high-density optical disc in 20 accordance with the present invention will be described in detail with reference to the annexed drawings.

Referring to Fig. 3, the disc structure of a BD-ROM according to the present invention is shown. As shown in Fig. 3, the BD-ROM denoted by the reference numeral 200 has a center hole and a 25 clamping area which are adapted to allow the BD-ROM 200 to be loaded in position in an optical disc apparatus. The BD-ROM 200 also has an information area on which disc management information and data have been recorded.

A lead-in area (LI), a data area, and a lead-out area (LO) 30 are assigned to the information area. A disc identification area, for example, a 'BD-ROM identification (ROMID)' area, can be assigned to the area preceding the lead-in area. This ROMID area corresponds to the BCA of the BD-RE described with reference to

Fig. 1. The ROMID area also can be assigned to a particular region of the lead-in or lead-out area.

The ROMID area, which is not a writable area, contains identification information representing the fact that the associated disc is of a BD-ROM type. This identification information can be recorded in a state of being modulated into a format unique to BD-ROM, that is, a physical BD-ROM ID mark.

As shown in Fig. 4, the physical BD-ROM ID mark can be recorded in the form of a wobbled pit pattern. This physical BD-ROM ID mark is detected at the initial stage of a servo operation, independent of a decoding operation for reproducing data. The wobbled pit pattern of the physical BD-ROM ID mark can represent an encryption key value used in encrypting the data to be written on the data area, that is, duplication preventing information.

On the other hand, data encoded and modulated into a format unique to BD-ROM is recorded on the data area assigned to the information area. This data is written in a mastering process in the manufacture of the associated disc.

Fig. 5 illustrates the disc structure of a Blu-ray write-once, that is, BD-R, in accordance with the present invention. As shown in Fig. 5, this BD-R denoted by the reference numeral 300 has a center hole and a clamping area which are adapted to allow the BD-R 300 to be loaded in position in an optical disc apparatus. The BD-R 300 also has an information area for recording disc management information and data thereon.

A lead-in area (LI), a data area, and a lead-out area (LO) are assigned to the information area. A disc identification area, for example, a 'BD-R identification (RID)' area, also can be assigned to the area preceding the lead-in area. This RID area corresponds to the BCA of the BD-RE described with reference to Fig. 1.

The RID area, which is a writable area, contains identification information representing the fact that the

associated disc is of a BD-R type. This identification information can be recorded in a state of being modulated into a format unique to BD-R, that is, a physical BD-R ID mark.

This physical mark can be recorded in the form of a wobbled
5 pit pattern, as shown in Fig. 4. This physical BD-ROM ID mark is detected at the initial stage of a servo operation, independent of a decoding operation for reproducing data.

Meanwhile, the physical mark can be recorded in the form of
a pit pattern other than the wobbled pit pattern. Using the
10 physical mark having a pit pattern other than the wobbled pit pattern, it is possible to write data on the data area in an encrypted state, and to decrypt the encrypted data read out from the data area. This will be described in detail hereinafter.

Physical mark information, which is recorded on a particular
15 recording area, for example, a lead-in area or a particular area (ROMID or RID area) preceding the lead-in area, in a BD-ROM or a BD-R authored for manufacture of BD-ROM, can be written to have a pattern of repeated mark/space pairs with respect to a monotone high-frequency-modulated (HFM) groove. Each mark/space pair
20 consists of a mark and a space each having an optional length.

For instance, as shown in Fig. 6, the physical mark information is written with respect to a monotone HFM groove in which every recording field having a length of 36T always entirely has either a high level or a low level, irrespective of the data
25 sequence value of the physical mark information. Where the data value of a 36T recording field is "1", a mark/space pair consisting of a mark having a length of 3T (3Tm) and a space having a length of 3T (3Ts) is repeatedly recorded 6 times in the 36T recording field to form a pattern of 6 mark/space pairs aligned with one
30 another. On the other hand, where the data value of the 36T recording field is "0", a mark/space pair consisting of a mark having a length of 9T (9Tm) and a space having a length of 9T (9Ts) is repeatedly recorded 2 times in the 36T recording field to form

a pattern of 2 mark/space pairs aligned with one another.

Meanwhile, in the latter case, that is, where the data value of the 36T recording field is "0", a mark having a length of 12T (12Tm), a space having a length of 12T (12Ts), and a mark having
5 a length of 12T (12Tm) are sequentially recorded in the 36T recording field. In this case, however, there is a strong possibility of errors occurring during a tracking servo operation, because the frequencies of RF and push-pull signals get relatively lowered due to the 12T length of the marks and space. Therefore,
10 it is preferable to record repeated mark/space pairs each consisting of a mark of 9T (9Tm) and a space of 9T (9Ts) which are capable of maintaining respective RF and push-pull signals at appropriate frequencies.

Where physical mark information is recorded to have a
15 wobbled pit pattern, as described above with reference to Fig. 4, its wobbled pits can be formed using mastering equipment adapted to manufacture BD-ROMs. However, such wobbled pits cannot be recorded in general disc drivers, for example, BD-R drivers, because their wobbling frequency is beyond the driving frequency
20 band of an actuator used in those BD-R drivers. As a result, it is impossible to duplicate BD-ROMs, using BD-R drivers.

In other words, in a BD-R authored for manufacture of BD-ROM, that is, a BD-R for authoring, it is possible not only to record physical mark information, but also to record essential disc
25 information (DI) to be permanently recorded and maintained in a permanent information & control (PIC) data region included in the lead-in area of the BD-R, by applying a recording scheme in which repeated mark/space pairs each consisting of a mark and a space each having an optional length are recorded such that they are
30 aligned with one another, with respect to a monotone HFM groove. On the other hand, recording of data in the writable area of the BD-R is achieved with respect to each typical wobbled groove.

Meanwhile, in the case of BD-ROM, wobbled pits or normal pits

can be recorded in the PIC region of the BD-ROM, whereas data having the form of general pit strings is recorded in the data recording area of the BD-ROM. Accordingly, optical disc apparatuses can more easily determine the type of any optical disc, 5 for example, BD-RE or general BD-R, by referring to pit string recorded in the form of a unique pattern in the PIC region of the optical disc.

Accordingly, in the case of an optical disc apparatus adapted to play back a BD-ROM or BD-R recorded with the above 10 described physical mark information, for example, a BD-ROM player including an optical pickup 20, a VDP system 21, and a D/A converter 22, as shown in Fig. 8, it detects and identifies the physical mark information at the initial stage of a typical servo operation thereof carried out when an optical disc is loaded, 15 detects and identifies the unique format of data read out from the data area of the optical disc during a data reproduction operation thereof, thereby determining whether or not the data was illegally duplicated on the optical disc, so as to perform a playback restricting operation for forcibly stopping the 20 playback of the optical disc in accordance with the result of the determination. These operations will be described in detail hereinafter.

Figs. 9a and 9b are flow charts illustrating sequential processes of a method for restricting playback of an optical disc 25 in an optical disc apparatus in accordance with the present invention.

In the optical disc apparatus shown in Fig. 8, a typical focusing and tracking servo operation is carried out by the VDP system 21 when an optical disc is loaded in the optical disc 30 apparatus (S10), as shown in Fig. 9a.

At the initial stage of the servo operation, the VDP system 21 accesses a disc identification area preceding a lead-in area of the optical disc, to detect and identify physical mark

information recorded in the disc identification area. For example, where it is determined that the physical mark information corresponds to ID information associated with BD-ROM (S11), the VDP system 21 determines that the loaded optical disc is a BD-ROM,

5 Subsequently, the VDP system 21 searches a data area assigned to an information area of the optical disc, and performs a data reproduction operation for reading out data recorded in the data area, and reproducing the read-out data (S12). Where the data read out in the above described procedure has a format unique
10 to BD-ROM, that is, the read-out data is BD-ROM format data (S13), the VDP system 21 determines the loaded disc to be a normal BD-ROM, and continues the data reproduction (playback) operation (S14).

On the other hand, where the read-out data does not have the format unique to BD-ROM, that is, it is not BD-ROM format data,
15 the VDP system 21 determines that there is an error in determining the kind of the optical disc (S15). In this case, the VDP system 21 stops the data reproduction (playback) operation or performs the disc determining operation again.

Meanwhile, where the physical mark information recorded in
20 the disc identification area does not correspond to BD-ROM ID information, for example, where information recorded in accordance with a format unique to BD-RE is detected (S20), the VDP system determines the loaded optical disc to be BD-RE.

Thereafter, the VDP system 21 searches the data area
25 assigned to the information area, and then performs a data reproduction operation for reading out data recorded in the data area, and reproducing the read-out data (S21). Where the data read out in this procedure has a format unique to BD-RE, that is, the read-out data is BD-RE format data (S22), the VDP system 21
30 determines the loaded optical disc to be a normal BD-RE, and continues the data reproduction (playback) operation (S23).

On the other hand, where the read-out data does not have the format unique to BD-RE, for example, where it is BD-ROM format

data other than BD-RE format data, the VDP system 21 determines that BD-ROM data was illegally duplicated on a BD-RE, and then informs of this fact by displaying a report message, while performing a playback restricting operation to forcibly stop the
5 data reproduction operation (S24).

Also, where BD-R ID information is detected from the physical mark information recorded in the disc identification area (S30), the VDP system 21 determines the loaded optical disc to be BD-R. In this case, the VDP system 21 searches the data area
10 assigned to the information area, and then performs a data reproduction operation for reading out data recorded in the data area, and reproducing the read-out data (S31).

Where it is subsequently determined that the data read out in this procedure has a format unique to BD-ROM, that is, the
15 read-out data is BD-ROM format data (S32), the VDP system 21 determines that BD-ROM data was illegally duplicated on a BD-R, and then informs of this fact by displaying a report message, while performing a playback restricting operation to forcibly stop the data reproduction operation (S33).

20 On the other hand, where the read-out data does not have the format unique to BD-ROM, for example, where it is BD-RE format data or BD-R format data, the VDP system 21 determines that the loaded optical disc is a normal BD-R, and continues the data reproduction operation (S34).

25 For reference, where although BD-ROM format data is recorded in the data area of a BD-R disc, separate copyright allowance information is additionally recorded, a normal data reproduction operation can be carried out in accordance with a determination that duplication of data was authorized, based on the copyright
30 allowance information.

As apparent from the above description, the present invention provides a high-density optical disc such as BD-ROM capable of efficiently preventing unauthorized duplication of

data streams, written thereon, onto a BD-RE or BD-R, and a method for restricting playback of high-density optical discs duplicated illegally in an optical disc apparatus.

Although the preferred embodiments of the invention have
5 been disclosed for illustrative purposes, those skilled in the art will appreciate that various modifications, additions and substitutions are possible, without departing from the scope and spirit of the invention as disclosed in the accompanying claims.

WHAT IS CLAIMED IS:

1. A computer readable recording medium including a lead-in area, a data area and a lead-out area, comprising:

disc identification information identifying a type of computer readable medium in an area preceding the lead-in area, the type being selected from a set of media types, the set of media types including Read-Only, Recordable and Rewritable type; and

physical mark, recorded as a pit type, the pit type selected from at least one of wobbled pits and straight pits,

10 wherein the physical mark provides control information for controlling a reproduction of data recorded as straight pits on the data area of the recording medium and is formed along a modulated unique pattern,

wherein if the pit type is wobbled pits, at least a part of the wobbled pits forming the physical mark is shifted from a central line of the wobbled pits, and wherein the modulated unique pattern represents encryption information used in encrypting data of the data area.

2. The computer readable recording medium according to claim 1, wherein the control information further includes copy management information indicating
20 whether duplication of the data is allowed.

3. The computer readable recording medium according to claim 2, wherein the disc identification information is further included in a sub area of the lead-in area.

4. The computer readable recording medium according to claim 3, wherein the sub area of the lead-in area is permanent information and control data (PIC) area of the Blu-ray Disc Read-Only (BD-RO) disc where writing of data is impossible after manufacture of the computer readable medium.

5. The computer readable recording medium according to claim 3, wherein the physical mark information is recorded on a position of the recording medium detectable at an initial stage of a servo operation carried out in an optical disc apparatus, separately from a decoding operation to be carried out in the optical disc apparatus.

6. The computer readable recording medium according to claim 1, wherein the physical mark information is recorded in a permanent information and control data (PIC) area of the Blu-ray Disc Read-Only (BD-RO) disc where writing of data is impossible after manufacture of the computer readable medium.

7. A method of forming a recording medium, comprising:

forming an information area for recording disc management information and/or data; and

recording disc identification information identifying a type of computer readable medium in an area preceding a lead-in area of the recording medium, the type being selected from a set of media types, the set of media types including Read-Only, Recordable and Rewritable type; and

forming physical mark. as a pit type, the pit type selected from at least one of wobbled pits and straight pits, wherein the physical mark provides control information for controlling a reproduction of data recorded as straight pits on a data area of the recording medium and is formed along a modulated unique pattern, wherein if the pit type is wobbled pits, at least a part of the wobbled pits forming the physical mark is shifted from a central line of the wobbled pits, and wherein the modulated unique pattern represents encryption information used in encrypting data of the data area.

8. The method of claim 7, wherein the forming step forms the physical mark on a position of the recording medium being detectable at an initial stage of a servo operation carried out in an optical disc apparatus, separately from a decoding operation to be carried out in the optical disc apparatus.
9. The method of claim 7, further comprising:
recording copy management information indicating whether duplication of the data is allowed on the recording medium.
- 10 10. A method of reproducing data from a recording medium including a lead-in area, a data area and a lead-out area, comprising:
detecting physical mark information recorded as a pit type from an area preceding the lead-in area and disc identification information identifying a type of computer readable medium, the pit type having been selected from at least one of wobbled pits and straight pits in the area preceding the lead-in area that is not writable by end user recorders, the type being selected from a set of media types, the set of media types including Read-Only, Recordable and Rewritable type, the physical mark information being formed along a modulated unique pattern, wherein if the pit type selected was wobbled pits, at least a part of the wobbled pits forming
20 the physical mark information is shifted from a central line of the wobbled pits; and
controlling a reproduction of data recorded as straight pits from the data area based on the detected physical mark information.
11. The method of claim 10, wherein the controlling step controls the reproduction by utilizing the detected physical mark information formed along the modulated unique pattern which represents encryption information used in encrypting data of the data area.

12. The method of claim 11, wherein the controlling step further controls a reproduction of a recording medium by utilizing copy management information recorded on the recording medium indicating whether duplication of data is allowed in such a manner that the reproduction is performed if the duplication is allowed.

13. An apparatus for reproducing data from a recording medium including a lead-in area, a data area and a lead-out area, comprising:

an optical pickup configured to detect physical mark information recorded as a pit type from an area preceding the lead-in area and disc identification information identifying a type of recording medium, the pit type selected from at least one of wobbled pits and straight pits in the area preceding the lead-in area that is not writable by end user recorders, the type being selected from a set of media types, the set of media types including Read-Only, Recordable and Rewritable type, the physical mark information being formed along a modulated unique pattern, wherein if the pit type is wobbled pits, at least a part of the wobbled pits forming the physical mark information is shifted from a central line of the wobbled pits; and

a controller configured to control a reproduction of data recorded as straight pits from the data area based on the detected physical mark information.

14. The apparatus of claim 13, wherein the optical pickup is configured to detect the physical mark information recorded in a permanent information & control data (PIC) area of the Blu-ray Disc Read-Only (BD-RO) disc where writing of data is impossible after manufacture of the recording medium

15. The apparatus of claim 14, wherein the controller is configured to control the reproduction by utilizing the detected physical mark information formed along the modulated unique pattern which represents encryption information used in encrypting data of the data area.

16. The apparatus of claim 15, wherein the controller is configured to control the optical pickup to reproduce data based on copy management information recorded on a medium, the copy management information indicating whether duplication of data is allowed.

FIG. 1

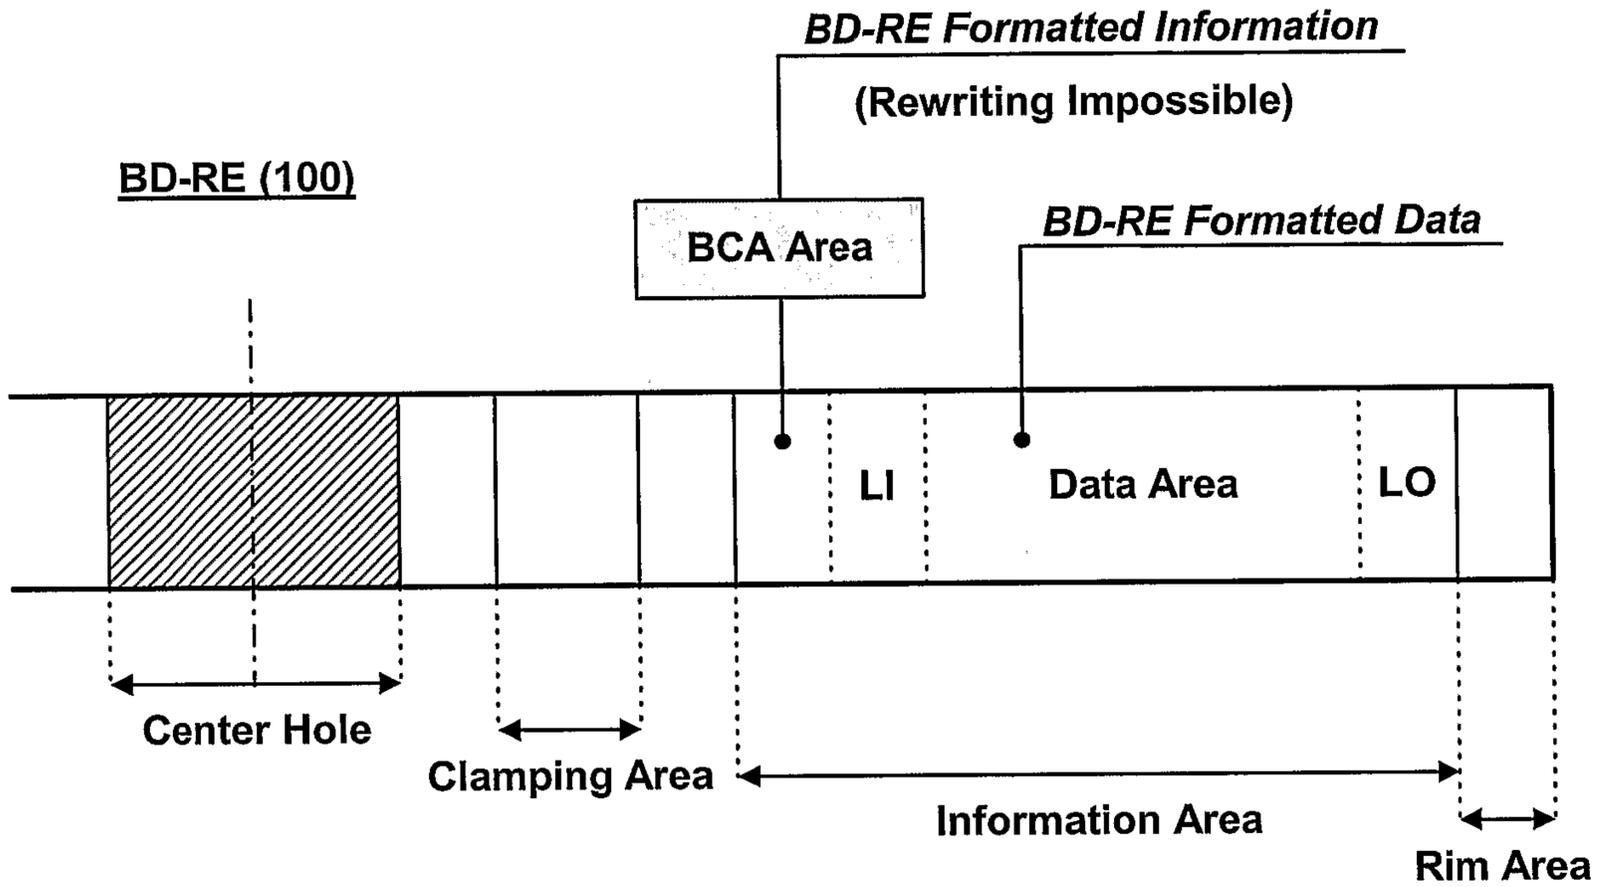


FIG. 2

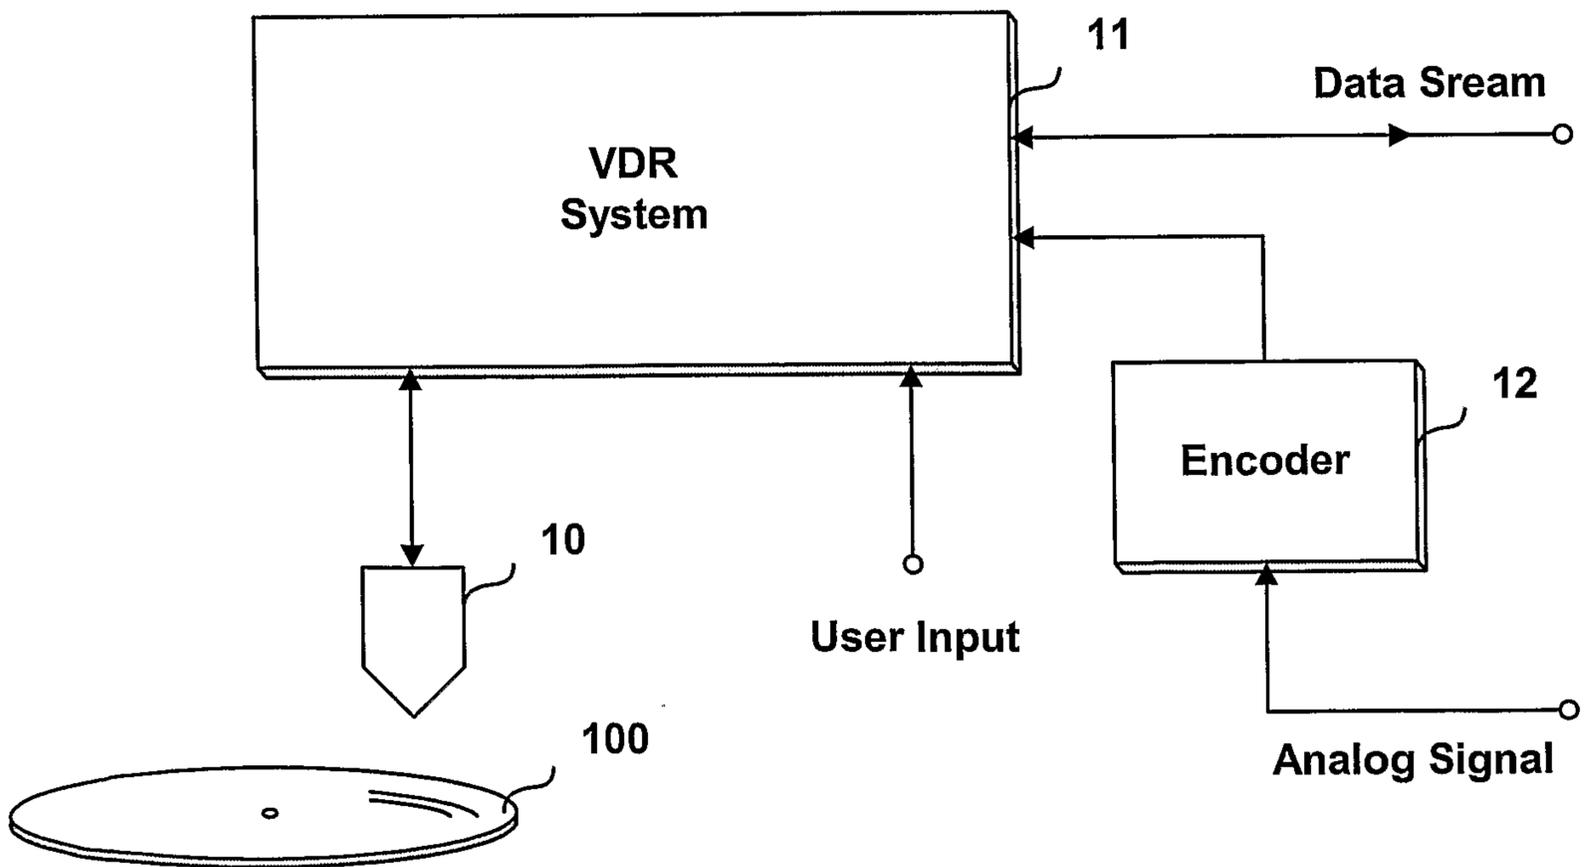


FIG. 3

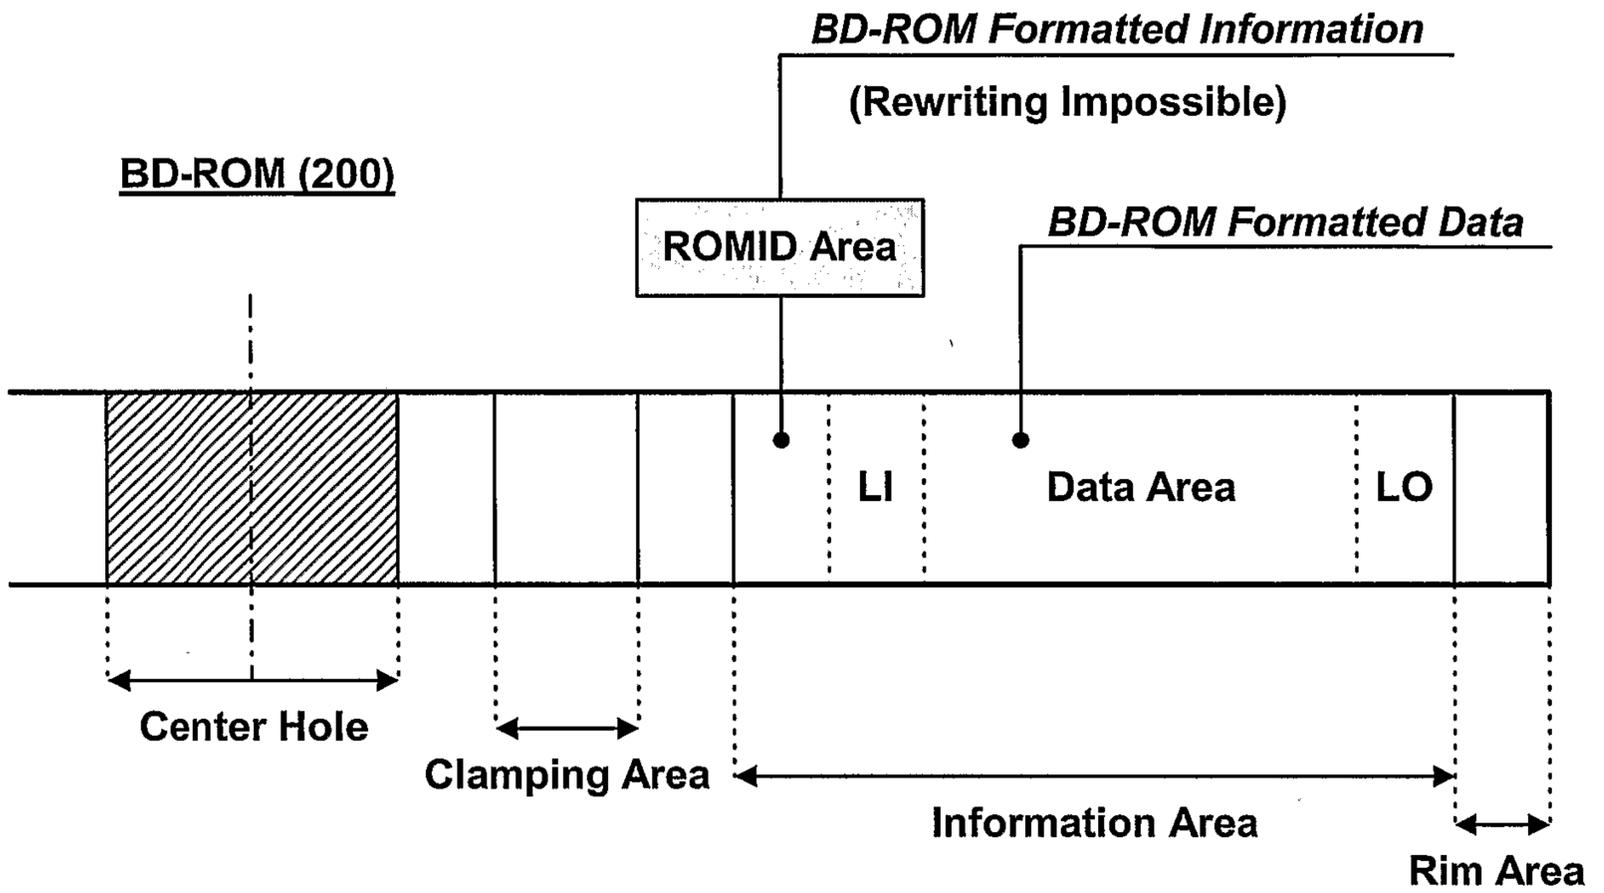


FIG. 4

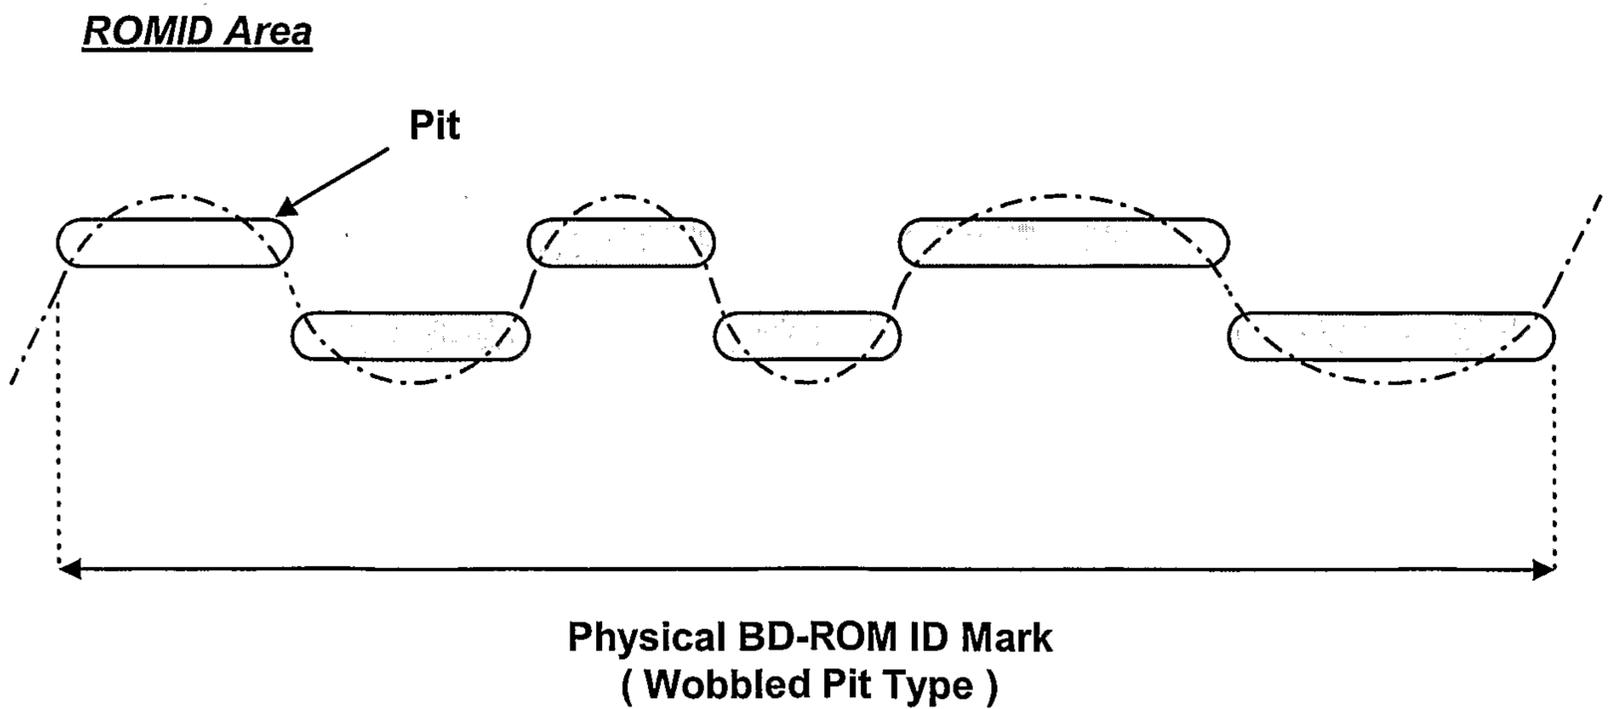


FIG. 5

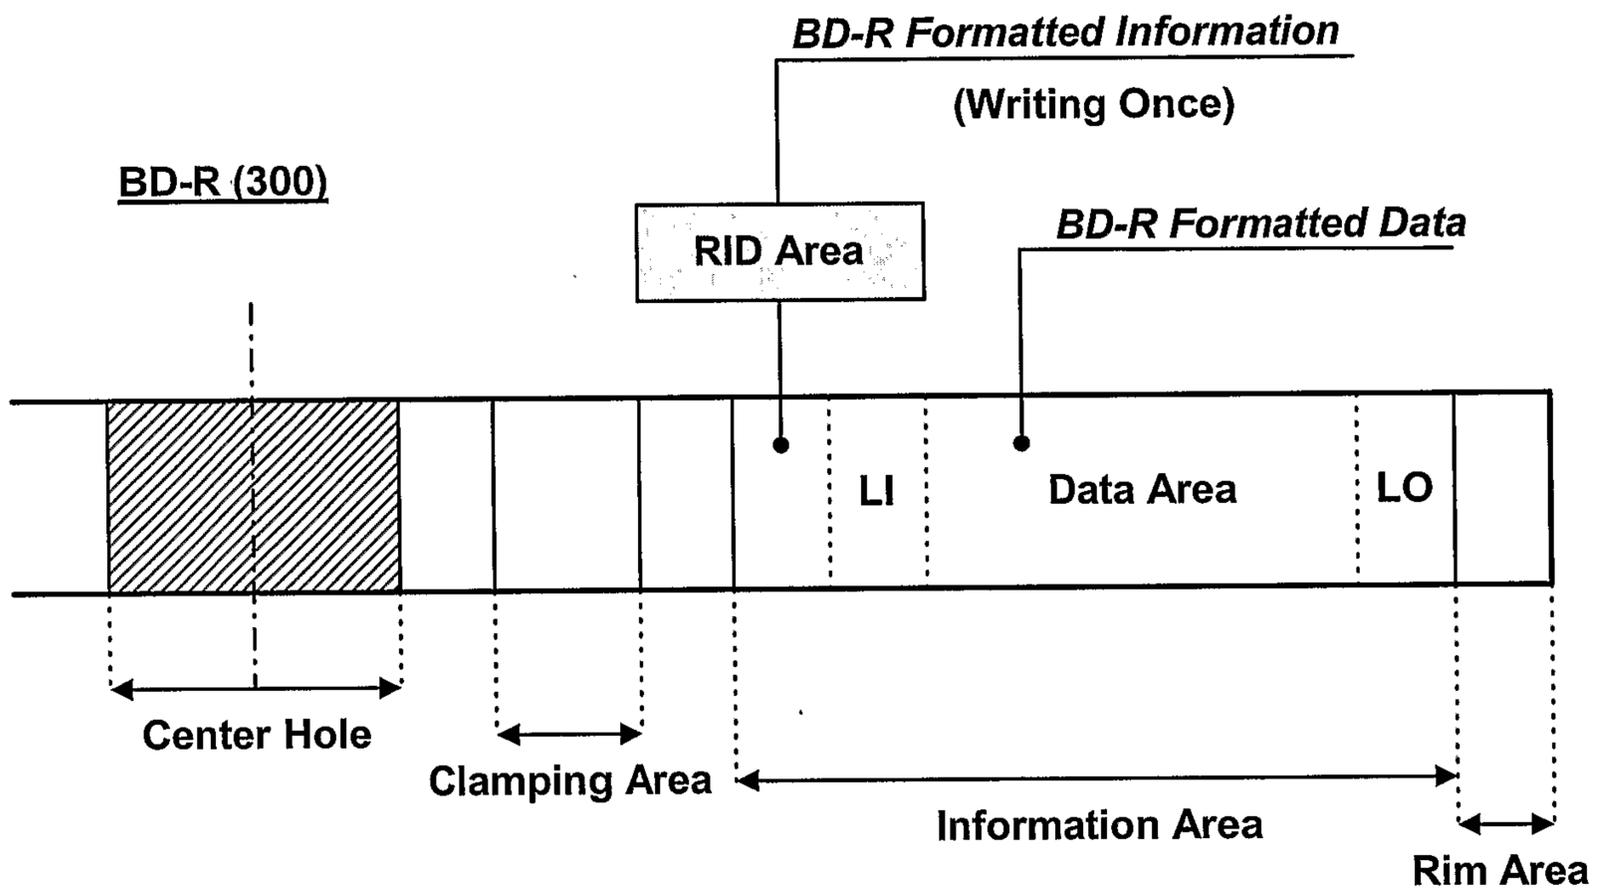


FIG. 6

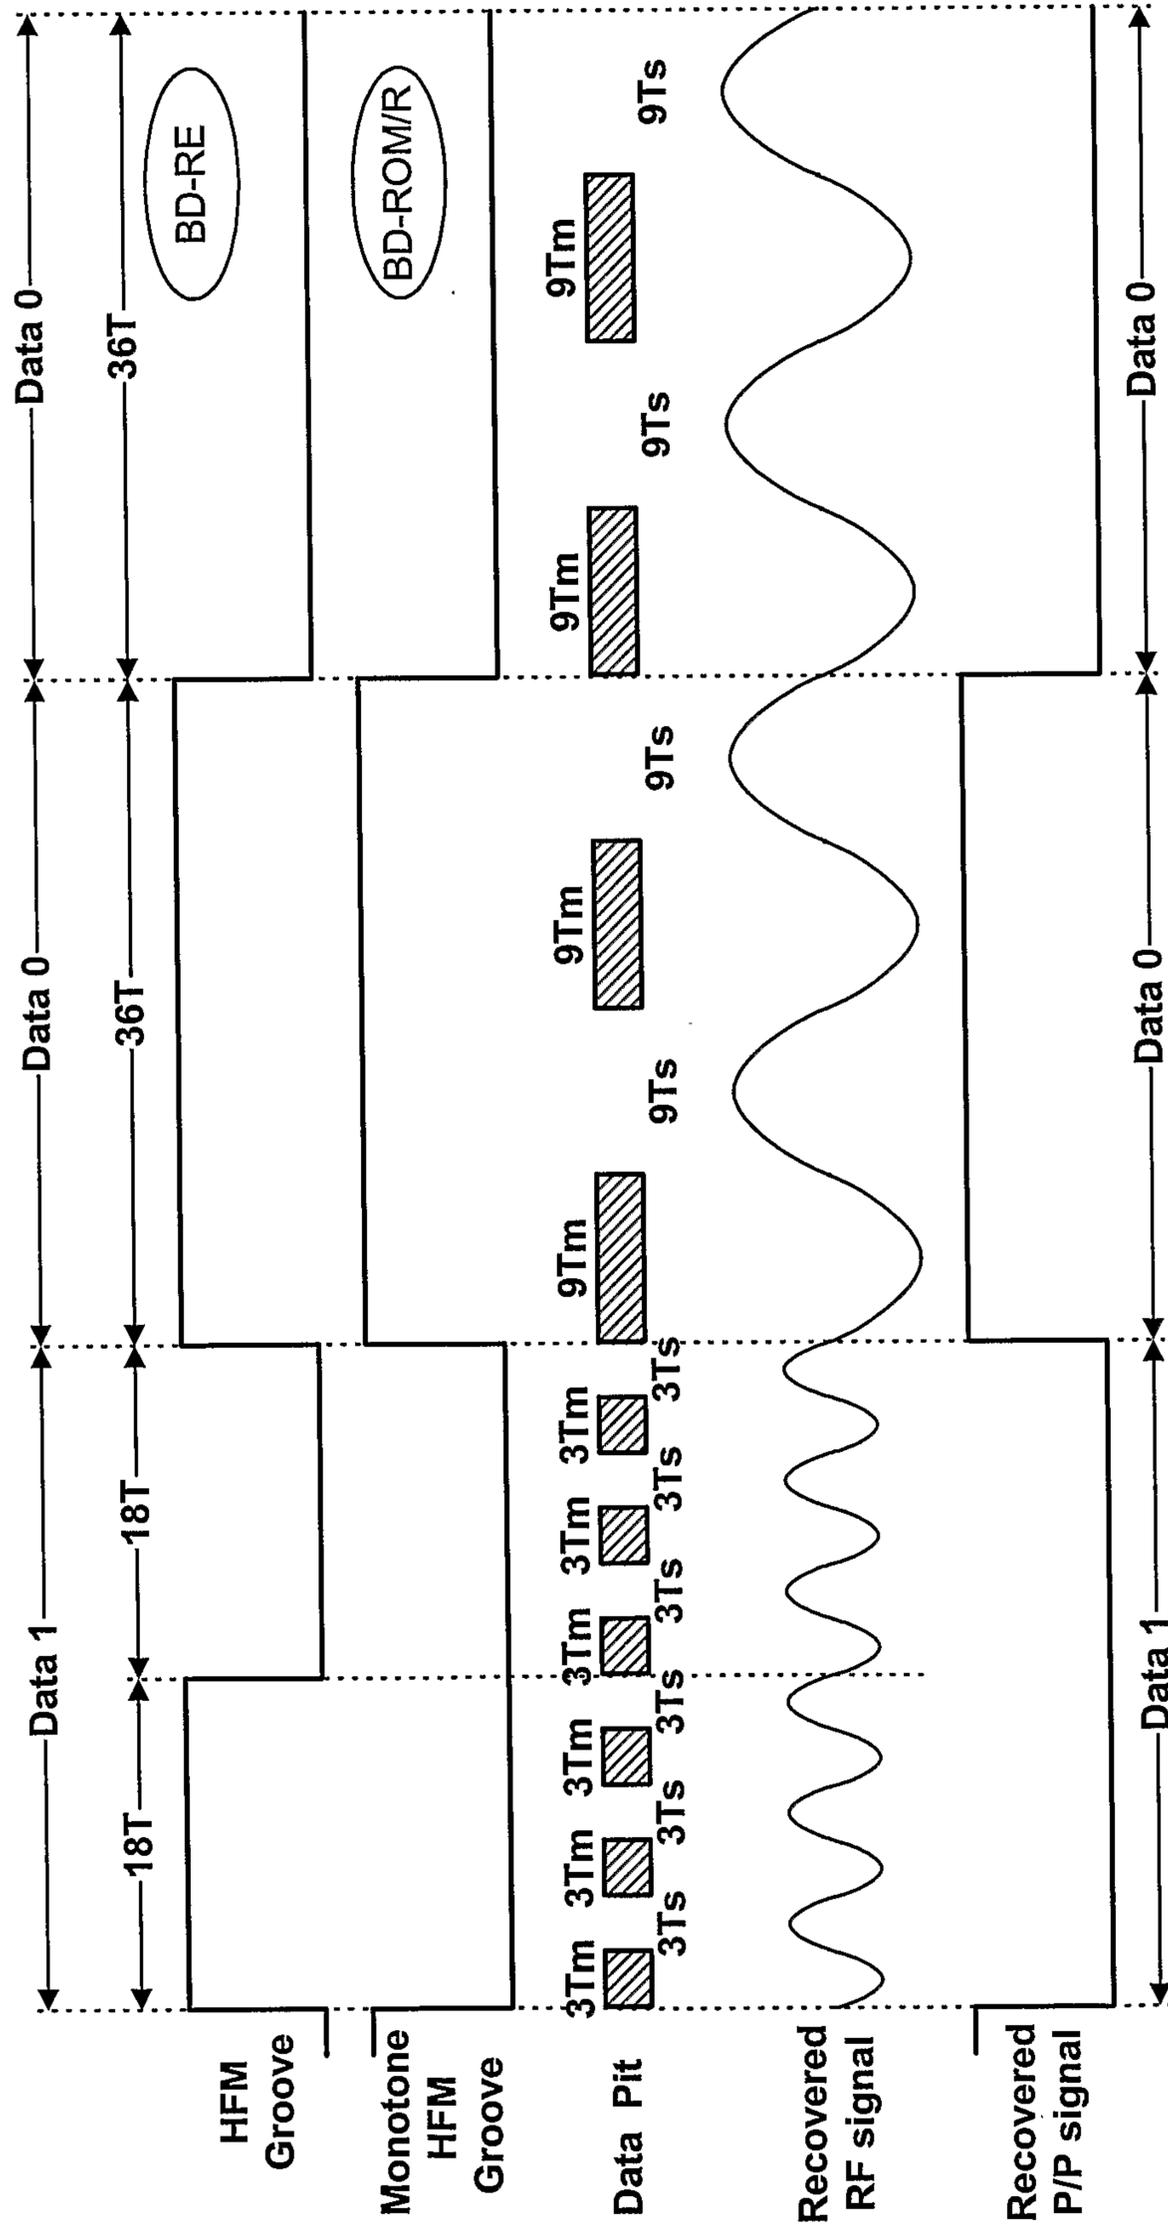


FIG. 7

	BD-RE	BD-ROM	BD-R for authoring	BD-R
Pre-recorded Area (PIC area)	HFM Groove	Wobble Pit or Normal Pit	Monotone HFM Groove & Normal Pit	Wobbled Pit
Writable Area	Wobbled Groove	Normal Pit	Wobbled Groove	Wobbled Groove

FIG. 8

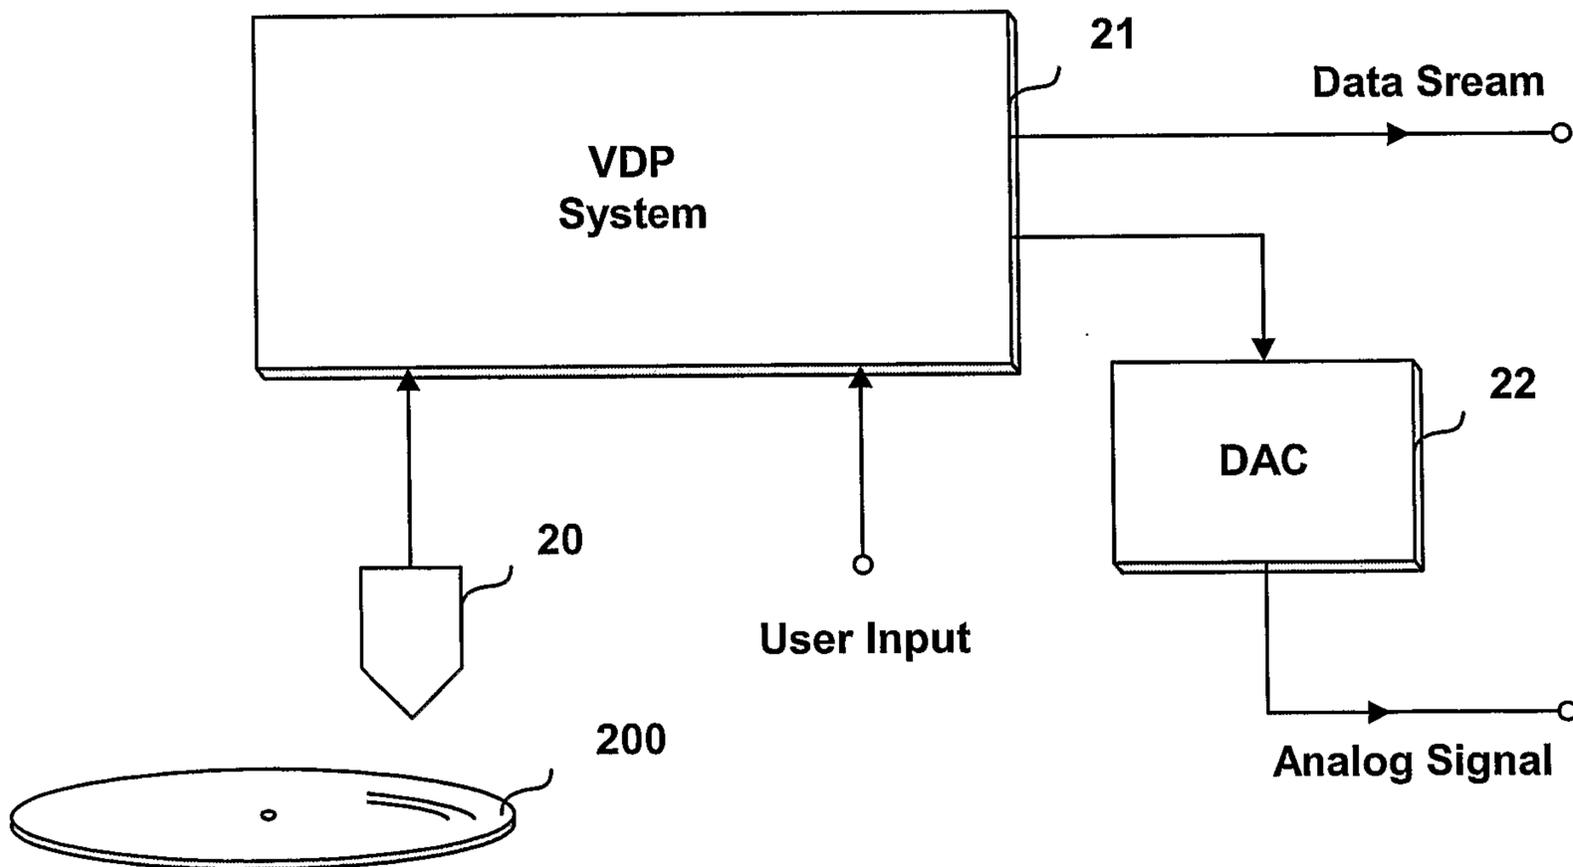


FIG. 9(a)

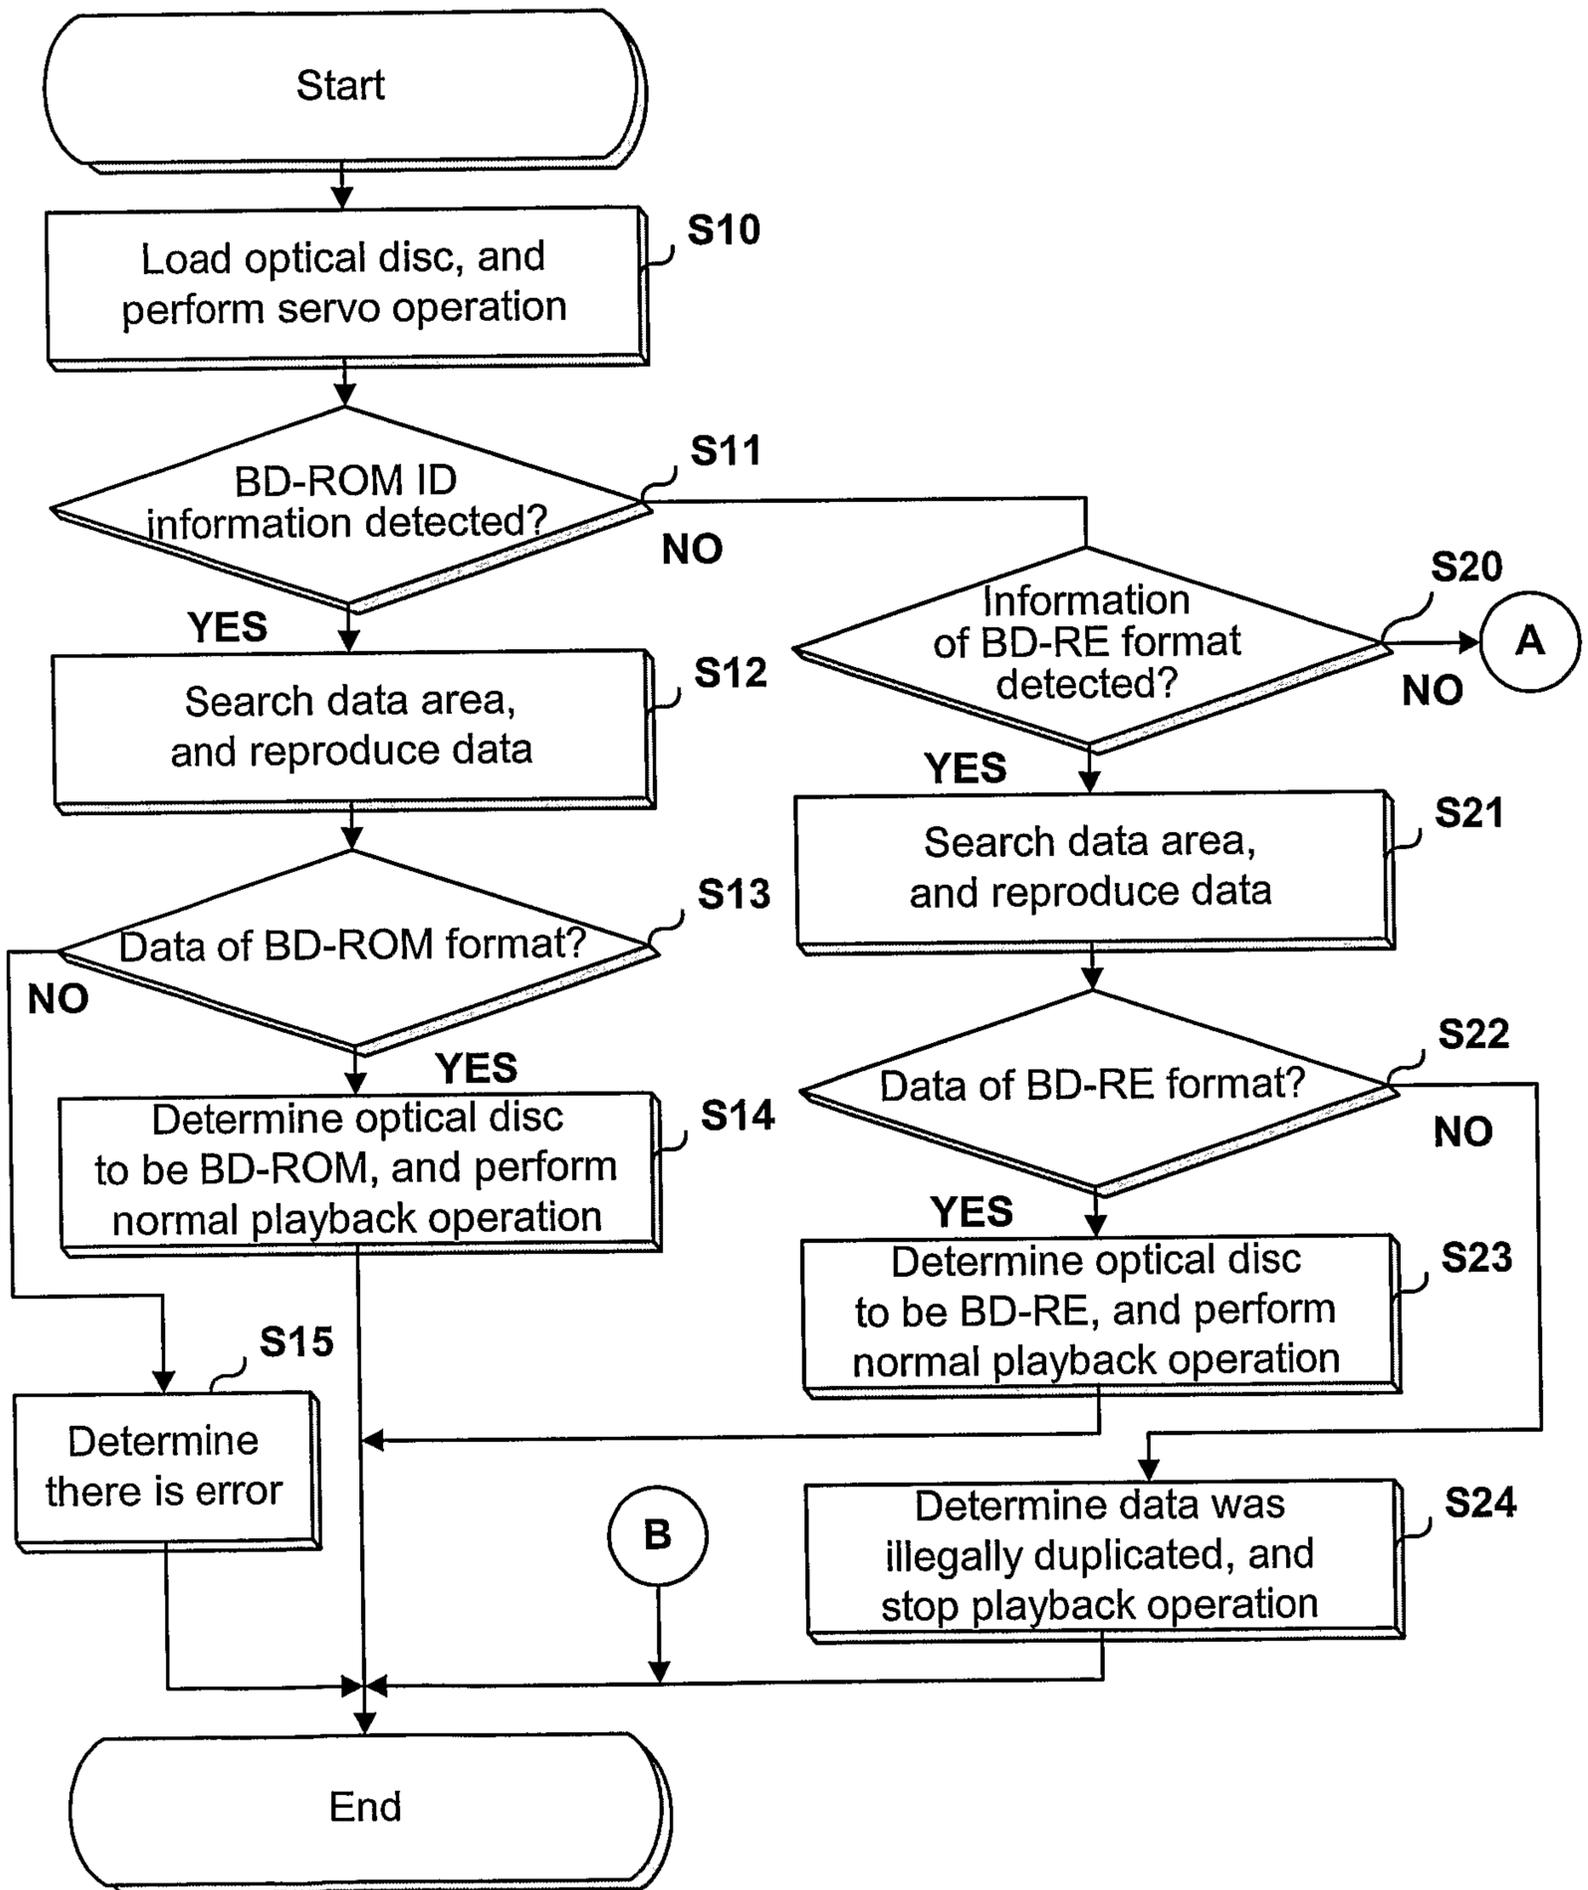


FIG. 9(b)

