



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
21.08.2024 Bulletin 2024/34

(51) International Patent Classification (IPC):
F23D 14/02 ^(2006.01)

(21) Application number: **22897637.9**

(52) Cooperative Patent Classification (CPC):
F23D 14/02

(22) Date of filing: **14.11.2022**

(86) International application number:
PCT/CN2022/131636

(87) International publication number:
WO 2023/093554 (01.06.2023 Gazette 2023/22)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC ME MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA
Designated Validation States:
KH MA MD TN

(72) Inventors:
• **LI, Weizhen**
Dalian, Liaoning 116023 (CN)
• **ZHANG, Jingcai**
Dalian, Liaoning 116023 (CN)
• **ZHANG, Tao**
Dalian, Liaoning 116023 (CN)

(30) Priority: **23.11.2021 CN 202111396849**
23.11.2021 CN 202122880926 U

(74) Representative: **Murgitroyd & Company**
165-169 Scotland Street
Glasgow G5 8PL (GB)

(71) Applicant: **Dalian Institute of Chemical Physics,**
Chinese Academy of Sciences
Dalian, Liaoning 116023 (CN)

(54) **GAS-AIR MIXING STRUCTURE AND BURNER**

(57) A gas-air mixing structure and a burner, comprising an external supporting structure (2) arranged in a housing (1) and a gas array pipe connected to the external supporting structure (2). An air inlet is connected to one end of the housing (1). A gas mixing channel is provided between the gas array pipe and a mixed gas outlet. The gas array pipe consists of multiple gas pipes (3) arranged in an array, the gas pipes (3) are provided

with gas inlets and gas outlets (4), and the gas outlets (4) are arranged on the leeward surfaces of the gas pipes (3). A gas inlet pipe is arranged on the air channel and gas outlet holes (4) are spaced apart on the leeward surfaces of the gas pipes (3) to uniformly mix the gas ejected from the gas outlet holes (4) by utilizing a Coanda effect of air upon a circular pipe.

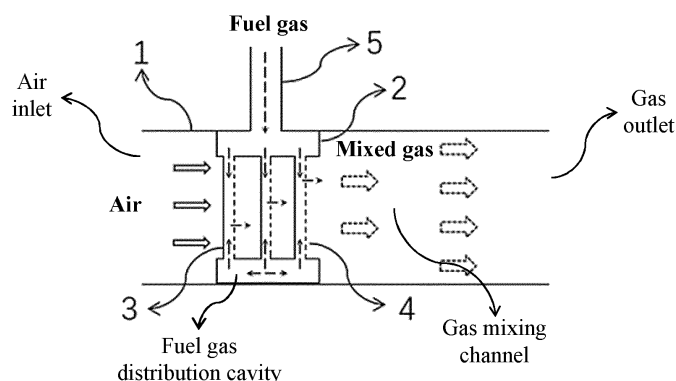


FIG. 1

Description**TECHNICAL FIELD**

[0001] The present disclosure relates to the technical field of burning apparatuses, and in particular to a gas-air mixing structure and a burner.

BACKGROUND

[0002] A gas mixing structure of a traditional burner is specifically described as follows: fresh air is sucked by a fan from an air inlet, and the fresh air is accelerated by a fan impeller to enter an air duct of a burning head; gas enters a gas pipe in the burning head through a gas pipeline, and enters a hole duct of a mixing disc at the most front end of the burning head through the gas pipe; the fresh air and the gas are preliminarily mixed in the mixing disc and ignited, and the gas and the air are further mixed and burnt out in the burning process. The traditional burner has a simple mixing structure, but the mixing of gas and air is not uniform. Preliminary mixing is performed before burning, and a burning manner by which mixing is performed while burning is employed. A large amount of NO_x ($>150\text{mg}/\text{Nm}^3$) and CO are generated at a local high temperature, which pollutes an environment.

[0003] A staged-burning burner includes gas staging and air staging. By taking air staging as an example, primary air is mixed with gas to form primary premixed gas, and fuel-rich gas is formed due to excessive gas. The primary premixed gas reaches a burning disc through a primary premixed gas channel and is ignited to form central fuel-rich flame. Secondary air is directly mixed into the periphery of the fuel-rich flame through a secondary air channel, and fuel-lean flame with excessive air is formed around the fuel-rich flame. The staged-burning burner can complete mixing while burning, which can solve the pollution problem caused by the NO_x ($>150\text{mg}/\text{Nm}^3$) and the CO to some extent, but its structure is complex, and burning flame is turbulent.

[0004] At present, there is also a full/upstream-premixing burner on the market, which employs a Venturi structure. Specifically, air is sucked into a fan through a Venturi air inlet of the fan, gas is sucked into the fan through a Venturi gas inlet of the fan, and the gas and the air are mixed inside the fan (explosion proof) under high-speed stirring of an impeller. Premixed gas after mixing enters an inner cylinder of a burning head having a metal surface, and the premixed gas reaches the surface of the burning head through metal fiber micro gaps and is ignited to form surface burning flame. Although this burner can achieve low emission of CO and NO_x , it needs to be equipped with a special fan, a valve group and a Venturi gas-intake structure, such that the structure of the burner is complex, and a control system thereof is complex. The burner has the metal surface, which is likely to cause blockage, backfire and even explosion, resulting in a relatively large safety risk, and frequent maintenance is

needed.

SUMMARY

[0005] Based on the above-mentioned technical problems, a gas-air mixing structure, and a burner are provided. The technical means employed by the present disclosure are as follows:

A gas-air mixing structure includes an external supporting structure arranged in a housing and a gas array pipe connected thereto. An air inlet is connected to one end of the housing, and a gas mixing channel is arranged between the gas array pipe and a mixed gas outlet. The gas array pipe includes a plurality of gas pipes arranged in an array manner, each of the gas pipes is provided with gas inlets and a plurality of gas output holes, and the plurality of gas output holes are provided on the leeward surface of each of the plurality of gas pipes.

[0006] Furthermore, the plurality of gas output holes are provided on the leeward surface of each of the plurality of gas pipes, and are circular holes or slits.

[0007] Furthermore, the sectional area of each of the plurality of gas output holes is $1/20$ to $1/2$ of the sectional area of the gas pipe.

[0008] Furthermore, several circular holes with a sectional area of $1/10$ of the sectional area of the gas pipe are evenly distributed at the center of the leeward surface of each of the gas pipe with a spacing of 5 times the diameter of the circular hole.

[0009] Furthermore, at least one row of gas pipes arranged in an array manner is arranged.

[0010] Furthermore, when the gas pipes are in multiple rows, two adjacent rows are arranged in a staggered manner.

[0011] Furthermore, the external supporting structure includes a gas distribution cavity surrounding the gas array pipe, and the gas distribution cavity is provided with a gas intake mains. One end of each gas pipe is connected to the gas distribution cavity, or both ends of each gas pipe are connected to the gas distribution cavity.

[0012] Furthermore, the gas distribution cavity includes has a gas intake structure of annular type, C-shaped type, hollow square type, and single-side type.

[0013] The present disclosure further provides a burner, which includes the gas-air mixing structure.

[0014] According to the present disclosure, based on the Coanda effect, gas pipes for gas entry are (perpendicularly) arranged on an air channel, and the gas output holes are provided at intervals on the leeward surfaces of the gas pipes, such that air is uniformly mixed with gas ejected from the gas output holes by using the Coanda effect of air upon a circular pipe. Compared with the upstream-premixing manner by which a gas inlet is provided at an air inlet of a fan, the manner by which the air and the gas are mixed after the fan does not need the process in which the gas is sucked into the fan and then is mixed in the fan by means of the impeller, thereby avoiding the risk of deflagration of the gas and air mixture, which is

caused by electrostatic discharge possibly caused by mechanical friction generated by rotation of the fan, and improving safety.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] In order to more clearly describe the technical solutions in the embodiments of the present disclosure or in the prior art, a brief introduction to the accompanying drawings required for the description of the embodiments or the prior art will be provided below. Obviously, the accompanying drawings in the following description are some embodiments of the present disclosure. Those of ordinary skill in the art can also derive other accompanying drawings from these accompanying drawings without making inventive efforts.

FIG. 1 shows a sectional diagram from a side view of the present disclosure.

FIG. 2 shows a sectional diagram from a top view of the present disclosure.

FIG. 3 shows a sectional diagram facing the gas outlet holes of the present disclosure.

FIG. 4 shows a sectional diagram facing an air inlet of the present disclosure.

FIG. 5 shows a schematic diagram of gas mixing of the present disclosure.

FIG. 6 shows gas intake structure diagrams of a gas distribution cavity in embodiments of the present disclosure, where FIG. 6(a) shows type I of a square type, FIG. 6(b) shows type II of a square type, FIG. 6(c) shows a C-shaped type, FIG. 6(d) shows a single-side type, FIG. 6(e) shows type I of an annular type, and FIG. 6(f) shows type II of an annular type gas intake.

[0016] In the figures: 1. housing, 2. external supporting structure, 3. gas pipe, 4. gas output hole, 5. gas intake mains.

DETAILED DESCRIPTION OF EMBODIMENTS

[0017] To make the objectives, technical solutions and advantages of embodiments of the present disclosure more obvious, the technical solutions of the present disclosure will be clearly and completely described below in conjunction with the accompanying drawings in the embodiments of the present disclosure. Obviously, the described embodiments are some, rather than all of the embodiments of the present disclosure. Based on the embodiments of the present disclosure, all other embodiments acquired by those ordinary skilled in the art without making creative efforts fall within the scope of protection

of the present disclosure.

[0018] As shown in FIGs. 1 to 4, a gas-air mixing structure is disclosed in an embodiment of the present disclosure. The structure includes an external supporting structure 2 arranged in a housing 1 and a gas array pipe connected to the external supporting structure 2. An air inlet is connected to one end of the housing, and a gas mixing channel is arranged between the gas array pipe and a mixed gas outlet (namely a gas outlet). The gas array pipe includes a plurality of gas pipes arranged in an array manner. Each of the plurality of gas pipes is provided with gas inlets and a plurality of gas output holes, and the plurality of gas output holes are provided on the leeward surfaces of the plurality of gas pipes. Gas output from the gas output holes is mixed with air to form a mixed gas.

[0019] The plurality of gas output holes are provided on the leeward surface of each of the plurality of gas pipes, and each of the plurality of gas output holes is circular hole or slit. The sectional area of each of the plurality of gas output holes is 1/20 to 1/2 of the sectional area of the gas pipe. The arrangement manner of the plurality of gas output holes is that several circular holes with a sectional area of 1/10 of the sectional area of the gas pipe are evenly distributed at the center of the leeward surface of the gas pipe with a spacing of 5 times the diameter of the circular hole.

[0020] At least one row of gas pipes arranged in an array manner is arranged. As shown in FIG. 5, when the gas pipes are in multiple rows, two adjacent rows are arranged in a staggered manner.

[0021] The external supporting structure and the housing form a gas distribution cavity, and the housing of the gas distribution cavity is provided with a gas intake mains. One end of each gas pipe is connected to the gas distribution cavity, or both ends of each gas pipe are connected to the gas distribution cavity. Some embodiments are shown in FIG. 6(a) to (f), and the gas distribution cavity includes a gas intake structure of annular type, C-shaped type, hollow square type, and single-side type. Specifically, FIG. 6(a) shows a hollow square type, where all the gas pipes are parallel to the gas intake mains. FIG. 6(b) shows another hollow square type gas intake, where all the gas pipes are perpendicular to the gas intake mains. Gas is circulated in a hollow square shape in the hollow square type gas intake. FIG. 6(c) shows a C-shaped type with closed ends, where all gas pipes are parallel to the gas intake mains. FIG. 6(d) shows a single-side type, where all gas pipes are perpendicular to the gas intake mains, and both ends of the gas intake side are closed, that is, the input gas is circulated in all the gas pipes. The overall thinking of annular type gas intake structure shown in FIG. 6(e) and FIG. 6(f) is the same as that of the hollow square type gas intake structure shown in FIG. 6(a) and FIG. 6(b), and the difference is that the circulation path is annular.

[0022] Finally, it should be noted that the above embodiments are only used to illustrate the technical solu-

tions of the present invention, but not to limit them; although the present invention has been described in detail with reference to the foregoing embodiments, those ordinarily skilled in the art should understand that: the technical solutions described in the foregoing embodiments can still be modified, or some or all of the technical features thereof can be equivalently replaced; and these modifications or replacements do not make the essence of the corresponding technical solutions deviate from the scope of the technical solutions of the embodiments of the present invention.

Claims

1. A gas-air mixing structure, **characterized by** comprising an external supporting structure arranged in a housing and a gas array pipe connected thereto, wherein an air inlet is connected to one end of the housing, a gas mixing channel is arranged between the gas array pipe and a mixed gas outlet, the gas array pipe comprises a plurality of gas pipes arranged in an array manner, each of the plurality of gas pipes is provided with gas inlets and a plurality of gas output holes, and the plurality of gas output holes are provided on the leeward surface of each of the plurality of gas pipes. 5
2. The gas-air mixing structure according to claim 1, **characterized in that** the plurality of gas output holes are provided on the leeward surface of each of the plurality of gas pipes, and each of the plurality of gas output holes is circular hole or slit. 10
3. The gas-air mixing structure according to claim 1, **characterized in that** the sectional area of each of the plurality of gas output holes is 1/20 to 1/2 of the sectional area of the gas pipe. 15
4. The gas-air mixing structure according to claim 1, **characterized in that** the arrangement manner of the plurality of gas output holes is that several circular holes with a sectional area of 1/10 of the sectional area of the gas pipe are evenly distributed at the center of the leeward surface of each of the gas pipe with a spacing of 5 times the diameter of the circular hole. 20
5. The gas-air mixing structure according to claim 1, **characterized in that** at least one row of gas pipes arranged in an array manner is arranged. 25
6. The gas-air mixing structure according to claim 5, **characterized in that** when the gas pipes are in multiple rows, two adjacent rows are arranged in a staggered manner. 30
7. The gas-air mixing structure according to claim 1, **characterized in that** the external supporting structure and the housing form a gas distribution cavity, the housing of the gas distribution cavity is provided with a gas intake mains, one end of each gas pipe is connected to the gas distribution cavity, or both ends of each gas pipe are connected to the gas distribution cavity. 35
8. The gas-air mixing structure according to claim 7, **characterized in that** the gas distribution cavity has a gas intake structure of annular type, C-shaped type, hollow square type, and single-side type. 40
9. A burner, **characterized by** comprising the gas-air mixing structure according to any one of claims 1-8. 45

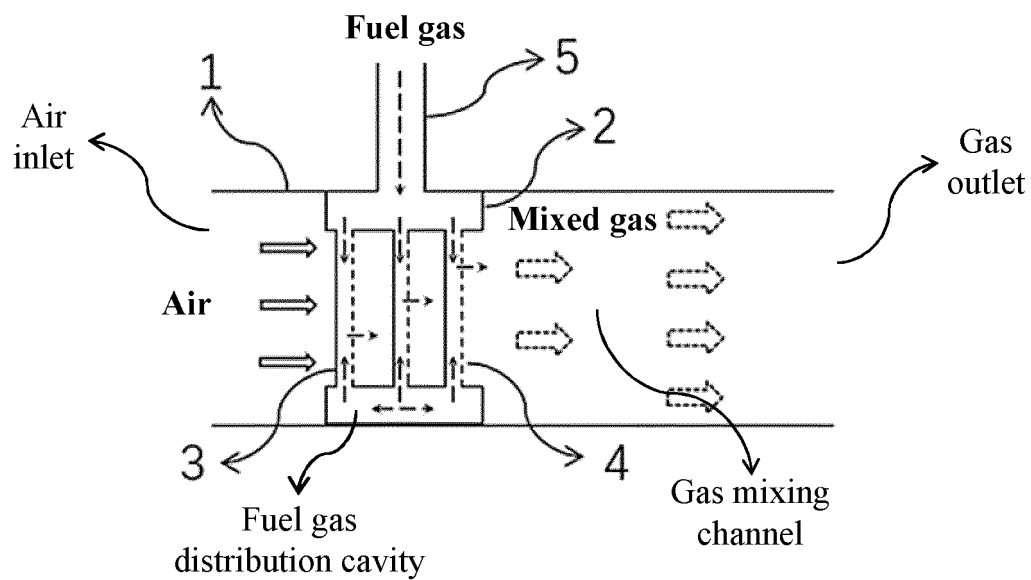


FIG. 1

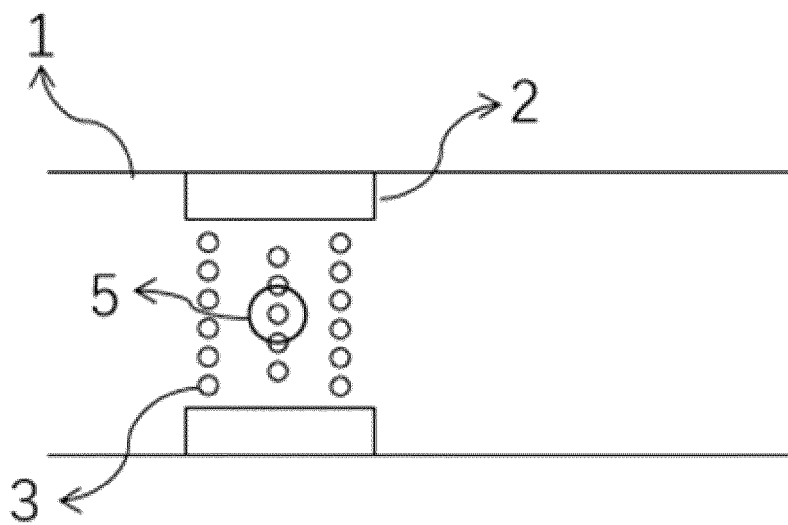


FIG. 2

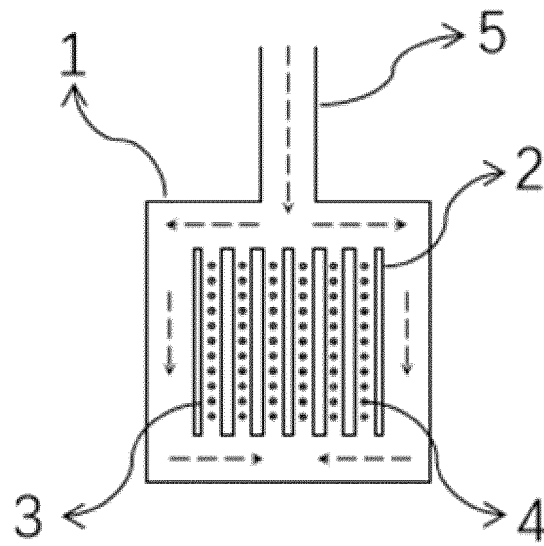


FIG. 3

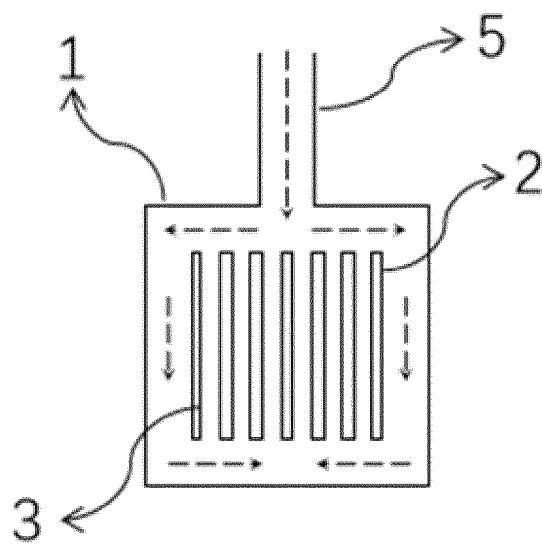


FIG. 4



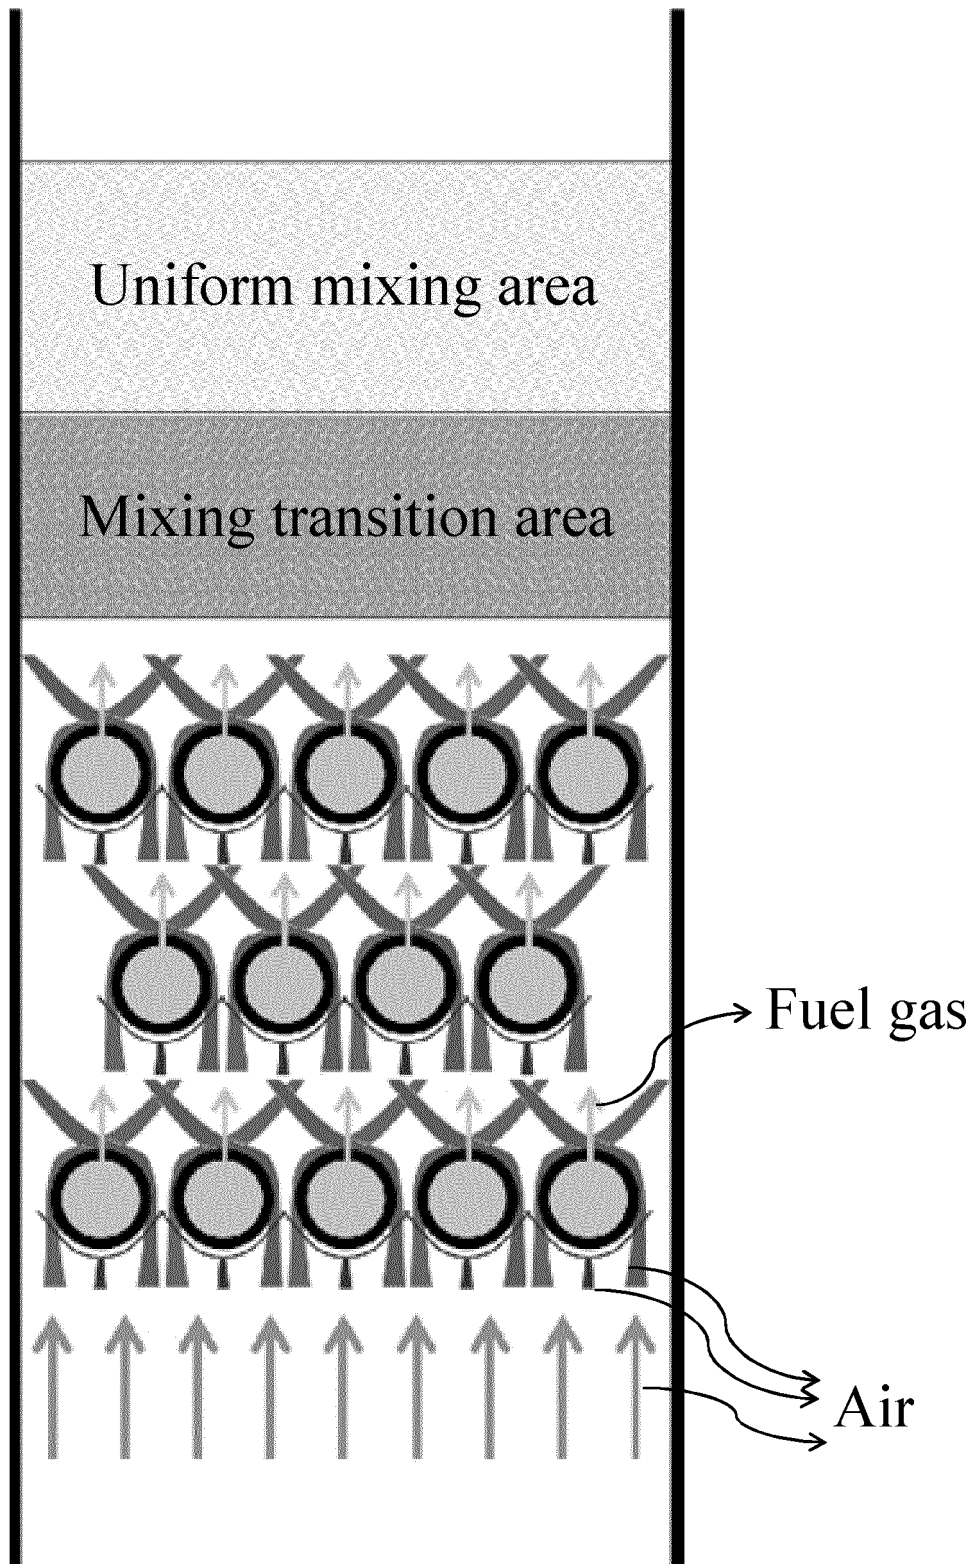




FIG. 5

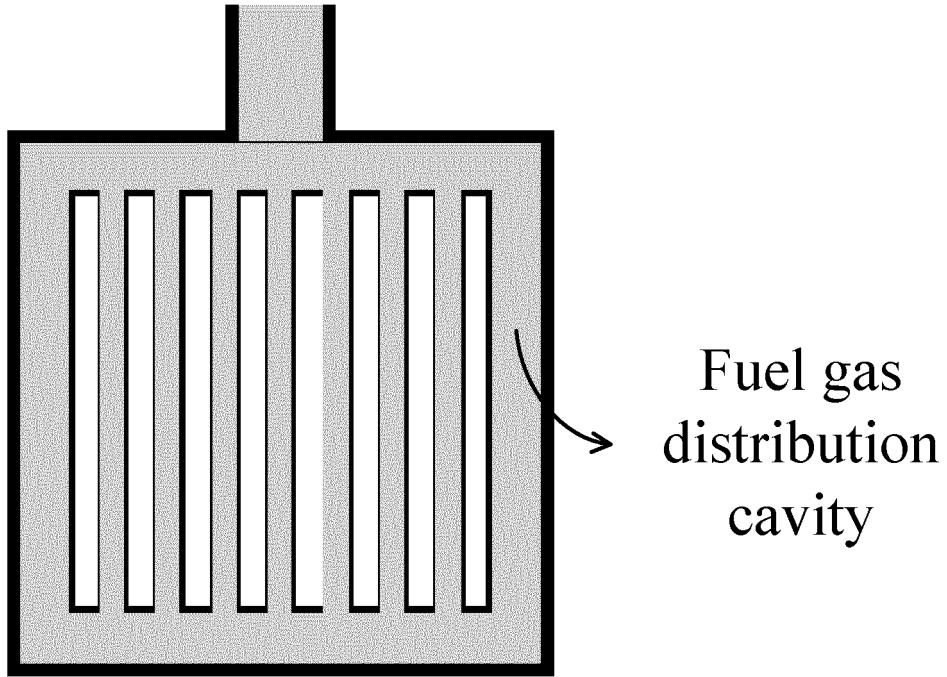


(a)

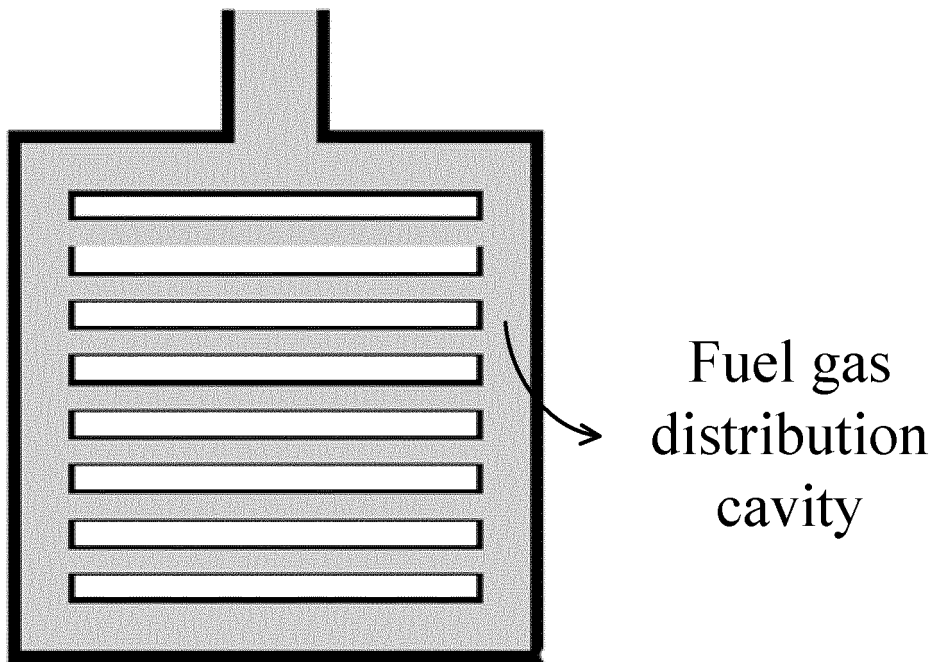


(b)

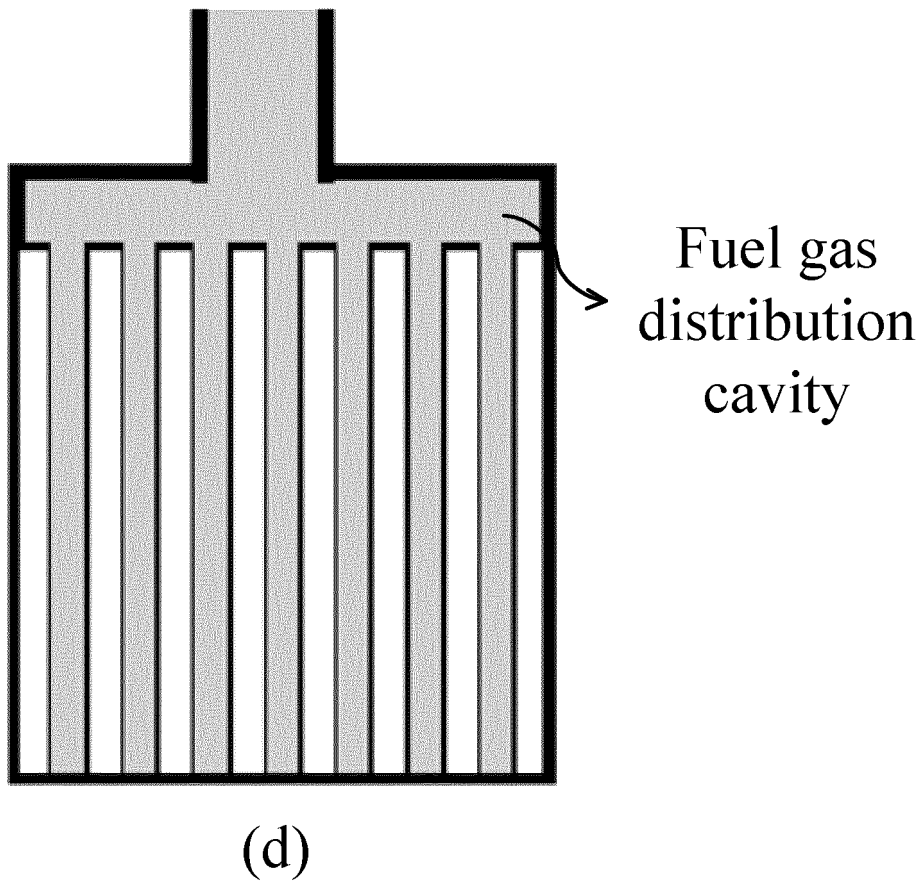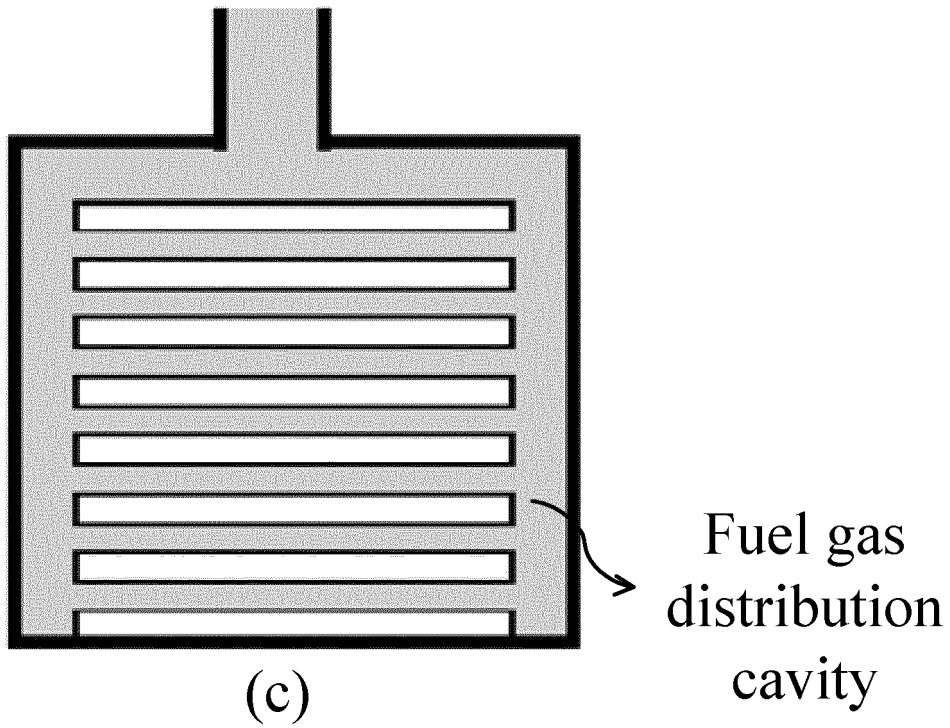

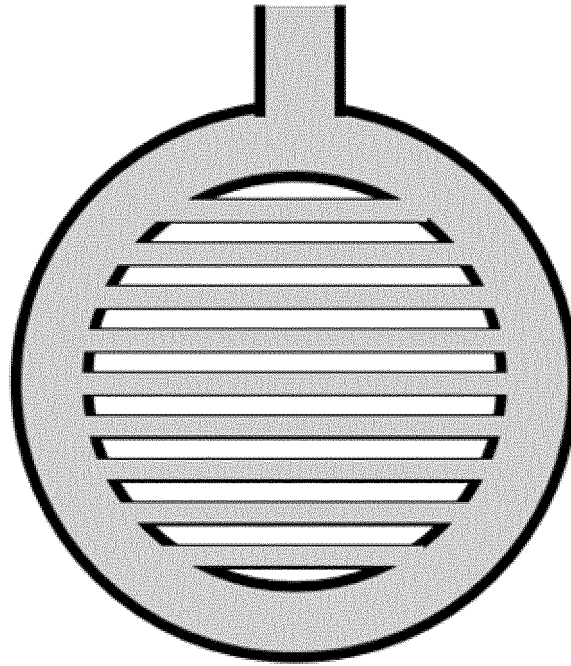

(e)

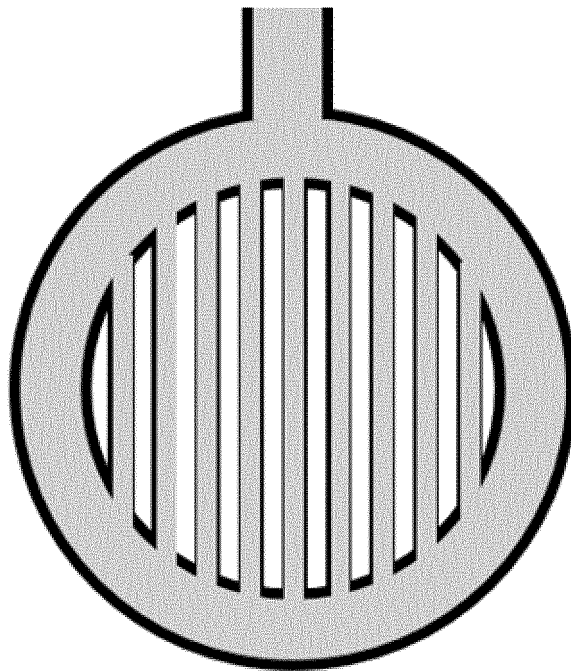

(f)

FIG. 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2022/131636

A. CLASSIFICATION OF SUBJECT MATTER F23D14/02(2006.01)i According to International Patent Classification (IPC) or to both national classification and IPC																		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC: F23D,F23C Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) CNTXT, VEN, WPABS, ENTXTC, DWPI: 燃气, 阵列, 管, 空气, 混合, 喷嘴, gas, array, pipe, tube, air, mix, mixing, nozzle																		
C. DOCUMENTS CONSIDERED TO BE RELEVANT <table border="1"> <thead> <tr> <th>Category*</th> <th>Citation of document, with indication, where appropriate, of the relevant passages</th> <th>Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td>Y</td> <td>CN 214038414 U (SICHUAN MINNON TECHNOLOGY DEVELOPMENT CO., LTD.) 24 August 2021 (2021-08-24) description, paragraphs [0021]-[0028], and figures 1-2</td> <td>1-9</td> </tr> <tr> <td>Y</td> <td>CN 112963833 A (XI'AN JIAOTONG UNIVERSITY) 15 June 2021 (2021-06-15) description, paragraphs [0030]-[0045], and figures 1-4</td> <td>1-9</td> </tr> <tr> <td>A</td> <td>CN 108980829 A (SHANGHAI JUHE THERMAL TECHNOLOGY CO., LTD.) 11 December 2018 (2018-12-11) entire document</td> <td>1-9</td> </tr> <tr> <td>A</td> <td>CN 207622007 U (GUANGXI FULI YONGHENG KITCHEN EQUIPMENT CO., LTD.) 17 July 2018 (2018-07-17) entire document</td> <td>1-9</td> </tr> <tr> <td>PX</td> <td>CN 114034043 A (DALIAN INSTITUTE OF CHEMICAL PHYSICS, CHINESE ACADEMY OF SCIENCES) 11 February 2022 (2022-02-11) claims 1-9</td> <td>1-9</td> </tr> </tbody> </table>	Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	Y	CN 214038414 U (SICHUAN MINNON TECHNOLOGY DEVELOPMENT CO., LTD.) 24 August 2021 (2021-08-24) description, paragraphs [0021]-[0028], and figures 1-2	1-9	Y	CN 112963833 A (XI'AN JIAOTONG UNIVERSITY) 15 June 2021 (2021-06-15) description, paragraphs [0030]-[0045], and figures 1-4	1-9	A	CN 108980829 A (SHANGHAI JUHE THERMAL TECHNOLOGY CO., LTD.) 11 December 2018 (2018-12-11) entire document	1-9	A	CN 207622007 U (GUANGXI FULI YONGHENG KITCHEN EQUIPMENT CO., LTD.) 17 July 2018 (2018-07-17) entire document	1-9	PX	CN 114034043 A (DALIAN INSTITUTE OF CHEMICAL PHYSICS, CHINESE ACADEMY OF SCIENCES) 11 February 2022 (2022-02-11) claims 1-9	1-9
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.																
Y	CN 214038414 U (SICHUAN MINNON TECHNOLOGY DEVELOPMENT CO., LTD.) 24 August 2021 (2021-08-24) description, paragraphs [0021]-[0028], and figures 1-2	1-9																
Y	CN 112963833 A (XI'AN JIAOTONG UNIVERSITY) 15 June 2021 (2021-06-15) description, paragraphs [0030]-[0045], and figures 1-4	1-9																
A	CN 108980829 A (SHANGHAI JUHE THERMAL TECHNOLOGY CO., LTD.) 11 December 2018 (2018-12-11) entire document	1-9																
A	CN 207622007 U (GUANGXI FULI YONGHENG KITCHEN EQUIPMENT CO., LTD.) 17 July 2018 (2018-07-17) entire document	1-9																
PX	CN 114034043 A (DALIAN INSTITUTE OF CHEMICAL PHYSICS, CHINESE ACADEMY OF SCIENCES) 11 February 2022 (2022-02-11) claims 1-9	1-9																
☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex. * Special categories of cited documents: “A” document defining the general state of the art which is not considered to be of particular relevance “D” document cited by the applicant in the international application “E” earlier application or patent but published on or after the international filing date “L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) “O” document referring to an oral disclosure, use, exhibition or other means “P” document published prior to the international filing date but later than the priority date claimed “T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention “X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone “Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art “&” document member of the same patent family																		
Date of the actual completion of the international search 30 January 2023	Date of mailing of the international search report 08 February 2023																	
Name and mailing address of the ISA/CN China National Intellectual Property Administration (ISA/CN) China No. 6, Xitucheng Road, Jimenqiao, Haidian District, Beijing 100088 Facsimile No. (86-10)62019451	Authorized officer Telephone No.																	

Form PCT/ISA/210 (second sheet) (July 2022)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2022/131636

C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
PX	CN 216346272 U (DALIAN INSTITUTE OF CHEMICAL PHYSICS, CHINESE ACADEMY OF SCIENCES) 19 April 2022 (2022-04-19) claims 1-9	1-9
A	DE 1223197 B (SULZER AG) 18 August 1966 (1966-08-18) entire document	1-9
A	EP 0014221 A1 (KROMSCHROEDER AG G) 20 August 1980 (1980-08-20) entire document	1-9
A	JP 2863841 B1 (NAT AEROSPACE LAB) 03 March 1999 (1999-03-03) entire document	1-9
A	US 2009241942 A1 (SCHWANK LTD.) 01 October 2009 (2009-10-01) entire document	1-9

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2022/131636

Patent document cited in search report	Publication date (day/month/year)	Patent family member(s)	Publication date (day/month/year)
CN 214038414 U	24 August 2021	None	
CN 112963833 A	15 June 2021	None	
CN 108980829 A	11 December 2018	None	
CN 207622007 U	17 July 2018	None	
CN 114034043 A	11 February 2022	None	
CN 216346272 U	19 April 2022	None	
DE 1223197 B	18 August 1966	NL 290637 A	
EP 0014221 A1	20 August 1980	EP 0014221 B1	20 August 1980
		DE 2965172 D1	19 May 1983
JP 2863841 B1	03 March 1999	JPH 11201409 A	03 March 1999
US 2009241942 A1	01 October 2009	US 7874835 B2	01 October 2009
		CA 2657147 A1	27 September 2009
		CA 2657147 C	27 September 2009

Form PCT/ISA/210 (patent family annex) (July 2022)