United States Patent [19]

Shimodaira et al.

[11] **3,877,560**

[45] **Apr. 15, 1975**

[54] **PAPER GUIDE FOR A COMPACT FLYING PRINTER**

[75] Inventors: **Tadayoshi Shimodaira,** Suwa; **Yoshifumi Gomi,** Chino, both of Japan

[73] Assignee: **Kabushiki Kaisha Suwa Seikosha,** Tokyo, Japan

[22] Filed: **Apr. 28, 1972**

[21] Appl. No.: **248,369**

Related U.S. Application Data

[62] Division of Ser. No. 118,427, Feb. 24, 1971, Pat. No. 3,795,185.

[30] **Foreign Application Priority Data**

Feb. 27, 1970 Japan 45-16451

[52] **U.S. Cl.** ..... **197/133 R;** 197/127 R; 197/151; 197/157; 101/93 C

[51] **Int. Cl.** **B41j 15/00**

[58] **Field of Search** ..... 197/126 R, 126 A, 126 B, 197/127 R, 127 A, 128, 130, 131, 132, 133 R, 134, 135 R, 135 A, 138 R, 138 A, 151, 157; 226/2, 88, 104, 113, 119, 196, 197, 198, 199; 101/93 C

[56] **References Cited**

UNITED STATES PATENTS

577,104	2/1897	Dorman	197/135 R
1,489,828	4/1924	Hosking	226/88
2,098,940	11/1937	Blohm	197/133 R X
2,266,362	12/1941	Forster	226/88
2,365,318	12/1944	Wyrick	197/133 R X
2,517,147	8/1950	Vee	226/88 X
2,569,364	9/1951	Zenner	226/196 X
3,244,265	4/1966	Templeton	197/127 R

Primary Examiner—Ernest T. Wright, Jr.

Attorney, Agent, or Firm—Blum, Moscovitz, Friedman & Kaplan

[57] **ABSTRACT**

A compact flying printer has a continuously rotating print drum and ratchet wheel, a trigger lever positionable to be struck by a tooth of said ratchet wheel and a hammer lever driven by said trigger lever and provided with a print hammer at its end. Both print paper and inked ribbon are selectively advanced by a transmitting lever. The transmitting lever is mounted for reciprocal displacement and is operatively coupled to a continuously rotating member for selective displacement in response to the rotation of the rotating member. The print paper is guided by an upper and a lower paper guide, each of which are provided with projections on the inner surface thereof extending in the direction of travel of the print paper and projecting toward the other paper guide. The projections on the two guides are out of overlapping relation with each other. The gap between the outer surfaces of the projections of the respective paper guides is substantially equal to the thickness of the print paper.

1 Claim, 28 Drawing Figures

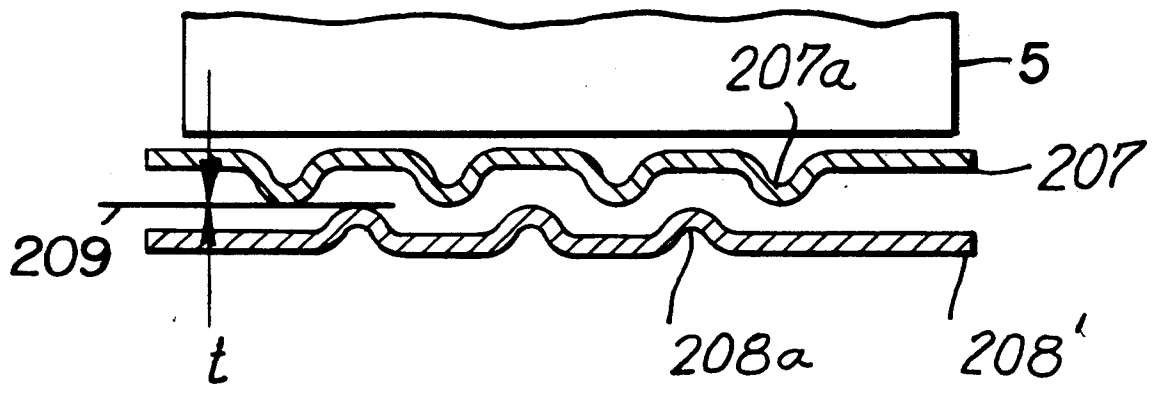


FIG. 1
PRIOR ART

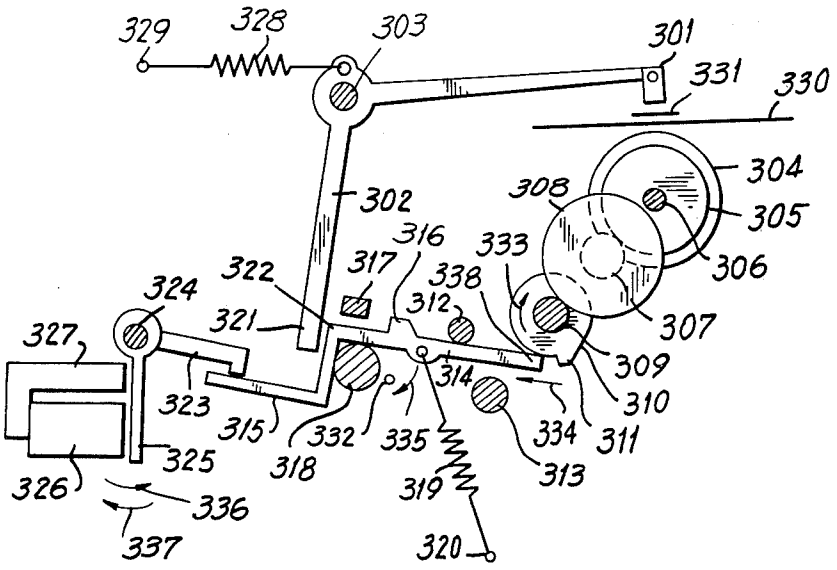


FIG. 3a

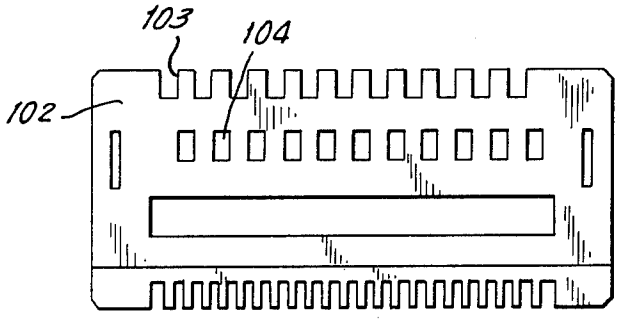


FIG. 2

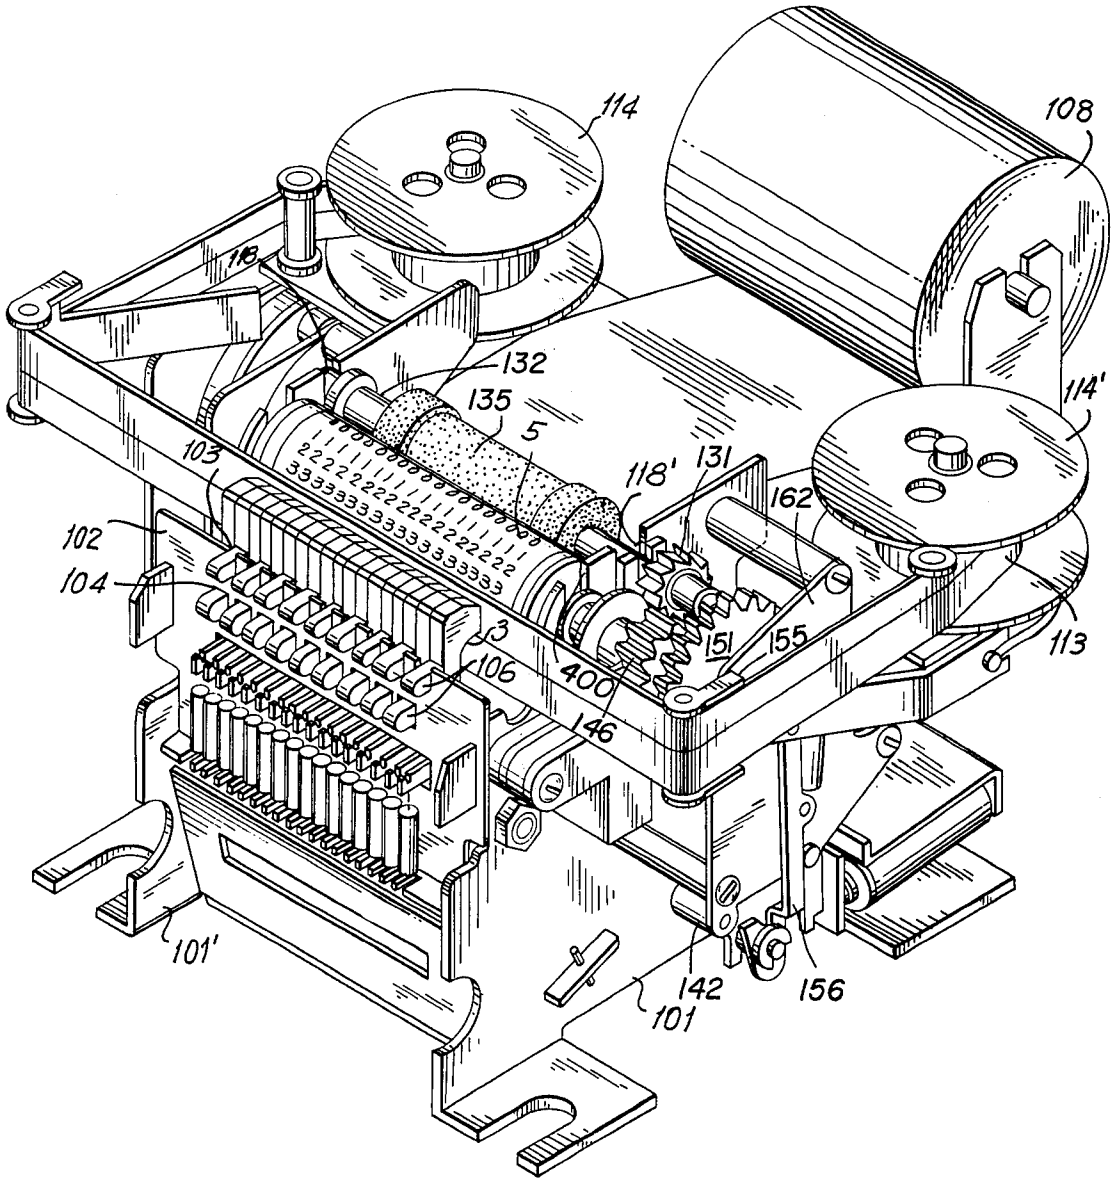

114
108
16
132
135
5
103
118'
131
162
114'
102
104
3
106
400
146
151
155
113
101'
142
101
156

FIG. 3

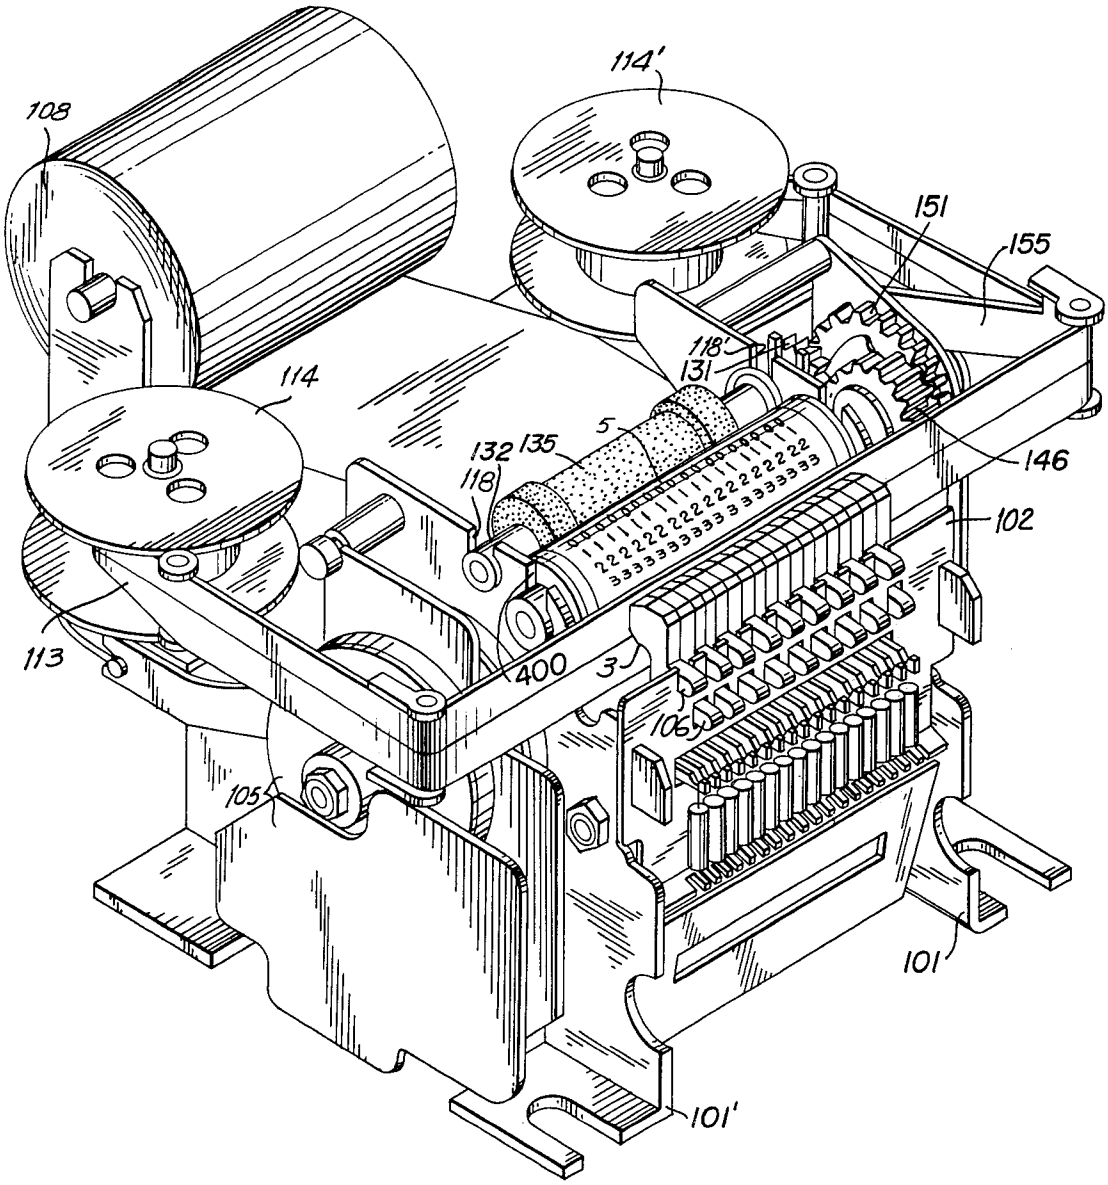

114'
108
151
155
118'
131
114
5
132
135
118
146
102
113
400
3
106
105
101
101'

FIG. 4

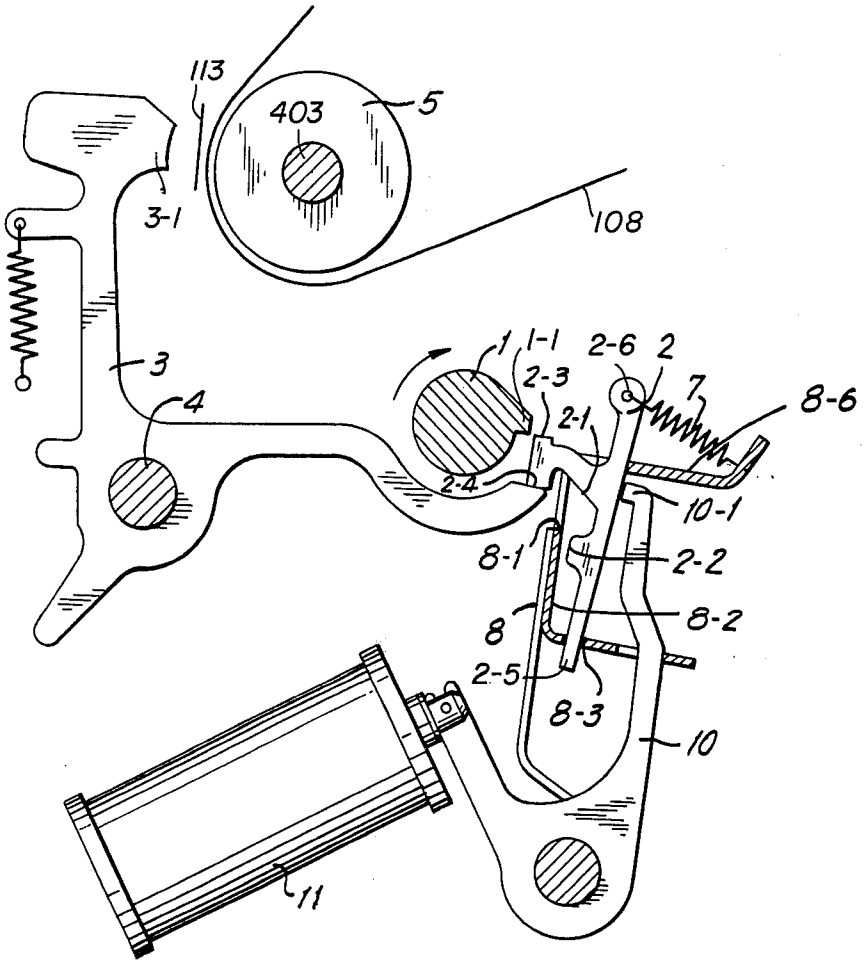


FIG. 5

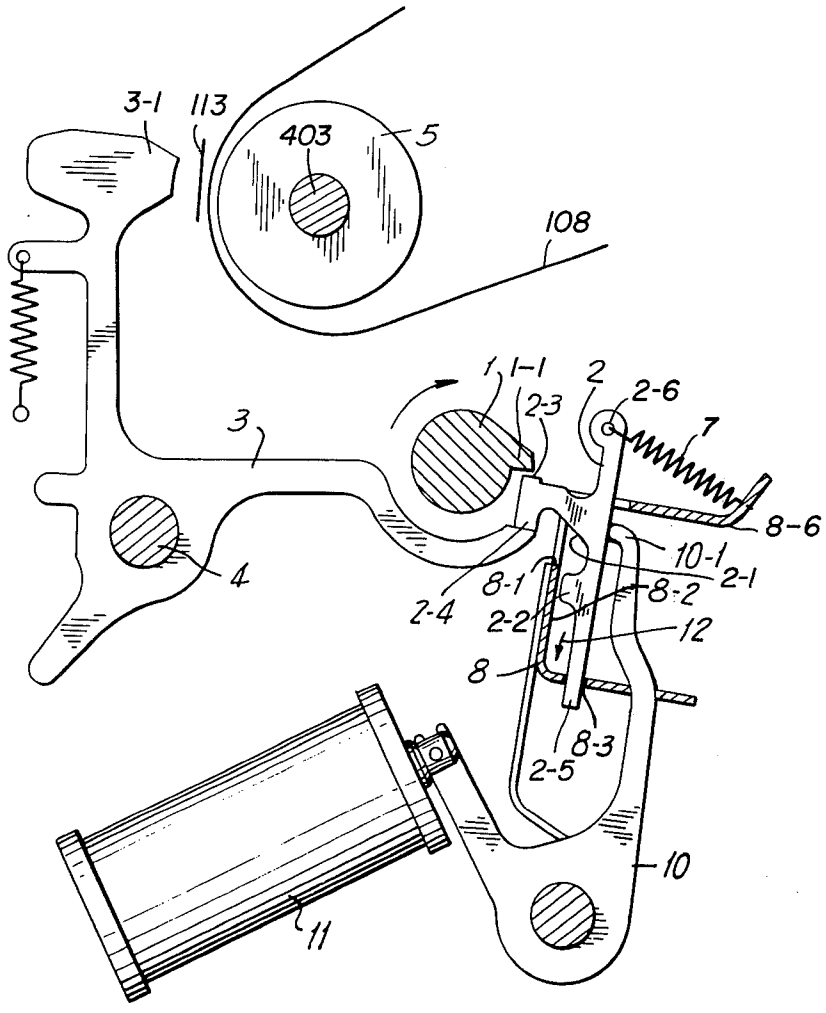


FIG. 6

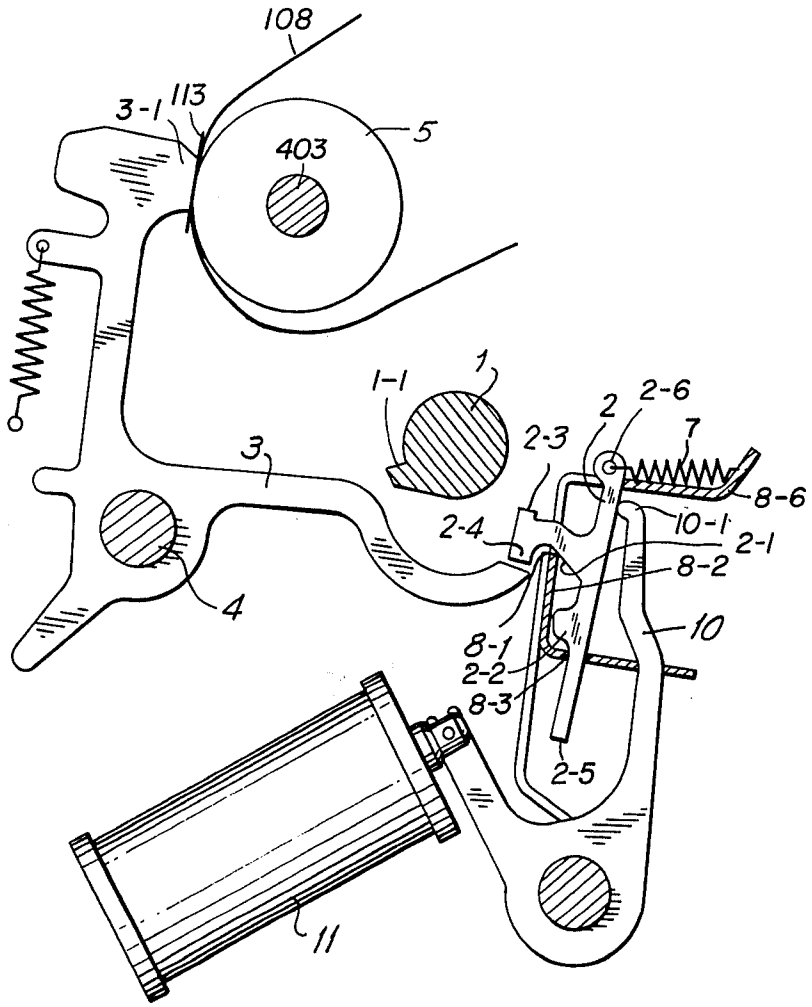


FIG. 7

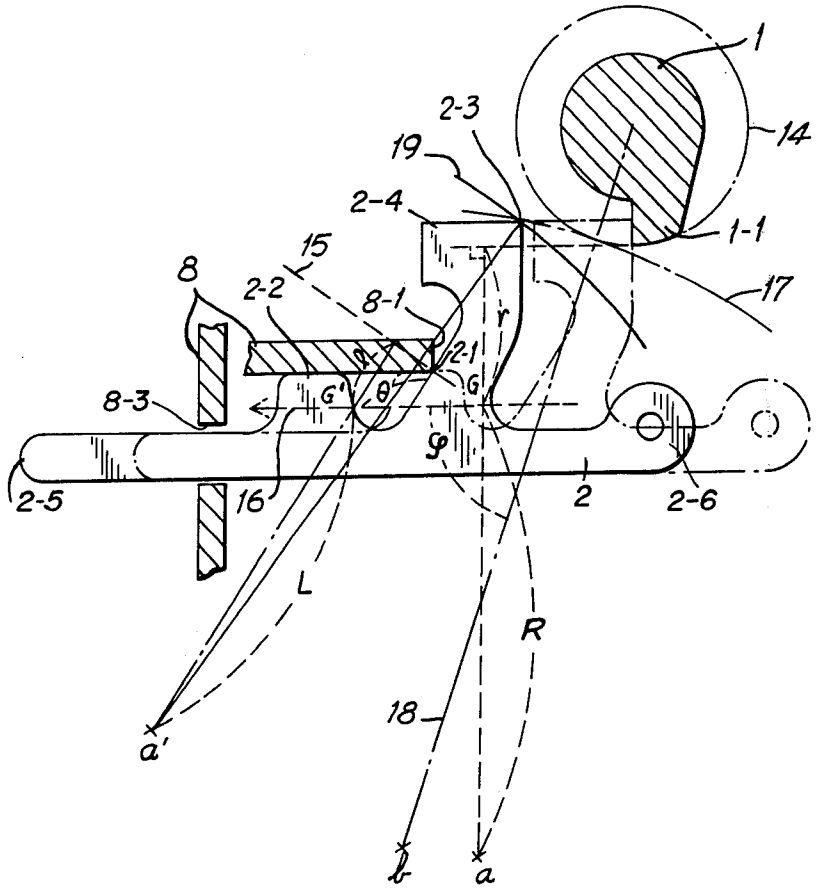


FIG. 8

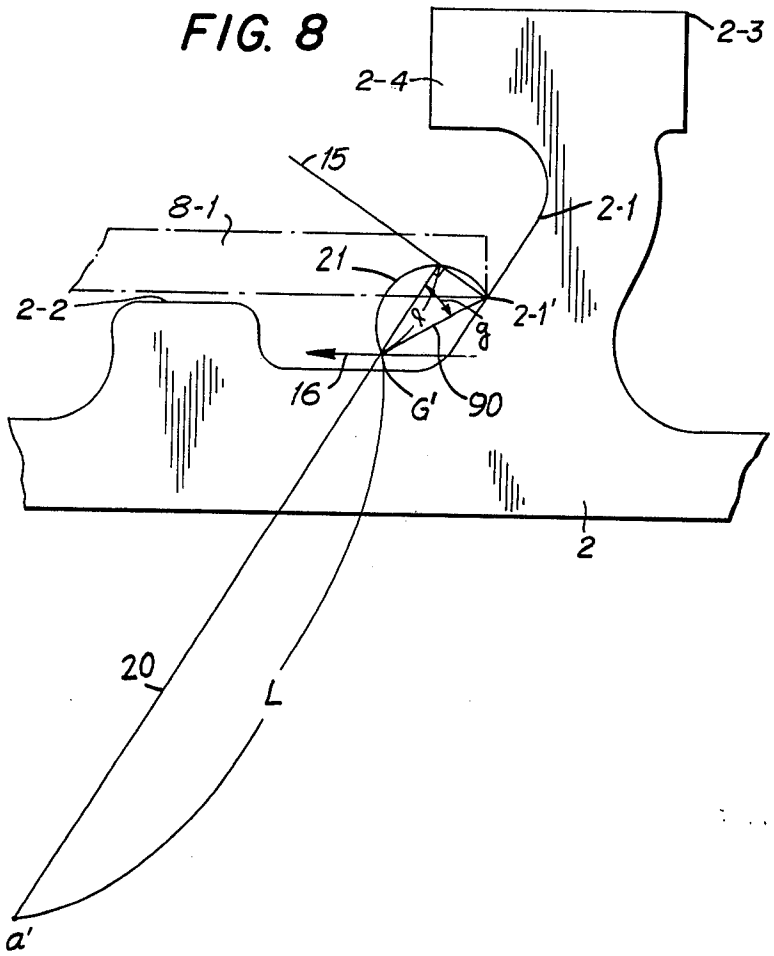


FIG. 9

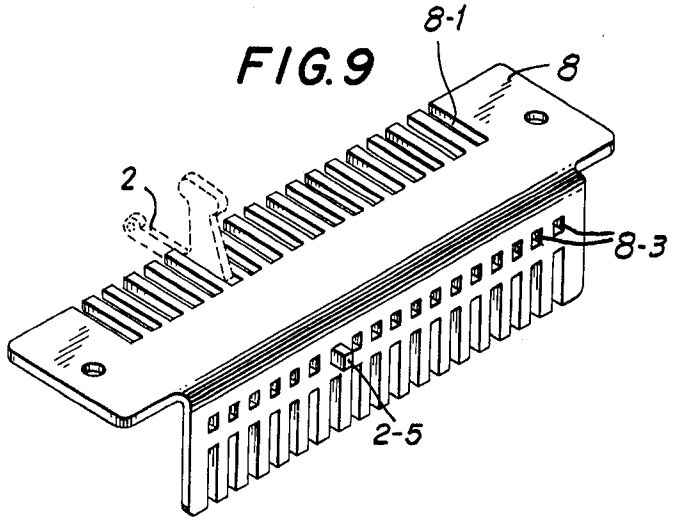


FIG. 10

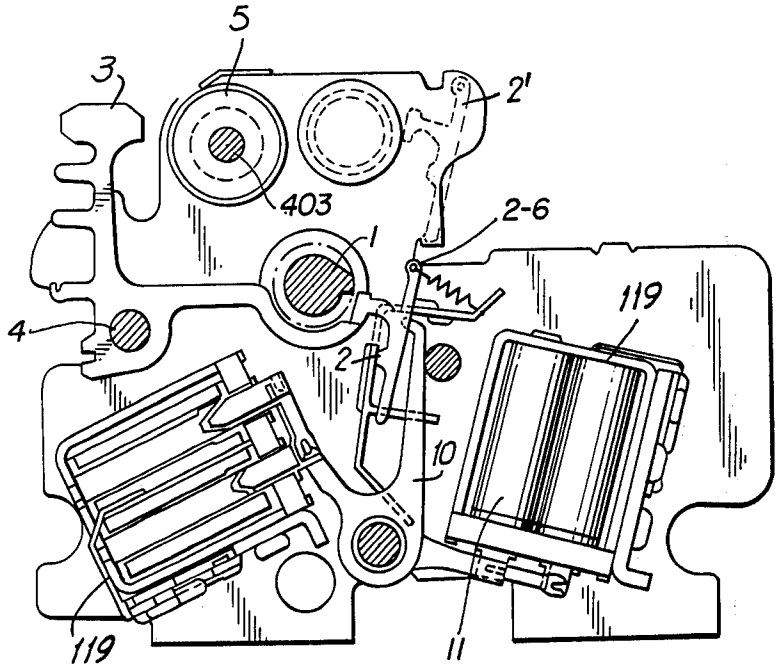


FIG. 11

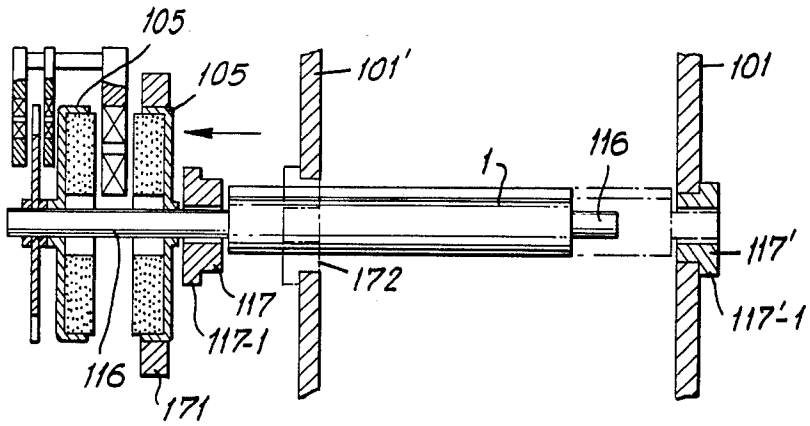


FIG. 12

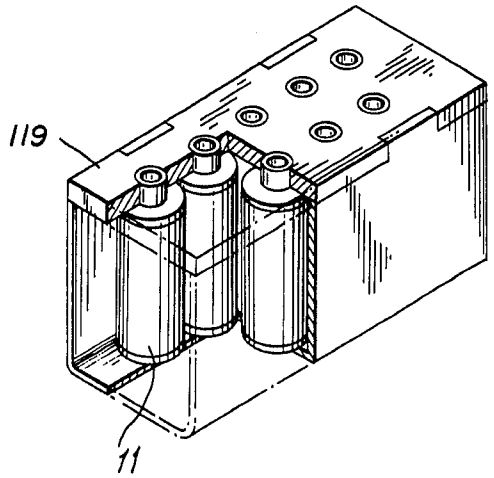


FIG.13

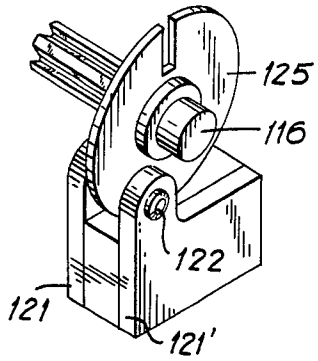


FIG.13a

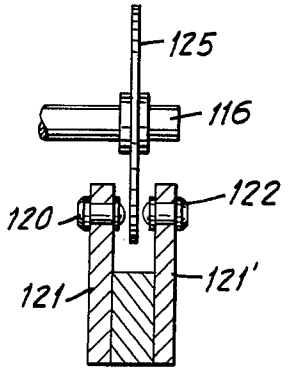


FIG. 14

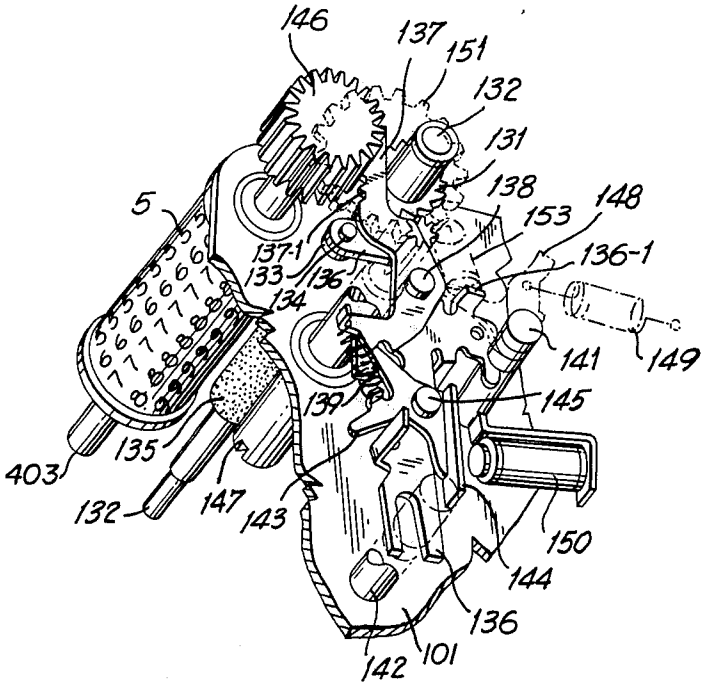

146
137
151
132
131
138
148
153
136-1
5
137-1
133
136
134
141
149
139
145
135
403
132
147
143
150
144
136
142
101

FIG. 15

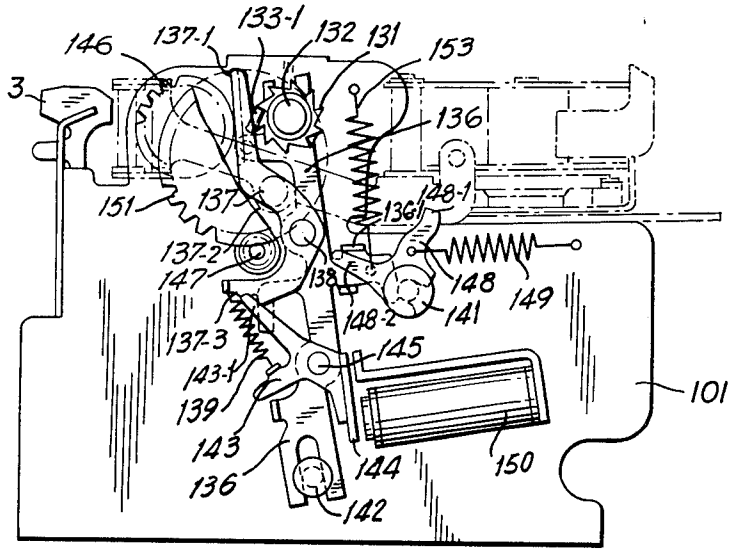

146
137-1
133-1
132
131
153
3
136
151
137
136-1
148-1
137-2
147
138
148
149
141
148-2
137-3
145
143-1
101
139
143
144
150
136
142

FIG. 16

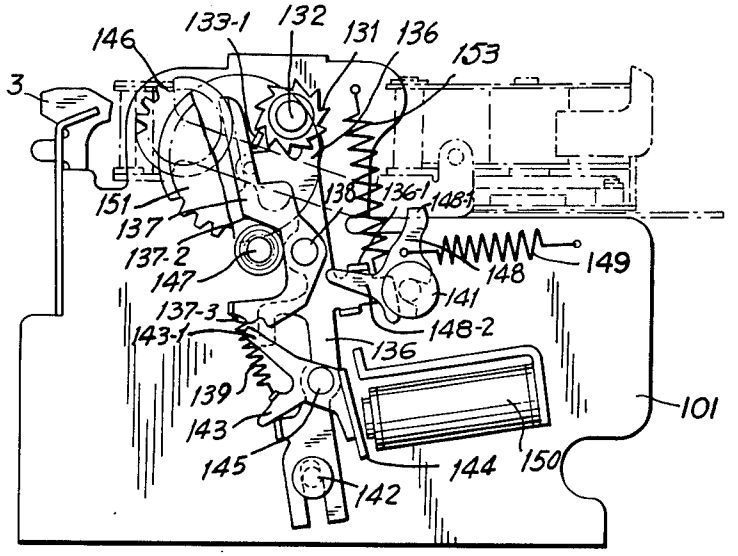

146
133-1
132
131
136
153
3
151
138
136-1
148-1
137
137-2
147
148
149
141
137-3
143-1
148-2
136
139
101
143
145
144
150
142

FIG. 17

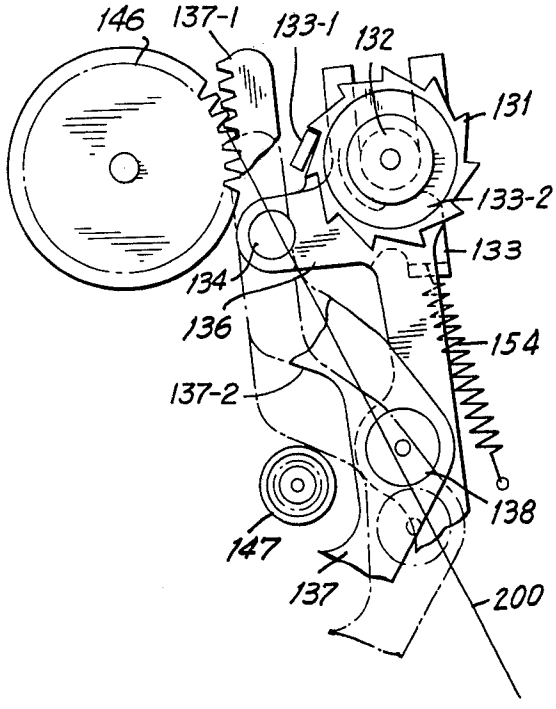


FIG. 18

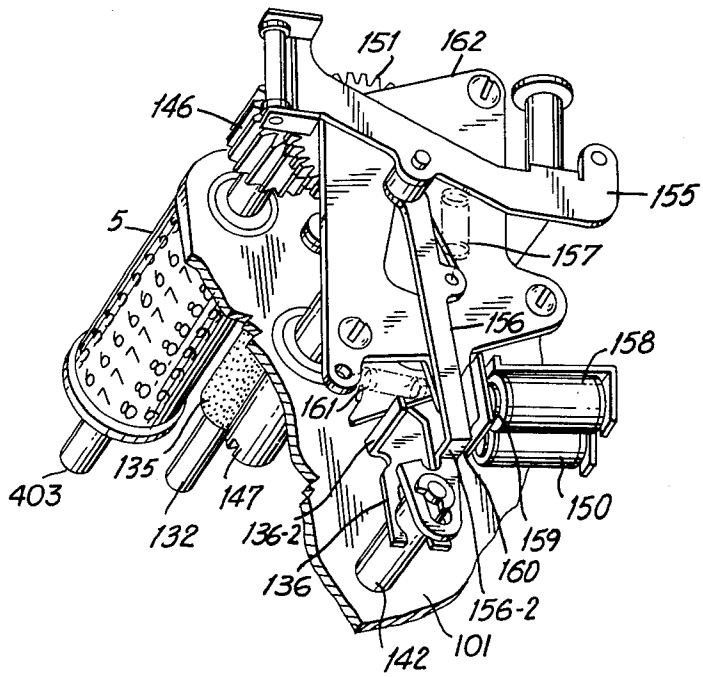

151
162
146
155
5
157
156
158
161
135
403
147
150
132
136-2
159
160
136
156-2
142
101

FIG. 19

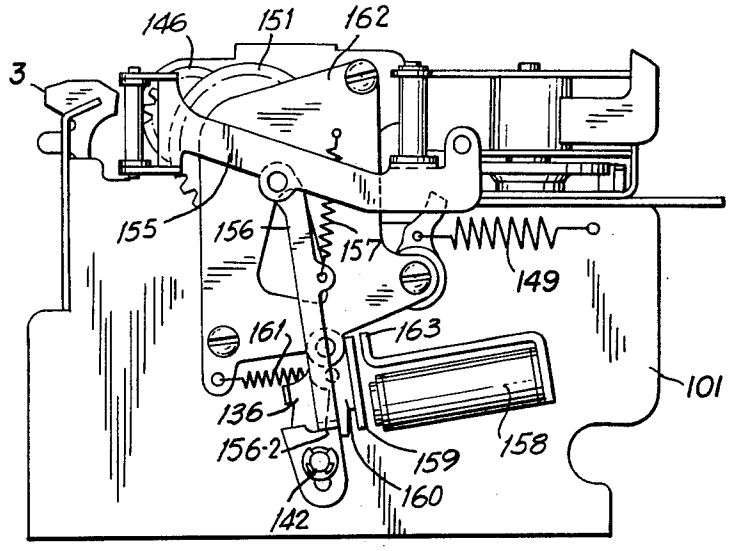

146
151
162
3
155
156
157
149
161
163
101
136
156-2
159
158
160
142

FIG. 20

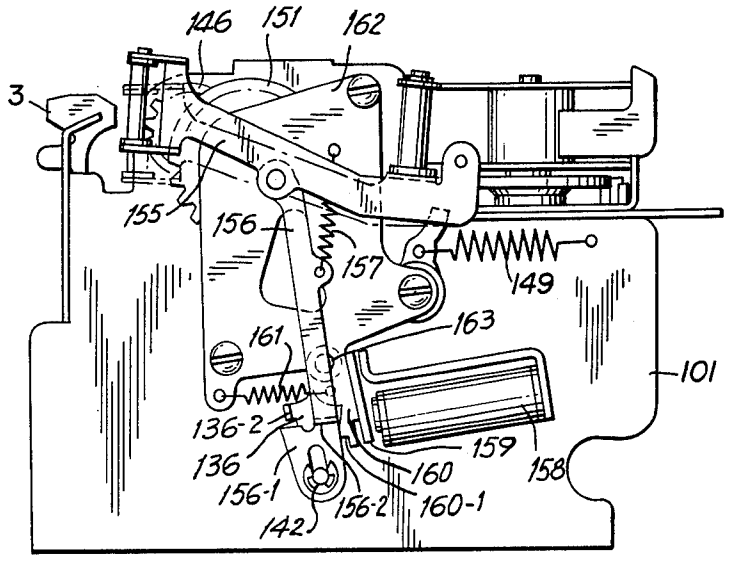

146
151
162
3
155
156
157
149
161
163
101
136-2
159
136
160
158
156-1
156-2
160-1
142

FIG. 21
PRIOR ART

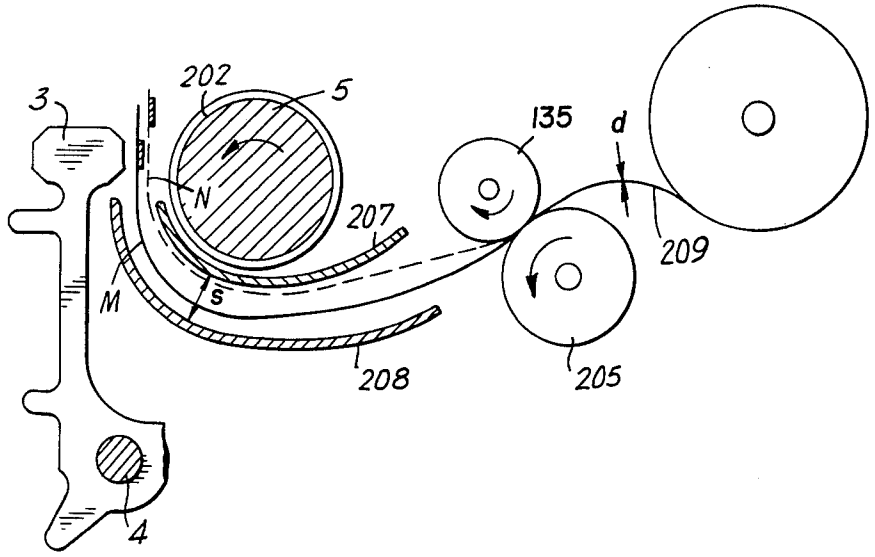


FIG. 22
PRIOR ART

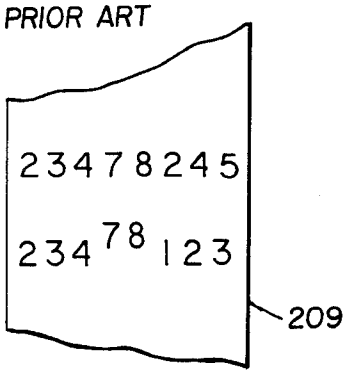


FIG. 23

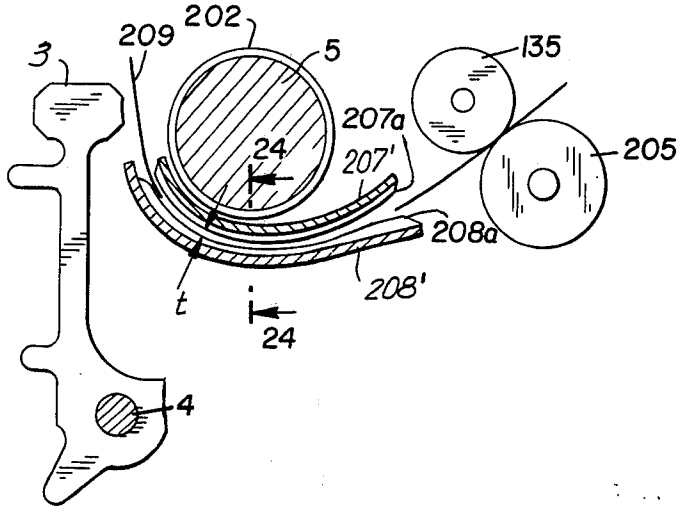

3
209
202
5
135
207a
24
207'
205
208a
208'
t
24
4

FIG. 24

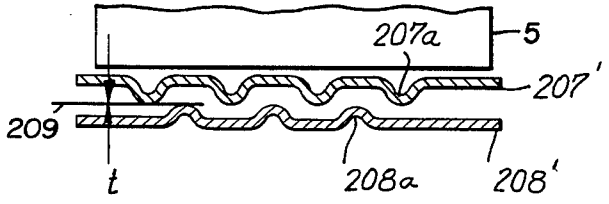

207a
5
207'
209
t
208a
208'

FIG. 25


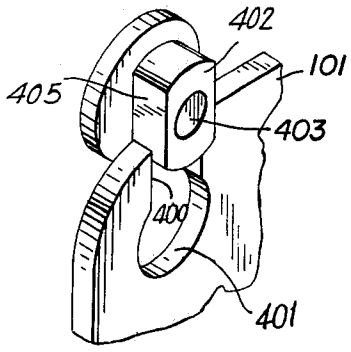


FIG. 26



PAPER GUIDE FOR A COMPACT FLYING PRINTER

This is a division of application Ser. No. 118,427, filed Feb. 24, 1971, which issued as U.S. Pat. No. 3,795,185 on Mar. 5, 1974.

BACKGROUND OF THE INVENTION

This invention relates to a compact flying printer utilized in electronic desk calculators and other numerical read out devices. In such printers, the hammer strikes a selected character from an array of characters provided in columnar fashion on the periphery of a continuously rotating print drum. However, the known arrangements of this type of printer have several substantial drawbacks. Specifically, shear will occur in the printing process if the contact time between the hammer and the print drum is too great, resulting in smudged printing or ripped paper. In order to overcome this defect, the contact time of the hammer with the character must be shortened, thereby increasing the operating speed of said hammer. In the conventional printers of the type described the hammer is directly operated by electromagnets, and an increase in the operating speed of the hammer requires an increase in the size and power of said electromagnets. However, an increase in the size and power of the electromagnets results in an increase in the volume of the printer and requires increased electric power consumption, and is therefore undesirable. To avoid the above-described defects, a device wherein the energy for printing can be obtained from a continuously rotating body is utilized.

SUMMARY OF THE INVENTION

The object of this invention is to provide a high speed compact flying printer.

Another object of this invention is to provide a flying printer with precise operation.

A further object of this invention is to provide a flying printer of simple construction with minimum number of components, which enables easy assembly and mass scale production.

A further object of this invention is to provide a flying printer with small electric power consumption.

In the compact flying printer according to the invention, the hammer and hammer lever are made in one piece. In order to position the hammer exactly against the character on the print drum, a guide member having a guide groove or guide hole arranged in zig-zag form is provided. The trigger lever is formed with a guide portion in linear form and a transmitting portion projected from said guide portion. One end of the trigger lever is projected from the other surrounding parts and so that said trigger lever can be easily taken out after finishing assembly of the printer. The trigger lever strikes against the trigger lever stopper at its sloping portion to secure precise operation. Inked ribbon winding, color changing of ribbon and paper feeding are driven by the motor device of the printer. The above devices are mounted on one side of the printer. The main components for printing are housed in a unit. A guide plate for paper feeding is wave formed to advance the paper smoothly. Thus, clear printing can be obtained.

BRIEF DESCRIPTION OF THE DRAWING

For a fuller understanding of the invention, reference is had to the following description taken in connection with the accompanying drawing, in which:

FIG. **1** is a schematic representation showing the operation of a conventional prior art flying printer;

FIGS. **2** and **3** are perspective views of the flying printer according to the invention;

FIG. **3-*a*** is a front elevational view of a hammer lever guide plate of the flying printer of this invention;

FIGS. **4, 5, 6, 7** and **8** are sectional views describing the operation of the flying printer of this invention;

FIG. **9** is an enlarged view of the regulating plate of the flying printer of this invention;

FIG. **10** is a sectional view of the flying printer of this invention;

FIG. **11** is a schematic diagram showing the construction of the driving shaft of the flying printer of this invention;

FIG. **12** is a perspective view showing the electromagnets and base member thereof of the invention;

FIG. **13** is a partial perspective view of the detecting device of the flying printer of this invention;

FIG. **13-*a*** is a sectional view of the device shown in FIG. **13**;

FIG. **14** is a partial perspective view showing paper feeding mechanism and ribbon feeding mechanism;

FIGS. **15, 16** and **17** show the operation of the arrangement of FIG. **14**;

FIG. **18** is a perspective view showing color change of the inked ribbon;

FIGS. **19** and **20** show the operation of the arrangement of FIG. **18**;

FIG. **21** is a sectional view showing the paper guide of a conventional prior art type of flying printer;

FIG. **22** shows the effect caused by the arrangement of FIG. **21**;

FIG. **23** is a sectional view showing a paper guide device according to the invention;

FIG. **24** is another sectional view showing a paper guide device according to the invention taken along lines **24—24** of FIG. **23**; and

FIGS. **25** and **26** are partial perspective views of an embodiment of an arrangement for mounting the print drum in accordance with the invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. **1** is a schematic representation of one column of a conventional type of a flying printer wherein **301** is a print hammer, **302** a hammer lever, and **303** a rotary axis for said hammer lever **302.** Disposed immediately below hammer **301** is a print drum **304** having print characters spaced apart on the peripheral surface thereof. The print drum **304** and a print drum gear **305** are mounted for rotation on a print drum shaft **306.** The print drum gear **305** meshingly engages an intermediate pinion **307** which is adapted to drive an intermediate gear **308** fixed thereto. **310** is a ratchet wheel mounted on shaft **309, 311** a pawl extended from the ratchet wheel **310, 312** a first trigger lever pin, and **313** a second trigger lever pin. A trigger lever **34** is formed with a tail portion **315** and a projection **316. 317** is a trigger lever stopper. A trigger lever guide **318** is provided to guide the trigger lever **314** during displacement of the trigger lever **314.** A spring **319** is secured

between trigger lever **314** and a fixing point **320** for biasing the end **338** of the trigger lever **314** out of the locus of the pawl **311**. The end **321** of the arm of hammer lever **302** is engageable by a shoulder **322** of the trigger lever **314** upon linear displacement of the latter, causing the hammber lever **302** to pivot and the print hammer **301** to strike print drum **304** via paper **330**, upon which a character is to be imprinted, and an inked ribbon **331** which are interposed between the print hammber **301** and the print drum **304**. A timing lever **323** is disposed to engage tail **315** of trigger lever **314** and is pivotally mounted on a timing lever shaft **324**. Fixed to the timing lever **323** is a magnetic plate **325** movement of which is controlled by electromagnets **326** and **327**. A spring **328** is mounted between the corner of hammer lever **302** and a fixing point **329** to normally bias said hammer lever **302** in the position shown with hammer **301** spaced from print drum **304**. **329** is a fixing point of spring **328** and, **332** is a center of gravity of said trigger lever **314**.

In FIG. **1**, only one column is illustrated by way of example. However, an actual printer would include the desired number of columns, each of which would comprise a print hammer **301**, a hammer lever **302**, a trigger lever **314**, a trigger lever spring **319**, a timing lever **323**, a magnetic plate **325**, electromagnets **326** and **327**, and a hammer lever spring **328**.

When the flying printer is activated but no timing signals are applied to the electromagnets **326, 327** or to the paper advance mechanism, a motor continuously rotates the ratchet wheel **310** in the direction of arrow **333**, thereby also rotating the print drum **304** in the same direction through the intermediate gears **307** and **308**. On the surface of the print drum **304**, many columns each including all the characters to be printed are disposed. Pawl **311** is provided on the surface of the ratchet wheel **310**. The gear ratio between the ratchet wheel **310** and the print drum **304** is selected so that the pitch time of the pawl **311** equals the circumferential spacing of the characters on the peripheral surface of the print drum **304**. Thus, each rotation of the pawl **311** corresponds to the advancing of one character on the print drum **304**. For example, if there are **16** characters on the print drum **304** and one pawl **311** is on the ratchet wheel **310**, the rotational ratio between the ratchet wheel **310** and the print drum **304** is 16:1. In non-printing condition, the electromagnets **326** and **327** are not actuated electrically, and the trigger lever **314** is biased to the direction of the spring fixing point **320** by means of the spring **319**, and is positioned by means of the trigger lever guide **318**. Therefore, the end **338** of the trigger lever **314** is placed lower than the position shown in FIG. **1**, and the pawl **311** does not engage with the end **338** of the trigger lever **314**. Magnetic plate **325** is biased to the direction of the arrow **336** by the force of the spring **319**.

In order to print a desired character on the paper **330** by means of the print hammer **301** when the print command enters in the control circuit, the electromagnets **326** and **327** are energized immediately before the desired character on the peripheral surface of the print drum **304** passes under the print hammer **301**. The energization of one of said electromagnets **326** and **327** rotatably displaces its respective magnetic plate **325** in the direction of the arrow **337**. This rotating force is transmitted to the trigger lever **314** through the trigger lever tail **315**. Thus the trigger lever **314** rotates in the counterclockwise direction around the trigger lever guide **318** and touches the trigger lever guide **312** to be positioned thereby.

FIG. **1** shows this state. When the ratchet wheel **310** further rotates, the pawl **311** engages with end **338** of trigger lever **314**. The linear displacement of the trigger lever **314** in the direction of arrow **334** is transmitted to the arm **321** of the hammer lever **302** by means of the shoulder **322** of said trigger lever **314**. Said hammer lever **302** is in turn rotated in the clockwise direction causing the print hammer **301** to strike the print drum **304** through inked ribbon **331** and paper **330** at the moment when the desired character is positioned under said print hammer **301**. After striking hammer lever **302**, trigger lever **314** is pivoted by spring **319** in the direction of arrow **335** out of the locus of pawl **311** and returned to its original position.

This type of printer, as will be clear from the above description and FIG. **1**, has disadvantages as follows. Since one end **338** of said trigger lever **314** is struck by the pawl **311** and the other end of said trigger lever **314** engages with the timing lever **323**, the trigger lever **314** occupies a large space in the longitudinal direction due to its long shape and it is not suitable as a compact flying printer. As the guide members **312, 313** and **318** for the trigger lever **314** are separately mounted, construction becomes complicated. Besides, as the trigger lever **314** is encompassed by the guide members **312, 313** and **318** and the trigger lever stopper **317**, assembly becomes difficult. It is necessary to remove one or more of said guide members **312, 313** and **318** in case of repair. The engaging point between the trigger lever stopper **317** and the trigger lever projection **316** is on the upper portion of the center of gravity of motion direction, so motion of the trigger lever **314** after striking against the trigger lever stopper **317** is large and so it is not suitable for a compact printer.

The present invention seeks to eliminate the above defects.

FIG. **2** is a perspective view of the printer according to the invention, wherein **101** and **101'** are main frames, **102** a hammer lever guide plate for guiding the hammer levers **3** in a fixed position, **5** a print drum, **108** a paper, **135** a paper feeding roller for advancing the paper **108, 113** an inked ribbon, and **114** and **114'** spools for said inked ribbon **113**.

FIG. **3** is a perspective view of the printer according to the invention viewed from the other side having motor device **105** mounted thereon.

FIGS. **4, 5** and **6** show the construction of one column according to the invention. **1** is a ratchet wheel rotating continuously at a constant speed driven by the motor device **105**. The trigger lever **2** is guided by the trigger lever guides **8-3** and **8-6**. The trigger lever **2** is biased out of the locus of the ratchet wheel **1** by spring **7** when the electromagnet **11** is not energized. The trigger lever **2** and the trigger lever regulating plate **8** have stopper faces **2-1, 2-2, 8-1** and **8-2** respectively against which the trigger lever **2** strikes when it is actuated. The hammer lever **3** is pivoted on the axis **4**. Print drum **5**, having characters on the surface thereof, is rotated at a speed a predetermined ratio slower than that of ratchet wheel **1**. The timing lever **10** controls the engaging depth of the trigger lever **2** with the ratchet wheel **1**. The electromagnet **11** operates according to the print command signal.

Referring to FIGS. 5 and 6 for describing the operation, the electromagnet 11 is energized and said timing lever 10 rotates in the counterclockwise direction when the print command enters. At this moment, the trigger lever 2 is pushed by one end 10-1 of the timing lever 10 and rotates in the counterclockwise direction around the contact point between tail 2-5 and the guide groove 8-3. Then the contact portion 2-3 of the trigger lever 2 enters in the locus of the pawl 1-1 of the ratchet wheel 1. The trigger lever 2 is struck by the pawl 1-1 and displaces linearly in the direction of the arrow 12. At the same time, the hammer lever 3 is struck by one end 2-4 of the trigger lever 2 and rotates around the axis 4. Said contact portion 2-3 and one end 2-4 of trigger lever 2 constitute the energy transmitting portion of said trigger lever 2, said energy transmitting portion defining the end of a neck projecting laterally from the longitudinally extending body portion of the trigger lever 2 engaging trigger lever guides 8-3 and 8-6. The tail 2-5 of said body portion extends through the aperture 8-3 in trigger lever guide 8 (see FIG. 9). The print hammer 3-1 mounted on the end of the hammer lever 3 strikes the print drum 5, and printing is performed. The trigger lever 2 strikes against the trigger lever stopper 8-1 immediately before the hammer 3-1 strikes against the print drum 5 and returns to its initial position. Without the trigger lever stopper 8-1, the hammer lever 3 would strike again against the trigger lever 2 during the return stroke to its initial position after receiving the repulsive force from the drum 5. Thus, ghost printing or double printing occurs, i.e., the same character or two characters are printed on the same place on the paper 108. The trigger lever stopper 8-1 is provided to eliminate this defect. It is necessary to place this trigger lever stopper 8-1 carefully in order to prevent the ghost printing or double printing, so that the trigger lever 2 does not enter again in the locus of the ratchet wheel 1 immediately after striking against the trigger lever stopper 8-1.

On the other hand, when printing a symbol which does not occupy the space of one character such as comma (,) or decimal point (.), together with characters within the space of one character, e.g., "9,", alphanumeric characters and symbols and characters such as comma and period are disposed in one column and by operating the print hammer 3-1 twice, the character (9) and symbol (,) are printed within one column, thus the printing time is shortened and a high speed printer is obtainable.

In prior art arrangements, characters 0 1 2 . . . 8 9 . . . and symbols , and . are disposed on the print drum. For printing "9,", "9" is printed in the first rotational cycle of the print drum, and in the second cycle of rotation, "," is printed. Thus printing time is prolonged due to the second cycle rotation of the print drum.

Further, there is another method for printing "9,", wherein "9" is printed in one column, "," is printed in the next column. In this case printing time for two columns is necessary. Thus, printing time is wasted by one character. Besides the number of characters is increased from 12 to 14. Therefore the size of the print drum is increased and a high speed printer cannot be obtained.

The present invention seeks to eliminate the above defects and to provide a compact flying printer wherein the engaging portion of the ratchet wheel 1 with the trigger lever 2 is out of the locus of the ratchet wheel 1 immediately after the ratchet wheel strikes against the trigger lever 2, so that undesirable double striking is prevented and the trigger lever 2 is a little spaced from the trigger lever 2 stopper 8-1 when the trigger lever 2 is biased by the timing lever 10, so that the high speed printing can be performed precisely and continuously.

Now, reference is made to the action of the trigger lever 2 when the print command signal is applied and the trigger lever 2 is struck by the ratchet wheel 1. At the moment when the trigger lever 2 is struck by the ratchet wheel 1, the center of gravity of the trigger lever 2 is in such a position as shown by G in FIG. 7, and the engaging portion 2-3 between said trigger lever 2 and the ratchet wheel 1 is above the center of gravity G, the trigger lever 2 displaces in the direction of the arrow 12 (FIG. 5) rotating in the counterclockwise direction.

Suppose that the distance from the center of gravity G to the trigger lever portion 2-3 which is struck by the pawl 1-1 of the ratchet wheel 1 is r and the distance from the center of gravity G to the axis of rotation a (center of striking) is R, we obtain from the equation of rotation when the rigid body is struck by the impulse.

$$rR = k^2 \tag{1}$$

wherein k = radius of rotation around the center of gravity of the trigger lever 2.

Therefore at the moment when the trigger lever 2 is struck by the ratchet wheel 1, the center of gravity G of the trigger lever 2 rotates around a toward-the-inside direction of the locus of the pawl 1-1 of the ratchet wheel 1. However, the rotation of the trigger lever 2 is stopped by striking of the stopper face 2-2 of the guided portion of the trigger lever 2 against the stopper face 8-2 of the regulating member 8 for the trigger lever 2 and the trigger lever 2 moves linearly in the direction of the locus 16 to operate the hammer lever 3. The trigger lever stopper 8-1 is provided to prevent the double striking of the print hammer 3-1 in such a manner that the trigger lever 2 strikes aginst said stopper 8-1 immediately before the print hammer 3-1 strikes against the drum 5. However, this arrangement is not sufficient enough to prevent the double striking. After striking against the trigger lever stopper 8-1, the trigger lever 2 may again return toward the inside of locus 14 of the pawl 1-1 of the ratchet wheel 1 and strike an undesirable character.

The arrangement according to the invention is so designed that by placing the axis of rotation of the trigger lever 2 properly immediately after the trigger lever 2 strikes against the stopper 8-1, the engaging portion 2-3 between the trigger lever 2 and the ratchet wheel pawl 1-1 is placed out of the locus 14 of the pawl 1-1. Suppose that the center of gravity of the trigger lever 2 when the trigger lever 2 strikes against the stopper 8-1 is G' (FIG. 7), a distance from G' to the line of action 15 of the impact force caused when the trigger lever 2 strikes against the stopper 8-1 is l, and a distance rfrom the center of gravity G' to the rotary axis a' of the trigger lever 2 after being struck by the ratchet wheel pawl 1-1 is L, we obtain:

$$Ll = k^2 \tag{2}$$

If the striking point between stopper or striking face **2-1** of the trigger lever **2** and the stopper **8-1** is below the locus **16** of the center of gravity G' of the trigger lever **2**, the trigger lever **2** performs rotational movement toward the inside direction of the ratchet wheel **1** so that the trigger lever **2** is engaged firmly with the pawl **1-1** of the ratchet wheel **1**. Therefore, it is required that the impact point on stopper or striking face **2-1** be above the locus **16** of the center of gravity G' in order that the trigger lever **2** comes out of the locus **14** of the pawl **1-1**. On the other hand, double striking may occur depending upon the position of the rotary center when the trigger lever **2** strikes against the stopper **8-1**.

As shown in FIG. **7**, in the case where the locus **17** of one end **2-3** of the trigger lever **2** intersects the locus **14** of the pawl **1-1** when the trigger lever **2** strikes against the stopper **8-1**, one end **2-3** enters in the locus **14** of the pawl **1-1** during rotation of the trigger lever **2**, so double striking may occur. It is clear that in the situation as shown in FIG. **7**, the locus **17** of one end **2-3** of the trigger lever **2** intersects with the locus **14** of the pawl **1-1**. The axis of rotation *b* of the trigger lever **2** is along the line **18** connecting said intersecting point with the center point of the ratchet wheel **1**. The angle made by the line **18** and the locus **16** of the center of gravity *G* is ϕ. If the rotary axis of the trigger lever **2** is on point (a') as shown by the solid line **19**, one end **2-3** of the trigger lever **2** is surely out of locus **14** of the ratchet wheel pawl **1-1**.

At this time, the stopper or striking face **2-1** which is located on the neck connecting the energy transmitting portion (**2-3**, **2-4**) of trigger lever **2** and the body portion thereof, is parallel to the line made by the rotary center a' of the trigger lever **2** and the center of gravity G' of the trigger lever **2**. The trigger lever **2** struck by the ratchet wheel moves along the locus **16**. It is so designed that the angle of the stopper or striking face **2-1** of the trigger lever **2** is:

$$90° < \theta < 180°$$

In the arrangement according to the invention as shown in FIG. **5**, in order to ensure continuous printing, the regulating member **8-2** is spaced from the projection **2-2** on the trigger lever **2** when the trigger lever **2** is biased within the locus **14** of the ratchet wheel **1** by the timing lever **10**. Without said space, the trigger lever **2** contacts with the guide member **8-2** when the timing lever **10** operates continuously. Therefore, precise continuous printing is impossible as the trigger lever **2** cannot return to the engaging position with the ratchet wheel **1** even after finishing printing due to the friction loss between the guide member **8-2** and the projection **2-2** of the trigger lever **2**.

As described above, the printing method according to the invention eliminates undesirable double striking in case of continuous printing and performs continuous printing precisely. Thus a printer with high reliability and high printing speed can be realized. Further, the print drum **5** can be miniaturized which results in compact high speed flying printer.

It is apparent that if the radius of rotational movement after the trigger lever **2** strikes against the stopper **8-1** is smaller, it is more suitable for a compact printer. Therefore it is necessary to make the value of *L* small in the equation (2). *k* is a constant which is fixed by the shape and material of the trigger lever **2**. Therefore, in order to reduce the value of *L*, it is necessary to increase the value of *l*. Explaining this with reference to FIG. **8**, angle *g* is defined by line **90** and the locus **16** of the center of gravity *G* of the trigger lever **2**. Since the line **20** connecting the center of gravity *G'* with the center of rotation *a'* defines a right angle with the line of action **15** of the force, the locus of the intersecting point between the two lines defining the angle *g* defines the arc **21** whose diameter is the line **90** connecting G' with striking point **2-1'**. Therefore, if the angle g become equal to zero the surface **2-1** of the trigger lever **2** is parallel with the line **90** connecting G with the striking point **2-1'**, *l* becomes maximum, and accordingly the radius of the rotation of the trigger lever **2** attains minimum value.

In the flying printer according to our invention, printing energy is given by the continuously rotating ratchet wheel **1**, so that the speed of the trigger lever **2** is constant when it is struck by the pawl **1-1** of the ratchet wheel **1**. Therefore, the speed of the hammer lever **3** struck by the trigger lever **2** is determined by the speed of the ratchet wheel **1**. In order to obtain sufficient printing energy, the mass of the hammer lever **3** must be large. However, in the compact printer, it is required to reduce the size of the hammer lever **3**. As a result, the height of the hammer lever **3** is increased and the thickness of the hammer lever **3** is the same with that of the print hammer **3-1**, which results in a compact printer. The print hammer **3-1** and the hammer lever **3** can be made from the same material. Thus the compact hammer lever **3** can be produced without decreasing the mass. The print hammer **3-1** and the hammer lever **3** can be manufactured in a single process such as pressing out. This is very advantageous for mass scale production.

The hammer lever **3** must precisely correspond to the character on the print drum **5**, which necessitates the use of a guide member for guiding the hammer lever **3**. In the printer according to the invention, a guide plate **102** for hammer lever **3** is provided. Said guide plate **102** is provided with the guide grooves **103** and guide holes **104** arranged in zig-zag form as shown in FIG. **3***a* to receive a projecting portion **106** of each hammer lever **3**. This arrangement of the guide plate **102** reduces the size of the printer due to the fact that the hammer lever **3** has uniform thickness.

The trigger lever **2** consists of a guide portion and a transmitting portion. The guide portion in linear form comprises the projection **2-2** for displacing the trigger lever **2** through linear motion. Said guide portion moves slidably on the flat portion **8-2** of the trigger lever regulating plate **8**. Said transmitting portion projected from said trigger lever **2** engages with the ratchet wheel **1** at **2-3** and engages with the hammer lever **3** at **2-4**, and strikes against the trigger lever stopper **8-1** at neck portion **2-1**, As the shape of the trigger lever **2** is so constructed as above mentioned, its size is not increased longitudinally. It is also very advantageous for easy assembly as will be disclosed in the following. Unlike the conventional trigger lever **2**, the connecting point between the transmitting portion and the trigger lever stopper **8-1** forms one part of the transmitting portion. As a result, the shape of the trigger lever **2** is simplified.

The regulating plate **8** regulates the motion of the trigger lever **2** to displace it toward the inside direction of the locus **14** of the ratchet wheel pawl **1-1** when the

trigger lever 2 is struck by the ratchet wheel 1. As shown in FIG. 9, the regulating plate 8 has guide hole 8-3 on one end, and the trigger lever stopper 8-1 on the other end. This construction makes it unnecessary to provide guide pins, and as a result, the number of the parts required is reduced, construction is simplified and assembly becomes easy.

In FIG. 10, one end 2-6 of the trigger lever 2 is projected from the other surrounding parts. Since the guide portion of the trigger lever 2 is flat plate shaped, the guide holes 8-3 of the regulating plate 8 is simple in its construction, so the trigger lever 2 can be easily removed and inserted for replacement by picking up one end 2-6 after completing the assembling of the printer. A trigger lever 2' is shown in dashed lines in FIG. 10, depicting the position for inserting a trigger lever 2 into regulating plate 8. This enables easy replacement and adjustment of the trigger lever after assembling.

FIG. 11 shows means for mounting the power shaft 116 coaxial with the ratchet wheel 1 on the main frames 101 and 101' of the printer. The power shaft 116 is mounted on the main frames 101 and 101' through the bearings 117 and 117' in such a manner that the flange portions 117-1 and 117'-1 are on the outside of the main frames 101 and 101'. Since the diameter of the hole 172 provided on the main frame 101' is larger than that of the ratchet wheel 1, the ratchet wheel 1 with motor mechanism 105 can be easily assembled and reassembled after completing the assembling. Generally, the cross sectional shape of the ratchet wheel 1 is asymmetrical, so undesirable vibration is caused through the whole printer mechanism during high speed rotation. Therefore, it is necessary to eliminate the unbalancing of the printer including the motor 105 and the ratchet wheel 1. In the printer according to the invention, the fly wheel 171 for balancing is mounted on a portion of motor 105 mounted on power shaft 116. After eliminating the unbalance between the motor 105 with fly wheel 171 and the ratchet wheel 1, they are mounted as a unit. This construction is suitable for mass scale production. As shown in FIGS. 2 and 3, the shaft 132 of the paper feeding roller 135 is inserted through the opening 118 and 118' provided on the upper portion of the main frames 101 and 101'. So assembly and replacement of parts is very easy. It is very advantageous for mass scale production.

The electromagnets 11 for operating the timing levers 10 occupy a relatively large space in the printer. As shown in FIG. 10, in the printer according to this invention, the electromagnets 11 are symmetrically disposed with the center line of the printer. Besides, as shown in FIG. 12, the electromagnets 11 are mounted in zig-zag form on the base member 119 of the electromagnets 11, so a number of electromagnets 11 are arranged in the narrow space.

FIGS. 13 and 13A show a detecting device of the printer according to the invention which detects timing of the ratchet wheel 1 and the print drum 5. The detecting device consists of the illuminating semiconductor 120, such as an illuminating diode buried in the base plate 121 and the semi-conductor 122 for detecting photo-illumination mounted on the base plate 121'. Between the semi-conductors 120 and 122, a shield plate 125 fixed on the ratchet wheel shaft 116 is provided. In the conventional type of the printer, such magnetic means as a magnetic head is used for detecting the position of the character to be printed. As these magnetic devices require large spaces, they cannot be incorporated in the compact printer. The detecting means, according to the invention, using the semi-conductor elements 120 and 122 eliminates the above defect. Said semi-conductor elements 120 and 122 are mounted in the base plates 121 and 121' respectively.

FIGS. 25 and 26 show a simple embodiment according to this invention for mounting the print drum 5 on the main frames 101 and 101'. This embodiment answers the requirement from the user to change the print drum 5 for various character patterns. On the upper portion of the main frame 101 of the printer, according to the invention, inserting channel 400 is provided communicating between the edge of the frame 101 and hole 401. The outer periphery of the bearing 402 for the shaft 403 of the print drum 5 has flat planes 405 in parallel with each other as shown in FIGS. 25 and 26 for inserting the bearing 402 into the inserting channel 400. For mounting the print drum 5 on the main frame 101 as shown in FIG. 25, said flat plane 405 is faced against the channel portion and bearing 402 is slid down until it is inserted in the hole 401. Then as shown in FIG. 26, the bearing 402 is rotated about 90° from the inserting portion 400 of the main frame 101 and L-shaped fitting plate 406 is fitted to strengthen the fixing of the bearing 402 on the frame 101. This construction enables easy replacement of the print drum 5 and the paper feeding roller 135. it is very advantageous for mass scale production. At the same time it is also very convenient for the user.

Reference is now made to the attachment of the printer, such as inked ribbon mechanism, color changing of ribbon and the driving device for feeding the paper.

FIGS. 14, 15, 16 and 17 are views of the paper feeding mechanism and ribbon feeding mechanism. 131 is a ratchet wheel for paper feeding fixed on the paper feeding shaft 132. 135 is a paper feeding roller made of rubber. Paper feeding ratchet lever 133 is rotatably mounted on the paper feeding lever 136 by means of pin 134 said ratchet lever 133 being biased in the clockwise direction (FIG. 17) by spring 154. Said paper feeding lever 136 is biased upward by the psring 153. Saw-toothed lever 137 provided with saw teeth 137-1 is rotatably mounted on the paper feeding lever 136 by means of the pin 138 and is biased in the counterclockwise direction by the spring 139. Lever 143, positioned for cooperation with the electromagnet 150 for paper feeding, is rotatably mounted on the paper feeding lever 136 by means of the pin 145 and is biased in the clockwise direction by the spring 139. Magnetic plate 144 facing to the electromagnet 150 for feeding the paper is fixed on the lever 143. Wheel 146 is fixed coaxial with the print drum 5 and engages with the saw teeth 137-1 of the saw-toothed lever 137. Said wheel 146 rotates in the certain reduction ratio transmitted from the motor shaft 116 through the intermediate wheel 151. Ribbon feeding lever 148 is biased in the clockwise direction by the spring 149 and is rotatably mounted on the axis 141.

FIG. 15 shows the position wherein paper 108 and ribbon 113 are advanced and printing is completed. The wheel 146 mounted coaxially with the print drum 5 disengages from the saw-toothed lever 137 which is rotatably mounted on the paper feeding lever 136 by means of the pin 138, as one end 143-1 of the lever 143

engages with the notch **137-3** of the lever **137.** Energy is transmitted from the motor shaft **116** of the printer through the intermediate wheel **151** to the wheel **146** with certain reduction ratio to rotate the print drum **5** continuously.

FIG. **16** shows the condition of the paper feeding mechanism and ribbon feeding mechanism when a signal is supplied to the electromagnet **150.** When the signal is supplied to the electromagnet **150,** the magnetic plate **144** is actuated and the lever **143** connected to the electromagnet **150** rotates in the counterclockwise direction to feed the paper **108.** One end **143-1** of the lever **143** disengages from the notch **137-3** of the lever **137** and the lever **137** rotates in the counterclockwise direction by means of the spring **139.** As a result, the continuously rotating wheel **146** engages with the saw teeth **137-1.** The paper feeding lever **136** is supplied energy for feeding the paper **108** from the wheel **146** through the lever **137** and the lever **136** displaces downwardly guided by the pins **141** and **142** and the paper feeding shaft **132** to store the energy in the spring **153.** Through the motion of the paper feeding lever **136,** the projection **136-1** of the paper feeding lever **136** engages with the ribbon feeding lever **148** by its flat plane **148-2** and energy for feeding the ribbon **113** is stored in the spring **149.** When the paper feeding lever **136** is lowered to the predetermined position, the portion **137-2** of the lever **137** contacts the unlock member **147.** The lever **137** then rotates around the pin **138** in the clockwise direction and the saw teeth **137-1** are disengaged from the wheel **146.** The notch **137-3** of the lever **137** and one end **143-1** of the lever **143** are locked as in the initial position by the force of the spring **139.** The paper feeding lever **136** returns to its initial position by the energy stored in the spring **153.**

The mechanism for winding and reversing the inked ribbon **113** is pushed by the flat portion **148-1** of the lever **148** by means of the energy stored in the spring **149** and winds the inked ribbon **113** and reverses it.

Referring to FIG. **17** for describing the paper feeding mechanism, the ratchet wheel **131** for feeding paper **108** is rotated one pitch by the lever **133** with pawl **133-1** to advance the paper **108** by one line. To advance the paper **108** by exactly one line, the paper feeding mechanism is designed in such a manner that the ratchet wheel **131** for feeding the paper **108** is locked in the normal rotating direction by the pawl **133-1** of the lever **133,** the tooth of the ratchet wheel **131** for paper feeding, the flat portion **133-2** of the lever **133** and the shaft **132** for paper feeding. The paper feeding mechanism is thus designed to prevent the paper feeding roller **135** from rotating over one pitch due to moment of inertia of the paper feeding roller **135.** Further, rotation of the paper feeding roller **135** due to the force applied in the normal rotational direction for printing is checked.

FIG. **18** is a perspective view showing ribbon shift mechanism according to this invention for changing color of ribbon **113** in registration with the hammers **3-1** by shifting the ribbon **113** laterally. **136** is a paper feeding lever, **155** a ribbon guide lever, **156** a ribbon shift lever, **157** a ribbon shift lever spring, **158** an electromagnet for ribbon shift, **160** a lever connected to a magnetic plate **159** facing to the electromagnet **158** for ribbon shift, **161** is a spring connected to the lever **160,** and **162** a bridge having the intermediate wheel **151,** the spring **157** and the spring **161** mounted thereon.

Describing the operation of the inked ribbon **113** of black and and red, FIG. **19** shows the condition for printing in black color. The electromagnet **158** is not energized, so printing is performed in black without displacing the ribbon shift lever **156** and the ribbon guide lever **155.**

When the print command for red is not supplied to the electromagnet **158,** the notch **160-1** of the lever **160** of the electromagnet **158** engages with the shoulder **156-2** of the ribbon shift lever **156,** and the ribbon guide lever **155** does not operate. Therefore, ribbon shift is not performed. For printing in red, as shown in FIG. **20,** the electromagnet **158** is energized by the print command for red, and the magnetic plate **159** is actuated, and the lever **160** of the electromagnet **158** for ribbon shift is rotated counterclockwise around the pin **163** to unlock the ribbon shift lever **156.** The lever **156** moves the ribbon guide lever **155** upward by the force of the spring **157** and sets the red ribbon **113** in printing position.

When the paper feeding lever **136** moves downward by connecting the wheel **146** with the saw-toothed lever **137** after completing printing in red, the projection **136-2** of the paper feeding lever **136** is connected to one end **156-1** of the ribbon shift lever **156,** then the ribbon guide lever **155** and the ribbon shift lever **156** move to their original position. The shoulder **156-2** is locked again with the notch **160-1** of the lever **160.** So the ribbon mechanism is in such a condition wherein printing is not performed in red.

Referring to FIG. **17,** this describes the relative movement between the saw-toothed lever **137** and the wheel **146.** When the saw-toothed lever **137** connects with the wheel **146** and moves downwardly substantially along the line of action **200,** the rotary axis **138** of the saw-toothed lever **137** lies on the right (in FIG. **17**) side of the line of action in **200** the initial position. Accordingly, a moment of force is applied to the toothed-lever **137** in the counterclockwise direction and the lever **137** rotates counterclockwise to connect the lever **137** more firmly with the wheel **146.**

As the lever **137** continues to lower downwardly, the rotary shaft **138** of the lever **137** approaches said line of action **200** until it reaches to the left side of the line of action **200.** At this moment, the lever **137** receives a moment in the clockwise direction from the wheel **146** and rotates clockwise. In our invention, the saw-toothed lever **137** is pressed down until the flat portion **137-2** of the lever **137** strikes unlock member **147,** which is common with the motor shaft **116** (FIG. **11**).

The driving device for the paper feeding mechanism substantially consists of the rotational body including ratchet wheel **146,** a transmission device including paper feeding lever **136** and the saw-toothed lever **137,** a first detent device including lever **143** of the electromagnet **150** and spring **139,** a first trigger device including electromagnet **150,** a disconnecting device including unlock member **147** and flat portion **137-2** of the saw-toothed lever, and a first spring member for paper feeding including the spring **153.** For the purpose of feeding the ribbon **113,** a second lever **148** and spring **149** is provided. For the purpose of shifting the ribbon **113,** a second detent device including shoulder **156-2** of the ribbon shift lever **156** and the lever **160,** a second spring member **149,** and a second trigger device including the electromagnet **158** is provided.

The foregoing structure is advantageous in that the energy for winding and reversing the inked ribbon **113** and changing the color of inked ribbon **113** and feeding the paper **108** is supplied by the motor shaft **116** of the printer, and the trigger devices are used only for triggering of ribbon feeding, paper feeding and color changing of the inked ribbon **113,** therefore the electromagnets **150** and **158** can operate on minimum electric power. Thus, a driving device for paper feeding and ribbon feeding suitable for a compact printer can be obtained.

In the invention, the transmission device, the disconnecting device, and the first detent device are combined and mounted on one lever **136** and the driving device for feeding the paper **108** and the inked ribbon **113** can be assembled as a unit independent from the printer body, therefore making assembly easy.

According to the invention, the wheel **146** for driving the print drum **5** also serves as a driving device for feeding paper **108** and ribbon **113.** Further, the unlock member **147** also partially serves as a motor shaft **116** of the printer. As a result, the number of parts required is reduced and construction is simplified.

The rotational body for driving the paper feeding device and the ribbon feeding device according to the invention is not directly connected to the motor shaft **116** of the printer but is connected to the stepped down rate relative to motor shaft **116.** Therefore, it is easy to self-start even at overload. Thus a printer with high reliability is obtainable.

The saw-toothed lever **137** according to the invention engages more firmly with the wheel **146** at the beginning of engagement and in the disengaging process it easily and surely disengages from the wheel **146** as the rotational force is applied to the saw-toothed lever **137** in such a direction as to accelerate the unlock. Further, force is not given excessively to the unlock member **147,** and wear of the unlock member **147** is reduced.

Reference is now made to the device for guiding the paper **108** according to the invention.

FIG. **21** is a side view of a prior art embodiment of a paper guide for a flying printer. **5** is a print drum rotating continuously. Character **202** is disposed on the periphery of the print drum **5.** Hammer lever **3** flies to the character **202** on the print drum **5. 4** is a rotary shaft of the hammer lever **3, 205** a driving wheel for feeding the pressure sensitive paper **209** step by step. **135** is a paper feeding roller pressed against said driving wheel **205** through the paper **209. 207** and **208** are upper paper guide and lower paper guide respectively to feed the paper **209** between the hammer lever **3** and the print drum **5. 209** is a pressure sensitive paper, the thickness of which is d. A plurality of hammer levers **3** are disposed in parallel corresponding to the number of columns to be printed. When the character **202** to be printed is placed in position to be struck by each hammer lever **3,** each hammer lever rotationally flies to perform printing. During one rotation of the print drum **5,** a whole one line is printed on the paper **209.**

Irregular printing as shown in FIG. **22** is caused due to the fact that the position of the paper **209** is shifted from the normal position facing to the hammer lever **3** during one rotation of the print drum **5.** This irregular printing increases as the gap s between the upper paper guide **207** and the lower paper guide **208** is large compared with the paper thickness d. The paper **209** may pass the course M or N between the upper paper guide **207** and the lower paper guide **208,** although the paper **209** is fed in the predetermined position by the paper feeding wheel **205** and the paper feeding wheel to be driven **135.** Accordingly, printing may be performed when the paper **209** is in M course at one time and N course at another time. As a result, characters do not come on a uniform line. If the gap s between the upper paper **209** guide **207** and the lower paper guide **208** is equal to the paper thickness d, this irregular printing will never occur. However, if $s < d$, it is impossible to insert the paper **209** in said gap s It is very difficult to make the gap s a little larger than the thickness d over the whole length of the paper guides **207** and **208** in a mass scale production.

The present invention intends to eliminate this irregular printing by making the gap s nearly equal to the thickness *d.*

Referring to one embodiment according to the invention, FIG. **23** is a side view showing one embodiment and FIG. **24** is a partial cross sectional view of FIG. **23.** The ribs **207***a* and **208***a* are respectively provided on the upper paper guide **207'** and the lower paper guide **208'** in alternating relation as shown in FIG. **24.** By making the gap *t* between the ribs **207***a* and **208***a* nearly equal to the paper thickness d, said irregular printing will be eliminated. In case of $t < d$ or $t \leq 0$ due to manufacturing error, the flexible paper **209** can be inserted in said gap t and advanced smoothly. Thus it is easy to apply mass scale production. Further, the paper **209** can be advanced smoothly even if the printer is subjected to the rapid change in the environment temperature and the paper **209** sticks to the paper quides **207'** and **208'** when the temperature approaches the dew point.

As described above, the present invention provides a high speed flying printer with low electrical power consumption, which is useful as an output device such as an electronic desk calculator or cash register.

It will thus be seen that the objects set forth above, and those made apparent from the preceding description, are efficiently attained and, since certain changes may be made in the above constructions without departing from the spirit and scope of the invention, it is intended that all matter contained in the above description or shown in the accompanying drawing shall be interpreted as illustrative and not in a limiting sense.

It is also to be understood that the following claims are intended to cover all of the generic and specifc features of the invention herein described, and all statements of the scope of the invention which, as a matter of language, might be said to fall therebetween.

We claim:

1. In a compact flying printer, the improvement in a guide for print paper which comprises an upper paper guide and a lower paper guide in spaced overlapping relation to said upper paper guide for the passage of said print paper therebetween, each of said upper and lower paper guides being formed with at least one rib extending along the surface thereof facing the other of said upper and lower paper guides substantially in the direction of displacement of said print paper, the ribs on each of the upper and lower paper guides projecting toward the other of said upper and lower paper guides and terminating at outer ends facing the other of said upper and lower paper guides, the ribs on the respective upper and lower paper guides being out of overlap-

ping relation and dimensioned to define a gap between the outer ends of the ribs of said upper paper guide and the outer ends of the ribs of said lower paper guide measured in a direction substantially normal to said upper and lower paper guides, said gap being substantially equal to the thickness of said print paper for receipt of said print paper, whereby the respective ribs of each of said upper and lower paper guides do not project beyond the outer ends of the ribs on the other of said upper and lower paper guides.

* * * * *