



US 20170095757A1

(19) **United States**(12) **Patent Application Publication**
MEZA(10) **Pub. No.: US 2017/0095757 A1**(43) **Pub. Date: Apr. 6, 2017**(54) **CARTRIDGE ACCUMULATOR****C02F 1/44** (2006.01)**B01D 29/96** (2006.01)**B01D 61/02** (2006.01)(71) Applicant: **Flow Control LLC**, Beverly, MA (US)(72) Inventor: **Humberto MEZA**, Trabuco Canyon, CA (US)(52) **U.S. Cl.**CPC **B01D 35/02** (2013.01); **B01D 29/96** (2013.01); **B01D 35/26** (2013.01); **B01D 61/025** (2013.01); **B01D 35/306** (2013.01); **C02F 1/001** (2013.01); **C02F 1/441** (2013.01); **B67D 1/10** (2013.01); **C02F 2201/006** (2013.01); **B67D 2210/0001** (2013.01)(21) Appl. No.: **15/265,298**(22) Filed: **Sep. 14, 2016****Related U.S. Application Data**

(63) Continuation-in-part of application No. 15/167,534, filed on May 27, 2016.


(60) Provisional application No. 62/218,314, filed on Sep. 14, 2015, provisional application No. 62/166,988, filed on May 27, 2015.

Publication Classification(51) **Int. Cl.****B01D 35/02** (2006.01)**B01D 35/26** (2006.01)**B67D 1/10** (2006.01)**B01D 35/30** (2006.01)**C02F 1/00** (2006.01)

(57)

ABSTRACT

A filter manifold is provided for processing fluid being provided to a fluid dispenser, featuring a new and unique combination of a mounting bracket, a filter cartridge and an accumulator cartridge. The mounting bracket is configured with porting connections. The filter cartridge may include a filter cartridge porting connection configured to plumb into one of the porting connections on the mounting bracket and also configured to filter the fluid being provided to the fluid dispenser. The accumulator cartridge includes an accumulator cartridge porting connection configured to plumb into another one of the porting connections on the mounting bracket and also configured to receive, accumulate and provide the fluid to the filter cartridge to be filtered before being provided to the fluid dispenser.

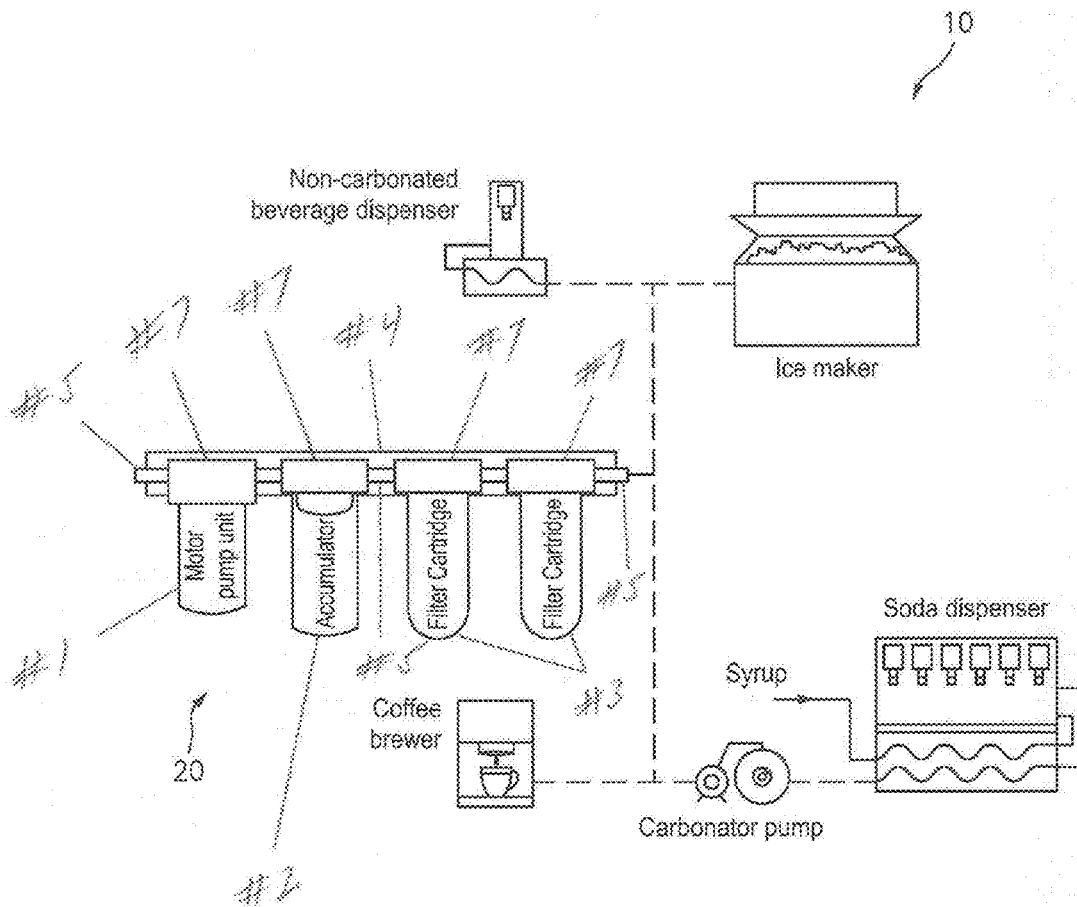

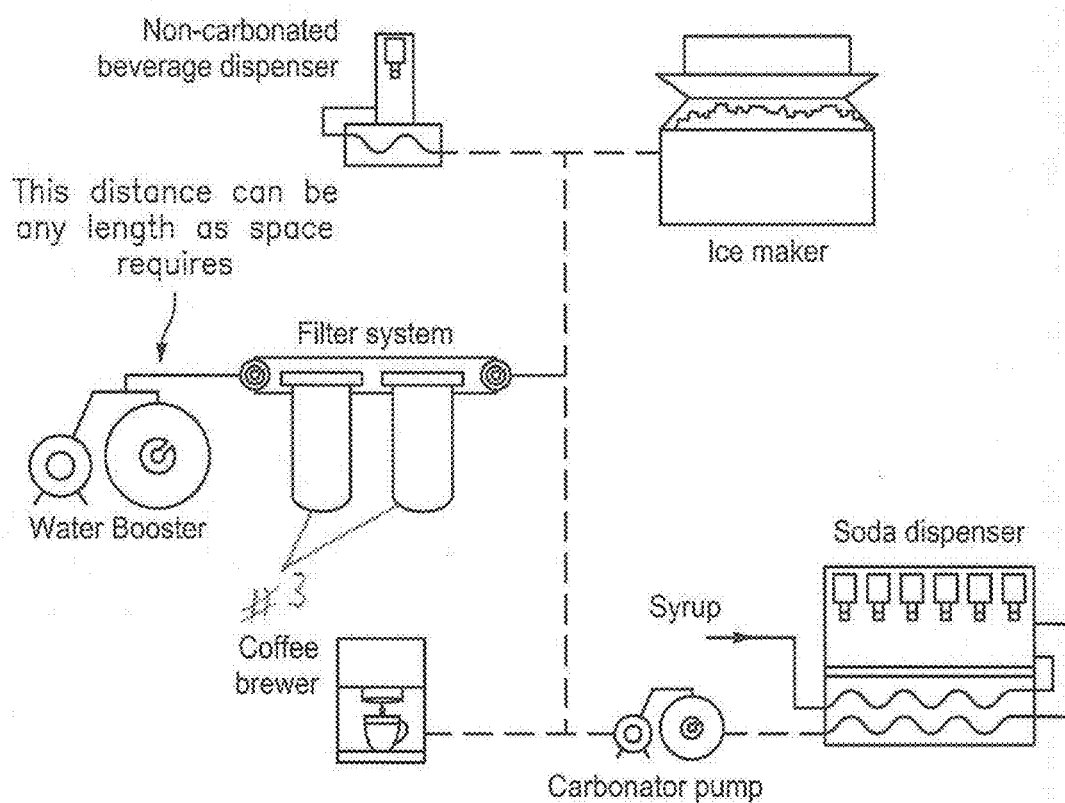


FIG. 1
(PRIOR ART)

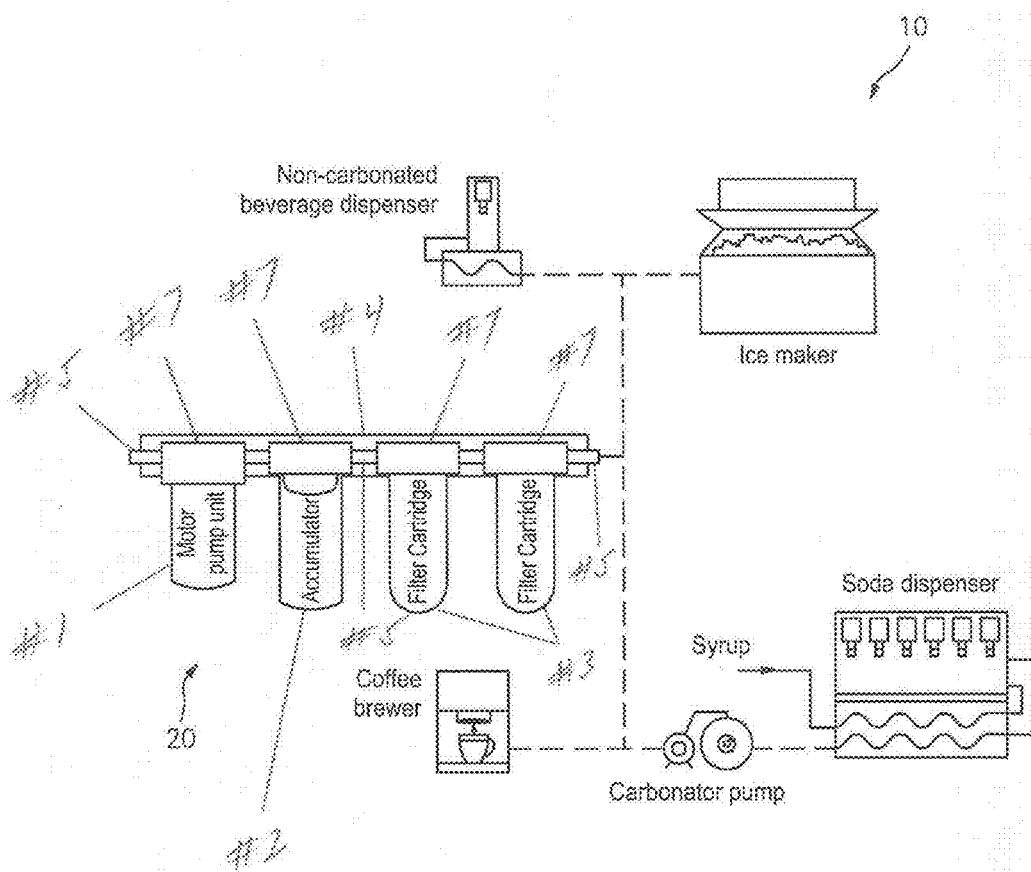


FIG. 2A

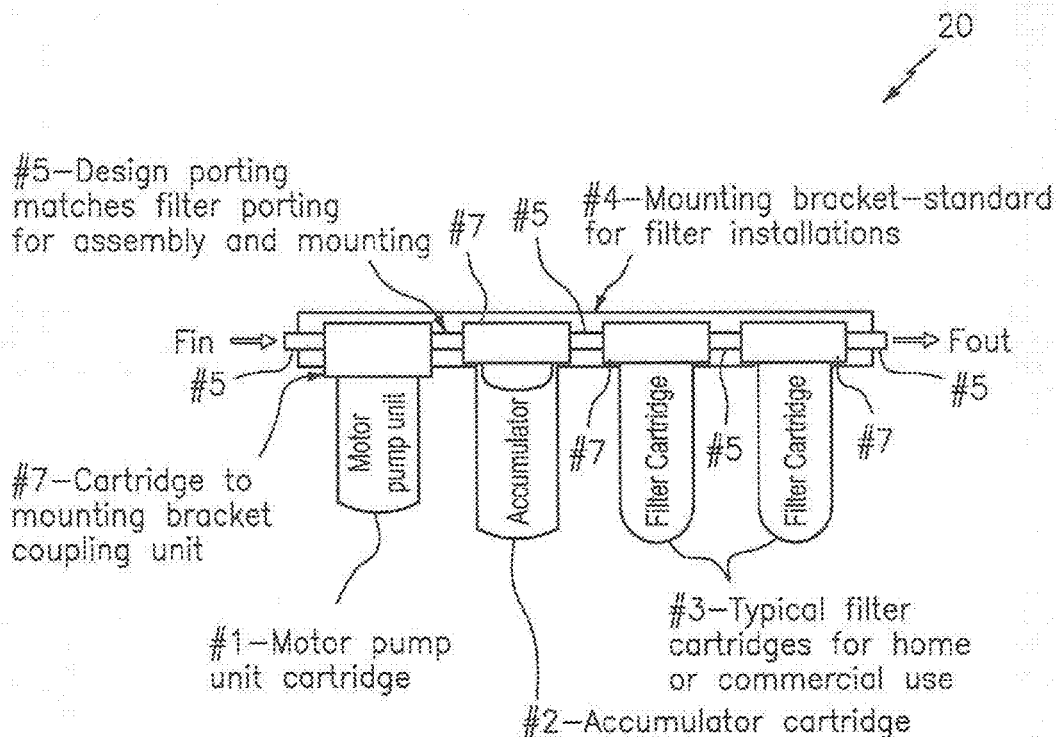


FIG. 2B: Beverage Application

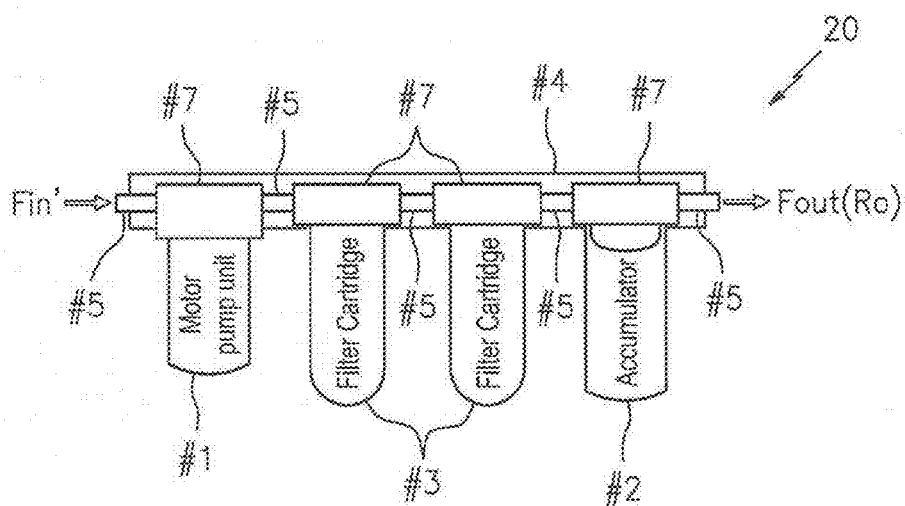


FIG. 2C: RO Application

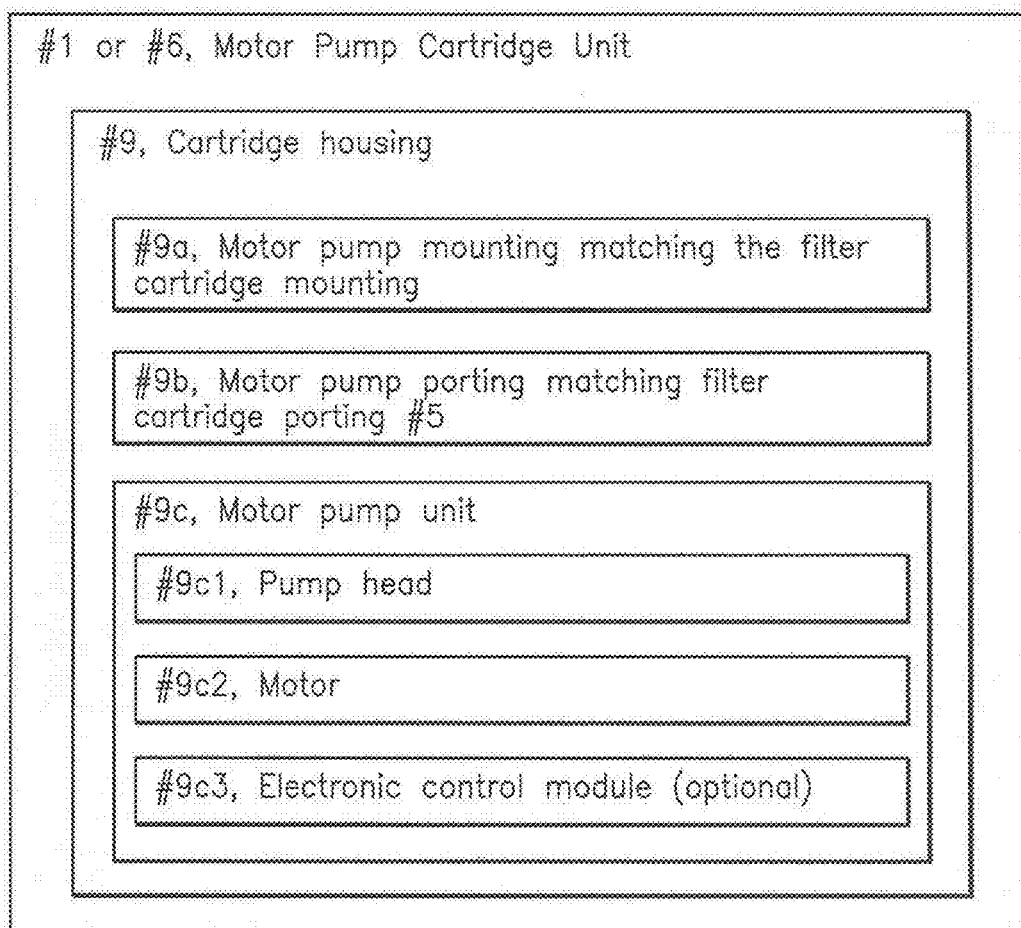
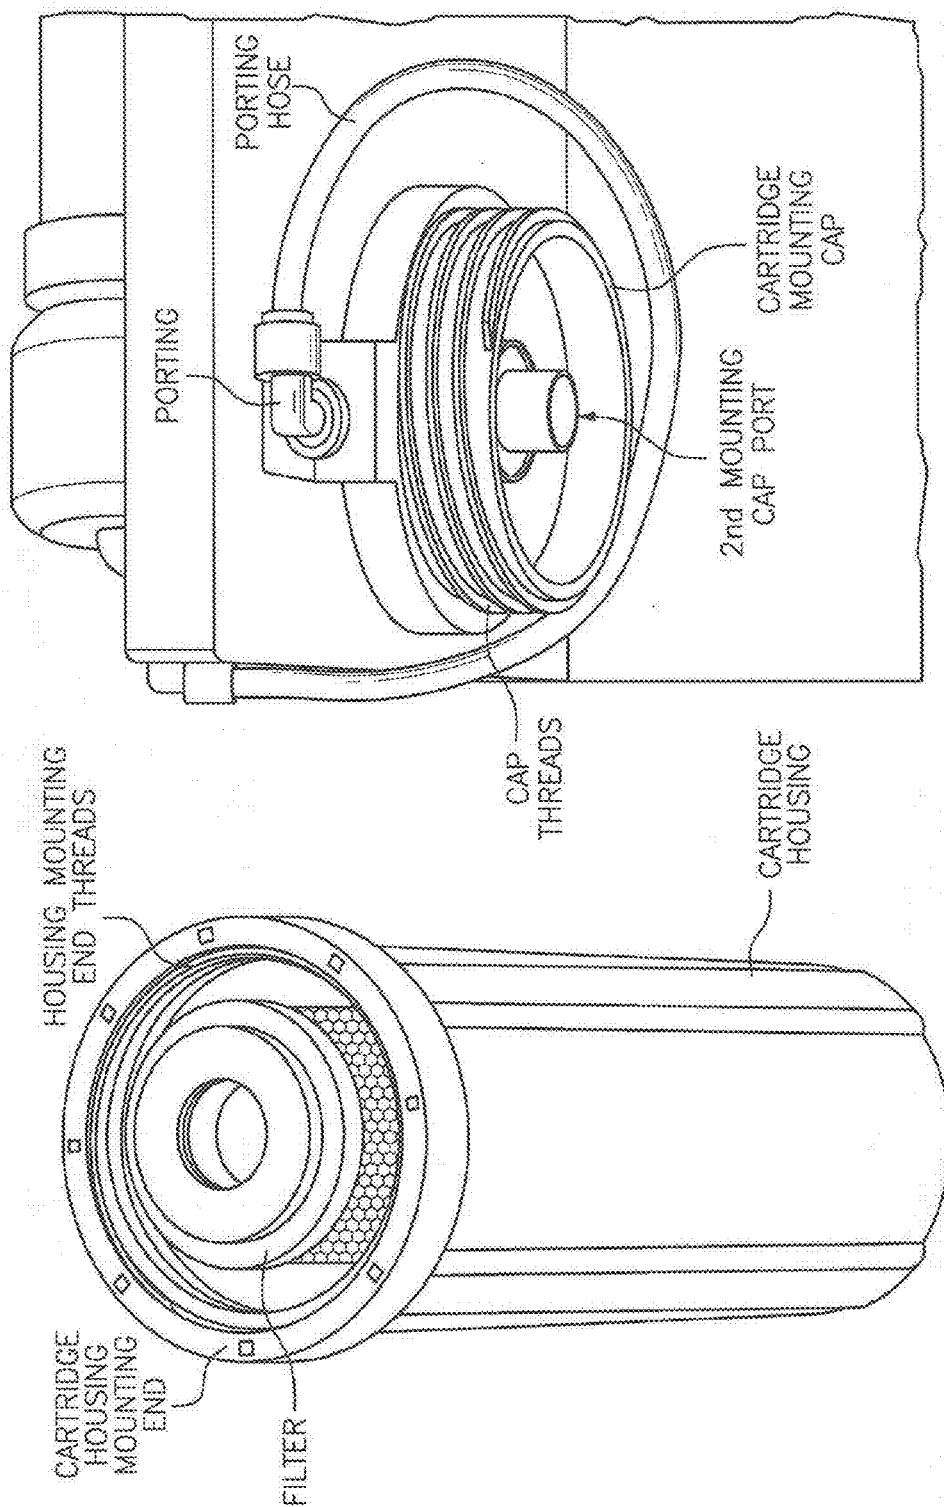


FIG. 2D: Motor Pump Unit Cartridge



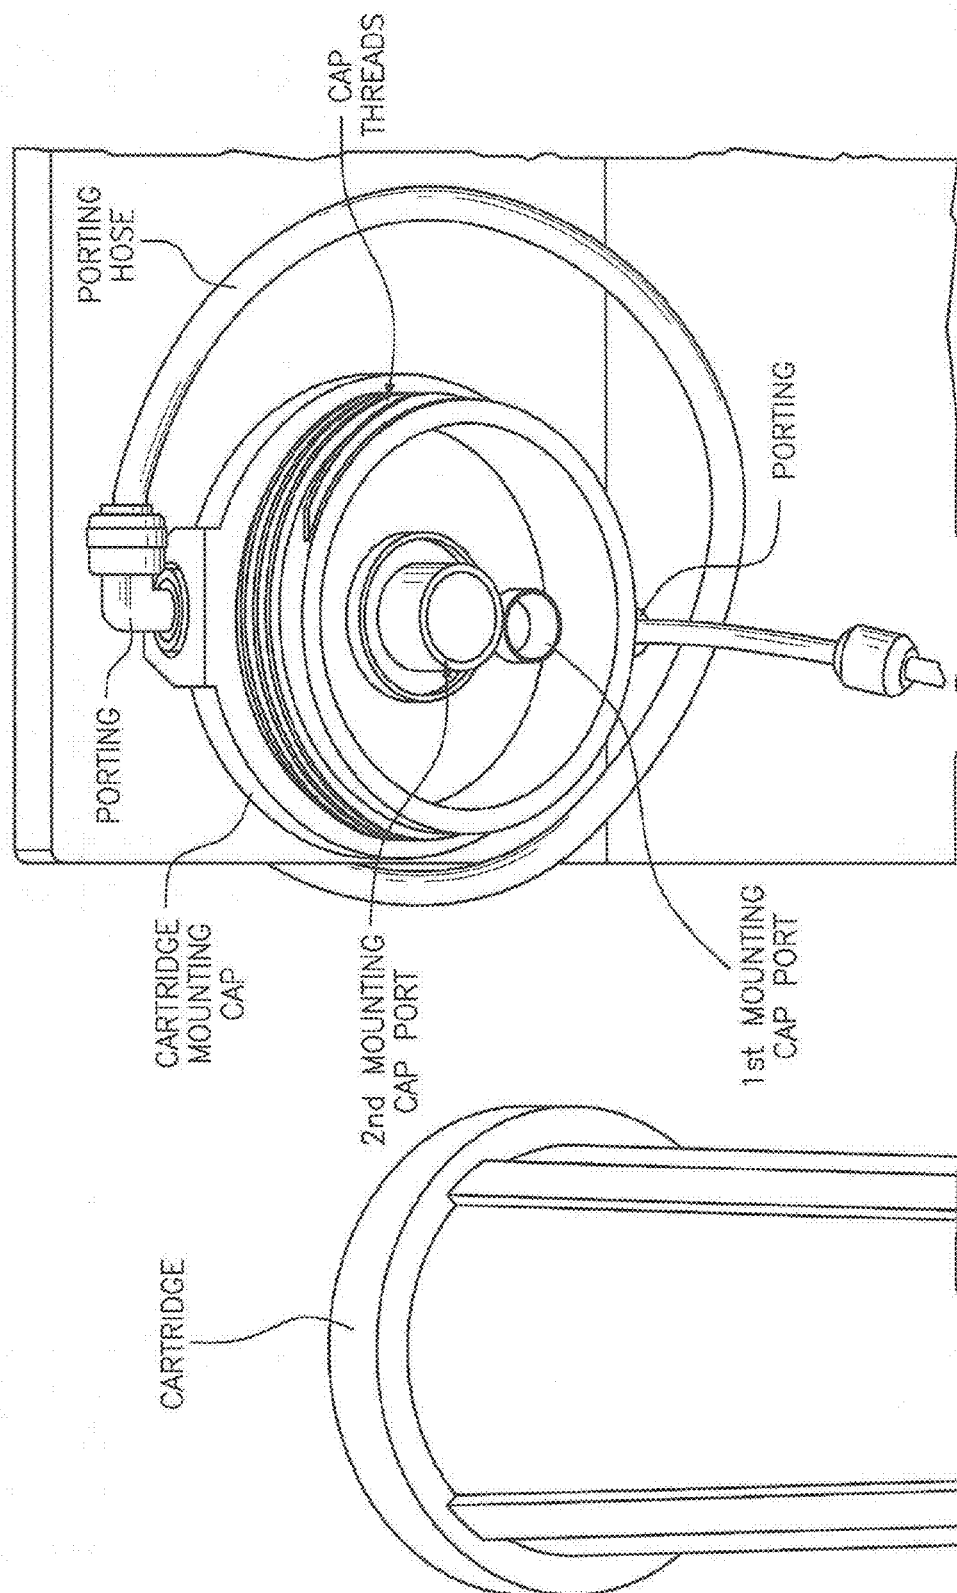


FIG. 2F

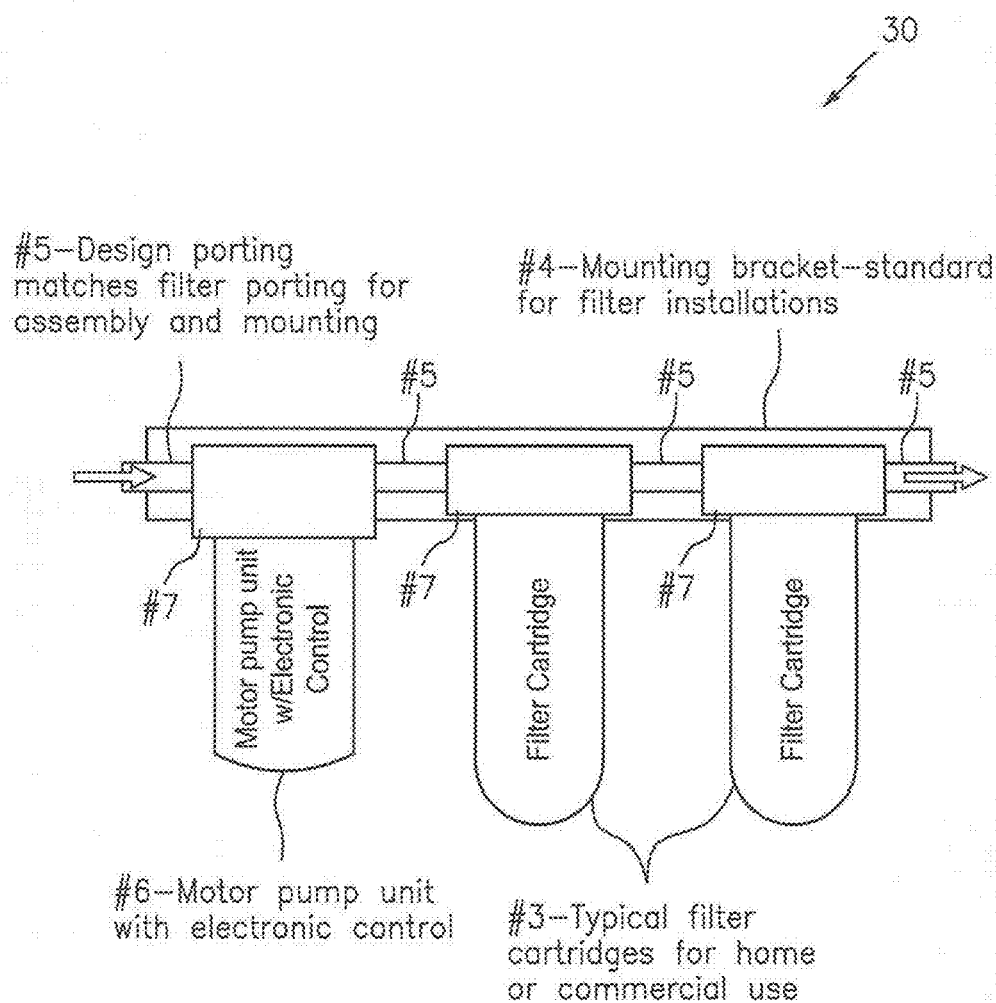


FIG. 3

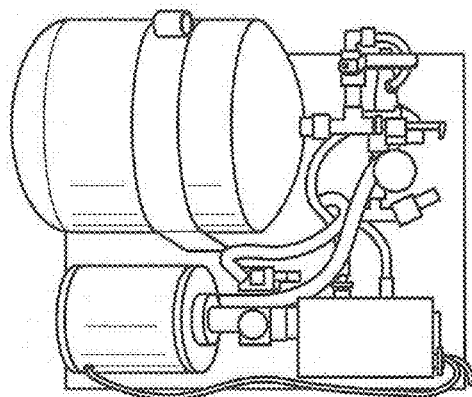


FIG. 4A

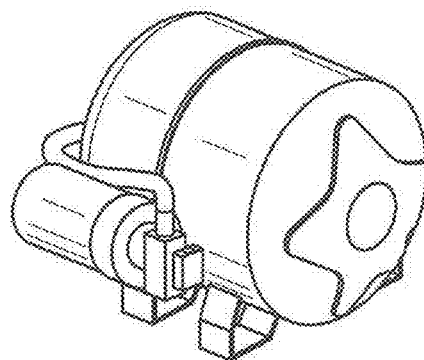


FIG. 4B

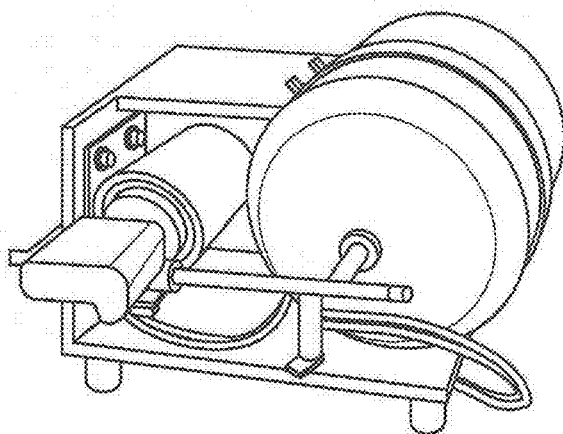


FIG. 4C

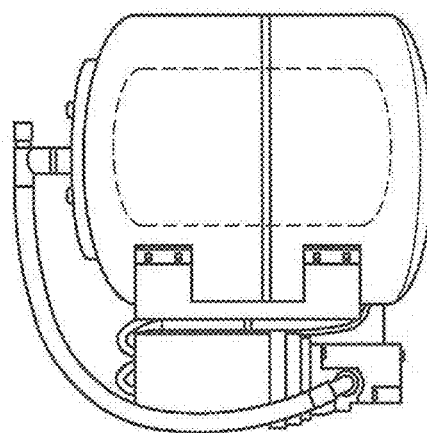


FIG. 4D

FIG. 4
(PRIOR ART)

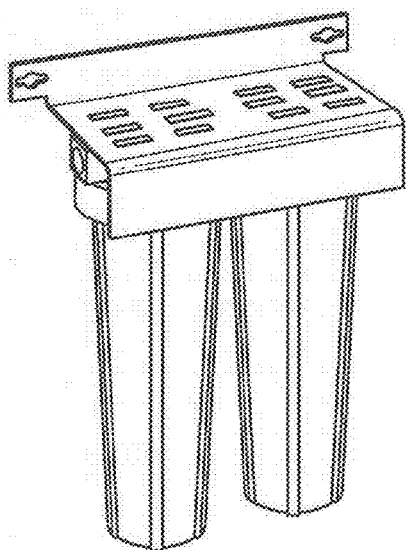


FIG. 5A

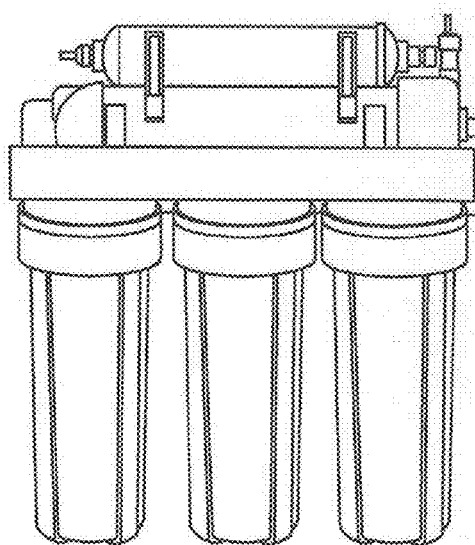


FIG. 5B

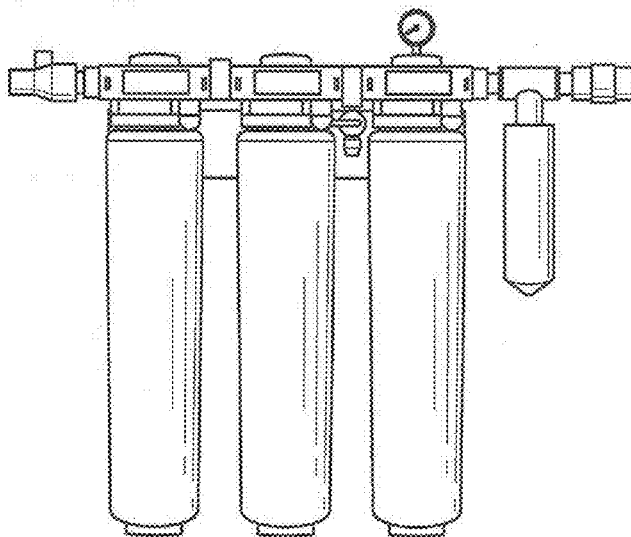


FIG. 5C

FIG. 5
(PRIOR ART)

Fig.6A




Fig.6B

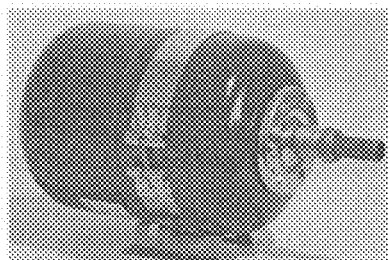


Fig.6C

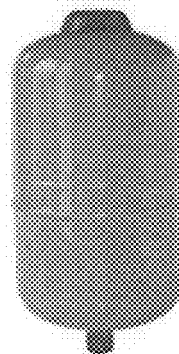


Fig.6D

Figure 6: Accumulators (Prior Art)

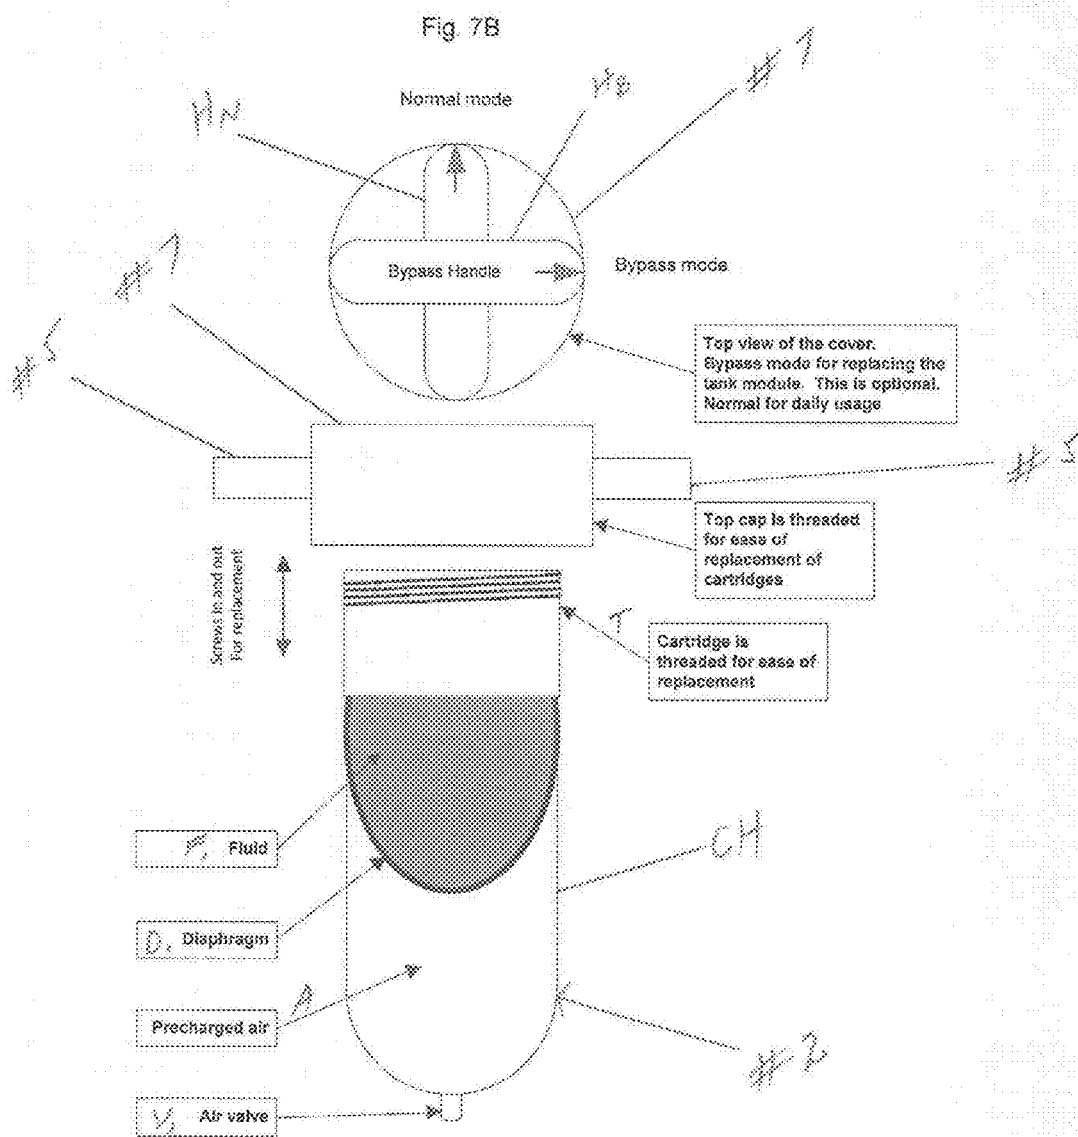


Figure 7

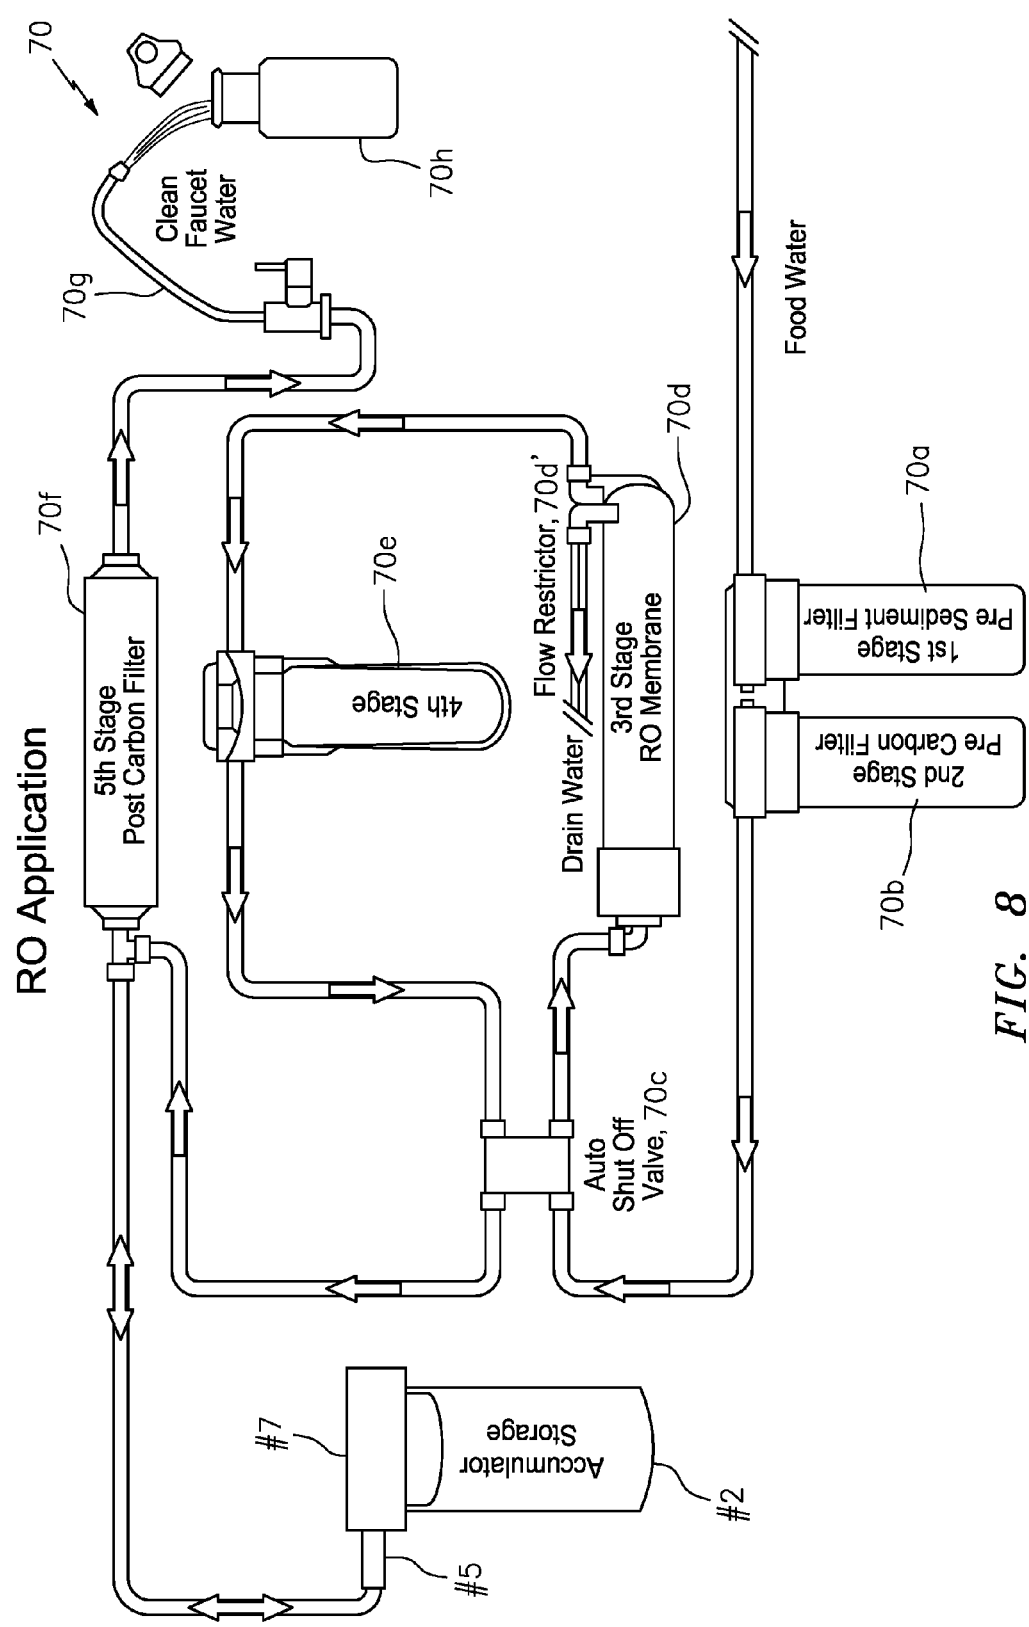


FIG. 8

CARTRIDGE ACCUMULATOR

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims benefit to provisional patent application Ser. Nos. 62/218,314 (911-005.087//F-FLJ-X0023), filed 14 Sep. 2015, which is incorporated by reference in their entirety.

[0002] This application is also a continuation-in-part application that claims benefit to patent application serial nos. 15/167,534 (911-005.085-2//F-FLJ-X0021), filed 27 May 2016, which itself claims benefit to provisional patent application serial no. 62/166,988, filed 27 May 2015, which are both incorporated by reference in their entirety.

BACKGROUND OF THE INVENTION

[0003] 1. Field of Invention

[0004] The present invention relates to a pump; and more particularly relates to a cartridge pump for adapting in a filter manifold, as well as to a cartridge accumulator for adapting in such a filter manifold.

[0005] 2. Description of Related Art

[0006] FIG. 1 shows an installation that is known in the art, e.g., including a non-carbonated beverage dispenser, a soda dispenser, a coffee brewer that are arranged and coupled in relation to an ice maker, a combination of a water supply, a booster and a filter system and a carbonator pump. In the installation, the distance between the water booster and the filter system can be any length as space requires.

[0007] In operation, booster systems in the beverage market are designed to provide a water supply at a constant pressure, e.g., to carbonators, ice makers, non-carbonated drink dispensing valves, coffee/tea brewers, etc. In FIG. 1, the typical booster system has the pump and the accumulator tank connected to the filter system that then distributes the water to the aforementioned devices. The current installation requires the pump and accumulator tank to be mounted separately from the filters or filtering system.

[0008] As one skilled in the art would appreciate, an accumulator tank is a water chamber which has a pre-pressurized internal air bladder. The accumulator tank is used to store water and dispense the water to reduce the cycling of the pump. There are many different types, kinds and styles of accumulator tanks on the market, e.g., see FIG. 6. By way of example, components in a typical accumulator tank include a tank housing, a diaphragm arranged therein, fluid on one side of the diaphragm and pressured air on the other side of the diaphragm, an air nozzle for providing the pressured air, and a fluid nozzle for providing the fluid to/from the housing. When used with a pump to supply pressurized water, the accumulator tank may be installed in the pressured side of the pump to dampen water pressure spikes, reduce pump cycling, reduce pulsation in the line, help increase the pump's life and also save power.

[0009] In a reverse osmosis (RO) system, the accumulator/storage tank may be used to store pure water at some desired pressure until the pure water is used.

[0010] Some of the shortcomings of the above mentioned installation and devices include the following:

[0011] Currently, the booster systems are separately mounted from the filtering system through a series of multiple connections and hoses, see FIG. 1. In effect, this means running tubing and manually plumbing the units in

place. Each of these connections is a potential leak path for the overall system and any length of hose is prone to snagging, kinking, or rupture. FIG. 4 shows a few of the many systems that are currently in the market for boosting water pressure, e.g., in FIGS. 4A through 4D. They are costly, bulky, and usually consist of many components. Repair and maintenance are complicated and often the entire unit must be replaced. See FIGS. 4 and 5 that show current configurations of pumps and filters, e.g., including FIGS. 5A through 5D.

SUMMARY OF THE INVENTION

[0012] In summary, and according to some embodiments, the present invention may include, or take the form, of a cartridge style pump that may be plumbed directly into a filter manifold. The pump can be configured as an intelligent pump, e.g., that would remove the need for an accumulator tank from the system. The connection would allow for direct porting and reduce line loss, and the requirement to remotely mount and plumb the boost system, as well as reduce potential leak paths.

[0013] Moreover, and according to some embodiments, the present invention may also include, or take the form, of a cartridge style accumulator tank that may be plumbed directly into a filter manifold. The connection allows for direct porting and reduces line loss, as well as reducing potential leak paths. By way of example, the present invention may be made up of two parts, a top cap (with bypass mode or without bypass (aka normal mode)) and an accumulator cartridge. The top cap may be installed into the line and then the accumulator cartridge may be fastened into the top cap. To service the unit, there is no need to remove the top cap from the plumbing. To replace the cartridge without interrupting the system, one can activate the bypass mode by turning a handle on the top cap. This will also bleed the pressure from the cartridge allowing for the user to simply unfasten the cartridge from the line and replace with a new cartridge.

Examples of Particular Embodiments of Cartridge Pump

[0014] According to some embodiments, and by way of example, the present invention may include, or take the form of, a system, that features a new and unique pump cartridge, a filter cartridge and an inline mounting bracket combination.

[0015] The pump cartridge may include a cartridge housing configured with a motor pump unit arranged therein for pumping a fluid in the system, the pump cartridge configured with a pump cartridge mounting, and with a pump cartridge porting to receive the fluid and provide pumped fluid.

[0016] The filter cartridge may be configured to receive and filter the pumped fluid and provide filtered pumped fluid, the filter cartridge configured with a filter cartridge mounting and with filter cartridge porting to receive the pumped fluid and provide filtered pumped fluid, the pump cartridge mounting and the filter cartridge mounting being configured to substantially match; the pump cartridge porting and the filter cartridge porting also being configured to substantially match.

[0017] The inline mounting bracket may include inline cartridge mounting units and inline mounting bracket ports arranged inbetween for providing associated fluid from one

inline cartridge mounting unit to an adjacent inline cartridge mounting unit. Each of the inline cartridge mounting units may be configured to mount either the pump cartridge or the filter cartridge. One inline cartridge mounting unit may be configured to receive the pump cartridge mounting so that the pump cartridge porting aligns with a set of the inline mounting bracket ports. Another inline cartridge mounting unit configured to receive the filter cartridge mounting so that the filter cartridge porting aligns with a corresponding set of the inline mounting bracket ports.

[0018] By way of example, the system may also include one or more of the following features:

[0019] The pump cartridge may include a smart pump having an electronic controller configured therein so that the pump cartridge provides the pumped liquid with a predetermined pumping functionality, including a constant flow and pressure.

[0020] The controller may be configured with a variable speed control to adjust the speed in response to a change in the pump head pressure in order to maintain the constant flow and pressure.

[0021] The controller may be configured to respond to a pressure signal containing information about the pressure of the pumped liquid.

[0022] The system may include an accumulator configured to receive and accumulate the fluid pumped by the pump cartridge. The system may form part of a beverage dispensing system, or a reverse osmosis system, a water filtration system.

[0023] At least one inline cartridge mounting unit may be configured to receive the pump cartridge mounting, which is rotated therein so that the pump cartridge porting aligns with the set of corresponding inline mounting bracket ports.

[0024] At least one inline cartridge mounting unit may be configured to receive the filter cartridge mounting, which is rotated so that the filter cartridge porting aligns with the set of corresponding inline mounting bracket ports.

Examples of Particular Embodiments of Cartridge Accumulator

[0025] By way of example, the present invention may include, or take the form of, a filter manifold for processing fluid being provided for dispensing, including to a fluid dispenser, featuring a new and unique combination of a mounting bracket, a filter cartridge and an accumulator cartridge.

[0026] The mounting bracket may be configured with porting connections.

[0027] The filter cartridge may include a filter cartridge porting connection configured to plumb into one of the porting connections on the mounting bracket and also configured to filter the fluid being provided to the fluid dispenser.

[0028] The accumulator cartridge may include an accumulator cartridge porting connection configured to plumb into another one of the porting connections on the mounting bracket and also configured to receive, accumulate and provide the fluid for dispensing, e.g., including to the filter cartridge to be filtered before being provided to the fluid dispenser.

[0029] By way of example, the filter manifold may also include one or more of the following features:

[0030] The accumulator cartridge porting connection may match the filter cartridge porting connection, so that the filter

cartridge and the accumulator cartridge can be mounted on the mounting bracket of the filter manifold.

[0031] The filter cartridge may include a two part filter cartridge construction, having a top filter cartridge cap configured with a threaded top filter cartridge connection and a bottom filter cartridge configured with a corresponding threaded bottom filter cartridge connection for coupling to the threaded top filter cartridge connection.

[0032] The top filter cartridge cap may include a bypass handle configured to rotate to a bypass mode setting in relation to the porting connections of the mounting bracket to bypass the filter cartridge; and also configured to rotate to a normal mode setting in relation to the porting connections of the mounting bracket to allow fluid to pass through the filter cartridge.

[0033] The accumulator cartridge may include a two part accumulator cartridge construction, having a top accumulator cartridge cap configured with a threaded top accumulator cartridge connection and a bottom accumulator cartridge configured with a corresponding threaded bottom accumulator cartridge connection for coupling to the threaded top accumulator cartridge connection.

[0034] The top accumulator cartridge cap may include a bypass handle configured to rotate to a bypass mode setting in relation to the porting connections of the mounting bracket to bypass the accumulator cartridge; and configured to rotate to a normal mode setting in relation to the porting connections of the mounting bracket to allow fluid to pass to and from the accumulator cartridge.

[0035] The bottom accumulator cartridge may include a cartridge housing having a diaphragm configured therein to form a fluid chamber for accumulating the fluid and a precharged gas chamber for containing a precharge gas.

[0036] The bottom accumulator cartridge may include an air valve configured to receive the precharge gas for precharging the precharge chamber.

[0037] The filter manifold may include a motor pump cartridge having a motor pump cartridge porting connection configured to plumb into another one of the porting connections on the mounting bracket and also configured to provide the fluid to the accumulator cartridge before being provided to the filter cartridge.

Solution to Problem in the Art

[0038] The inline mounting bracket design according to the present invention reduces the size of the system, the amount of connections, and the amount of hose required to install the system, which in turn reduces the space required for installation, the number of potential leak paths, and the likelihood of failure of the system due to issues with the hose.

[0039] By way of example, the present invention may be utilized in many different applications such as reverse osmosis (RO), water filtration, residential areas where low water pressure is an issue etc.

BRIEF DESCRIPTION OF THE DRAWING

[0040] The drawing includes FIGS. 1-8, which are not necessarily drawn to scale, which are briefly described as follows:

[0041] FIG. 1 shows a diagram of an installation of a booster system having a pump and an accumulator mounted separately from filters that is known in the art.

[0042] FIG. 2A shows a system having a combination of a motor pump unit/cartridge, an accumulator cartridge and two filter cartridges configured in relation to an inline mounting bracket, according to some embodiments of the present invention.

[0043] FIG. 2B shows the combination of the motor pump unit/cartridge, the accumulator cartridge and the two filter cartridges configured in relation to the inline mounting bracket for implementing in a beverage application like that shown in FIG. 2A, according to some embodiments of the present invention.

[0044] FIG. 2C shows a combination of a motor pump unit/cartridge, two filter cartridges and an accumulator cartridge configured in relation to an inline mounting bracket, for implementing in a reverse osmosis (RO) application, according to some embodiments of the present invention.

[0045] FIG. 2D shows a motor pump unit cartridge having cartridge mountings for matching a filter cartridge mounting, porting for matching filter cartridge porting, and also having a motor pump unit, according to some embodiments of the present invention.

[0046] FIG. 2E shows a filter cartridge that is disassembled and has a cartridge housing and a cartridge mounting cap, according to some embodiments of the present invention.

[0047] FIG. 2F shows a bottom enlarged view of the cartridge mounting cap in FIG. 2E, showing 1st and 2nd mounting cap ports, according to some embodiments of the present invention.

[0048] FIG. 3 shows a combination of a motor pump unit/cartridge, having an electronic/intelligent controller, and two filter cartridges configured in relation to the inline mounting bracket, according to some embodiments of the present invention.

[0049] FIG. 4 includes FIGS. 4A through 4D, which show diagrams of booster system that are known in the art.

[0050] FIG. 5 includes FIGS. 5A through 5C, which show diagrams of mounting brackets and cartridges system that are known in the art.

[0051] FIG. 6 includes FIGS. 6A through 6D and shows examples of different styles of accumulators that are known in the art.

[0052] FIG. 7 includes FIGS. 7A and 7B and shows an accumulator cartridge/tank system having a top cap in combination with an accumulator cartridge, where FIG. 7A shows the accumulator cartridge system having a top cap with threads (see FIG. 2E), and the accumulator cartridge with corresponding threads for installing in the top cap; and where FIG. 7B shows a top down view of the cap having a normal mode and a bypass mode for replacing the accumulator cartridge, according to some embodiment of the present invention.

[0053] FIG. 8 shows an accumulator cartridge in an RO system, e.g., where the accumulator cartridge/tank is installed, according to some embodiments of the present invention.

[0054] Not every element or arrow in every Figure is labeled with a lead line and reference numeral/label, so as to reduce clutter in the drawing.

DETAILED DESCRIPTION OF BEST MODE OF THE INVENTION

[0055] The present application builds on technology disclosed in parent application Ser. No. 15/167,534, identified

above, which discloses embodiments related to a pump cartridge in relation to that shown FIGS. 1 through 5. The present application further develops this technology to include that shown in FIGS. 6-8 appended to this application.

FIGS. 1-5: Detailed Description of the Operation of the Present Invention

[0056] In summary, the present invention may take the form of, or consist of, one or more pump cartridges, which are directly connected in-line with one or more filter cartridges. They may be paired with an accumulator tank for a pump version, and with no accumulator tank for a smart pump version. The inline mounting bracket design reduces the size of the system, the amount of connections, and the amount of hose required to install the system, which in turn reduces the space required for installation, the number of potential leak paths, and the likelihood of failure of the system due to issues with the hose. The reader is referred collectively to the embodiments shown in FIGS. 2A through 3.

FIGS. 2A and 2B: Beverage Applications

[0057] Consistent with that set forth above, FIG. 1 show an overall view of the current known system, and FIG. 2A show an overall view of a system generally indicated as 10 according to the present invention. In the current system shown in FIG. 1, the booster system is mounted separately from the filtration system. In contrast, the system 10 according to the present invention shown in FIG. 2A includes a combination generally indicated as 20 of cartridges for the pump, the accumulator tank, and the filter unit(s), which may be installed inline allowing for easier installation, maintenance, repair, and cartridge replacement.

FIGS. 2A, 2B and 2C Show Systems 20, 20' that may include the Following

[0058] #1) Pump cartridge (aka the motor pump unit cartridge) that may be configured or designed as a modular pump system arranged or contain in a standard cartridge housing, e.g., like that used for a filter cartridge. By way of example, the motor pump unit cartridge (#1) may be configured with porting, e.g., including input and output ports, that can be directly connected to corresponding ports in the filter systems in which it is implemented. By way of example, this motor pump unit cartridge (#1) may utilize a quick connect pump head that is known in the art and easily serviced. By way of example, see FIG. 2D, the pump head (#9c1) that forms part of the motor pump unit (#9c) arranged or contained in the cartridge housing (#9).

[0059] #2) Accumulator cartridge that may be configured as, or would consist of, an accumulator tank designed to fit into the filter configuration of the filter systems in which it is implemented. By way of example, in an RO system 20' like that shown in FIG. 2C, the accumulator tank (#2) may be after the filters (#3) as shown in FIG. 2C.

[0060] #3) Typical filter cartridges that are known in the art, and available on the market. In effect, the scope of the invention is not intended to be limited to any particular type or kind of filter cartridge either now known or later developed in the future. Examples of the filter cartridge are disclosed in FIG. 5 below, as well as the U.S. patent documents, and other references set forth below.

[0061] #4) Typical mounting brackets that are known in the art, and available on the market. In effect, the scope of the invention is not intended to be limited to any particular type or kind of mounting bracket either now known or later developed in the future. Examples of other mounting brackets are also disclosed in the U.S. patent documents, and other references set forth below.

[0062] #5) Porting that is configured for fluidly coupling or connecting the pump cartridge (#1), the accumulator (#2) and the filter cartridge (#3) units together mounted in the mounting bracket (#4) that are known in the art. By way of example, such porting (#5) may form an integrate part of the mounting bracket (#4), including those currently available on the market.

[0063] FIGS. 2B and 2C shows combinations 20 and 20' of typical installations, e.g. using the pump and accumulator cartridges mounted in-line with one or more cartridges for the filter(s) for receiving and processing input fluid F_{in} and providing an output fluid F_{out} , $F_{out(RO)}$. In FIG. 2B, the combination includes a motor pump unit/cartridge (#1), an accumulator cartridge (#2) and one or more filter cartridges (#3), all configured in series and mounted on the inline mounting bracket (#4) for implementing in a beverage application like that shown in FIG. 2A. In FIG. 2C, the combination 20' includes the motor pump unit/cartridge (#1), the one or more filter cartridges (#3) and the accumulator cartridge (#2), all configured in series and mounted on the inline mounting bracket (#4) for implementing in a reverse osmosis (RO) application like that shown in FIG. 2C.

[0064] In FIGS. 2A, 2B and 2C, the one or more filter cartridges (#3) may include typical filter cartridges for home or commercial use. The inline mounting bracket (#4) may include, or take the form of, a standard or known mounting bracket for filter installations. The inline mounting bracket (#4) may include the design porting (#5) coupling the motor pump unit/cartridge (#1) and the accumulator cartridge (#2) that matches a filter porting used for assembly and mounting.

[0065] FIG. 2D shows the motor pump unit cartridge (#1) or (#6) that may be configured to include a cartridge housing (#9) having a motor pump mounting (#9a) that matches the filter cartridge mounting, and a motor pump porting (#9b) that matches the filter cartridge porting (#5) and a motor pump unit (#9c). By way of example, the motor pump unit (#9c) may include a pump head (#9c1) that has input/output porting to fit directly in line with, and couple to, the cartridge's porting (#9a) for matching and aligning with the design/filter porting (#5) of the existing filter cartridges like the one or more filter cartridges (#3). The motor pump unit (#9c) also includes a motor (#9c2) for driving the pump head (#9c1). The motor (#9c2) may also include a quick connect to allow for easier pump replacement as needed. It is important to note that the scope of the invention is not intended to be limited to any particular type or kind of motor and/or pump combination; and embodiment are envisioned, and the scope of the invention is intended to include, using a motor and/or pump combination that are now known or later developed in the future. By way of example, the motor and/or pump combination may include, or take the form of a motor and/or pump combination for implementing a diaphragm pumping arrangement, as well as other types or kind of pumping arrangement. The whole thrust of the present invention is to configured such a motor and/or pump

combination in a standard cartridge like the cartridge housings used for the accumulator, the filter, etc., and to couple the motor and/or pump combination in the standard cartridge into the inline mounting bracket (#4), e.g., by using a standard cartridge mounting used for coupling the filter cartridge (#3) to the mounting bracket (#4), as well as a standard design porting (#5) for coupling the motor pump unit/cartridge (#1), the filter cartridge (#3) and the accumulator cartridge (#2) fluidly together that matches the design/filter porting (#5) currently used for assembly and mounting.

[0066] By way of example, the following U.S. patent applications disclosure different types or kinds of pump technologies that may be suitably adapted, arranged or implemented, e.g., in a cartridge housing like element (#9) in FIG. 2D. See patent application Ser. Nos. 14/794,284; 14/740,577 and 13/895,719, which are all incorporated by reference in their entirety. It is understood, and one skilled in the art would appreciate, that other U.S. patent applications may disclose other types or kinds of pump technologies that may be suitably adapted, arranged or implemented, e.g., in a cartridge housing like element (#9) in FIG. 2D, within the spirit of the underlying invention.

[0067] FIG. 2E shows a filter cartridge that is disassembled and has a cartridge housing and a cartridge mounting cap; and FIG. 2F shows the cartridge mounting cap in FIG. 2E, having 1st and 2nd mounting cap ports. In FIG. 2E, the housing cartridge has a filter arranged therein. The cartridge has a cartridge housing mounting end configured with housing mounting end threads, as best shown in FIG. 2F. The cartridge mounting cap has cap threads, as shown in FIGS. 2E and 2F for coupling with the housing mounting end threads of the cartridge when the cartridge housing and the cartridge mounting cap are assembled or screwed together. The cartridge mounting cap has two portings coupled thereto. One porting maybe fluidly coupled to the 1st mounting cap port, and the other porting maybe fluidly coupled to the 2nd mounting cap port, as shown. The portings are also shown coupled to porting housing for providing fluids to and from the portings and the cartridge assembly.

[0068] By way of example, and according to some embodiments of the present invention, the motor pump unit may be configured into the cartridge housing and its input/output pump porting suitably adapted or coupled to the 1st and 2nd mounting cap ports in order to implement the integration of such a motor pump unit into the inline pumping assembly and provide the inline pumping of fluid in the overall assembly, according to the present invention.

FIG. 3: Pump Cartridge with Electronic Controls

[0069] FIG. 3 shows a combination generally indicated as 30 that represents a similar concept, but rather than using an accumulator tank, the system 30 utilizes a motor pump unit generally indicated as (#6) with an intelligent controller, e.g., like electronic control module (#9c3) in FIG. 2D. This feature will consist of a combination of a pump head, a motor and a controller, e.g., to provide constant flow and pressure to the system 30 among other pump control functionalities.

[0070] In effect, the pump cartridge (#6) with electronic control or controller (#9c3) may be configured to include, or consist of, the pump cartridge (#1) that also includes a controller module like element (#1c) in FIG. 2D that may be

configured to implement one or more pump control algorithms to perform or provide pump control functionality, e.g., consistent with that set forth below:

[0071] In close proximity, the pump cartridge (#6) with electronic controller (#9c3) may be configured to provide immediate response to system conditions.

[0072] By way of example, the system 30 may be configured to utilize pre-triggering to prevent instantaneous pressure drops, e.g., when valves are opened to dispense fluids. In this case, and by way of example, the pump cartridge (#6) with electronic controller (#9c3) may be configured to receive sensed signaling containing information, e.g., about instantaneous pressure drops, when valves are opened to dispense fluids, etc., and also configured to implement one or more suitable pump control algorithms to perform suitable pump control functionality to respond to the same.

[0073] By way of further example, the system 30 may be configured to utilize variable speed control to ensure that the flow and/or pressure remain constant to the need. As an example, a beverage dispense valve typically requires 40 PSI to be supplied to the valve at a flow rate of 2.5 ounces per second, with one valve open the pump may only require 25% of the power to meet that need. A typical pump without intelligence that is known in the art will still try to run at full speed using more energy and providing inconsistent flow as more valves are opened. In this case, and by way of example, the pump cartridge (#6) with electronic controller (#9c3) may be configured to receive sensed signaling containing information about speed, flow and/or pressure, etc., and also configured to implement one or more suitable pump control algorithms to perform suitable pump control functionality to respond to the same.

[0074] This system 30 may be configured to only use the power needed to provide the flow and pressure, e.g., by implementing suitable control or controller algorithms that forms part of the overall pump electronic control intelligence. In case where more valves may be open at the same time, the pump electronic control or controller may be configured to increase power as needed to maintain the required flow and pressure. Moreover, the pump pressure may be sensed using a pressure switch, transducer or other means of sensing pressure. The pump cartridge's electronic control or controller may be configured to monitor the pump and detect various operations such as, but not limited to, run dry, over current, over voltage, under voltage, etc., e.g., and implement suitable pump protection algorithms to protect the pump. By way of example, the pump protection algorithms may include, or take the form of, shutting the pump off; providing a suitable audio or visual warning, restarting the pump after a predetermined time increment, cycling the pump on/off, etc. In this case, and by way of example, the pump cartridge (#6) with electronic controller (#9c3) may be configured to receive sensed signaling containing information about power, voltage, current, speed, flow, valve openings, and/or pressure, etc., and also configured to implement one or more suitable pump control algorithms to perform suitable pump control functionality to respond to the same.

[0075] The system 30 may also be configured to utilize communications to alert the user of required maintenance or repair. This embodiment would eliminate the need for an accumulator tank as it would be on demand. In this case, and by way of example, the pump cartridge (#6) with electronic controller (#9c3) may be configured to receive sensed signaling containing information about maintenance, repair

and/or alerts, etc., and also configured to implement one or more suitable pump control algorithms to perform suitable pump control functionality to respond to the same.

[0076] By way of example, the pump cartridge (#1) may include, or consists of, a pump head (#9c1) that has porting to fit directly in line with the existing filter cartridges like element (#3), a motor (#9c2) for driving the pump head (#9c1), and an intelligent electronic controller like element (#9c1) with the features listed above. The motor (#9c2) can also include a quick connect to allow for easier pump replacement as needed. Pump heads and motors are known in the art, and the scope of the invention is not intended to be limited to any particular type or kind thereof. By way of example, different types of pumps are known to have different types of pump heads, and different types of pumps are known to have different types of motors. One skilled in the art would appreciate and understand, without undue experimentation, how to implement a particular type of pump having a particular type of pump head in combination with a particular type of motor, without undue experimentation, for a particular type of application. By way of example, for a beverage application, one skilled in the art would appreciate and understand, without undue experimentation, how to implement one type of pump having one type of pump head in combination with one type of motor, without undue experimentation. Alternatively, and by way of further example, for a reverse osmosis application, one skilled in the art would appreciate and understand, without undue experimentation, how to implement another type of pump having another type of pump head in combination with another type of motor, without undue experimentation. Embodiments are envisioned, and the scope of the invention is intended to include, using the same type of pump having the same type of pump head in combination with the same type of motor, etc. In other words, the scope of the invention is not intended to be limited to the type of pump, the type of pump head, or type of motor used for any particular type of application.

[0077] Furthermore, one skilled in the art would appreciate and understand, without undue experimentation, how to implement one or more pump control algorithms to perform or provide the aforementioned pump control functionality, e.g., by using known microprocessor technology and suitable control algorithms and flowcharts.

Signal Processor or Processing Module

[0078] By way of example, a signal processor or processing module may be configured at least to:

[0079] receive signaling containing information about suitable sensed signaling; and

[0080] determine corresponding signaling containing information to implement predetermined or desired pump control functionality, based upon the sensed signaling received.

[0081] In operation, the signal processor or processing module may be configured to provide the corresponding signaling to control the system 30, e.g., to control the motor/pumping functionality.

[0082] By way of example, the signal processor or processing module may be configured in, or form part of, the electronic control or controller module.

[0083] By way of example, the functionality of the signal processor or processing module may be implemented using hardware, software, firmware, or a combination thereof. In

a typical software implementation, the signal processor or processing module would include one or more microprocessor-based architectures having, e. g., at least one signal processor or microprocessor like element. One skilled in the art would be able to program with suitable program code such a microcontroller-based, or microprocessor-based, implementation to perform the functionality described herein without undue experimentation. For example, the signal processor or processing module may be configured, e.g., by one skilled in the art without undue experimentation, to receive the signaling containing information about the suitable sensed signaling for further processing, consistent with that disclosed herein.

[0084] Moreover, the signal processor or processing module may be configured, e.g., by one skilled in the art without undue experimentation, to determine the corresponding signaling containing information to implement the predetermined or desired pump control functionality, based upon the sensed signaling received, consistent with that disclosed herein.

[0085] The scope of the invention is not intended to be limited to any particular implementation using technology either now known or later developed in the future. The scope of the invention is intended to include implementing the functionality of the processors as stand-alone processor, signal processor, or signal processor module, as well as separate processor or processor modules, as well as some combination thereof.

[0086] The system may also include, e.g., other signal processor circuits or components, including random access memory or memory module (RAM) and/or read only memory (ROM), input/output devices and control, and data and address buses connecting the same, and/or at least one input processor and at least one output processor, e.g., which would be appreciated by a person skilled in the art.

Possible Applications

[0087] Possible Applications may include one or more of the following: Beverage boost systems, or home booster/filters.

[0088] By way of example, and for the sake of understanding that disclosed herein, the present invention is described in relation to the beverage market and installation of such a system. By way of example, this disclosure also shows using only two filters mounted, but there can be as many as needed, as a one skilled in the art would appreciate.

Other Filter Cartridge and Manifold Technology

[0089] In addition to the booster systems, mounting brackets and cartridges shown in FIGS. 4-5 herein, the following are other filter cartridge and manifold technology that are known in the art and provided by way of further example.

[0090] For example, the reader is also referred to U.S. Pat. No. 7,387,210, as well as the following other U.S. Pat. Nos. 7,651,070; 7,992,667; 8,097,158; 8,298,420; 8,372,273; 8,585,071; 8,911,623; 8,945,383; 8,951,415; 9,044,699; 9,345,995, which are all incorporated by reference in their entirety.

[0091] See also U.S. Patent nos. 7,225,936, D755,344; and D755,922, which are also all incorporated by reference in their entirety.

[0092] For the sake of completeness, all of the references cited in section (56) of all the aforementioned U.S. patents are also all incorporated by reference in their entirety.

[0093] See also a Beverage Master Parts List, issued 9 Mar. 2012, by Manitowoc®, doing business at 21 Future Dr., Sellersburg, IN 47172; as well as a Dual Flow

[0094] Manifold Systems Instruction Manual for DF1XX and DF2XX high flow series manifolds and water filtration systems, copyright in 2012, by 3M Purification, Inc. doing business at 400 Research Parkway, Meriden, Conn. 06450, which are also both incorporated by reference in their entirety.

[0095] A prior art search was also conducted, and the following U.S. patents or U.S. patent publications were developed therein: U.S. Pat. Nos. 8,893,927; 8,881,958; 8,857,674; 8,800,820; 8,561,841; 8,327,607; 8,061,567; 7,980,425; 7,594,525; 7,472,805; 7,331,483; 6,244,474; 2014/0305316; 2013/0092282; 2012/0305605; 2012/0102999; 2009/0104336; 2008/0283550; and 2008/0149669, which are also all incorporated by reference in their entirety.

FIGS. 6-8

[0096] FIG. 6 shows examples of different types, kinds or styles of accumulators that are known in the art. In FIG. 6, the accumulators are all stand alone accumulator. The present invention provides a new and unique technique for integrating an accumulator cartridge into the filter manifold, according to some embodiments of the present invention.

[0097] FIG. 7 includes FIGS. 7A and 7B and shows an accumulator cartridge/tank system having a top connection or cap (#7) in combination with an accumulator cartridge (#2). In FIG. 7A, the top cap (#7) may be configured with threads as also shown in FIG. 2E, and the accumulator cartridge (#2) may be configured with corresponding threads T for installing in the top cap, e.g., by screwing in and out for replacement. In FIG. 7A, the accumulator (#2) is shown having a cartridge housing CH, a diaphragm D configured therein and an air valve V. In operation, and as one skilled in the art would appreciate, one side of the diaphragm D accumulates the fluid, e.g., based upon the diaphragm stretching, and the other side of the diaphragm D contains precharged or pressurized air A, e.g., for applying a corresponding force in response to the diaphragm stretching.

[0098] FIG. 7B shows the cap (#5) having a handle (H) that may be turned between a normal mode (see the handle position labeled H_N) for normal daily usage and a bypass mode (see the handle position labeled H_B) for replacing the accumulator cartridge. As one skilled in the art would appreciate, in the bypass mode the handle H and the manifold 4 may be configured so that the fluid is ported to bypass the accumulator (#2).

[0099] FIG. 8 shows an accumulator cartridge in an RO system generally indicated as 70, where the accumulator cartridge/tank (#2) is installed, e.g., according to some embodiments of the present invention. By way of example, the RO system 70 may include 1st stage pre sediment filter 70a, a 2nd stage pre carbon filter 70b, an auto shutoff valve 70c, a 3rd stage RO member 70d having a flow restrictor 70d', for draining and provisioning fluid, a 5th stage post carbon filter 70f, and a water faucet 70g for providing clean water to the water bottle 70h. The RO system 70 also includes the accumulator storage tank (#2) having porting for coupling to the 5th stage post carbon filter 70f, according

to the present invention. The accumulator storage tank (#2) may be configured to function consistent with that set forth herein.

The Scope of the Invention

[0100] While the invention has been described with reference to an exemplary embodiment, it will be understood by those skilled in the art that various changes may be made and equivalents may be substituted for elements thereof without departing from the scope of the invention.

[0101] In addition, may modifications may be made to adapt a particular situation or material to the teachings of the invention without departing from the essential scope thereof. Therefore, it is intended that the invention not be limited to the particular embodiment(s) disclosed herein as the best mode contemplated for carrying out this invention.

What is claimed is:

1. A filter manifold for processing fluid being provided for dispensing, including to a fluid dispenser, comprising:

a mounting bracket configured with porting connections;
a filter cartridge having a filter cartridge porting connection configured to plumb into one of the porting connections on the mounting bracket and also configured to filter the fluid being provided for dispensing, including to the fluid dispenser; and

an accumulator cartridge having an accumulator cartridge porting connection configured to plumb into another one of the porting connections on the mounting bracket and also configured to receive, accumulate and provide the fluid for dispensing, including to the filter cartridge to be filtered before being provided to the fluid dispenser.

2. A filter manifold according to claim 1, wherein the accumulator cartridge porting connection matches the filter cartridge porting connection, so that the filter cartridge and the accumulator cartridge can be mounted on the mounting bracket of the filter manifold.

3. A filter manifold according to claim 1, wherein the filter cartridge comprises a two part filter cartridge construction, having a top filter cartridge cap configured with a threaded top filter cartridge connection and a bottom filter cartridge configured with a corresponding threaded bottom filter cartridge connection for coupling to the threaded top filter cartridge connection.

4. A filter manifold according to claim 3, wherein the top filter cartridge cap comprises a bypass handle configured to

rotate to a bypass mode setting in relation to the porting connections of the mounting bracket to bypass the filter cartridge; and

configured to rotate to a normal mode setting in relation to the porting connections of the mounting bracket to allow fluid to pass through the filter cartridge.

5. A filter manifold according to claim 1, wherein the accumulator cartridge comprises a two part accumulator cartridge construction, having a top accumulator cartridge cap configured with a threaded top accumulator cartridge connection and a bottom accumulator cartridge configured with a corresponding threaded bottom accumulator cartridge connection for coupling to the threaded top accumulator cartridge connection.

6. A filter manifold according to claim 5, wherein the top accumulator cartridge cap comprises a bypass handle configured to rotate to a bypass mode setting in relation to the porting connections of the mounting bracket to bypass the accumulator cartridge; and configured to rotate to a normal mode setting in relation to the porting connections of the mounting bracket to allow fluid to pass to and from the accumulator cartridge.

7. A filter manifold according to claim 1, wherein the bottom accumulator cartridge comprises a cartridge housing having a diaphragm configured therein to form a fluid chamber for accumulating the fluid and a precharged gas chamber for containing a precharge gas.

8. A filter manifold according to claim 7, wherein the bottom accumulator cartridge comprises an air valve configured to receive the precharge gas for precharging the precharge chamber.

9. A filter manifold according to claim 1, wherein the filter manifold comprises a motor pump cartridge having a motor pump cartridge porting connection configured to plumb into another one of the porting connections on the mounting bracket and also configured to provide the fluid to the accumulator cartridge before being provided to the filter cartridge.

10. A filter manifold according to claim 1, wherein the filter manifold forms part of a beverage application.

11. A filter manifold according to claim 1, wherein the beverage application includes a beverage dispenser, an ice maker, or a coffee brewer.

12. A filter manifold according to claim 1, wherein the filter manifold forms part of a reverse osmosis system.

* * * * *