PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : E02F 9/22

A1

(11) International Publication Number: **WO 99/54557**

(43) International Publication Date: 28 October 1999 (28.10.99)

(21) International Application Number: PCT/US99/07739

(22) International Filing Date: 14 April 1999 (14.04.99)

(30) Priority Data:
09/065,273 23 April 1998 (23.04.98) US

(71) Applicant: CATERPILLAR INC. [US/US]; 100 N.E. Adams Sreet, Peoria, IL 61629–6490 (US).

(72) Inventors: CREGER, Todd, D.; 705 Bayside Circle, Metamora, IL 61548 (US). DIETZ, Hans, P.; 516 Staunton Road, Naperville, IL 61565 (US).

(74) Agents: MASTERSON, David, M. et al.; 100 N.E. Adams Street, Peoria, IL 61629–6490 (US).

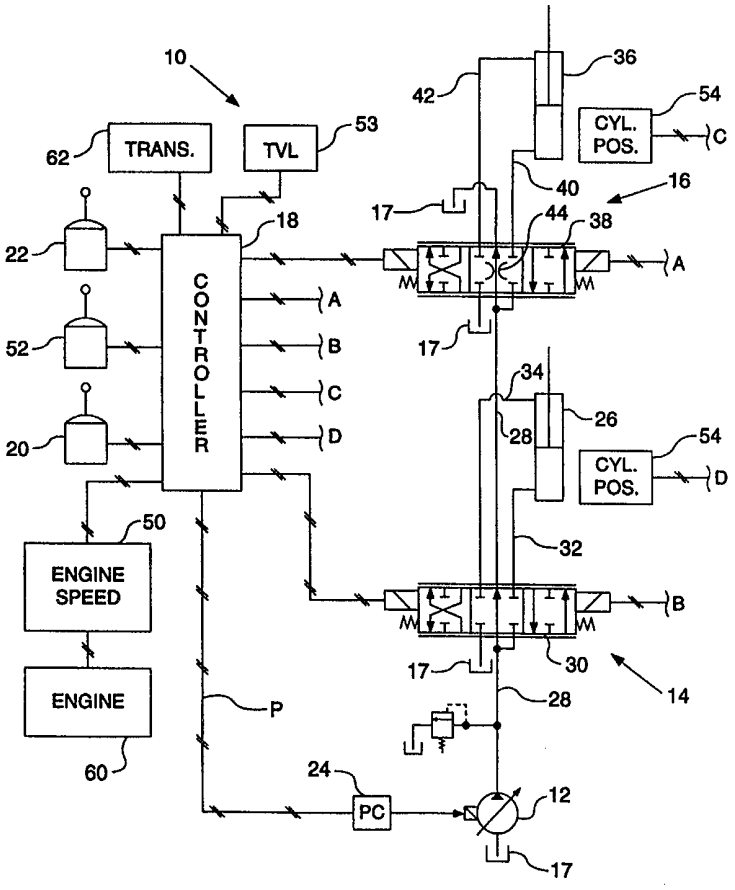
(81) Designated States: JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
With international search report.

(54) Title: APPARATUS AND METHOD FOR CONTROLLING A VARIABLE DISPLACEMENT PUMP

(57) Abstract

A method for controlling the displacement of a variable displacement hydraulic pump (12) to produce a desired flow of fluid is disclosed. The method includes the steps of: determining that the machine (100) is being operated in a digging cycle; determining a desired displacement of the pump (12), the desired pump displacement being less than the maximum pump displacement; and controlling the pump displacement to the desired pump displacement to produce a desired flow of fluid.



FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	**ES**	Spain	**LS**	Lesotho	**SI**	Slovenia
AM	Armenia	**FI**	Finland	**LT**	Lithuania	**SK**	Slovakia
AT	Austria	**FR**	France	**LU**	Luxembourg	**SN**	Senegal
AU	Australia	**GA**	Gabon	**LV**	Latvia	**SZ**	Swaziland
AZ	Azerbaijan	**GB**	United Kingdom	**MC**	Monaco	**TD**	Chad
BA	Bosnia and Herzegovina	**GE**	Georgia	**MD**	Republic of Moldova	**TG**	Togo
BB	Barbados	**GH**	Ghana	**MG**	Madagascar	**TJ**	Tajikistan
BE	Belgium	**GN**	Guinea	**MK**	The former Yugoslav Republic of Macedonia	**TM**	Turkmenistan
BF	Burkina Faso	**GR**	Greece			**TR**	Turkey
BG	Bulgaria	**HU**	Hungary	**ML**	Mali	**TT**	Trinidad and Tobago
BJ	Benin	**IE**	Ireland	**MN**	Mongolia	**UA**	Ukraine
BR	Brazil	**IL**	Israel	**MR**	Mauritania	**UG**	Uganda
BY	Belarus	**IS**	Iceland	**MW**	Malawi	**US**	United States of America
CA	Canada	**IT**	Italy	**MX**	Mexico	**UZ**	Uzbekistan
CF	Central African Republic	**JP**	Japan	**NE**	Niger	**VN**	Viet Nam
CG	Congo	**KE**	Kenya	**NL**	Netherlands	**YU**	Yugoslavia
CH	Switzerland	**KG**	Kyrgyzstan	**NO**	Norway	**ZW**	Zimbabwe
CI	Côte d'Ivoire	**KP**	Democratic People's Republic of Korea	**NZ**	New Zealand		
CM	Cameroon			**PL**	Poland		
CN	China	**KR**	Republic of Korea	**PT**	Portugal		
CU	Cuba	**KZ**	Kazakstan	**RO**	Romania		
CZ	Czech Republic	**LC**	Saint Lucia	**RU**	Russian Federation		
DE	Germany	**LI**	Liechtenstein	**SD**	Sudan		
DK	Denmark	**LK**	Sri Lanka	**SE**	Sweden		
EE	Estonia	**LR**	Liberia	**SG**	Singapore		

Description

Apparatus And Method For Controlling A Variable Displacement Pump

Technical Field

This invention relates generally to a method and apparatus for controlling the displacement of an variable displacement pump, and more particularly, to a method and apparatus for controlling the displacement of an variable displacement pump in response to a work cycle of an earth working machine.

Background Art

Currently, earth working machines, such as wheel loaders, use fixed displacement pumps to control fluid flow to hydraulic cylinders that actuate a work implement of the earth working machine. Under certain work cycles, such as a digging cycle, a fixed displacement pump may provide more flow than the cylinders can use. Consequently, the fluid flow that is not being used by the cylinders is diverted to tank through either a spool bypass valve or a relief valve. Unfortunately, the fluid flow that is returned to tank is not used to perform any useful work.

The present invention is directed toward overcoming one or more of the problems as set forth above.

Disclosure of the Invention

In one aspect of the present invention, a method for controlling the displacement of a variable displacement hydraulic pump to produce a desired flow of fluid is disclosed. The method includes the steps

of: determining that the machine is being operated in a digging cycle; determining a desired displacement of the pump, the desired pump displacement being less than the maximum pump displacement; and controlling the pump displacement to the desired pump displacement to produce a desired flow of fluid.

Brief Description of the Drawings

For a better understanding of the present invention, reference may be made to the accompanying drawings in which:

Fig. 1 illustrates a hydraulic system of an earth working machine;

Fig. 2 illustrates a forward portion of the earth working machine;

Fig. 3 illustrates a block diagram of one embodiment of a control system for regulating the displacement of a variable displacement pump of the hydraulic system;

Fig. 4 illustrates a block diagram of another embodiment of a control system for regulating the displacement of the variable displacement pump of the hydraulic system; and

Fig. 5 illustrates a block diagram of yet another embodiment of a control system for regulating the displacement of the variable displacement pump of the hydraulic system.

Best Mode for Carrying Out the Invention

Referring to the drawings and more specifically to Fig. 1, a hydraulic system 10 of an earth working machine, such as a wheel loader, is illustrated. The hydraulic system includes a source of pressurized fluid, such as a variable displacement

hydraulic pump 12, first and second fluid circuits 14,16, a reservoir 17, an electronic controller 18, and lift and tilt levers 20,22.

The hydraulic pump 12 is operative from a minimum displacement position towards a maximum displacement position and is controlled by a displacement controller 24. The pump displacement controller 24 is responsive to receipt of a displacement command signal from the electronic controller 18.

The first fluid circuit 14 includes a lift cylinder 26 operative to receive fluid from the hydraulic pump 12 through a supply conduit 28 and a first open-centered control valve 30. The lift cylinder 26 is connected to the first open-centered control valve 30 by conduits 32,34. The first open-centered control valve 30 is an electrically controlled proportional valve that is movable from a spring biased, neutral position towards first and second operative positions in response to receipt of flow command signals from the electronic controller 18.

At the neutral position of the first open-centered control valve 30, the fluid flow from the hydraulic pump 12 is blocked from the lift cylinder 26 and is freely passed to the second fluid circuit 16 by the supply conduit 28. At the first and second operative positions, the fluid flow from the hydraulic pump 12 is in fluid communication with the lift cylinder 26 through the appropriate conduit 32,34 and the free flow through the control valve 30 to the downstream second circuit 16 is blocked. Whenever the control valve 30 is being operated between the neutral position and one of its first and second operative

positions, a portion of the fluid flow from the hydraulic pump 12 is passed to the downstream second circuit 16.

The second fluid circuit 16 includes a tilt cylinder 36 operative to receive fluid from the first fluid circuit 14 through the supply conduit 28 and a second open-centered control valve 38. The tilt cylinder 36 is connected to the second open-centered control valve 38 by conduits 40,42. The second open-centered control valve 38 is also an electrically controlled proportional valve that is movable from a spring biased, neutral position towards first and second operative positions in response to receipt of flow command signals from the electronic controller 18.

At the neutral position of the second open-centered control valve 38, the fluid flow from the supply conduit 28 is blocked from the tilt cylinder 36 and the flow to the reservoir 17 is controllably restricted by a restriction 44. In the first and second operative positions, the fluid flow from the first fluid circuit 14 through the supply conduit 28 is in fluid communication with the tilt cylinder 36 through the appropriate conduit 40,42 and the restricted flow through the second control valve 38 to the reservoir 17 is blocked. During an initial portion of the second control valve 38 being operated within one of its first and second operative positions, fluid limited flow is permitted through the restriction 44 to the reservoir 17. Thereafter, fluid flow through the restriction is blocked.

The electronic controller 18 receives lift and tilt control signals from the respective lift and tilt levers 20,22. The electronic controller 18

processes the signals and delivers the respective command signals to the pump displacement controller 24 and to the appropriate control valve 30,38. In response to receiving the flow command signal, the displacement of the hydraulic pump 12 is moved to a position to provide an appropriate amount of fluid flow that is needed to satisfy the inputs requested through the lift and tilt levers 20,22. Likewise, in response to receiving the flow command signals, the first and second open-centered control valves 30,38 are moved to the appropriate position to direct a fluid volume to the associated actuator 26/36 as required by the control signal generated by the respective lift and tilt levers 20,22.

The electronic controller automatically receives several signals pertaining to the operation of the machine power train (not shown) which includes the machine engine 60 and transmission 62. An engine speed sensor 50 produces an engine speed signal that is responsive to the flywheel rotation of the engine 60. A transmission control lever 52 is included for selectively controlling the operation of the transmission 62. The transmission control lever 52 generates transmission control signals to the electronic controller 18 that is indicative of a desired gear ratio and/or direction of the machine. A travel speed sensor 53 produces a machine travel speed signal that is responsive to the transmission output speed.

The electronic controller 18 may receive position signals produced by position sensors 54 that indicate the position of the lift and tilt cylinders 26,36. For example, the position sensors 54 may include displacement sensors that sense the amount of

cylinder extension in the lift and tilt hydraulic cylinders respectively. Such position signals are indicative of the position of the machine work implement 107 shown on Fig. 2. The work implement 107 position may also be derivable from the work implement joint angle measurements. Thus, an alternative device for producing the position signals include rotational angle sensors such as rotatory potentiometers, for example, which measure the rotation of one of the lift arm pivot pins from which the geometry of the lift arm assembly or the extension of the lift cylinders can be derived. The work implement position may be computed from either the hydraulic cylinder extension measurements or the joint angle measurement by trigonometric methods.

The earth working machine 100 is shown with more particularity with reference to Fig. 2, where a forward portion 105 of a wheel-type loader having a work implement 107 is illustrated. Note that the illustrated wheel loader is just one example of an earth working machine. The work implement 107 includes a bucket 110 that is connected to a lift arm assembly or linkage 115 that is pivotally actuated by two hydraulic lift cylinders 26 (only one of which is shown) about a pair of lift arm pivot pins 125 (only one shown) attached to the machine frame. A pair of lift arm load bearing pivot pins 130 (only one shown) are attached to the lift arm assembly and the lift cylinders. The bucket is also tilted or racked by a bucket tilt cylinder 36 about a pair of bucket pivot pins 135 (only one shown).

The present invention is embodied in a microprocessor based system which utilizes arithmetic units to control process according to software

programs. Typically, the programs are stored in read-only memory, random-access memory or the like. The programs are discussed in relation to various block diagrams.

Reference is now made to one embodiment of the present invention which is illustrated in Fig. 3. The present invention provides for a control strategy that reduces the excess flow capacity of the hydraulic system 10 during digging operations by reducing pump displacement by a predetermined amount. For the purposes of the present invention, the electronic controller 18 determines when the earth working machine is operating in a digging cycle in response to the following three conditions:

1) the operator has selected the first gear forward shift position representing a first gear forward gear ratio of the transmission;

2) the work implement is at a digging position; and

3) the machine travel speed is less than a predetermined amount.

One method for determining whether the work implement is at a digging position is by measuring the lift cylinder position to determine whether the lift linkage is at an altitude that is equal to or less than a horizontal reference line. For example, such a horizontal reference line may be defined by the lift arm pivot pin 125 and the bucket pivot pin 135, which is shown in phantom in Fig. 2.

This aspect of determining whether the machine is operating in a digging cycle is represented by block 305 of Fig. 3. Once the electronic controller 18 has determined that the machine is

digging, the controller determines an appropriate pump displacement, represented by block 310 of Fig. 3, in response to the following equation:

$$DISP_{DESIRED} = \alpha \times DISP_{MAX}$$

where $DISP_{MAX}$ is the maximum displacement of the pump 12;

where α represents a pump displacement multiplier which is preferably between the values of 0.5 and 1.0; and

where $DISP_{DESIRED}$ is the desired displacement of the pump 12.

Once the electronic controller 18 has determined the desired pump displacement, the controller then determines whether a lever override condition exists represented by block 315 of Fig. 3. For the purposes of the present invention, a lever override condition exists when the sum of the lift and tilt lever angles, represented by the lift and tilt control signals, exceeds a predetermined value, or whether the angle of the respective lift and tilt levers independently exceeds a predetermined value. In response to a lever override conditioning existing, the desired pump displacement defaults to the maximum displacement.

In response to determining the desired pump displacement, the electronic controller 18 produces a pump displacement command signal to the pump control 24, which in turn, controls the pump displacement of the variable displacement pump 12 to produce the desired flow of fluid.

Additional embodiments of the present invention will now be described. The same elements as those of the first embodiment will be given the same numerals and the explanation thereof will be omitted.

Another embodiment of the present invention is illustrated in Fig. 4. The embodiment of Fig. 4 utilizes an operator dial 405 that is used to specify an upper limit on pump displacement. The operator dial 405 provides the operator with the ability to specify the limit on pump displacement by specifying the condition of the soil that is to be worked by the machine. For example, the operator dial 405 may include a three position rotary switch labeled Easy Material, Moderate Material, and Hard Material, where each particular setting of the dial corresponds to a unique pump displacement multiplier α. Once the operator positions the operator dial 405, then the electronic controller 18 responsively determines the corresponding pump displacement multiplier α. For example, in the illustrated embodiment, the controller 18 selects a pump displacement multiplier α of 0.85 for Easy Material, 0.75 for Moderate Material, and 0.60 for Hard Material from a look-up table. Once the pump displacement multiplier α is determined, then the controller 18 determines the desired pump displacement as described in the prior embodiment.

Reference is now made to yet another embodiment of the present invention illustrated in Fig. 5. As indicated by block 505, the electronic controller 18 determines the velocities of each cylinder, for example, in response to differentiating the position signals that represent the position of the tilt and lift cylinders 26,36. The determined tilt and lift cylinder velocities represent the fluid flow utilization of the respective cylinders. Once the tilt and lift cylinder velocities have been determined, then the controller 18 determines the required pump displacement, as represented by block

510. The required pump displacement is determined by the following equations:

$$FLOW = VEL_{CYLINDER} \times AREA_{CYLINDER}$$

$$DISP_{REQUIRED} = FLOW / SPEED_{PUMP}$$

$$\alpha = DISP_{REQUIRED} / DISP_{MAX}$$

$$DISP_{DESIRED} = \alpha \times DISP_{MAX}$$

where $VEL_{CYLINDER}$ is determined in response to differentiating the position signals;

where $AREA_{CYLINDER}$ is predetermined;

where $SPEED_{PUMP}$ is derived from the speed of the engine;

where $DISP_{REQUIRED}$ is the required displacement of the pump 12;

where $DISP_{MAX}$ is the maximum displacement of the pump 12;

where α represents the pump displacement multiplier; and

where $DISP_{DESIRED}$ is the desired displacement of the pump 12.

In response to determining the desired pump displacement, the electronic controller 18 produces a pump displacement command signal to the pump control 24 which in turn controls the pump displacement of the variable displacement pump 12 to produce the desired fluid pressure.

Thus, while the present invention has been particularly shown and described with reference to the embodiments described above, it will be understood by those skilled in the art that various additional embodiments may be contemplated without departing from the spirit and scope of the present invention.

Industrial Applicability

The present invention provides for a method that automatically determines a desired hydraulic pump displacement to allow the majority of fluid flow produced by the pump to perform productive work. As described, the present invention provides for a method and apparatus for determining when an earth working implement is performing a digging operation, and responsively reducing the displacement of a variable displacement pump to result a desired flow of fluid that allows a higher percentage of fluid flow to be applied to the hydraulic cylinders to perform work. This prevents fluid flow from being wasted by returning the flow directly to tank.

Other aspects, objects and advantages of the present invention can be obtained from a study of the drawings, the disclosure and the appended claims.

Claims

1. A method for controlling the displacement of a variable displacement hydraulic pump (12) to deliver a desired flow of fluid to a hydraulic cylinder (26,36) for actuating a work implement (107) of a work machine (100), comprising the steps of:

determining that the machine (100) is being operated in a digging cycle;

determining a desired displacement of the pump (12), the desired pump displacement being less than the maximum pump displacement; and

controlling the pump displacement to the desired pump displacement to produce a desired flow of fluid.

2. A method, as set forth in claim 1, wherein the machine (100) includes an engine (60) and a transmission (62), and wherein step of determining that the implement is engaged in a digging cycle includes the steps of:

determining that the transmission (62) is engaged in a first gear forward gear ratio;

determining that the work implement (107) is engaged in a digging position; and

determining that the travel speed of the machine (100) is less than a predetermined amount.

3. A method, as set forth in claim 2, wherein the desired pump displacement is determined in accordance with the following equation:

$DISP_{DESIRED} = \alpha \times DISP_{MAX}$

where $DISP_{MAX}$ is the maximum displacement of the pump (12);

where α represents a pump displacement multiplier; and

where $DISP_{DESIRED}$ is the desired displacement of the pump (12).

4. A method, as set forth in claim 1, wherein the machine (100) includes an operator dial (405) for selecting a desired pump displacement by specifying the condition of the soil that is to be worked by the machine (100), and including the step of determining the desired pump displacement in response to the operator dial setting.

5. A method, as set forth in claim 4, including the steps of:

determining the velocity of the hydraulic cylinder (26,36);

determining the speed of the engine (60); and

determining the desired pump displacement in response to the cylinder velocity and engine speed.

6. An apparatus for controlling the displacement of a variable displacement hydraulic pump (12) to deliver a desired flow of fluid to a hydraulic cylinder (26,36) for actuating a work implement (107) of a work machine (100), comprising:

means (18) for determining that the machine is being operated in a digging cycle;

means (18) for determining a desired displacement of the pump, the desired pump displacement being less than the maximum pump displacement; and

means (24) for controlling the pump displacement to the desired pump displacement to produce a desired flow of fluid.

7. An apparatus, as set forth in claim 6, including an operator dial (405) for selecting a desired pump displacement by specifying the condition of the soil that is to be worked by the machine (100), wherein the desired pump displacement is determined in response to the operator dial setting (405).

8. An apparatus, as set forth in claim 7, including:

a position sensor (54) for producing a position signal that is indicative of the position of the cylinder (26,36);

means for receiving the position signal, differentiating the position signal, and producing a velocity signal indicative of the velocity of the movement of the cylinder (26,36); and

an engine speed sensor (50) for producing an engine speed signal that is indicative of the speed of the engine.

9. An apparatus, as set forth in claim 10, including means (18) for determining the desired pump displacement in response to the cylinder velocity and engine speed signals.

Fig. 1

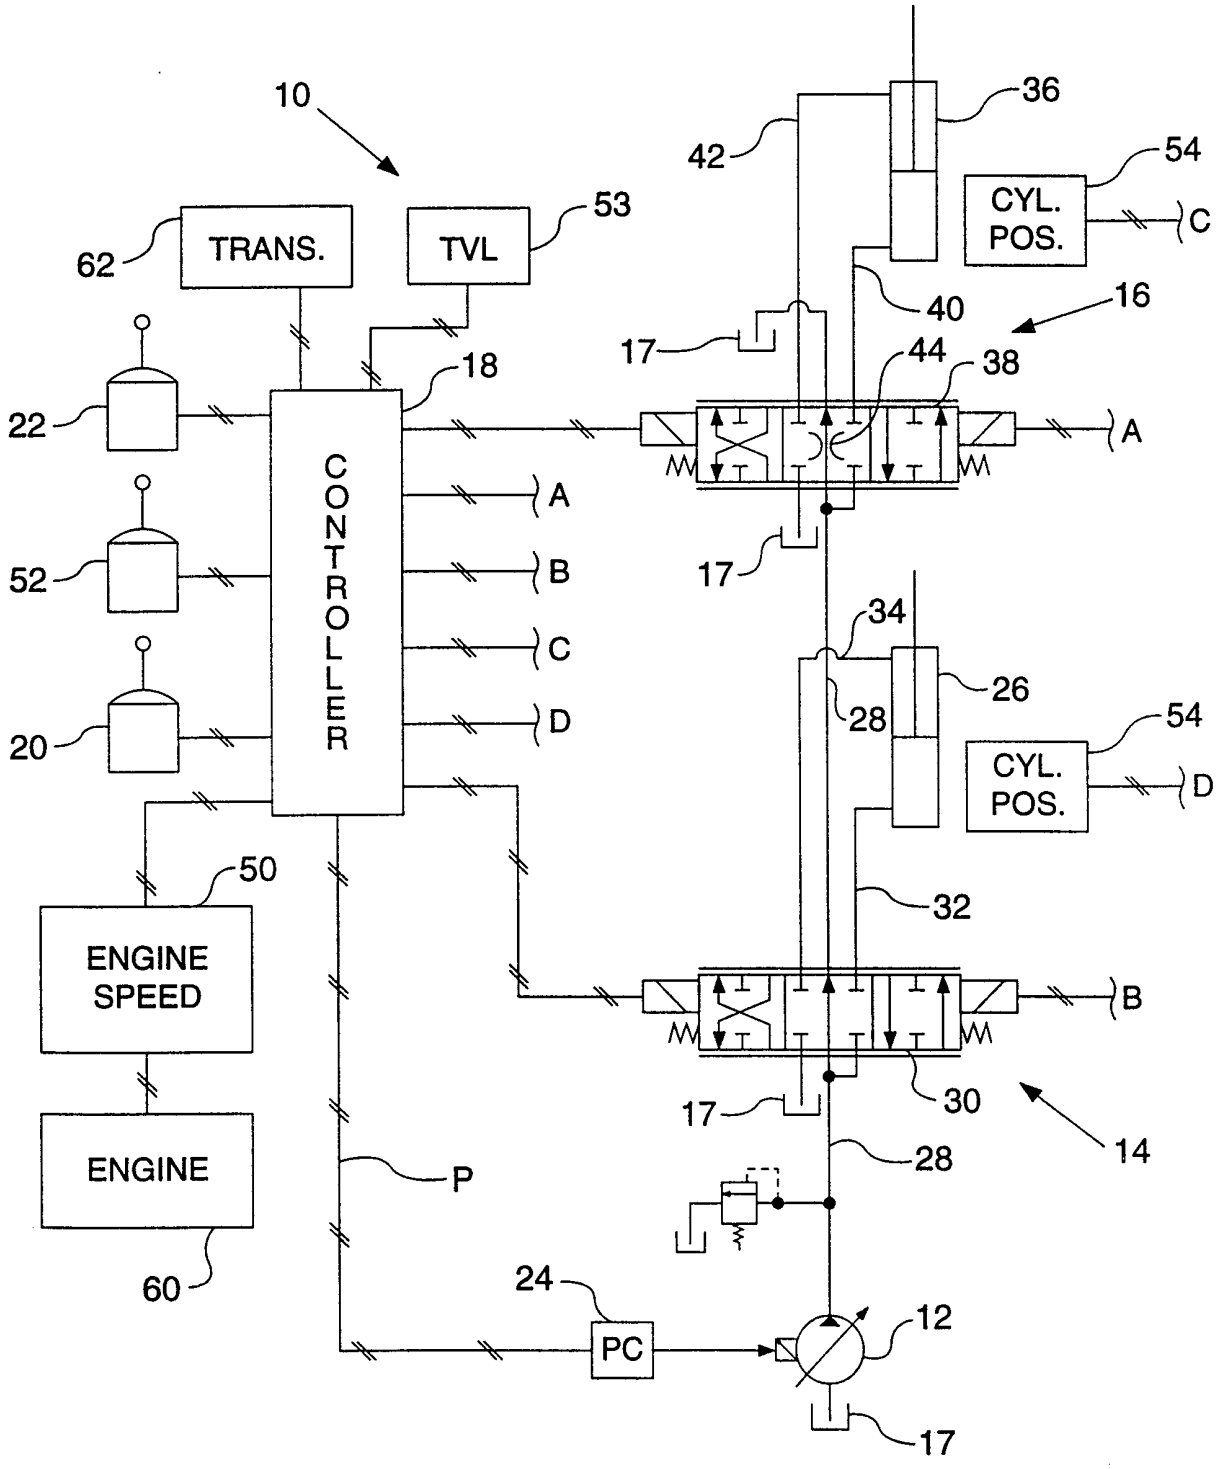

10
36
42
54
CYL. POS.
C
62
TRANS.
TVL
53
40
16
17
44
38
18
22
A
CONTROLLER
A
52
B
17
34
C
26
28
54
20
D
CYL. POS.
D
50
32
ENGINE SPEED
B
17
30
14
28
ENGINE
P
60
24
12
PC
17

FIG-2-

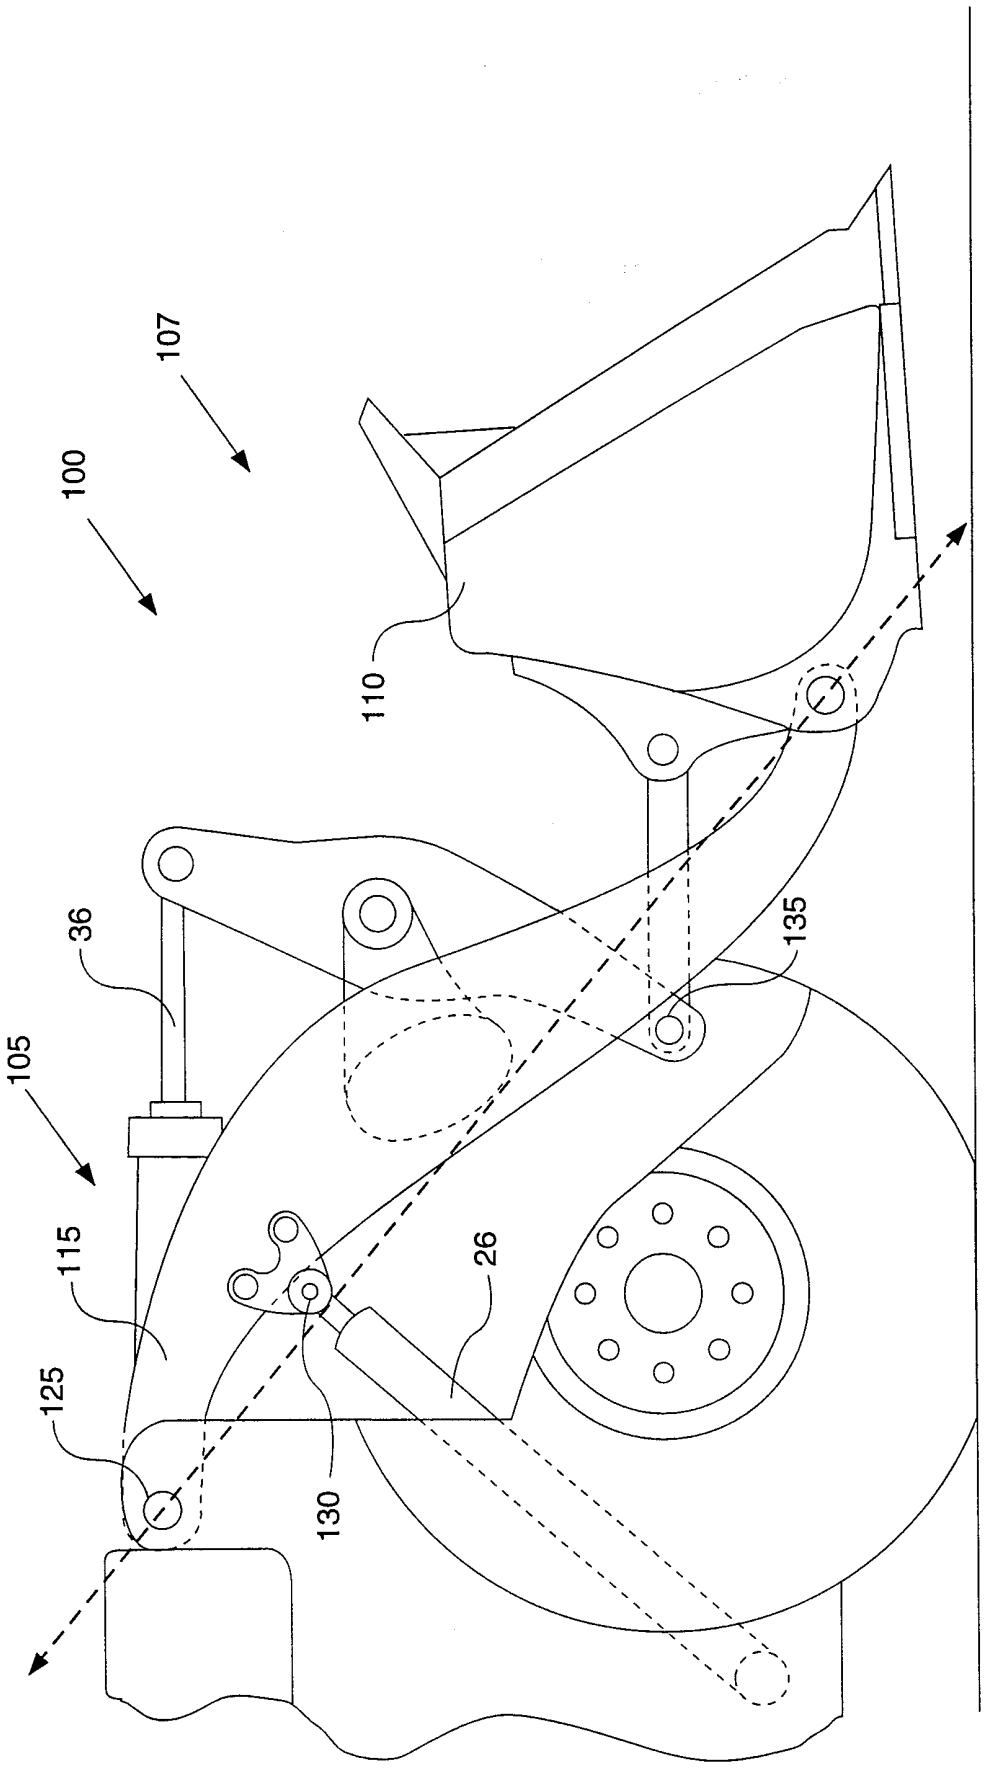


FIG-3-

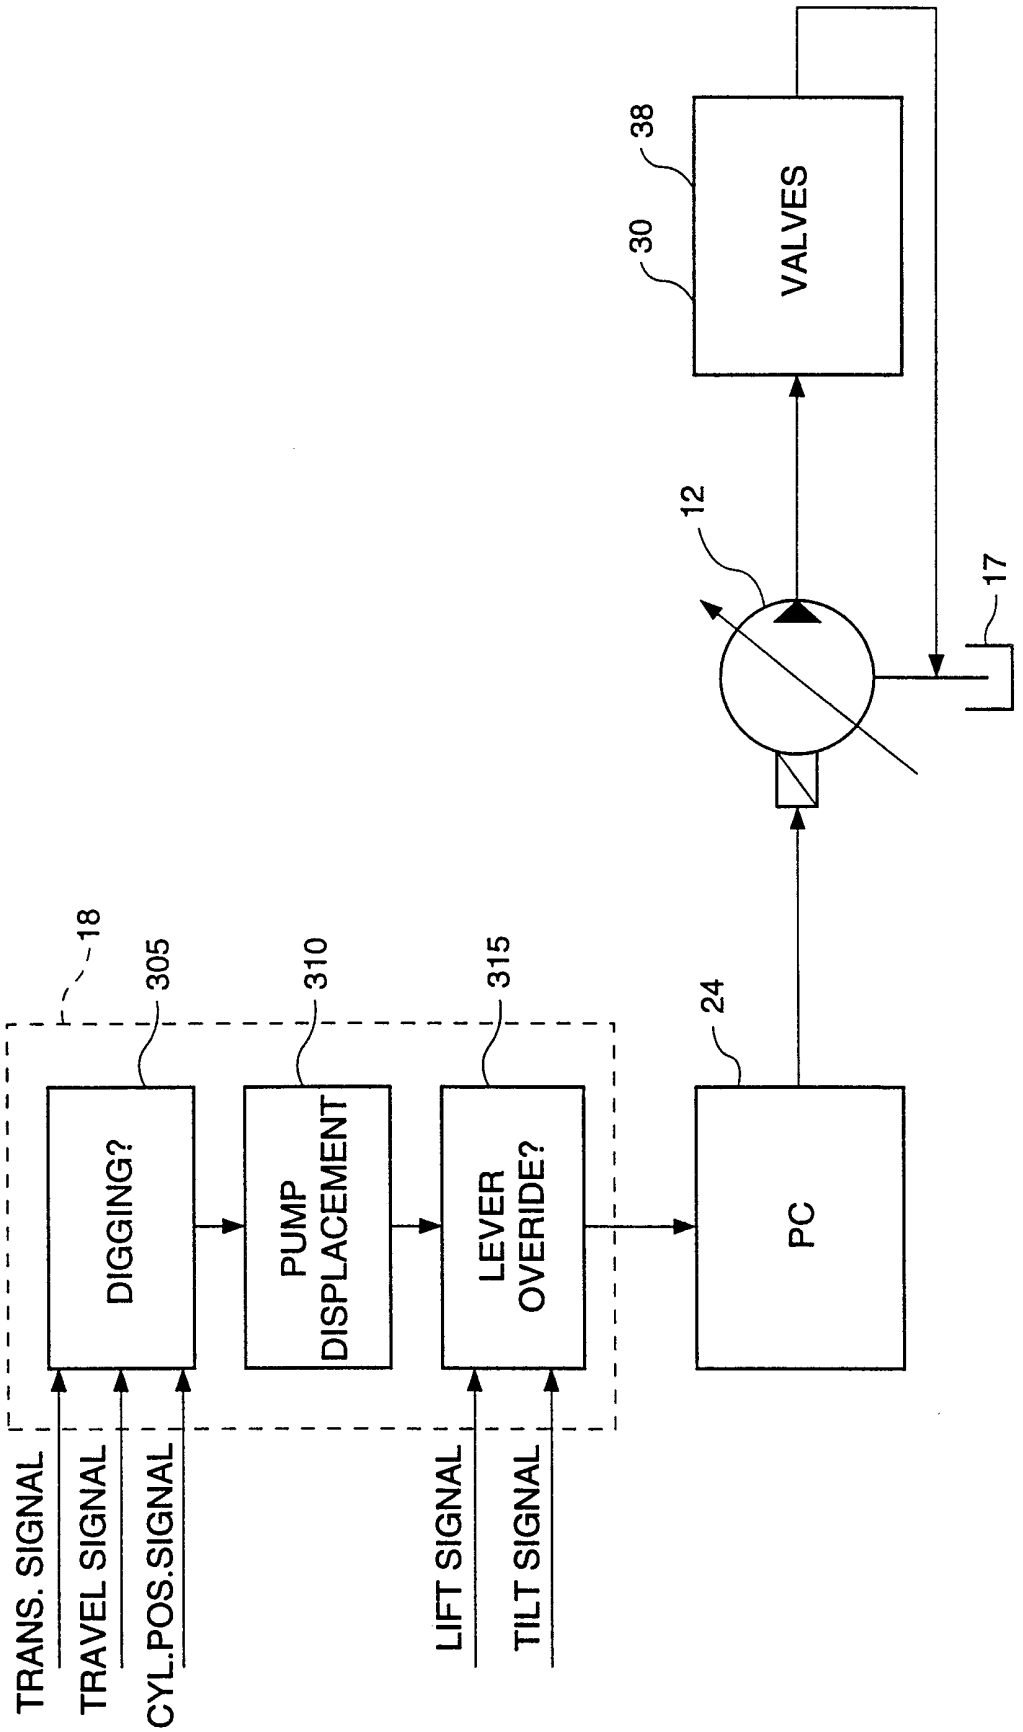

18
305
310
315
24
12
17
38
30
VALVES
DIGGING?
PUMP DISPLACEMENT
LEVER OVERIDE?
PC
TRANS. SIGNAL
TRAVEL SIGNAL
CYL.POS.SIGNAL
LIFT SIGNAL
TILT SIGNAL

Fig-4-

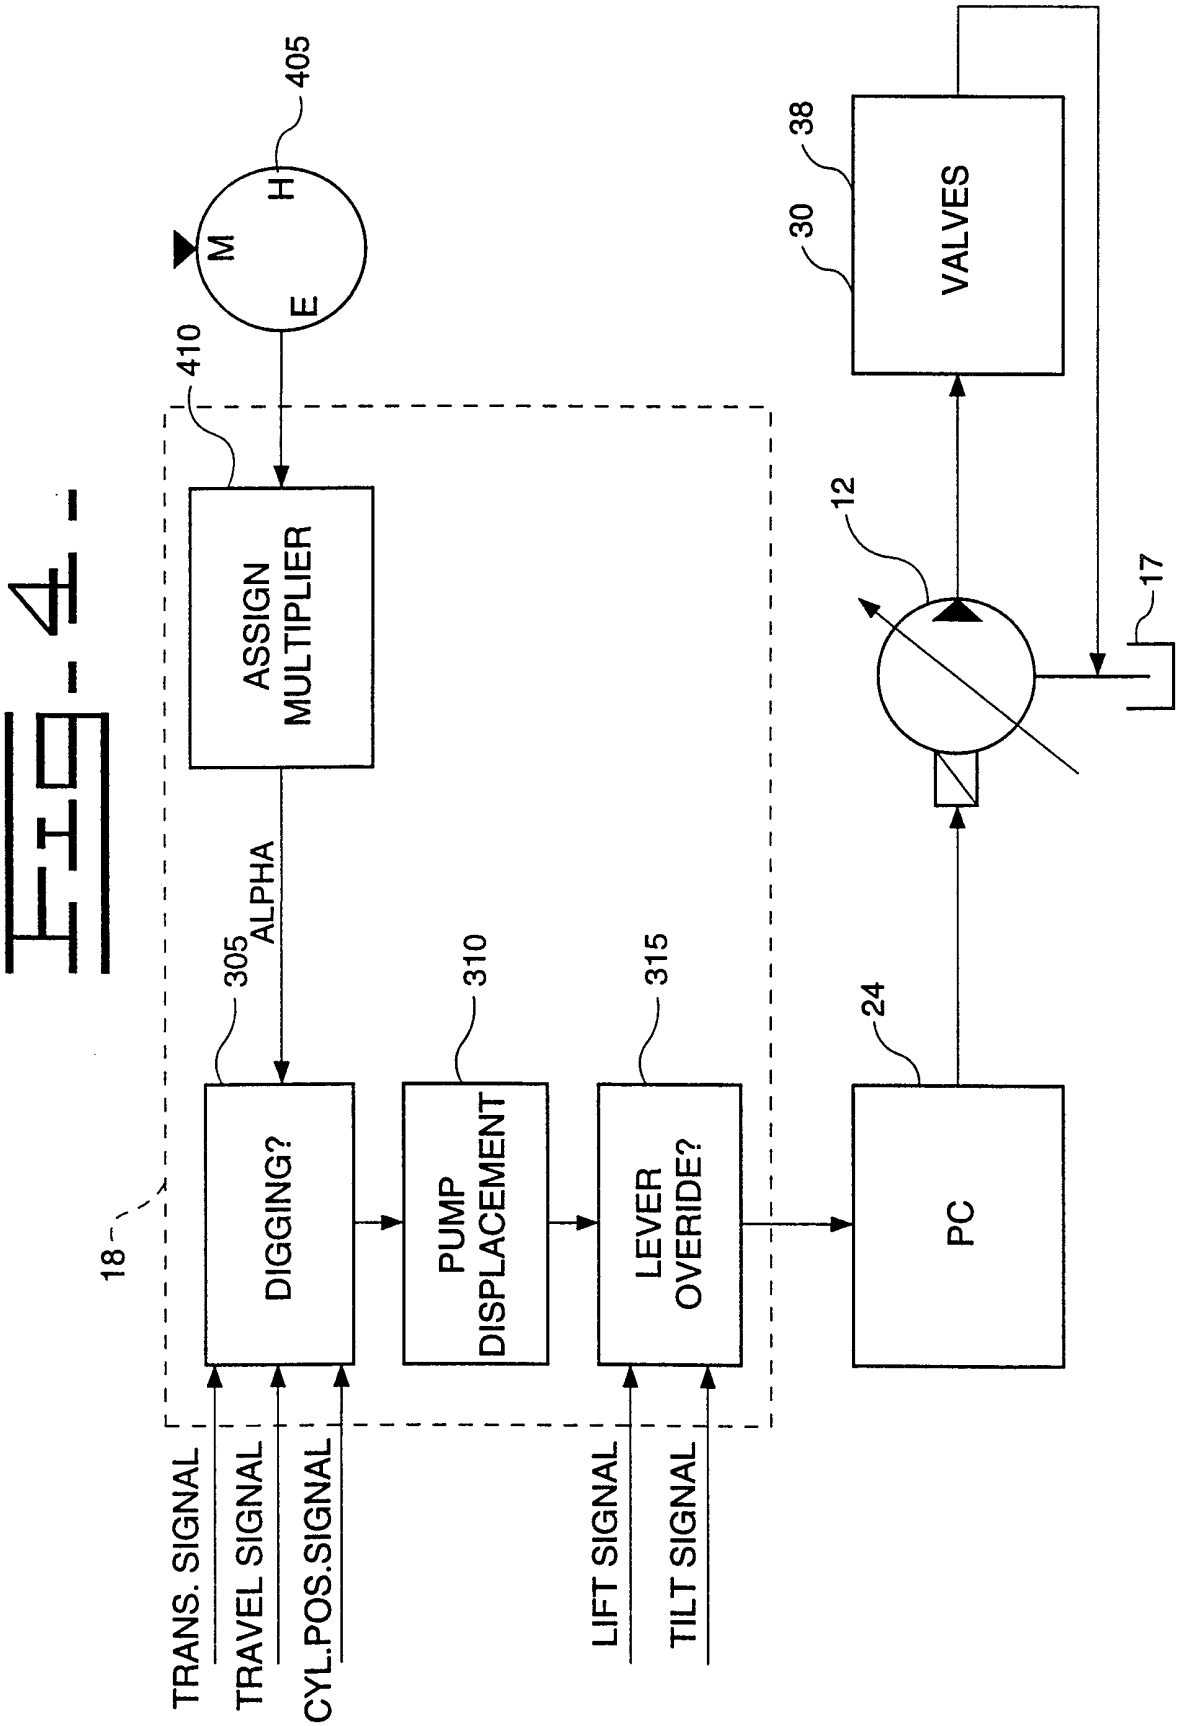
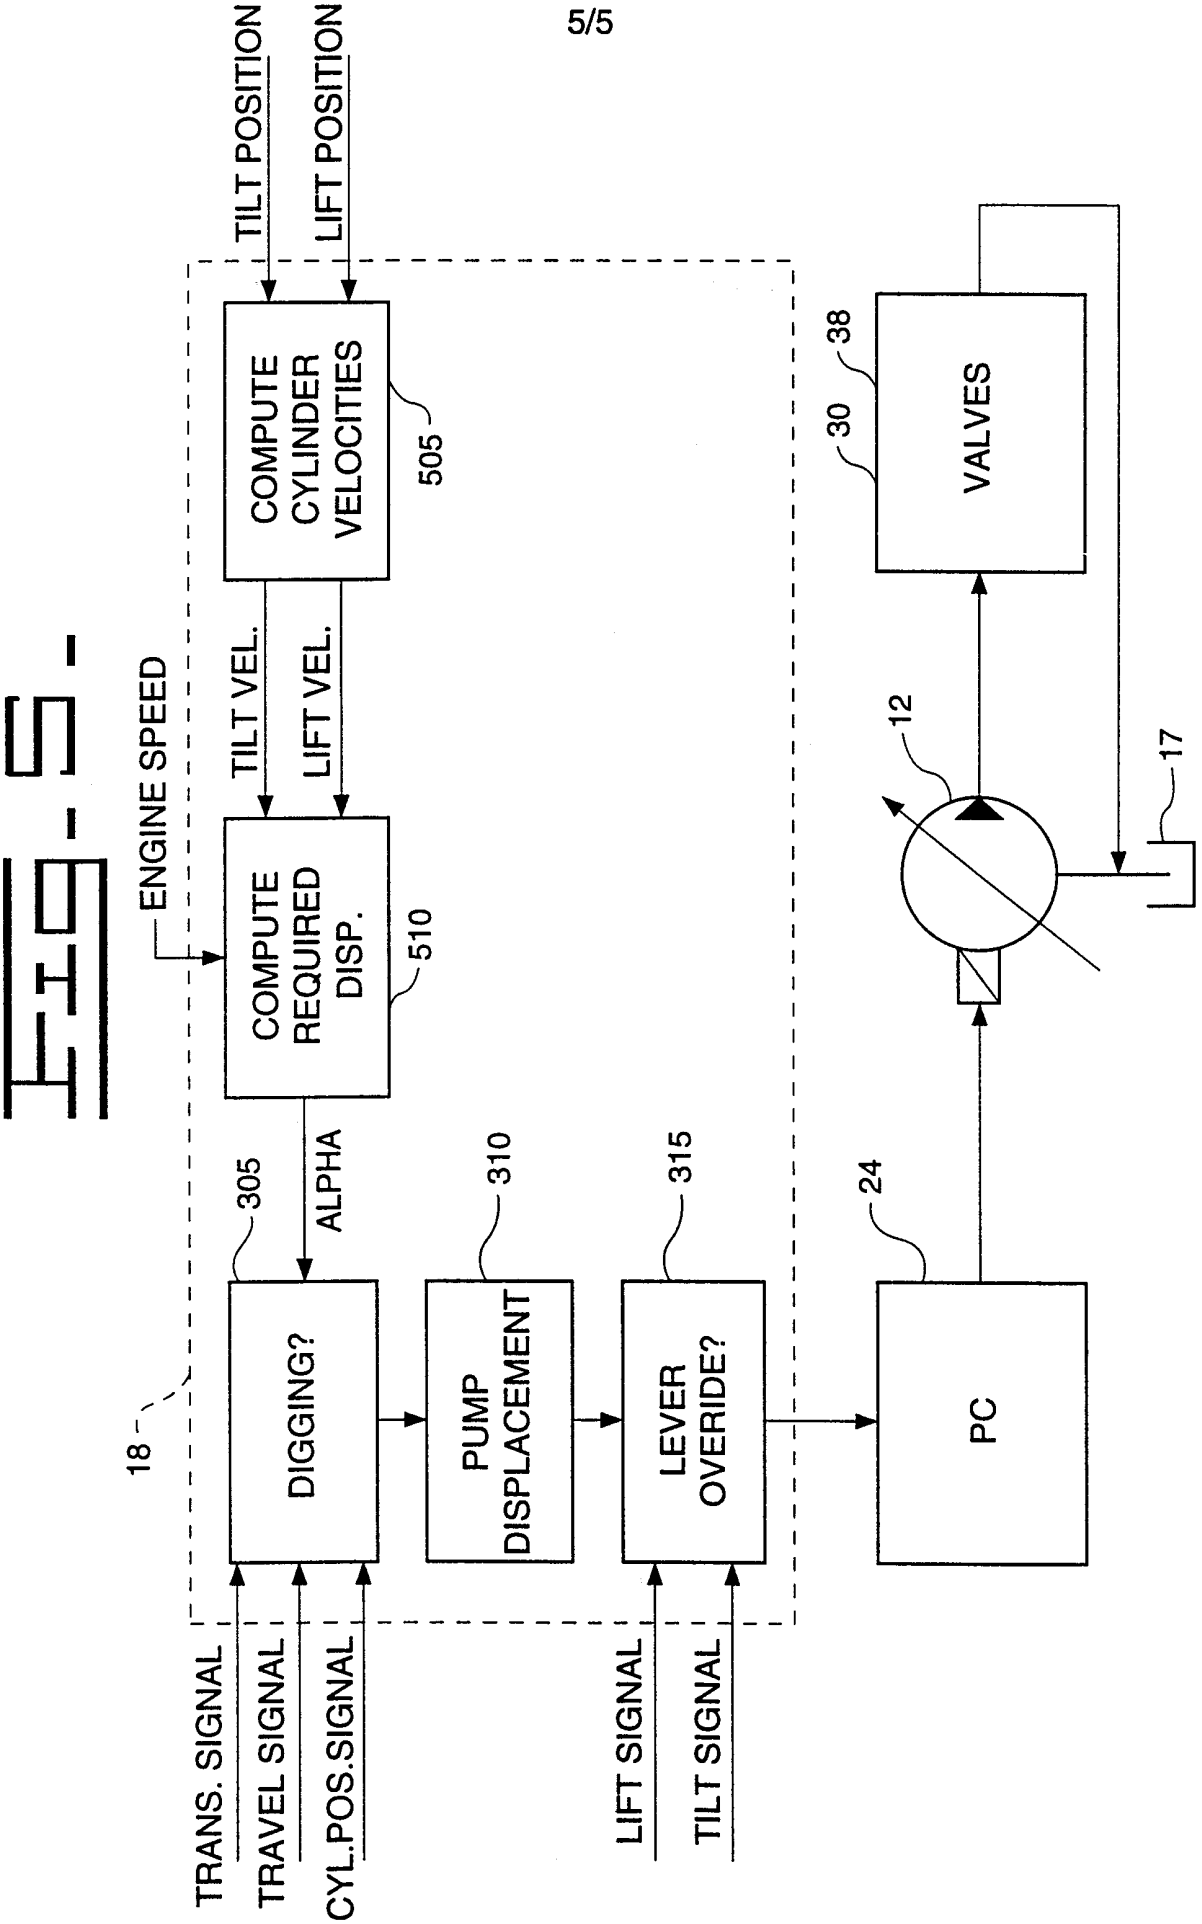

405
H
M
E
410
ASSIGN MULTIPLIER
ALPHA
305
DIGGING?
310
PUMP DISPLACEMENT
315
LEVER OVERIDE?
24
PC
18
TRANS. SIGNAL
TRAVEL SIGNAL
CYL.POS.SIGNAL
LIFT SIGNAL
TILT SIGNAL
12
17
30
38
VALVES

Fig-5-


TILT POSITION
LIFT POSITION
COMPUTE CYLINDER VELOCITIES
505
TILT VEL.
LIFT VEL.
ENGINE SPEED
COMPUTE REQUIRED DISP.
510
ALPHA
305
310
315
24
18
DIGGING?
PUMP DISPLACEMENT
LEVER OVERIDE?
PC
TRANS. SIGNAL
TRAVEL SIGNAL
CYL.POS.SIGNAL
LIFT SIGNAL
TILT SIGNAL
VALVES
38
30
12
17

INTERNATIONAL SEARCH REPORT

Inter..onal Application No
PCT/US 99/07739

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 E02F9/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 E02F F15B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 539 589 A (KOMATSU MEC CORP ;KOMATSU MFG CO LTD (JP)) 5 May 1993 (1993-05-05) claim 1; figure 1 ---	1,6
A	US 5 249 421 A (LUNZMAN STEPHEN V) 5 October 1993 (1993-10-05) claim 1; figures 1,4 ---	1,6
A	EP 0 765 970 A (HITACHI CONSTRUCTION MACHINERY) 2 April 1997 (1997-04-02) claim 1; figures 2,3 ---	1,6
A	EP 0 812 964 A (CATERPILLAR MITSUBISHI LTD) 17 December 1997 (1997-12-17) claim 1; figures 2,3 ---	1,6

-/--

[X] Further documents are listed in the continuation of box C.

[X] Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
19 July 1999	29/07/1999

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Thomas, C

1

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Inter .onal Application No
PCT/US 99/07739

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication,where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 796 952 A (CATERPILLAR MITSUBISHI LTD) 24 September 1997 (1997-09-24) page 7, line 43 - line 47; claim 1; figures 1,2	1,6
A	EP 0 715 031 A (HITACHI CONSTRUCTION MACHINERY) 5 June 1996 (1996-06-05) claims 1,4; figures 1,5	1,6
A	US 5 680 760 A (LUNZMAN STEPHEN V) 28 October 1997 (1997-10-28) claim 1; figures 1,2	1,6

1

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter. .onal Application No
PCT/US 99/07739

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0539589 A	05-05-1993	JP 2520771 B	31-07-1996
		JP 4076126 A	10-03-1992
		DE 69123971 D	13-02-1997
		DE 69123971 T	30-04-1997
		WO 9201869 A	06-02-1992
US 5249421 A	05-10-1993	JP 5248402 A	24-09-1993
EP 0765970 A	02-04-1997	DE 69220293 D	17-07-1997
		DE 69220293 T	22-01-1998
		EP 0522171 A	13-01-1993
		WO 9213144 A	06-08-1992
		JP 2634324 B	23-07-1997
		KR 9700491 B	13-01-1997
		US 5307631 A	03-05-1994
		JP 2651079 B	10-09-1997
		JP 5079502 A	30-03-1993
EP 0812964 A	17-12-1997	JP 10002303 A	06-01-1998
		US 5839279 A	24-11-1998
EP 0796952 A	24-09-1997	CA 2201626 A	09-04-1997
		CN 1166192 A	26-11-1997
		WO 9713929 A	17-04-1997
EP 0715031 A	05-06-1996	DE 69128708 D	19-02-1998
		DE 69128708 T	20-08-1998
		EP 0503073 A	16-09-1992
		WO 9204505 A	19-03-1992
		JP 2656154 B	24-09-1997
		KR 9701723 B	14-02-1997
		US 5267440 A	07-12-1993
US 5680760 A	28-10-1997	JP 10009204 A	13-01-1998