



HU000025390T2

(19) **HU****MAGYARORSZÁG**
Szellemi Tulajdon Nemzeti Hivatala(11) Lajstromszám: **E 025 390**(13) **T2****EURÓPAI SZABADALOM**
SZÖVEGÉNEK FORDÍTÁSA(21) Magyar ügyszám: **E 07 252080**(51) Int. Cl.: **F02D 41/20** (2006.01)(22) A bejelentés napja: **2007. 05. 21.****F02M 51/06** (2006.01)

(96) Az európai bejelentés bejelentési száma:

EP 20070252080

(97) Az európai bejelentés közzétételi adatai:

EP 1860310 A2 **2007. 11. 28.**

(97) Az európai szabadalom megadásának meghirdetési adatai:

EP 1860310 B1 **2015. 08. 12.**

(30) Elsőbbségi adatok:

0610229 **2006. 05. 23.** **GB****0617094** **2006. 08. 30.** **GB**

(73) Jogosult(ak):

Delphi International Operations Luxembourg
S.á r.l., 4940 Bascharage (LU)

(72) Feltaláló(k):

Hopley, Daniel J., Chislehurst, Kent BR7 5EG (GB)**Noyce, Stephen A., Poole, Dorset BH14 9EN (GB)****Almond, Colin, Rochester, Kent ME1 3LR (GB)**

(74) Képviselő:

Mák András, SBGK Szabadalmi Ügyvivői
Iroda, Budapest

(54)

Eljárás tüzelőanyag befecskendező működtetésére

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.



(11) **EP 1 860 310 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
12.08.2015 Bulletin 2015/33

(51) Int Cl.:
F02D 41/20 (2006.01) F02M 51/06 (2006.01)

(21) Application number: **07252080.2**

(22) Date of filing: **21.05.2007**

(54) **Method of operating a fuel injector**

Verfahren zum Betrieb einer Kraftstoffeinspritzdüse

Procédé pour faire fonctionner un injecteur de carburant

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE
SI SK TR**

(30) Priority: **23.05.2006 GB 0610229**
30.08.2006 GB 0617094

(43) Date of publication of application:
28.11.2007 Bulletin 2007/48

(73) Proprietor: **Delphi International Operations
Luxembourg S.à r.l.
4940 Bascharage (LU)**

(72) Inventors:
• **Hopley, Daniel J.
Chislehurst, Kent BR7 5EG (GB)**

• **Noyce, Stephen A.
Poole, Dorset BH14 9EN (GB)**
• **Almond, Colin
Rochester, Kent ME1 3LR (GB)**

(74) Representative: **Neill, Andrew Peter et al
Delphi Diesel Systems
Patent Department
Courteney Road
Gillingham, Kent ME8 0RU (GB)**

(56) References cited:
EP-A- 0 995 899 EP-A- 1 398 487
EP-A- 1 411 239 EP-A- 1 772 952
JP-A- 10 227 249 US-A- 4 784 102
US-A1- 2004 169 436

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

[0001] The invention relates to a method of operating a fuel injector. More specifically, the invention relates to a method of operating a piezoelectrically actuated fuel injector in order to reduce the level of noise that is generated by the injector.

Background to the Invention

[0002] In a direct injection internal combustion engine, a fuel injector is provided to deliver a charge of atomised fuel into a combustion chamber prior to ignition. Typically, the fuel injector is mounted in a cylinder head of an engine with respect to the combustion chamber such that a tip of the injector protrudes slightly into the chamber to permit the fuel charge to be delivered thereto.

[0003] One type of fuel injector that is particularly suited for use in a direct injection engine is a so-called piezoelectric injector. Such an injector allows precise control of the timing of an injection event and of the total volume of fuel that is delivered to the combustion chamber during the injection event. This permits accurate control over the combustion process which is beneficial for fuel efficiency and exhaust emissions.

[0004] A known piezoelectric injector 2 and its associated control system 3 is shown schematically in Figure 1. The piezoelectric injector 2 includes a piezoelectric actuator 4 that is operable to control the position of an injector valve needle 6 relative to a valve needle seat 8. As known in the art, the piezoelectric actuator 4 includes a stack 7 of piezoelectric elements that expands and contracts in dependence on the voltage across the stack 7. The axial position, or 'lift', of the valve needle 6 is controlled by applying a variable voltage 'V' to the piezoelectric actuator 4. Although not shown in Figure 1, it should be appreciated that, in practice, the variable voltage would be applied to the actuator by connecting a power supply plug to the terminals of the injector.

[0005] Through application of an appropriate voltage across the actuator, the valve needle 6 is caused either to disengage the valve seat 8, in which case fuel is delivered into an associated combustion chamber (not shown) through a set of nozzle outlets 10, or is caused to engage the valve seat 8, in which case fuel delivery through the outlets 10 is prevented.

[0006] For further background to the invention, an injector of this type is described in applicant's European Patent No. EP 0955901B. Such fuel injectors can be used in compression-ignition (diesel) engines or spark ignition (petrol) engines.

[0007] By way of further background, EP1398487 describes a control device to drive a set of piezoelectric injectors. The control device applies a voltage pulse to a selected injector that has a DC voltage level in order to activate the injector. The voltage pulse is constituted by

a pulse width modulated voltage waveform.

[0008] In addition, EP0995899 describes a piezoelectric injector that is driven by a DC voltage command pulse. A secondary, excitation, voltage pulse is applied to the injector at the beginning and at the end of the command pulse with the aim of reducing injector voltage oscillation.

[0009] Although piezoelectric injectors are adept at delivering precise quantities of fuel with accurate timing, they also have associated disadvantages. For example, during use, a piezoelectric injector emits vibrations due to the frequency of the drive voltage that is applied to the piezoelectric actuator. The vibrations travel down the injector, or through an injector positioning/clamping arrangement, and are transmitted to the engine. The engine accentuates certain frequencies such that at least a portion of the vibrations can be detected by the human ear.

[0010] At moderate and high engine speeds, the emitted noise of the injectors is drowned out by the combustion noise of the engine. However, at low engine speeds, particularly at an engine idle operating condition and with the bonnet/hood raised, the audible injector noise is apparent. The detectable noise contributes to the overall noise/vibration/harshness (NVH) characteristics of the vehicle.

[0011] The optimisation of NVH characteristics is a significant factor in successful vehicle design since it influences the buying decision of the consumer. It is therefore desirable to reduce the amount of noise emitted by the injector in an effort to reduce the overall level of noise perceived by the user of the vehicle.

Summary of the Invention

[0012] Against this background, the invention provides a method of operating a fuel injector, the injector having a piezoelectric actuator operable by applying a drive pulse thereto, wherein the drive pulse has a frequency domain signature, the method including determining at least one resonant frequency of an injector installation in which the injector is received, in use, and modifying the drive pulse such that a maximum/maxima of the frequency domain signature is remote from or does not coincide with the determined resonant frequency of the injector installation.

[0013] By configuring the drive pulse such that its dominant frequencies are remote from the or each resonant frequency of the injector installation, a substantial reduction in noise is achieved.

[0014] The drive pulse may be defined by a plurality of drive pulse characteristics including a discharge time period, an injector on time period and a peak discharge/charge current amplitude such that the step of modifying the injector drive pulse includes modifying one or more of selected ones of said characteristics.

[0015] In one embodiment, the method may include the steps of receiving a value that represents the demanded fuel volume and determining a tuned injector on

time value by referring to a first data map relating the value to the tuned injector on time value, and using the determined tuned injector on time value for subsequent operation of the injector.

[0016] Further the method may include determining a discharge time period value by referring to a second data map relating the value to the discharge time period value, and determining a peak discharge/charge current amplitude value by referring to a third data map relating the value to the peak discharge/charge current amplitude value. The determined values of discharge time period and peak discharge/charge current amplitude may be used for subsequent operation of the injector.

[0017] In one embodiment, in order to reduce the volume of fuel delivered by the injector during a first series of successive injection events, the method includes reducing the injector on time period to a predetermined injector on time threshold value and, for subsequent reductions in fuel delivery volume, holding the injector on time period substantially constant and thereafter reducing the discharge time period.

[0018] For a subsequent series of successive injection events, the injector on time period may be held substantially constant, the discharge time period may be held substantially constant, and the peak discharge/charge current amplitude may be reduced to a predetermined peak current threshold value in order to further reduce the volume of fuel that is delivered by the injector over the subsequent series of successive injection events.

[0019] In an alternative embodiment, in order to reduce the volume of fuel delivered by the injector during a first series of successive injection events, the method includes reducing the injector on time period to a predetermined injector on time threshold value and, for subsequent reductions in fuel delivery volume, holding the injector on time period substantially constant and thereafter reducing the peak discharge/charge current amplitude to a predetermined peak current threshold value. In this embodiment, for a subsequent series of successive injection events, the injector on time period may be held substantially constant, the peak discharge/charge current amplitude may be held substantially constant, and the discharge time period may be reduced in order to further reduce the volume of fuel that is delivered by the injector.

[0020] In another embodiment, where an injection comprises a plurality of injector drive pulses, for example in the form of first and second pilot drive pulses and a single main drive pulse, the temporal separation between successive drive pulses may be selected so as to modify the frequency domain signature of the drive pulse sequence such that a maximum of the frequency domain signature is remote from the determined resonant frequency of the injector installation. This provides further flexibility in modifying the characteristics of an injection event in order to achieve a reduction in emitted noise.

[0021] In another aspect, the invention provides a computer program product comprising at least one computer

program software portion which, when executed in an executing environment, is operable to implement the method as set forth above.

[0022] In yet another aspect, the invention provides a data storage medium having the or each computer program product stored thereon.

[0023] In another aspect, the invention provides a microcomputer provided with the data storage medium thereon.

[0024] For the purpose of this description and claims, reference to a "series" of injection events should be taken to include one or more injection events.

Brief Description of Drawings

[0025] Reference has already been made to Figure 1 which is a schematic representation of a known piezoelectric injector 2 and its associated control system, including an injector drive circuit. In order that it may be more readily understood, the invention will now be described with reference also to the following figures, in which:

Figure 2 is a circuit diagram of the injector drive circuit in Figure 1;

Figure 3 is a flow chart of a known method of operating the circuit of Figure 2;

Figures 4a, 4b and 4c are state diagrams of charge select, discharge select and injector select switches according to the known control method of Figure 3;

Figures 4d and 4e are profiles of voltage measured across the terminals of the injector and drive current flowing through current sensing means of the injector drive circuit of Figure 1, according the method of Figure 3;

Figure 5a is a drive current profile corresponding to the drive current profile in Figure 4e but filtered at approximately 20 kHz;

Figure 5b is a drive voltage profile corresponding to the drive current profile in Figure 5a;

Figure 5c is a frequency spectrum of the drive current profile of Figure 5a

Figure 6 is a flowchart of a known process that is implemented by the injector control unit in Figure 1;

Figure 7 is a plurality of known drive voltage profiles illustrating a sequential reduction in fuel delivery volume;

Figure 8 is a plurality of drive voltage profiles illustrating a sequential reduction in fuel delivery volume

in accordance with a first embodiment of the invention;

Figure 9 is a flowchart of a process according to the first embodiment of the invention that may be implemented by the injector control unit in Figure 1;

Figure 10 is a graph comparing a known drive voltage profile with a drive voltage profile in accordance with a second embodiment of the invention;

Figure 11 shows drive current profiles corresponding to the drive voltage profiles of Figure 10;

Figure 12a and Figure 12b are graphs of needle lift and fuel delivery rate corresponding to the drive voltage profiles and drive current profiles of Figures 10 and 11;

Figure 13 is a drive voltage profile of a third embodiment of the invention; and

Figure 14 is a frequency domain diagram associated with the drive voltage profile of Figure 13.

Detailed Description

[0026] Referring again to Figure 1, the piezoelectric injector 2 is controlled by an injector control unit 20 (hereinafter 'ICU') that forms an integral part of an engine control unit 22 (ECU). The ECU 22 monitors a plurality of engine parameters 24 and calculates an engine power requirement signal (not shown) which is input to the ICU 20. In turn, the ICU 20 calculates a required injection event sequence to provide the required power for the engine and operates an injector drive circuit 26 accordingly. The injector drive circuit 26 is also shown as integral to the ECU 22, although it should be appreciated that this is not essential to the invention.

[0027] In order to initiate an injection, the injector drive circuit 26 causes the differential voltage between the high and low voltage terminals of the injector, V_1 and V_2 , to transition from a high voltage (typically 200 V) at which no fuel delivery occurs, to a relatively low voltage (typically -30 V), which reduces the voltage of the piezoelectric actuator 4 and therefore initiates fuel delivery. An injector responsive to this drive waveform is referred to as a 'de-energise to inject' injector and is operable to deliver one or more injections of fuel within a single injection event. For example, the injection event may include one or more so-called 'pre-' or 'pilot' injections, a main injection, and one or more 'post' injections. In general, several such injections within a single injection event are preferred to increase combustion efficiency of the engine.

[0028] Referring also to Figure 2, the injector drive circuit 26 includes an injector charge/discharge switching circuit 30 (hereinafter 'switching circuit') that is connected

to an injector bank circuit 32 so as to control the voltage applied to a high side voltage input V_1 and a low side voltage input V_2 of the bank circuit 32.

[0029] The injector bank circuit 32 includes first and second branches 40, 42 both of which are connected in parallel between the high and low side voltage inputs V_1 and V_2 . Each branch 40, 42 includes a respective injector INJ1, INJ2 and injector select switch QS1, QS2 by which means either one of the injectors can be selected for operation, as will be described later. It should be mentioned at this point that the piezoelectric actuator 4 of each injector 2 is considered electrically equivalent to a capacitor, the voltage difference between V_1 and V_2 determining the amount of electrical charge stored by the actuator and, thus, the position of the injector valve needle 8.

[0030] The switching circuit 30 includes three input voltage rails: a high voltage rail V_{HI} (typically 230 V), a mid voltage rail V_{MID} (typically 30 V) and a ground connection GND. The switching circuit 30 is operable to connect the high side voltage input V_1 of the injector bank circuit to either the high voltage rail V_{HI} or the ground connection GND by means of first and second switches Q1, Q2 to which the injector bank 32 is connected, through an inductor L.

[0031] The switching circuit 30 is also provided with a diode D1 that connects the high side voltage input V_1 of the bank circuit 32 to the high voltage rail V_{HI} . The diode D1 is oriented to permit current to flow from the high side input V_1 of the bank circuit 32 to the high voltage rail V_{HI} but to prevent current flow from the high voltage rail V_{HI} to the high side voltage input V_1 of the bank circuit 32.

[0032] The first switch Q1, when activated, connects the high side input V_1 of the selected injector to the ground connection GND via the inductor L. Therefore, charge from the injector is permitted to flow from the selected injector, through the inductor L and the first switch Q1 to the ground connection GND, thereby serving to discharge the selected injector during an injector discharge phase. Hereinafter, the first switch will therefore be referred to as the 'discharge select switch' Q1. A diode D_{Q1} is connected across the second switch Q2 and is oriented to permit current to flow from the inductor L to the high voltage rail V_{HI} when the discharge select switch Q1 is deactivated, thus guarding against voltage peaks across the inductor L.

[0033] In contrast, the second switch Q2, when activated, connects the high side input V_1 of the selected injector to the high voltage rail V_{HI} via the inductor L. In circumstances where the or each injector is discharged, activating the second switch Q2 causes charge to flow from the high voltage rail V_{HI} , through the second switch Q2 and the inductor L, and into the injector, during an injector charge phase, until an equilibrium voltage is reached (the point at which the voltage due to charge stored by the actuator equals the voltage difference between the high side and low side voltage inputs V_1 , V_2). Hereinafter, the second switch will be referred to as the

'charge select switch' Q2.

[0034] A diode D_{Q2} is connected across the discharge select switch Q1 and is oriented to permit current to flow from the ground connection GND through the inductor L to the high side input V1 when the charge select switch Q2 is deactivated, thus guarding against voltage peaks across the inductor L.

[0035] It should be appreciated that the inductor L constitutes a bidirectional current path since current flows in a first direction through the inductor L during the discharge phase and in a second, opposite direction during the injector charge phase.

[0036] The low side voltage input V2 of the injector bank circuit 32 is connected to the mid voltage rail V_{MID} via a voltage sense resistor 44. A current sensing and comparator means 50 (hereinafter 'comparator module') is connected in parallel with the sense resistor 44 and is operable to monitor the current flowing therethrough. In response to the current flowing through the resistor 44, the comparator module 50 outputs a control signal 52 (hereafter $Q_{CONTROL}$) that controls the activation status of the discharge select switch Q1 and the charge select switch Q2 so as to regulate the peak current flowing out of, or into, the operating injector. In effect, the comparator module 50 controls the activation status of the switches Q1 and Q2 to 'chop' the injector current between maximum and minimum current limits and achieve a predetermined average charge or discharge current. By this means, a high degree of control is afforded over the amount of electrical charge that is transferred off of the stack 7 during a discharge phase and, conversely, onto the stack 7 during a charge phase.

[0037] The operation of the injector drive circuit 26 during a typical discharge phase, followed by a charge phase, is described below with reference to Figure 3 and Figures 4a to 4e.

[0038] Initially, prior to time T_0 , the injector drive circuit 26 is at equilibrium, that is to say both injectors INJ1 and INJ2 are fully charged such that no fuel injection is taking place. In these circumstances, the ICU 20 is in a wait state, indicated at step 100, awaiting an injection command signal from the ECU 22.

[0039] Following receipt of an injection command from the ECU 22 at step 102, the ICU 20 selects the injector that it is required to operate at step 104. For the purposes of this description, the selected injector is the first injector, INJ1. At substantially the same time, the ICU 20 initiates the discharge phase by enabling the discharge select switch Q1 so as to cause the injector INJ1 to discharge. A predetermined average discharge current through the injector is ensured by the comparator module 50 outputting the $Q_{CONTROL}$ signal between T_0 and T_1 to repeatedly deactivate and reactivate the discharge select switch Q1 such that the current remains within predetermined limits.

[0040] The ICU 20 applies the predetermined average discharge current to the stack for a period of time (from T_0 to T_1) sufficient to transfer a predetermined amount

of charge off of the stack (it should be appreciated that the discharge phase timings are read from a timing map by the ICU 20).

[0041] At time T_1 (step 106), the ICU 20 deactivates the first injector select switch QS1 and disables the discharge select switch Q1, thus terminating the control signal $Q_{CONTROL}$, to prevent the injector discharging further. Thus during the time period T_0 to T_1 the stack voltage drops from a charged voltage level V_{CHARGE} to a discharged voltage level $V_{DISCHARGE}$, as indicated in Figure 4d.

[0042] At step 108, the ICU 20 maintains the injector INJ1 at the discharged voltage level $V_{DISCHARGE}$ for a predetermined dwell period, T_1 to T_2 , such that the injector valve needle 8 is held open to perform an injection event. At the end of the dwell period, at step 110, the ICU 20 enables the charge select switch Q2 in order to start the injector charge phase so as to terminate injection. As a result, the high side voltage input V1 of the injector bank circuit 32 is connected to the high voltage rail V_{HI} and charge begins to transfer into the injector INJ1.

[0043] As the current flowing into the injector increases, the comparator module 50 monitors the current flowing through the sense resistor 44 and controls the activation status of the charge select switch Q2, via the control signal $Q_{CONTROL}$ to ensure a predetermined average charging current level. Between time T_2 and T_3 the ICU 20 applies the predetermined average charging current to the stack for a period of time sufficient to transfer a predetermined amount of charge onto the stack. At time T_3 (step 112), the ICU 20 disables the charge select switch Q2 and returns to the waiting step 100 ready for initiation of another injection event.

[0044] Figures 5a and 5b show the principle characteristics of an injector drive current profile and a drive voltage profile as described above. In Figure 5a, the drive current profile is substantially identical to that shown in Figure 4d, but is filtered at 20kHz that represents an upper threshold of the frequency response of the piezoelectric actuator 4. In practice, the chopping frequency that is applied to the piezoelectric actuator is in the order of 500kHz although this is too high to result in movement of the piezoelectric actuator at a similar frequency.

[0045] The injector drive pulse is defined by the following characteristics:

- i) a discharge pulse time ($T_{DISCHARGE}$)
- ii) a charge pulse time (T_{CHARGE})
- iii) an 'injector on time' (T_{ON}) i.e. the interval between the start of stack discharge and the start of stack charge
- iv) a positive peak current amplitude ($+I_{PEAK}$)
- v) a negative current amplitude ($-I_{PEAK}$)

[0046] In order to vary the power output of the engine, it is necessary to vary the quantity of fuel that is delivered to the combustion chambers of the engine during each injection event. It is known for the ICU 20 to perform this

function by varying the value of injector on time T_{ON} , which is the sum of the discharge pulse time $T_{DISCHARGE}$ and a dwell period defined between the end of the discharge phase and the start of the charge phase.

[0047] Referring to Figure 6, at step 120 the ICU 20 receives data relating to the prevailing operating conditions of the engine: for example, engine speed, common rail fuel pressure, outside air temperature and the like. Then, at step 122, the ICU 20 receives data relating to the power requirement of the engine, such data being derived directly or indirectly from the accelerator pedal position of the vehicle. Following the acquisition of the vehicle data at steps 120 and 122, the ICU 20 calculates, at step 124, the value of injector on time T_{ON} that will provide the correct fuel delivery volume to generate the required power output from the engine by referring to one or more data maps stored in the memory of the ICU 20. At step 126, the ICU 20 operates the injector drive circuit 26 according to the calculated value of T_{ON} .

[0048] Figure 7 shows a series of drive voltage profiles 140, 142, 144, 146, 148 and 150 (hereinafter 'drive pulses') that correspond to successively reduced fuel delivery volumes as calculated by the above described process implemented by the ICU 20.

[0049] For the drive pulses 140, 142 and 144, the discharge time $T_{DISCHARGE}$ is at a maximum value $T_{DISCHARGE_MAX}$ such that the injector is discharged by a maximum permitted value which is defined internally by the ICU 20. Therefore, a reduction in injector on time results in a reduction of the dwell period T_{DWEELL} from the maximum dwell period T_{DWEELL_MAX} corresponding to drive voltage profile 140, towards the minimum permitted dwell period T_{DWEELL_MIN} corresponding to drive voltage profile 144. It should be appreciated that the minimum dwell period T_{DWEELL_MIN} is a constraint imposed by the injector drive circuit 26 to ensure that electrical switching between a discharge phase and a charge phase can occur without causing damage to the injector drive circuit or the injector.

[0050] In order to reduce the fuel delivery volume further, the ICU 20 holds the dwell period constant at the minimum value T_{DWEELL_MIN} and reduces the discharge time period $T_{DISCHARGE}$ as can be seen by drive pulses 146, 148 and 150.

[0051] The inventors have now recognised that the drive pulse that is applied to the injector has a corresponding frequency domain signature that includes at least one maximum F_{MAX} and at least one minimum F_{MIN} , as is indicated in an exemplary manner in Figure 5c. It has been recognised that at certain delivery volumes, particularly at engine idle operating conditions, the characteristics of the frequency domain signature arising from a given drive pulse are such that the dominant frequencies of the drive pulse coincide closely with the resonant frequency of the apparatus (e.g. the engine) in which the injector is installed. In accordance with the invention, therefore, the characteristics of the drive pulse are modified in order to adapt the frequency domain signature

thereof. In this way, the frequency domain signature of the drive pulse may be 'tuned' so that the energy peaks of the drive pulse are remote from and do not coincide with the resonant frequencies for a particular engine installation. The benefit of this invention is that a reduction in the amount of noise that is emitted from the injector is achieved.

[0052] This invention is particularly applicable to circumstances in which the injector is driven to perform injection events in which a relatively small amount of fuel is delivered to an associated combustion chamber, for example a pilot injection or a main injection during an engine idle condition. It is during these engine operating conditions that the mechanical and combustion noise of the engine is relatively quiet such that the noise generated by the injectors is most noticeable.

[0053] A first embodiment of the invention will now be described with reference to Figure 8. In this embodiment, for injection events in which a relatively high volume of fuel is required to be delivered, for example during medium to high engine load conditions, the ICU 20 modifies the delivery volume by increasing or decreasing the injector on time appropriately, as can be seen on Figure 8 by the injector drive pulses 200, 202 and 204 having successively decreasing values of injector on time T_{ON_1} , T_{ON_2} and T_{ON_3} .

[0054] The dwell time for the drive pulse 204 represents the minimum dwell time as imposed by the switching requirements of the injector drive circuit 26. In order to decrease the delivery volume further, the dwell time must remain at this value so further reduction of injector on time results in the reduction of the discharge time $T_{DISCHARGE}$, as can be seen by the drive pulses 206, 208 and 210 having injector on times of T_{ON_4} , T_{ON_5} and T_{ON_6} , respectively.

[0055] It should be noted that for each of the injector drive pulses 200, 202, 204, 206, 208 and 210, the peak discharge current $+I_{PEAK}$ remains constant at a value I_1 such that the gradient of the discharge slope remains substantially constant.

[0056] Up to this point, the way in which the fuel delivery volume is reduced is the same as that described with reference to Figures 6 and 7. However, the inventors have recognised that injector noise is particularly severe below a threshold of injector on time, more specifically approximately $200\mu s$, which is shown on Figure 8 as T_{ON_6} .

[0057] It has been observed that injector noise at injector on time values below the threshold of T_{ON_6} is more severe because the reciprocal of the injector on time value is approximately equal to the resonant frequency of the injector installation i.e. the engine in which the injector is received, in use.

[0058] Therefore, in order to reduce the delivery volume below that which is achievable at the first threshold, the ICU 20 holds the injector on time constant (at T_{ON_6}) and reduces the peak current amplitude that is applied to the actuator during the discharge phase of an injection.

On Figure 8, this can be seen by the injector drive pulses 212, 214, 216 and 218 having successively reduced discharge gradients I_2 , I_3 , I_4 and I_5 , respectively. It should be noted that for each of the injector drive pulses 212, 214, 216 and 218 the injector discharge time period remains substantially constant at $T_{DISCHARGE_1}$.

[0059] However, it is not possible to reduce the value peak current amplitude indefinitely since too low a value may adversely affect the fuel delivery rate. Due to the limited range within which it is possible to reduce the value of $+I_{PEAK}$, if it required to further reduce the total volume of fuel delivered during an injection event, the ICU 20 reduces the discharge pulse time $T_{DISCHARGE}$. This is shown on Figure 8 by the drive voltage profiles 220, 222 and 224 having successively reduced injector discharge time periods $T_{DISCHARGE_2}$, $T_{DISCHARGE_3}$ and $T_{DISCHARGE_4}$. It should be noted that for the drive voltage profiles 220, 222 and 224 the values of injector on time and peak current amplitude remain at their minimum threshold values T_{ON_6} and I_5 as has been described above.

[0060] The drive pulse 224 represents the maximum dwell period that is possible for small values of needle lift in order to avoid injection instabilities. Therefore, in order to further reduce the fuel delivery volume, the ICU 20 holds the dwell period constant and reduces the discharge time period further as shown by drive pulses 226 and 228.

[0061] Referring to Figure 9, which represents the process carried out by the ICU 20 to implement this embodiment, at step 240 the ICU 20 receives data relating to the prevailing operating conditions of the engine: for example engine speed, common rail fuel pressure, outside air temperature and the like. At step 242 the ICU 20 receives data relating to the power requirement of the engine, such data being derived directly or indirectly from the accelerator pedal position of the vehicle. Following the acquisition of the vehicle data at steps 240 and 242, the ICU 20 calculates, at step 244, the value of injector on time T_{ON} (hereinafter T_{ON_DEMAND}) that will provide the correct fuel delivery volume to generate the required power output from the engine by referring to one or more data maps stored in the memory of the ICU 20. However, instead of using the value of T_{ON_DEMAND} directly to operate the injector drive circuit 26, as is consistent with the known method of controlling the injector as described above with reference to Figure 6, the ICU 20 inputs the calculated value of T_{ON_DEMAND} into three further functional modules represented by steps 246, 248 and 250.

[0062] At step 246, the ICU 20 refers to a first data map stored in its memory to calculate a tuned or revised value of injector on time (hereinafter T_{ON_TUNED}) based on the value of T_{ON_DEMAND} and data relating to common rail fuel pressure. The data map relates values of T_{ON_DEMAND} to T_{ON_TUNED} to select a value for T_{ON_TUNED} which takes into account the effects of the resonant frequency of the injector installation.

[0063] At step 248, the ICU 20 refers to a second data

map stored in its memory to calculate a revised value of discharge time (hereinafter $T_{DISCHARGE_TUNED}$) based on the value of T_{ON_DEMAND} and data relating to common rail fuel pressure. The second data map relates values of T_{ON_DEMAND} to $T_{DISCHARGE_TUNED}$ to select a value for $T_{DISCHARGE_TUNED}$ which gives the required fuel volume delivery in conjunction with T_{ON_TUNED} .

[0064] At step 250, the ICU 20 refers to a third data map stored in its memory to calculate a revised value of peak discharge current (hereinafter I_{TUNED}) based on the value of T_{ON_DEMAND} and data relating to common rail fuel pressure. The third data map relates values of T_{ON_DEMAND} to I_{TUNED} to select a value for I_{TUNED} which takes into account the amplitude of the resonant frequency of the injector installation.

[0065] The values of T_{ON_TUNED} , $T_{DISCHARGE_TUNED}$ and I_{TUNED} are thereafter used by the ICU 20 at step 252 to operate the injector via the injector drive circuit 26 to give the demanded fuel delivery. The tuned injector on time T_{ON_TUNED} , the tuned discharge time $T_{DISCHARGE_TUNED}$, and the tuned current I_{TUNED} , therefore all contribute to the fuelling.

[0066] The first, second and third data maps are determined in an off line environment. The characteristics of the drive pulse are modified in steps 246, 248 and 250 in real time to ensure that the frequency composition of the drive pulse does not include energy peaks that reside in frequency bands consistent with the resonant frequencies of the injector installation.

[0067] Figures 10 and 11 show a second embodiment of the invention which is a specific implementation of the tuned drive pulse concept described above. In Figure 10, a drive pulse 300 is shown for a typical injection event that corresponds approximately to a medium engine load operating condition. As can be seen, the injector is discharged from a starting voltage level V1 to a predetermined voltage level V2 at which point the voltage remains for a significant dwell period before the injector is recharged back to the starting voltage level V1 to terminate the injection event.

[0068] Also shown in Figure 10 is a typical drive pulse 302 that corresponds to a low engine load operating condition, for example when the engine is running at idle. As can be seen, the injector is discharged from the starting voltage level V1 at the same rate as for the drive pulse 300, but to a voltage level V3 which is greater than V2. The voltage remains at V3 for a very short dwell period, which is the minimum permissible dwell period as required by the switching characteristics of the injector drive circuit 26, before being recharged to the starting voltage V1. A drive current profile 304 that corresponds to the drive pulse 302 is shown in Figure 11. The drive current profile 304 has an injector on time period of T_{ON_A} and a discharge time period of $T_{DISCHARGE_A}$.

[0069] A drive pulse 306 for an 'engine idle' operating condition that is modified in accordance with the second embodiment of the invention is also shown in Figure 10 and the corresponding drive current profile 308 is shown

in Figure 11. The modification involves employing a less aggressive drive pulse in order to ameliorate the audible noise emissions of the injector at low engine loads. As can be seen, the injector is discharged at the same rate as the drive pulses 300 and 302 to avoid a reduction in initial rate of fuel injection. However, the discharge time period of the drive pulse 206 (shown as $T_{\text{DISCHARGE_B}}$ on Figure 11) is significantly shorter than the discharge time period $T_{\text{DISCHARGE_A}}$ for the drive pulse 302, the dwell time has been increased and the injector on time period $T_{\text{ON_B}}$ has been increased. As a result, the injector is discharged to a lower magnitude voltage V_4 , which reduces the axial displacement of the injector valve needle, but the total time for which the injector valve needle is disengaged from its seat is increased.

[0070] The effect of the modified drive voltage profile can be seen from Figures 12a and 12b, which show injector valve needle lift profiles (needle lift A and needle lift B) and delivery rate profiles (delivery rate A and delivery rate B) for each of the drive pulses 302, 306 respectively, of Figure 10.

[0071] In Figure 12a, needle lift A corresponds to the drive voltage profile 302 that is known for an engine idle operating condition and shows the injector valve needle lifting rapidly to reach its maximum lift and then lowering substantially immediately. Referring to the delivery rate A in Figure 12b, the peak delivery rate is relatively high but the delivery time is relatively short.

[0072] In contrast needle lift B, which corresponds to the drive voltage profile 306 modified in accordance with the second embodiment of the invention, includes a relatively low peak lift but the injector valve needle remains open for a longer period of time. Similarly, the corresponding delivery rate B in Figure 13b has a lower peak delivery rate than delivery rate A but continues for a comparatively long period of time.

Claims

1. A method of operating a fuel injector (2) having a piezoelectric actuator (4) operable by applying a drive pulse thereto, wherein the drive pulse has a frequency domain signature, the method including; determining at least one resonant frequency of an injector installation in which the injector (2) is received, in use; and modifying the drive pulse such that a maximum of the frequency domain signature thereof is remote from the determined resonant frequency of the injector installation.
2. The method of claim 1, wherein the drive pulse is defined by two or more drive pulse characteristics including a discharge time period ($T_{\text{DISCHARGE}}$), an injector on time period (T_{ON}), and a peak discharge/charge current amplitude (I), wherein the step of modifying the injector drive pulse includes

modifying one or more selected ones of said drive pulse characteristics.

3. The method of claim 2, wherein, in order to reduce the volume of fuel delivered by the injector (2) during a first series of successive injection events, the method includes reducing the injector on time period (T_{ON}) to a predetermined injector on time threshold value ($T_{\text{ON_6}}$) and, for subsequent reductions in fuel delivery volume, holding the injector on time period substantially constant and thereafter reducing the discharge time period ($T_{\text{DISCHARGE}}$).
4. The method of claim 3, wherein, for a subsequent series of successive injection events, the method further includes holding the discharge time period ($T_{\text{DISCHARGE}}$) substantially constant and reducing the peak discharge/charge current amplitude (I) to a predetermined peak current threshold value (I_5).
5. The method of claim 2, wherein, in order to reduce the volume of fuel delivered by the injector (2) during a first series of successive injection events, the method includes reducing the injector on time period (T_{ON}) to a predetermined injector on time threshold value ($T_{\text{ON_6}}$) and, for subsequent reductions in fuel delivery volume, holding the injector on time period (T_{ON}) substantially constant and thereafter reducing the peak discharge/charge current amplitude (I) to a predetermined peak current threshold value (I_5).
6. The method of claim 5, wherein, for a subsequent series of successive injection events, the method further includes holding the injector on time period substantially constant at the predetermined injector on time threshold value ($T_{\text{ON_6}}$), holding the peak discharge/charge current amplitude at the predetermined peak current threshold value (I_5), and reducing the discharge time period ($T_{\text{DISCHARGE}}$) in order to further reduce the volume of fuel delivered by the injector (2), in use.
7. The method of claim 2, including receiving a value ($T_{\text{ON_DEMAND}}$) that represents the demanded fuel volume and determining a tuned injector on time value ($T_{\text{ON_TUNED}}$) by referring to a first data map relating the value ($T_{\text{ON_DEMAND}}$) to the tuned injector on time value ($T_{\text{ON_TUNED}}$), and using the determined tuned injector on time value ($T_{\text{ON_TUNED}}$) for subsequent operation of the injector (2).
8. The method of claim 7, further including determining a discharge time period value ($T_{\text{DISCHARGE_TUNED}}$) by referring to a second data map relating the value ($T_{\text{ON_DEMAND}}$) to the discharge time period value ($T_{\text{DISCHARGE_TUNED}}$), and using the determined discharge time period value ($T_{\text{DISCHARGE_TUNED}}$) for subsequent operation of the injector (2).

9. The method of claim 7 or claim 8, further including determining a peak discharge/charge current amplitude value (I_{TUNED}) by referring to a third data map relating the value ($T_{\text{ON_DEMAND}}$) to the peak discharge/charge current amplitude value (I_{TUNED}), and using the determined peak discharge/charge current amplitude value (I_{TUNED}) for subsequent operation of the injector (2).

10. A method of operating a fuel injector (2) having a piezoelectric actuator (4), the method comprising:

determining at least one resonant frequency of an injector installation in which the injector (2) is received, in use,
applying a drive pulse (400) to the actuator (4), the drive pulse comprising first, second and third injection drive pulses (402, 404, 406) and having a frequency domain signature; and
selecting a separation time period between the first injection drive pulse (402) and the second injection drive pulse (404) and/or a separation time period between the second injection drive pulse (404) and the third injection drive pulse (406) so as to modify the frequency domain signature of the drive pulse such that a maximum of the frequency domain signature is remote from the determined resonant frequency of the injector installation.

11. A computer program product comprising at least one computer program software portion which, when executed in an executing environment, is operable to implement the method of any one of claims 1 to 10.

12. A data storage medium having the or each software portion of claim 11 stored thereon.

13. A microcomputer provided with the data storage medium of claim 12 thereon.

Patentansprüche

1. Verfahren zum Betrieb einer Kraftstoffeinspritzdüse (2) mit einem piezoelektrischen Aktuator (4), der betriebsfähig ist durch darauf Anwenden eines Antriebspulses, wobei der Antriebspuls eine Frequenzdomänesignatur hat, wobei das Verfahren umfasst:

Bestimmen zumindest einer Resonanzfrequenz einer Einspritzdüse-Installation, in der die Einspritzdüse (2) aufgenommen ist, in Betrieb; und
Modifizieren des Antriebspulses derart, dass ein Maximum der Frequenzdomänesignatur von diesem von der bestimmten Resonanzfrequenz der Einspritzdüse-Installation entfernt ist.

2. Das Verfahren gemäß Anspruch 1, wobei der Antriebspuls durch zwei oder mehr Antriebspulscharakteristiken definiert wird, einschließlich einer Entladungszeitdauer ($T_{\text{DISCHARGE}}$), einer "Einspritzdüse ein"-Zeitdauer (T_{ON}), und einer Spitze-Entladungs/Ladungs-Stromamplitude (I), wobei der Schritt des Modifizierens des Einspritzdüse-Antriebspulses ein Modifizieren einer oder mehrerer ausgewählter der Antriebspulscharakteristiken umfasst.

3. Das Verfahren gemäß Anspruch 2, wobei, um das Volumen von Kraftstoff zu reduzieren, das durch die Einspritzdüse (2) während einer ersten Serie von aufeinanderfolgenden Einspritzereignissen geliefert wird, das Verfahren umfasst ein Reduzieren der "Einspritzdüse ein"-Zeitdauer (T_{ON}) auf einen vorgegebenen "Einspritzdüse ein"-Zeitschwellenwert (T_{ON_6}) und, für nachfolgende Reduzierungen des Kraftstoffliefervolumens, ein Halten der "Einspritzdüse ein"-Zeitdauer im Wesentlichen konstant und danach Reduzieren der Entladungszeitdauer ($T_{\text{DISCHARGE}}$).

4. Das Verfahren gemäß Anspruch 3, wobei, für eine nachfolgende Serie von aufeinanderfolgenden Einspritzereignissen, das Verfahren weiter umfasst ein Halten der Entladungszeitdauer ($T_{\text{DISCHARGE}}$) im Wesentlichen konstant und Reduzieren der Spitze-Entladungs/Ladungs-Stromamplitude (I) auf einen vorgegebenen Spitzenstromschwellenwert (I_5).

5. Das Verfahren gemäß Anspruch 2, wobei, um das Volumen von Kraftstoff zu reduzieren, das durch die Einspritzdüse (2) während einer ersten Serie von aufeinanderfolgenden Einspritzereignissen geliefert wird, das Verfahren umfasst ein Reduzieren der "Einspritzdüse ein"-Zeitdauer (T_{ON}) auf einen vorgegebenen "Einspritzdüse ein"-Zeitschwellenwert (T_{ON_6}), und, für nachfolgende Reduzierungen des Kraftstoffliefervolumens, ein Halten der "Einspritzdüse ein"-Zeitdauer (T_{ON}) im Wesentlichen konstant und danach Reduzieren der Spitze-Entladungs/Ladungs-Stromamplitude (I) auf einen vorgegebenen Spitzenstromschwellenwert (I_5).

6. Das Verfahren gemäß Anspruch 5, wobei, für eine nachfolgende Serie von aufeinanderfolgenden Einspritzereignissen, das Verfahren weiter umfasst ein Halten der "Einspritzdüse ein"-Zeitdauer im Wesentlichen konstant auf dem vorgegebenen "Einspritzdüse ein"-Zeitschwellenwert (T_{ON_6}), ein Halten der Spitze-Entladungs/Ladungs-Stromamplitude auf dem vorgegebenen Spitzenstromschwellenwert (I_5) und ein Reduzieren der Entladungszeitdauer ($T_{\text{DISCHARGE}}$), um das Kraftstoffvolumen weiter zu reduzieren, das von der Einspritzdüse (2) in Betrieb geliefert wird.

7. Das Verfahren gemäß Anspruch 2, das umfasst ein Empfangen eines Werts (T_{ON_DEMAND}), der das geforderte Kraftstoffvolumen repräsentiert, und Bestimmen eines abgestimmten "Einspritzdüse ein"-Zeitwerts (T_{ON_TUNED}) durch Bezugnahme auf eine erste Datenkarte, die den Wert (T_{ON_DEMAND}) dem abgestimmten "Einspritzdüse ein"-Zeitwert (T_{ON_TUNED}) zuordnet, und Verwenden des bestimmten abgestimmten "Einspritzdüse ein"-Zeitwerts (T_{ON_TUNED}) für einen nachfolgenden Betrieb der Einspritzdüse (2).

8. Das Verfahren gemäß Anspruch 7, das weiter umfasst ein Bestimmen eines Entladungszeitdauerwerts ($T_{DISCHARGE_TUNED}$) durch Bezugnahme auf eine zweite Datenkarte, die den Wert (T_{ON_DEMAND}) dem Entladungszeitdauerwert ($T_{DISCHARGE_TUNED}$) zuordnet, und Verwenden des bestimmten Entladungszeitdauerwerts ($T_{DISCHARGE_TUNED}$) für einen nachfolgenden Betrieb der Einspritzdüse (2).

9. Das Verfahren gemäß Anspruch 7 oder Anspruch 8, das weiter umfasst ein Bestimmen eines Spitze-Entladungs/Ladungs-Stromamplitudenwerts (I_{TUNED}) durch Bezugnahme auf eine dritte Datenkarte, die den Wert (T_{ON_DEMAND}) dem Spitze-Entladungs/Ladungs-Stromamplitudenwert (I_{TUNED}) zuordnet, und Verwenden des bestimmten Spitze-Entladungs/Ladungs-Stromamplitudenwerts (I_{TUNED}) für einen nachfolgenden Betrieb der Einspritzdüse (2).

10. Ein Verfahren zum Betrieb einer Kraftstoffeinspritzdüse (2) mit einem piezoelektrischen Aktuator (4), wobei das Verfahren aufweist:

Bestimmen zumindest einer Resonanzfrequenz einer Einspritzdüse-Installation, in der die Einspritzdüse (2) aufgenommen ist, in Betrieb, Anwenden eines Antriebspulses (400) auf den Aktuator (4), wobei der Antriebspuls erste, zweite und dritte Einspritzantriebspulse (402, 404, 406) aufweist und eine Frequenzdomänesignatur hat; und

Auswählen einer Trennzeitdauer zwischen dem ersten Einspritzantriebspuls (402) und dem zweiten Einspritzantriebspuls (404) und/oder einer Trennzeitdauer zwischen dem zweiten Einspritzantriebspuls (404) und dem dritten Einspritzantriebspuls (406), um die Frequenzdomänesignatur des Antriebspulses derart zu modifizieren, dass ein Maximum der Frequenzdomänesignatur von der bestimmten Resonanzfrequenz der Einspritzdüse-Installation entfernt ist.

11. Ein Computerprogrammprodukt, das zumindest einen Computerprogramm-Softwareteil aufweist, der bei Ausführung in einer Ausführungsumgebung be-

triebsfähig ist, um das Verfahren gemäß einem der Ansprüche 1 bis 10 zu implementieren.

12. Ein Datenspeichermedium mit dem oder jedem Softwareteil gemäß Anspruch 11 darauf gespeichert.

13. Ein Mikrocomputer, der mit dem Datenspeichermedium gemäß Anspruch 12 darauf vorgesehen ist.

Revendications

1. Procédé pour faire fonctionner un injecteur de carburant (2) ayant un actionneur piézoélectrique (4) capable de fonctionner en lui appliquant une impulsion motrice, dans lequel l'impulsion motrice a une signature de domaine de fréquences, le procédé incluant les étapes consistant à :

déterminer au moins une fréquence de résonance d'une installation d'injecteur dans laquelle est reçu l'injecteur (2), en utilisation ; et modifier l'impulsion motrice de telle façon qu'un maximum de la signature de domaine de fréquences de celle-ci est éloignée de la fréquence de résonance déterminée de l'installation d'injecteur.

2. Procédé selon la revendication 1, dans lequel l'impulsion motrice est définie par deux ou plusieurs caractéristiques d'impulsion motrice incluant une période temporelle de décharge ($T_{DECHARGE}$), une période temporelle de fonctionnement d'injecteur (T_{ON}), et une amplitude de courant de pointe de décharge/charge (I), dans lequel l'étape consistant à modifier l'impulsion motrice de l'injecteur inclut de modifier une ou plusieurs caractéristiques sélectionnées parmi lesdites caractéristiques d'impulsion motrice.

3. Procédé selon la revendication 2, dans lequel, afin de réduire le volume de carburant délivré par l'injecteur (2) pendant une première série d'événements d'injection successifs, le procédé inclut les étapes consistant à réduire la période temporelle de fonctionnement d'injecteur (T_{ON}) à une valeur temporelle seuil prédéterminée de fonctionnement d'injecteur (T_{ON_6}) et, pour des réductions ultérieures du volume délivré de carburant, maintenir la période temporelle de fonctionnement d'injecteur sensiblement constante, et suite à cela, réduire la période temporelle de décharge ($T_{DECHARGE}$).

4. Procédé selon la revendication 3, dans lequel, pour une série ultérieure d'événements d'injection successifs, le procédé inclut en outre les étapes consistant à maintenir la période temporelle de décharge ($T_{DECHARGE}$) sensiblement constante et à réduire

l'amplitude de courant de pointe de décharge/charge (I_1) à une valeur seuil prédéterminée du courant de pointe (I_5).

5. Procédé selon la revendication 2, dans lequel, afin de réduire le volume de carburant délivré par l'injecteur (2) pendant une première série d'événements d'injection successifs, le procédé inclut les étapes consistant à réduire la période temporelle de fonctionnement d'injecteur (T_{ON}) à une valeur temporelle seuil prédéterminée de fonctionnement d'injecteur (T_{ON_6}) et, pour des réductions ultérieures du volume délivré de carburant, maintenir la période temporelle de fonctionnement d'injecteur (T_{ON}) sensiblement constante, et réduire ensuite l'amplitude du courant de pointe de décharge/charge (I_1) à une valeur seuil prédéterminée du courant de pointe (I_5). 5
6. Procédé selon la revendication 5, dans lequel, pour une série ultérieure d'événements d'injection successifs, le procédé inclut en outre les étapes consistant à maintenir la période temporelle de fonctionnement d'injecteur sensiblement constante à la valeur temporelle seuil prédéterminée de fonctionnement d'injecteur (T_{ON_6}), à maintenir l'amplitude de pointe du courant de décharge/charge à la valeur seuil prédéterminée du courant de pointe (I_5), et à réduire la période temporelle de décharge ($T_{DECHARGE}$) afin de réduire encore le volume de carburant délivré par l'injecteur (2), en utilisation. 10
7. Procédé selon la revendication 2, incluant les étapes consistant à recevoir une valeur ($T_{ON_DEMANDE}$) qui représente le volume de carburant demandé, et à déterminer une valeur temporelle accordée du fonctionnement d'injecteur (T_{ON_TUNED}) en se référant à une première carte de données mettant en relation la valeur ($T_{ON_DEMANDE}$) avec la valeur temporelle accordée de fonctionnement d'injecteur (T_{ON_TUNED}), et à utiliser la valeur temporelle accordée de fonctionnement d'injecteur déterminée (T_{ON_TUNED}) pour le fonctionnement ultérieur de l'injecteur (2). 15
8. Procédé selon la revendication 7, incluant en outre les étapes consistant à déterminer une valeur de période temporelle de décharge ($T_{DECHARGE_TUNED}$) en se référant à une seconde carte de données mettant en relation la valeur ($T_{ON_DEMANDE}$) avec la valeur de la période temporelle de décharge ($T_{DECHARGE_TUNED}$), et à utiliser la valeur de la période temporelle déterminée de décharge () pour le fonctionnement ultérieur de l'injecteur (2). 20
9. Procédé selon la revendication 7 8, incluant en outre les opérations consistant à déterminer une valeur d'amplitude de pointe du courant de décharge/charge (I_{TUNED}) en se référant à une troisième carte de 25

données mettant en relation la valeur ($T_{ON_DEMANDE}$) avec la valeur de l'amplitude de pointe du courant de décharge/charge (I_{TUNED}), et à utiliser la valeur déterminée de l'amplitude de pointe du courant de décharge/charge (I_{TUNED}) pour le fonctionnement ultérieur de l'injecteur (2). 30

10. Procédé pour faire fonctionner un injecteur de carburant (2) ayant un actionneur piézoélectrique (4), le procédé comprenant les étapes consistant à : 35

déterminer au moins une fréquence de résonance d'une installation d'injecteur dans laquelle l'injecteur (2) est reçu, en utilisation, appliquer une impulsion motrice (400) à l'actionneur (4), l'impulsion motrice comprenant une première, une seconde et une troisième impulsion motrice d'injection (402, 404, 406) et ayant une signature de domaine de fréquences ; et sélectionner une période temporelle de séparation entre la première impulsion motrice d'injection (402) et la seconde impulsion motrice d'injection (404) et/ou une période temporelle de séparation entre la seconde impulsion motrice d'injection (404) et la troisième impulsion motrice d'injection (406) de manière à modifier la signature du domaine de fréquences de l'impulsion motrice, de telle façon qu'un maximum de la signature du domaine de fréquences est éloigné de la fréquence de résonance déterminée de l'installation d'injecteur. 40

11. Produit de programme d'ordinateur comprenant au moins une partie logicielle formant programme d'ordinateur qui, lorsqu'elle est exécutée dans un environnement d'exécution, a pour fonction de mettre en oeuvre le procédé selon l'une quelconque des revendications 1 à 10. 45
12. Support de stockage de données ayant la ou chaque partie logicielle de la revendication 11 stockée sur lui-même. 50
13. Micro-ordinateur doté du support de stockage de données selon la revendication 12 sur lui-même. 55

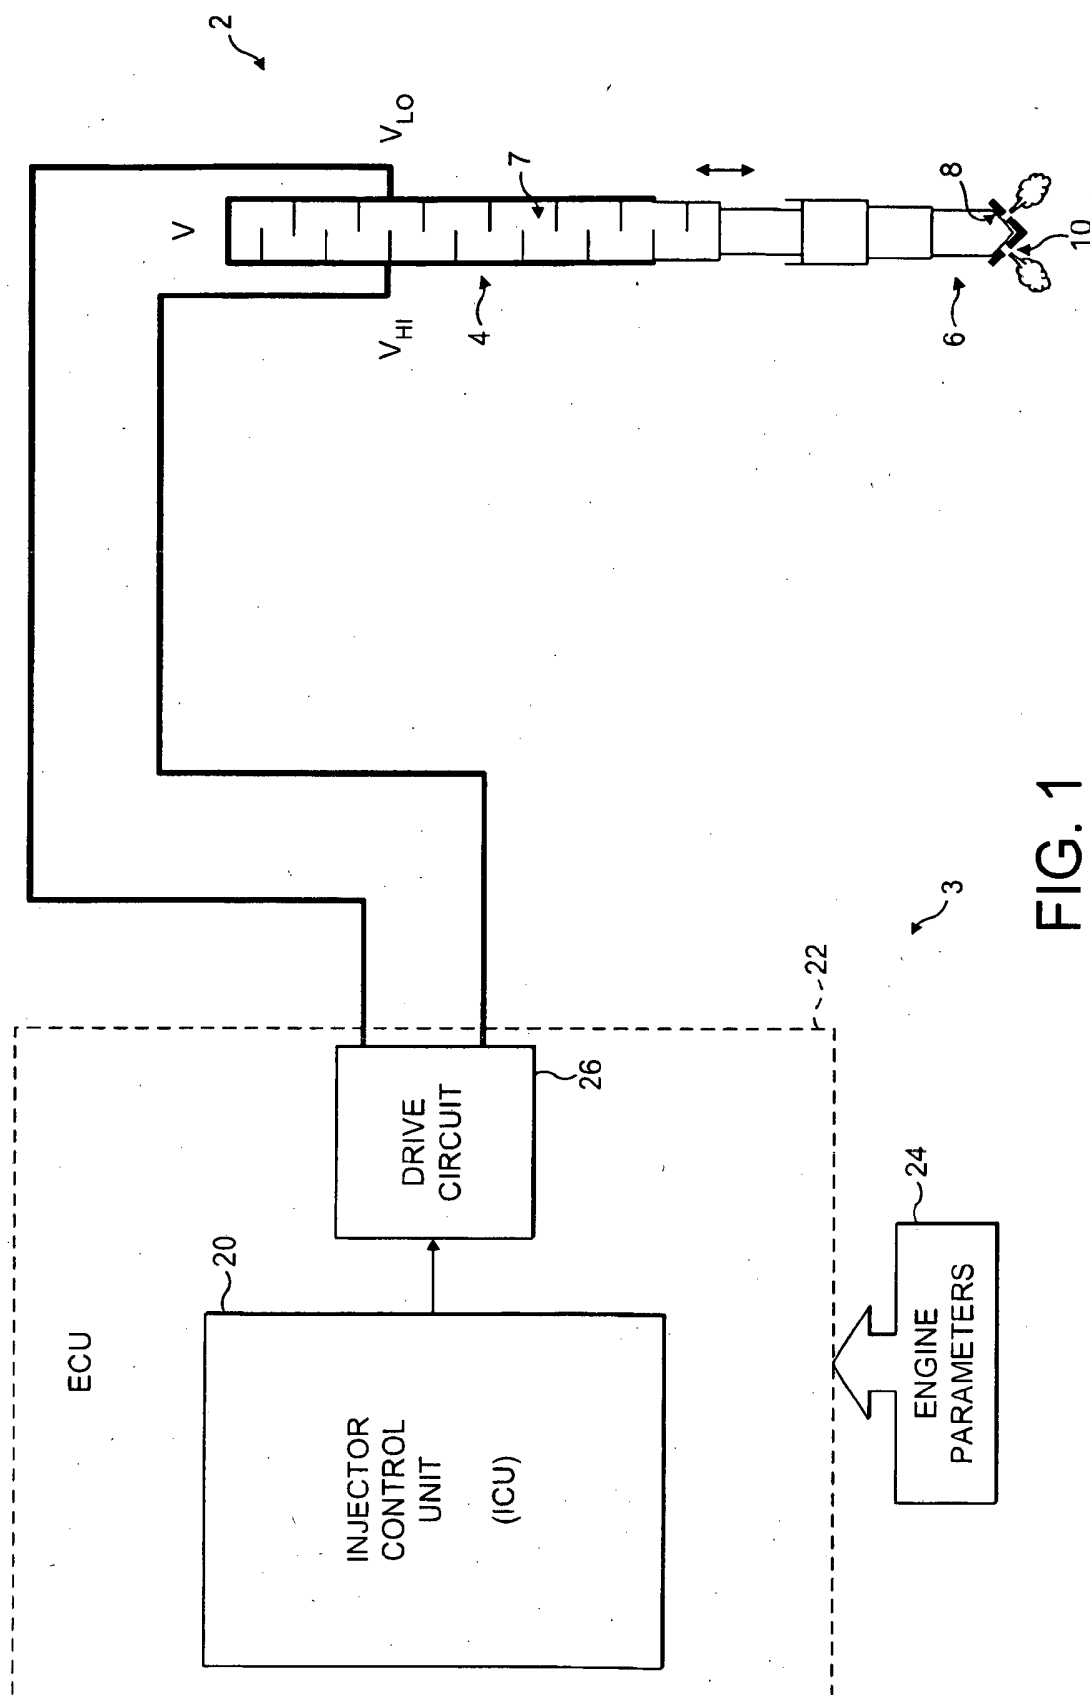


FIG. 1

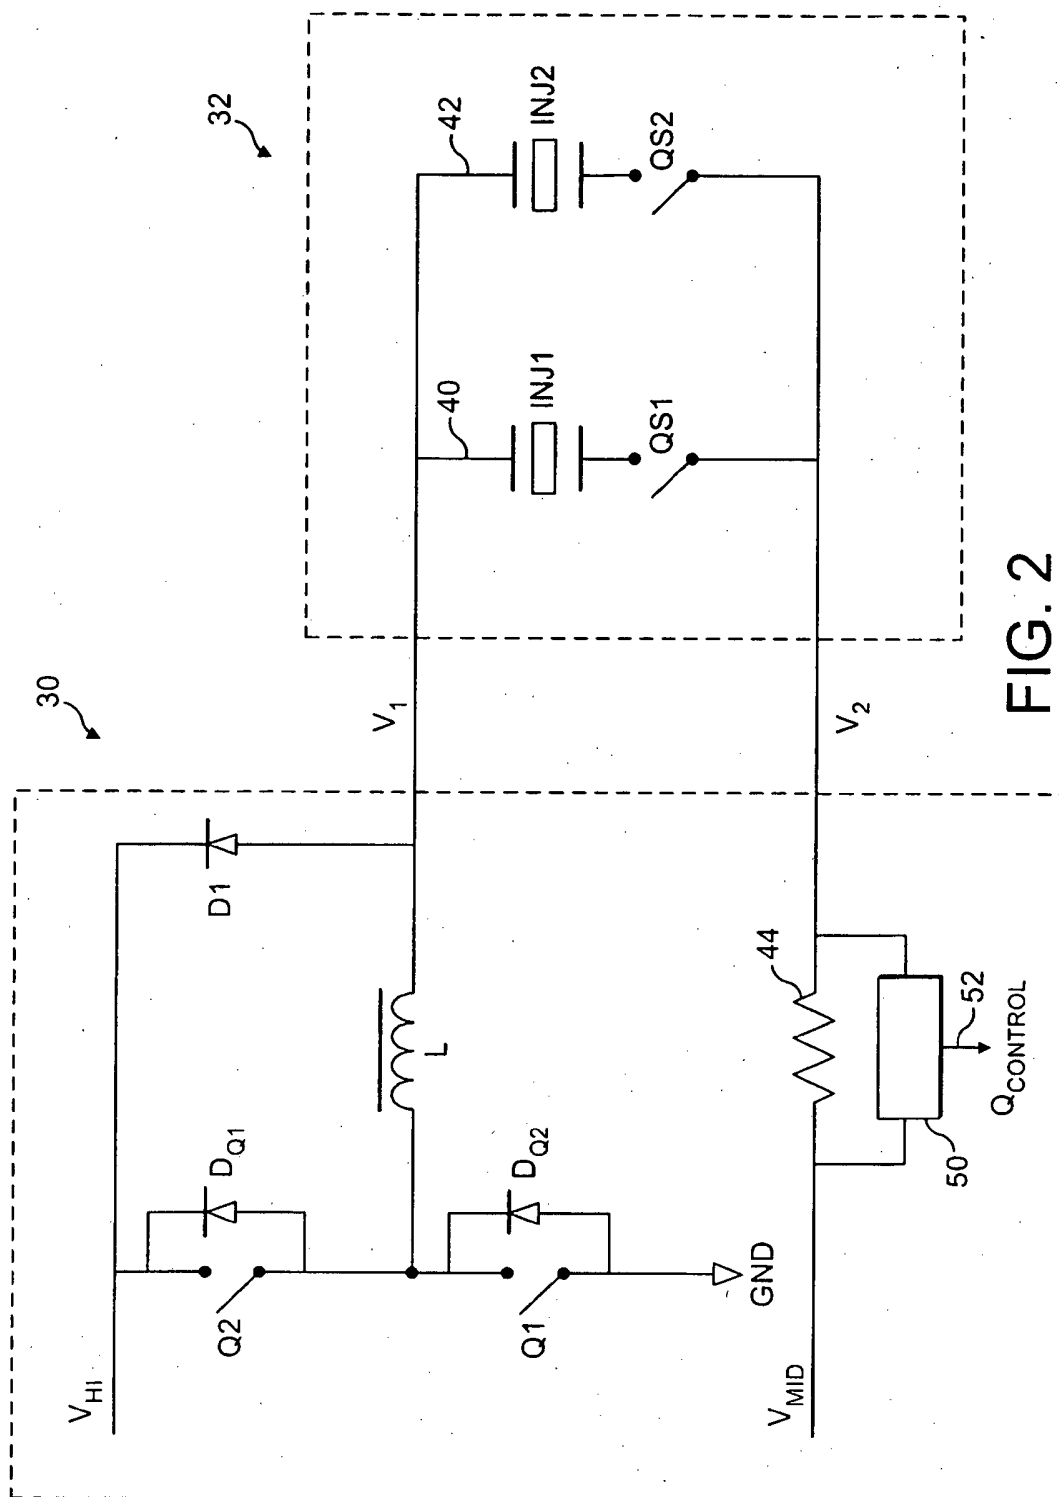


FIG. 2

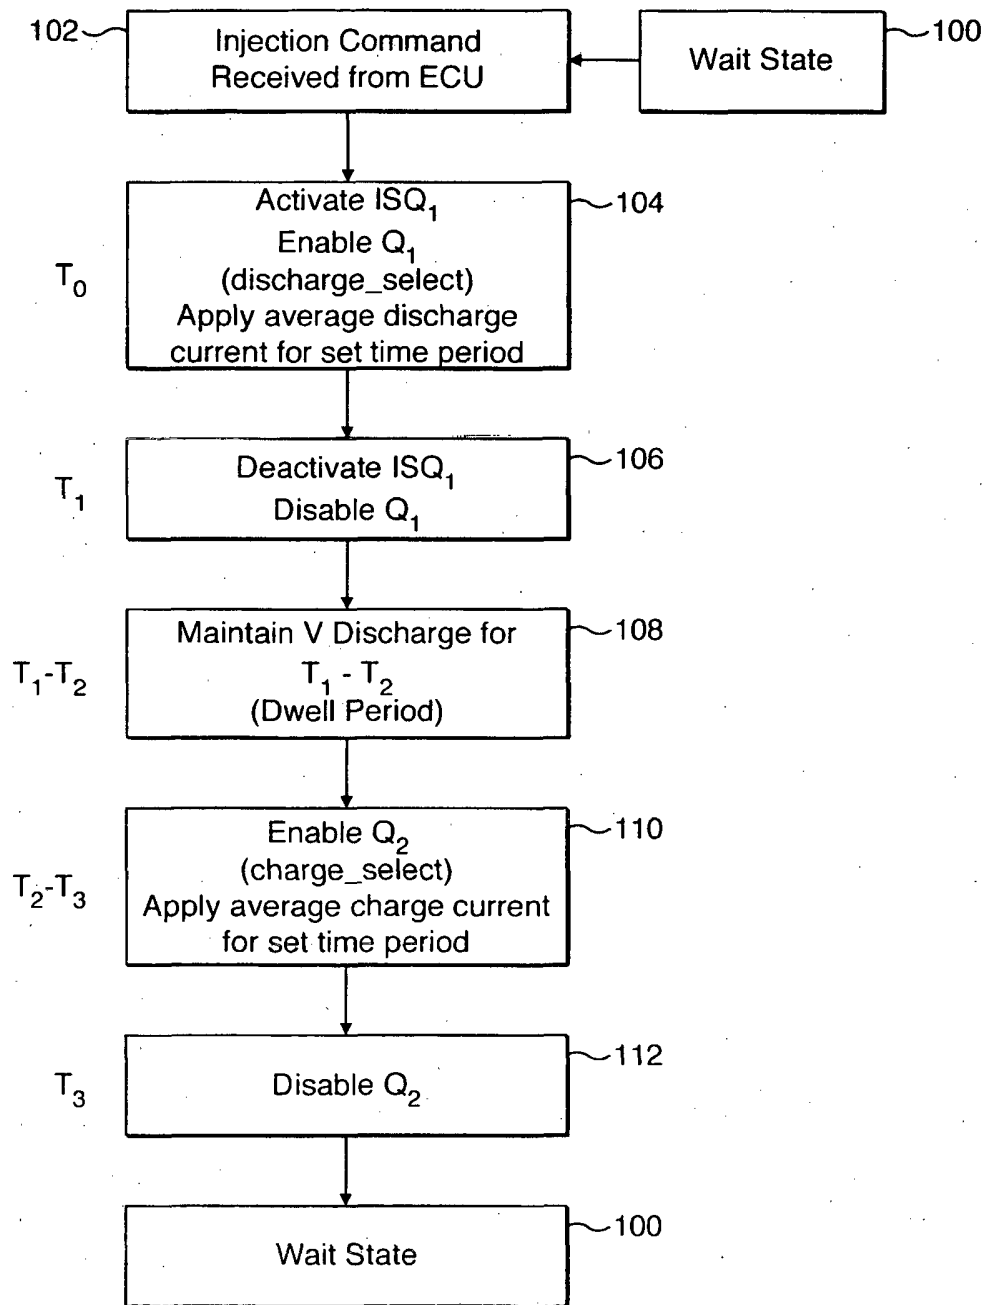
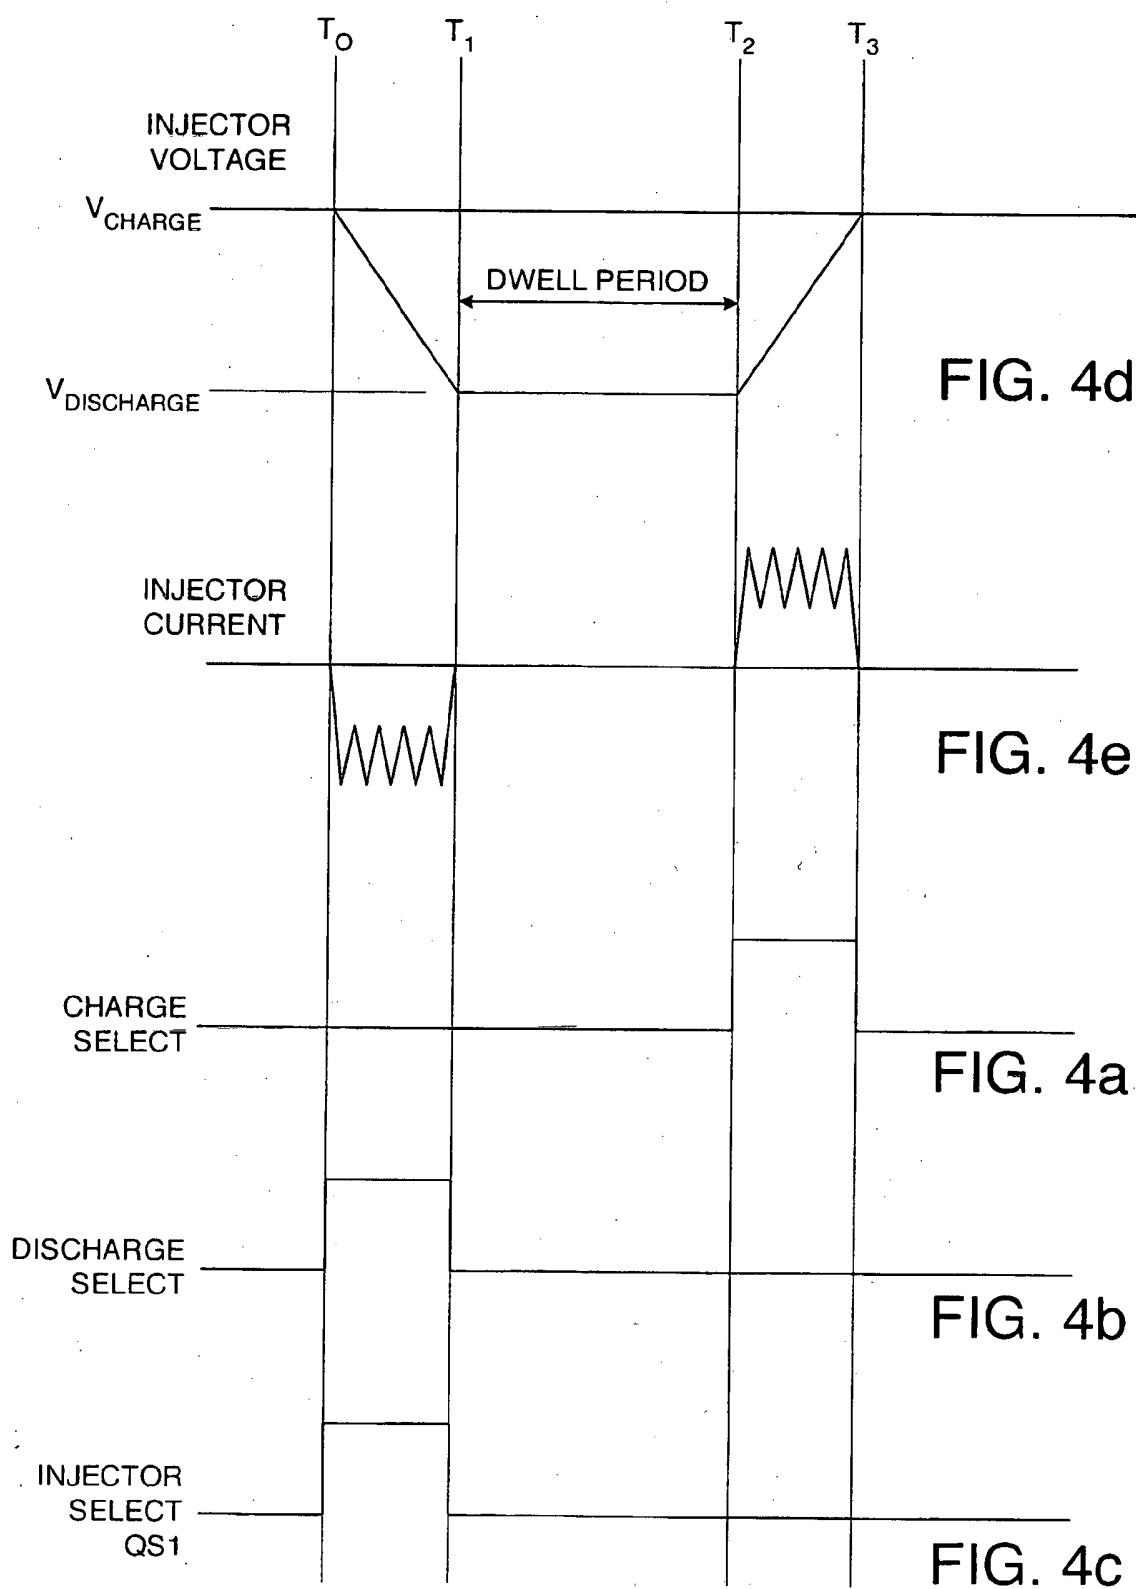


FIG. 3



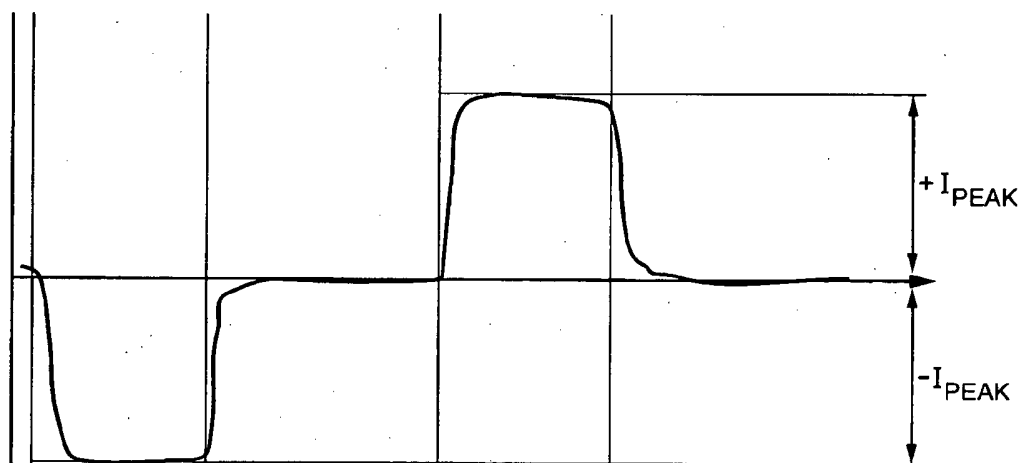


FIG. 5a

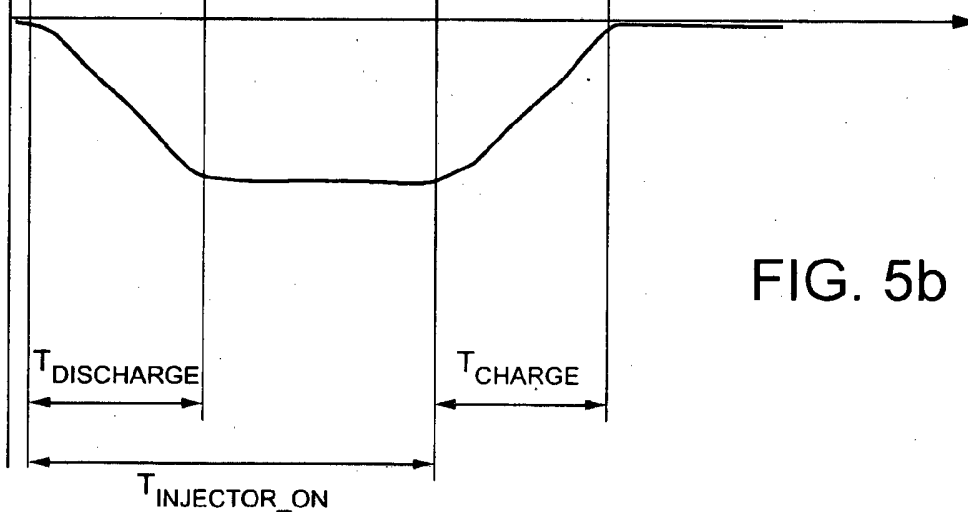


FIG. 5b

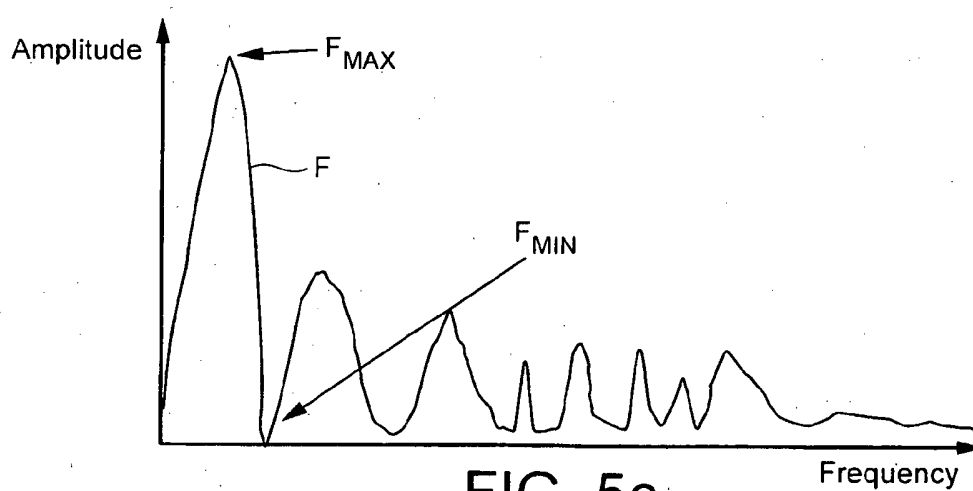


FIG. 5c

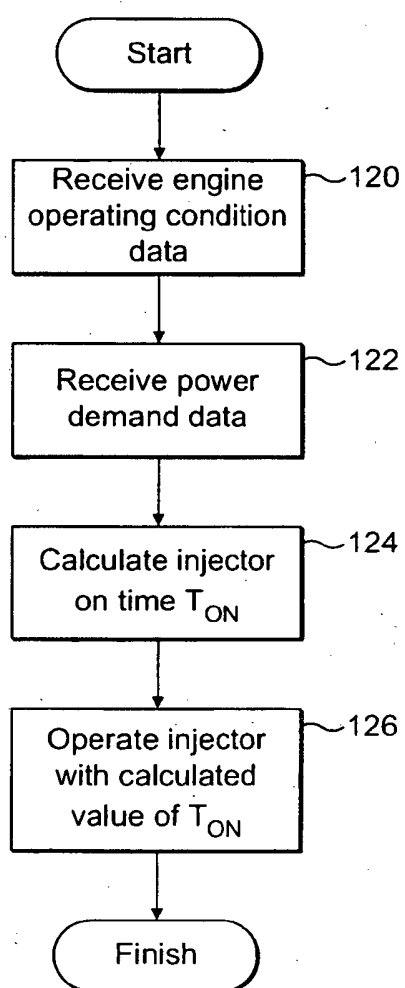


FIG. 6

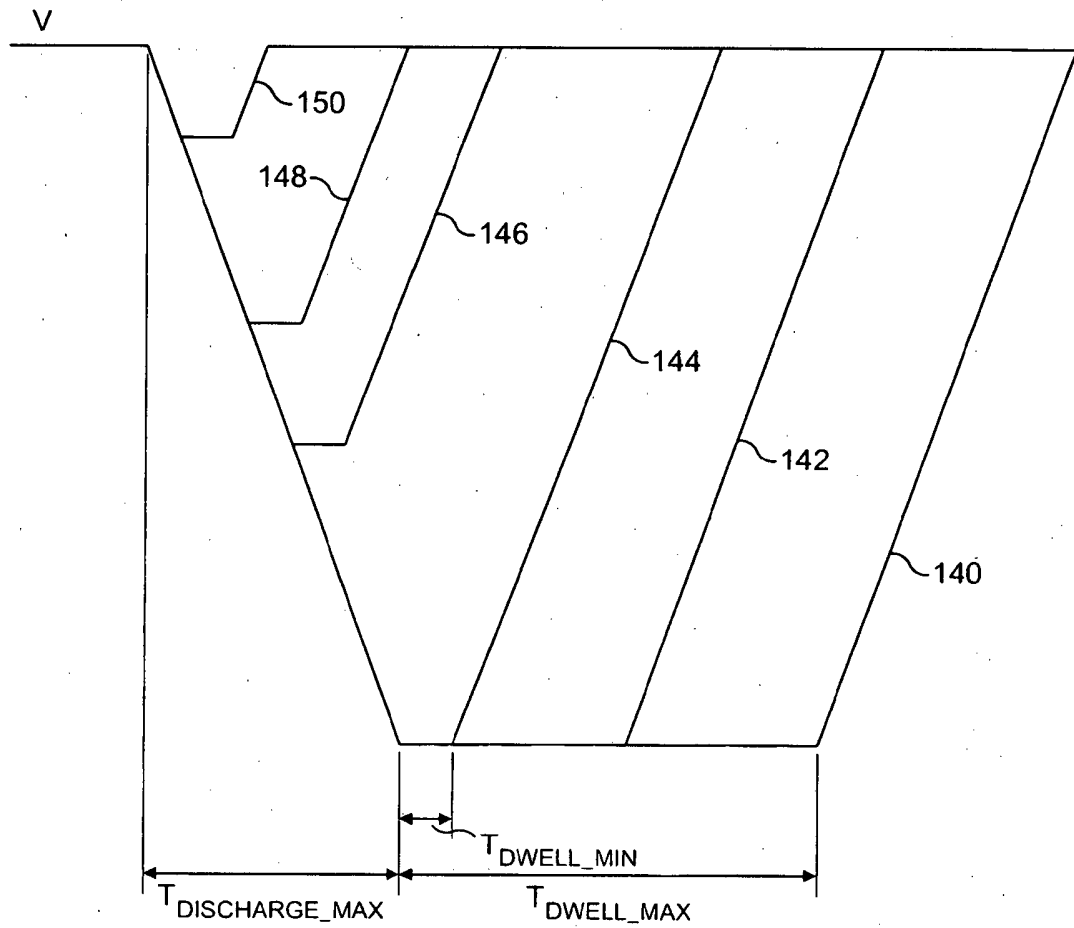


FIG. 7

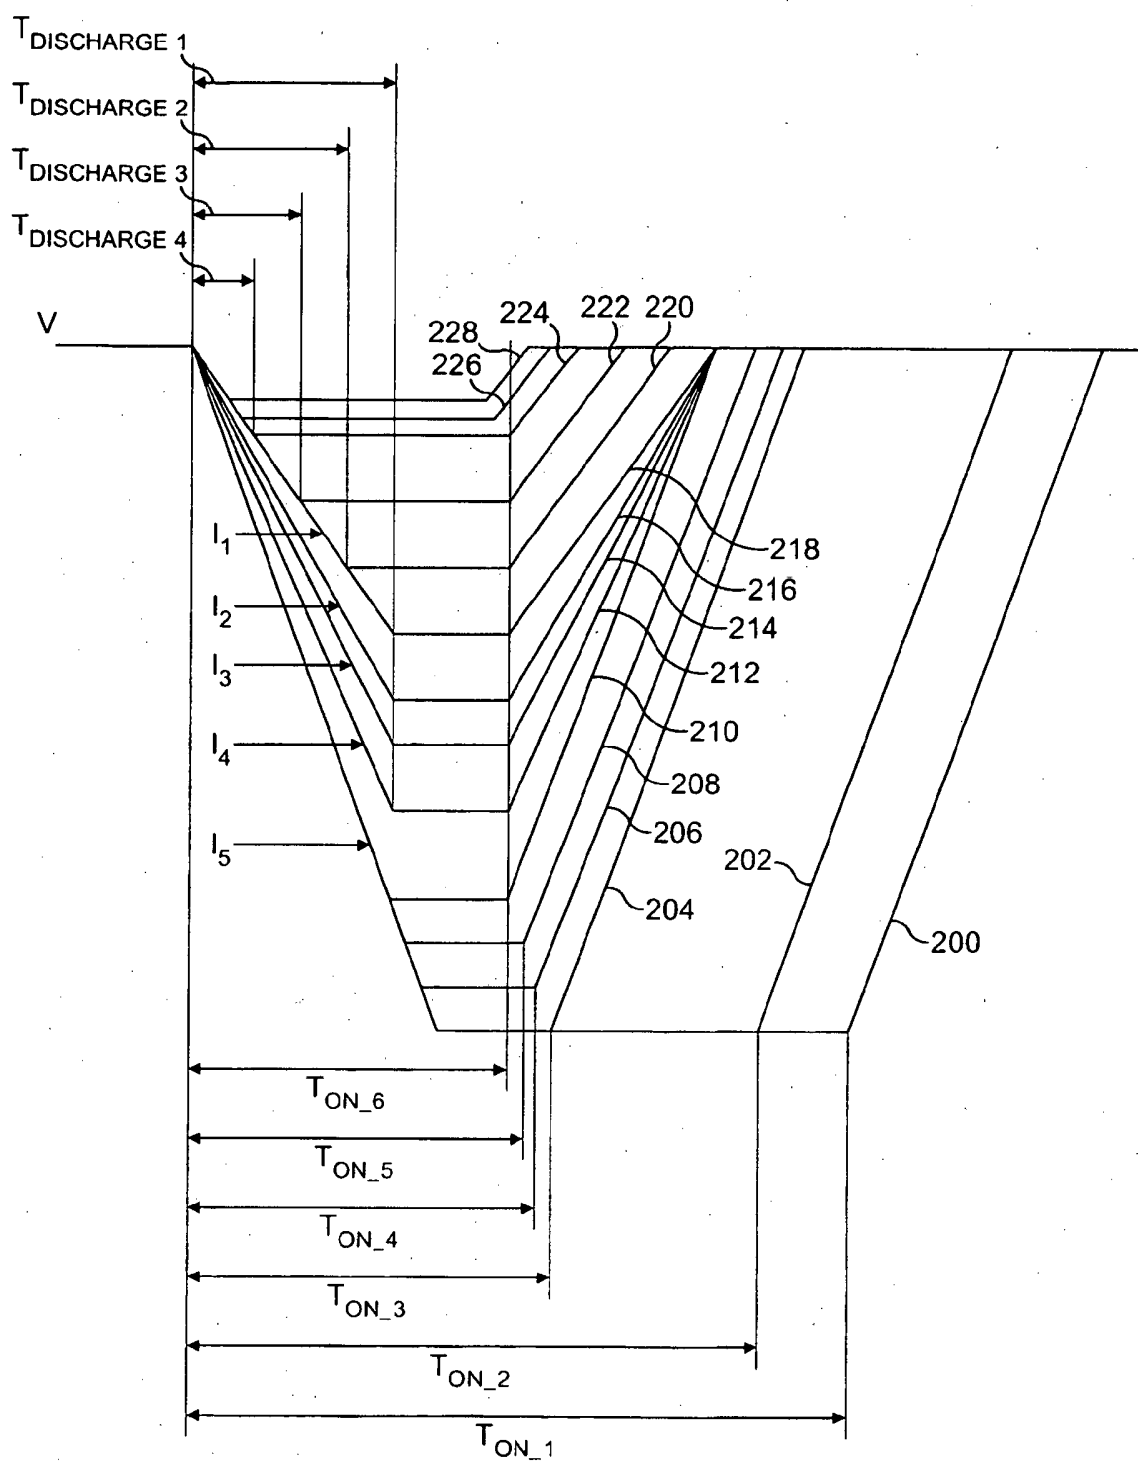


FIG. 8

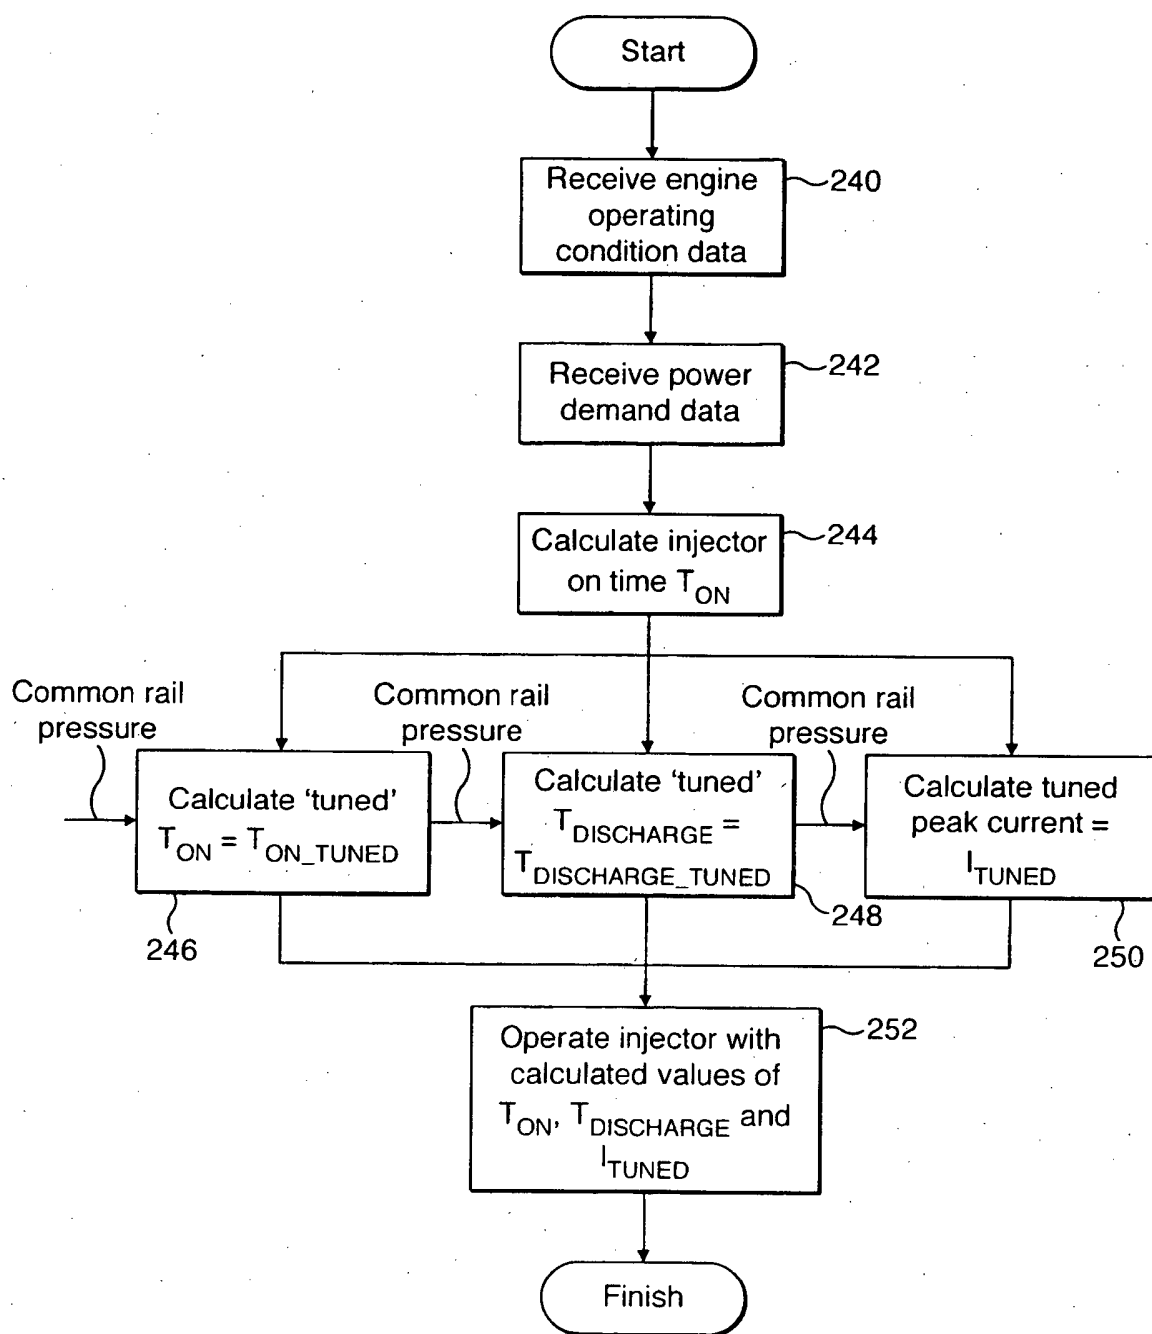


FIG. 9

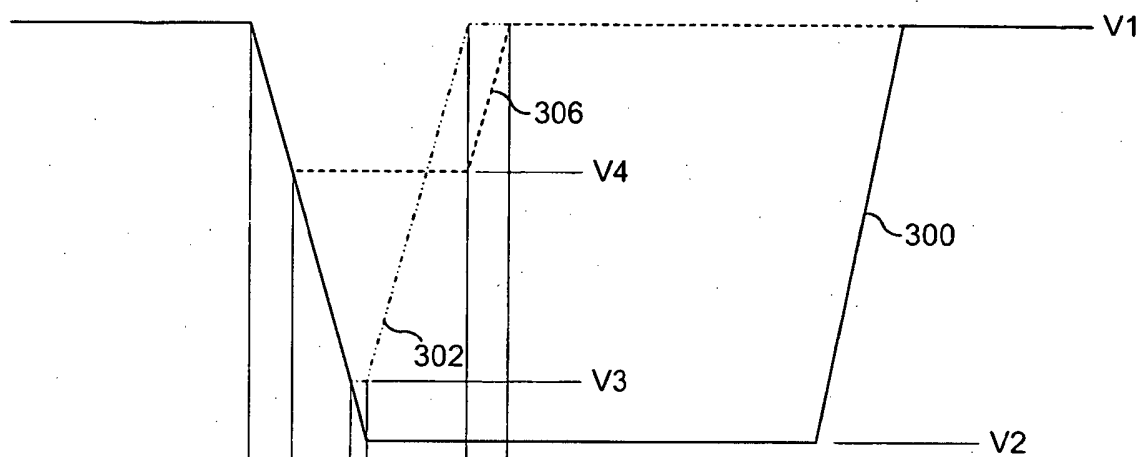


FIG. 10

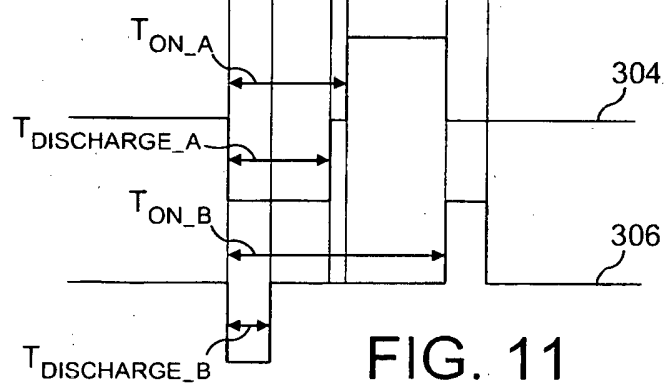


FIG. 11

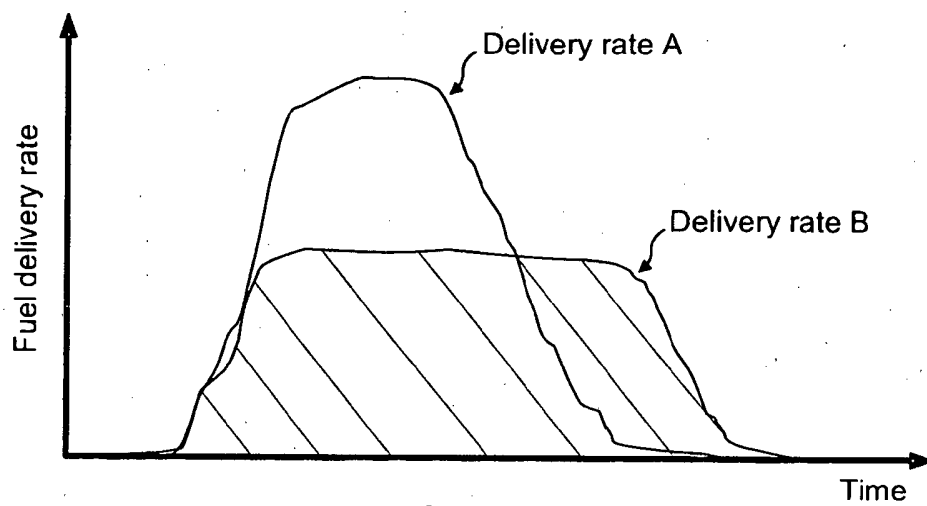


FIG. 12a

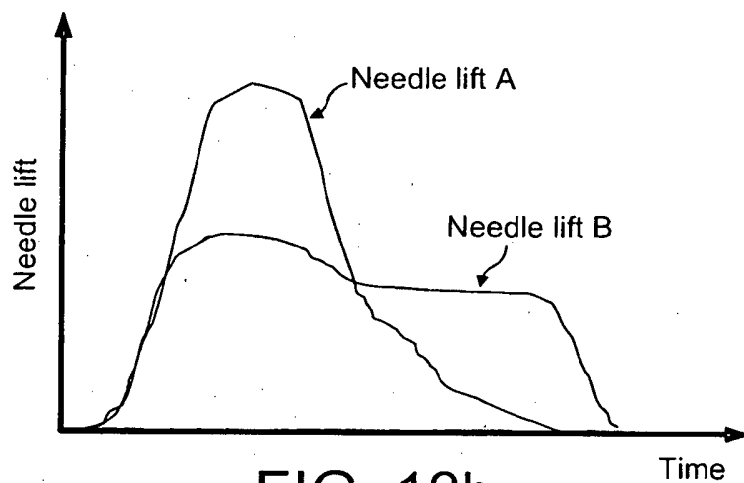


FIG. 12b

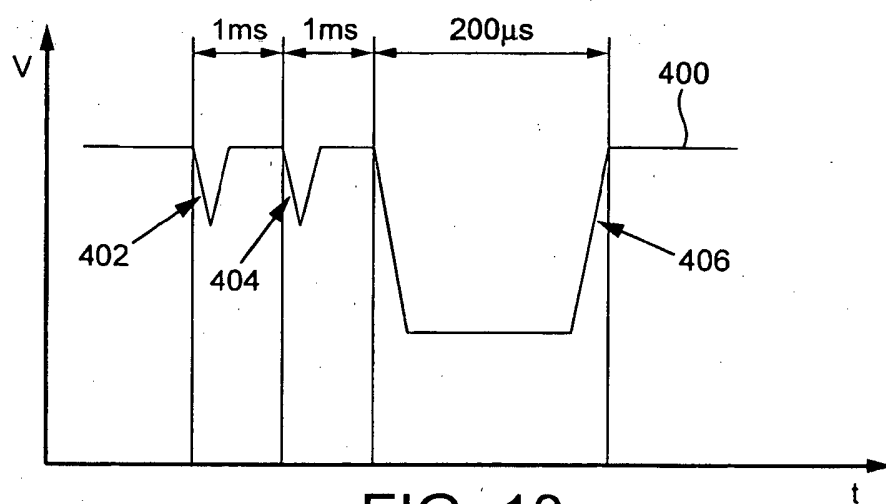


FIG. 13

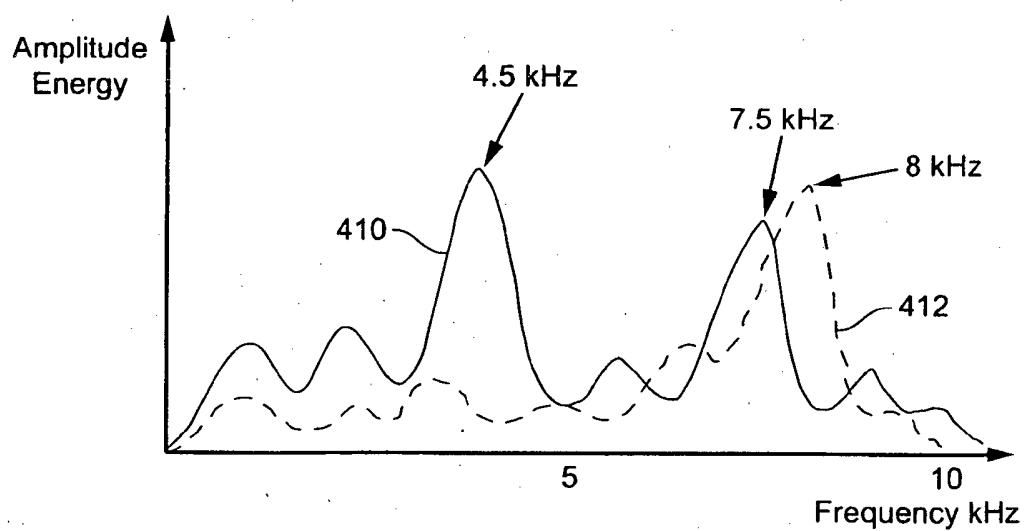


FIG. 14

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 0955901 B [0006]
- EP 1398487 A [0007]
- EP 0995899 A [0008]

713854/MK (EP1860310)

Szabadalmi igénypontok

1. Eljárás tüzelőanyag befecskendező (2) működtetésére, amelynek hajtóimpulzusokkal működtethető piezoelektromos működtetője (4) van, ahol a hajtóimpulzusnak frekvenciatartománybeli aláírása van, és ahol az eljárás során: üzem közben meghatározzuk a befecskendezőt (2) befogadó befecskendező szerelvény legalább egy rezonancia frekvenciáját; és a hajtóimpulzust úgy módosítjuk, hogy a frekvenciatartománybeli aláírás maximuma távol legyen a befecskendező szerelvény meghatározott rezonancia frekvenciájától.
2. Az 1. igénypont szerinti eljárás, amelynél a hajtóimpulzust kettő vagy több hajtóimpulzus jellemző határozza meg, amelyekhez tartozik a kisülési időtartam ($T_{DISCHARGE}$), a befecskendező bekapcsolási időtartam (T_{ON}), és a csúcs kisülési/töltési áram amplitúdó (I), ahol a befecskendező hajtóimpulzust módosító lépés során egy vagy több kiválasztott hajtóimpulzus jellemzőt módosítunk.
3. A 2. igénypont szerinti eljárás, amelynél a befecskendezési események első sorozatánál a befecskendezővel (2) szállított üzemanyag térfogatának csökkentése érdekében az eljárás során csökkentjük a befecskendező bekapcsolási időtartamot (T_{ON}) egy előre meghatározott befecskendező bekapcsolási idő küszöbértékre (T_{ON_6}), és a szállított üzemanyag térfogatának további csökkentése érdekében a befecskendező bekapcsolási időtartamot lényegében állandó értéken tartjuk, majd ezt követően csökkentjük a kisülési időtartamot ($T_{DISCHARGE}$).
4. A 3. igénypont szerinti eljárás, amelynél az egymást követő befecskendezési események következő sorozatánál az eljárás során kisülési időtartamot ($T_{DISCHARGE}$) lényegében állandó értéken tartjuk és a csúcs kisülési/töltési áram amplitúdót (I) egy előre meghatározott csúcs áram küszöbértékre (I_5) csökkentjük.
5. A 2. igénypont szerinti eljárás, amelynél a befecskendezési események első sorozatánál a befecskendezővel (2) szállított üzemanyag térfogatának csökkentése

érdekében az eljárás során csökkentjük a befecskendező bekapcsolási időtartamot (T_{ON}) egy előre meghatározott befecskendező bekapcsolási idő küszöbértékre (T_{ON_6}), és a szállított üzemanyag térfogatának további csökkentése érdekében a befecskendező bekapcsolási időtartamot lényegében állandó értéken tartjuk, majd ezt követően a csúcs kisülési/töltési áram amplitúdót (I) egy előre meghatározott csúcs áram küszöbértékre (I_5) csökkentjük.

6. Az 5. igénypont szerinti eljárás, amelynél az egymást követő befecskendezési események következő sorozatánál az eljárás során a befecskendező bekapcsolási időtartamot lényegében állandó értéken tartjuk az előre meghatározott befecskendező bekapcsolási idő küszöbértéken (T_{ON_6}), a csúcs kisülési/töltési áram amplitúdót az előre meghatározott csúcs áram küszöbértéken (I_5) tartjuk, és csökkentjük a kisülési időtartamot ($T_{DISCHARGE}$) üzem közben a befecskendezővel (2) szállított üzemanyag térfogatának további csökkentéséhez.

7. A 2. igénypont szerinti eljárás, amelynek során veszünk egy értéket (T_{ON_DEMAND}), amely kifejezi az igényelt üzemanyag térfogatot és meghatározunk egy hangolt befecskendező bekapcsolási idő értéket (T_{ON_TUNED}) egy első adat leképezés alapján, amely a (T_{ON_DEMAND}) értéket hozzárendeli a hangolt befecskendező bekapcsolási idő értékhez (T_{ON_TUNED}), és a meghatározott hangolt befecskendező bekapcsolási idő értéket (T_{ON_TUNED}) használjuk a befecskendező (2) következő működtetésénél.

8. A 7. igénypont szerinti eljárás, amelynek során meghatározunk egy kisülési időtartam értéket ($T_{DISCHARGE_TUNED}$) egy második adat leképezés alapján, amely a (T_{ON_DEMAND}) értéket hozzárendeli a kisülési időtartam értékhez ($T_{DISCHARGE_TUNED}$), és a meghatározott kisülési időtartam értéket ($T_{DISCHARGE_TUNED}$) használjuk a befecskendező (2) következő működtetésénél.

9. A 7. vagy 8. igénypont szerinti eljárás, amelynek során meghatározunk egy csúcs kisülési/töltési áram amplitúdó értéket (I_{TUNED}) egy harmadik adat leképezés alapján, amely a (T_{ON_DEMAND}) értéket hozzárendeli a csúcs kisülési/töltési áram amplitúdó értékhez (I_{TUNED}), és a meghatározott csúcs kisülési/töltési áram amplitúdó

értéket (I_{TUNED}) használjuk a befecskendező (2) következő működtetésénél.

10. Eljárás tüzelőanyag befecskendező (2) működtetésére, amelynek piezoelektromos működtetője (4) van, ahol az eljárás során:
üzem közben meghatározzuk a befecskendezőt (2) befogadó befecskendező szerelvény legalább egy rezonancia frekvenciáját;
hajtóimpulzust (400) adunk a működtetőre (4), ahol a hajtóimpulzus első, második és harmadik befecskendező hajtóimpulzust (402, 404, 406), valamint egy frekvenciatartománybeli aláírást tartalmaz; és
kiválasztunk egy elválasztási időtartamot az első befecskendező hajtóimpulzus (402) és a második befecskendező hajtóimpulzus (404) között, és/vagy kiválasztunk egy elválasztási időtartamot a második befecskendező hajtóimpulzus (404) és a harmadik befecskendező hajtóimpulzus (406) között úgy, hogy módosítjuk hajtóimpulzus frekvenciatartománybeli aláírását úgy, hogy a frekvenciatartománybeli aláírás maximuma távol legyen a befecskendező szerelvény meghatározott rezonancia frekvenciájától.
11. Számítógépes programtermék, amely legalább egy számítógépes program részt tartalmaz, amely egy végrehajtó környezetben futtatva alkalmas az 1 - 10. igénypontok bármelyike szerinti eljárás megvalósítására.
12. Adattároló eszköz a 11. igénypont szerinti egy vagy több program résszel.
13. Mikroszámítógép, amely a 12. igénypont szerinti adattároló eszközt tartalmazza.