

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
17 February 2005 (17.02.2005)

PCT

(10) International Publication Number
WO 2005/013759 A1

- (51) International Patent Classification⁷: **A45D 34/04**
- (21) International Application Number:
PCT/EP2004/007199
- (22) International Filing Date: 7 June 2004 (07.06.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0308731 17 July 2003 (17.07.2003) FR
60/491,975 4 August 2003 (04.08.2003) US
- (71) Applicant (for all designated States except US):
L'OREAL [FR/FR]; 14, rue Royale, F-75008 Paris (FR).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **LAURENT, Florence** [FR/FR]; 25 bis, rue Charles Chefson, F-92270 Bois Colombes (FR).
- (74) Agent: **L'OREAL**; Boulard Denis - D.I.P.I., 25-29 Quai Aulagnier, F-92600 Asnieres (FR).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: HAIR COLORING SYSTEM AND TEST DEVICE CAPABLE OF BEING USED IN SUCH A SYSTEM

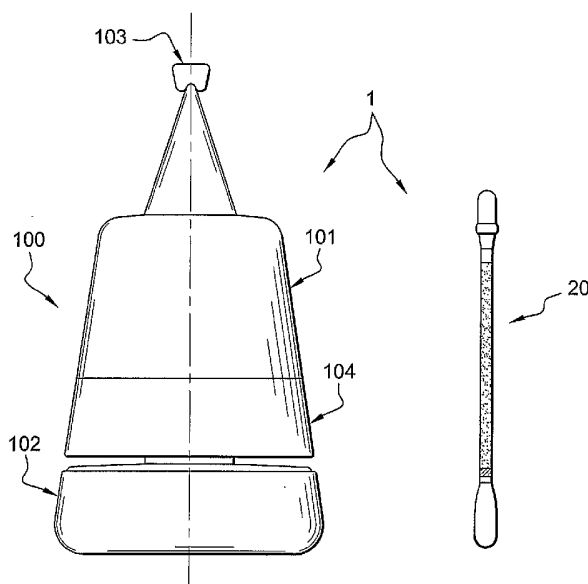

(57) Abstract: The application relates to a packaging system for a hair coloring product containing: i) at least one container (102) holding a composition comprising at least one hair colorant, said composition forming or intended to form a hair coloring product ; and ii) at least one test device (20) designed to perform a patch test and incorporating a tube (21) delimiting an internal space containing a dose of said composition, the tube incorporating an outlet aperture (29) and being arranged to cause said composition to be expelled from said outlet aperture (29) in response to excess pressure within the internal space of the tube or when the latter is vented via at least one passage separate from the outlet aperture (29).

HAIR COLORING SYSTEM AND TEST DEVICE CAPABLE OF BEING USED IN SUCH A SYSTEM

The invention discloses a packaging system for a hair coloring product. The invention relates in particular to oxidation coloring or direct coloring. The invention
5 also discloses a test device capable of being used in the system according to the invention.

A sensitivity test (or patch test) of hair coloring products is recommended 48 hours before any hair coloring is applied (oxidation coloring or direct coloring).

Experience has shown, however, that few consumers carry out this test.

10 One of the reasons cited is that it is not currently practical to carry out this test.

A coloring device equipped with means to enable this patch test to be carried out is described in patent application document FR-A-2 806 271.

Although satisfactory in many respects, the solution described in this document presents the drawback that it requires substantial modification of the
15 packaging containing the coloring product itself. This modification increases its cost to a significant degree.

One of the objects of the invention is also to propose a packaging system for a hair coloring product that wholly or partially remedies the problems described above.

A particular object of the invention is to propose a hair coloring system which
20 enables a patch test of the coloring product to be carried out in a simple and economical manner before the product is applied.

A further object is to propose such a system which facilitates the performance of a patch test of the coloring product and which does not require significant modification of the coloring product packaging.

A further object of the invention is to provide a test device capable of
5 being used in a hair coloring system according to the invention.

Further objects of the invention will become apparent from the detailed description which follows.

According to the invention, these objects are achieved by proposing a packaging system for a hair coloring product containing :

10 i) at least one container holding a coloring composition forming or intended to form a hair coloring product ; and

ii) at least one test device designed to perform a patch test and incorporating a tube delimiting an internal space containing at least one hair colorant of said coloring composition, the tube incorporating an outlet
15 aperture, the test device being arranged in a manner such that the contents of the tube are expelled via said outlet aperture in response to excess pressure within the internal space of the tube or when the latter is vented via at least one passage separate from the outlet aperture.

The term "hair colorant" means a direct colorant or a coloring precursor
20 such as an oxidation base or a coupling agent, that is soluble in a hair coloring medium formed by water or a mixture of water and at least one organic solvent.

Advantageously, a liquid or solid plug is arranged inside the tube, said plug serving to isolate the outlet aperture from the internal space of the tube,
25 the plug being arranged to discharge together with the contents of the tube via the outlet aperture when the internal space of the tube is vented or in

response to excess pressure inside the latter. The plug closes off the outlet aperture in the absence of excess pressure inside the tube or while the internal space of the tube is not vented. This feature is particularly advantageous in that it facilitates use of the test device when the outlet
5 aperture is associated with an applicator tip.

Alternatively, for the purpose of expelling the contents of the tube, the outlet aperture passes from the closed position to the open position by means of a snap-off tip or by any other means of closure associated with the tube.

In the variant using excess pressure, the latter can be generated
10 conventionally, in the manner of a syringe, by means of a plunger system moving slidably inside the tube. It is to be noted that this variant using excess pressure is not preferred compared to the venting variant, mainly because of its cost and complexity. Furthermore it is not as easy to use by the subject to be tested compared to the venting variant.

15 The volume of hair composition in the tube can be between 0.01 ml and 5 ml, preferably 0.05 ml and 1 ml.

The tube can be made of a transparent or colored material, in particular a plastics material. Transparency can for example allow the user to observe the level of product in the tube.

20 The tube can have a multi-layer structure, with at least one layer forming a barrier vis-à-vis the air, for example a layer of varnish impermeable to the air or to a solvent or anti-UV.

Advantageously, venting of the internal space of the tube is effected via an element that can be severed, detached, perforated or deformed, and which
25 is located opposite the outlet aperture.

Preferably, the patch test device comprises an element to hold the breakable part on the tube after it has been severed, in particular in the form of a tab of residual material or a piece of cotton.

More preferably, the tube is fitted with an applicator element, this
5 applicator element being separated from the contents of the tube prior to use by any means, in particular by means of a plug of liquid or powder.

The applicator element may be chosen from a group comprising: a cotton tip, a brush, a foam tip, a felt pad, a flock tip, or an end-piece made of ceramic or sintered material.

10 In the embodiments incorporating a plug, the latter may be formed by any inert liquid or solid that is non-miscible with the contents of the tube and compatible with the latter. This may in particular be a liquid insoluble in the composition containing the hair colorant and which does not react with the latter. It must be capable of being readily expelled from the tube at the time of
15 use, and must also be physiologically acceptable. The plug serves in particular to isolate the test product from the air, to prevent its evaporation, and to prevent outside contaminants from entering the tube.

The quantity of liquid or powder forming the plug is small relative to that of the tube contents.

20 The plug may include a liquid, the latter being chosen preferably from the group comprising : mineral oils, fluorinated products, and silicones.

Alternatively the plug consists of a solid, preferably a powder, the latter being chosen from the group comprising : microsphere powders of copolymers, Nylon®, waxes, silicas, and silicones.

The hair coloring composition may be a direct coloring composition. It typically contains one or more direct colorants customarily used in hair coloring.

The term "direct colorant" means a colored and coloring molecule
5 having an affinity for keratinic fibers and soluble in a hair coloring base medium formed by water or a mixture of water and at least one organic solvent.

This or these direct colorant(s) can be non-ionic, anionic, cationic, or amphoteric in nature. They may be chosen for example from nitro-benzene
10 based direct colorants, anthraquinone-based direct colorants, triarylmethane-based direct colorants, and xanthenic, azoic and methinic direct colorants.

Alternatively, the hair coloring composition is an oxidation coloring composition containing at least one oxidation colorant. Oxidation colorants may be bases and/or coupling agents.

15 In the latter case, the system according to the invention may include a first test device containing an oxidation base present in the oxidation coloring composition, and a second test device containing a coupling agent present in the oxidation coloring composition, this solution having the advantage of being able to test the sensitizing nature of the base and the coupling agent
20 separately.

The system may additionally comprise a container holding an oxidizing composition to be mixed with the coloring composition in order to obtain said hair coloring product.

Suitable oxidation bases include para-phenylenediamines, para-
25 aminophenols, ortho-aminophenols, and heterocyclic bases such as pyridine, pyrimidine or pyrazole bases.

Suitable coupling agents include meta-aminophenols, meta-phenylenediamines, meta-diphenols, naphthols, heterocyclic coupling agents such as indol coupling agents, benzomorpholine coupling agents, pyridine coupling agents, and sesamol derivatives.

- 5 The hair coloring composition can be formulated with any customary oxidation coloring or direct coloring base medium capable of flowing freely under its own weight (liquid, fluid gel, or fluid cream).

This base medium may simply be water, with the possible addition of one or more solvents and one or more reducing agents and/or antioxidants.

- 10 The hair coloring composition advantageously contains at least one compound selected from surfactants and solvents other than water.

- The solvent agent is preferably selected from mono-alcohols such as, for example, ethanol or isopropanol, polyols such as, for example, glycerol or the propylene glycol, or ethers of these mono-alcohols or these polyols such
15 as, for example, propylene glycol monomethyl ether.

The surfactant(s) is (are) selected from non-ionic, anionic, cationic or amphoteric surfactants. They are preferably selected from polyoxyalkylene compounds such as, for example, polyoxyethylenes, polyoxypropylenes, or polyglycerols.

- 20 Hair coloring compositions suitable for use in the context of the present invention have been described in detail on numerous occasions, in particular in the patent literature. They do not therefore require additional detailed description.

- According to another aspect of the invention, a device capable of being
25 used in the system according to the invention is proposed. The device comprises a tube delimiting an internal space containing at least one direct

colorant, the tube incorporating an outlet aperture, the test device being arranged to cause the contents of the tube to be expelled from said outlet aperture of said tube when the latter is vented via at least one passage separate from the outlet aperture.

5 According to another aspect of the invention, a device capable of being used in the system according to the invention is proposed. The device comprises a tube delimiting an internal space containing at least one hair colorant and at least one compound selected from solvents, preferably other than water and surfactants, the tube incorporating an outlet aperture, the test
10 device being arranged to cause the contents of the tube to be expelled from said outlet aperture of said tube when the latter is vented via at least one passage separate from the outlet aperture.

 According to a further aspect of the invention, a device capable of being used in the system according to the invention is proposed. The device
15 comprises a tube delimiting an internal space containing at least one oxidation base and/or at least one coupling agent, the tube incorporating an outlet aperture, the test device being arranged to cause the contents of the tube to be expelled from said outlet aperture of said tube when the latter is vented via at least one passage separate from the outlet aperture.

20 Advantageously, a liquid or solid plug is arranged inside the tube, said plug serving to isolate the outlet aperture from the internal space of the tube, this plug being arranged to discharge together with said composition via the outlet aperture when the internal space of the tube is vented.

 The device may be used independently of the system, in particular by a
25 hairdresser in his/her salon.

 According to another aspect, the invention relates to the use of a test device including a tube delimiting an internal space containing :

i) either at least one direct colorant,

ii) or at least one hair colorant and at least one compound chosen from solvents and surfactants,

iii) or at least one oxidation base and/or at least one coupling agent,

5 the tube having an outlet aperture, the device being arranged so that the contents of the tube are expelled via said outlet aperture in response to excess pressure in the internal space of the tube, or when the latter is vented via at least one passage separate from the outlet aperture,

10 for testing the sensitivity of a subject, prior to a hair treatment with a hair coloring product.

Apart from the arrangements described above, the invention includes a certain number of other arrangements which will be explained below, in relation to non-limitative embodiments, described in reference to the attached drawings wherein :

15 - Figure 1 illustrates a hair coloring kit according to a particular embodiment of the invention ; and

- Figures 2-4 illustrate the principal stages in the operation of the test device contained in the coloring kit of Figure 1.

Figure 1 illustrates an oxidation coloring system 1 comprising

20 a) a packaging and applicator device 100 for an oxidation coloring product ; and

b) a test device 20 according to a preferred embodiment of the invention. This device will be described in detail with reference to the attached Figures 2-4.

The oxidation coloring system 100 may in particular be of the type as
5 described in patent US-A-4 823 946.

It comprises a first container 101 holding an oxidation composition, and a second container 102 holding the coloring composition. The first container 101 incorporates an applicator tip of which one end 103 can be cut off.

In the storage position illustrated in Figure 1, the container 101 is
10 above the container 102, the plug in the latter being inserted into a passage formed by an intermediate part 104 intended to link the two containers.

By way of example, the oxidation coloring composition held in the container 102 comprises :

	Polyglycerol oleic alcohol with 2 moles of glycerol.....	4 g
15	Polyglycerol oleic alcohol with 4 moles of glycerol (78% M.A).....	5.69 M.A.
	Oleic acid	3.0 g
	Oleylamine 2 OE marketed as ETHOMEEN O 12 by AKZO.....	7 g
	Diethylaminopropyl laurylamino succinamate, sodium salt 55% M.A....	3 g M.A.
	Oleic alcohol	5 g
20	Oleic acid diethanolamide	12 g
	Propylene glycol	3.5 g
	Ethyl alcohol	7.0 g
	Dipropylene glycol	0.5 g
	Propylene glycol monomethylether	9 g

	Sodium metabisulfite in aqueous solution at 35% M.A.	0.455 g M.A.
	Ammonium acetate	0.8 g
	Antioxidant, sequestering	q.s.
	Perfume, preserving	q.s.
5	Ammonia 20% NH ₃	10 g
	1,4-diamino-benzene	3.1 g
	1-hydroxy 2-amino-benzene	0.315 g
	1,3-dihydroxybenzene	0.6 g
	1-hydroxy 3-aminobenzene	0.95 g
10	1-beta-hydroxyethyloxy 2,4-diaminobenzene	0.7 g
	Demineralised water q.s.p.	100 g

When applying the color, the second container 102 is placed in engagement with the first 101, after first removing the cap. By rotating the containers relative to each other, mixing of the respective contents is facilitated.

The device 100 is shaken vigorously so as to homogenize the mixture.

The breakable tip 103 attached to the container 101 is then snapped off. The mixture is then applied in the conventional manner.

Although not illustrated in the drawing, the kit 1 may additionally include a certain number of accessories, in particular a pair of gloves. It generally also includes user instructions, a shampoo or a final treatment.

According to another preferred embodiment (not shown), the coloring composition and the oxidizing composition are packaged in two separate containers or packages the contents of which are mixed manually, preferably in the container holding the oxidizing composition, which container is fitted

with a detachable cap forming an applicator tip with a breakable end part. Once mixing has been completed in the container holding the oxidizing composition, it is applied in the conventional manner.

5 Figures 2 to 4 separately illustrate a test device 20 according to a preferred embodiment of the invention, designed to be used before the coloring product itself is applied.

For example, this may be an applicator such as that described in US patent 5 702 035, the content of which is incorporated herein by reference. Applicators of this type are marketed by the Californian company Swabplus
10 Inc.

The applicator 20 includes a tube 21 containing a coloring composition identical to that held in the container 102 of the coloring system described above. The tube does not contain any other composition; in particular, it does not contain an oxidation composition.

15 In the system illustrated, the tube is made by extrusion of transparent plastics material and is provided with a breakable part 22 at a closed end. In the example under consideration, this end is covered by a cotton tip. The tube 21 is open at the end opposite the breakable part 22 via an outlet aperture 29. The open end is fitted with an applicator element 23.

20 In the example shown, the applicator element 23 includes a cotton tip, in the manner of a cotton stick.

The coloring product is contained in an internal space in the tube 21 located between the breakable part 22 and a plug 24 present in the tube 21 towards the open end.

25 The volume of coloring product may vary for example between 0.01 ml and 5 ml, preferably between 0.05 and 1 ml. The outside diameter of the tube

21 is less than 6 mm for example, or less than 3 mm approximately. The inside diameter of the tube 21 may be between approximately 0.5 mm and approximately 3 mm, for example.

The plug 24 can be formed by any inert liquid or solid compatible with the packaging of the product in the tube 21, in particular a liquid that is insoluble in the coloring product and does not react with the latter. The plug must be capable of being readily expelled from the tube 21 at the time of use, and must also be physiologically acceptable. The plug 24 serves in particular to isolate the coloring product from the air, to prevent its evaporation and to prevent the ingress of external contaminants. In the example under consideration, the liquid plug 24 is made of silicone.

The quantity of liquid or powder forming the plug 24 is small relative to that of the coloring product.

When the breakable part 22 is snapped off, air can enter the tube 21 from the side opposite the open end and the coloring product can flow by gravity into the tube 21 and reach the applicator element 23 via the outlet aperture 29, as illustrated in Figures 3 and 4, to be applied wholly or partially to a suitable area of skin (behind the ear or in the crook of the elbow).

In the example under consideration, the cotton tip covering the breakable part 22 serves to keep the latter integral with the rest of the tube 21, even after it has been severed.

Before the coloring product is applied, the user carries out a patch test using the device 20 in accordance with the procedure described in reference to figures 2-4.

If the test is successful (no reaction after 48 hours), the user can then proceed to apply the coloring product to the hair in the conventional manner

after making up the mixture in accordance with the procedure described in reference to Figure 1.

According to another embodiment not illustrated, the hair coloring composition is a direct coloring composition marketed in a set including a container holding the direct coloring composition and a test device such as
5 that described in reference to the previous embodiment.

A specimen formula of a direct coloring composition held in the container and in the patch test device is given below :

N-lauryl N-carboxymethyl N'-hydroxyethyl N'-carboxymethyl		
10	1,3-diamino propane (36% M.A.)	9.4595 g
	Oleocetyl dimethyl hydroxyethyl ammonium chloride (30% M.A.)	4.7 g
	Oxyethylene lauryl alcohol (12 OE)	9.35 g
	Glycol distearate	1 g
	Oxyethylene diethylethanolamine cocoate (4.5 OE)	2.135 g
15	Lactic acid	0.92 g
	Sodium carboxymethyl cellulose	1.2 g
	Perfume	q.s.
	1-hydroxy 2-amino 4,6-dinitro-benzene	1.1g
	1,4-diamino 2-nitro-benzene	0.33 g
20	Demineralised water	q.s.p. 100 g

In the foregoing detailed description reference is made to preferred embodiments of the invention. It is evident that variants thereto can be proposed without departing from the spirit of the invention as claimed herebelow.

CLAIMS

1. – Hair coloring system (1) comprising :

i) at least one container (102) holding a coloring composition forming or intended to form a hair coloring product ; and

5 ii) at least one test device (20) designed to perform a test and incorporating a tube (21) delimiting an internal space containing at least one hair colorant of said coloring composition, the tube incorporating an outlet aperture (29), the test device (20) being arranged in a manner such that the contents of the tube are expelled from said outlet aperture in response to
10 excess pressure within the internal space of the tube or when the latter is vented via at least one passage (22) separate from the outlet aperture (29).

2. - System according to claim 1, characterized in that a liquid or solid plug (24) is arranged inside the tube (21), said plug serving to isolate the outlet aperture (29) from the internal space of the tube (21), the plug being
15 arranged to discharge together with the contents of the tube via the outlet aperture (29) when the internal space of the tube is vented or in response to excess pressure inside the latter.

3. - System (1) according to claim 1 or 2, characterized in that the volume contained in the tube (21) is between 0.01 ml and 5 ml, preferably
20 0.05 ml and 1 ml.

4. - System (1) according to any one of claims 1 to 3, characterized in that venting of the internal space of the tube (21) is effected via an element (22) that can be severed, detached, perforated or deformed, and which is located opposite the outlet aperture.

5. - System (1) according to claim 4, characterized in that the test device (20) incorporates an element to hold the breakable element (22) on the tube after it has been severed, in particular in the form of a tab of residual material or a piece of cotton.

5 6. - System (1) according to claim 2, characterized in that the tube (21) is fitted with an applicator element (23), this applicator element being separated from the contents of tube prior to use by the plug of liquid or powder (24).

7. - System (1) according to claim 6, characterized in that the applicator
10 element is selected from the group of items comprising: a cotton tip (23), a brush, a foam tip, a felt pad, a flock tip, or an end-piece made of ceramic or sintered material.

8. - System (1) according to claim 2 or according to any one of the foregoing claims dependent thereon, characterized in that the plug includes a
15 liquid, and in that the latter is selected from the group of materials comprising : mineral oils, fluorinated products, and silicones.

9. - System (1) according to claim 2 or according to any one of claims 3 to 7 dependent thereon, characterized in that the plug (24) includes a solid, in particular a powder, and in that the latter is selected from the group
20 comprising: microsphere powders of copolymers, Nylon®, waxes, silicas, and silicones.

10. - System (1) according to any one of claims 1 to 9, characterized in that the coloring composition is an oxidation coloring composition containing at least one oxidation colorant.

25 11. - System according to claim 10, characterized in that it additionally includes a container (101) holding an oxidizing composition to be mixed with said coloring composition in order to obtain said hair coloring product.

12. - System (1) according to any one of claims 1 to 9, characterized in that said coloring composition is a direct coloring composition containing at least one direct colorant.

13. - System according to any one of claims 10 to 12, characterized in that said coloring composition contains at least one hair colorant and at least one compound chosen from surfactants and solvents other than water.

14. - Test device (20) capable of being used in a hair coloring system (1) according to any one of claims 1 to 13, the device including a tube (21) delimiting an internal space containing :

10 i) either at least one direct colorant,

ii) or at least one hair colorant and at least one compound chosen from solvents and surfactants,

iii) or at least one oxidation base and/or at least one coupling agent,

15 the tube having an outlet aperture (29), the device being arranged so that the contents of the tube are expelled via said outlet aperture of said tube when the latter is vented via at least one passage (22) separate from the outlet aperture (29).

20 15. - Device according to claim 14, characterized in that a liquid or solid plug (24) is arranged inside the tube (21), said plug serving to isolate the outlet aperture (29) from the internal space of the tube (21), the plug being arranged to discharge together with the contents of the tube via the outlet aperture (29) when the internal space of the tube is vented.

16. - Use of a test device (20) including a tube (21) delimiting an internal space containing :





i) either at least one direct colorant,

ii) or at least one hair colorant and at least one compound chosen from solvents and surfactants,

iii) or at least one oxidation base and/or at least one coupling agent,

5 the tube having an outlet aperture (29), the device being arranged so that the contents of the tube are expelled via said outlet aperture in response to excess pressure in the internal space of the tube, or when the latter is vented via at least one passage (22) separate from the outlet aperture (29),

10 for testing the sensitivity of a subject, prior to a hair treatment with a hair coloring product.

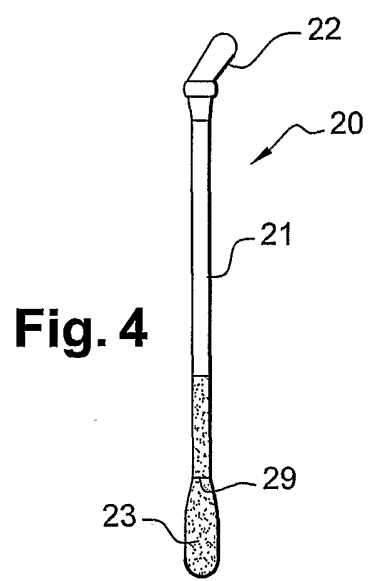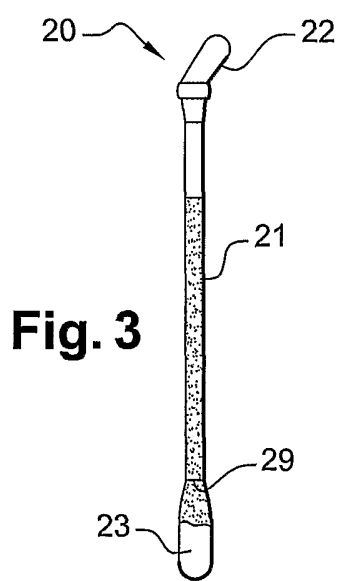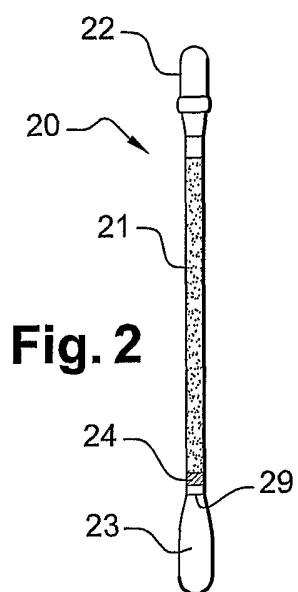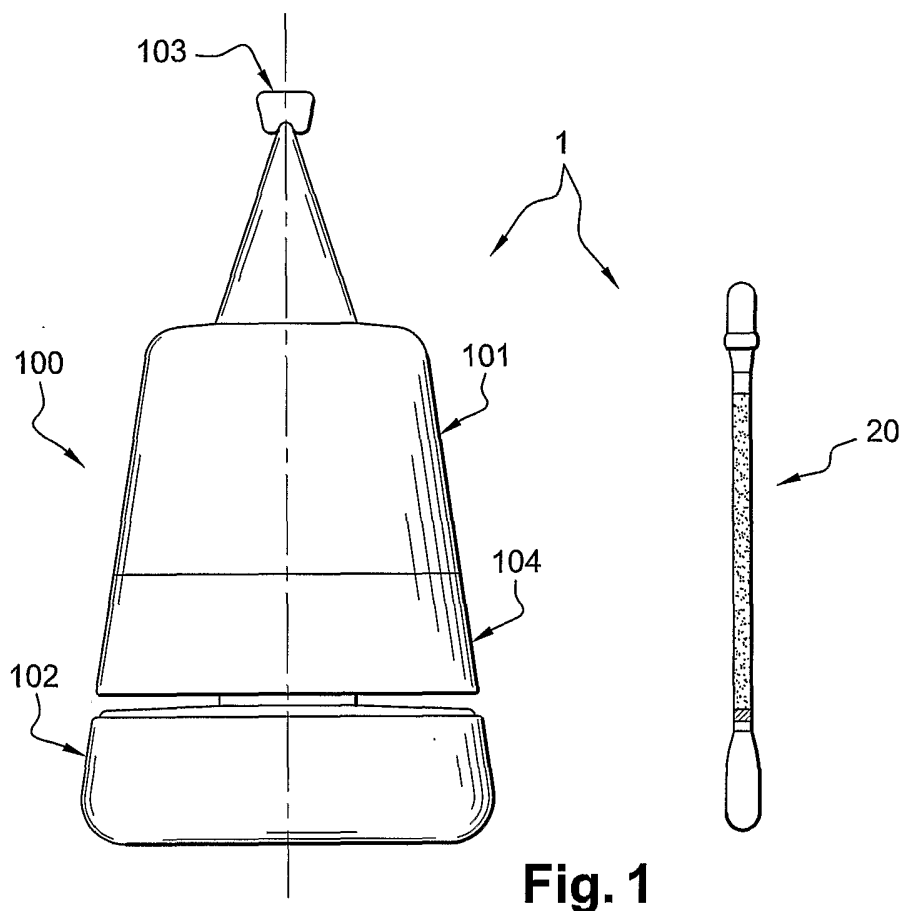

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP2004/007199

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A45D34/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A45D B05C A61M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	FR 2 806 271 A (OREAL) 21 September 2001 (2001-09-21) cited in the application page 1, last paragraph page 5, line 9 - line 17 -----	1, 2, 4, 6-8, 10-16
Y	US 6 343 717 B1 (ZHANG JACK YONGFENG ET AL) 5 February 2002 (2002-02-05) the whole document -----	1, 2, 4, 6-8, 10-16
A	FR 2 487 223 A (WELLA AG) 29 January 1982 (1982-01-29)	1
X	page 1, lines 1-7, 30-35 page 2, line 12 - line 33 page 3, last paragraph; figures 1, 4 ----- -/--	14



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

26 October 2004

Date of mailing of the international search report

03/11/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Vesin, S

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP2004/007199

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	FR 2 487 788 A (CONTE SA) 5 February 1982 (1982-02-05)	1
X	page 1, paragraph 1; figure 4 page 9, line 35 - page 10, line 11 -----	14
A	US 4 875 602 A (CHICKERING ROBERT ET AL) 24 October 1989 (1989-10-24) the whole document -----	1,2,4,6, 7,9,14, 15
A	EP 0 553 534 A (TSAO CHIEN HUA) 4 August 1993 (1993-08-04) the whole document -----	1,2,4,6, 7,14

INTERNATIONAL SEARCH REPORT

 International Application No
 PCT/EP2004/007199

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
FR 2806271	A	21-09-2001	FR 2806271 A1	21-09-2001
			AT 249376 T	15-09-2003
			DE 60100717 D1	16-10-2003
			DE 60100717 T2	15-07-2004
			EP 1136386 A1	26-09-2001
			ES 2206381 T3	16-05-2004
			US 2002030064 A1	14-03-2002
US 6343717	B1	05-02-2002	AU 1329102 A	03-06-2002
			BR 0108028 A	05-11-2002
			CA 2398919 A1	30-05-2002
			CN 1131820 B	24-12-2003
			EP 1252075 A1	30-10-2002
			JP 2004514605 T	20-05-2004
			WO 0242175 A1	30-05-2002
FR 2487223	A	29-01-1982	DE 8019719 U1	16-10-1980
			ES 259629 Y	16-08-1982
			FR 2487223 A3	29-01-1982
			JP 57036209 U	25-02-1982
FR 2487788	A	05-02-1982	FR 2487788 A1	05-02-1982
			EP 0045690 A2	10-02-1982
			ES 268572 Y	01-12-1983
US 4875602	A	24-10-1989	NONE	
EP 0553534	A	04-08-1993	AU 2095292 A	29-07-1993
			CA 2075758 A1	29-07-1993
			CN 2157140 U	23-02-1994
			EP 0553534 A1	04-08-1993
			ZA 9205972 A	28-04-1993