



(22) Date de dépôt/Filing Date: 2015/01/09

(41) Mise à la disp. pub./Open to Public Insp.: 2015/09/19

(45) Date de délivrance/Issue Date: 2017/07/11

(30) Priorité/Priority: 2014/03/19 (US14/219,737)

(51) Cl.Int./Int.Cl. *B29C 70/18* (2006.01)


(72) Inventeur/Inventor:  
COXON, BRAD ANDREW, US

(73) Propriétaire/Owner:  
THE BOEING COMPANY, US

(74) Agent: SMART & BIGGAR

(54) Titre : FABRICATION DE PRODUITS LAMELLES COMPOSITES A L'AIDE DE PREFORMES COUSUES  
TEMPORAIREMENT

(54) Title: FABRICATION OF COMPOSITE LAMINATES USING TEMPORARILY STITCHED PREFORMS

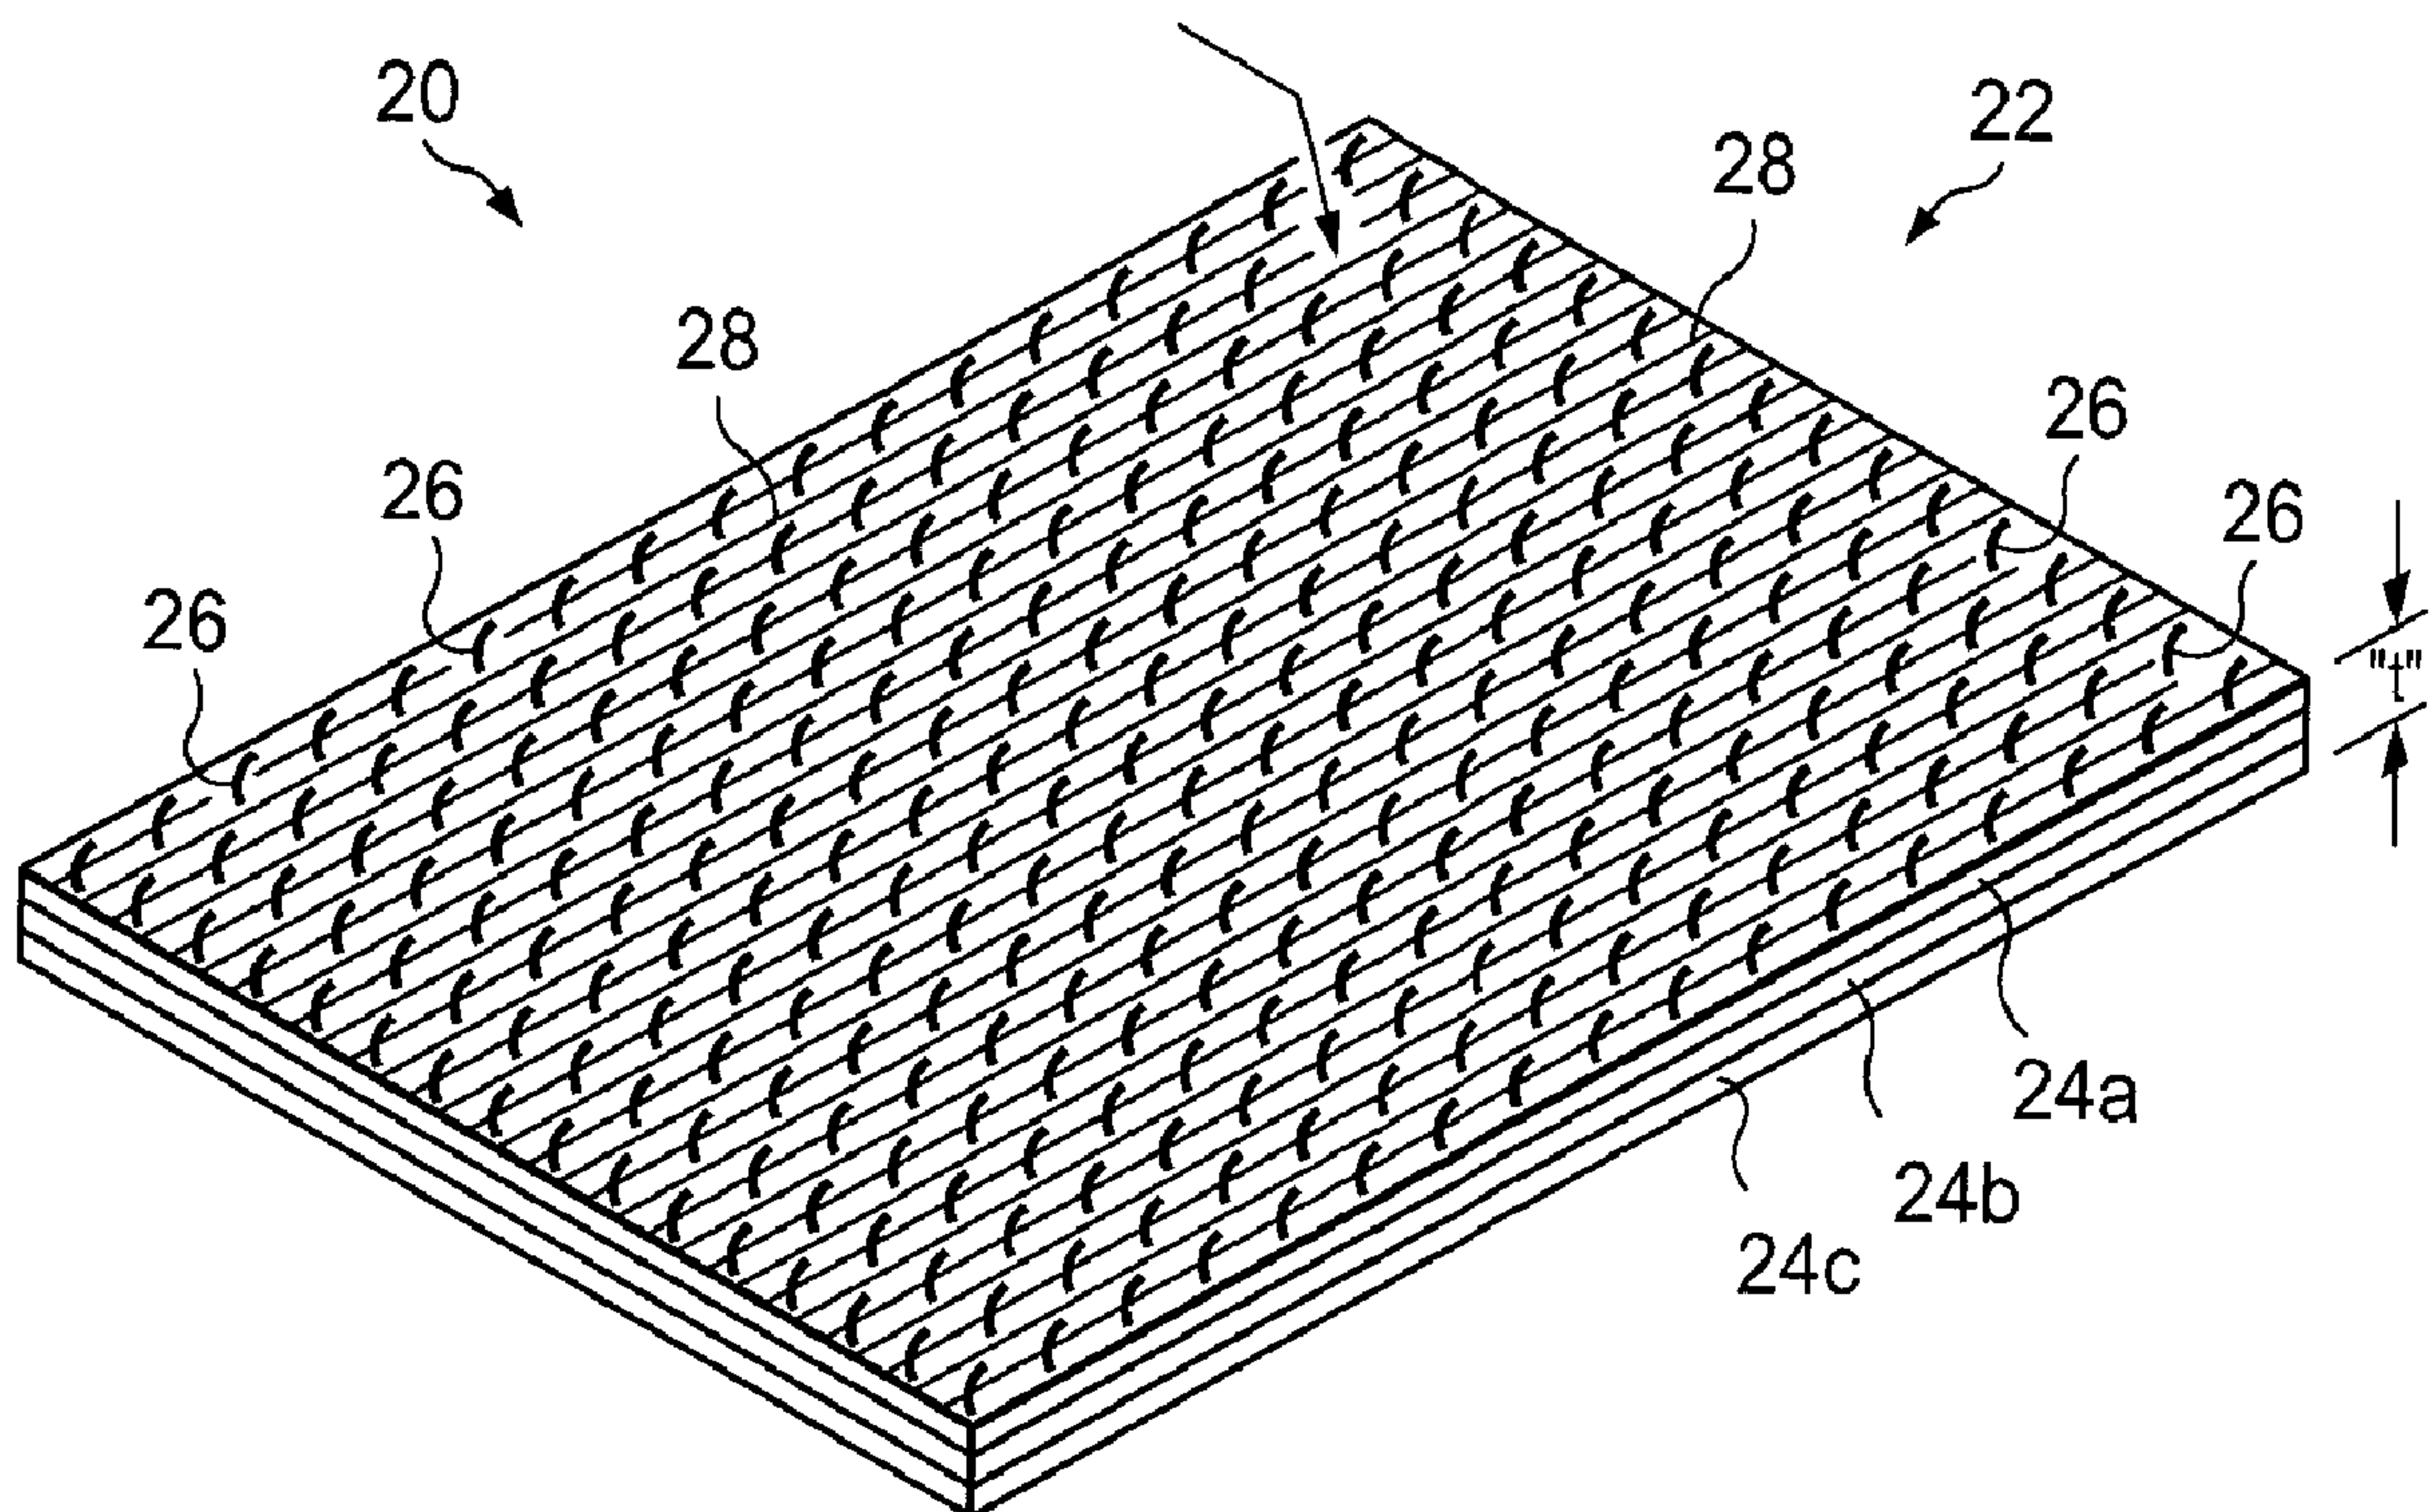

(57) Abrégé/Abstract:

A composite structure is fabricated using a preform comprising a stack of unidirectional prepreg plies that are stitched together. During curing of the prepreg, the stitches melt and dissolve.

## **ABSTRACT**

A composite structure is fabricated using a preform comprising a stack of unidirectional prepreg plies that are stitched together. During curing of the prepreg, the stitches melt and dissolve.

## **FABRICATION OF COMPOSITE LAMINATES USING TEMPORARILY STITCHED PREFORMS**

### **BACKGROUND INFORMATION**

#### **1. Field:**

The present disclosure generally relates to preforms used in the fabrication of composite laminate structures, and deals more particularly with a temporarily stitched preform.

#### **2. Background:**

High performance composite structures may be fabricated by laying up plies of prepreg or by resin infusion of dry fibers. The fibers may be in unidirectional, woven or braided fabric form. In some applications, in order to reduce layup time, adjacent plies of the fabric may be co-stitched together using stitch material that remains with the completed structure after the structure is cured. Stitching the plies together allows the plies to be laid up on a tool in ply groups, rather than one-by-one, thereby increasing efficiency of the layup process. Co-stitched fabric plies formed from unidirectional reinforcement fibers are relatively formable, making them well-suited for forming highly contoured structures, however structures fabricated using stitched plies may have less than the desired level of strength and crack resistance.

Accordingly, there is a need for a method of fabricating composite structures using co-stitched plies of fabric which reduces or eliminates the presence of stitch material in the cured structure. There is also a need for a preform used in the fabrication of such structures that can be assembled using a co-stitched, multi-layer prepreg, or co-stitched fiber layers suitable for resin infusion.



## SUMMARY

The disclosed embodiments provide a method of fabricating a composite laminate structure using a co-stitched multi-layer preform. In one embodiment, the preform is formed by stitching together plies of unidirectional prepreg using stitch material that melts during curing of the prepreg. In another embodiment, the preform is formed by stitching together multiple fiber layers using stitch material that melts during curing of resin used to infuse the fiber layers. Melting of the stitch material during the cure process effectively dissolves the stitches and avoids possible crimping between the stitches and the reinforcing fibers. Dissolution of the stitches reduces or eliminates stress concentrations in the cured structure caused by fiber crimping, thereby improving the mechanical performance of the composite laminate structure while reducing the possibility of crack propagation through the laminate. The use of a co-stitched multi-ply preform may increase production efficiency by allowing simultaneous layup and forming of multiple layers of fiber reinforcements.

According to one disclosed embodiment, a method is provided of fabricating a composite structure. Prepreg plies are stitched together into a stitched stack of prepreg plies having varying fiber orientations, and the stitched stack of prepreg plies is thermally cured. The stitching melts during thermal curing of the stitched stack of prepreg plies. The method may further comprise assembling the prepreg plies into a stack, wherein each of the prepreg plies has resin tack, and assembling the prepreg plies into the stack includes using the resin tack to adhere the plies together and maintain the fiber orientations of the prepreg plies during the stitching. Stitching the prepreg plies together is performed by using stitches that pass substantially through the thickness of the stack. Assembling the prepreg plies into a stack includes laying down prepreg tows, and varying the fiber orientations of the tows for each of the plies. The method may also comprise debulking, consolidating and curing the stitched stack under a vacuum. Melting the stitching is performed before the stitched stack of prepreg plies is fully cured. The method may further

comprise forming the stitched stack of prepreg plies into a desired shape corresponding to the shape of the composite structure.

According to another embodiment, a method is provided of making a composite preform. A stack of prepreg plies is assembled, wherein each of the plies includes reinforcing fibers held in a thermally curable resin matrix. The prepreg plies are stitched together after the stack has been assembled. The stitching is performed using stitching material that melts during thermal curing of the prepreg plies. Assembling the stack of prepreg plies includes maintaining the plies in registration relative to each other by tacking the plies together. Tacking the plies together is performed using tack of the resin matrix in each of the plies. Assembling the stack of prepreg plies includes using the resin matrix in each of the prepreg plies to hold the reinforcing fibers in the plies in spaced relationship to each other during the stitching. The stitching includes placing stitches substantially completely through the thickness of the stack of prepreg plies. The stack may be assembled by laying prepreg tows, and the stitching may be carried out by placing stitches between the prepreg tows that pass substantially completely through the stack of prepreg plies. During assembly of the stack, the plies are oriented such that they have differing fiber orientations.

According to still another embodiment, a composite preform is provided. The preform comprises a stack of unidirectional prepreg plies having varying fiber orientations. Stitches passing through all of the prepreg plies in the stack hold the plies together. The stitches are formed of a stitching material capable of melting during thermal curing of the prepreg plies. Each of the prepreg plies includes prepreg tows, and the stitches pass between the prepreg tows. The stitches may be distributed generally uniformly across the stack of unidirectional prepreg plies. Each of the prepreg plies includes a resin matrix, and the stitching material is compatible with the resin matrix. The resin matrix may be a thermoset resin, and the stitching material may be a thermoplastic resin. The thermoset resin has a cure temperature at which the thermoset resin is fully cured, and the thermoplastic resin has a melt temperature that is below the cure temperature of the thermoset resin.



According to still another embodiment, a method is provided of fabricating a composite structure. Dry fiber plies are stitched together into a stitched stack of dry fiber plies having varying fiber orientations. The stack of dry fiber plies is infused with a polymer resin. The resin infused stack is thermally cured. The stitching melts during thermal curing of the stitched stack. The method may also include debulking, consolidating and curing the stitched stack under a vacuum. Stitching the dry fiber plies together is performed using stitches that pass substantially through the entire thickness of the stack. The method may also comprise applying a tackifier to each of the dry fiber plies, and assembling the dry fiber plies into a stack, including using the tackifier to adhere the dry fiber plies together and maintain the fiber orientations of the dry fiber plies during the stitching. Assembling the dry fiber plies into a stack includes laying down dry fiber tows, and varying the fiber orientations of the dry fiber tows for each of the dry fiber plies. The method may further comprise forming the stitched stack of dry fiber plies into a desired shape corresponding to the shape of the composite structure. The forming may be performed by forming the stitched stack of dry fiber plies onto a tool such as a mold.

According to another embodiment, a method is provided of making a dry fiber preform. The method comprises assembling a stack of dry fiber plies, each of which includes unidirectional reinforcing fibers. The dry fiber plies are stitched together after the stack has been assembled. The stitching is performed using stitches that pass through the stack and melt when they have been heated to a predetermined temperature. The method may also include applying a tackifier to each of the dry fiber plies, and assembling the stack of dry fiber plies includes using the tackifier to maintain the plies in registration relative to each other.

In summary, according to one embodiment there is provided a method of fabricating a composite structure, including stitching prepreg plies together into a stitched stack of prepreg plies having varying fiber orientations; thermally curing the stitched stack of prepreg plies; and melting the stitching during thermal curing of the stitched stack of prepreg plies.

The method may further include assembling the prepreg plies into a stack, wherein each of the prepreg plies has resin tack, and assembling the prepreg plies into the stack may include using the resin tack to adhere the plies together and maintain the fiber orientations of the prepreg plies during the stitching.

The stack may have a thickness, and stitching the prepreg plies together may be performed by using stitches that pass substantially through the thickness of the stack.

Assembling the prepreg plies into a stack may include laying down prepreg tows, and varying the fiber orientations of the tows for each of the plies.

The method may further include debulking, consolidating and curing the stitched stack under a vacuum.

Melting the stitching may be performed before the stitched stack of prepreg plies is fully cured.

The method may further include forming the stitched stack of prepreg plies into a desired shape corresponding to the shape of the composite structure.

Forming the stitched stack of prepreg plies may be performed before stitching the prepreg plies together.

Forming the stitched stack of prepreg plies may be performed after stitching the prepreg plies together.

According to another embodiment there is provided a method of making a composite preform, including assembling a stack of prepreg plies, each of the plies including reinforcing fibers held in a thermally curable resin matrix; and, stitching the prepreg plies together after the stack has been assembled, wherein the stitching is performed using stitching material that melts during thermal curing of the prepreg plies.

Assembling the stack of prepreg plies may include maintaining the plies in registration relative to each other by tacking the plies together.

Tacking the plies together may be performed using tack of the resin matrix in each of the plies.



Assembling the stack of prepreg plies may include using the resin matrix in each of the prepreg plies to hold the reinforcing fibers in the plies in spaced relationship to each other during the stitching.

The stack of prepreg plies may have a thickness, and the stitching may include placing stitches substantially completely through the thickness of the stack of prepreg plies.

Assembling the stack of prepreg plies may include laying prepreg tows, and the stitching may include placing stitches between the prepreg tows substantially completely through the stack of prepreg plies.

Assembling the stack of prepreg plies may include orienting the plies such that they have differing fiber orientations.

According to yet another embodiment there is provided a composite preform, including a stack of unidirectional prepreg plies having varying fiber orientations; and stitches passing through all of the prepreg plies in the stack and capable of holding the plies together, wherein the stitches are formed of a stitching material capable of melting during thermal curing of the prepreg plies.

Each of the prepreg plies may include prepreg tows.

The stitches may pass between the prepreg tows.

The stitches may be distributed generally uniformly across the stack of unidirectional prepreg plies.

Each of the prepreg plies may include a resin matrix, and the stitching material may be compatible with the resin matrix.

The resin matrix may be a thermoset resin, and the stitching material may be a thermoplastic resin.

The thermoset resin may have a cure temperature at which the thermoset resin is fully cured, and the thermoplastic resin may have a melt temperature that is below the cure temperature of the thermoset resin.

According to yet another embodiment there is provided a method of making a composite preform, including assembling a stack of prepreg plies, each of the plies including reinforcing fibers held in a thermally curable resin matrix; and, stitching the prepreg plies together after the stack has been assembled, wherein the



stitching is performed using stitching material that melts during thermal curing of the prepreg plies.

Assembling the stack of prepreg plies may include maintaining the plies in registration relative to each other by tacking the plies together.

Tacking the plies together may be performed using tack of the resin matrix in each of the plies.

Assembling the stack of prepreg plies may include using the resin matrix in each of the prepreg plies to hold the reinforcing fibers in the plies in spaced relationship to each other during the stitching.

The stack of prepreg plies may have a thickness, and the stitching may include placing stitches substantially completely through the thickness of the stack of prepreg plies.

The stack of prepreg plies may include laying prepreg tows, and the stitching may include placing stitches between the prepreg tows substantially completely through the stack of prepreg plies.

Assembling the stack of prepreg plies may include orienting the plies such that they have differing fiber orientations. According to still another embodiment there is provided a method of fabricating a composite structure, including stitching dry fiber layers together into a stitched stack of dry fiber layers having varying fiber orientations; infusing the stitched stack of dry fiber layers with a polymer resin; thermally curing the stitched stack of dry fiber layers; and melting the stitching during thermal curing of the stitched stack of dry fiber layers.

The method may further include debulking, consolidating and curing the stitched stack under a vacuum.

The stack may have a thickness, and stitching the dry fiber layers together may be performed by using stitches that pass substantially through the thickness of the stack.

The method may further include applying a tackifier to each of the dry fiber layers; and assembling the dry fiber layers into a stack, including using the tackifier to adhere the dry fiber layers together and maintain the fiber orientations of the dry fiber layers during the stitching.

Assembling the dry fiber layers into a stack may include laying down dry fiber tows, and varying the fiber orientations of the dry fiber tows for each of the dry fiber layers.

The method may further include forming the stack of dry fiber layers into a desired shape corresponding to the shape of the composite structure.

Forming the stack may be performed before stitching the dry fiber layers together.

Forming the stack may be performed after stitching the dry fiber layers together.

Forming the stack of dry fiber layers may include forming the stitched stack of dry fiber layers onto a tool.

Forming the stack of dry fiber layers onto a tool may include placing the stack in a mold, and infusing the stack of dry fiber layers includes introducing a polymer resin into the mold under a vacuum.

According to a further embodiment there is provided a method of making a dry fiber preform, including assembling a stack of dry fiber layers, each of the layers including unidirectional reinforcing fibers; and, stitching the dry fiber layers together after the stack has been assembled, wherein the stitching is performed using stitches that pass through the stack and melt when heated to a predetermined temperature.

The method may further include applying a tackifier to each of the dry fiber layers, and wherein assembling the stack of dry fiber layers includes using the tackifier to maintain the layers in registration relative to each other.

The features, functions, and advantages can be achieved independently in various embodiments of the present disclosure or may be combined in yet other embodiments in which further details can be seen with reference to the following description and drawings.

## BRIEF DESCRIPTION OF THE DRAWINGS

The novel features believed characteristic of the illustrative embodiments are set forth in the appended claims. The illustrative embodiments, however, as well as a preferred mode of use, further objectives and advantages thereof, will best be understood by reference to the following detailed description of an illustrative embodiment of the present disclosure when read in conjunction with the accompanying drawings, wherein:

Figure 1 is an illustration of a top perspective view of a stitched preform.

Figure 2 is an illustration of a bottom perspective view of the stitched preform shown in Figure 1.

Figure 3 is an illustration of a perspective view of a curved frame section that may be fabricated using a stitched preform.

Figure 4 is an illustration of an exploded, perspective view of the stitched preform of Figure 1, showing the individual layers of the preform and their respective fiber orientations.

Figure 5 is an illustration of a plan view of the area designated as "FIG. 5" in Figure 1.

Figure 6 is an illustration of a sectional view taken along the line 6-6 in Figure 5.



Figure 7 is an illustration of a sectional view showing a portion of a stitch between two tows at an early stage of curing.

Figure 8 is an illustration similar to Figure 7, but showing the stitch having melted into the surrounding matrix resin during a later stage of the curing.

Figure 9 is illustration of a flow diagram of a method of fabricating a composite structure using a stitched prepreg preform.

Figure 10 is an illustration of a flow diagram of a method of fabricating a stitched prepreg preform.

Figure 11 is an illustration of a flow diagram of an alternate method of fabricating a composite structure using a stitched, dry fiber preform.

Figure 12 is an illustration of a flow diagram of aircraft production and service methodology.

Figure 13 is an illustration of a block diagram of an aircraft.

## DETAILED DESCRIPTION

Referring to Figures 1 and 2, a composite preform 20 comprises a stitched stack 22 of prepreg plies 24a, 24b, 24c each of which has unidirectional reinforcement in the form of fiber tows 28. The prepreg plies 24a, 24b, 24c in the stack 22, sometimes also referred to herein as “layers”, are tacked together by stitches 26 that extend through the thickness of the stack 22. Only the top and bottom of the stitches 26 are shown, respectively, in FIGS. 1 and 2. The preform 20 may be used to fabricate any of a variety of composite structures, particularly those having simple or compound contours. For example, referring to Figure 3, the preform 20 may be employed to fabricate a unitary composite frame section 30 by forming the stack 22 of prepreg plies 24a, 24b, 24c using suitable tooling (not shown), either before or after the prepreg plies 24a, 24b, 24c are stitched together. In this example, the frame section 30 is curved along its length and comprises a curved inner chord flange 34, a curved outer chord flange 36 and a web 32. The flanges 34, 36 transition into the web 32 along radius corners 38, 40 which have

compounded curvatures. The frame section **30** is merely illustrative of a wide range of composite laminate structures that may be fabricated using the disclosed preform **20**. The frame section **30** shown in Figure 3 has a Z-shaped cross section, however other cross-sectional shapes are possible.

Referring particularly to Figures 1, 2 and 4, although three plies **24a**, **24b**, **24c** are shown in the exemplary embodiment, the stack **22** may comprise as few as two or greater than three plies **24**, depending upon the application. In the embodiment illustrated in Figures 1, 2 and 4, each of the plies **24a**, **24b**, **24c** comprises a plurality of unidirectional prepreg tows **28** that may be placed in multiple, side-by-side bandwidths (not shown) by automatic fiber placement equipment (not shown) or by other techniques. However, as will be discussed later, the stitched stack **22** may comprise a stitched stack of dry fiber layers **24a**, **24b**, **24c** of unidirectional dry fibers that may be in the form of tows, unidirectional tape, cut patterns of unidirectional reinforcement or other forms.

The prepreg tows **28** each comprise a bundle of individual reinforcing fibers (not shown) that is pre-impregnated with a suitable resin which will be discussed later in more detail. Each of the plies **24a**, **24b**, **24c** may have any desired fiber orientation, but in the illustrated example shown in Figure 4, respectively have  $0^\circ$ ,  $90^\circ$  and  $0^\circ$  fiber orientations. In one embodiment, the prepreg tows **28** may have a generally circular cross-sectional shape (see Figure 6), while in another embodiment, the prepreg tows **28** may have a generally flat cross-sectional shape (not shown), sometimes referred to as a “flat tow” or a “spread tow”.

The resin used to impregnate the tows **28** may comprise a thermally curable resin that is suitable for the application and has a desired cure temperature. For example and without limitation, the reinforcing fibers may comprise carbon and the resin used as the matrix may comprise a thermally curable thermoset resin such as epoxy. Other types of reinforcing fibers are possible, such as without limitation, metal, ceramic and/or glass fibers. Other types of resins may be employed as the matrix, depending upon the application, such as, without limitation polyester resins,



vinyl ester resins, phenolic resins, polyimide resins, PBI (polybenzimidazole) resins, and BMI (bismaleimide) resins.

The presence of resin impregnated into the tows **28** causes the tows **28**, and thus the plies **24a**, **24b**, **24c** to have resin tack, and this resin tack causes the plies **24a**, **24b**, **24c** to adhere to each other when they are laid up on top of each other. The adhesion provided by the resin tack holds the plies **24a**, **24b**, **24c** in registration with each other and in their desired ply orientations during subsequent processing discussed below in more detail. The matrix resin also holds the tows **28** of the plies **24** in spaced relationship to each other through the thickness "t" of the stack **22**. In some applications, it may be necessary or desirable to apply a tackifier to the plies **24a**, **24b**, **24c** to increase the adhesion between the plies **24a**, **24b**, **24c**. Similarly, where the tows **28** are dry (not impregnated with resin), a tackifier, sometimes referred to as a binder, may be used to adhere the layers **24a**, **24b**, **24c** together and maintain their respective fiber orientations until the stitched stack **22** can be formed into a desired shape.

The stitches **26** pass between the tows **28** and hold the plies **24a**, **24b**, **24c** in their desired ply orientations. The number, density, size, spacing and type of the stitches **26** used will depend upon the application. Similarly, the tightness of the stitches **26** may vary, depending upon the number of plies **24** in the stack **22** and the complexity of the composite structure being fabricated. For example, where the composite structure is highly contoured, it may be desirable to employ relatively loose stitches **26** in order to allow the plies **24a**, **24b**, **24c** to slip slightly in-plane relative to each other as they are being formed over tooling. Slight in-plane slippage between the plies **24a**, **24b**, **24c** may allow the stack **22** to better conform to contoured tool surfaces and avoid ply wrinkling and/bunching.

Referring now particularly to Figures **5** and **6**, any of various types of stitches **26** may be employed to stitch the plies **24a**, **24b**, **24c** together provided that the stitches **26** pass through substantially the entire thickness "t" (Figure **1**) of the stack **22**, between any adjacent tows **28** in each of the plies **24a**, **24b**, **24c**. In the illustrated embodiment, the stitches **26** are effectively looped around the tows **28**,



and extend diagonally across the stack **22**. However, in other embodiments, the stitches **26** may not be looped around all of the tows **28**, and may extend in any direction across the stack **22**. The stitches **26** may be formed and spaced apart from each other in any of a variety of manners, providing that they adequately hold the plies **24a**, **24b**, **24c** together as the stack **22** is being formed over tooling (not shown) employed to shape the stack **22** into the desired shape of the composite structure. In some embodiments, however, it may be possible to stitch the plies **24a**, **24b**, **24c** together after the stack **22** has been formed into a desired shape.

The material from which the stitches **26** is formed (hereinafter "stitch material") may comprise any of a variety of polymer resins that is compatible with the matrix resin of the tows **28**, and which has a melt temperature that results in melting of the stitches **26** during thermal curing of the matrix resin. For example, the stitch material may comprise a thermoplastic resin such as, without limitation, PEI (polyetherimide) PPS (polyphenylene sulphide), PES (polyethersulfone), PEEK (polyetheretherketone), PEKK (polyetheretherketone), and PEKK-FC (polyetherketoneketone-fc grade), which has a relatively low melt temperature that is within the range of temperatures required to cure the matrix resin. For example, where the matrix resin is an epoxy that cures at approximately **180°C**, the stitch material may comprise a thermoplastic resin having a low melt temperature in the range of **150°C**. In this example, the thermoplastic resin melts and combines with the flowable thermoset resin before the thermoset resin begins to substantially cure and harden. In one embodiment, a thermoplastic stitch material is selected which remains intact to provide the necessary support of the plies **24a**, **24b**, **24c**, **24d** as the matrix resin melts and initially becomes flowable. The thermoplastic stitch material may begin to melt and dissolve into the matrix resin **44** only after the viscosity of the matrix resin **44** begins to increase as the matrix resin **44** begins to harden during its initial stage of curing. Consolidation of the composite laminate structure is accomplished under vacuum which is used to debulk the plies **24a**, **24b**, **24c** and hold the plies **24a**, **24b**, **24c** together without movement while the stitches **26** melt into the resin and the structure cures-consolidates.

Figure 7 illustrates a cross-sectional side view of one of the stitches **26** during an early stage of a cure cycle in which the formed composite laminate structure is cured and consolidated by subjecting it to heat and pressure applied by a vacuum bag and/or an autoclave. The combination of applied heat and pressure causes the matrix resin **44** to begin to flow, and consolidate the plies **24a**, **24b**, **24c**. The resin flow comes from the matrix resin **44** that is impregnated into the tows **28**. At this point in the cure cycle, the stitches **26** have not yet been heated to their melt temperature, and therefore remain intact. As the temperature is further increased during the cure cycle however, the stitch material begins to melt and flow **42** into the surrounding matrix resin **44** which is still flowable, until, as shown in Figure 8, the stitch material is fully dissolved within regions **46** of the matrix resin **44**. The applied pressure aids in causing the stitch material and the matrix resin **44** to flow together and mix with each other. Depending upon the particular polymer resin selected for use as stitches **26**, the dissolved stitch material may assist in toughening the matrix resin **44**, and may increase mechanical properties, such as impact resistance, of the cured composite structure.

Attention is now directed to Figure 9 which broadly illustrates the overall steps of a method of fabricating a composite laminate structure using a stitched prepreg. Beginning at step **48**, a stack **22** of unidirectional prepreg plies is assembled wherein plies may have varying fiber orientations. Then at step **50**, after the prepreg plies having been assembled into a stack **22**, the stack **22** may be formed into a desired shape using tooling or other forming techniques. In some embodiments, however it may be possible to layup the preform **20** in a particular stack shape and then stitch the plies of the preform **20** together. In other words, the stitching of step **50** may be carried out after the forming of step **52**. At step **54**, the stitched and formed stack **22** is thermally cured, as by placing the stack **22** into an oven or an autoclave. At **55**, during thermal curing of the stitched stack **22**, the stitching material that melts, causing the stitches to dissolve into the surrounding matrix resin **44** undergoing curing.



Figure 10 broadly illustrates the overall steps of a method of making a prepreg preform **20** using prepreg plies that are stitched together with stitching material that melts during subsequent curing of the prepreg. At step **56**, a stack **22** of prepreg plies is assembled. Each of the plies includes reinforcing fibers held in a thermally curable matrix resin **44**. At step **58**, the prepreg plies are stitched together after the stack has been assembled, using a stitching material that melts and dissolves during thermal curing of the prepreg plies.

Referring again to Figures 1 and 2, as previously mentioned, in an alternate embodiment, the preform **20** may be a dry fiber preform suitable for use in any of various types of resin infusion processes in which the preform serves as a reinforcement that is infused with resin. In this embodiment, the preform **20** comprises a stitched stack **22** of the layers **24a**, **24b**, **24c**, each of which is formed by a unidirectional dry fiber reinforcement such as fiber tows **28** (Figures 5 and 6) or unidirectional dry fiber tape.

The layers **24a**, **24b**, **24c** have varying fiber orientations relative to each other. The fiber tows **28** used in the dry fiber preform **20** may comprise one or more materials similar to the materials discussed above that may be used to produce the fiber tows **28** of the prepreg embodiment of the preform **20**. The dry fiber layers **24a**, **24b**, **24c** are temporarily stitched together by stitches **26** (Figures 5 and 6) that pass completely through the thickness "t" (Figure 6). The stitches **26** hold the layers **24a**, **24b**, **24c** together as a preform, but may be loose enough to allow the layers **24a**, **24b**, **24c** to slip slightly relative to each other when the preform **20** is formed down onto contoured surfaces of a tool (not shown) used in a resin infusion process. As previously mentioned, in some embodiments, the dry fiber layers **24a**, **24b**, **24c** may be formed into a desired shape before the dry fiber layers **24a**, **24b**, **24c** are stitched together into a preform **20**.

The stitches **26** assist in holding the layers **24a**, **24b**, **24c** in their desired orientations and in spaced apart relationship to each other as the preform **20** is debulked, consolidated and infused with resin. By maintaining the dry fiber layers **24a**, **24b**, **24c** in their desired orientations and spatial relationships until the matrix



resin begins to harden with the onset of curing, the reinforcement of the cured composite structure may be more uniformly distributed and therefore contribute to improving the mechanical performance of the composite structure.

As in the previous prepreg preform **20** example, the material from which the stitches **26** are formed may comprise any of a variety of polymer resins that is compatible with the matrix resin used to resin infuse the preform **20** after it has been placed on a tool. The stitch material has a melt temperature that results in melting of the stitches **26** during thermal curing of the matrix resin following resin infusion of the dry fiber preform **20**. For example, the stitch material used to stitch the layers **24a**, **24b**, **24c** together as a dry fiber preform **20** may comprise a thermoplastic resin such as, without limitation, PEI (polyetherimide) PPS (polyphenylene sulphide), PES (polyethersulfone), PEEK (polyetheretherketone), PEKK (polyetheretherketone), and PEKK-FC (polyetherketoneketone-fc grade), which has a relatively low melt temperature that is within the range of temperatures required to cure the matrix resin used in a resin infusion process.

Figure **11** broadly illustrates the steps of a method of fabricating a composite structure using resin infusion of a dry fiber preform **20**. Beginning at step **60**, a stack of unidirectional dry fiber layers **24a**, **24b**, **24c** is assembled, in which the layers have varying fiber orientations. At step **62**, optionally, a tackifier may be applied to the layers **24a**, **24b**, **24c** in order to assist in maintaining their respective fiber orientations. At **64**, the dry fiber layers **24a**, **24b**, **24c** are stitched together into a stitched stack **22**, after the stack **22** has been assembled. The stitches **26** hold the layers **24a**, **24b**, **24c** of the stack **22** together. At **66**, the stitched stack **22** of dry fiber layers may be formed into a desired preform shape.

Forming the stack **22** may be performed by forming the stack **22** onto tooling, either before or after the stack **22** has been stitched. Where the stack **22** is stitched before it is formed to a desired shape, and the tooling has one or more contours, the stitching **26** may allow the dry fiber layers **24a**, **24b**, **24c** to slip slightly relative to each other in order to better allow the layers to conform to contoured surfaces of the tool. Depending upon the type of resin infusion process being used, the dry fiber

preform **20** may be transferred to a resin infusion tool at step **68**. In some embodiments, the tool on which the dry fiber layers **24a**, **24b**, **24c** are formed into the shape of the preform **20** may be the tool that is used during the resin infusion process. At step **70**, the dry fiber preform **20** is infused with resin, and at **72**, the resin is thermally cured. The stitches **26** assist in holding the layers **24a**, **24b**, **24c** in their desired orientations and in spaced apart relationship to each other as the preform **20** is debulked, consolidated and infused with resin. At step **74**, the stitching **26** that is used to hold the layers of the preform **20** together, melts and dissolve into the resin used to infuse the preform **20**.

Embodiments of the disclosure may find use in a variety of potential applications, particularly in the transportation industry, including for example, aerospace, marine, automotive applications and other application where composite laminate structures, particularly those that are contoured and are fabricated in relatively high volume. Thus, referring now to Figures **12** and **13**, embodiments of the disclosure may be used in the context of an aircraft manufacturing and service method **76** as shown in Figure **12** and an aircraft **78** as shown in Figure **13**. Aircraft applications of the disclosed embodiments may include, for example, without limitation, composite laminate frame sections, spars, stringers and beams, to name only a few. During pre-production, exemplary method **76** may include specification and design **80** of the aircraft **78** and material procurement **82**. During production, component and subassembly manufacturing **84** and system integration **86** of the aircraft **78** takes place. Thereafter, the aircraft **78** may go through certification and delivery **88** in order to be placed in service **90**. While in service by a customer, the aircraft **76** is scheduled for routine maintenance and service **92**, which may also include modification, reconfiguration, refurbishment, and so on.

Each of the processes of method **76** may be performed or carried out by a system integrator, a third party, and/or an operator (e.g., a customer). For the purposes of this description, a system integrator may include without limitation any number of aircraft manufacturers and major-system subcontractors; a third party may include without limitation any number of vendors, subcontractors, and



suppliers; and an operator may be an airline, leasing company, military entity, service organization, and so on.

As shown in Figure 12, the aircraft 78 produced by exemplary method 76 may include an airframe 94 with a plurality of systems 96 and an interior 98. Examples of high-level systems 96 include one or more of a propulsion system 100, an electrical system 102, a hydraulic system 104 and an environmental system 106. Any number of other systems may be included. Although an aerospace example is shown, the principles of the disclosure may be applied to other industries, such as the marine and automotive industries.

Systems and methods embodied herein may be employed during any one or more of the stages of the production and service method 76. For example, components or subassemblies corresponding to production process 84 may be fabricated or manufactured in a manner similar to components or subassemblies produced while the aircraft 76 is in service. Also, one or more apparatus embodiments, method embodiments, or a combination thereof may be utilized during the production stages 84 and 86, for example, by substantially expediting assembly of or reducing the cost of an aircraft 76. Similarly, one or more of apparatus embodiments, method embodiments, or a combination thereof may be utilized while the aircraft 76 is in service, for example and without limitation, to maintenance and service 92.

The description of the different illustrative embodiments has been presented for purposes of illustration and description, and is not intended to be exhaustive or limited to the embodiments in the form disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art. Further, different illustrative embodiments may provide different advantages as compared to other illustrative embodiments. The embodiment or embodiments selected are chosen and described in order to best explain the principles of the embodiments, the practical application, and to enable others of ordinary skill in the art to understand the disclosure for various embodiments with various modifications as are suited to the particular use contemplated.



**EMBODIMENTS IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:**

1. A method of fabricating a composite structure, comprising:

stitching prepreg plies together into a stitched stack of prepreg plies having varying fiber orientations;

thermally curing the stitched stack of prepreg plies; and

melting the stitching during thermal curing of the stitched stack of prepreg plies.

2. The method of claim 1, further comprising:

assembling the prepreg plies into a stack,

wherein each of the prepreg plies has resin tack, and assembling the prepreg plies into the stack includes using the resin tack to adhere the plies together and maintain the fiber orientations of the prepreg plies during the stitching.

3. The method of claim 1, wherein the stack has a thickness, and stitching the prepreg plies together is performed by using stitches that pass substantially through the thickness of the stack.

4. The method of claim 2, wherein assembling the prepreg plies into a stack includes:

laying down prepreg tows, and

varying the fiber orientations of the tows for each of the plies.

5. The method of claim 1, wherein melting the stitching is performed before the stitched stack of prepreg plies is fully cured.
6. The method of claim 1, further comprising:

forming the stitched stack of prepreg plies into a desired shape corresponding to the shape of the composite structure.
7. The method of claim 6, comprising forming a stack of prepreg plies before stitching the stack of prepreg plies together.
8. The method of claim 6, wherein forming the stitched stack of prepreg plies is performed after stitching the prepreg plies together.
9. A composite preform, comprising:

a stack of unidirectional prepreg plies having varying fiber orientations;  
and

stitches passing through all of the prepreg plies in the stack and capable of holding the plies together, wherein the stitches are formed of a stitching material capable of melting during thermal curing of the prepreg plies.
10. The composite preform of claim 9, wherein each of the prepreg plies includes prepreg tows.



11. The composite preform of claim 10, wherein the stitches pass between the prepreg tows.
12. The composite preform of claim 9, wherein the stitches are distributed generally uniformly across the stack of unidirectional prepreg plies.
13. The composite preform of claim 9, wherein:
  - each of the prepreg plies includes a resin matrix, and
  - the stitching material is compatible with the resin matrix.
14. The composite preform of claim 13, wherein:
  - the resin matrix is a thermoset resin, and
  - the stitching material is a thermoplastic resin.
15. The composite preform of claim 14, wherein:
  - the thermoset resin has a cure temperature at which the thermoset resin is fully cured, and
  - the thermoplastic resin has a melt temperature that is below the cure temperature of the thermoset resin.
16. The method of any one of claims 1 to 8, further comprising debulking, consolidating and curing the stitched stack under a vacuum.
17. A method of making a composite preform, comprising:

assembling a stack of prepreg plies, each of the plies including reinforcing fibers held in a thermally curable resin matrix; and,

stitching the prepreg plies together after the stack has been assembled, wherein the stitching is performed using stitching material that melts during thermal curing of the prepreg plies.

**18.** The method of claim **17**, wherein:

assembling the stack of prepreg plies includes maintaining the plies in registration relative to each other by tacking the plies together.

**19.** The method of claim **18**, wherein tacking the plies together is performed using tack of the resin matrix in each of the plies.

**20.** The method of claim **17**, wherein:

assembling the stack of prepreg plies includes using the resin matrix in each of the prepreg plies to hold the reinforcing fibers in the plies in spaced relationship to each other during the stitching.

**21.** The method of claim **17**, wherein the stack of prepreg plies has a thickness, and the stitching includes placing stitches substantially completely through the thickness of the stack of prepreg plies.

**22.** The method of claim **17**, wherein:

assembling the stack of prepreg plies includes laying prepreg tows, and



the stitching includes placing stitches between the prepreg tows substantially completely through the stack of prepreg plies.

**23.** The method of claim **17**, wherein assembling the stack of prepreg plies includes orienting the plies such that they have differing fiber orientations.

**24.** A method of fabricating a composite structure, comprising:

stitching dry fiber layers together into a stitched stack of dry fiber layers having varying fiber orientations;

infusing the stitched stack of dry fiber layers with a polymer resin;

thermally curing the stitched stack of dry fiber layers; and

melting the stitching during thermal curing of the stitched stack of dry fiber layers.

**25.** The method of claim **24**, further comprising:

debulking, consolidating and curing the stitched stack under a vacuum.

**26.** The method of claim **24**, wherein the stack has a thickness, and stitching the dry fiber layers together is performed by using stitches that pass substantially through the thickness of the stack.

**27.** The method of claim **24**, further comprising:

applying a tackifier to each of the dry fiber layers; and

assembling the dry fiber layers into a stack, including using the tackifier to adhere the dry fiber layers together and maintain the fiber orientations of the dry fiber layers during the stitching.

- 28.** The method of claim **27**, wherein assembling the dry fiber layers into a stack includes:

laying down dry fiber tows, and

varying the fiber orientations of the dry fiber tows for each of the dry fiber layers.

- 29.** The method of claim **24**, further comprising:

forming the stack of dry fiber layers into a desired shape corresponding to the shape of the composite structure.

- 30.** The method of claim **29**, wherein forming the stack is performed before stitching the dry fiber layers together.

- 31.** The method of claim **29**, wherein forming the stack is performed after stitching the dry fiber layers together.

- 32.** The method of claim **29**, wherein forming the stack of dry fiber layers includes forming the stitched stack of dry fiber layers onto a tool.

- 33.** The method of claim **32**, wherein:

forming the stack of dry fiber layers onto a tool includes placing the stack in a mold, and



infusing the stack of dry fiber layers includes introducing a polymer resin into the mold under a vacuum.

**34.** A method of making a dry fiber preform, comprising:


assembling a stack of dry fiber layers, each of the layers including unidirectional reinforcing fibers; and,

stitching the dry fiber layers together after the stack has been assembled, wherein the stitching is performed using stitches that pass through the stack and melt when heated to a predetermined temperature.

**35.** The method of claim **34**, further comprising:

applying a tackifier to each of the dry fiber layers, and

wherein assembling the stack of dry fiber layers includes using the tackifier to maintain the layers in registration relative to each other.

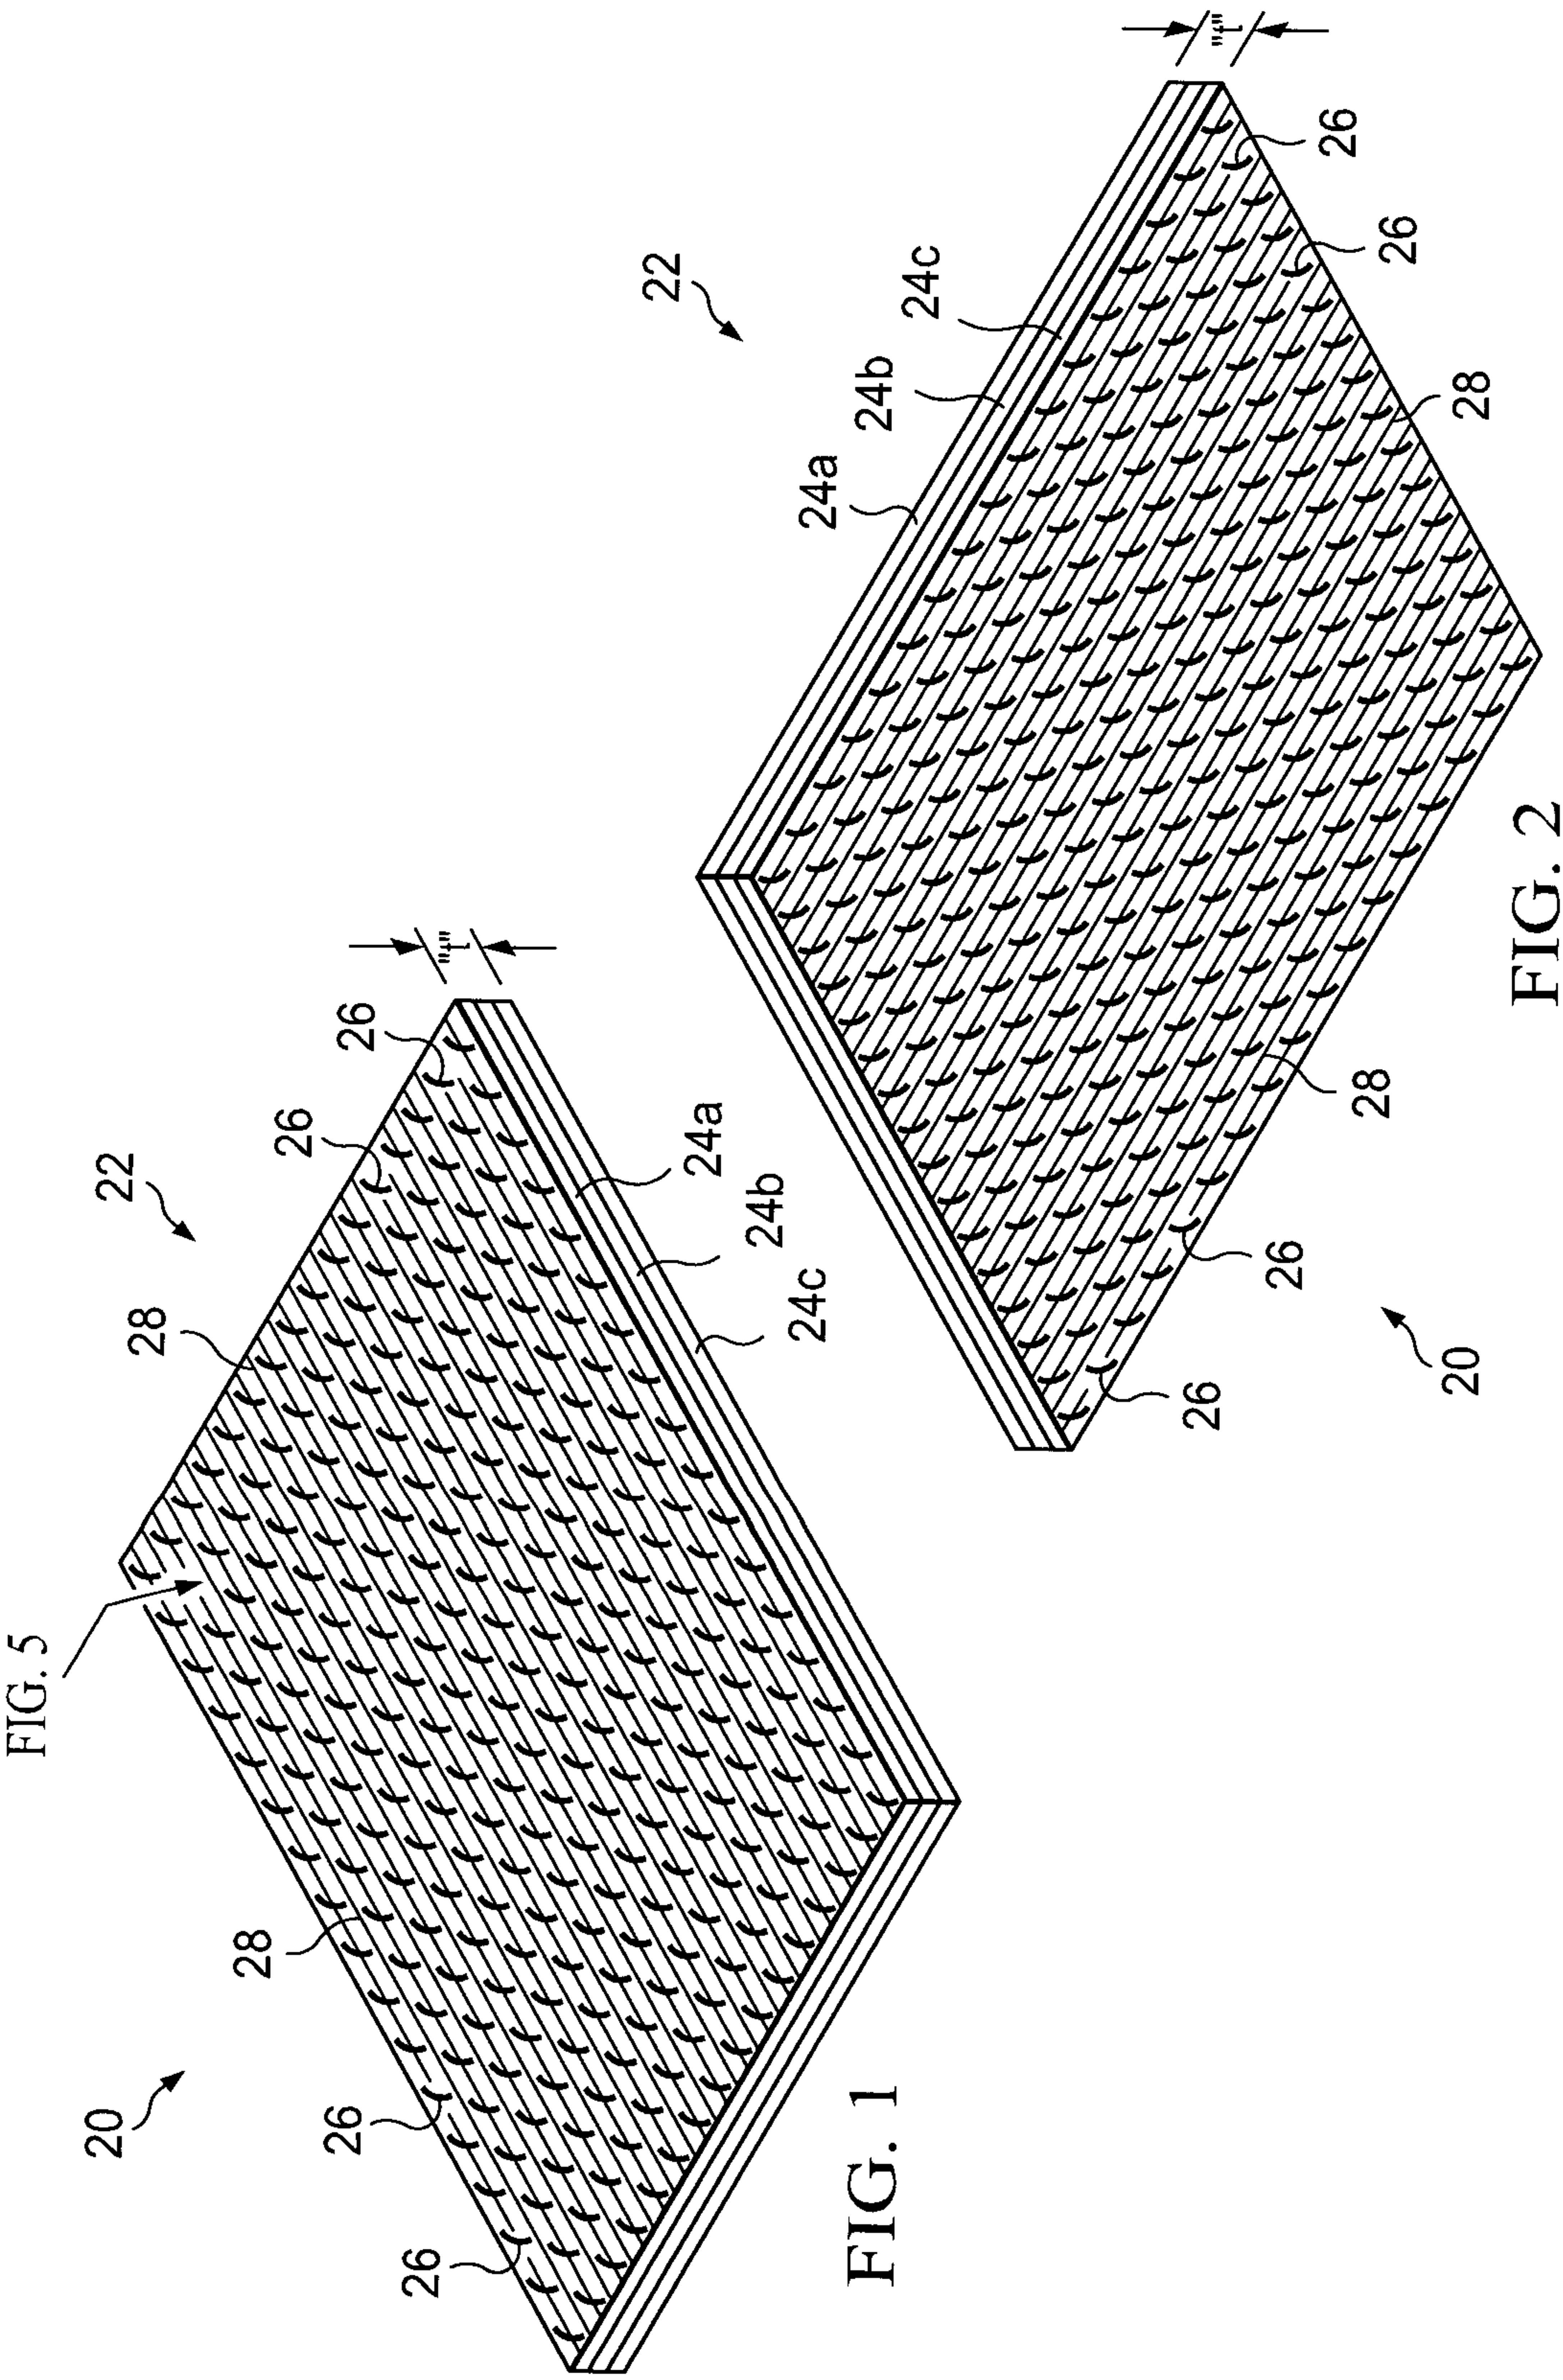



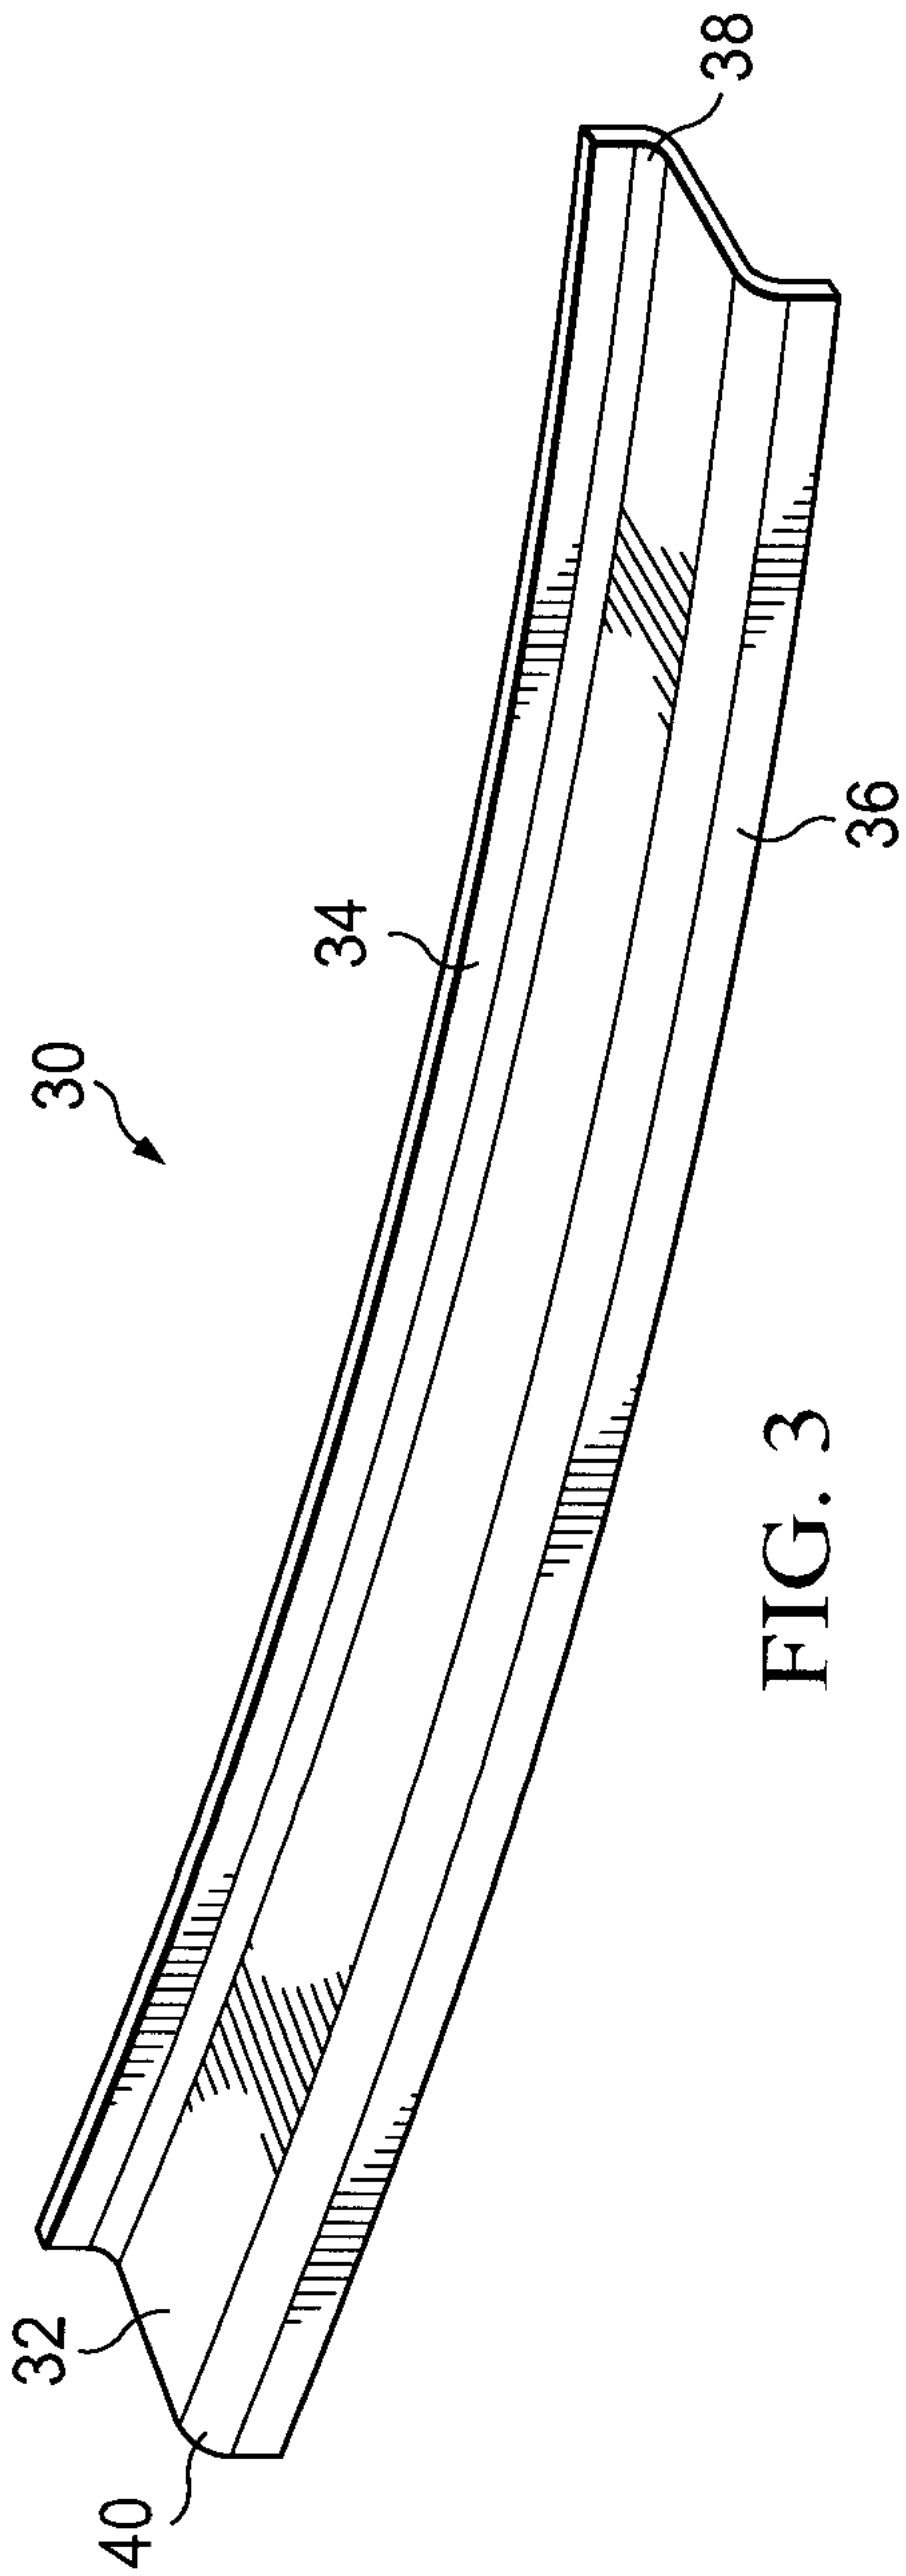


FIG. 3

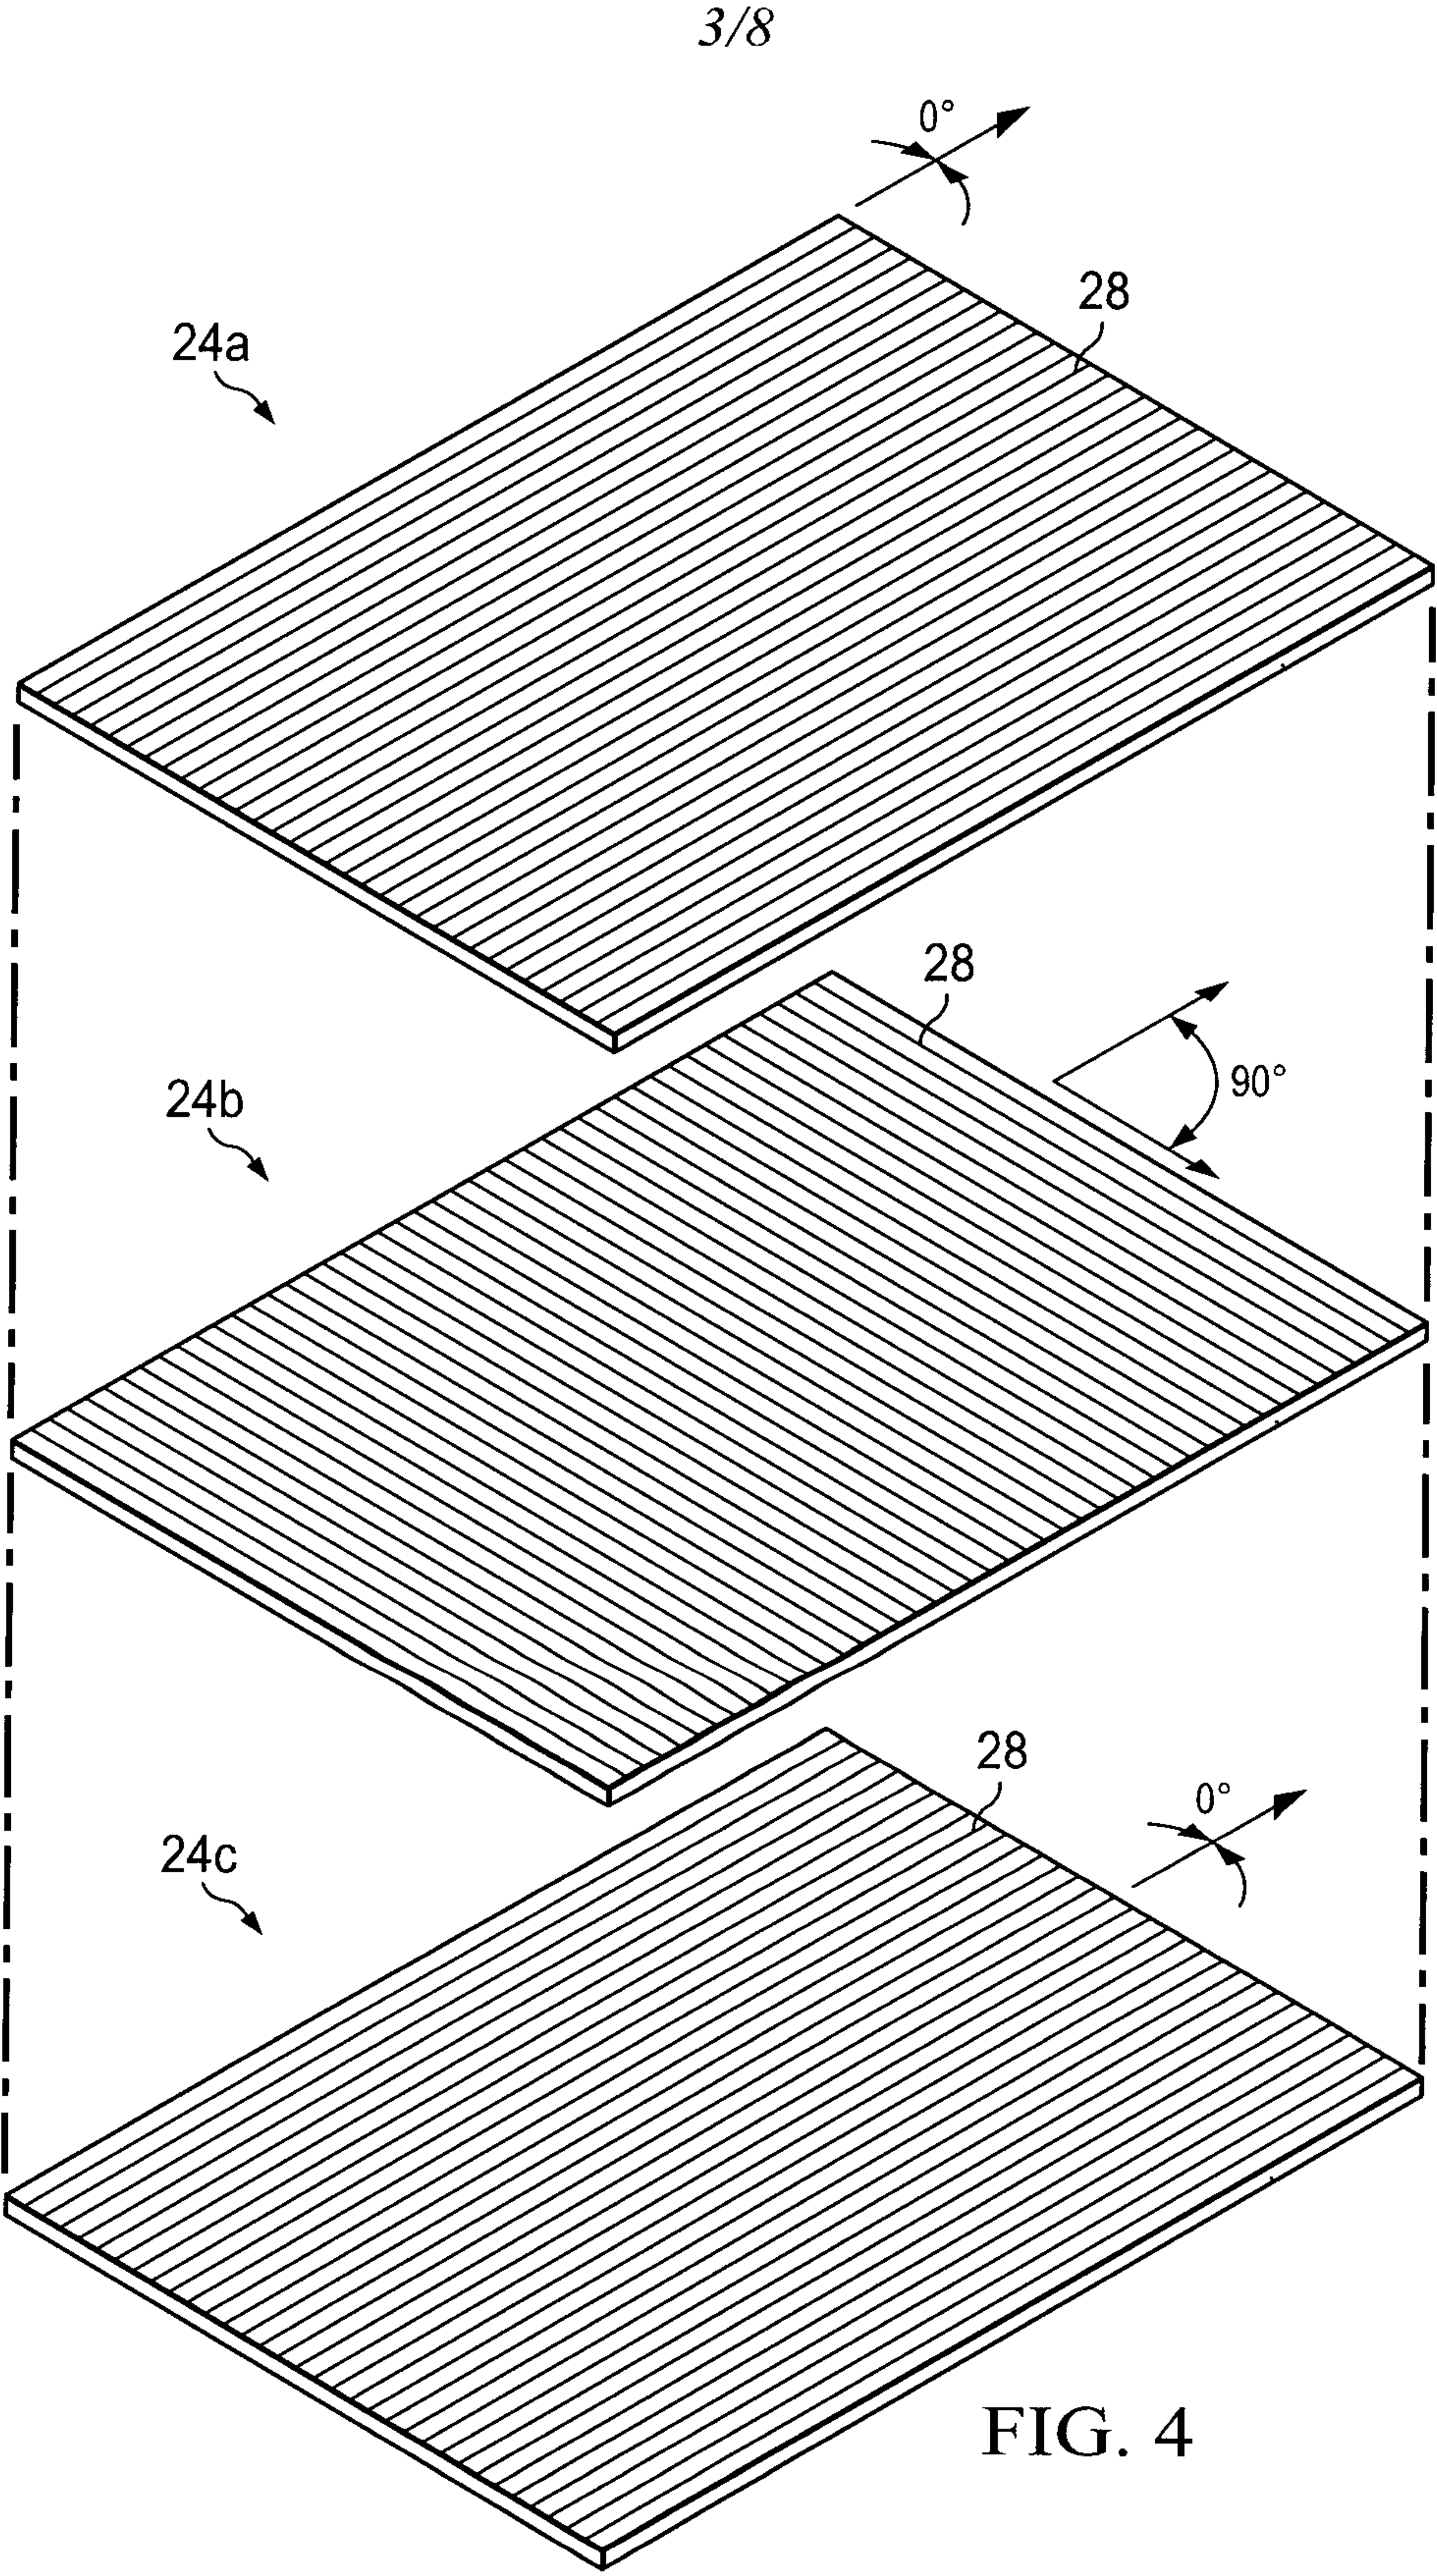


FIG. 4



4/8

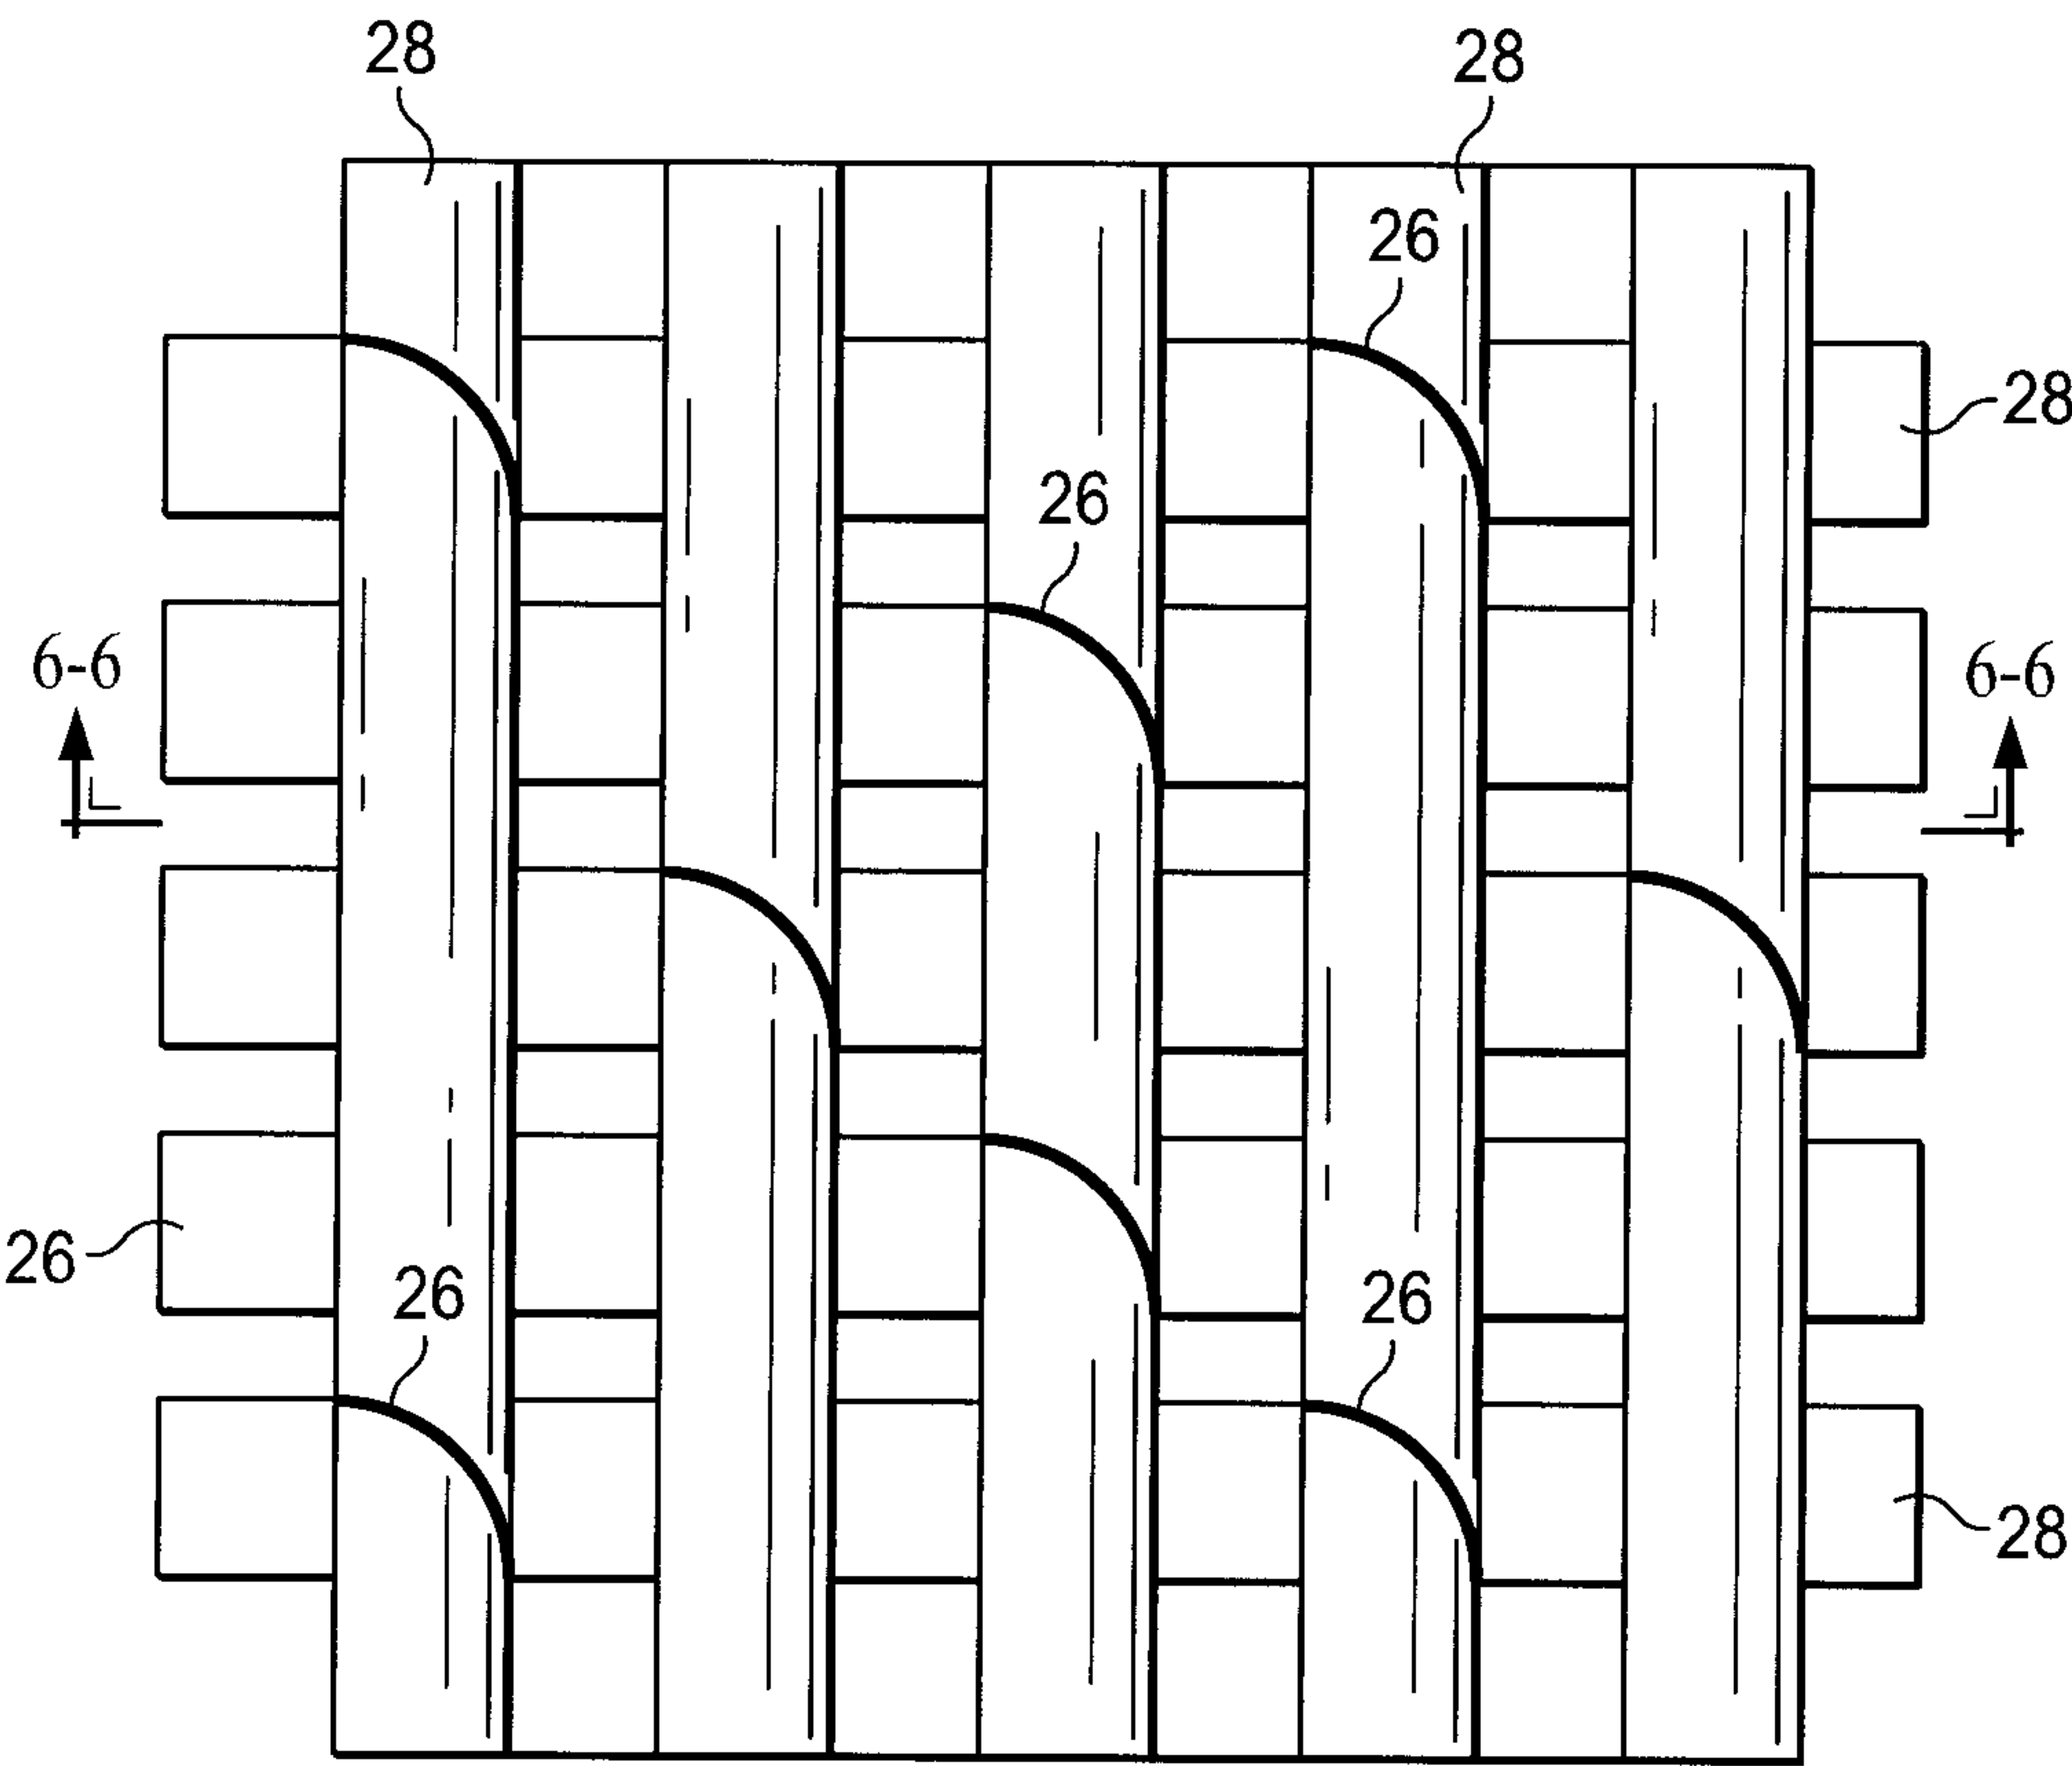


FIG. 5

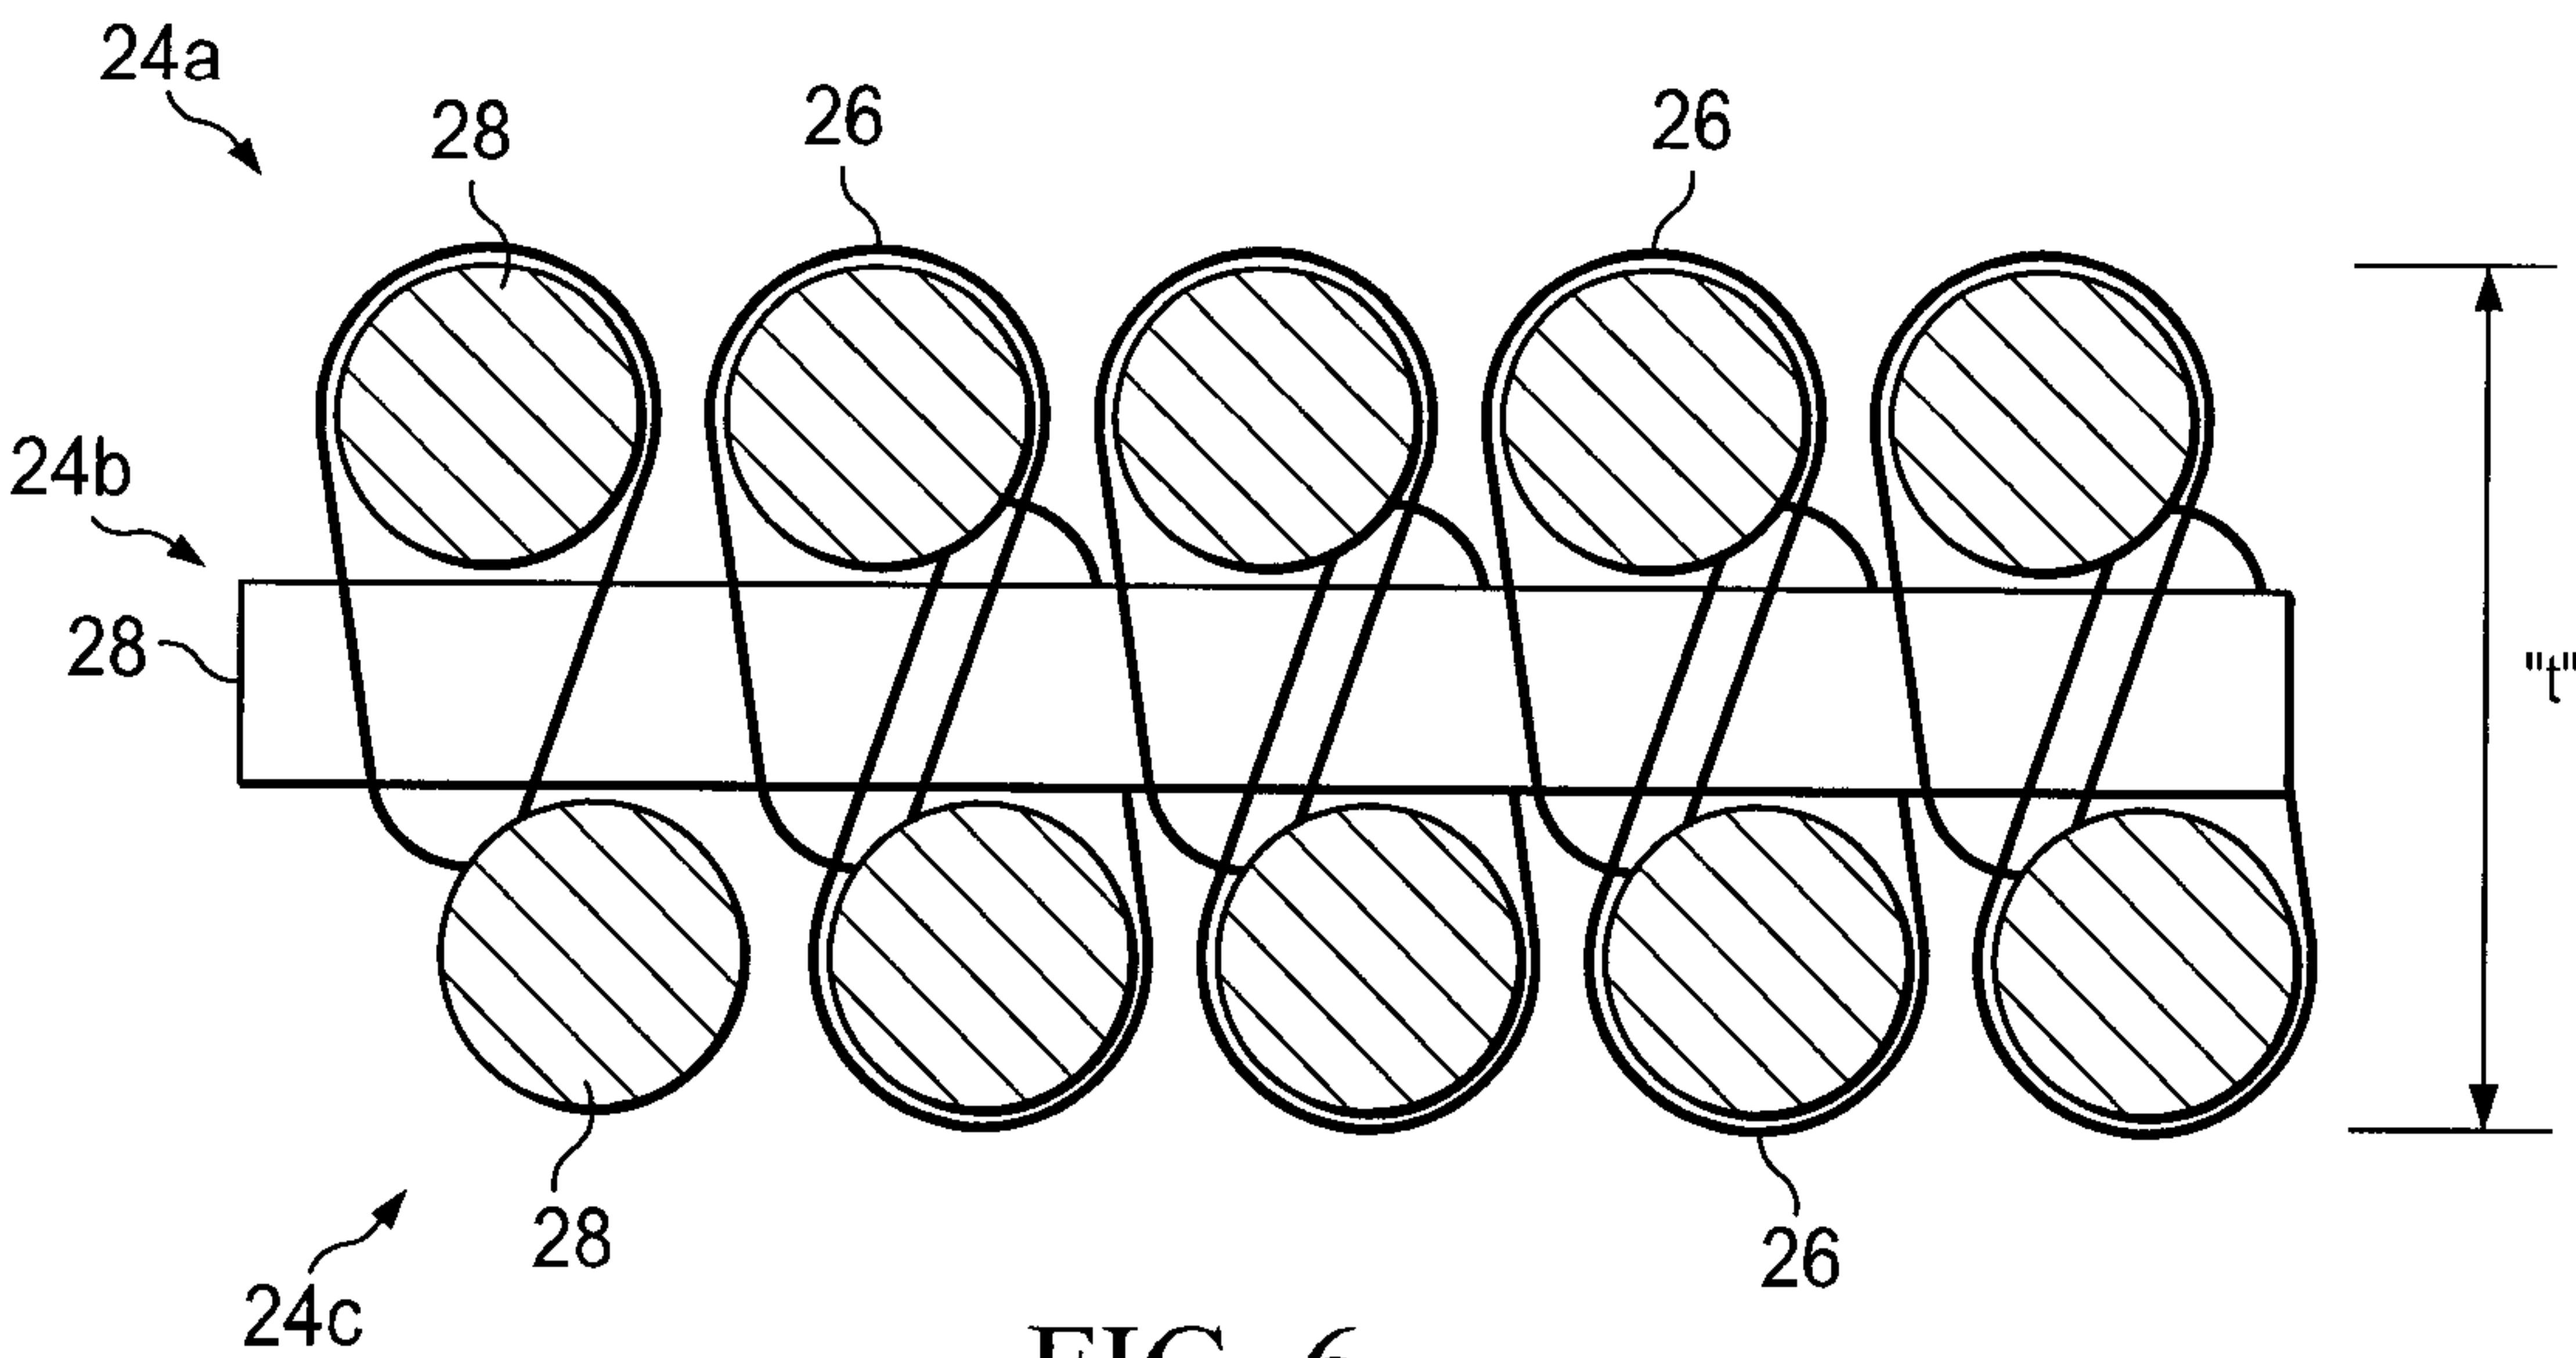


FIG. 6

5/8

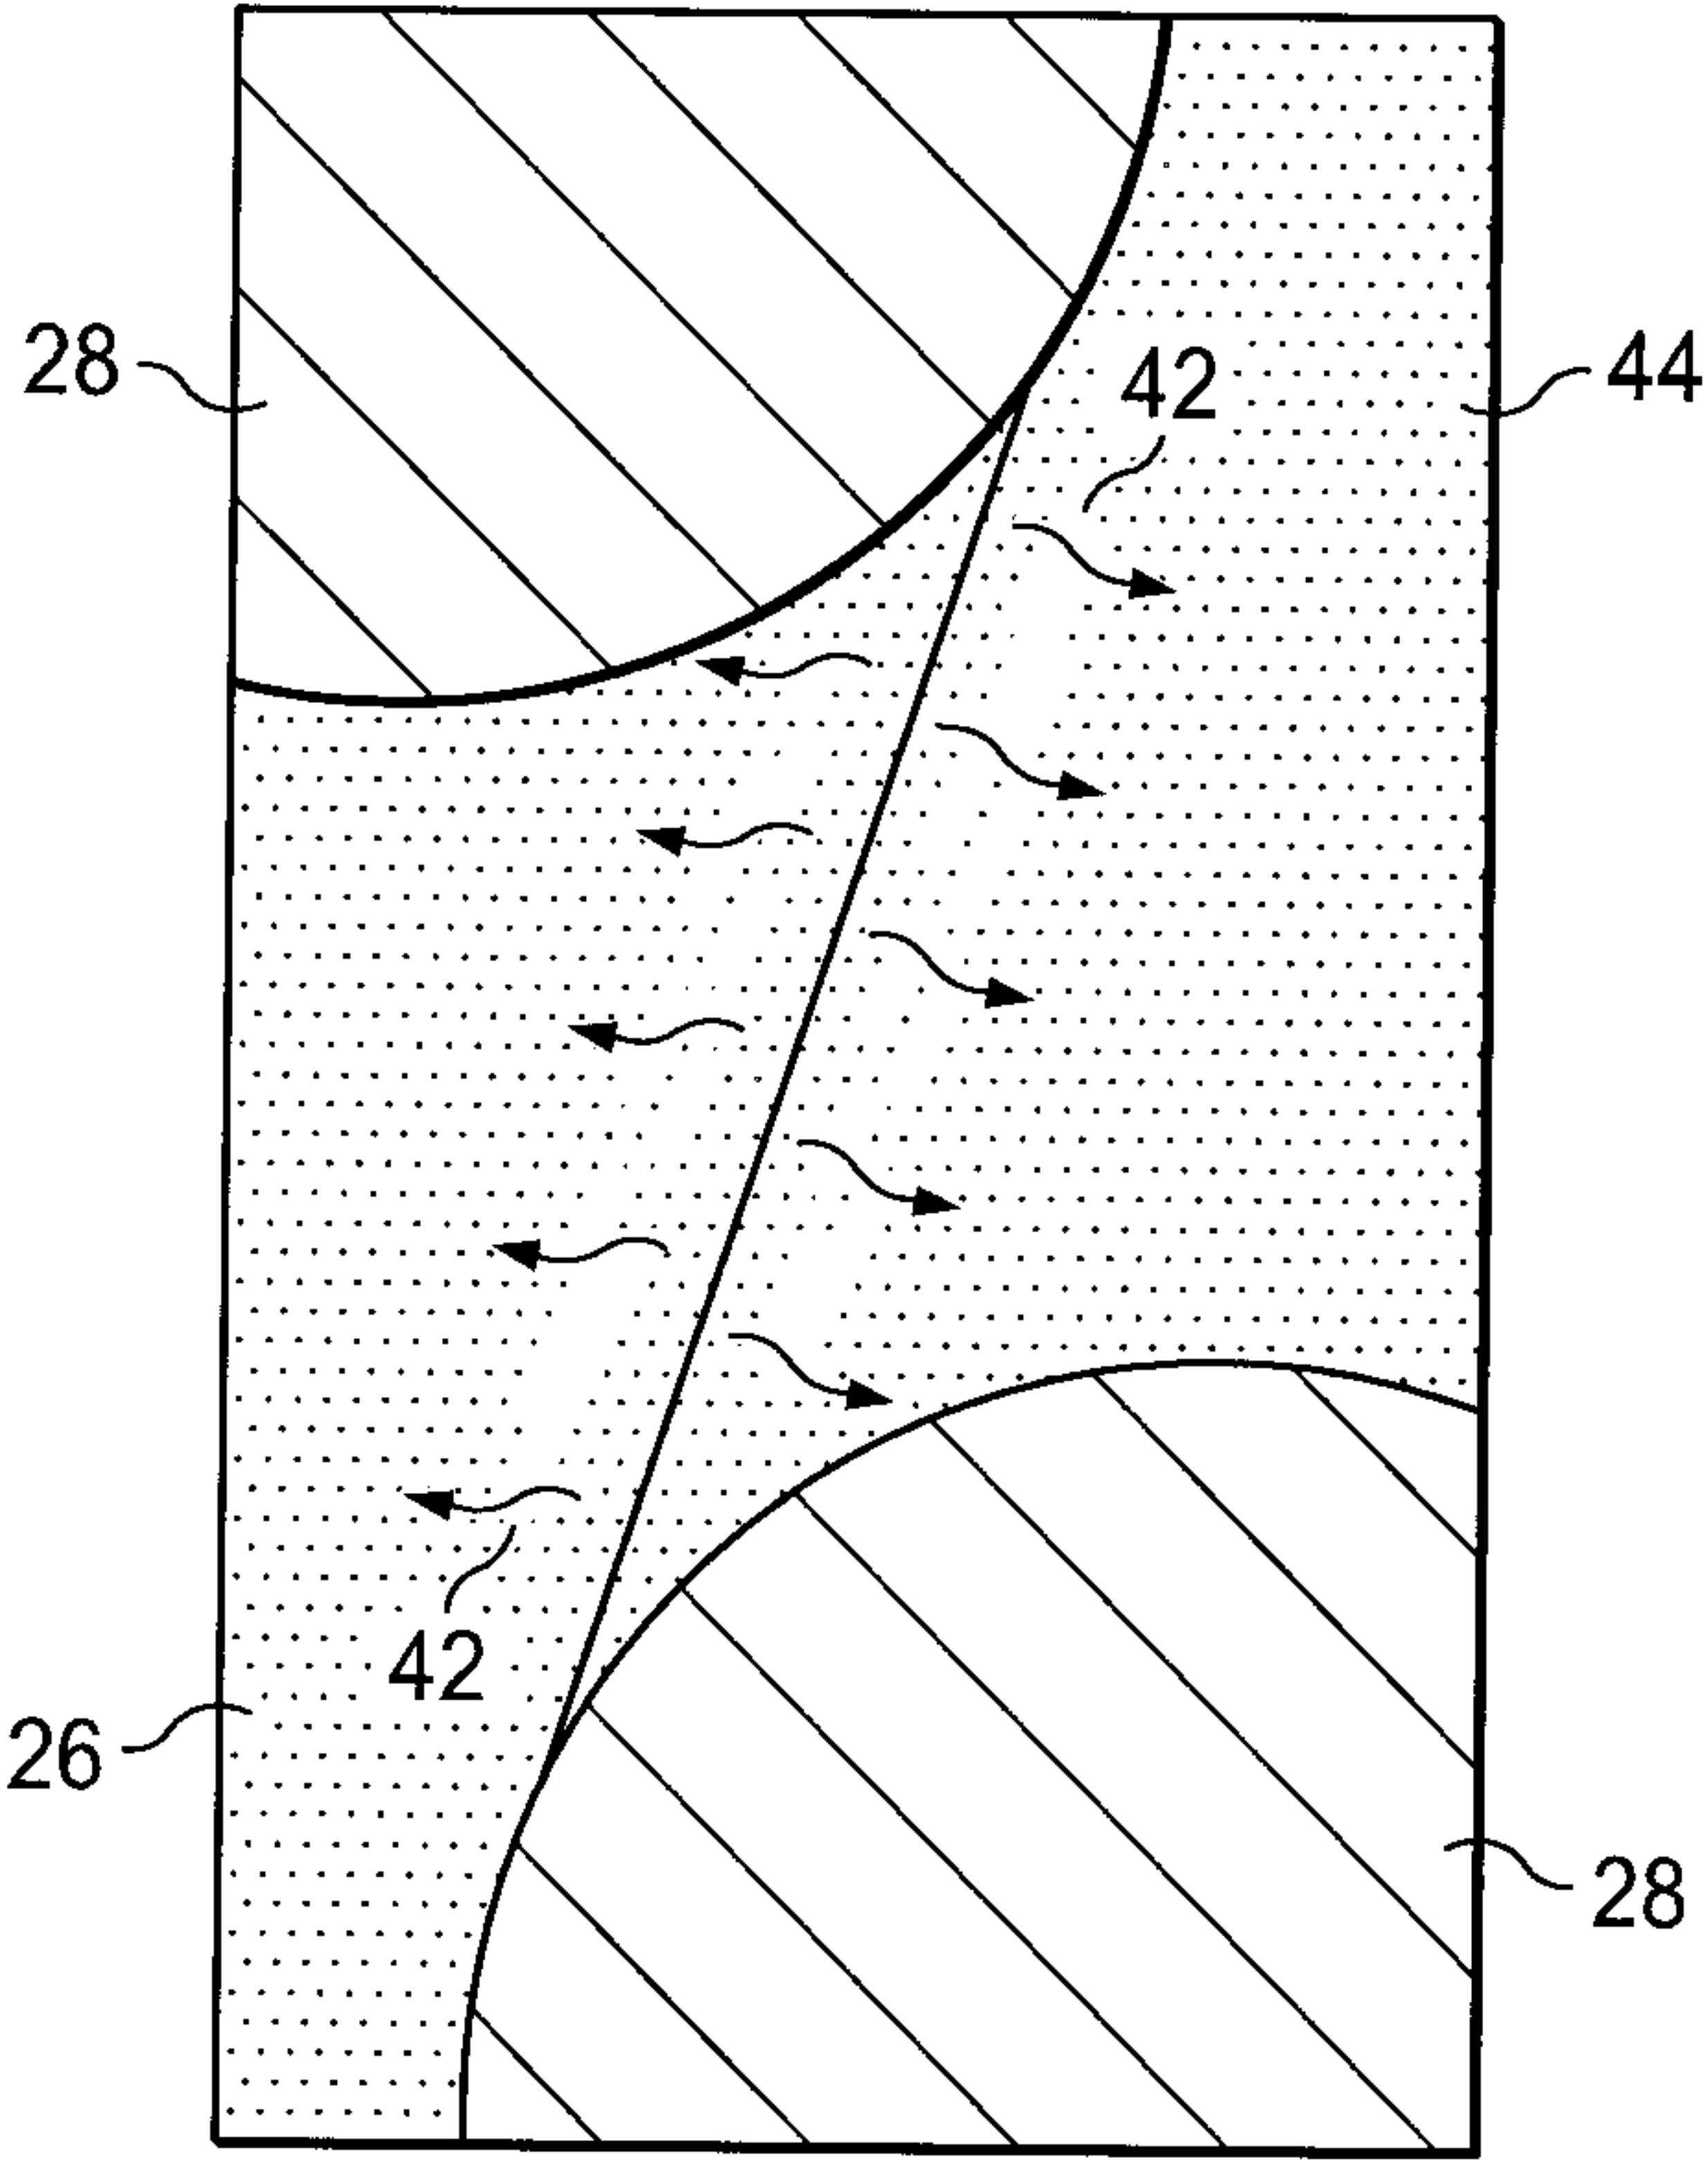


FIG. 7

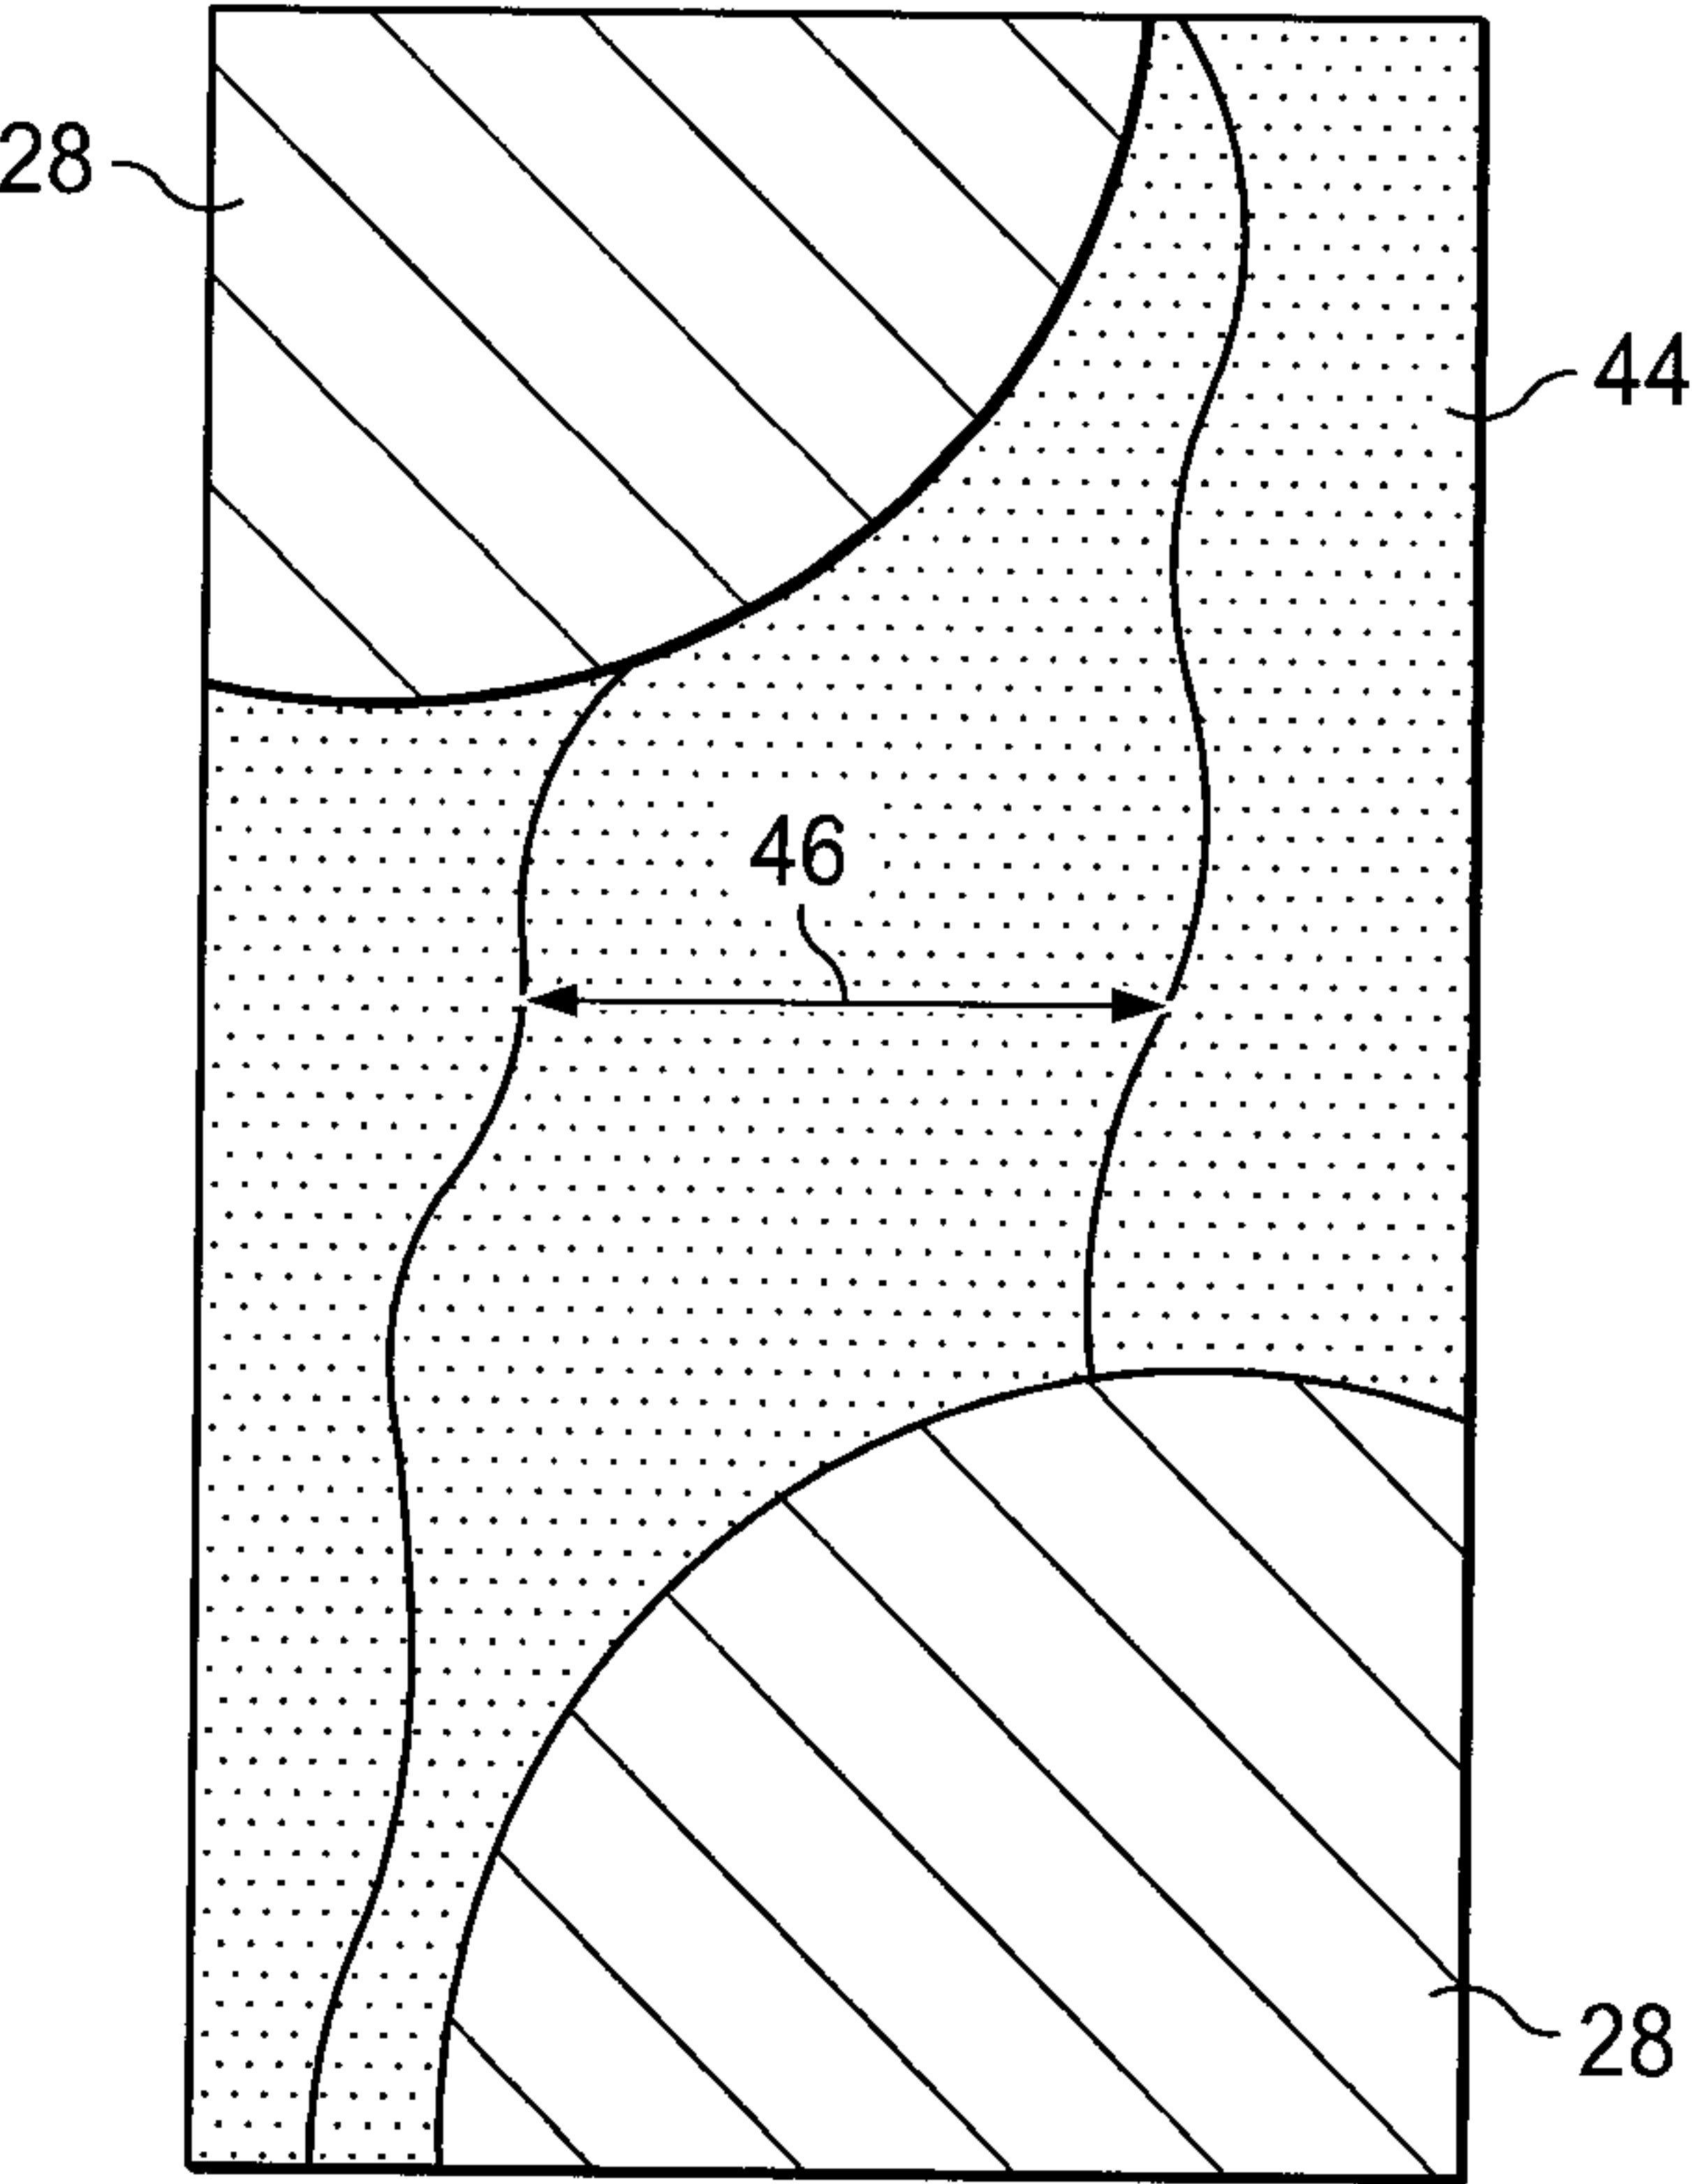


FIG. 8

6/8

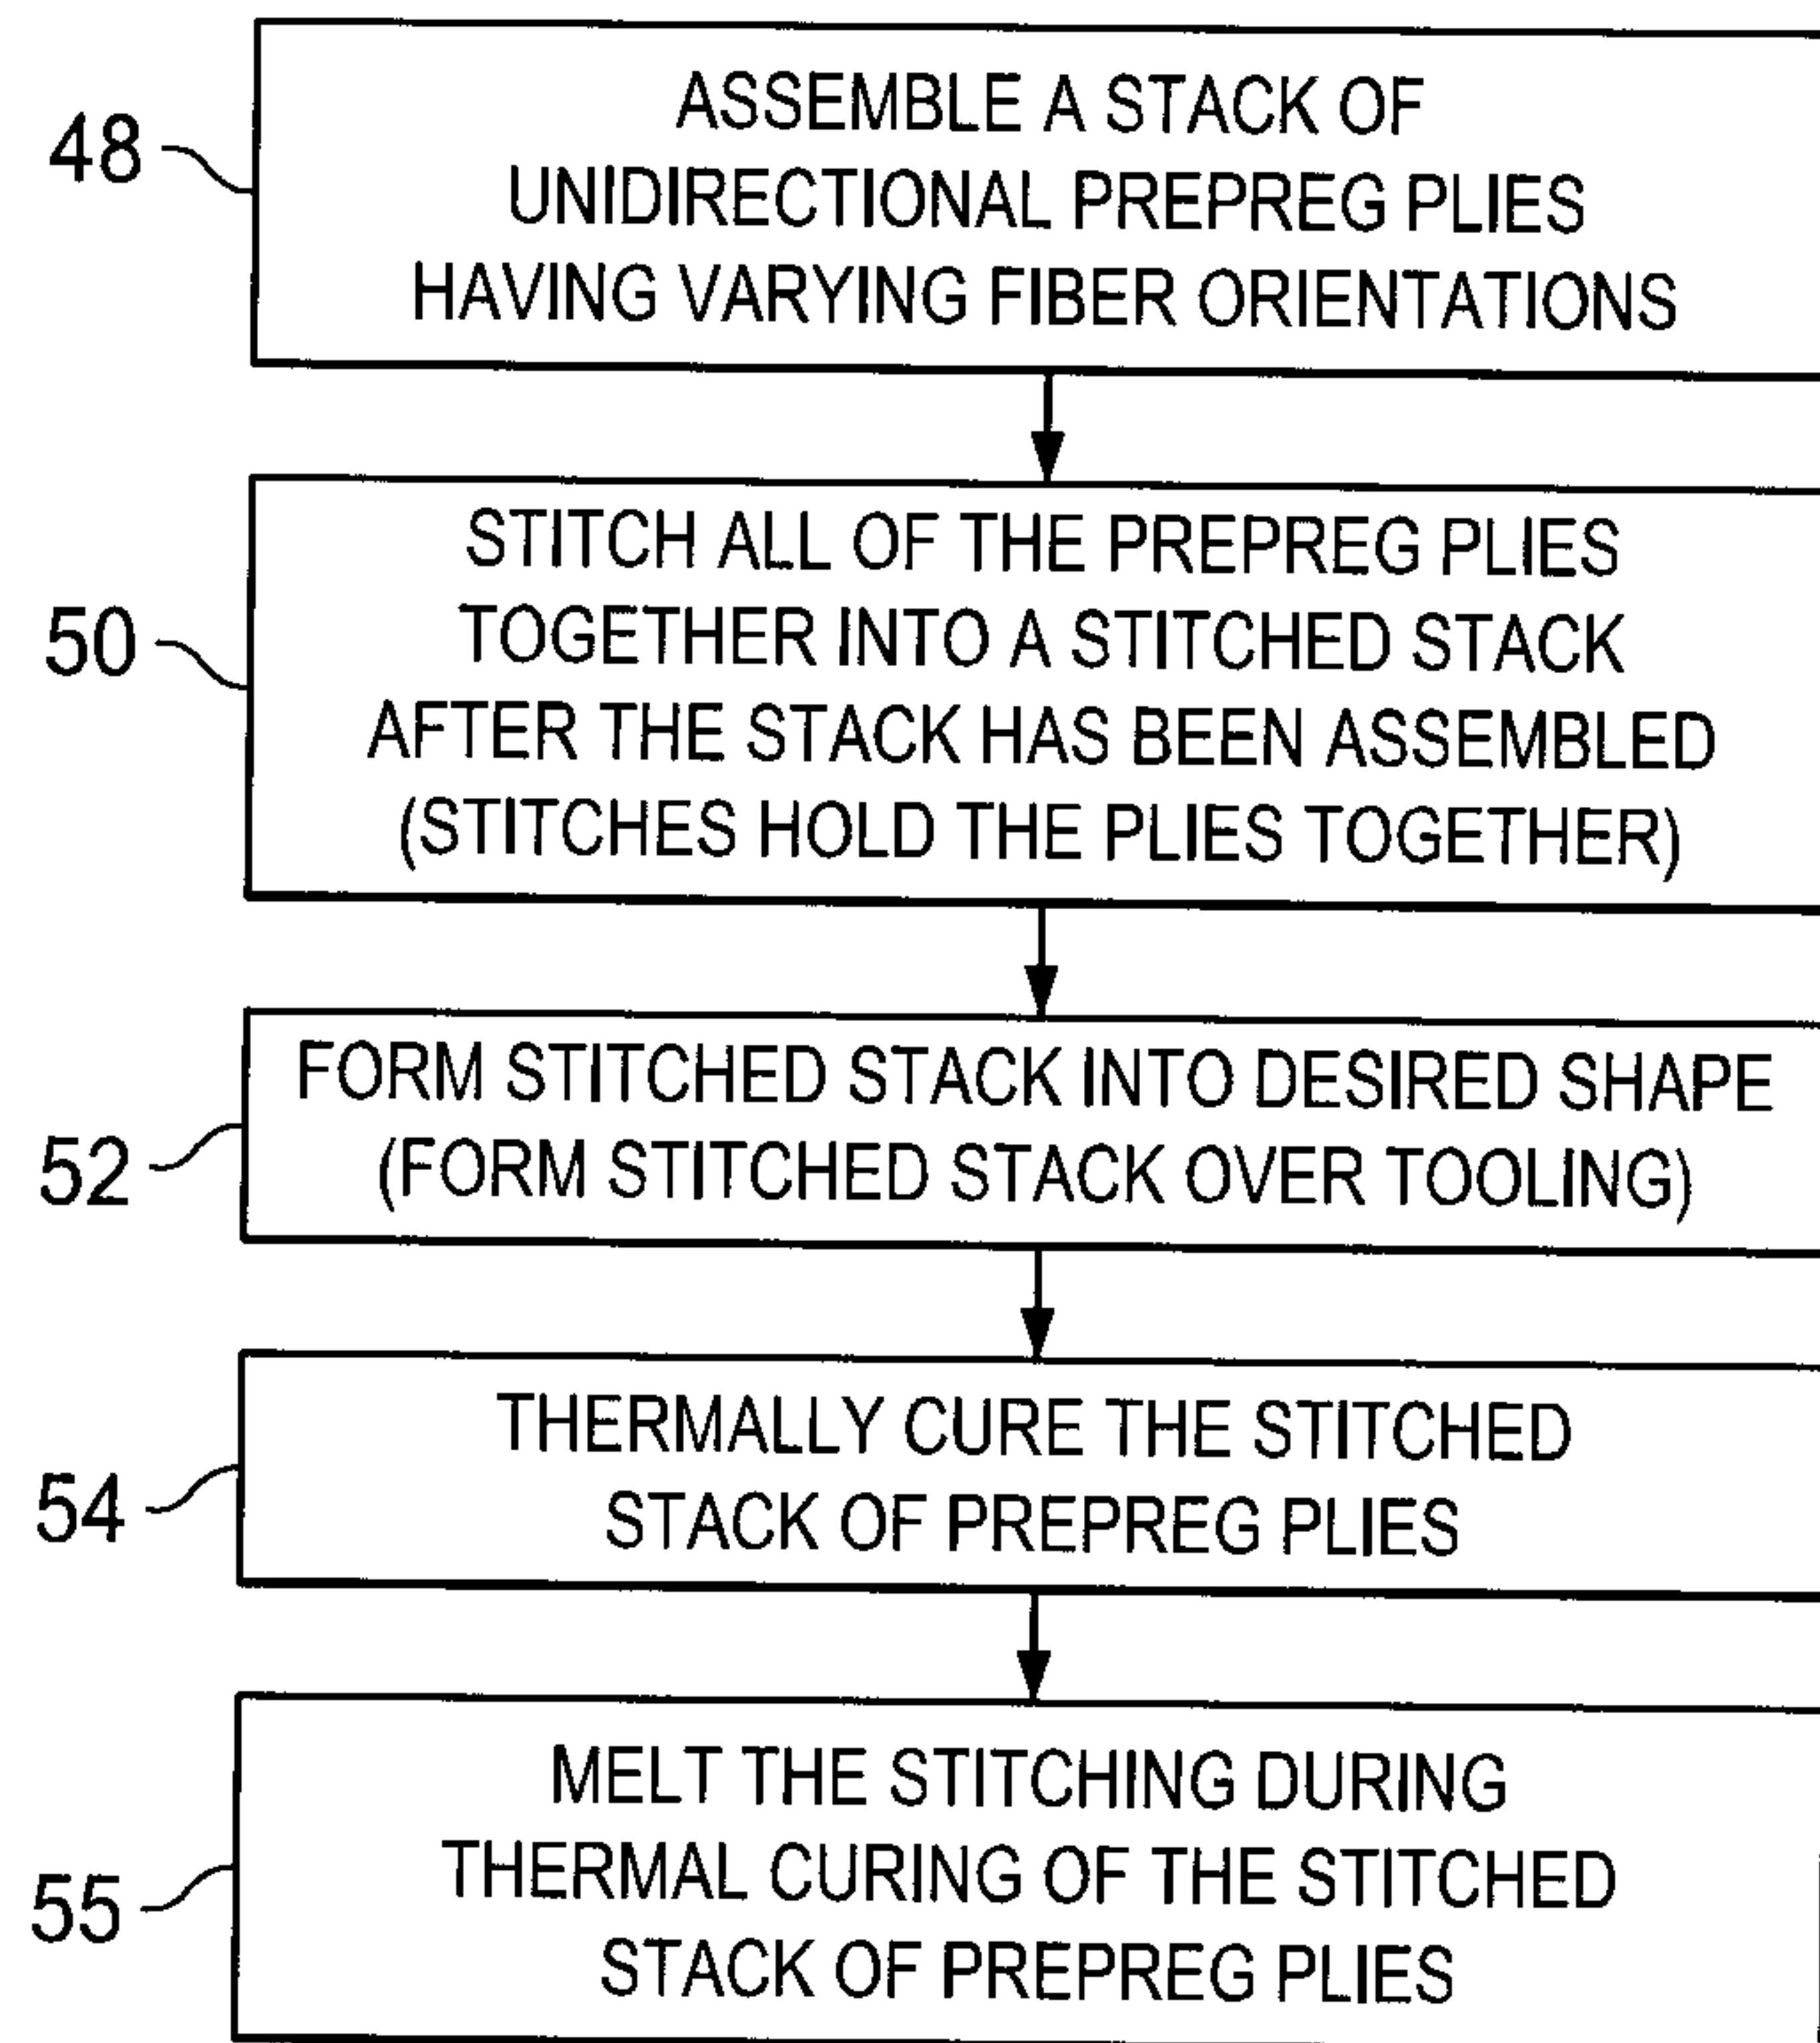


FIG. 9

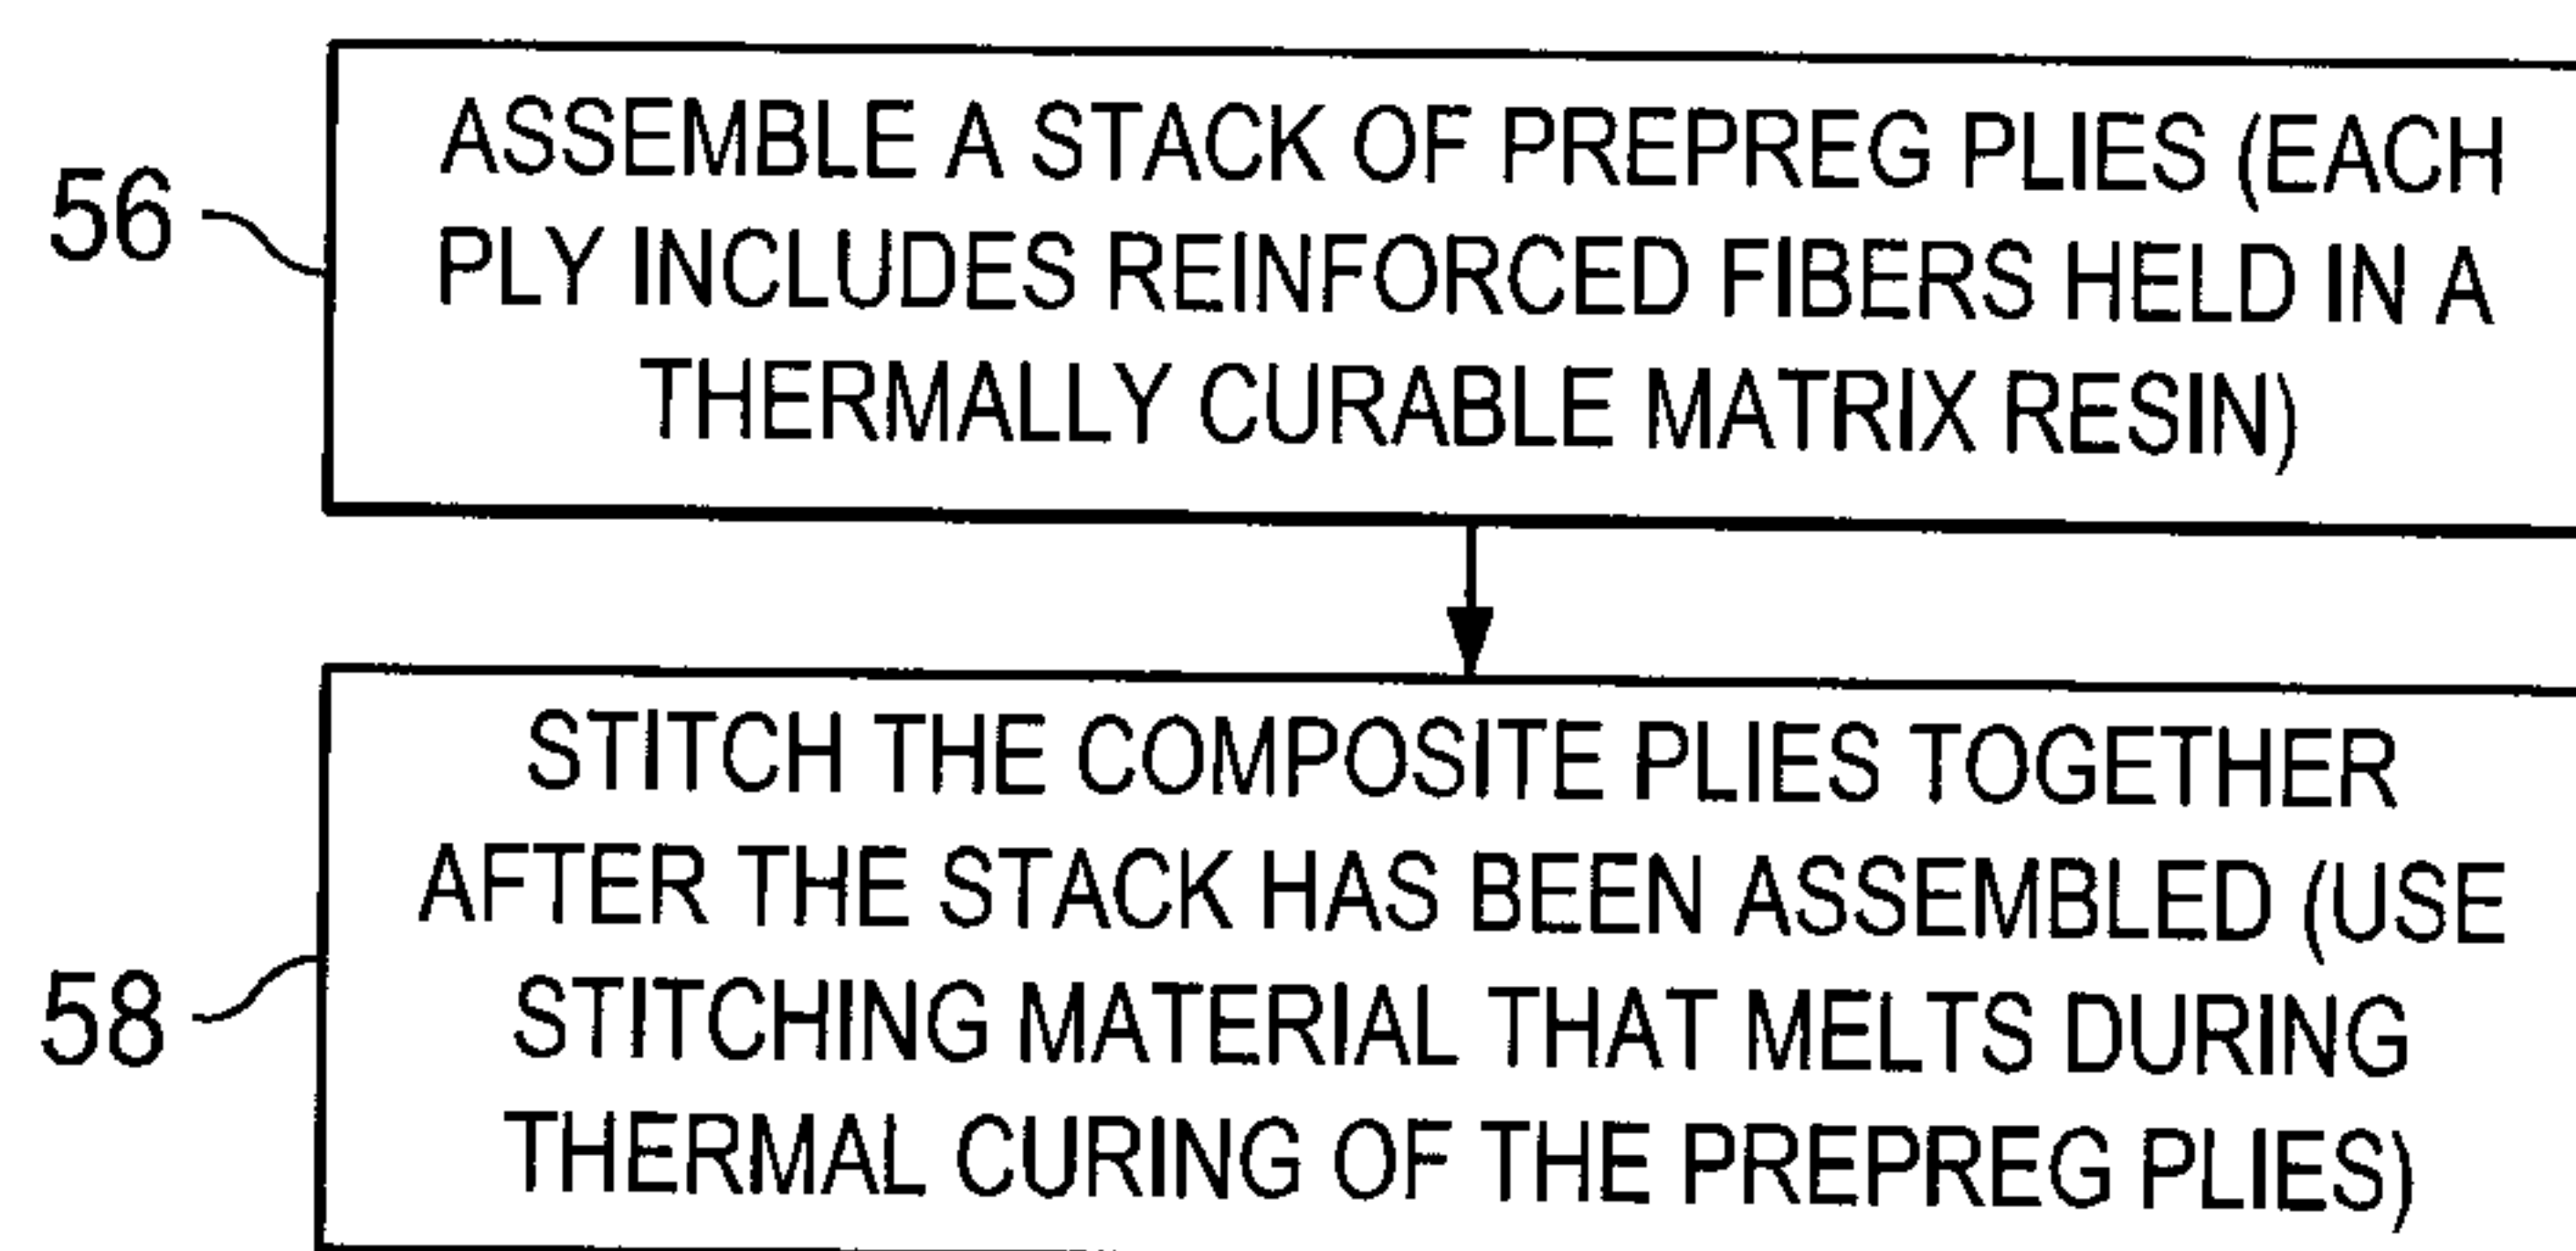


FIG. 10



7/8

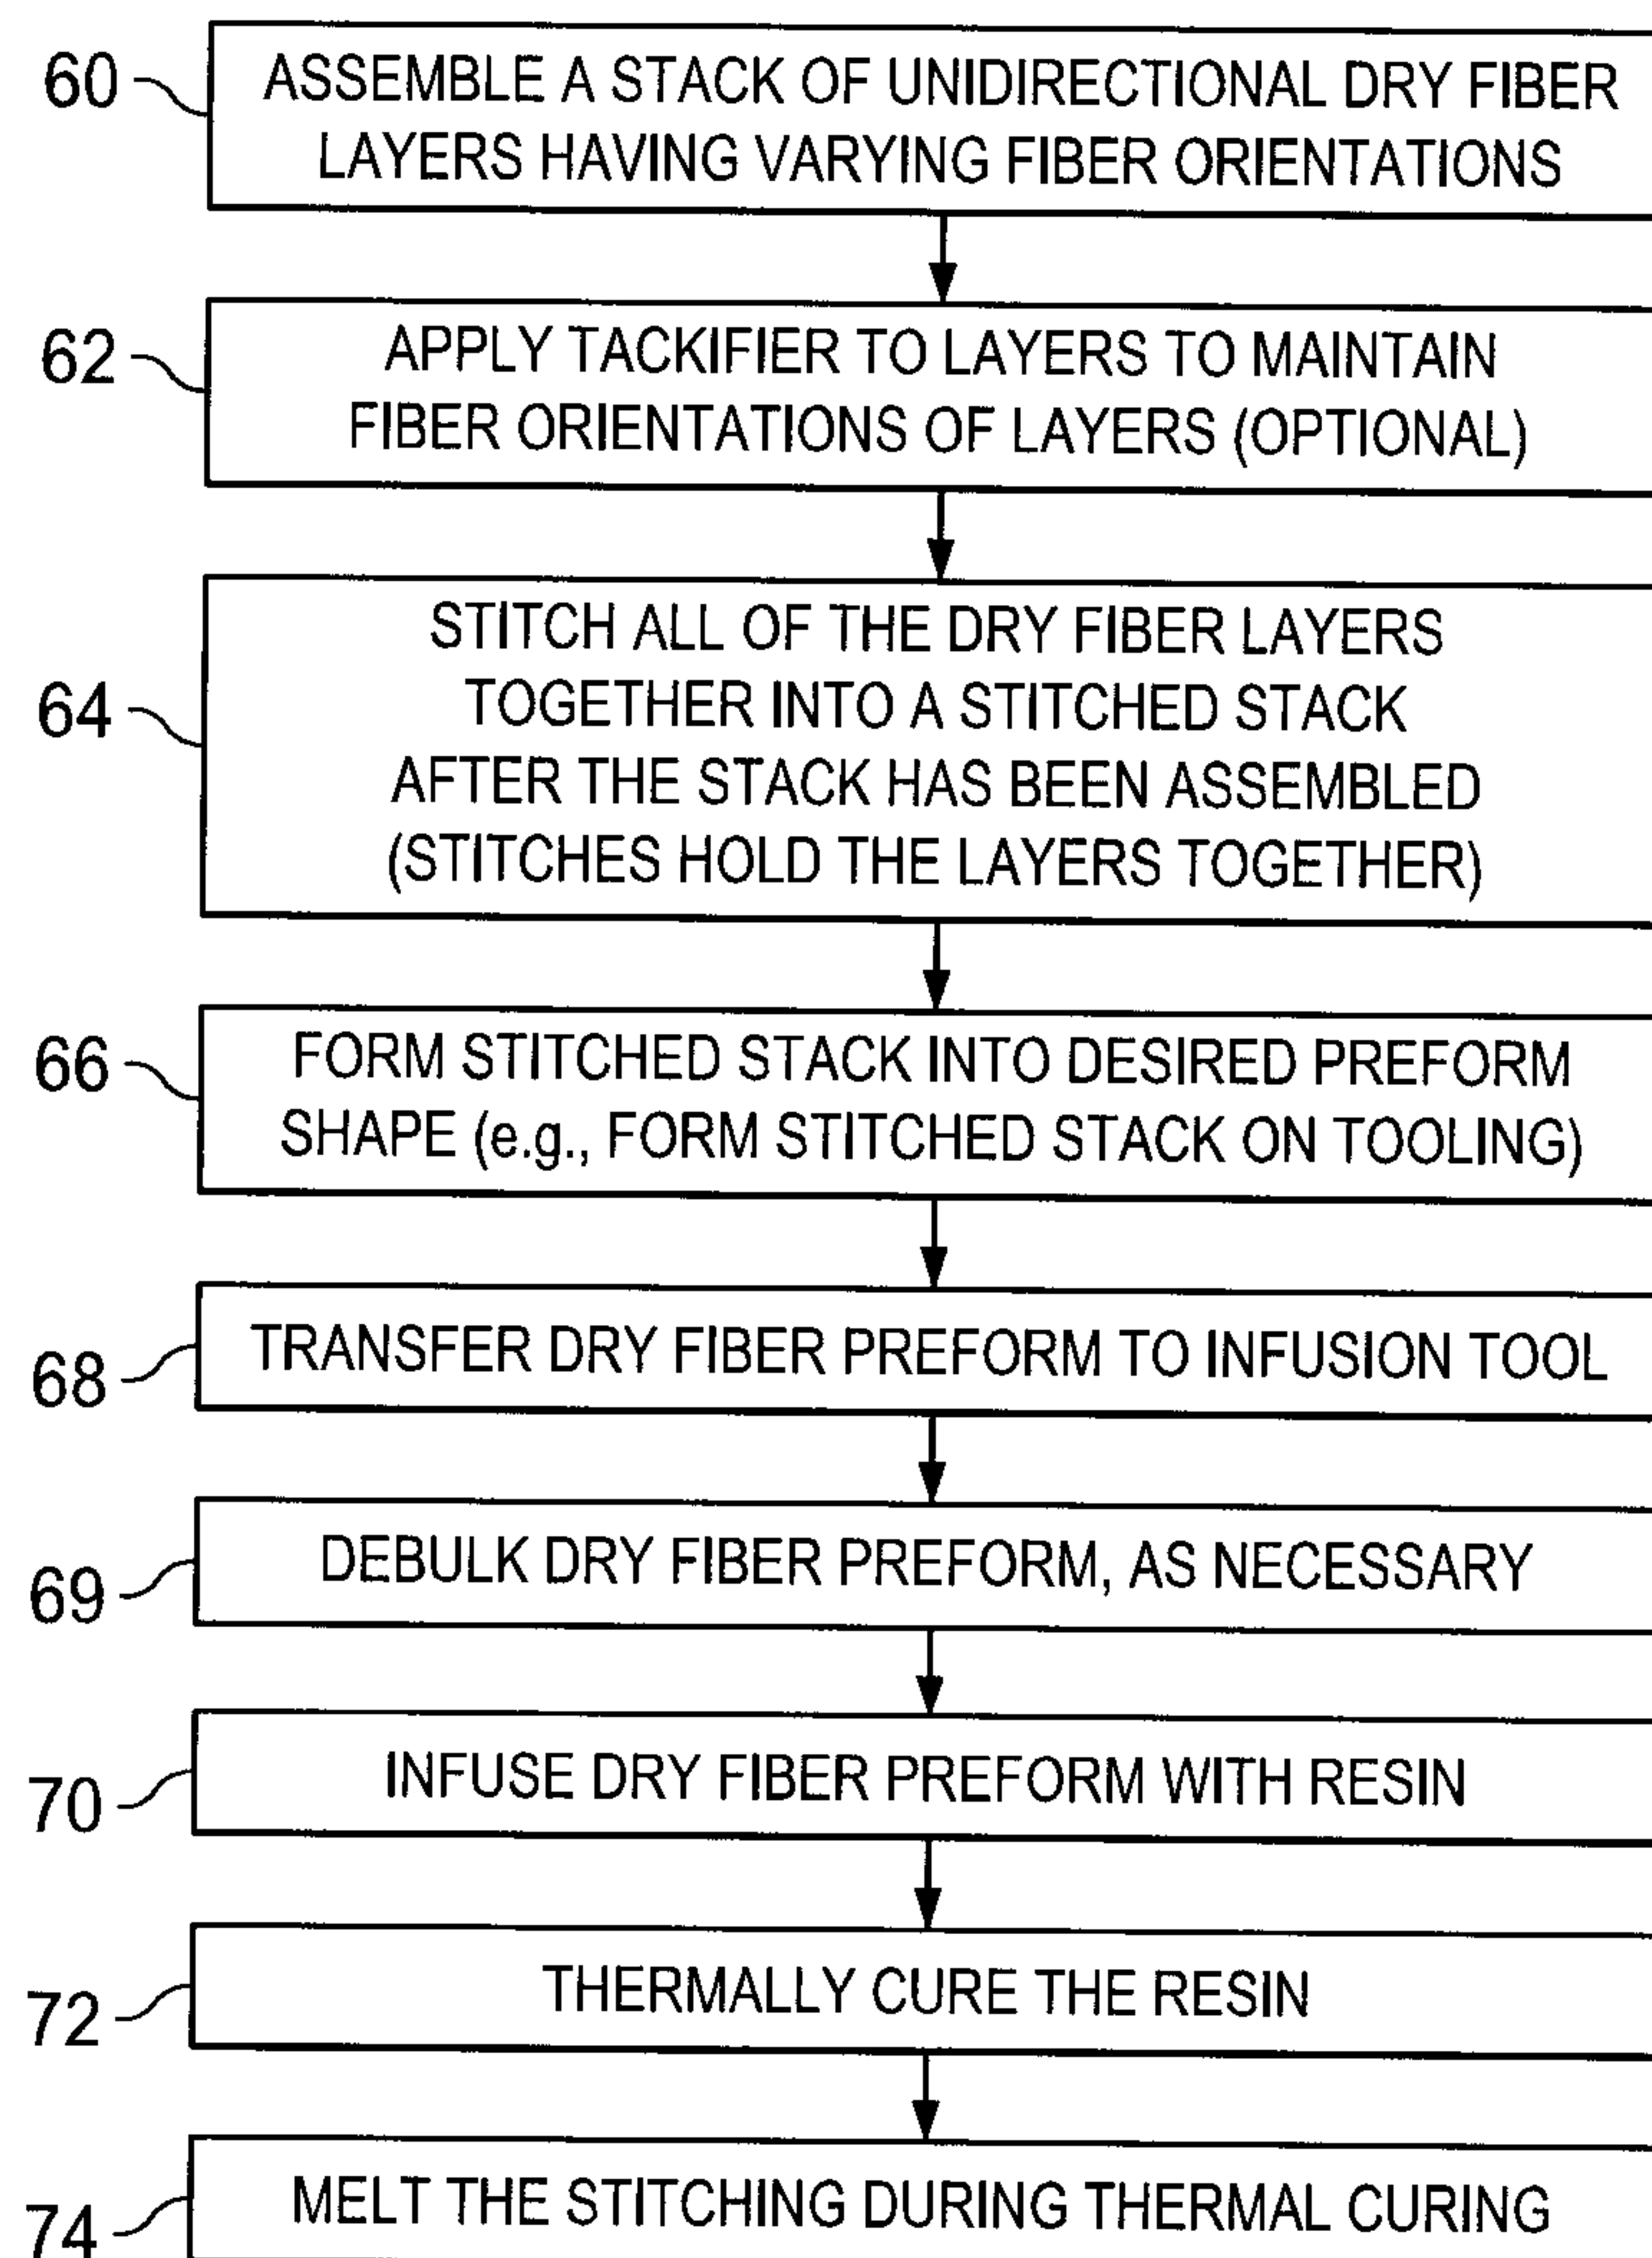


FIG. 11

8/8

