

(12) **United States Patent**  
**Bock et al.**

(10) **Patent No.:** **US 10,866,284 B2**  
(45) **Date of Patent:** **Dec. 15, 2020**

(54) **TEMPERATURE-BASED  
ELECTROMAGNETIC SWITCHING**

47/002 (2013.01); **H01H 47/02** (2013.01);  
**H01H 47/22** (2013.01); **H01H 47/26**  
(2013.01);

(71) Applicant: **ROCKWELL AUTOMATION  
TECHNOLOGIES, INC.**, Mayfield  
Heights, OH (US)

(Continued)

(72) Inventors: **Christopher H. Bock**, Milwaukee, WI  
(US); **Christopher J. Wieloch**,  
Brookfield, WI (US); **James J.  
Kinsella**, Brentwood, TN (US); **Stefan  
T. Dziekonski**, Greendale, WI (US)

(58) **Field of Classification Search**

CPC ..... H01H 47/22; H01H 47/32; H01H 9/26;  
H01H 47/002; H01H 50/002; H01H  
47/26; H01H 47/02; H01H 50/38; H01H  
50/323; H01H 89/00; H01H 50/16; H01H  
9/56; H01H 71/082; H01H 2009/307;  
G01R 31/327; G01R 31/3274; G01R  
31/44;

(73) Assignee: **ROCKWELL AUTOMATION  
TECHNOLOGIES, INC.**, Mayfield  
Heights, OH (US)

(Continued)

(\* ) Notice: Subject to any disclaimer, the term of this  
patent is extended or adjusted under 35  
U.S.C. 154(b) by 172 days.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2004/0085679 A1\* 5/2004 Yao ..... G11B 5/5552  
360/294.4  
2004/0085697 A1\* 5/2004 Kesler ..... H03K 17/0828  
361/93.8

(Continued)

Primary Examiner — Dharti H Patel

(21) Appl. No.: **16/141,469**

(22) Filed: **Sep. 25, 2018**

(65) **Prior Publication Data**

US 2019/0025375 A1 Jan. 24, 2019

**Related U.S. Application Data**

(63) Continuation of application No. 14/832,646, filed on  
Aug. 21, 2015, now Pat. No. 10,101,393.

(Continued)

(51) **Int. Cl.**

**G01R 31/327** (2006.01)

**H01H 50/16** (2006.01)

(Continued)

(52) **U.S. Cl.**


CPC ..... **G01R 31/327** (2013.01); **G01K 7/00**  
(2013.01); **G01R 31/3274** (2013.01); **G01R**  
**31/44** (2013.01); **H01H 9/26** (2013.01); **H01H**

(57)

**ABSTRACT**

One embodiment describes a method that includes deter-  
mining, using a control circuitry, temperature of a switching  
device before a make operation by applying a measurement  
current to an operating coil of the switching device, wherein  
the measurement current is insufficient to make the switch-  
ing device; and determining voltage at the operating coil  
when the measurement current is applied, in which the  
voltage at the operating coil is directly related to the tem-  
perature. The method further includes determining, using the  
control circuitry, when to apply a pull-in current to the  
operating coil to close the switching device based at least in  
part on the voltage at the operating coil, such that the  
switching device makes at a desired time.

**18 Claims, 53 Drawing Sheets**

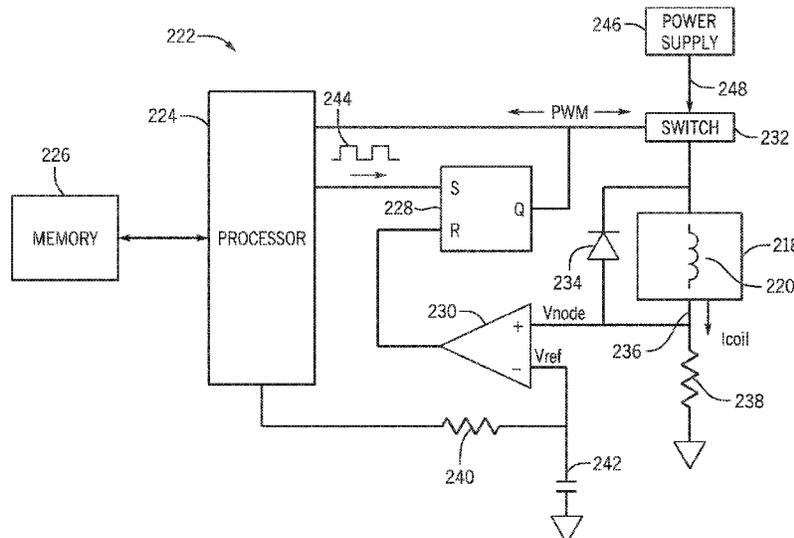

**Related U.S. Application Data**

(60) Provisional application No. 62/076,392, filed on Nov. 6, 2014.

(51) **Int. Cl.**

*G01K 7/00* (2006.01)  
*H01H 9/26* (2006.01)  
*H01H 47/00* (2006.01)  
*H01H 47/22* (2006.01)  
*H01H 50/00* (2006.01)  
*H01H 47/26* (2006.01)  
*H01H 47/02* (2006.01)  
*H01H 50/38* (2006.01)  
*H01H 50/32* (2006.01)  
*H01H 89/00* (2006.01)  
*H02P 1/26* (2006.01)  
*G01R 31/44* (2020.01)  
*H01H 9/56* (2006.01)  
*H01H 71/08* (2006.01)  
*H01H 9/30* (2006.01)  
*H02P 1/32* (2006.01)

(52) **U.S. Cl.**

CPC ..... *H01H 50/002* (2013.01); *H01H 50/16* (2013.01); *H01H 50/323* (2013.01); *H01H 50/38* (2013.01); *H01H 89/00* (2013.01);

*H02P 1/26* (2013.01); *H05K 999/99*

(2013.01); *H01H 9/56* (2013.01); *H01H 71/082* (2013.01); *H01H 2009/307* (2013.01); *H02P 1/32* (2013.01)

(58) **Field of Classification Search**

CPC ..... H05K 999/99; H02P 1/26; H02P 1/32; G01K 7/00  
 USPC ..... 361/160  
 See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2005/0146822 A1\* 7/2005 Ando ..... F02P 3/051  
 361/93.8  
 2011/0134581 A1\* 6/2011 Godo ..... F02P 3/0554  
 361/263  
 2014/0049867 A1\* 2/2014 Kikuchi ..... H03K 17/0828  
 361/87  
 2014/0146426 A1\* 5/2014 Murakami ..... G02F 1/136204  
 361/56  
 2016/0105017 A1\* 4/2016 Mallik ..... H03K 17/166  
 361/86

\* cited by examiner

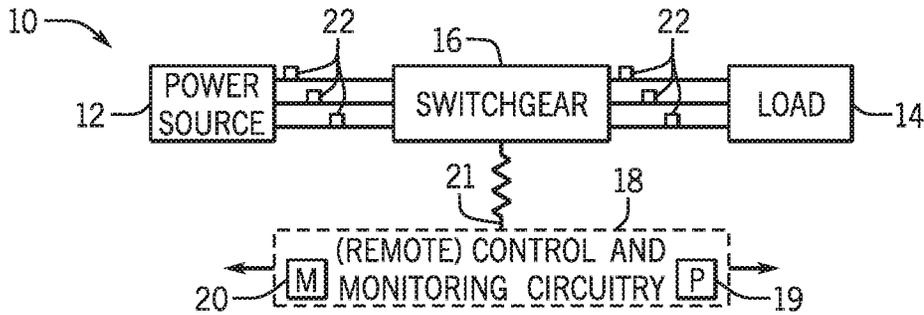


FIG. 1

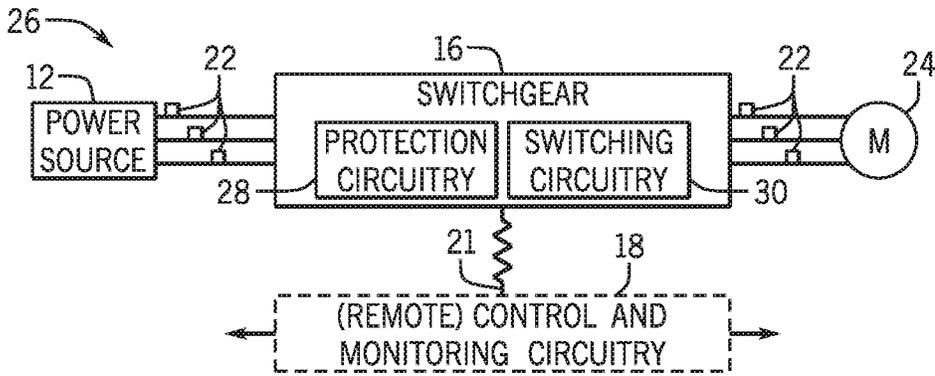


FIG. 2

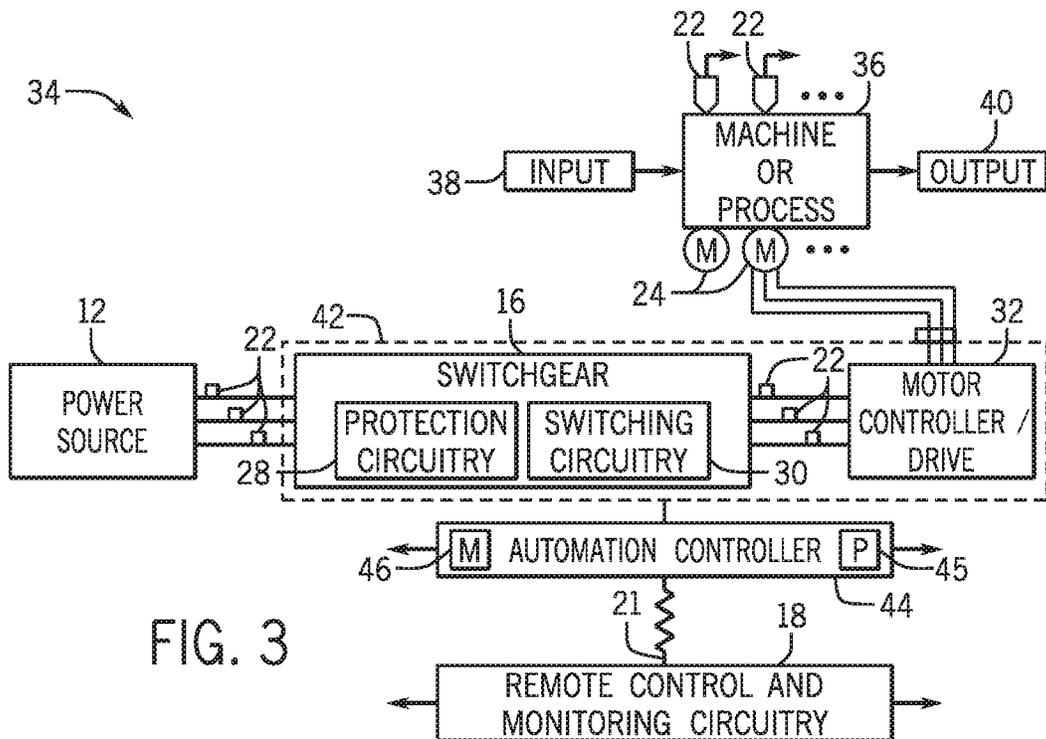
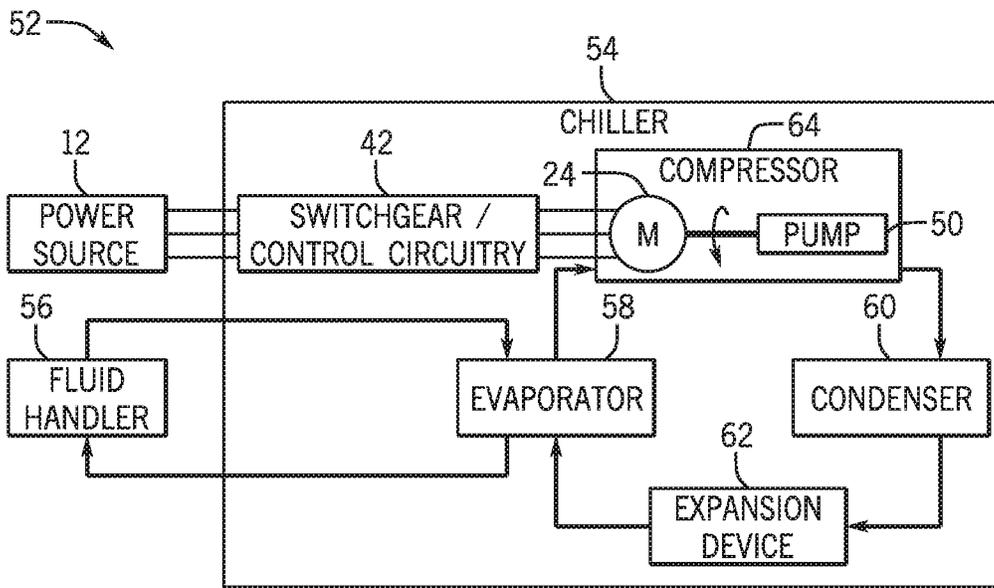
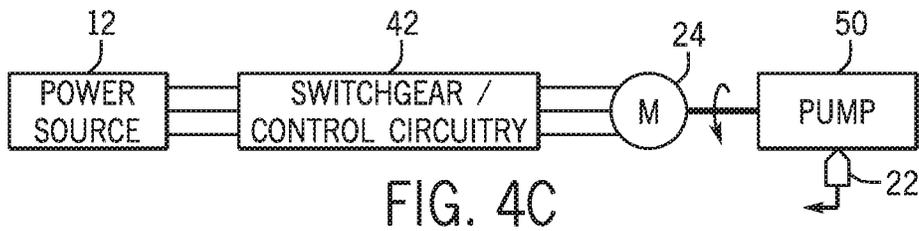
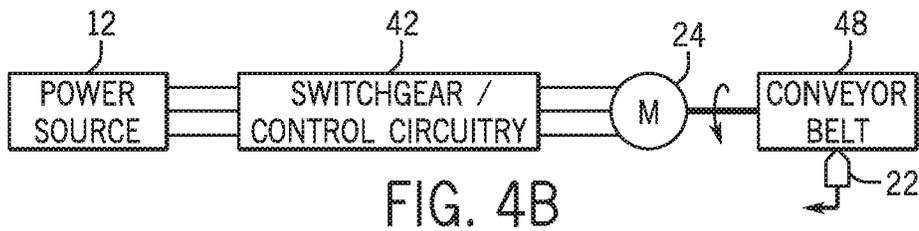
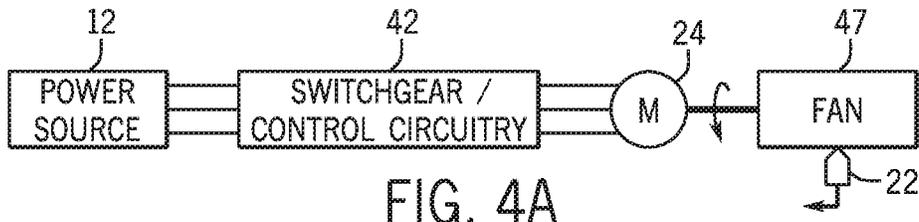


FIG. 3



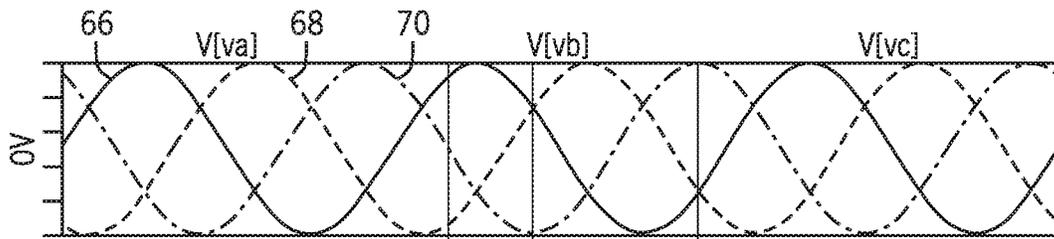


FIG. 5A

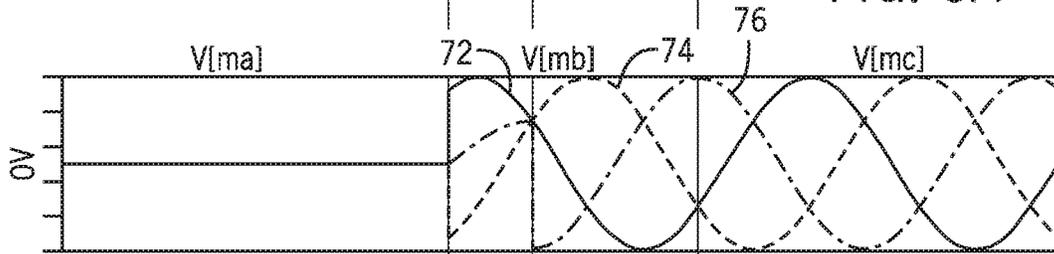


FIG. 5B

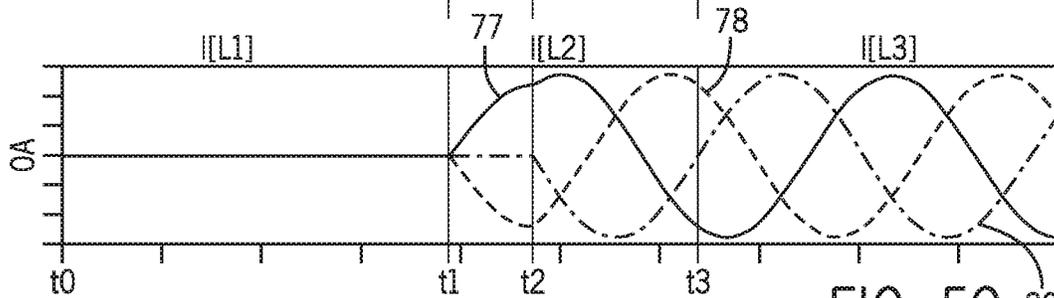


FIG. 5C

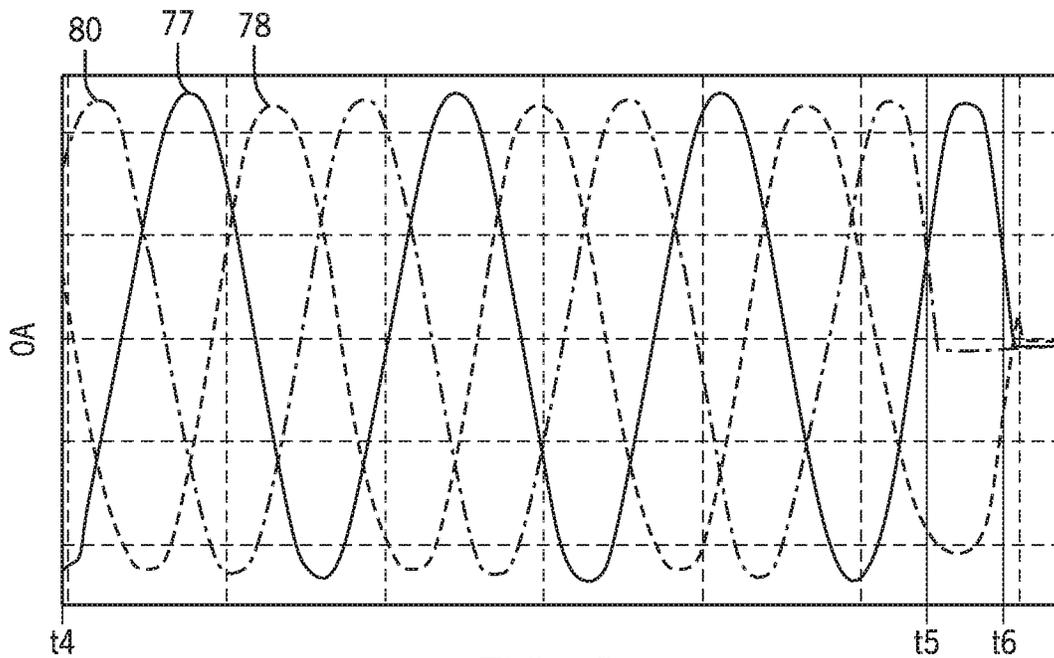


FIG. 6

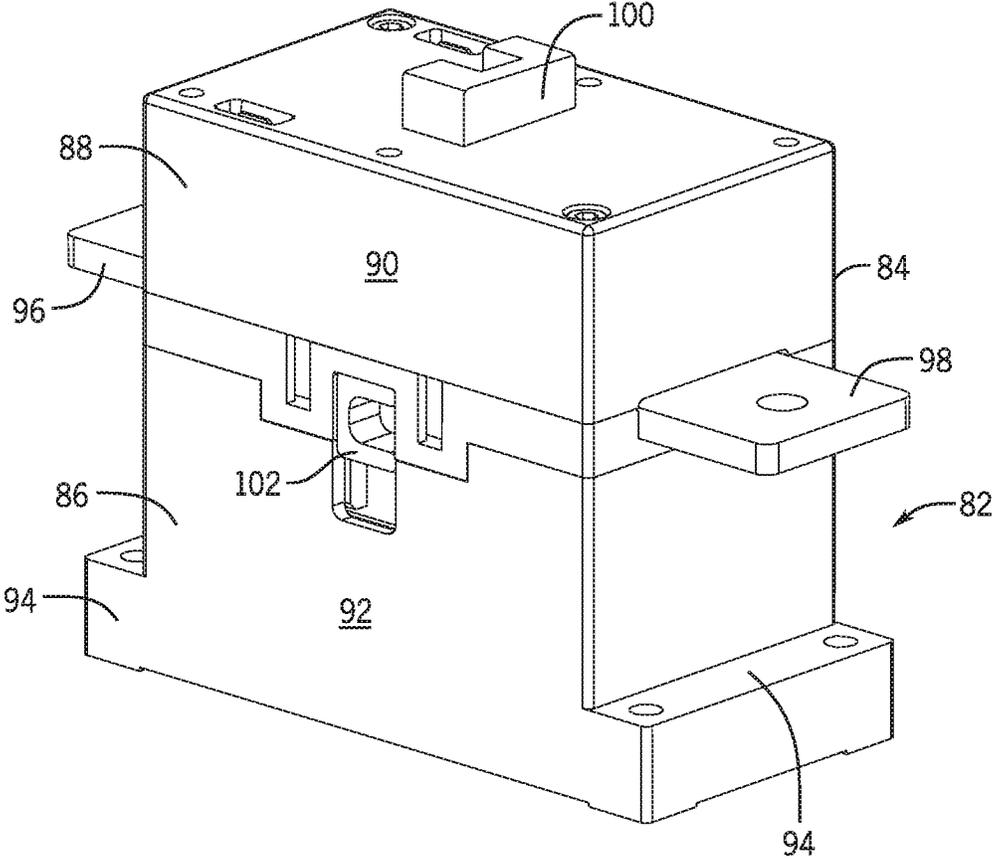
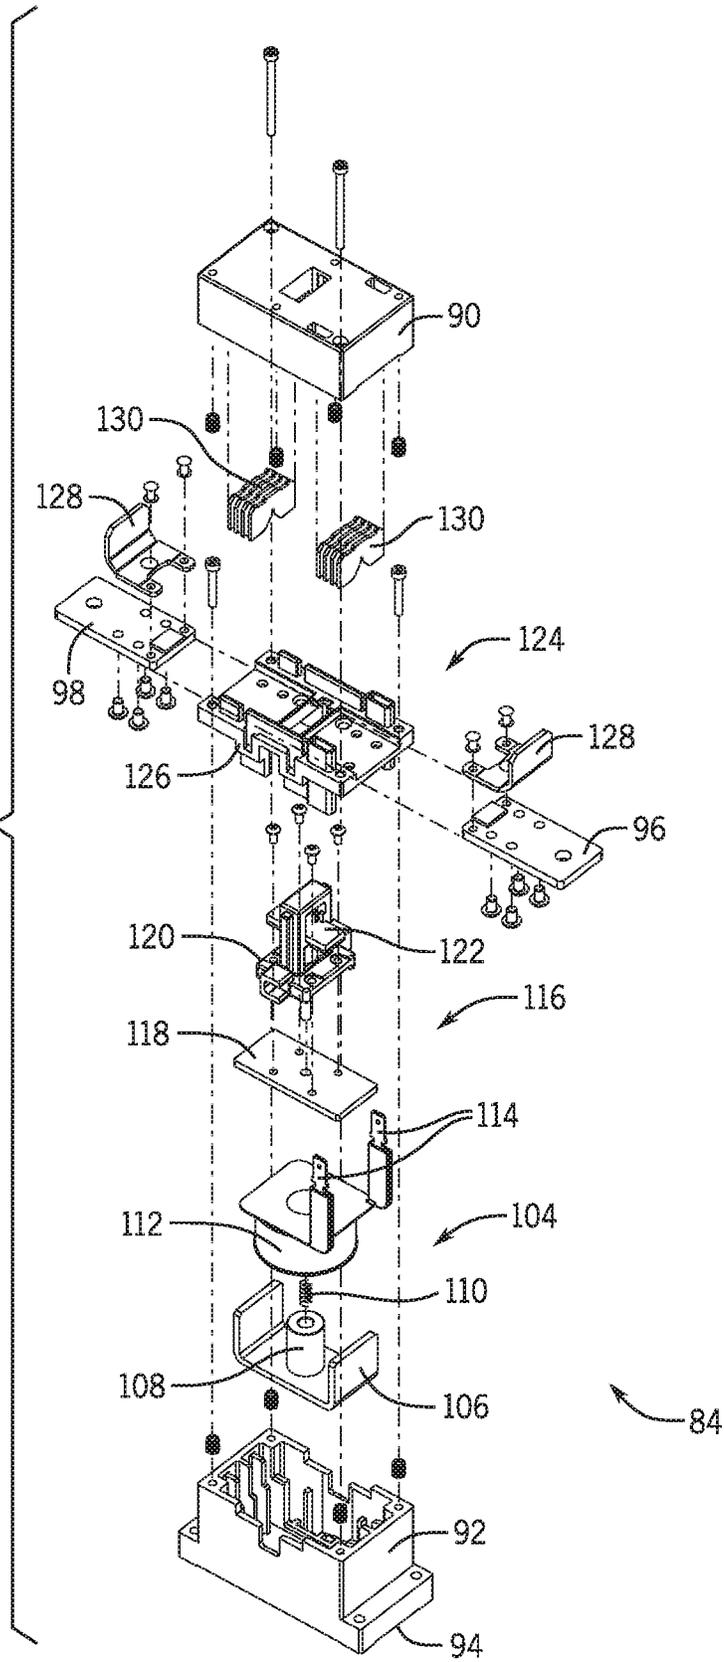


FIG. 7

FIG. 8



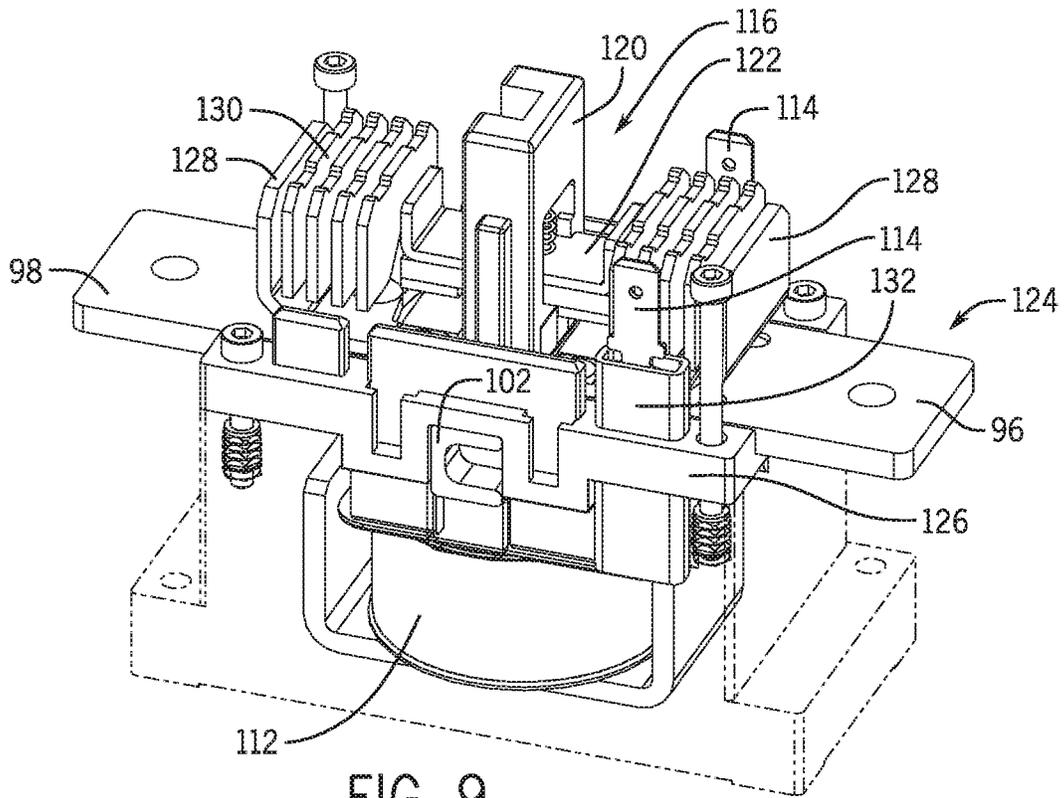


FIG. 9

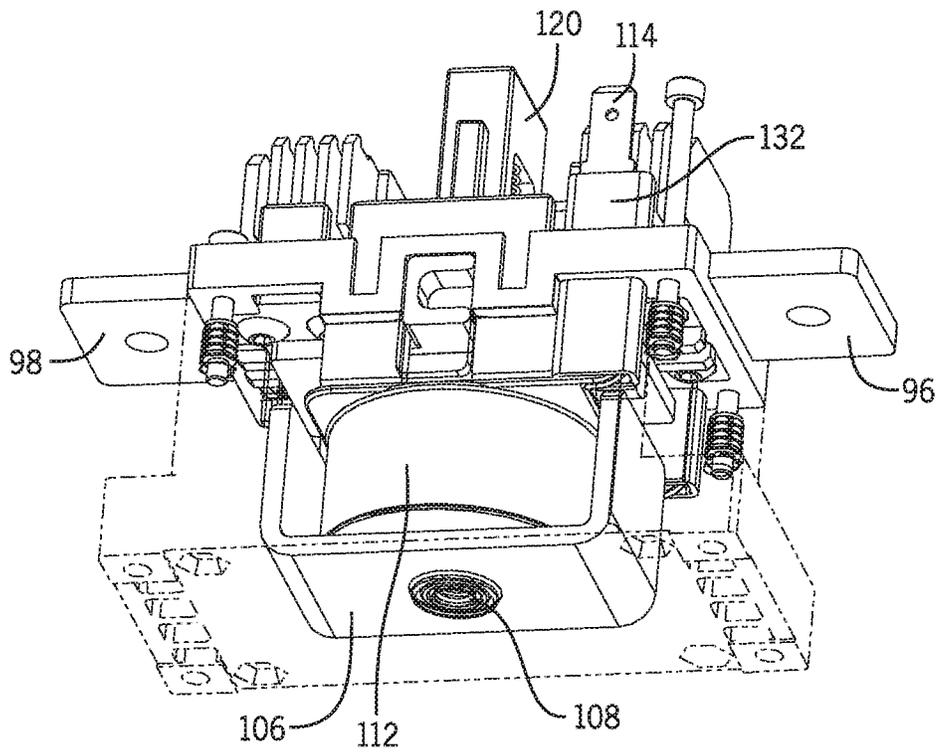


FIG. 10

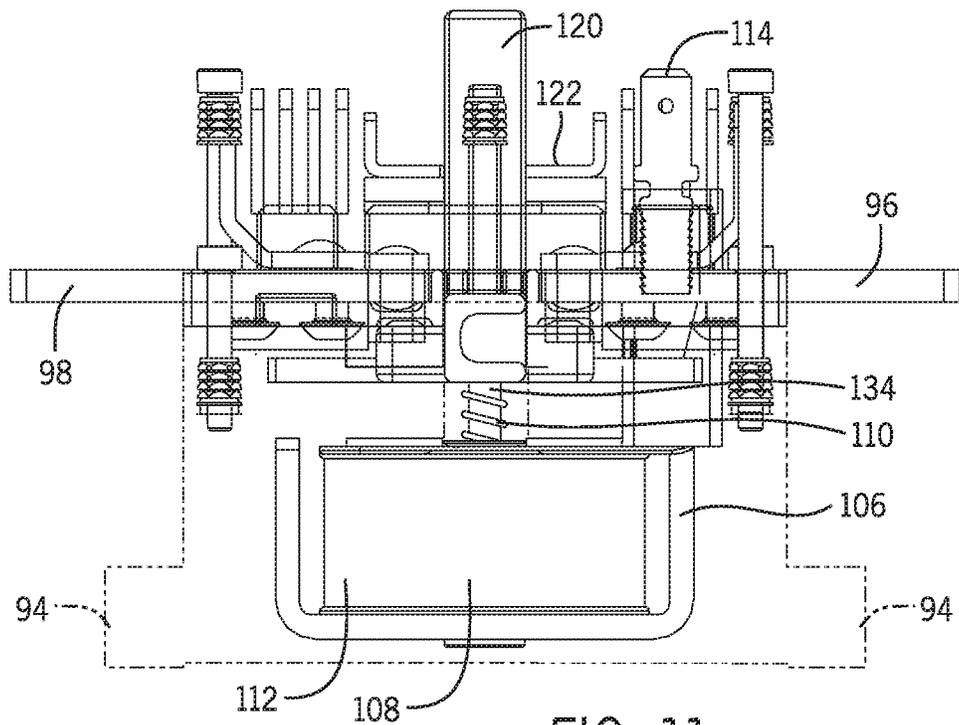


FIG. 11

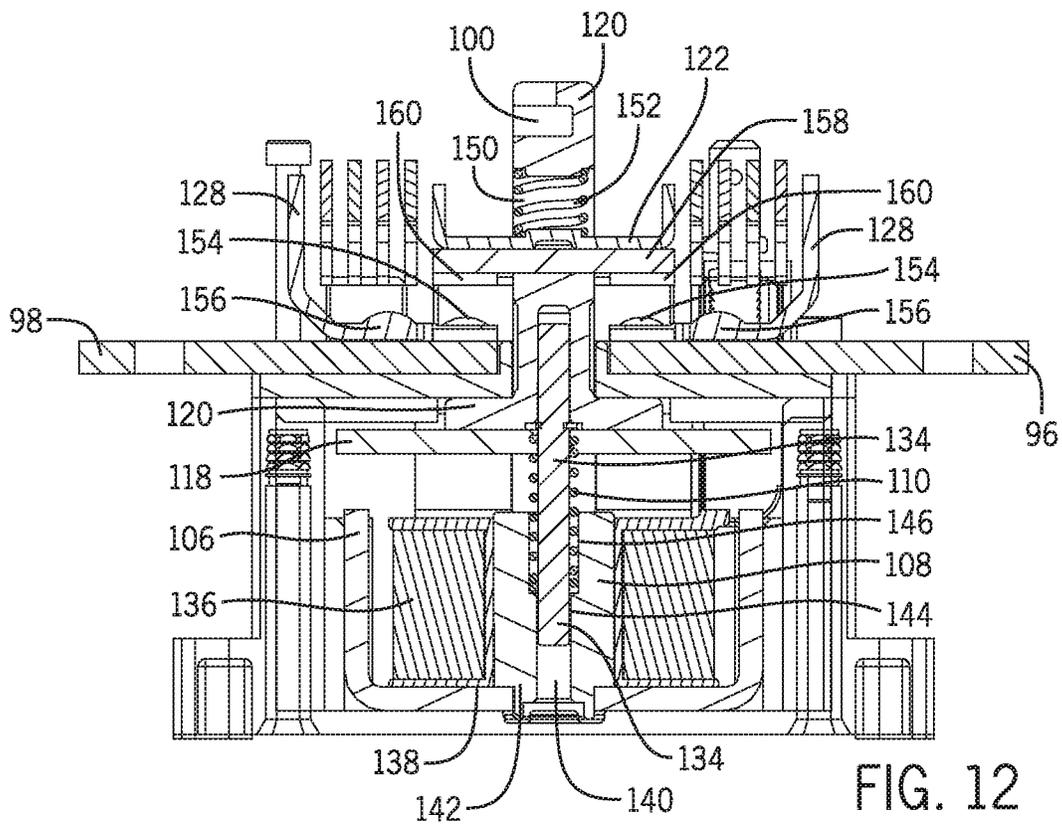


FIG. 12

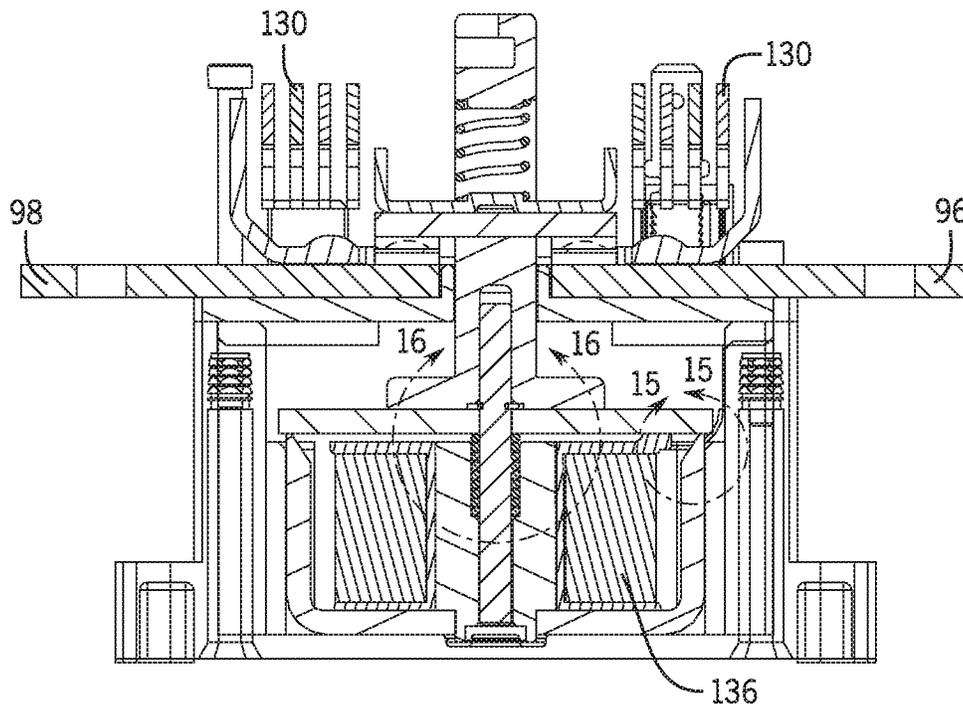
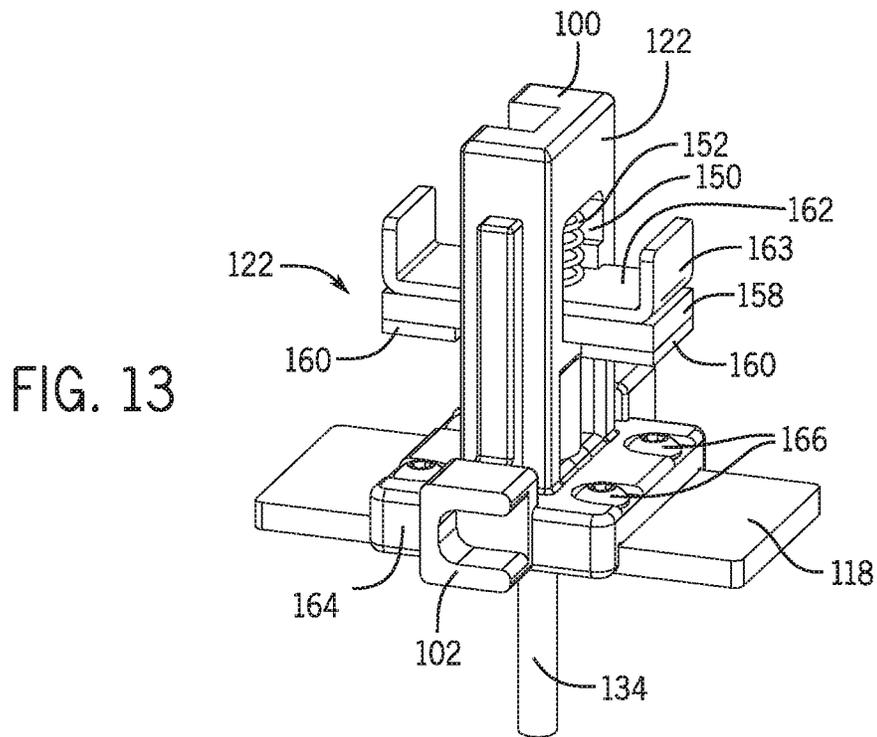


FIG. 14

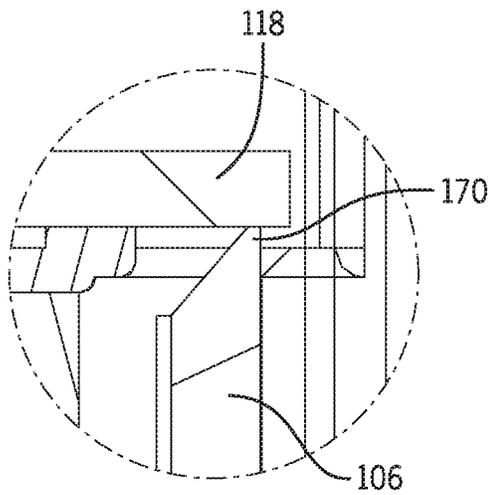


FIG. 15

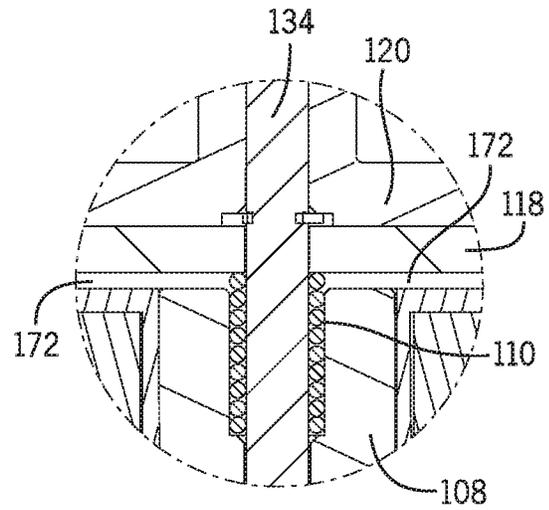


FIG. 16

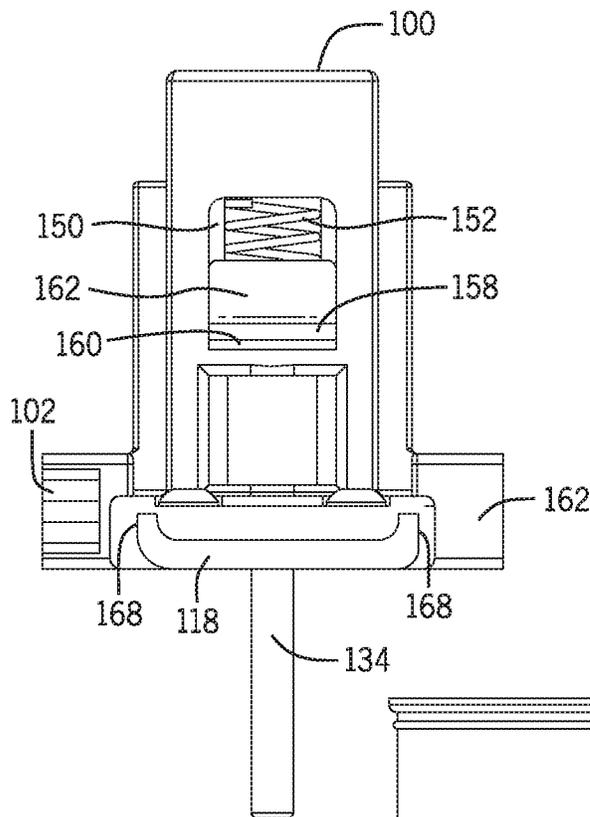


FIG. 17A

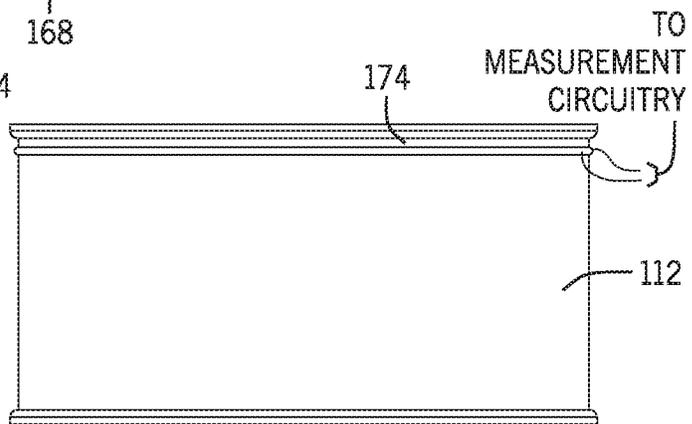


FIG. 17B

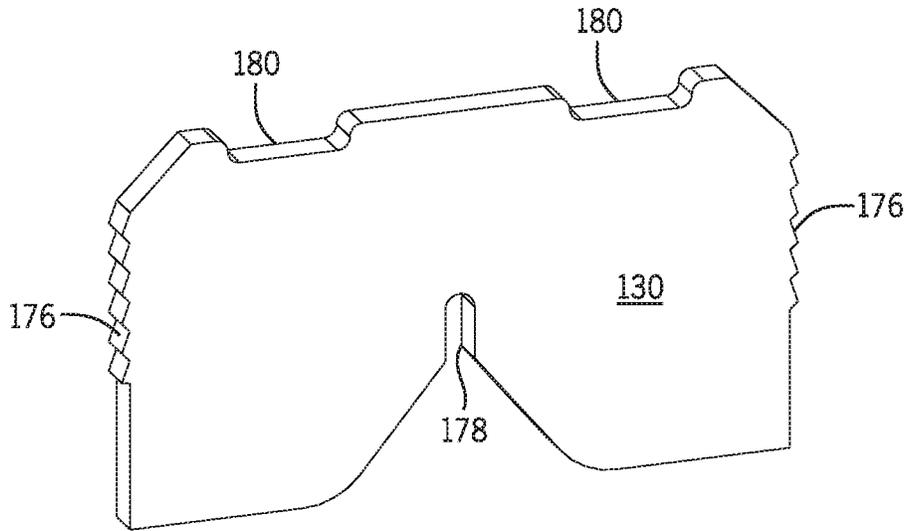


FIG. 18

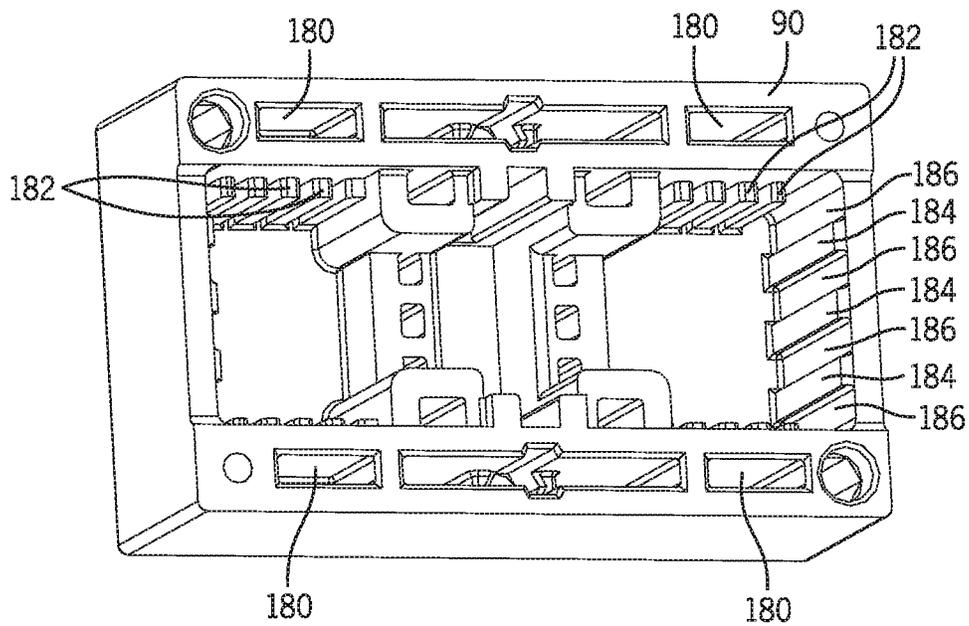


FIG. 19

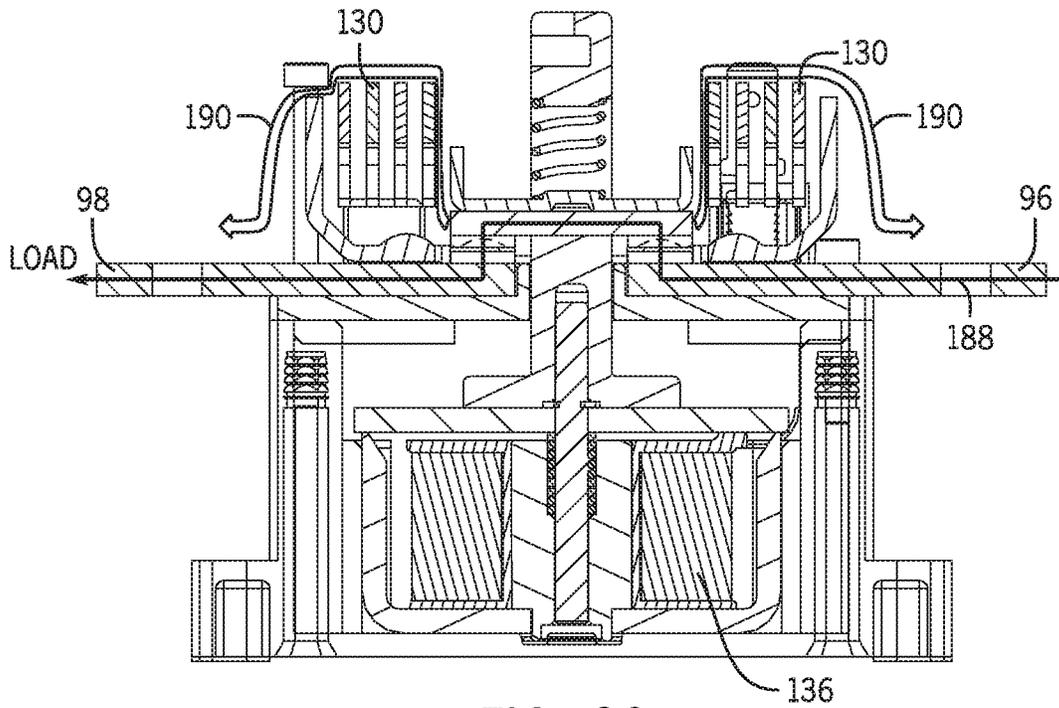


FIG. 20

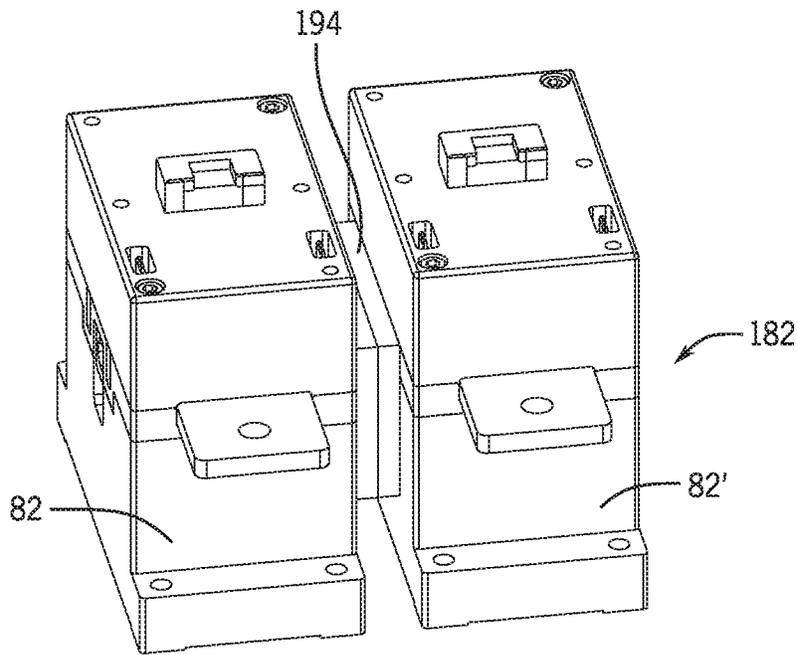


FIG. 21

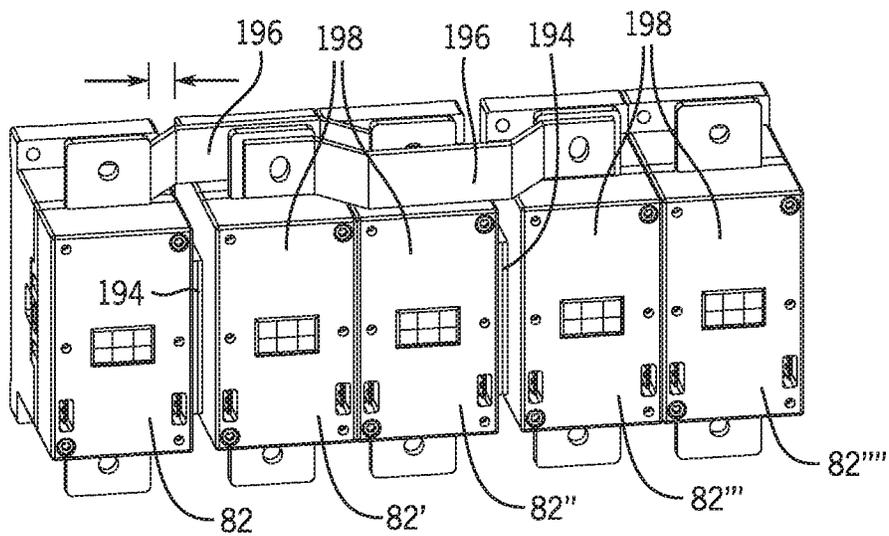


FIG. 22

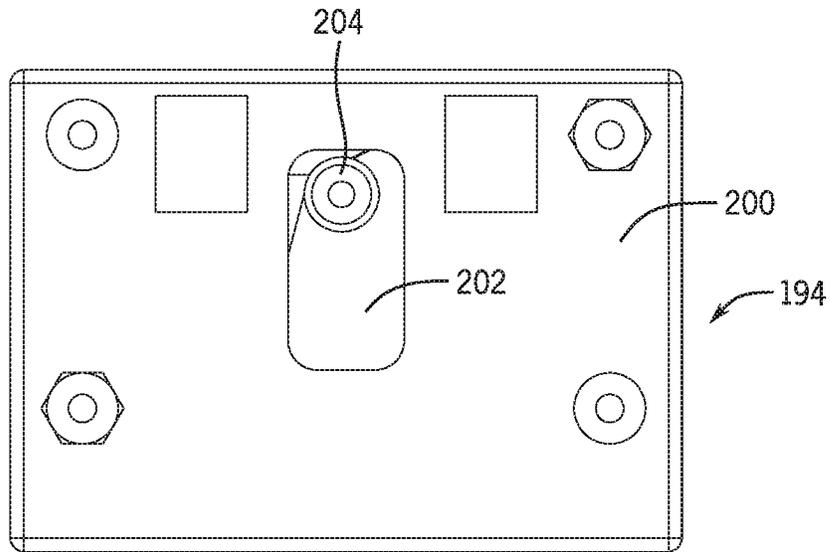


FIG. 23

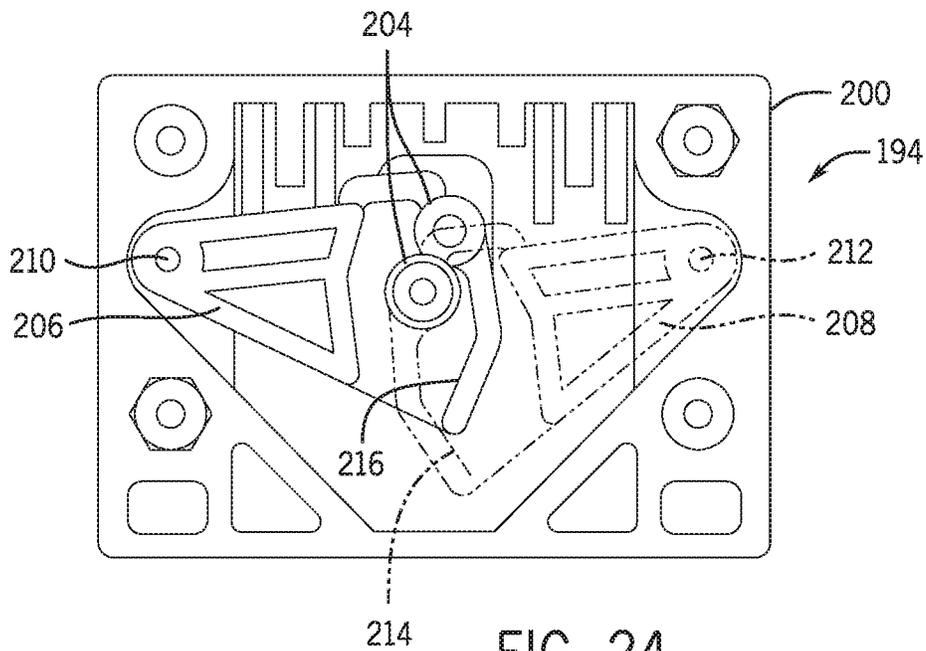


FIG. 24

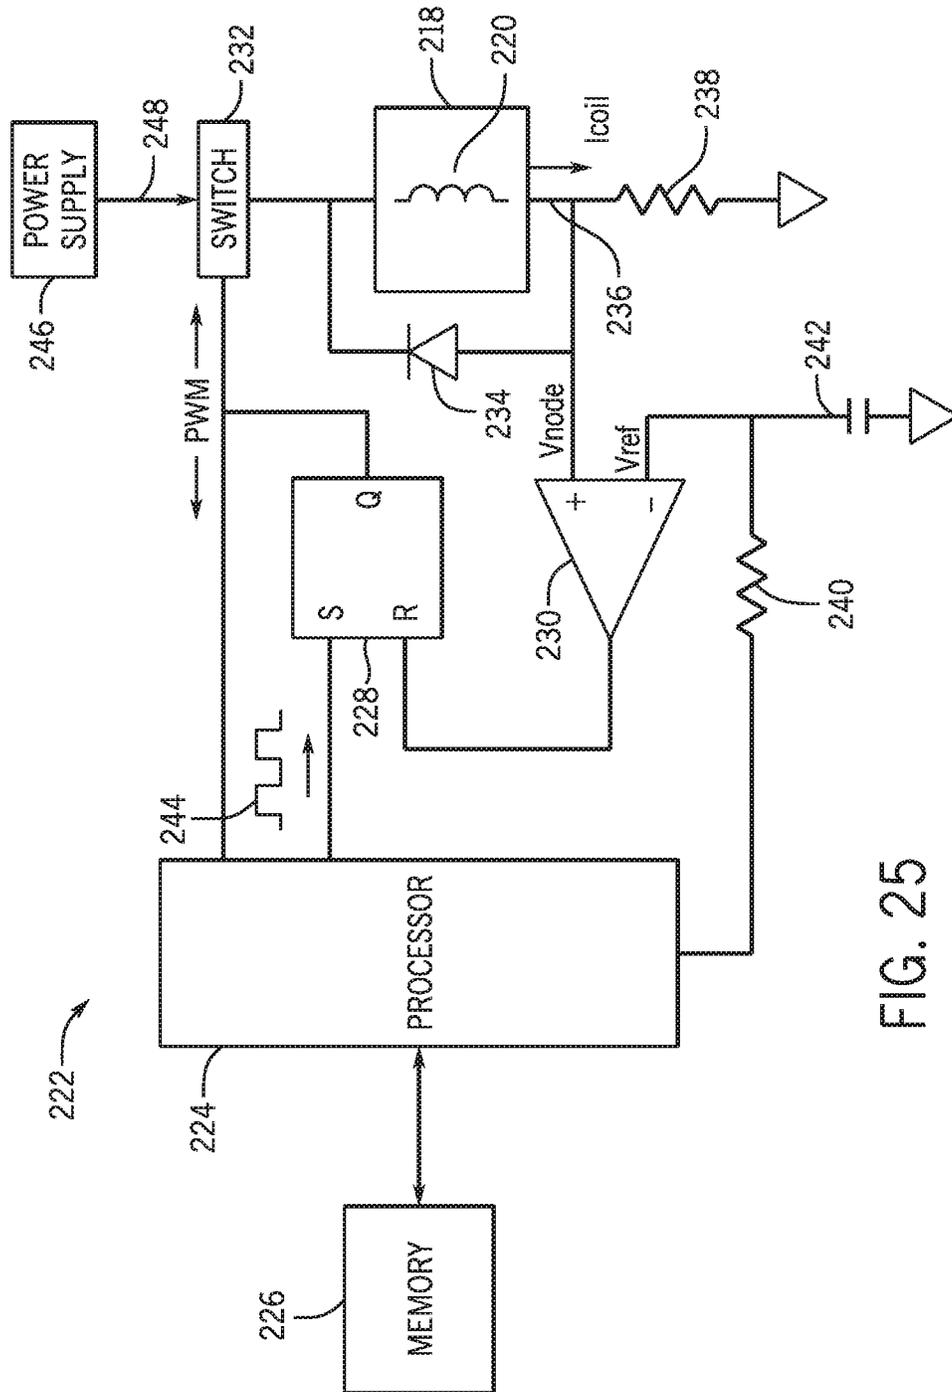


FIG. 25

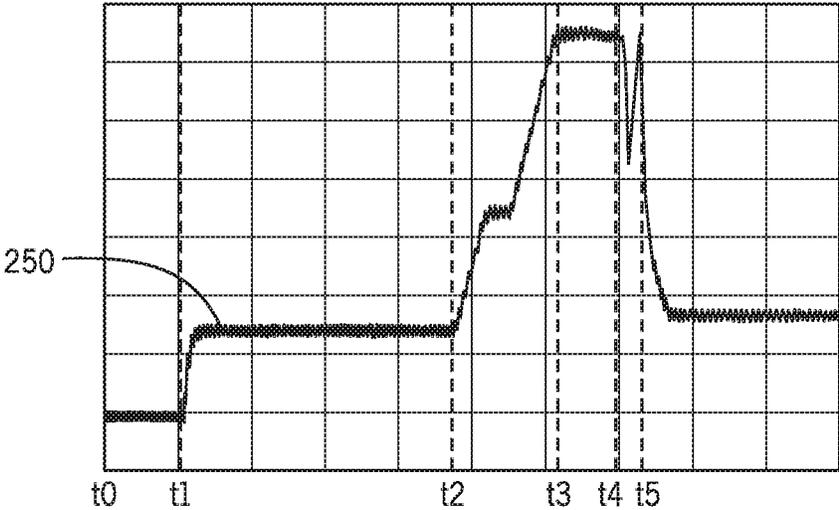


FIG. 26A

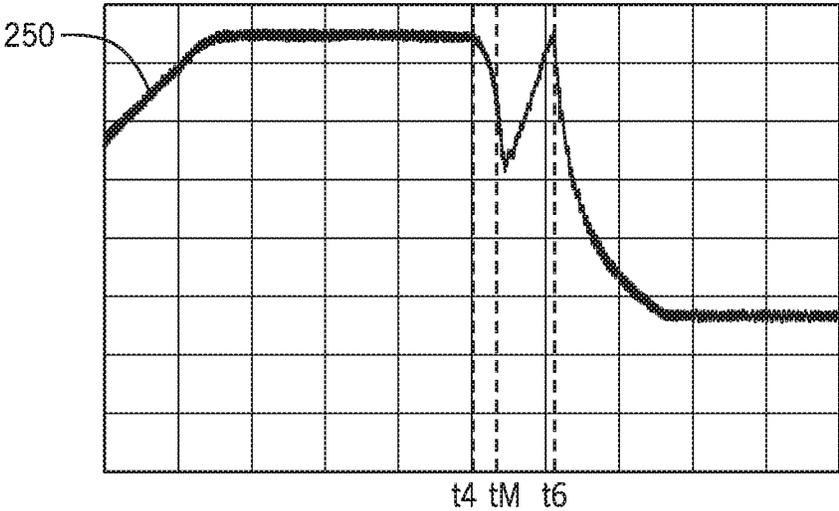


FIG. 26B

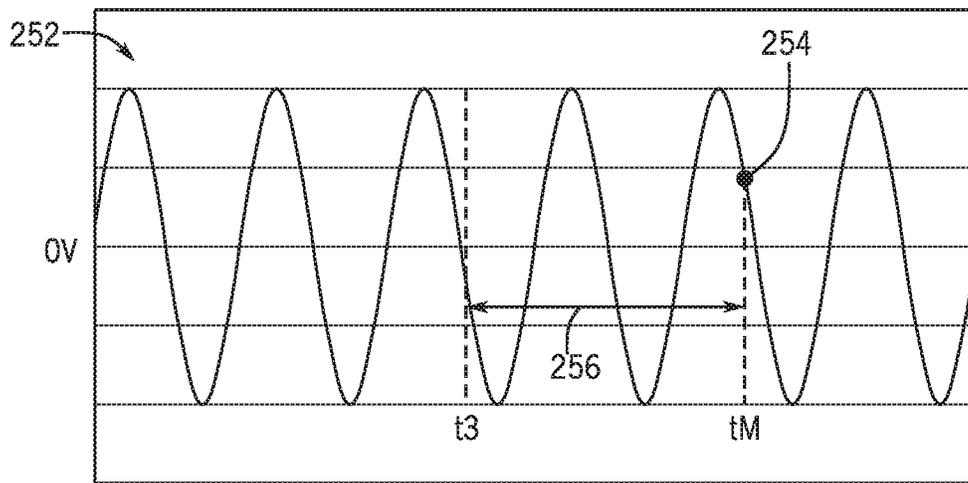


FIG. 27

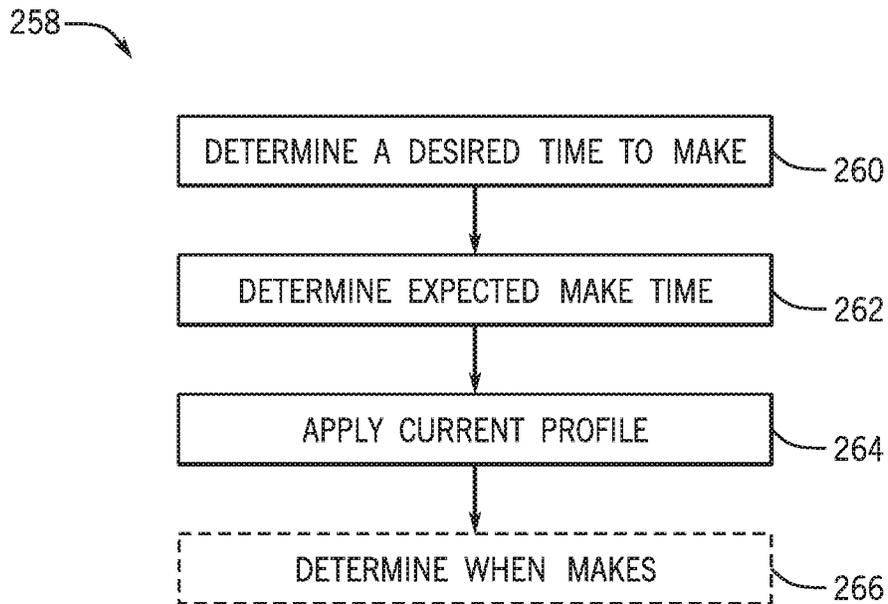


FIG. 28

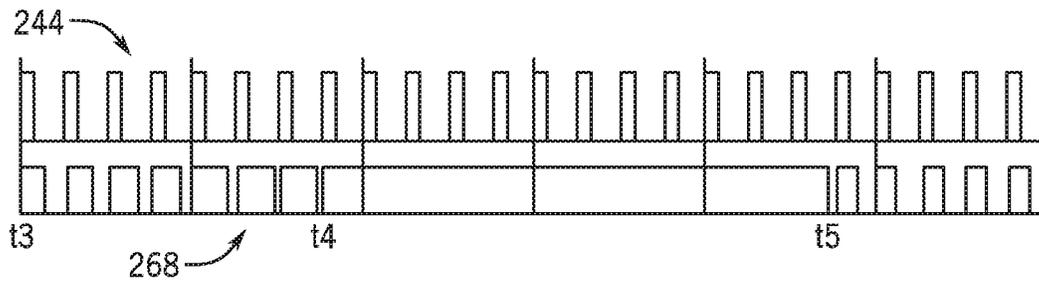


FIG. 29

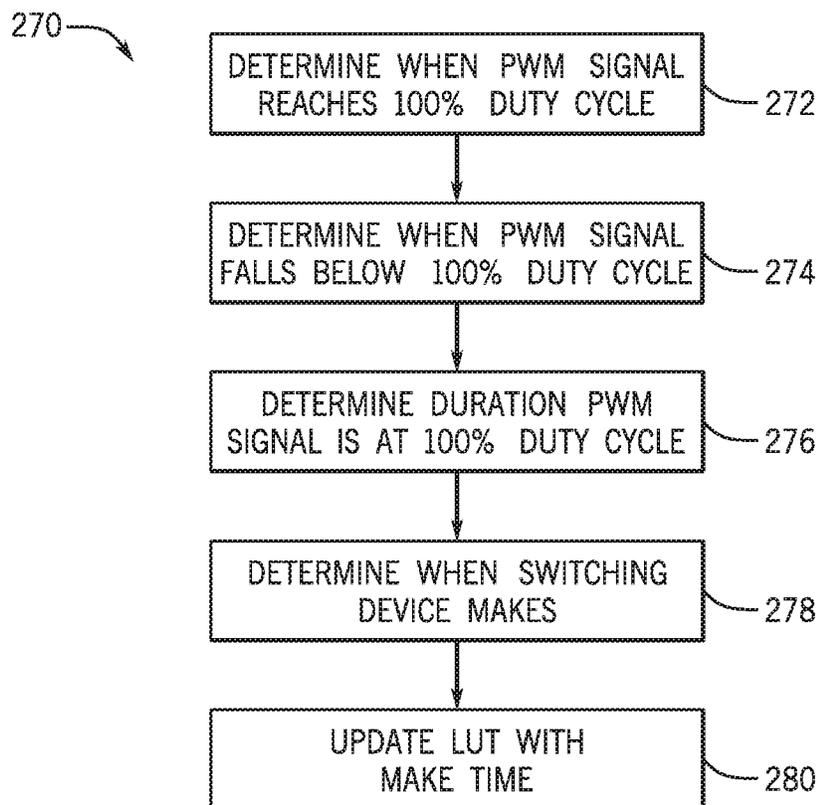


FIG. 30

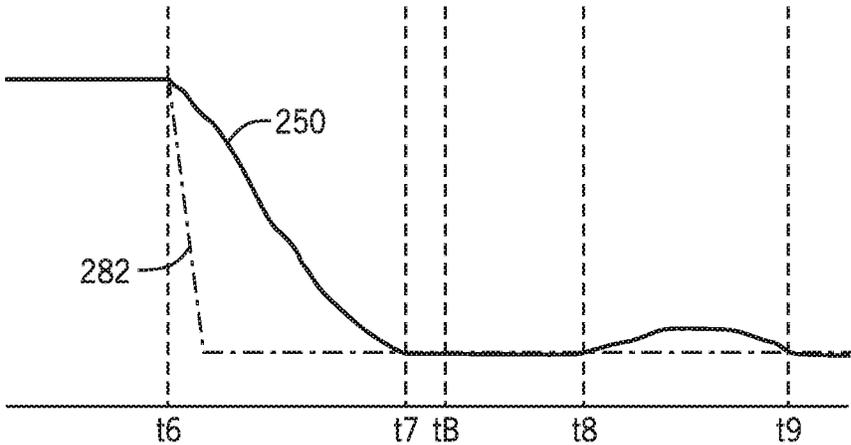


FIG. 31

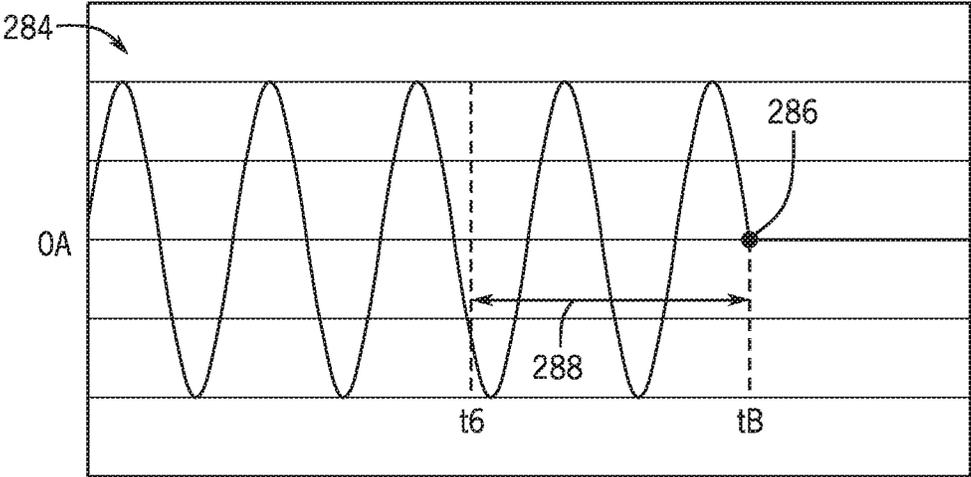


FIG. 32

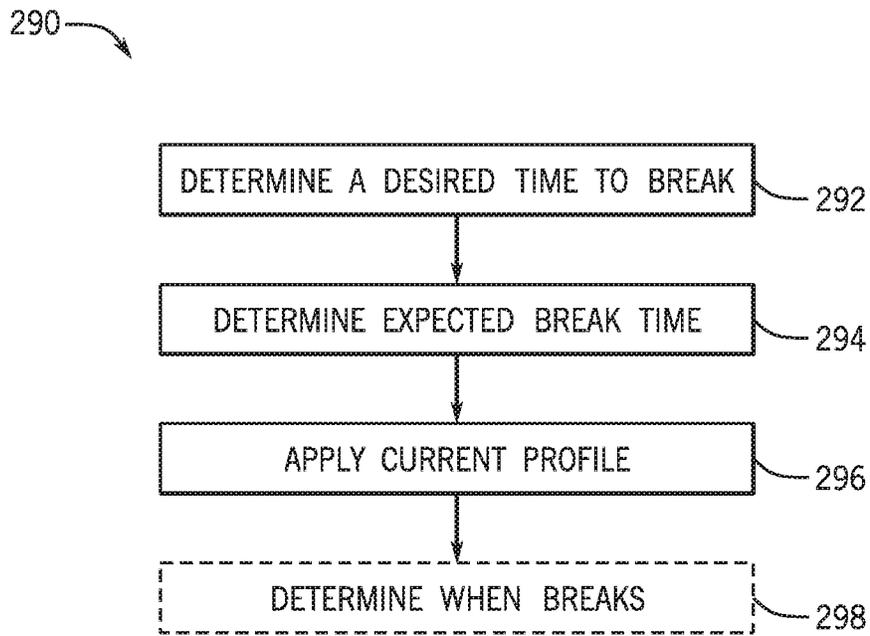


FIG. 33

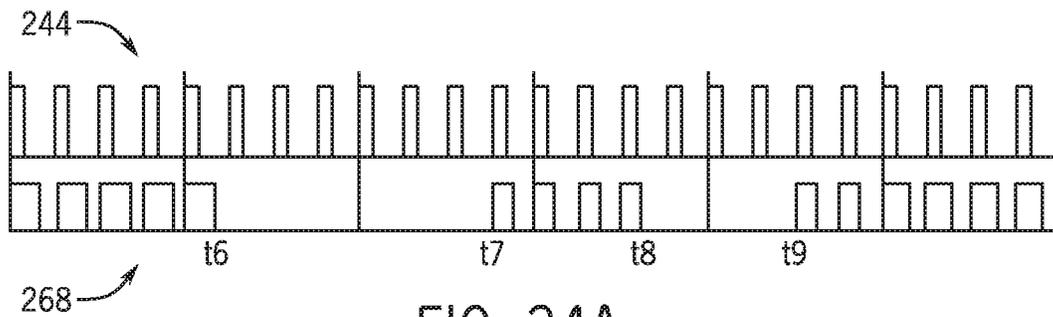


FIG. 34A

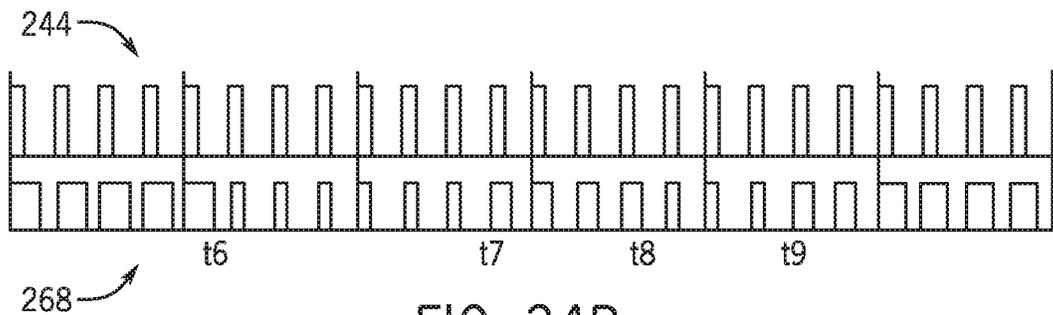


FIG. 34B

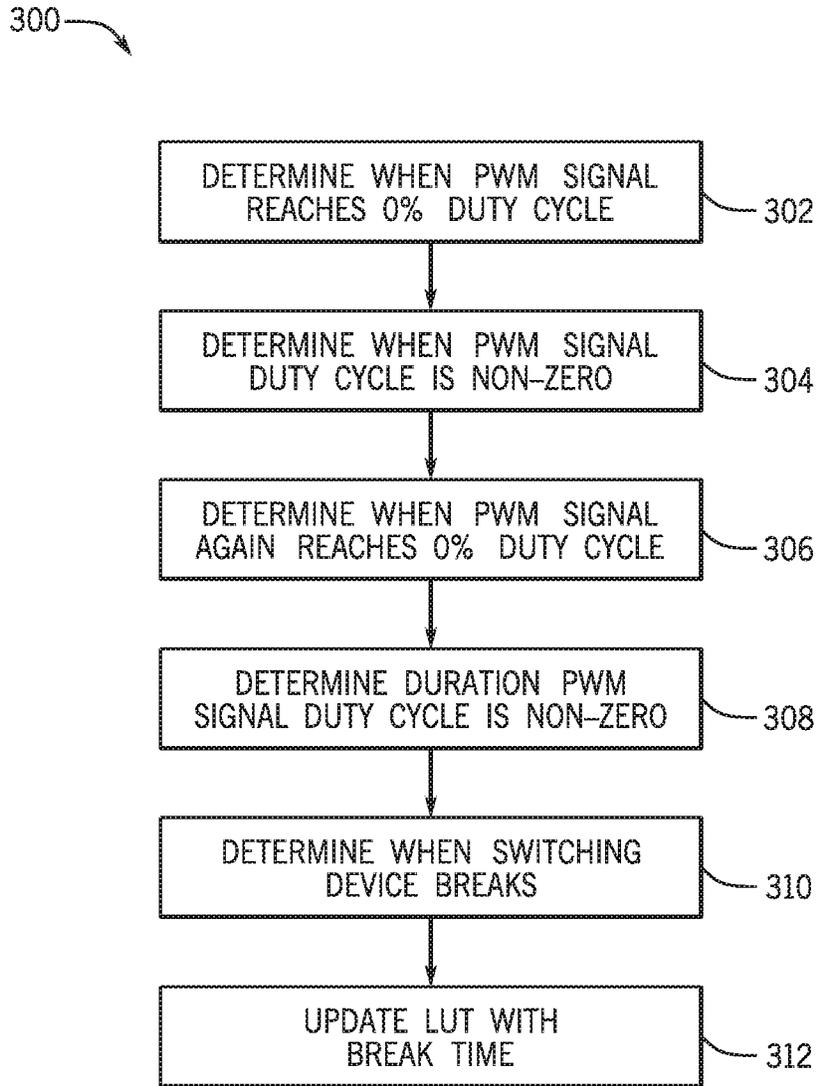


FIG. 35

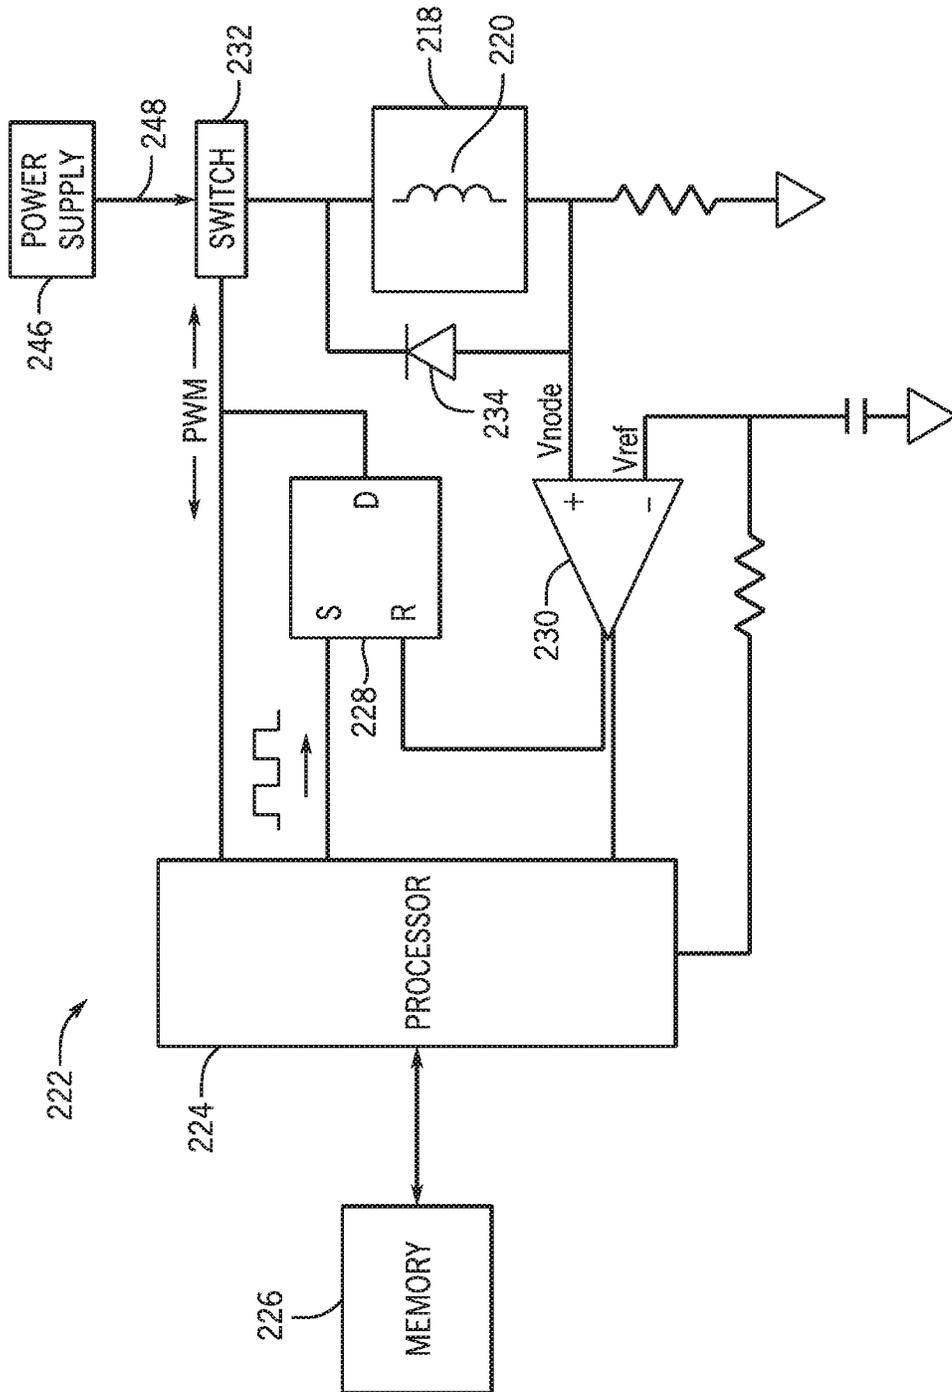


FIG. 36

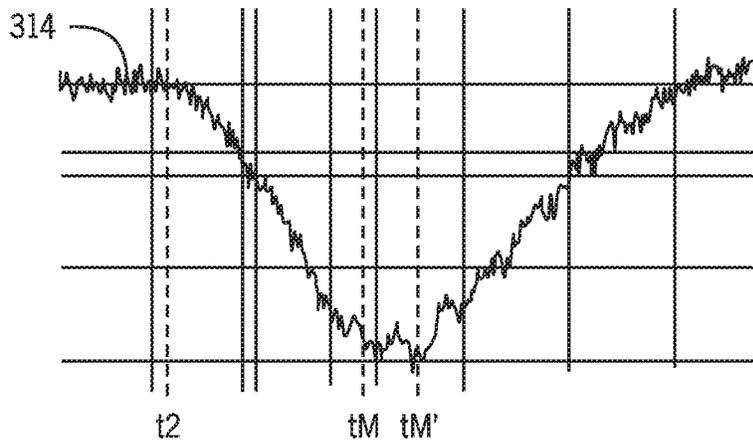


FIG. 37

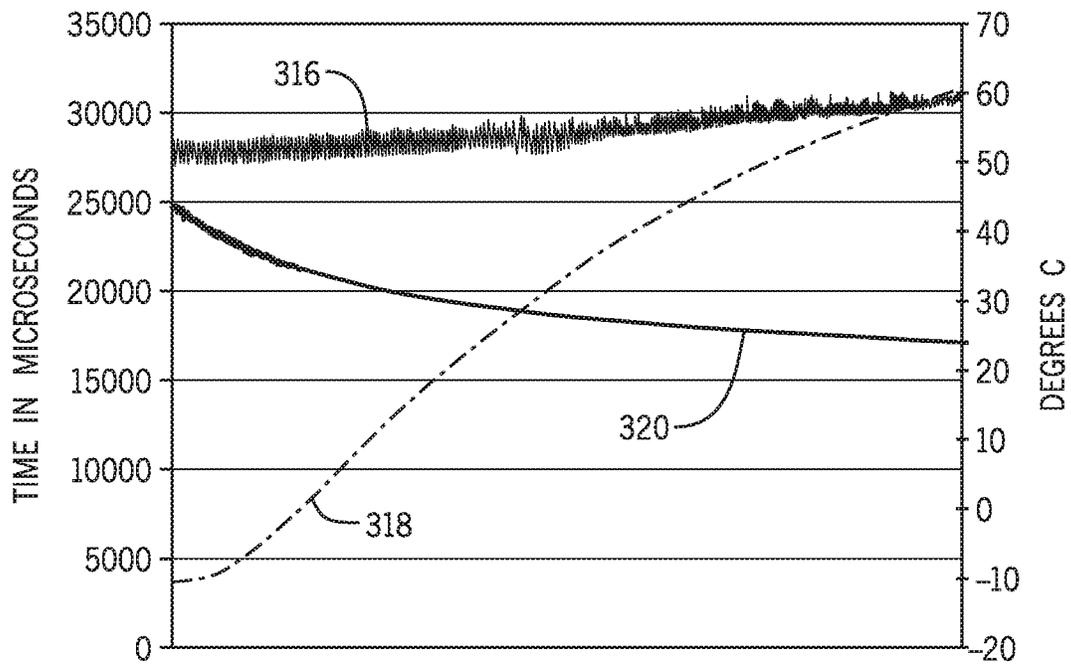


FIG. 38

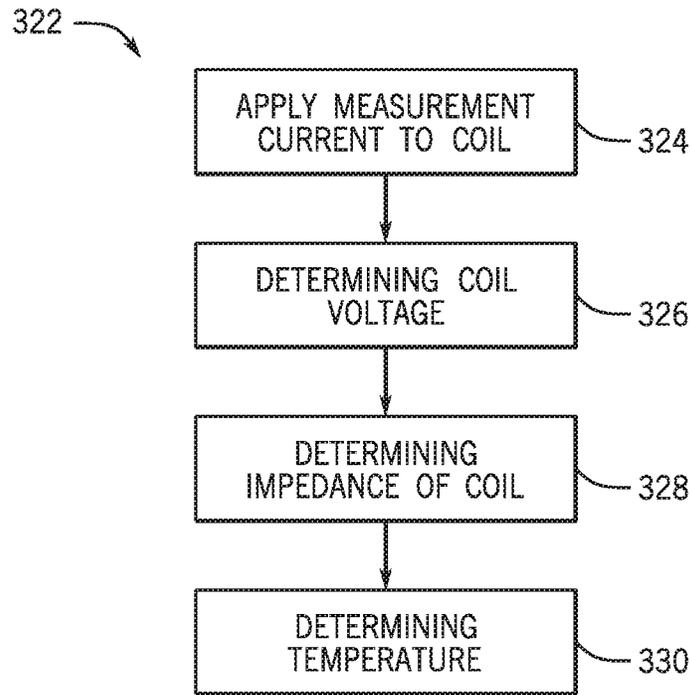


FIG. 39

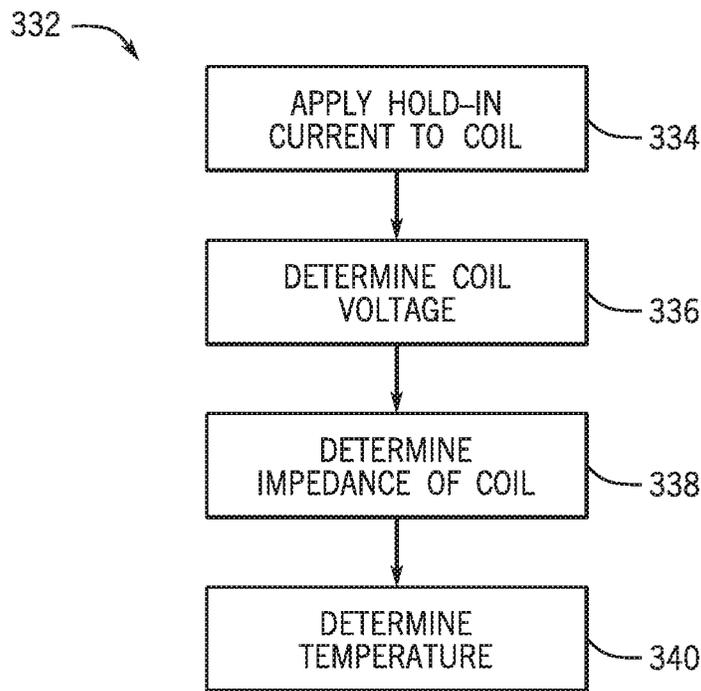


FIG. 40

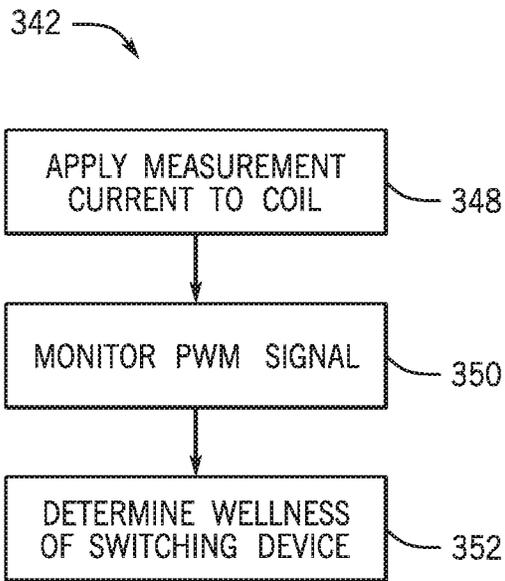


FIG. 41A

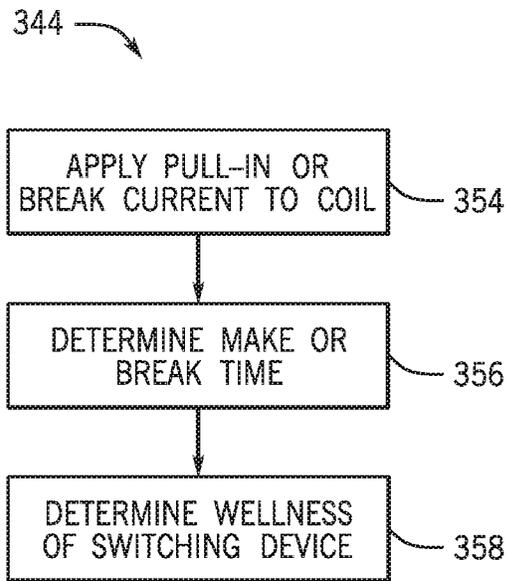


FIG. 41B

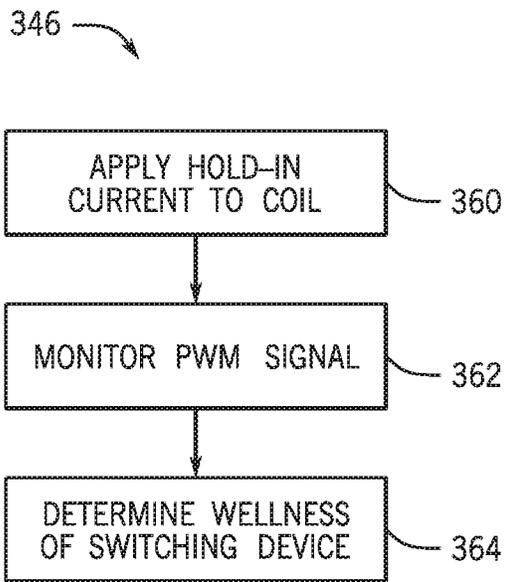


FIG. 41C

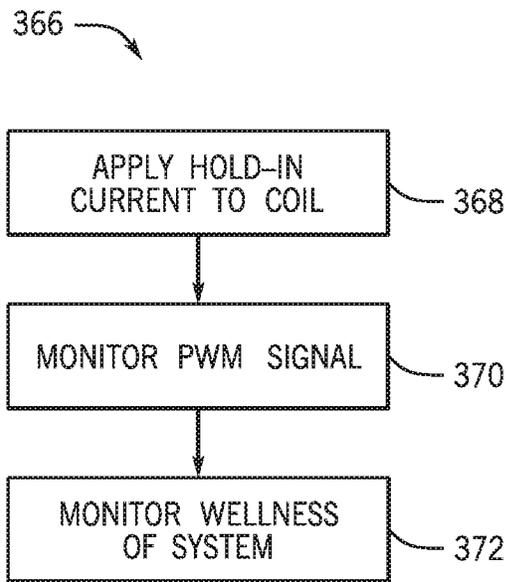


FIG. 41D

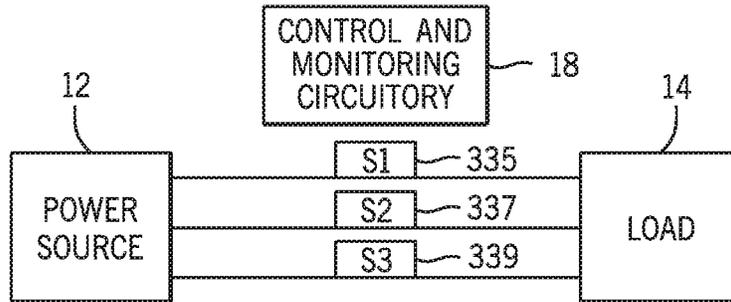


FIG. 42A

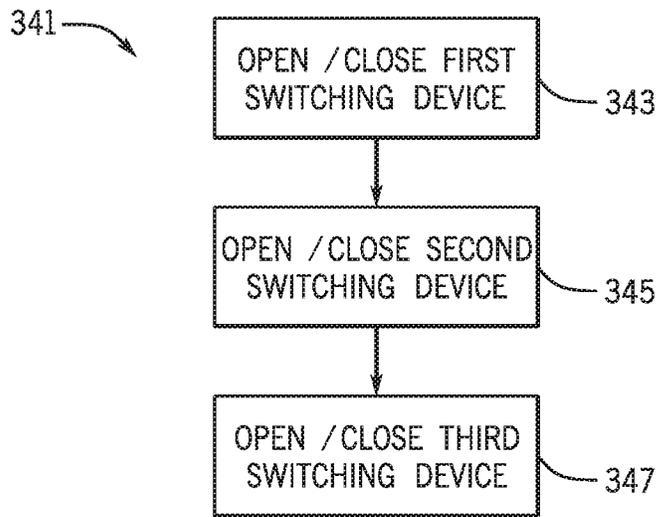


FIG. 42B

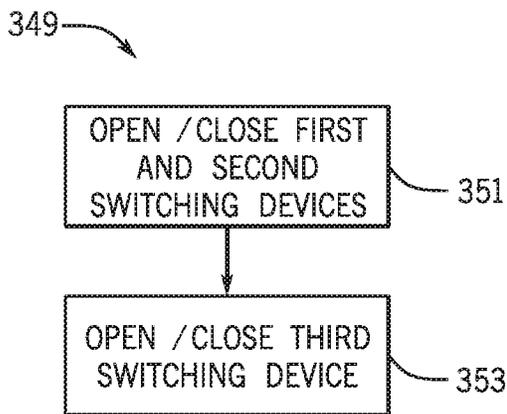


FIG. 42C

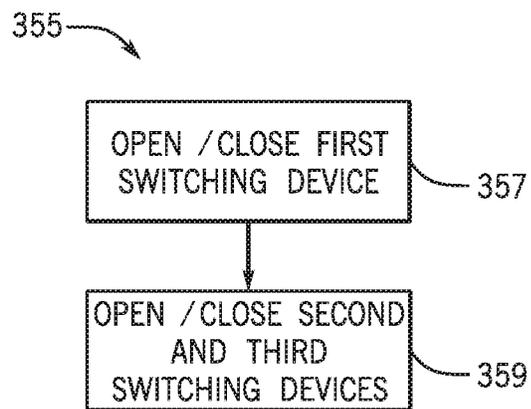


FIG. 42D

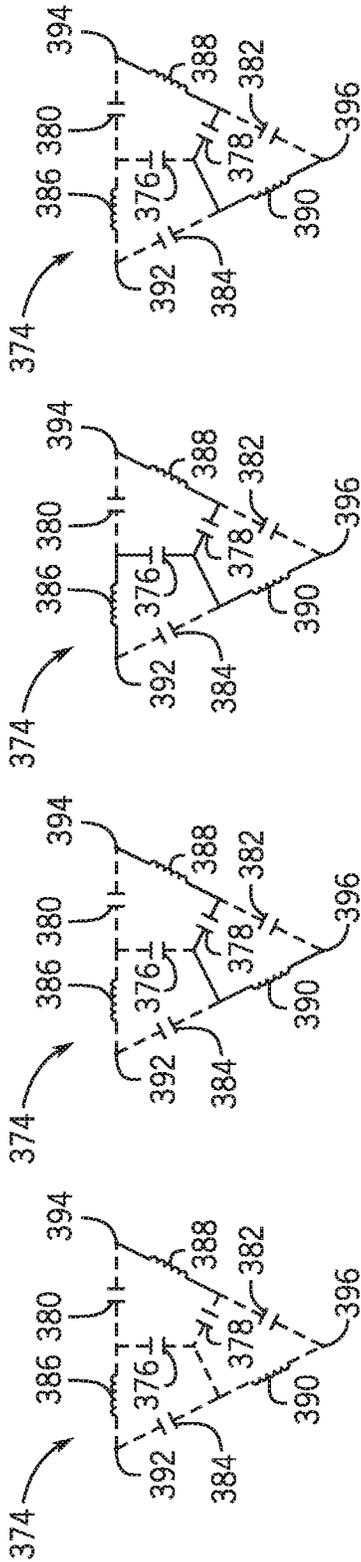


FIG. 43D

FIG. 43C

FIG. 43B

FIG. 43A

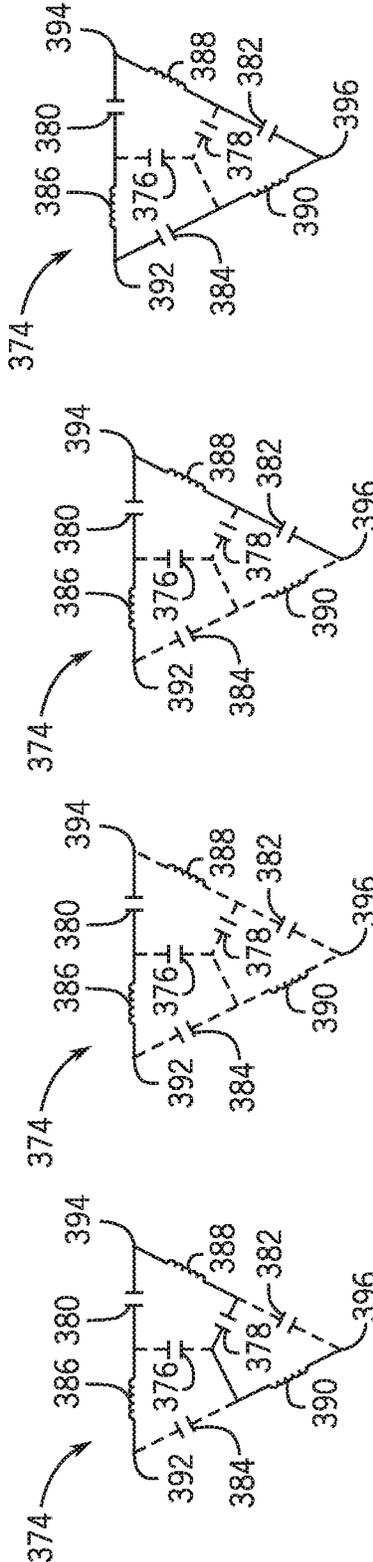


FIG. 43H

FIG. 43G

FIG. 43F

FIG. 43E

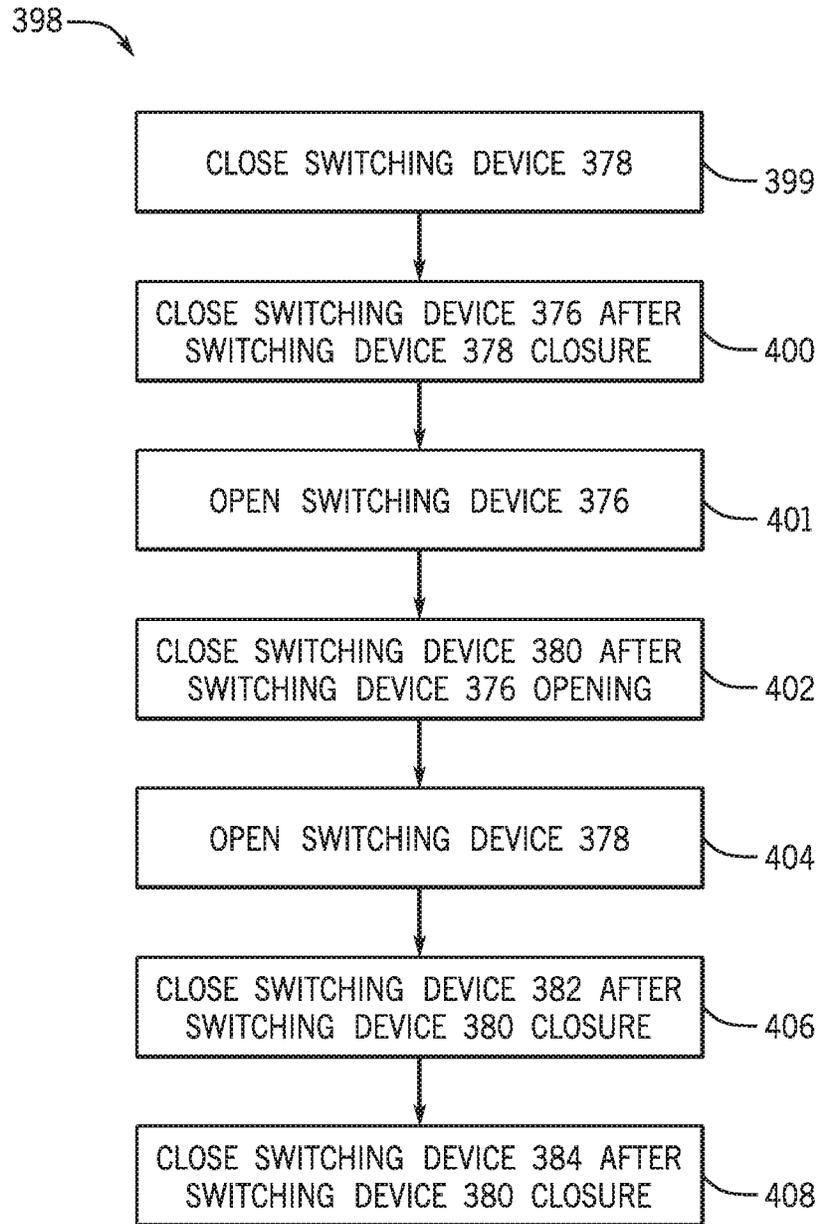


FIG. 44A

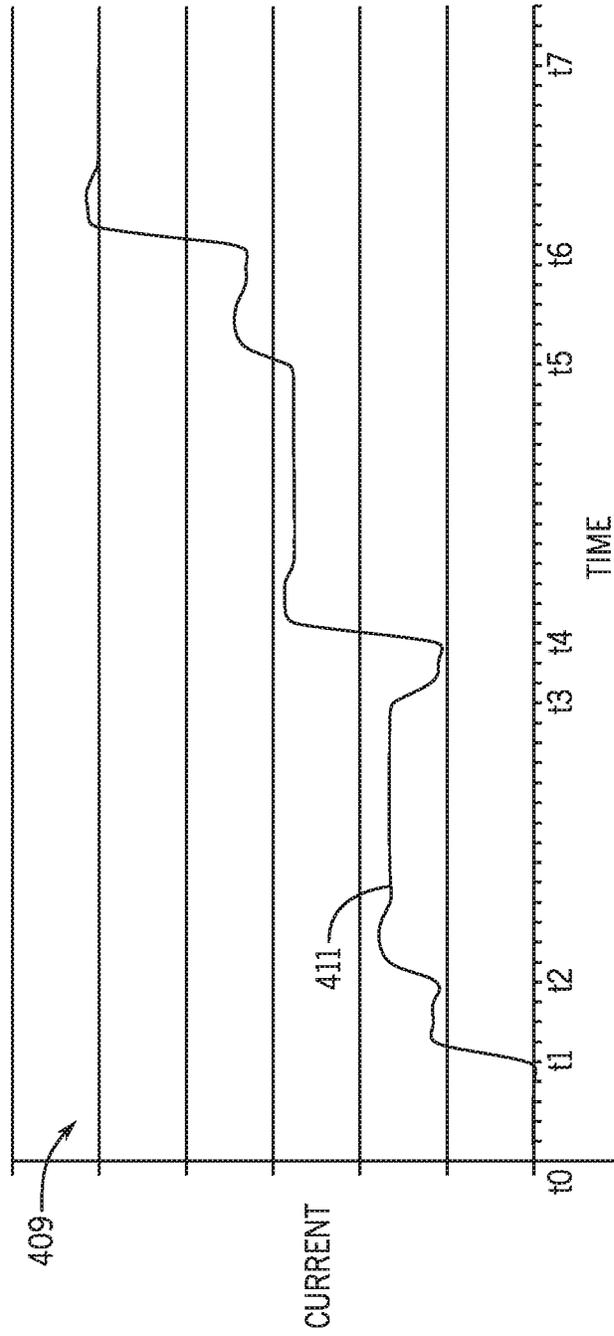


FIG. 44B

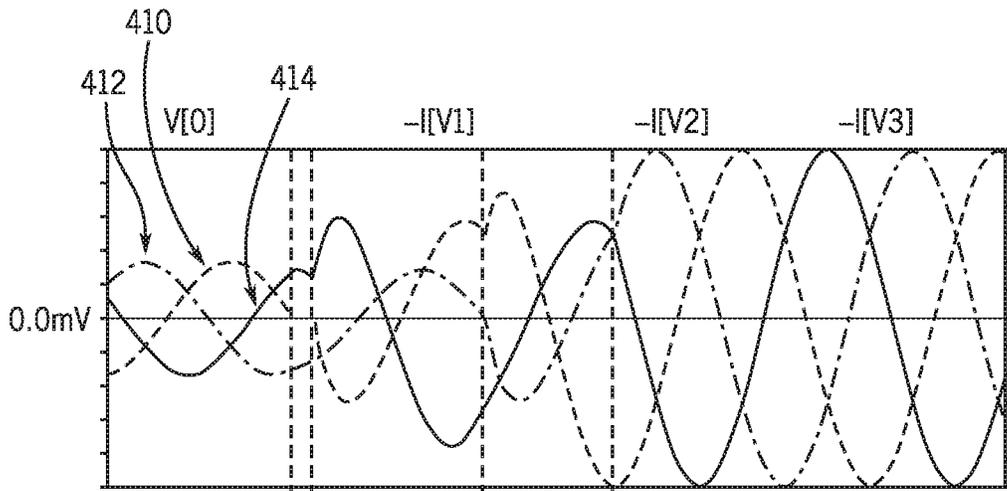


FIG. 45A

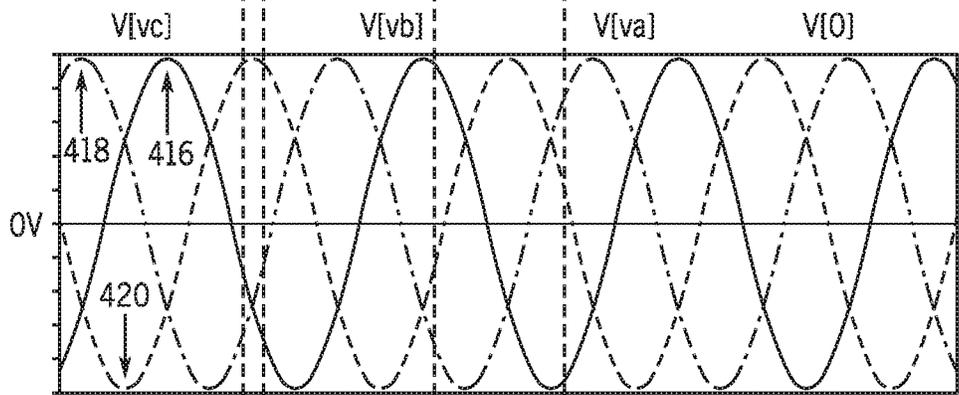


FIG. 45B

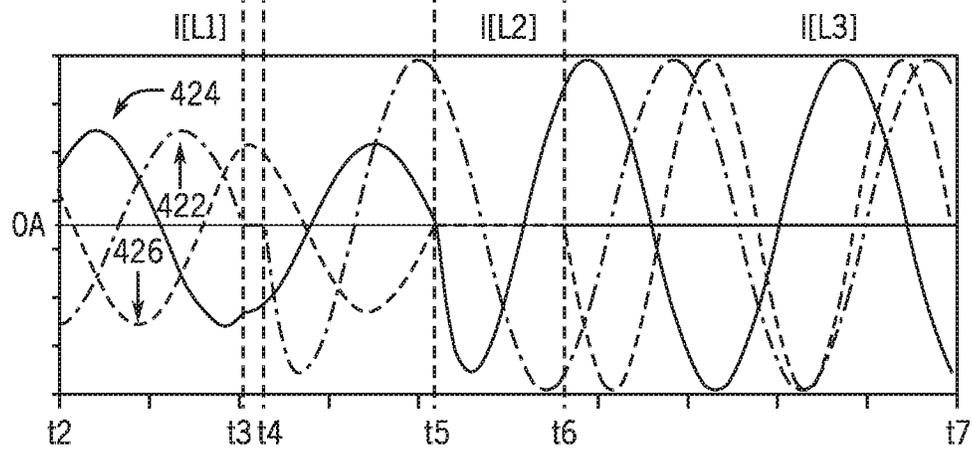


FIG. 45C

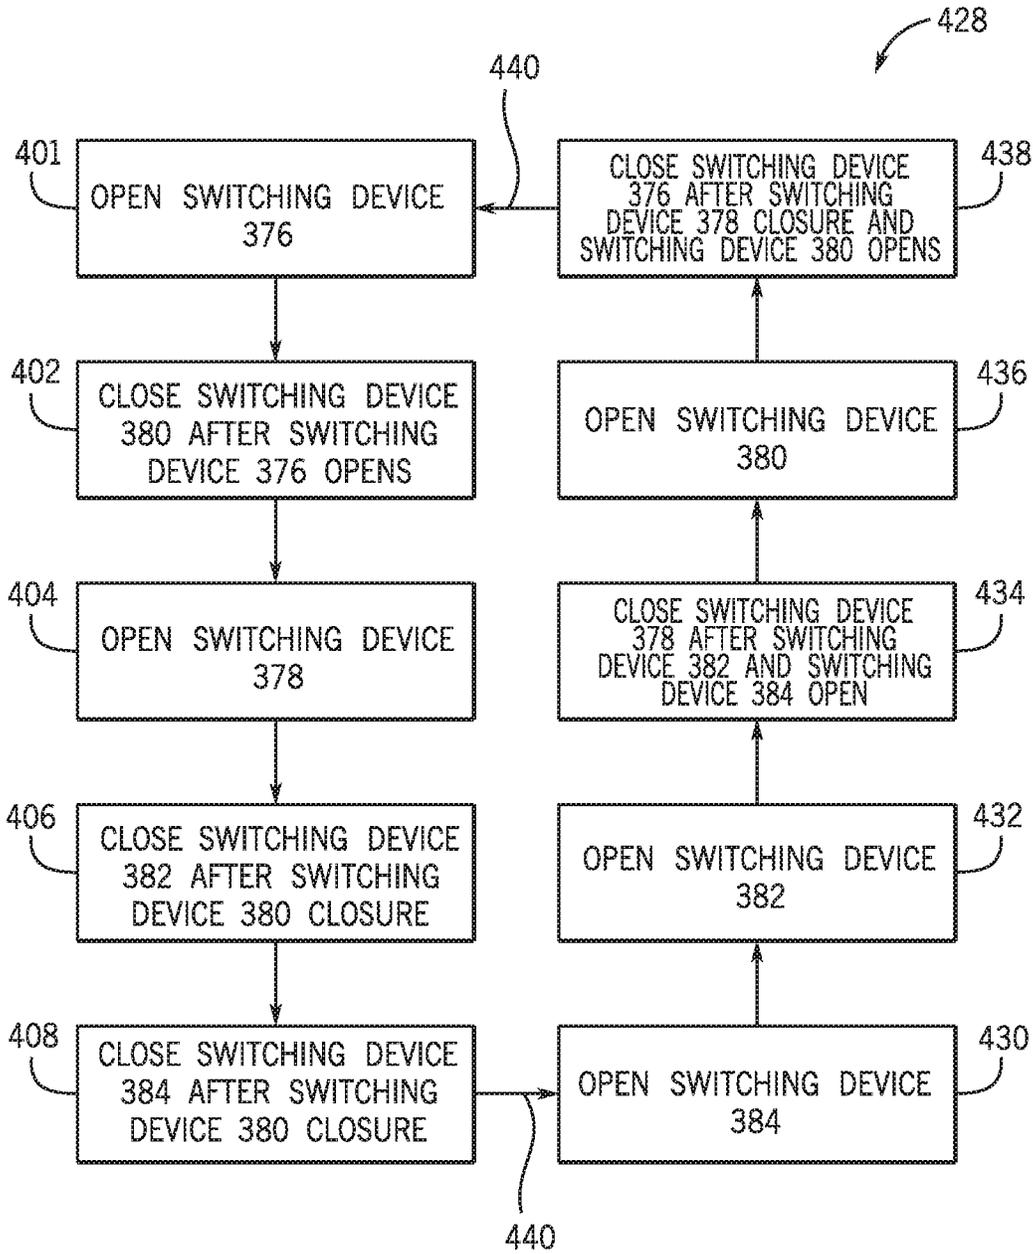


FIG. 46



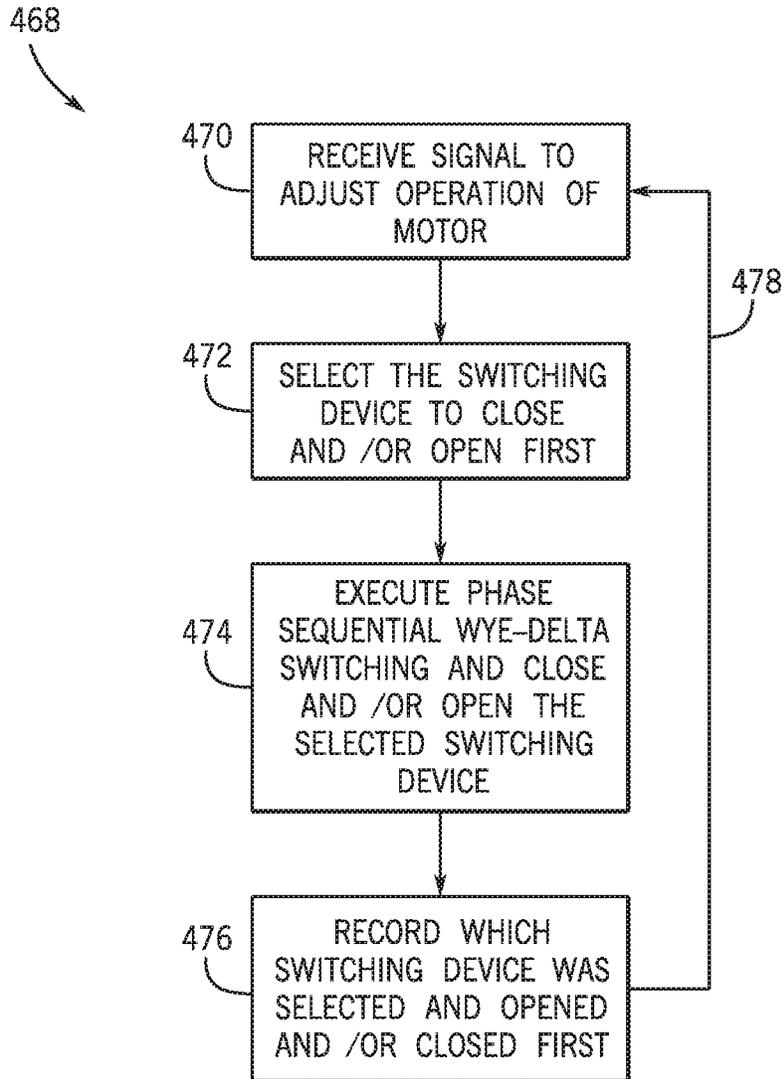


FIG. 48

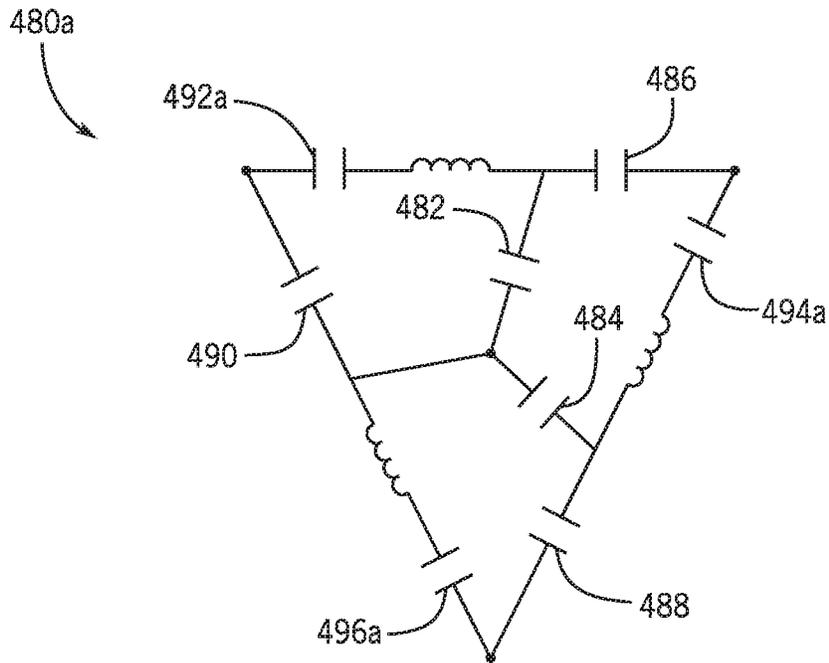


FIG. 49A

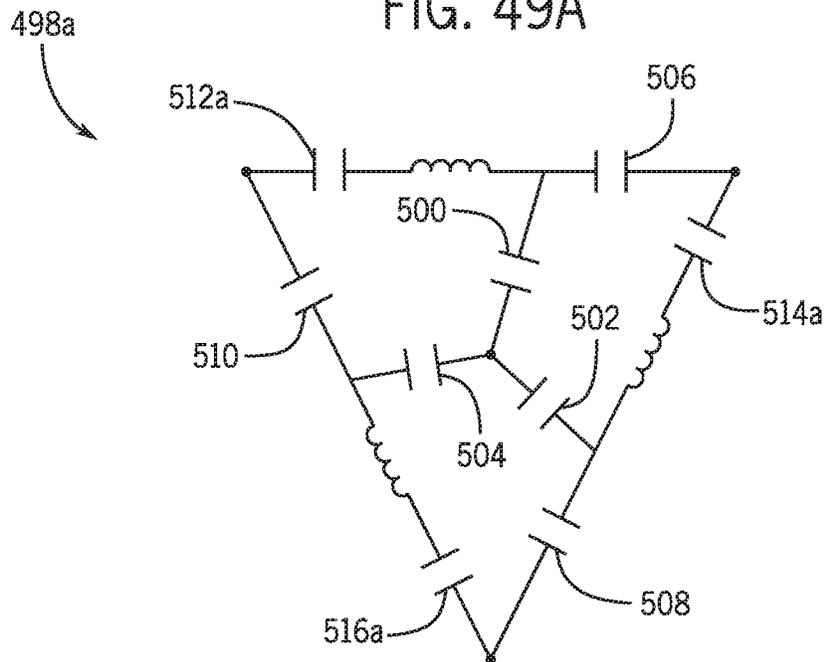


FIG. 49B

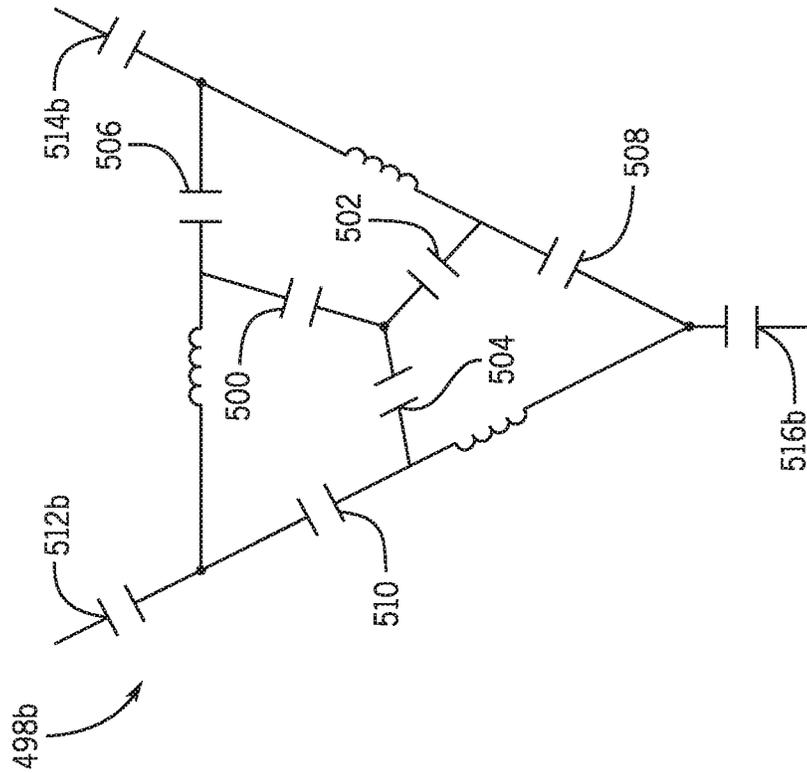


FIG. 49D



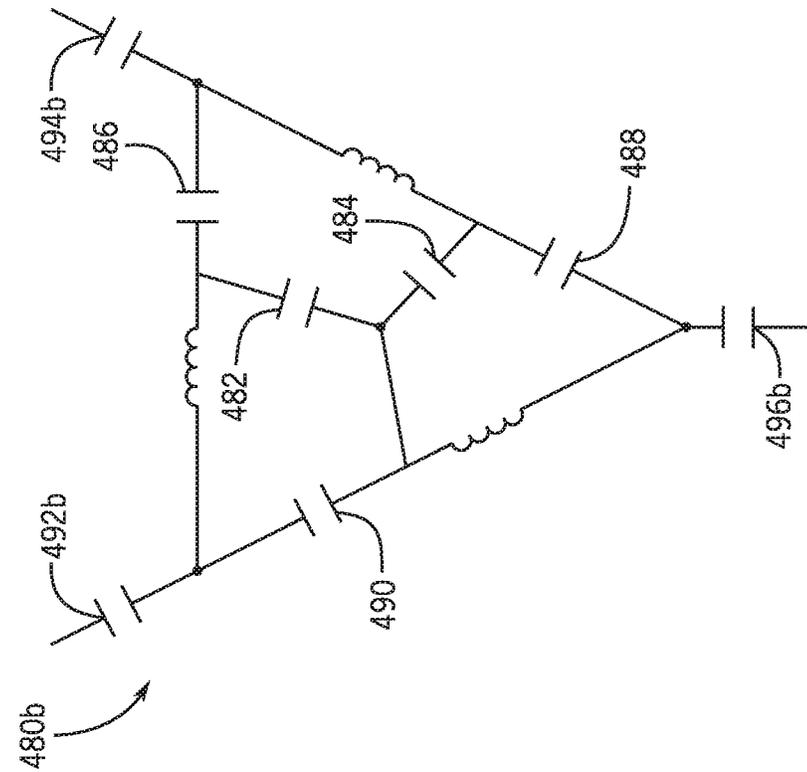


FIG. 49C

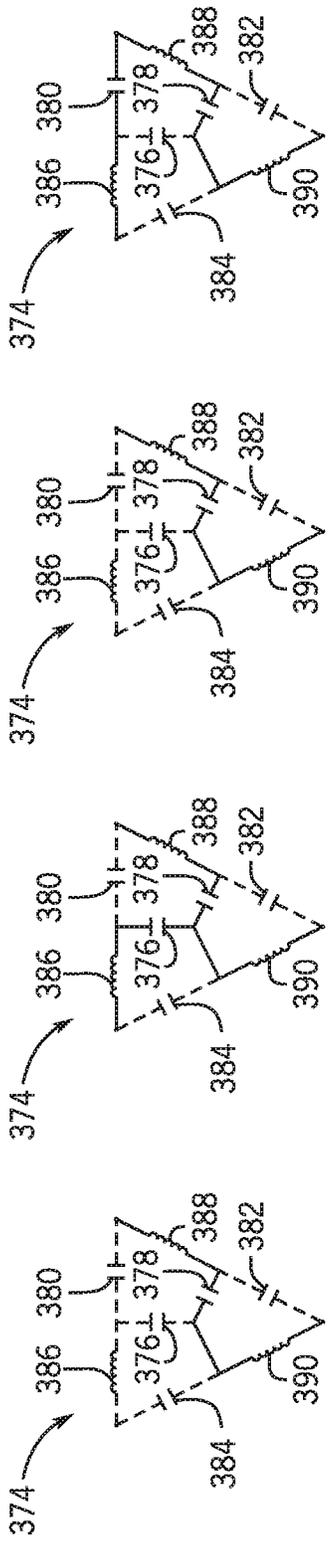


TORQUE:33

FIG. 50A

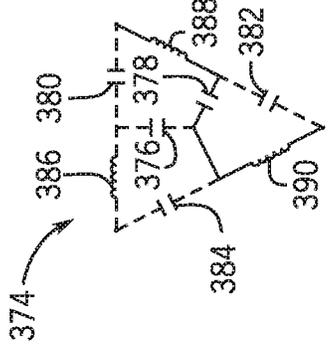


TORQUE:22

FIG. 50B

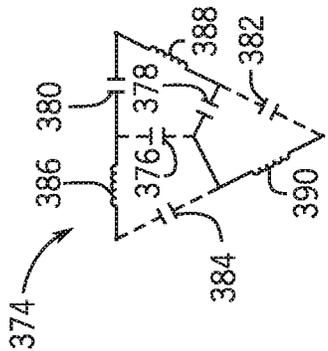


TORQUE:55

FIG. 50C

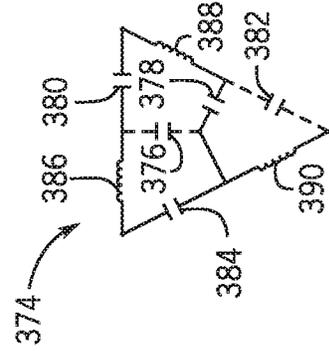

TORQUE:66

FIG. 50E

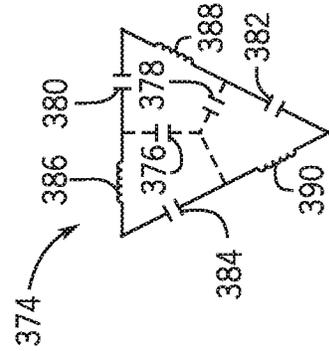

TORQUE:100

FIG. 50F

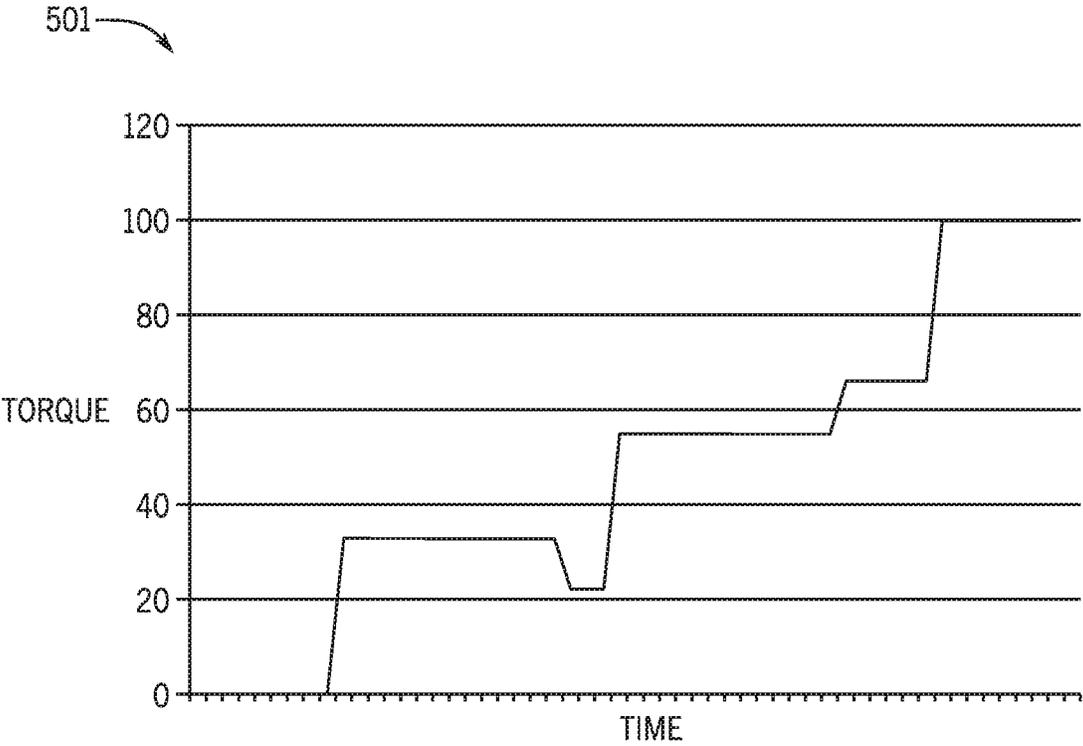


FIG. 50G

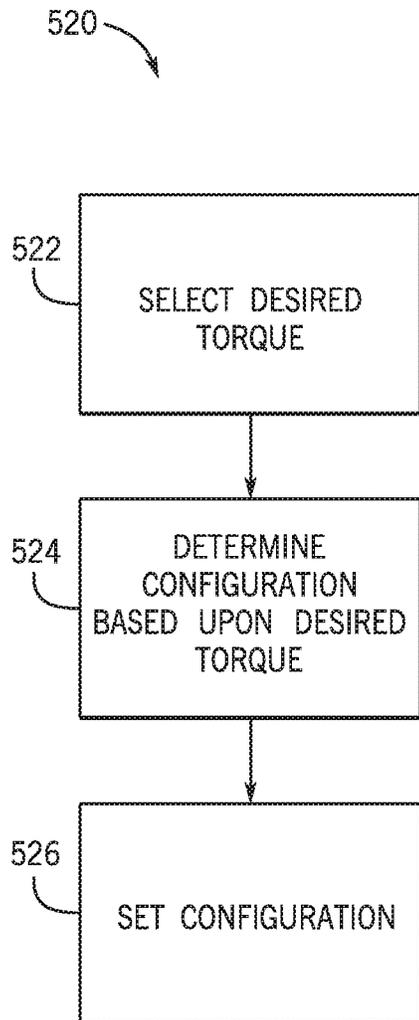


FIG. 51A

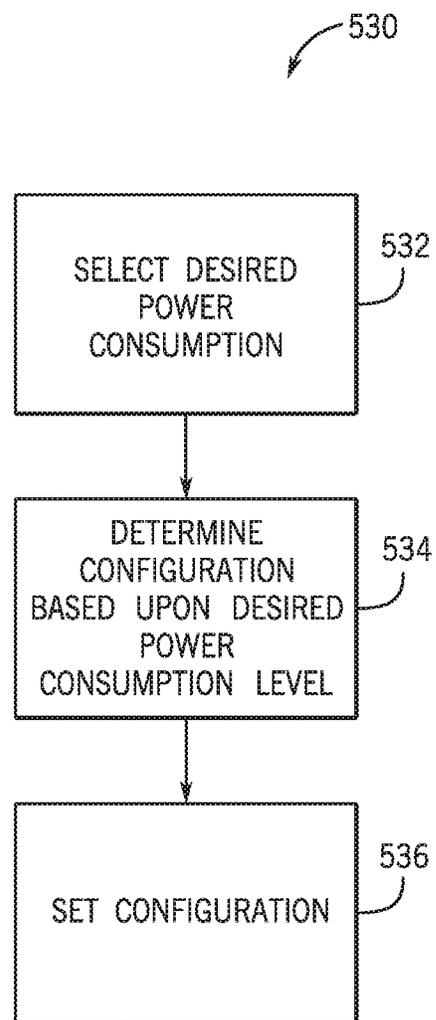


FIG. 51B

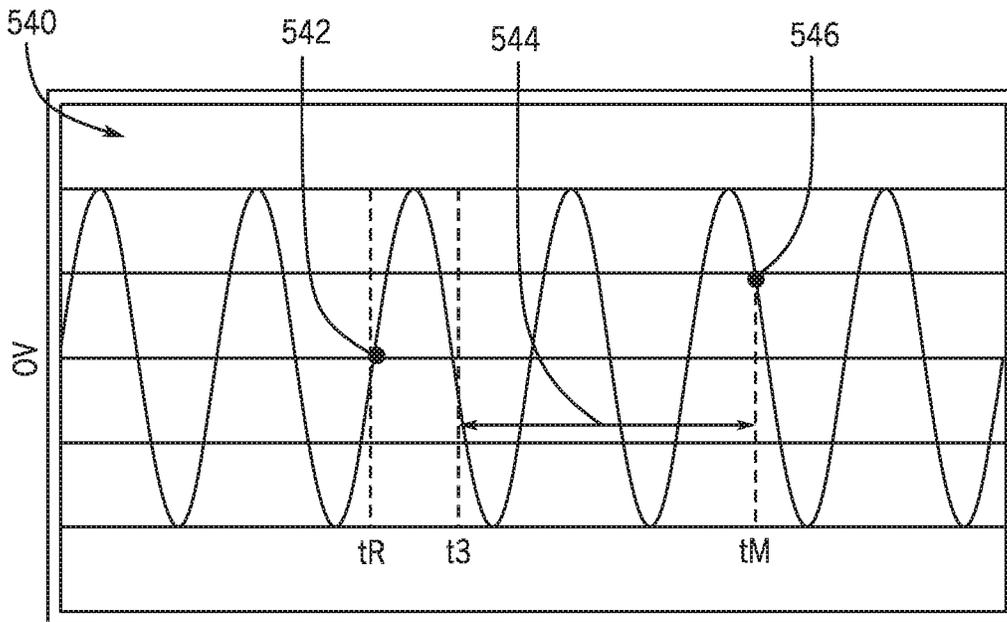


FIG. 52

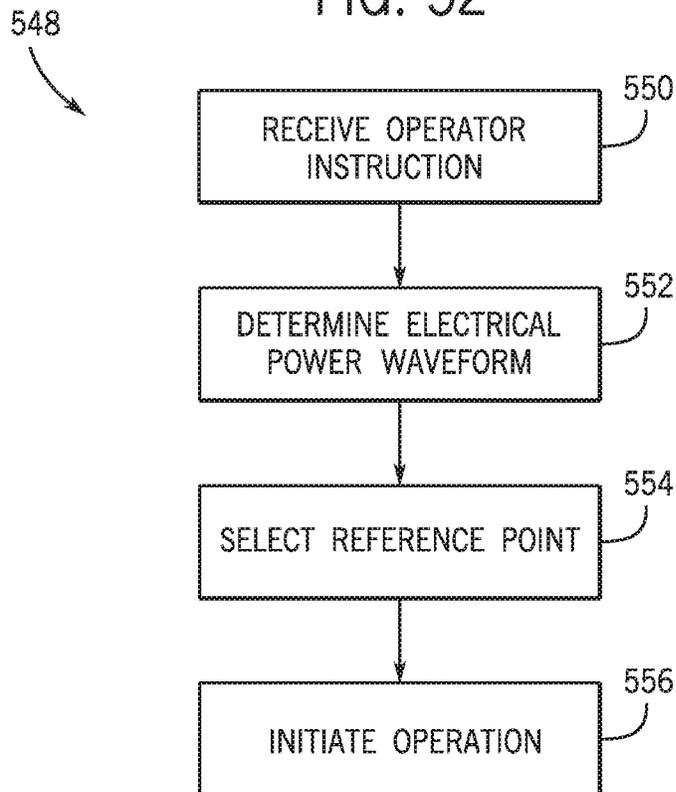


FIG. 53

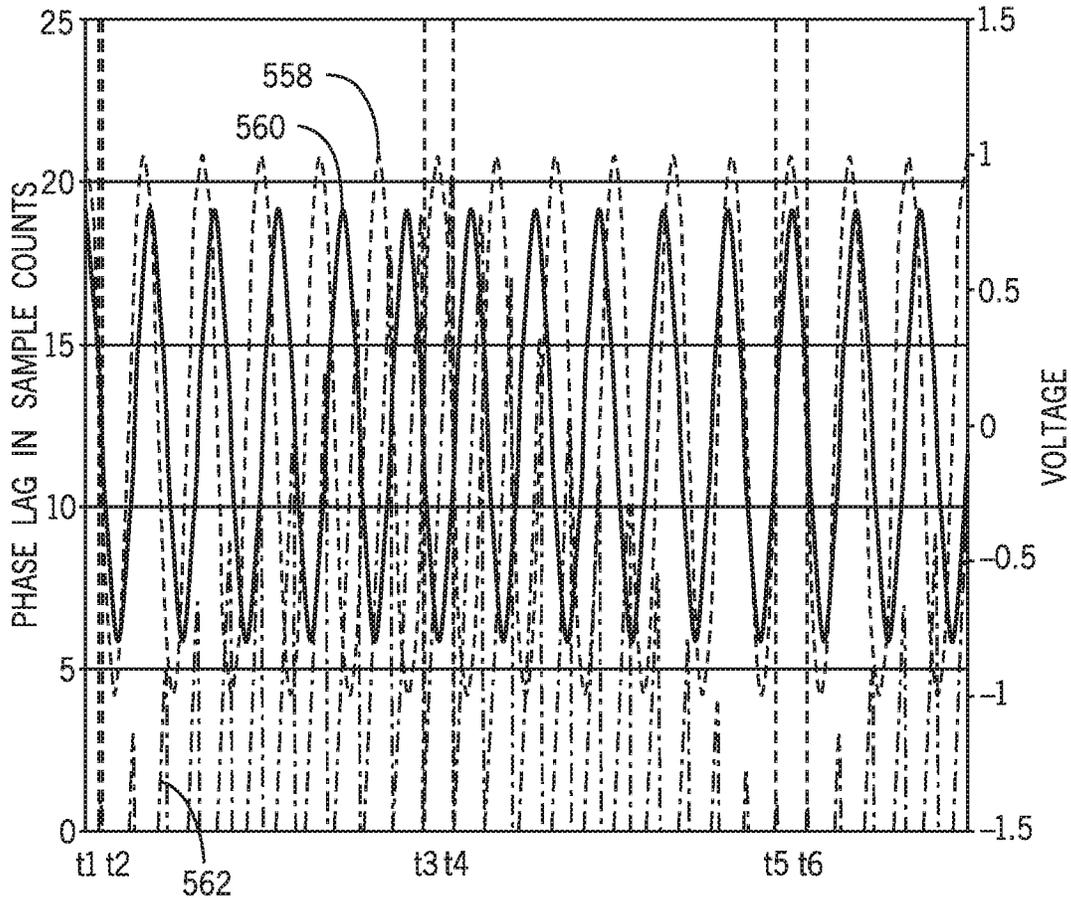


FIG. 54

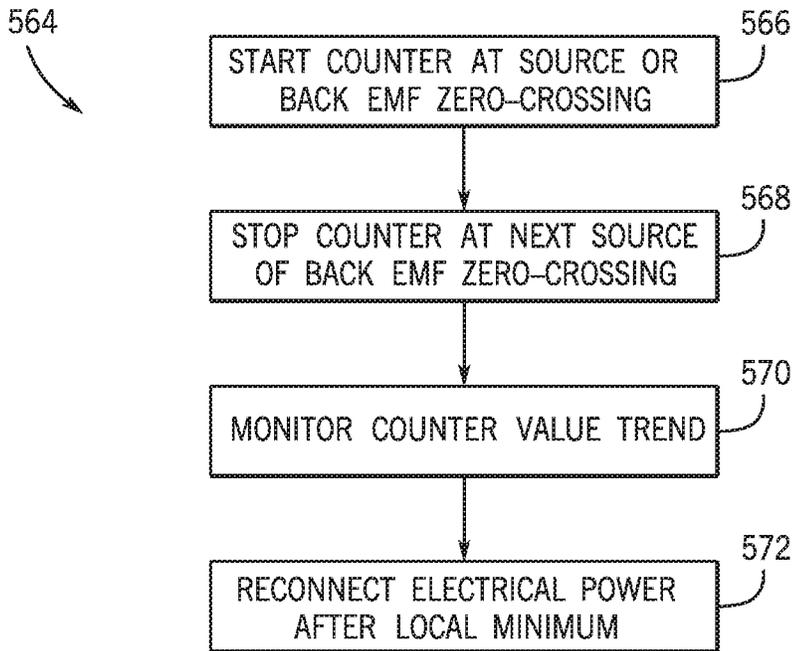


FIG. 55

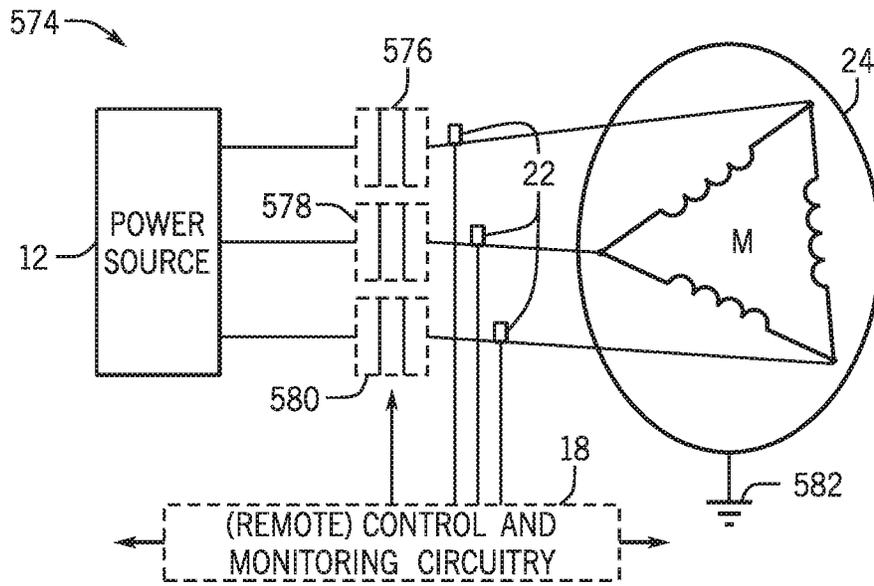


FIG. 56A

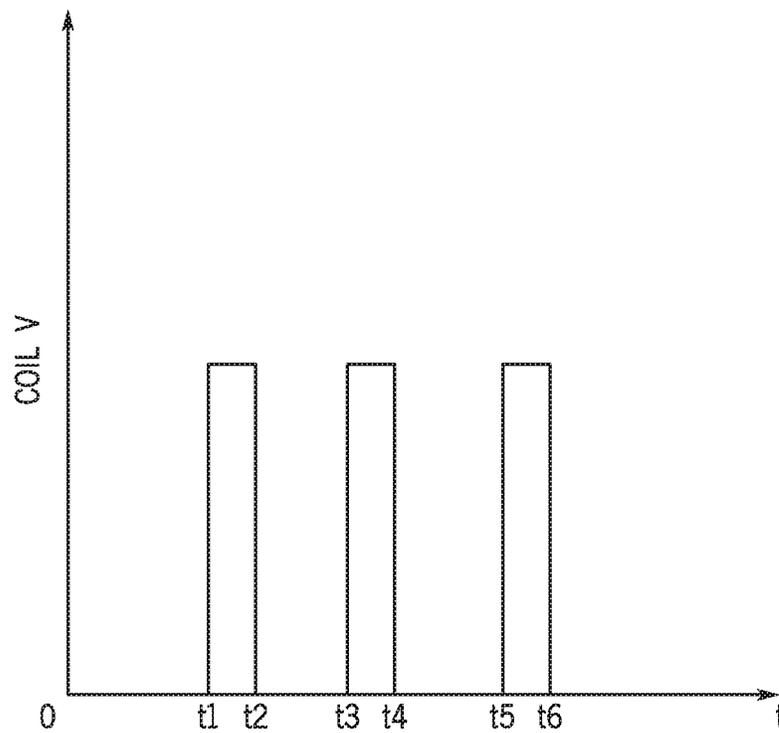


FIG. 56B

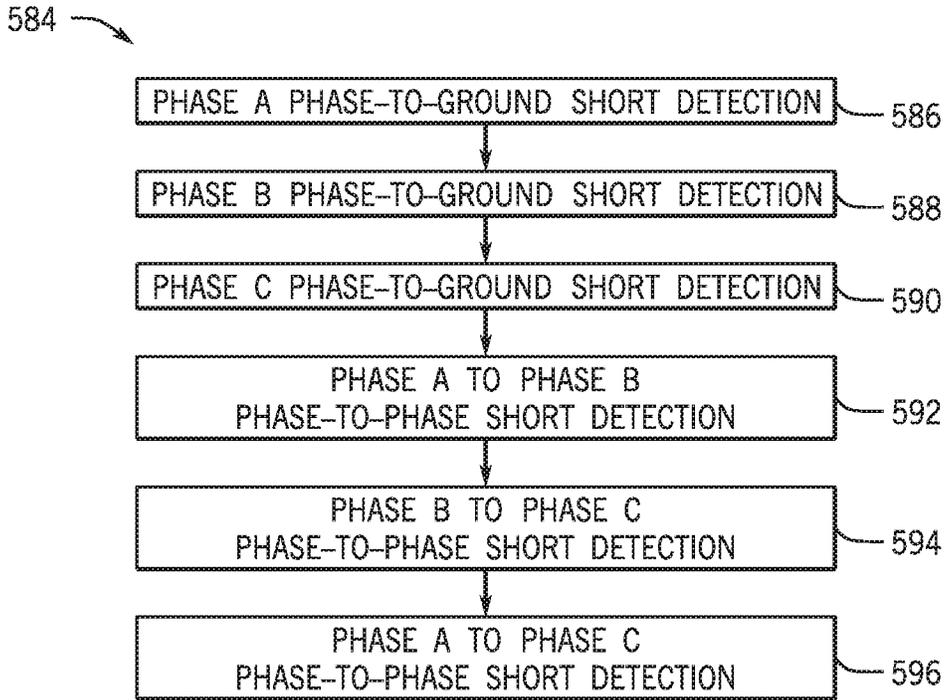


FIG. 57

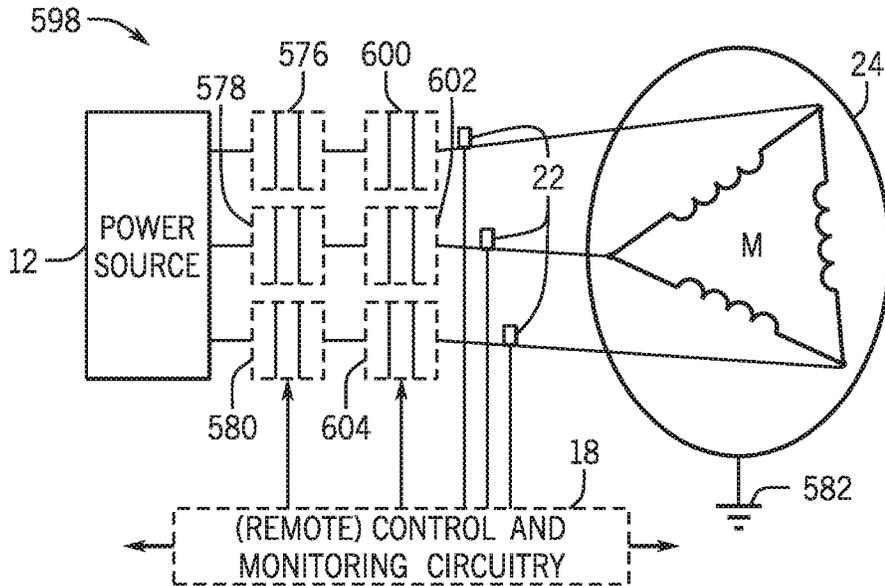


FIG. 58A

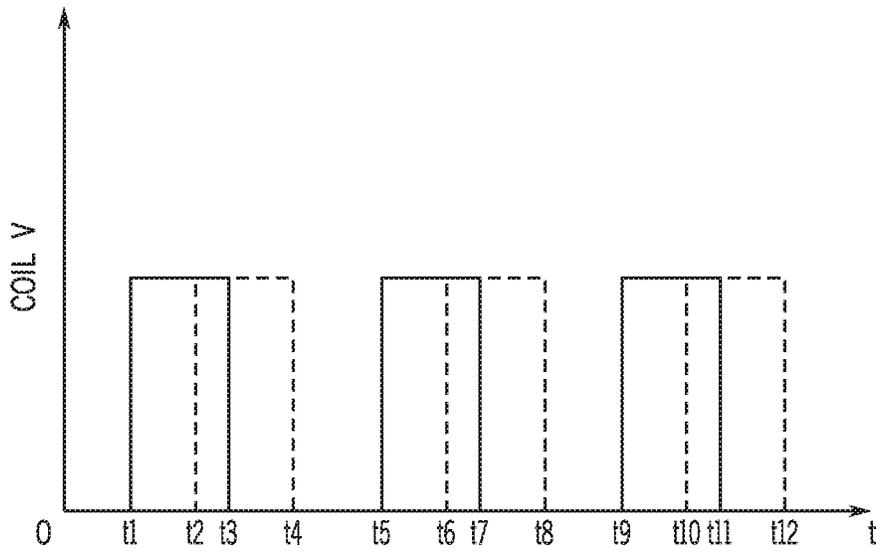


FIG. 58B

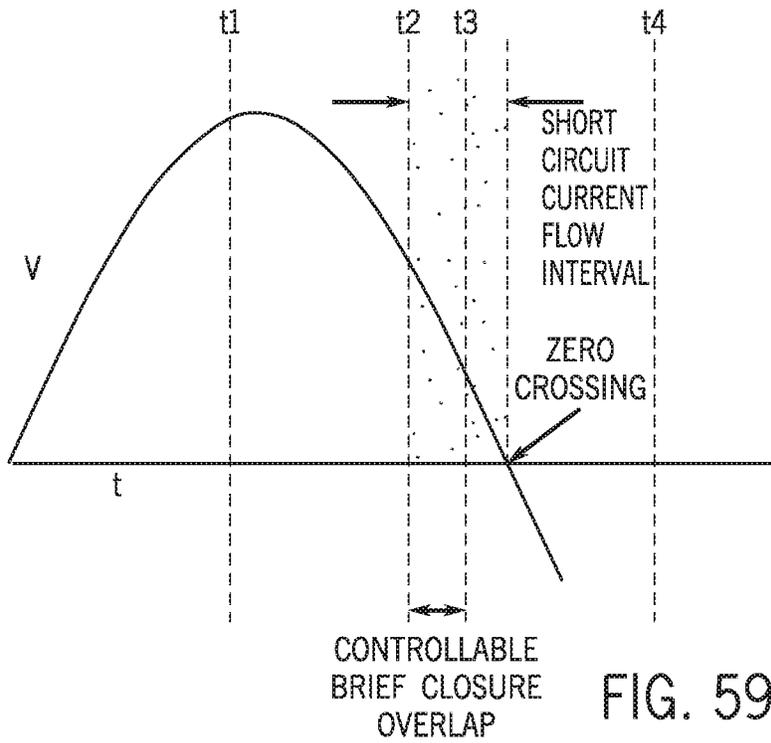


FIG. 59

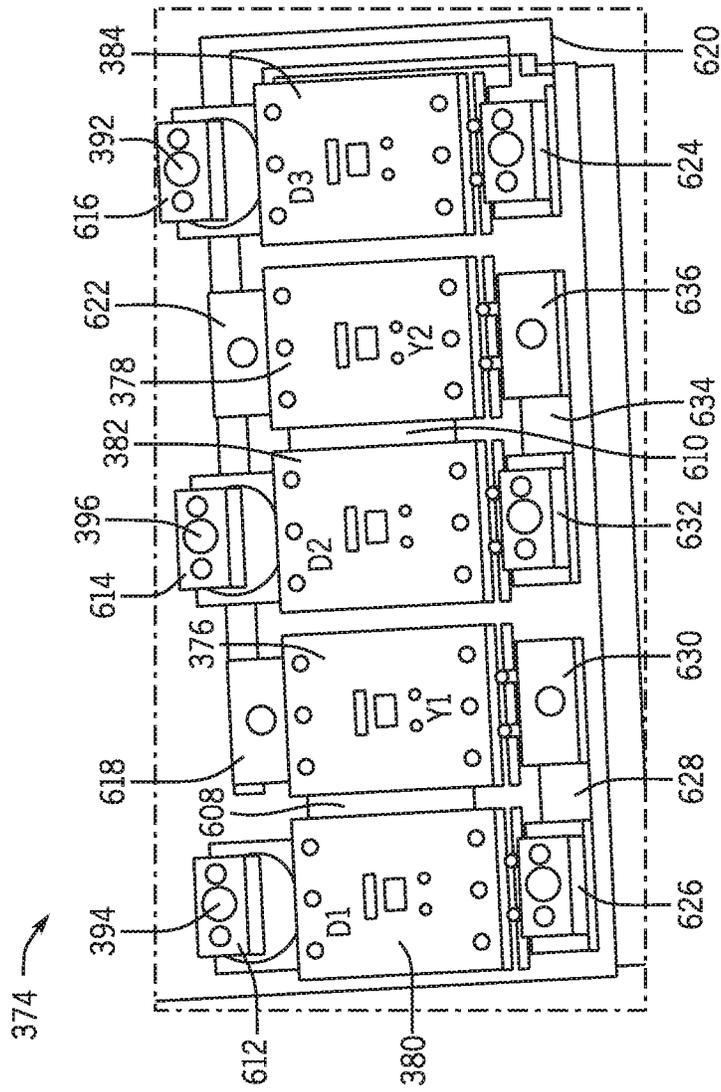


FIG. 61



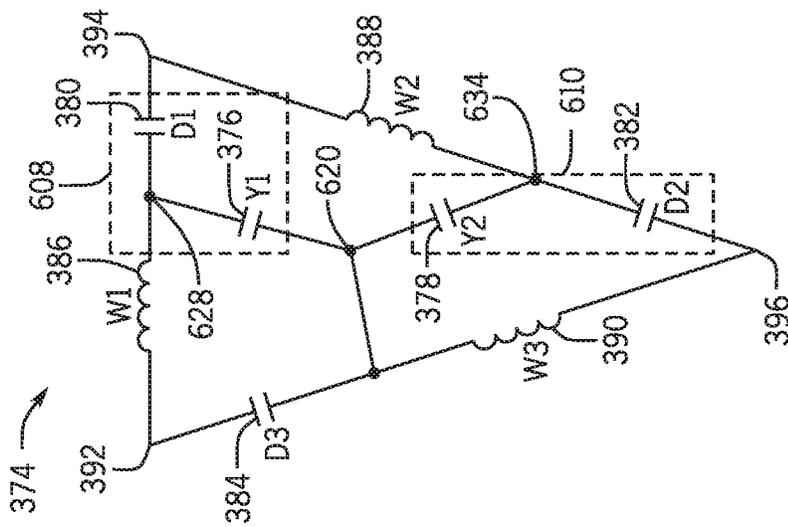


FIG. 60

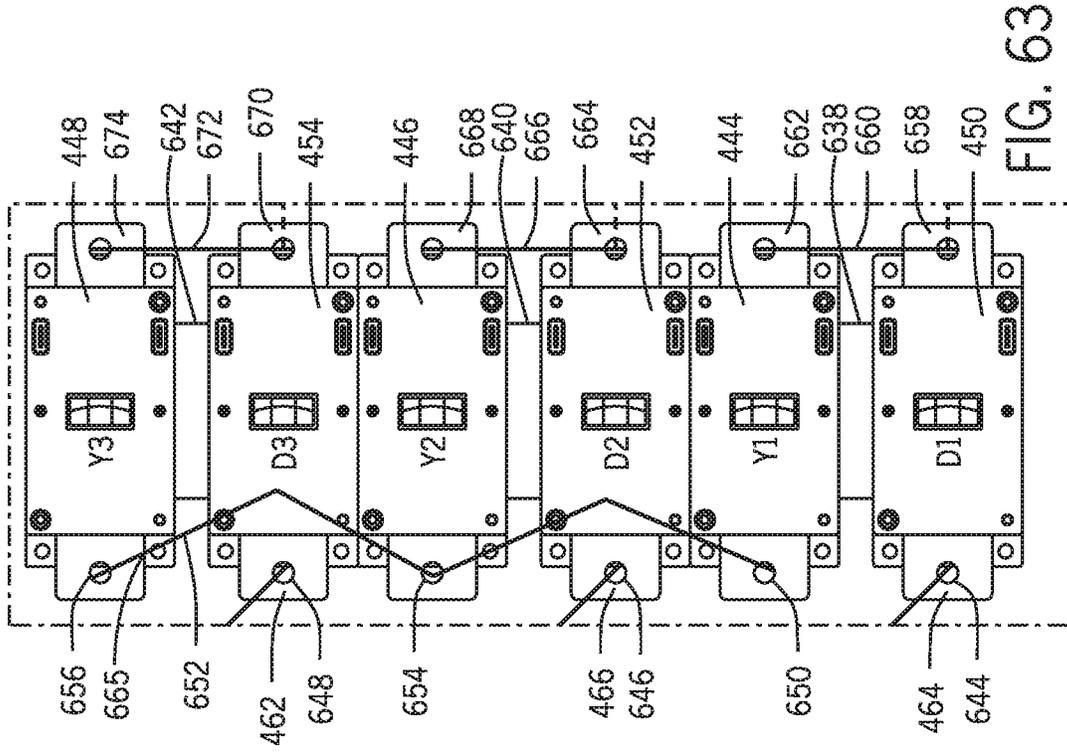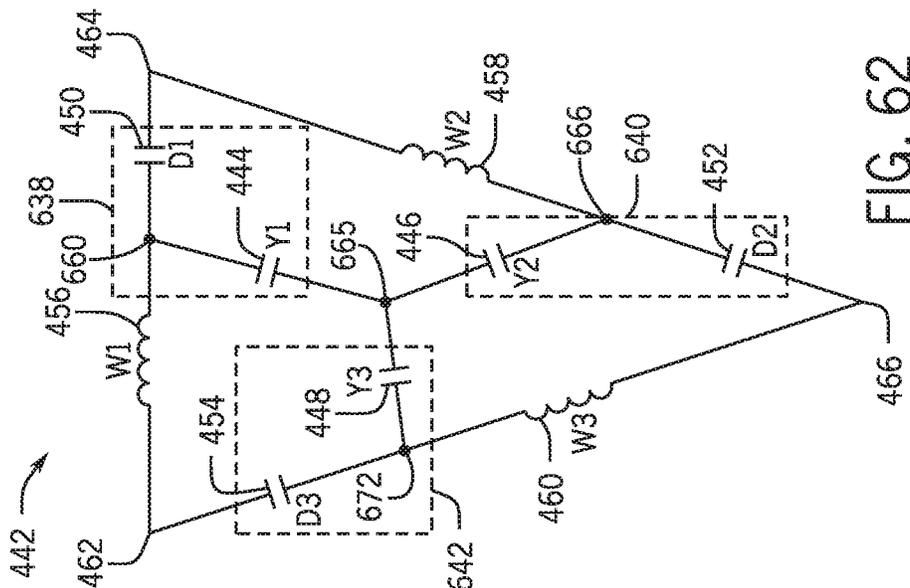

442



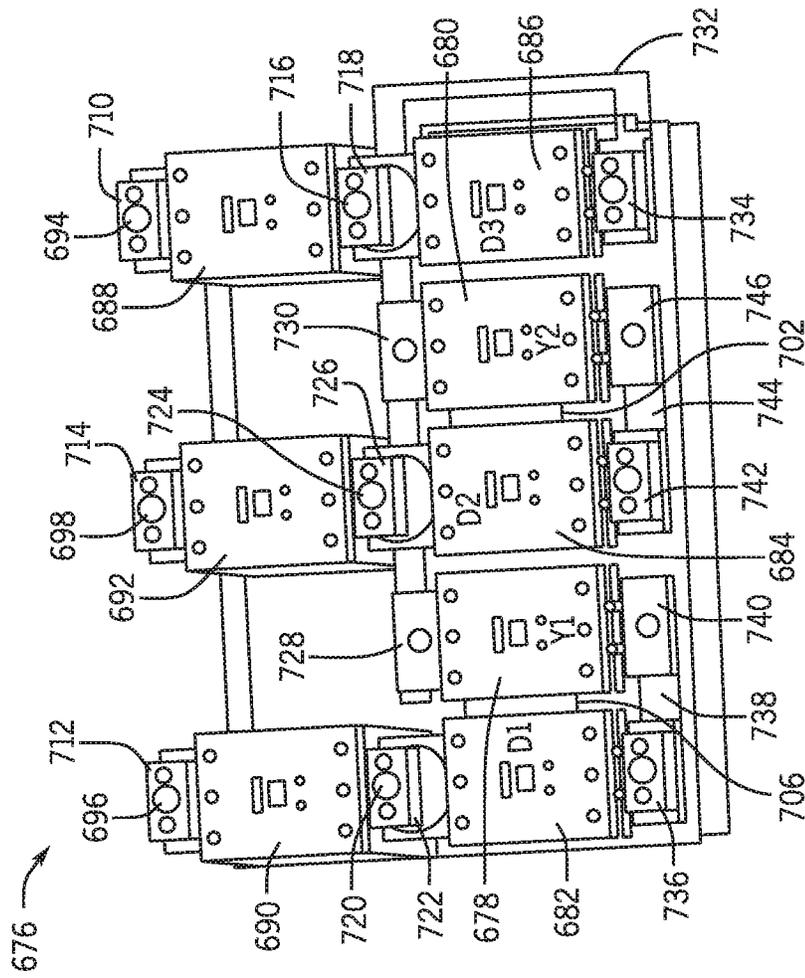


FIG. 65

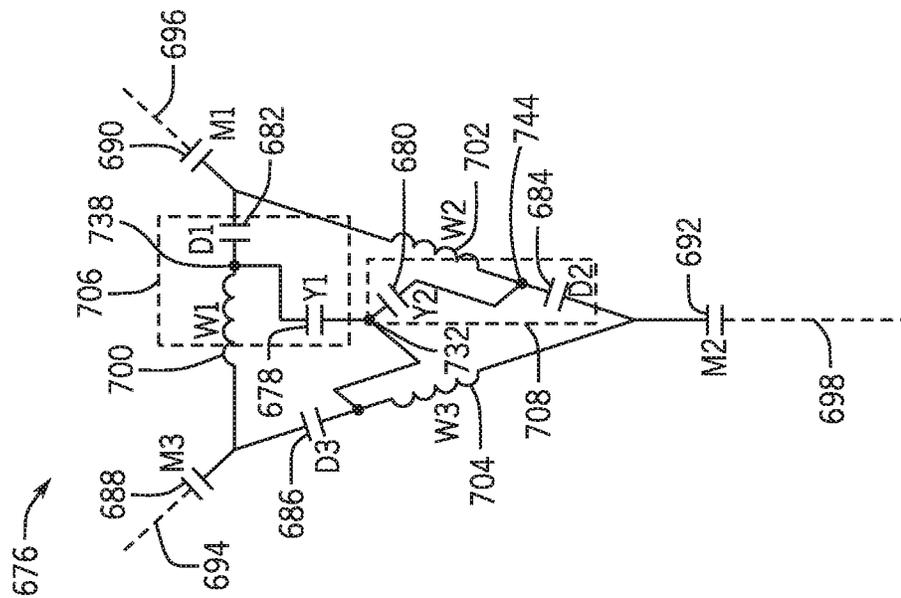


FIG. 64



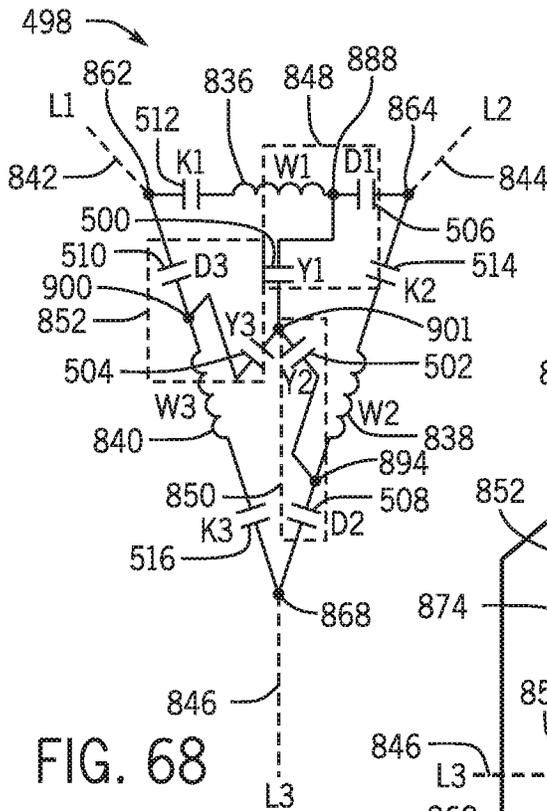


FIG. 68

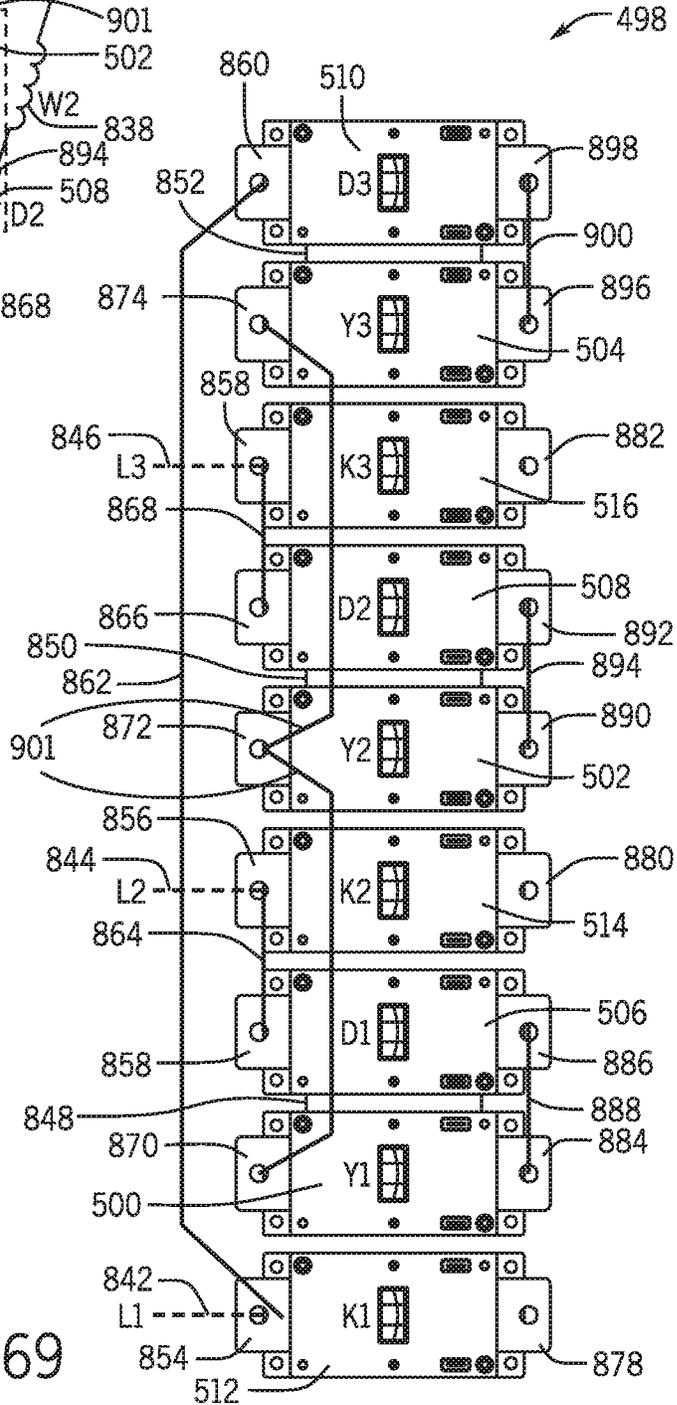


FIG. 69

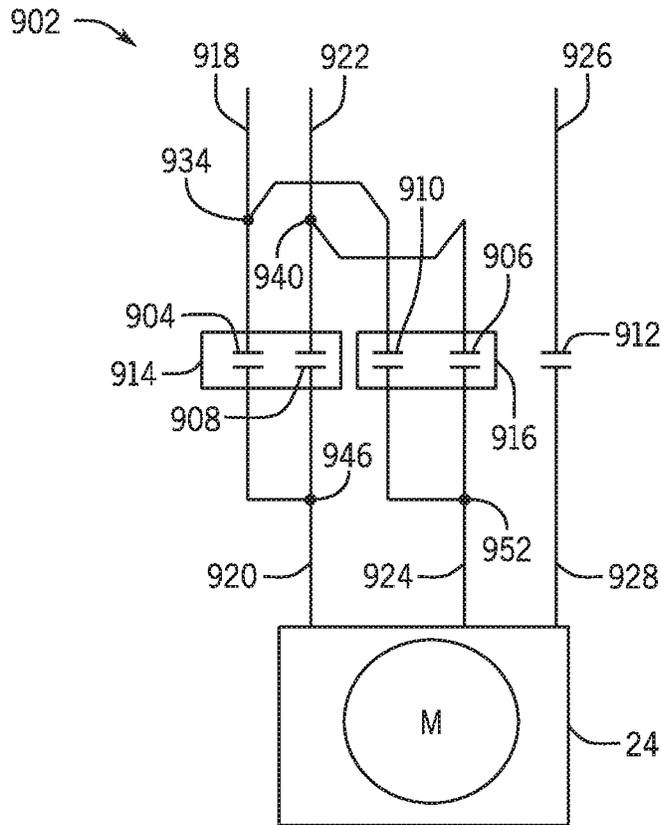


FIG. 70

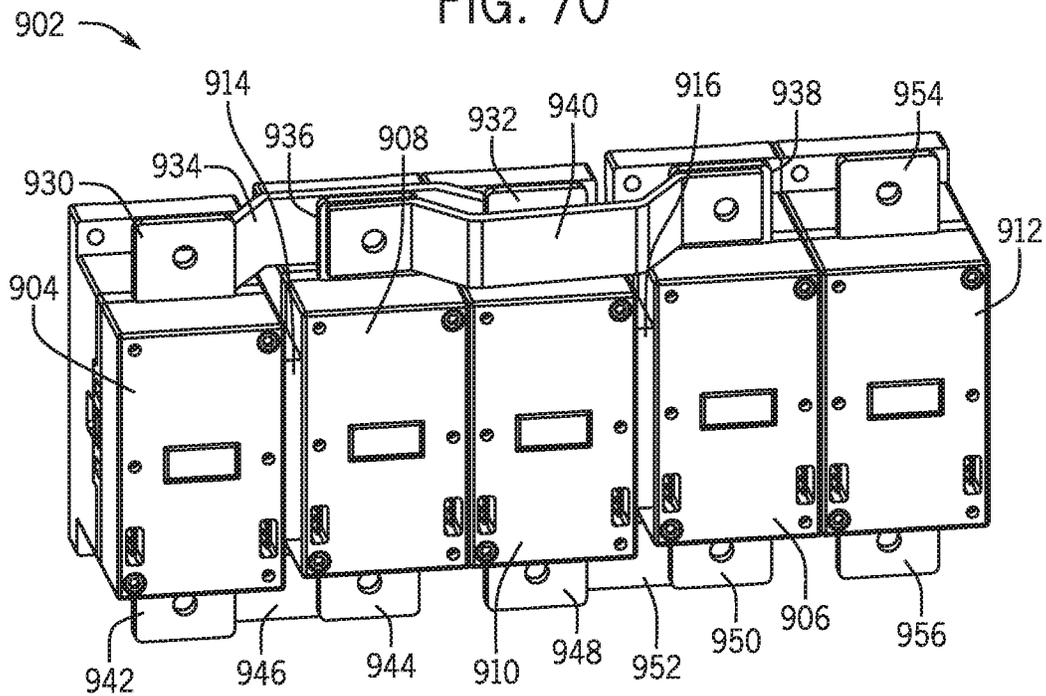
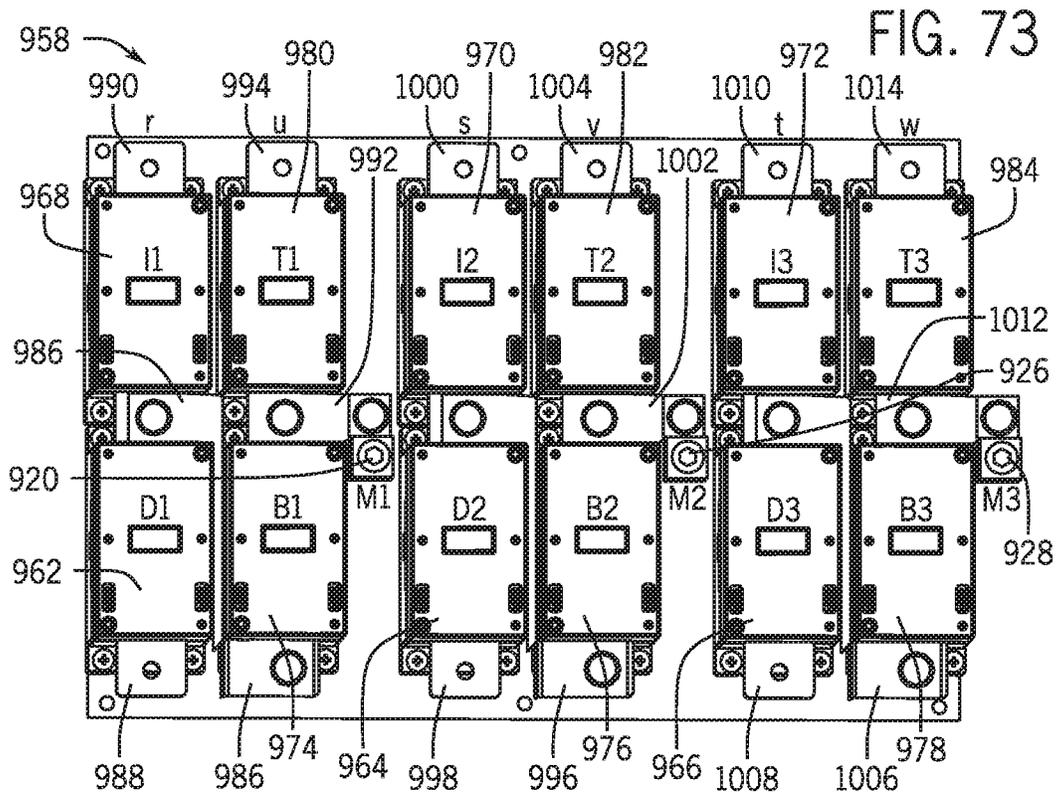
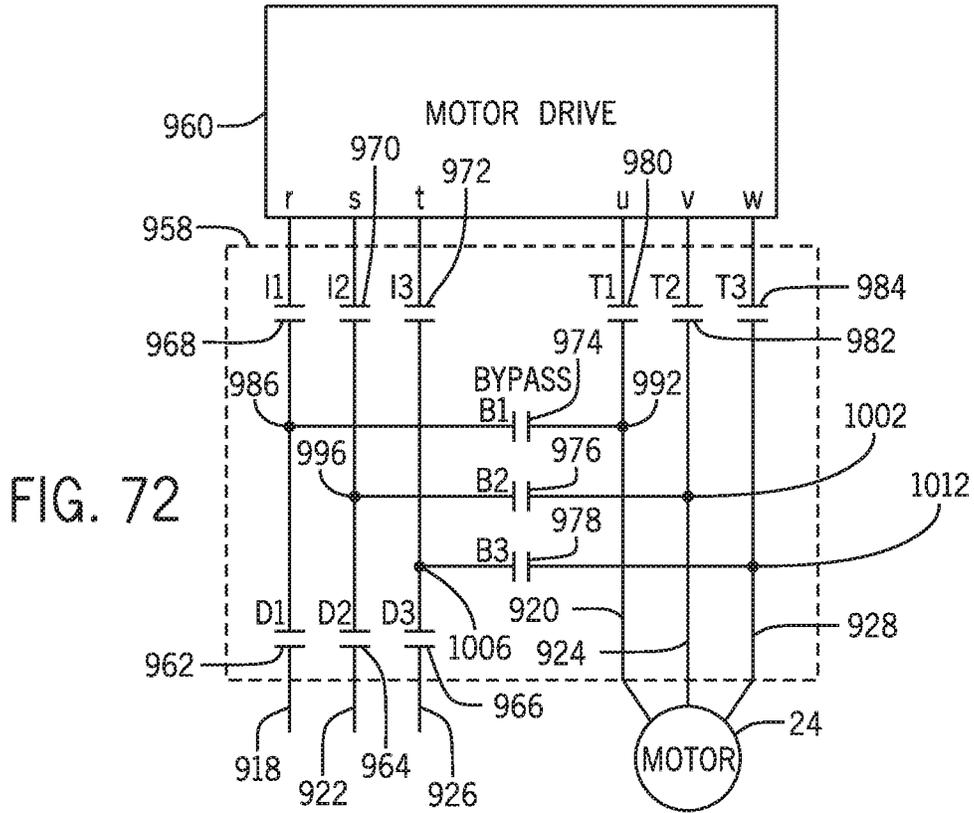


FIG. 71



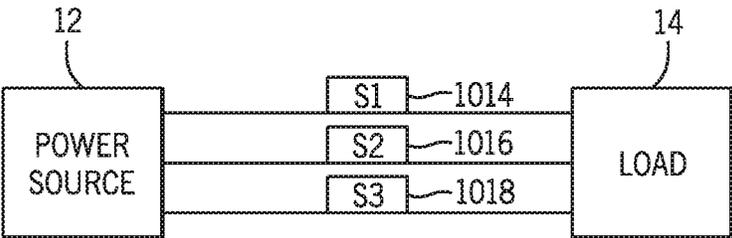


FIG. 74

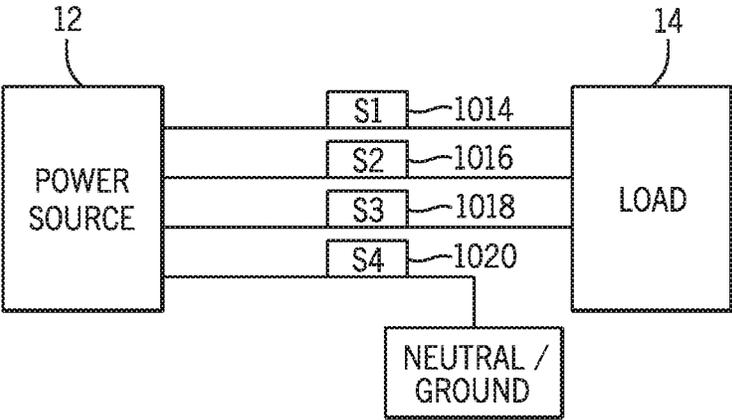


FIG. 75

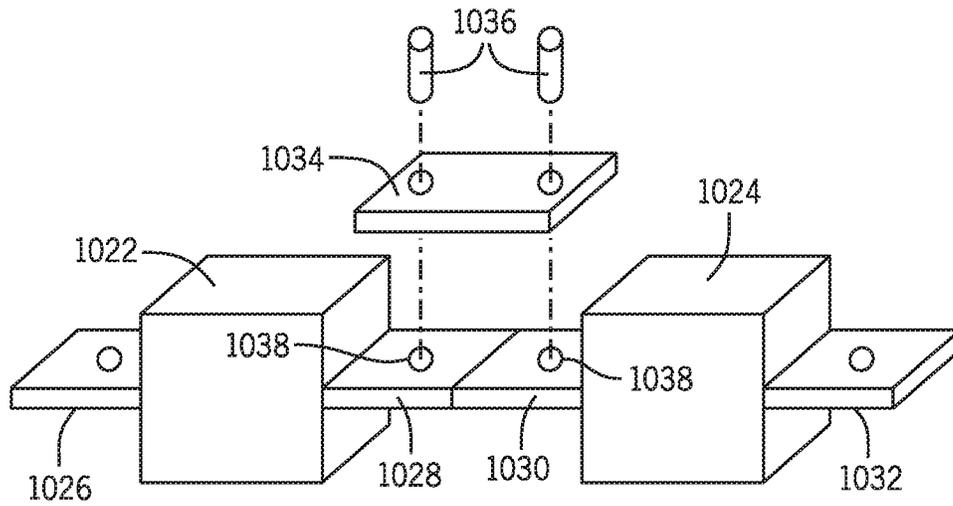


FIG. 76

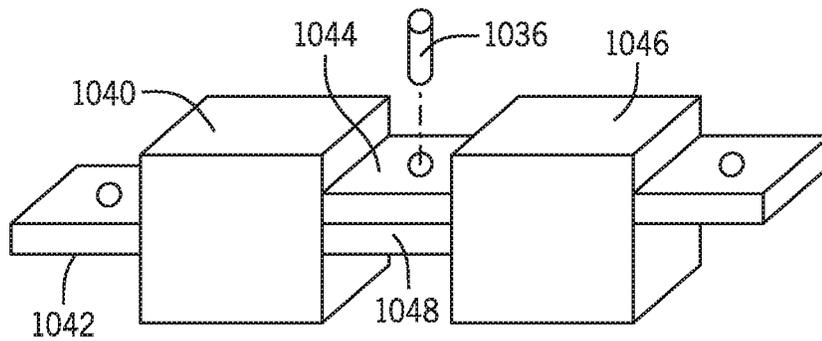


FIG. 77

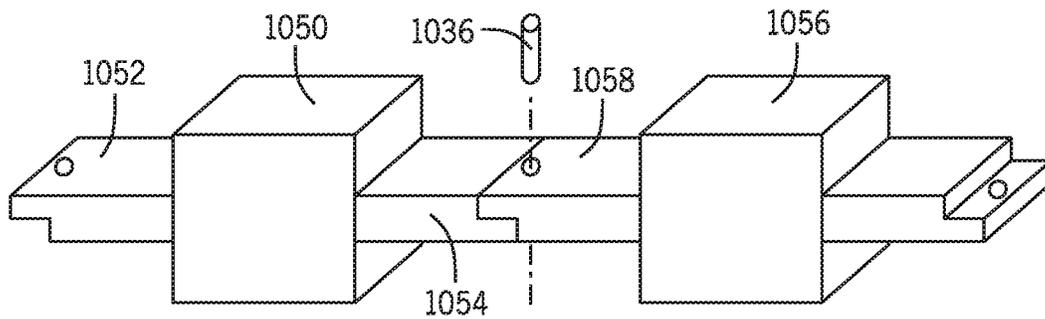


FIG. 78

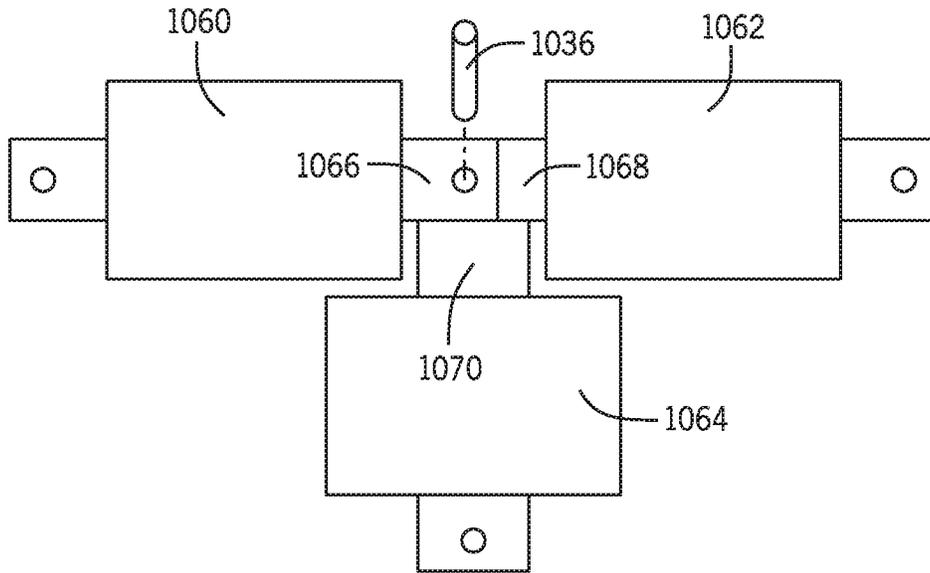


FIG. 79

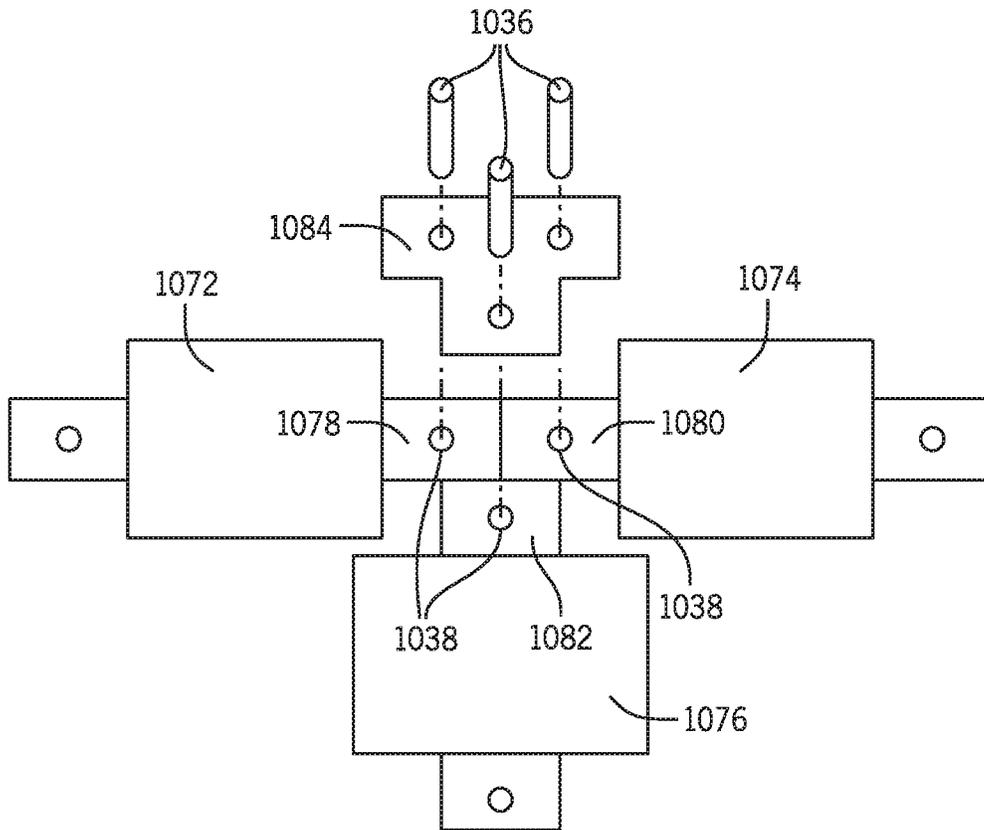


FIG. 80

FIG. 81

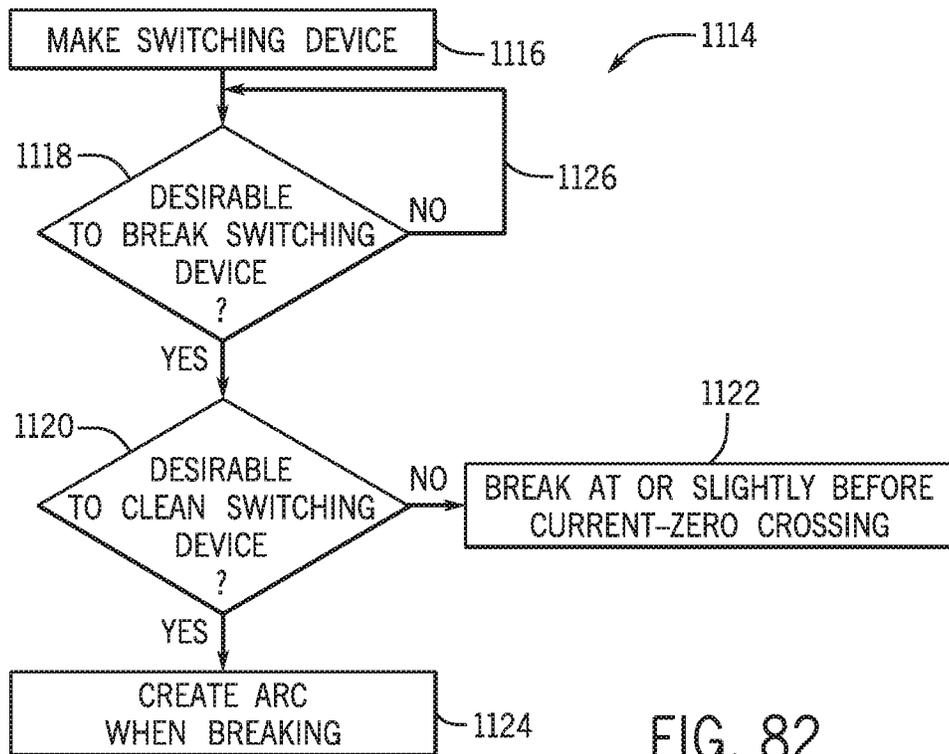
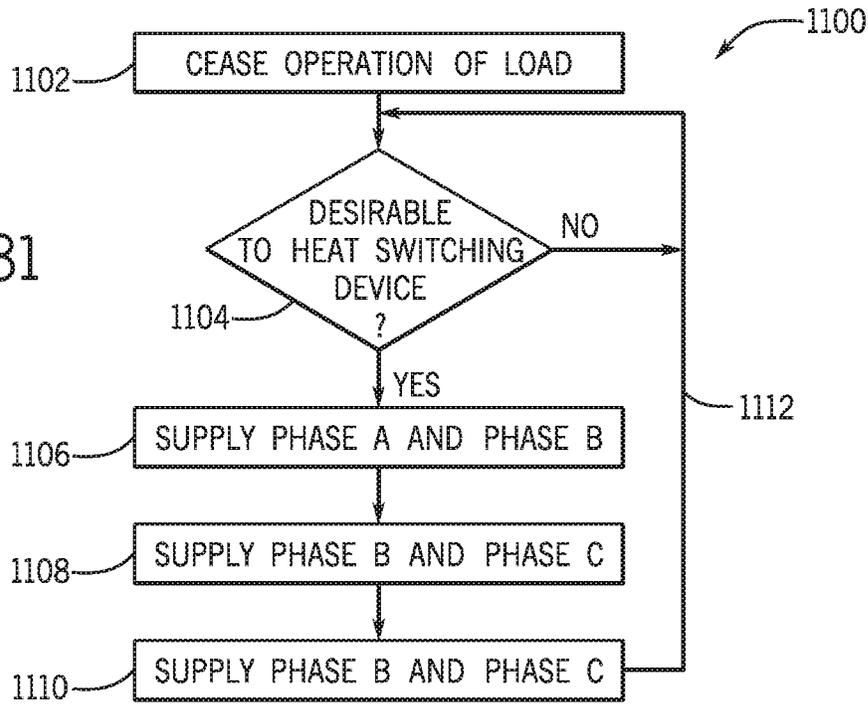


FIG. 82

1

## TEMPERATURE-BASED ELECTROMAGNETIC SWITCHING

### CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a Continuation Application of U.S. patent application Ser. No. 14/832,646 filed Aug. 21, 2015, entitled "Temperature-Based Electromagnetic Switching," which is related to and claims benefit of U.S. Provisional Patent Application No. 62/076,392, filed Nov. 6, 2014, all of which are herein incorporated by reference.

### BACKGROUND

The present disclosure relates generally to switching devices, and more particularly to operation and configuration of the switching devices.

Switching devices are generally used throughout industrial, commercial, material handling, process and manufacturing settings, to mention only a few. As used herein, "switching device" is generally intended to describe any electromechanical switching device, such as mechanical switching devices (e.g., a contactor, a relay, air break devices, and controlled atmosphere devices) or solid state devices (e.g., a silicon-controlled rectifier (SCR)). More specifically, switching devices generally open to disconnect electric power from a load and close to connect electric power to the load. For example, switching devices may connect and disconnect three-phase electric power to an electric motor. As the switching devices open or close, electric power may be discharged as an electric arc and/or cause current oscillations to be supplied to the load, which may result in torque oscillations. To facilitate reducing likelihood and/or magnitude of such effects, the switching devices may be opened and/or closed at specific points on the electric power waveform. Such carefully timed switching is sometimes referred to as "point on wave" or "POW" switching. However, the opening and closing of the switching devices are generally non-instantaneous. For example, there may be a slight delay between when the make instruction is given and when the switching device actually makes (i.e., closes). Similarly, there may be a slight delay between when break instruction is given and when the switching device actually breaks (i.e., opens).

Accordingly, to facilitate making or breaking at a specific point on the electric power waveform, it would be beneficial to determine the delay. More specifically, this may include determining when the switching device makes or breaks.

Additionally, since the switching devices may make to supply electric power to a load, it would be beneficial to determine if there are any faults, such as a phase-to-ground short or a phase-to-phase short, before fully connecting electric power to the load. For example, testing for faults before fully connecting electric power may enable the faults to be detected while minimizing the peak current and/or let through energy resulting from the fault condition.

Furthermore, switching devices may be utilized to provide electric power to electric motors. For example, in some applications, the switching devices may be included in a wye-delta starter or some other motor controlling device. As used herein, a "wye-delta starter" is intended to describe a device that controls operation (e.g., speed, torque, and/or power consumption) of an electric motor by connecting winding in the electric motor in a wye configuration, a delta configuration, or a mixed wye-delta configuration. In fact, in

2

addition to controlling starting of the electric motor, the wye-delta starter may control operation and even stopping of the electric motor.

More specifically, the electric motor may be started by connecting the windings in the motor in a wye configuration to reduce voltage supplied to the windings, which may also reduce the torque produced by the motor. Once started, the windings in the motor may be connected in a delta configuration to increase the voltage supplied to the windings, which may increase the torque produced by the motor. However, as described above, opening and closing the switching devices to connect the electric motor in the wye configuration and to transition from the wye configuration to the delta configuration may discharge electric power (e.g., arcing) and/or cause current oscillations to be supplied to the motor. In some embodiments, reducing the likelihood and magnitude of electric arcing and/or current oscillations may increase the lifespan of the switching devices.

Accordingly, it would be beneficial to reduce the likelihood and magnitude of electric arcing and/or currently oscillations produced when making or breaking a switching device. More specifically, this may include opening and/or closing switching devices in the wye-delta starter at specific points on the electric power waveform.

Moreover, wye-delta starters generally supply electric power to electric motors to run the motors in wye or delta configuration. More specifically, when the motor is run in a wye configuration, the electric motor may use less electric power and produce a first (e.g., lower) torque level, and when the motor is run in a delta configuration, the electric motor may use more electric power and produce a second (e.g., higher) torque level. In other words, running the electric motor with a wye-delta starter enables two operating modes (e.g., less power consumption lower torque and more power consumption higher torque). However, there may be instances when it is desirable to operate the motor somewhere between the two operating modes. For example, it may be desirable to produce more torque than produced when operating in the wye configuration, but consume less electric power than consumed when operating in the delta configuration. Accordingly, it would be beneficial to increase the operational flexibility of a wye-delta starter.

After the electric motor is spinning, electric power may be disconnected from the motor for various reasons, such as a brownout or a lightning strike. More specifically, switching devices (e.g., contactors) may open to disconnect electric power. Once power is disconnected, the momentum of the rotation may keep the motor spinning, but friction (e.g., air resistance) may begin to slow the motor. As such, the frequency of the motor gradually decreases. Subsequently, the electric motor may be restarted by re-closing the switching devices to connect electric power to the motor. In some embodiments, such as reliability sensitive implementation, it may be desirable to restart the electric motor as soon as possible, for example, while the electric motor is still spinning. However, since the frequency of the motor is changing, the phase relationship of the motor relative to the electric power source is also changing, thereby creating a "beat" condition. Therefore, the motor may be out of phase from the source when re-closing the switching devices to reconnect electric power to the motor, which may result in current oscillations and/or torque oscillations. In some embodiments, minimizing the likelihood and magnitude of current oscillations and/or torque oscillations may increase the lifespan of the electric motor and/or a connected load. In some embodiments, minimizing peaks in the current may reduce nuisance tripping of protective circuitry (e.g., circuit

breaker or fuses) and, thus, enable the protective circuitry to be sized more advantageously.

Accordingly, it would be beneficial to minimize the magnitude and likelihood of current oscillations and/or torque oscillations produced when the electric motor is restarted. More specifically, this may include restarting the electric motor when the phase of the electric power and the electric motor are substantially in phase, when the phase of the electric power is leading the phase of the electric motor, or at some other desired condition.

As will be described in more detail below, many of the benefits described may be enabled by increasing the amount of control over the electric power supplied to a load. For example, independently controlling each phase of three-phase power may enable detection of faults (e.g., a phase-to-ground short or a phase-to-phase short) while minimizing the duration, the peak current, and/or the let through energy of the faulty condition. Accordingly, it would be beneficial to utilize a switching device capable of increasing control over electric power supplied to the load, for example, by enabling each phase of electric power to be independently controlled.

Additionally, since switching device may be utilized in various implementations, such as a wye-delta starter, a reverser, a motor drive bypass, and so forth, it would be beneficial to utilize a switching device that can be modularly configured for various implementations, for example, to minimize footprint and/or interconnections (e.g., cabling) of the switching devices. More generally, modular arrangements, such as single-phase switching modules that can be incorporated alone or as a group, may enable a highly flexible modular design and manufacturing platform, which allows for assemblies of devices for many different needs and markets.

Moreover, while many of the foregoing improvements may be used together, they may also be used separately with significant potential for improvement in the field of switching and power systems. For example, single-phase switching devices may be used in POW (e.g., timed) application and/or conventional (e.g., non-timed) applications. Additionally, a motor control device (e.g., a wye-delta starter) may also be used in POW (e.g., timed) application and/or conventional (e.g., non-timed) applications. The present disclosure relates to various different technical improvements in the field, which may be used in various combinations to provide advances in the art.

### DRAWINGS

These and other features, aspects, and advantages of the present disclosure will become better understood when the following detailed description is read with reference to the accompanying drawings in which like characters represent like parts throughout the drawings, wherein:

FIG. 1 is a diagrammatical representation of a set of switching devices to provide power to an electrical load, in accordance with an embodiment;

FIG. 2 is a similar diagrammatical representation of a set of switching devices to provide power to an electrical motor, in accordance with an embodiment;

FIG. 3 is a similar diagrammatical representation of a set of switching devices to provide power to an electrical motor, in accordance with an embodiment;

FIGS. 4A-4D is a similar diagrammatical representation of a set of switching devices to provide power to a specific application, in this case a chiller motor, in accordance with an embodiment;

FIGS. 5A-5C is a diagrammatical representation of three-phase POW switching to provide power to a load, in accordance with an embodiment;

FIG. 6 is a diagrammatical representation of three-phase POW switching to disconnect power from a load, in accordance with an embodiment;

FIG. 7 is a perspective view of a single-pole, single current-carrying path switching device, in accordance with an embodiment;

FIG. 8 is a perspective exploded view of the device of FIG. 7, in accordance with an embodiment;

FIG. 9 is a top perspective view of certain of the internal components and assemblies of the single-pole, single current-carrying path switching device, in accordance with an embodiment;

FIG. 10 is a bottom perspective view of the internal components and assemblies of the device, in accordance with an embodiment;

FIG. 11 is a side view of the internal components and assemblies of the device, in accordance with an embodiment;

FIG. 12 is a partially sectioned side view of the internal components and assemblies of the device in an open position, in accordance with an embodiment;

FIG. 13 is a top perspective view of a movable contact structure for the device, in accordance with an embodiment;

FIG. 14 is a partially sectioned side view of the internal components and assemblies of the device in an open position, in accordance with an embodiment;

FIG. 15 is a detailed view of one aspect of the device structure, in accordance with an embodiment;

FIG. 16 is a detailed view of a further aspect of the device structure, in accordance with an embodiment;

FIG. 17A is a detailed view of an optional armature arrangement of the device structure, in accordance with an embodiment;

FIG. 17B is a diagrammatical representation of a similar device with a dedicated sensing winding or coil, in accordance with an embodiment;

FIG. 18 is a perspective view of a splitter plate for the device, in accordance with an embodiment;

FIG. 19 is a perspective view of an internal construction of the device housing to help channel and cool gases, in accordance with an embodiment;

FIG. 20 is a partially sectional view representing the channeling of gases during operation of the device, in accordance with an embodiment;

FIG. 21 is a top view of a pair of single-pole switching devices joined by a mechanical interlock, in accordance with an embodiment;

FIG. 22 is a perspective view of a system assembled with multiple single-pole switching devices with electrical interconnects, in accordance with an embodiment;

FIG. 23 is a perspective view of a mechanical interlock that may be used in the assemblies, in accordance with an embodiment;

FIG. 24 is an exploded view of the mechanical interlock, in accordance with an embodiment;

FIG. 25 is a circuit diagram of an operating coil driver circuitry for use with the single-pole switching device, in accordance with an embodiment;

FIGS. 26A and 26B are a diagrammatical representations of coil current waveforms for closing of the device, in accordance with an embodiment;

FIG. 27 is a voltage waveform illustrating timing considerations for closing the device, in accordance with an embodiment;

FIG. 28 is a block diagram of logic for timing closing of the device, in accordance with an embodiment;

FIG. 29 is a PWM waveform for determining closing the device, in accordance with an embodiment;

FIG. 30 is a block diagram of logic for closing the device, in accordance with an embodiment;

FIG. 31 is a diagrammatical representations of coil control waveforms for opening of the device, in accordance with an embodiment;

FIG. 32 is a voltage or current waveform illustrating timing considerations for opening the device, in accordance with an embodiment;

FIG. 33 is a block diagram of logic for timing opening of the device, in accordance with an embodiment;

FIGS. 34A and 34B are a PWM waveform for determining opening the device, in accordance with an embodiment;

FIG. 35 is a block diagram of logic for determining opening the device, in accordance with an embodiment;

FIG. 36 is a diagrammatical representation of an alternate embodiment of an operator coil driving circuit, in accordance with an embodiment;

FIG. 37 is a diagrammatical representation of a power scenario during switching of the device, in accordance with an embodiment;

FIG. 38 is a coil operation to temperature relationship, in accordance with an embodiment;

FIG. 39 is a block diagram of logic for temperature detection (e.g., relative) and adaptation, in accordance with an embodiment;

FIG. 40 is a similar block diagram of logic for monitoring temperature during operation, in accordance with an embodiment;

FIGS. 41A-41D are block diagrams of logic for determining wellness of a component, load and/or system based upon monitoring of operator coil parameters, in accordance with an embodiment;

FIGS. 42A-42D is a block diagram of logic for the sequential switching of single pole switching devices, in accordance with an embodiment;

FIGS. 43A-43H is a set of equivalent circuit diagrams illustrating phase sequential wye-delta switching utilizing single-pole switching devices for controlling a three-phase motor, in accordance with an embodiment;

FIG. 44A is a block diagram of logic for the phase sequential wye-delta switching, in accordance with an embodiment;

FIG. 44B is plot of current in windings of an electric motor during phase sequential wye-delta switching, in accordance with an embodiment;

FIGS. 45A-45C is a set of current and voltage waveforms for the phase sequential wye-delta switching, in accordance with an embodiment;

FIG. 46 is a block diagram of logic for switching between wye and delta configurations during operation of a motor, in accordance with an embodiment;

FIGS. 47A-47H is a set of equivalent circuit diagrams illustrating phase sequential wye-delta switching utilizing 6 single-pole switching devices, in accordance with certain embodiments;

FIG. 48 is a block diagram of logic for wye-delta motor starting over a series of starts, in accordance with an embodiment;

FIGS. 49A-49D are circuit diagrams for 8 and 9 pole wye-delta switching arrangements, in accordance with an embodiment;

FIGS. 50A-50F is a set of equivalent circuit diagrams illustrating phase sequential wye-delta switching referenced

to known, predicted, or estimated drive torques applied to a three-phase motor, in accordance with an embodiment;

FIG. 50G is a plot of torque produced by an electric motor during phase sequential wye-delta switching, in accordance with an embodiment;

FIGS. 51A and 51B is a set of block diagrams of logic for the torque-referenced and power-referenced phase sequential wye-delta switching, in accordance with an embodiment;

FIG. 52 is a voltage or current waveform illustrating timing considerations for POW switching based upon an operator-received initiation command, in accordance with an embodiment;

FIG. 53 is a block diagram of logic for operator-initiated POW switching, such as for starting a polyphase motor, in accordance with an embodiment;

FIG. 54 is a waveform for a motor drive signal and a motor back EMF signal illustrating timing of the signals during deceleration (or acceleration) of the motor for re-applying drive signals, in accordance with an embodiment;

FIG. 55 is a block diagram of logic for synchronously reclosing a switching circuit for re-applying drive signals to a motor, in accordance with an embodiment;

FIGS. 56A and 56B is a diagrammatical representation of circuitry for detecting motor conditions utilizing single-pole switching devices and a corresponding timing diagram, respectively, in accordance with an embodiment;

FIG. 57 is a block diagram of logic for detecting motor conditions, in accordance with an embodiment;

FIGS. 58A and 58B is a diagrammatical representation of alternative circuitry for detecting motor conditions utilizing multiple single-pole switching devices and a corresponding timing diagram, respectively, in accordance with an embodiment;

FIG. 59 is a graphical representation of timing for the motor condition detection, in accordance with an embodiment;

FIG. 60 is a diagrammatical representation of a circuit for a 5 pole wye-delta starter constructed of multiple single-pole switching devices interconnected with one another, in accordance with an embodiment;

FIG. 61 is a top view of an assembly of single-pole switching devices to create the circuit of FIG. 60, in accordance with an embodiment;

FIG. 62 is a diagrammatical representation of a circuit for a 6 pole wye-delta starter constructed of multiple single-pole switching devices interconnected with one another, in accordance with an embodiment;

FIG. 63 is a top view of an assembly of single-pole switching devices to create the circuit of FIG. 62, in accordance with an embodiment;

FIG. 64 is a diagrammatical representation of a circuit for an 8 pole wye-delta starter constructed of multiple single-pole switching devices interconnected with one another, in accordance with an embodiment;

FIG. 65 is a top view of an assembly of single-pole switching devices to create the circuit of FIG. 64, in accordance with an embodiment;

FIG. 66 is a diagrammatical representation of a circuit for a 9 pole wye-delta starter constructed of multiple single-pole switching devices interconnected with one another, in accordance with an embodiment;

FIG. 67 is a top view of an assembly of single-pole switching devices to create the circuit of FIG. 66, in accordance with an embodiment;

FIG. 68 is a diagrammatical representation of an circuit for an alternative 9 pole wye-delta starter constructed of

multiple single-pole switching devices interconnected with one another, in accordance with an embodiment;

FIG. 69 is a top view of an assembly of single-pole switching devices to create the circuit of FIG. 68, in accordance with an embodiment;

FIG. 70 is a diagrammatical representation of a circuit for a 5 pole reverser constructed of multiple single-pole switching devices interconnected with one another, in accordance with an embodiment;

FIG. 71 is a top view of an assembly of single-pole switching devices to create the circuit of FIG. 70, in accordance with an embodiment;

FIG. 72 is a diagrammatical representation of a circuit for a motor drive bypass constructed of multiple single-pole switching devices interconnected with one another, in accordance with an embodiment;

FIG. 73 is a top view of an assembly of single-pole switching devices to create the circuit of FIG. 72, in accordance with an embodiment;

FIG. 74 is a diagrammatical representation of a three single-pole switching device configuration used in various control schemes, in accordance with an embodiment;

FIG. 75 is a diagrammatical representation of a four single-pole switching device configuration used in various control schemes, in accordance with an embodiment;

FIG. 76 is a perspective view of two single-pole switching devices connected via a bus bar, in accordance with an embodiment;

FIG. 77 is a perspective view of two single-pole switching devices with varying height power terminals connected via a single connector pin, in accordance with an embodiment;

FIG. 78 is a perspective view of two single-pole switching devices with mating power terminals connected via a single connector pin, in accordance with an embodiment;

FIG. 79 is a top view of three single-pole switching devices with varying height power terminals connected via a single connector pin, in accordance with an embodiment;

FIG. 80 is a top view of three single-pole switching devices connected via a "T" bus bar, in accordance with an embodiment;

FIG. 81 is a block diagram of logic for controlling temperature of an electric motor, in accordance with an embodiment; and

FIG. 82 is a block diagram of logic for cleaning contactor pads of a switching device, in accordance with an embodiment.

#### DETAILED DESCRIPTION

One or more specific embodiments of the present disclosure will be described below. In an effort to provide a concise description of these embodiments, all features of an actual implementation may not be described in the specification. It should be appreciated that in the development of any such actual implementation, as in any engineering or design project, numerous implementation-specific decisions must be made to achieve the developers' specific goals, such as compliance with system-related and business-related constraints, which may vary from one implementation to another. Moreover, it should be appreciated that such a development effort might be complex and time consuming, but would nevertheless be a routine undertaking of design, fabrication, and manufacture for those of ordinary skill having the benefit of this disclosure.

When introducing elements of various embodiments of the present disclosure, the articles "a," "an," "the," and "said" are intended to mean that there are one or more of the

elements. The terms "comprising," "including," and "having" are intended to be inclusive and mean that there may be additional elements other than the listed elements.

As described above, switching devices are used in various implementations, such as industrial, commercial, material handling, manufacturing, power conversion, and/or power distribution, to connect and/or disconnect electric power from a load. To help illustrate, FIG. 1 depicts a system 10 that includes a power source 12, a load 14, and switchgear 16, which includes one or more switching devices. In the depicted embodiment, the switchgear 16 may selectively connect and/or disconnect three-phase electric power output by the power source 12 to the load 14, which may be an electric motor or any other powered device. In this manner, electrical power flows from the power source 12 to the load 14. For example, switching devices in the switchgear 16 may close to connect electric power to the load 14. On the other hand, the switching devices in the switchgear 16 may open to disconnect electric power from the load 14. In some embodiments, the power source 12 may be an electrical grid.

It should be noted that the three-phase implementation described herein is not intended to be limiting. More specifically, certain aspects of the disclosed techniques may be employed on single-phase circuitry and/or for applications other than power an electric motor. Additionally, it should be noted that in some embodiments, energy may flow from the source 12 to the load 14. In other embodiments energy may flow from the load 14 to the source 12 (e.g., a wind turbine or another generator). More specifically, in some embodiments, energy flow from the load 14 to the source 12 may transiently occur, for example, when overhauling a motor.

In some embodiments, operation of the switchgear 16 (e.g., opening or closing of switching devices) may be controlled by control and monitoring circuitry 18. More specifically, the control and monitoring circuitry 18 may instruct the switchgear 16 to connect or disconnect electric power. Accordingly, the control and monitoring circuitry 18 may include one or more processors 19 and memory 20. More specifically, as will be described in more detail below, the memory 20 may be a tangible, non-transitory, computer-readable medium that stores instructions, which when executed by the one or more processor 18 perform various processes described. It should be noted that non-transitory merely indicates that the media is tangible and not a signal. Many different algorithms and control strategies may be stored in the memory and implemented by the processor 19, and these will typically depend upon the nature of the load, the anticipated mechanical and electrical behavior of the load, the particular implementation, behavior of the switching devices, and so forth.

Additionally, as depicted, the control and monitoring circuitry 18 may be remote from the switchgear 16. In other words, the control and monitoring circuitry 18 may be communicatively coupled to the switchgear 16 via a network 21. In some embodiments, the network 21 may utilize various communication protocols such as DeviceNet, Profibus, Modbus, Ethernet, to mention only a few. For example, to transmit signals between the control and monitoring circuitry 18 may utilize the network 21 to send make and/or break instructions to the switchgear 16. The network 21 may also communicatively couple the control and monitoring circuitry 18 to other parts of the system 10, such as other control circuitry or a human-machine-interface (not separately depicted). Additionally or alternatively, the control and monitoring circuitry 18 may be included in the switchgear 16 or directly coupled to the switchgear, for example, via a serial cable.

Furthermore, as depicted, the electric power input to the switchgear 16 and output from the switchgear 16 may be monitored by sensors 22. More specifically, the sensors 22 may monitor (e.g., measure) the characteristics (e.g., voltage or current) of the electric power. Accordingly, the sensors 22 may include voltage sensors and current sensors. These sensors may alternatively be modeled or calculated values determined based on other measurements (e.g., virtual sensors). Many other sensors and input devices may be used, depending upon the parameters available and the application. Additionally, the characteristics of the electric power measured by the sensors 22 may be communicated to the control and monitoring circuitry 18 and used as the basis for algorithmic computation and generation of waveforms (e.g., voltage waveforms or current waveforms) that depict the electric power. More specifically, the waveforms generated based on input the sensors 22 monitoring the electric power input into the switchgear 16 may be used to define the control of the switching devices, for example, by reducing electrical arcing when the switching devices open or close. The waveforms generated based on the sensors 22 monitoring the electric power output from the switchgear 16 and supplied to the load 14 may be used in a feedback loop to, for example, monitor conditions of the load 14.

As described above, the switchgear 16 may connect and/or disconnect electric power from various types of loads 14, such as the electric motor 24 included in the motor system 26 depicted in FIG. 2. As depicted, the switchgear 16 may connect and/or disconnect the power source 12 from the electric motor 24, such as during startup and shut down. Additionally, as depicted, the switchgear 16 will typically include or function with protection circuitry 28 and the actual switching circuitry 30 that makes and breaks connections between the power source and the motor windings. More specifically, the protection circuitry 28 may include fuses and/or circuit breakers, and the switching circuitry 30 will typically include relays, contactors, and/or solid state switches (e.g., SCRs, MOSFETs, IGBTs, and/or GTOs), such as within specific types of assembled equipment (e.g., motor starters).

More specifically, the switching devices included in the protection circuitry 28 may disconnect the power source 12 from the electric motor 24 when an overload, a short circuit condition, or any other unwanted condition is detected. Such control may be based on the un-instructed operation of the device (e.g., due to heating, detection of excessive current, and/or internal fault), or the control and monitoring circuitry 18 may instruct the switching devices (e.g., contactors or relays) included in the switching circuitry 30 to open or close. For example, the switching circuitry 30 may include one (e.g., a three-phase contactor) or more contactors (e.g., three or more single-pole, single current-carrying path switching devices).

Accordingly, to start the electric motor 24, the control and monitoring circuitry 18 may instruct the one or more contactors in the switching circuitry 30 to close individually, together, or in a sequential manner. On the other hand, to stop the electric motor 24, the control and monitoring circuitry 18 may instruct the one or more contactors in the switching circuitry 30 to open individually, together, or in a sequential manner. When the one or more contactors are closed, electric power from the power source 12 is connected to the electric motor 24 or adjusted and, when the one or more contactors are open, the electric power is removed from the electric motor 24 or adjusted. Other circuits in the system may provide controlled waveforms that regulate operation of the motor (e.g., motor drives, automation

controllers, etc.), such as based upon movement of articles or manufacture, pressures, temperatures, and so forth. Such control may be based on varying the frequency of power waveforms to produce a controlled speed of the motor.

In some embodiments, the control and monitoring circuitry 18 may determine when to open or close the one or more contactors based at least in part on the characteristics of the electric power (e.g., voltage, current, or frequency) measured by the sensors 22. Additionally or alternatively, the control and monitoring circuit 18 may receive an instruction to open or close the one or more contactors in the switching circuitry 30 from another part of the motor system 26, for example, via the network 21.

In addition to using the switchgear 16 to connect or disconnect electric power directly from the electric motor 24, the switchgear 16 may connect or disconnect electric power from a motor controller/drive 32 included in a machine or process system 34. More specifically, the system 34 includes a machine or process 36 that receives an input 38 and produces an output 40.

To facilitate producing the output 40, the machine or process 36 may include various actuators (e.g., electric motors 24) and sensors 22. As depicted, one of the electric motors 24 is controlled by the motor controller/drive 32. More specifically, the motor controller/drive 32 may control the velocity (e.g., linear and/or rotational), torque, and/or position of the electric motor 24. Accordingly, as used herein, the motor controller/drive 32 may include a motor starter (e.g., a wye-delta starter), a soft starter, a motor drive (e.g., a frequency converter), a motor controller, or any other desired motor powering device. Additionally, since the switchgear 16 may selectively connect or disconnect electric power from the motor controller/drive 32, the switchgear 16 may indirectly connect or disconnect electric power from the electric motor 24.

As used herein, the “switchgear/control circuitry” 42 is used to generally refer to the switchgear 16 and the motor controller/drive 32. As depicted, the switchgear/control circuitry 42 is communicatively coupled to a controller 44 (e.g., an automation controller. More specifically, the controller 44 may be a programmable logic controller (PLC) that locally (or remotely) controls operation of the switchgear/control circuitry 42. For example, the controller 44 may instruct the motor controller/drive 32 regarding a desired velocity of the electric motor 24. Additionally, the controller 44 may instruct the switchgear 16 to connect or disconnect electric power. Accordingly, the controller 44 may include one or more processor 45 and memory 46. More specifically, the memory 46 may be a tangible non-transitory computer-readable medium on which instructions are stored. As will be described in more detail below, the computer-readable instructions may be configured to perform various processes described when executed by the one or more processor 45. In some embodiments, the controller 44 may also be included within the switchgear/control circuitry 42.

Furthermore, the controller 44 may be coupled to other parts of the machine or process system 34 via the network 21. For example, as depicted, the controller 44 is coupled to the remote control and monitoring circuitry 18 via the network 21. More specifically, the automation controller 44 may receive instructions from the remote control and monitoring circuitry 18 regarding control of the switchgear/control circuitry 42. Additionally, the controller 44 may send measurements or diagnostic information, such as the status of the electric motor 24, to the remote control and monitoring circuitry 18. In other words, the remote control and

monitoring circuitry **18** may enable a user to control and monitor the machine or process **36** from a remote location.

Moreover, sensors **22** may be included throughout the machine or process system **34**. More specifically, as depicted, sensors **22** may monitor electric power supplied to the switchgear **16**, electric power supplied to the motor controller/drive **32**, and electric power supplied to the electric motor **24**. Additionally, as depicted, sensors **22** may be included to monitor the machine or process **36**. For example, in a manufacturing process, sensors **22** may be included to measure speeds, torques, flow rates, pressures, the presence of items and components, or any other parameters relevant to the controlled process or machine.

As described above, the sensors **22** may feedback information gathered regarding the switchgear/control circuitry **42**, the motor **24**, and/or the machine or process **36** to the control and monitoring circuitry **18** in a feedback loop. More specifically, the sensors **22** may provide the gathered information to the automation controller **44** and the automation controller **44** may relay the information to the remote control and monitoring circuitry **18**. Additionally or alternatively, the sensors **22** may provide the gathered information directly to the remote control and monitoring circuitry **18**, for example via the network **21**.

To facilitate operation of the machine or process **36**, the electric motor **24** converts electric power to provide mechanical power. To help illustrate, an electric motor **24** may provide mechanical power to various devices, as described in the non-limiting examples depicted in FIGS. **4A-4D**. For example, as depicted in FIG. **4A**, the electric motor **24** may provide mechanical power to a fan **47**. More specifically, the mechanical power generated by the electric motor **24** may rotate blades of the fan **47** to, for example, vent a factory. Accordingly, the switchgear/control circuitry **42** may control operation (e.g., velocity) of the fan **47** by controlling electric power supplied from the power source **12** to the electric motor **24**. For example, the switchgear/control circuitry **42** may decrease electric power supplied to the motor **24** to reduce velocity of the fan **47**. On the other hand, the switchgear/control circuitry **42** may increase electric power supplied to the motor **24** to increase velocity of the fan **47**. As depicted, a sensor **22** may also be included on the fan **47** to provide feedback information regarding operation of the fan **22**, such as temperature, velocity, torque, or position, which may be used to adjust operation of the fan **47**. In other words, operation of the fan **47** may be adjusted in a feedback loop.

Additionally, as depicted in FIG. **4B**, the electric motor **24** may provide mechanical power to a conveyer belt **48**. More specifically, the mechanical power generated by the electric motor **24** may rotate the conveyer belt **48** to, for example, move a package along the conveyer belt **48**. Accordingly, the switchgear/control circuitry **42** may control operation (e.g., acceleration, velocity, and/or position) of the conveyer belt **48** by controlling electric power supplied from the power source **12** to the electric motor **24**. For example, the switchgear/control circuitry **42** may start the conveyer belt **48** by supplying electric power to the motor **24**. On the other hand, the switchgear/control circuitry **42** may stop the conveyer belt **48** at a specific position by ceasing electric power supplied to the motor **24**. As depicted, a sensor **22** may also be included on the conveyer belt **48** to provide feedback information regarding operation of the conveyer belt **48**, such as temperature, velocity, torque, or position, which may be used to adjust operation of the conveyer belt **48**. In other words, operation of the conveyer belt **48** may be adjusted in a feedback loop.

Furthermore, as depicted in FIG. **4C**, the electric motor **24** may provide mechanical power to a pump **50**. More specifically, the mechanical power generated by the electric motor may drive the pump **50** to, for example, move a fluid (e.g., gas or liquid). Accordingly, the switchgear/control circuitry **42** may control operation (e.g., pumping rate) of the pump **50** by controlling electric power supplied from the power source **12** to the electric motor **24**. For example, the switchgear/control circuitry **42** may increase electric power supplied to the motor **24** to increase the pumping rate of the pump **50**. On the other hand, the switchgear/control circuitry **42** may decrease electric power supplied to the motor **24** to decrease the pumping rate of the pump **50**. As depicted, a sensor **22** may also be included on the pump **50** to provide feedback information regarding operation of the pump **50**, such as temperature or pumping rate, which may be used to adjust operation of the pump **50**. In other words, operation of the pump **50** may be adjusted in a feedback loop.

As described above, the electric motor **24** may be used to facilitate a machine or process **36**. To help illustrate, FIG. **4D** depicts a chiller system **52** that may be used in a process to cool a circulated fluid, such as in an air conditioning or refrigeration system, which includes a chiller **54** and a fluid handler **56**. More specifically, the fluid handler **56** circulates the fluid (e.g., air or water) into the chiller **54** to cool the fluid by exchanging heat with a refrigerant in the chiller **54**. To facilitate cooling the fluid, the chiller **54** includes an evaporator **58**, a condenser **60**, an expansion device **62**, and a compressor **64**, which pumps the refrigerant (e.g., coolant) in the chiller **54**. Accordingly, as depicted, the compressor **64** includes the electric motor **24** and the pump **50**.

In operation, the compressor **64** compresses refrigerant gas that is condensed in the condenser **60**. In the condenser **60**, heat from the refrigerant gas is exchanged with cooling water or air, which accepts the heat required for the condensation phase change. In the expansion device **62**, the flow of the liquid refrigerant is restricted to reduce the pressure of the refrigerant. In some embodiments, some of the refrigerant may vaporize and absorb heat from surrounding liquid refrigerant to further lower temperature. In the evaporator **58**, the latent heat of vaporization of the refrigerant absorbs heat from the fluid circulated from the fluid handler **56** to cool the fluid (often air).

More specifically, one or more electric motors **24** may drive the compressor **64** (and/or the pump **50**). For example, when the chiller **54** is a centrifugal chiller, the electric motor **24** may rotate an impeller to compress (e.g., accelerate) refrigerant gas in the chiller **54**. Accordingly, the switchgear/control circuitry **42** may control operation of the compressor **64** by controlling electric power supplied to the electric motor **24** from the power source **12**. For example, to increase the flow rate (e.g., compression) of refrigerant gas, the switchgear/control circuitry **42** may increase electric power supplied to the electric motor **24** to increase torque and/or velocity compressor. In some embodiments, the switchgear/control circuitry **42** may adjust the electric power supplied by reconfiguring windings of the electric motor **24**, for example, from a wye configuration to a delta configuration.

Mechanical loads driven by motors may have a wide range of physical and dynamic characteristics that may affect the strategies for powering the motors. For example, chiller applications may result in highly inertial loads (e.g., that start slowly and with high torque requirements, and that stop quickly once power is removed). Other inertial loads may be difficult to stop and may impose particular torque demands when stopping. Fans will typically have known torque/speed or power curves, as may certain types of

pumps. Given that any desired load may be driven by the technology described here, corresponding strategies may be implemented for controlling the application of power.

It should also be noted that, while particular emphasis is placed on powering electric motors by the present technologies, many other loads may benefit from the advances proposed. These may include, but are not limited to, transformers, capacitor banks, linear and other actuators, various power converters, and so forth.

#### Basic Point-on-Wave (POW) Switching

As discussed in the above examples, the switchgear/control circuitry **42** may control operation of a load **14** (e.g., electric motor **24**) by controlling electric power supplied to the load **14**. For example, switching devices (e.g., contactors) in the switchgear/control circuitry **42** may be closed to supply electric power to the load **14** and opened to disconnect electric power from the load **14**. However, as discussed above, opening (e.g., breaking) and closing (e.g., making) the switching devices may discharge electric power in the form of electric arcing, cause current oscillations to be supplied to the load **14**, and/or cause the load **14** to produce torque oscillations.

Accordingly, some embodiments of the present disclosure provide techniques for breaking a switching device in coordination with a specific point on an electric power waveform. For example, to reduce magnitude and/or likelihood of arcing, the switching device may open based on a current zero-crossing. As used herein, a “current zero-crossing” is intended to describe when the current conducted by the switching device is zero. Accordingly, by breaking exactly at a current zero-crossing, the likelihood of generating an arc is minimal since the conducted current is zero.

However, closing the switching device is generally non-instantaneous and the conducted electric power changes rapidly. As such, it may be difficult to break the switching device exactly on the current zero-crossing. In other words, even when aiming for the current zero-crossing it is possible that the switching device actually breaks slightly before or slightly after the current zero-crossing. However, although the current may be relatively low slightly after the current zero-crossing, the magnitude may be increasing and, thus, cause arcing with increased magnitude. On the other hand, the magnitude of the current slightly before the current zero-crossing is low and decreasing. As such, the magnitude of any produced arcing may be small and be extinguished when reaching the current zero-crossing. In other words, the switching device may be opened based at least in part on a current zero-crossing such that the switching device breaks slightly before or at the current zero-crossing.

Similarly, some embodiments of the present disclosure provide techniques for breaking a switching device in coordination with a specific point on an electric power waveform. For example, to reduce magnitude of in-rush current and/or current oscillation, the switching device may close based on a predicted current zero-crossing. As used herein, a “predicted current zero-crossing” is intended to describe where a current zero-crossing would have occurred assuming the switching device was closed and in steady state. In other words, the predicted current zero-crossing may be a multiple of 180° from a subsequent steady state current zero-crossing. Accordingly, by making exactly at a predicted zero-crossing, the conducted current may increase more gradually, thereby reducing magnitude of in-rush current and/or current oscillation.

However, when the switching device is open, the current supplied to the switching device is approximately zero while the voltage is approximately equal to the source voltage.

Since the voltage and the current generally a fixed phase difference in steady-state, the voltage supplied to the switching device may be used to determine the predicted current zero-crossing. For example, when the voltage leads the current by 90°, a current zero-crossing occurs 90° after a line-to-line voltage zero-crossing, which may also be 60° after a phase voltage zero-crossing. As used herein, a “line-to-line voltage zero-crossing” is intended to describe when voltage supplied to a switching device is zero relative to another phase and a “phase voltage zero-crossing” is intended to describe when voltage supplied to the switching device is zero relative to ground. Accordingly, the predicted current zero-crossing may occur 90° after the line-to-line voltage zero-crossing when the voltage is at a maximum.

Since opening the switching device is generally non-instantaneous and the conducted electric power changes rapidly, it may be difficult to make the switching device exactly on the predicted current zero-crossing. In other words, even when aiming for the predicted current zero-crossing it is possible that the switching device actually makes slightly before or slightly after the current zero-crossing. However, since the magnitude of the current changes more gradually at the predicted current zero-crossing, magnitude of in-rush current and/or current oscillation may be reduced. In other words, the switching device may be closed based at least in part on a predicted current zero-crossing such that the switching device makes slightly before, slight after, or at the predicted current zero-crossing.

Although some embodiments describe breaking a switching device based on a current zero-crossing or making the switching device based on a predicted current zero-crossing, it should be understood that the switching devices may be controlled to open and close at any desired point on the waveform using the disclosed techniques. To facilitate opening and/or closing at a desired point on the waveform, one or more switching devices may be independently controlled to selectively connect and disconnect a phase of electric power to the load **14**. In some embodiments, the one or more switching devices may be a multi-pole, multi-current carrying path switching device that controls connection of each phase with a separate pole. More specifically, the multi-pole, multi-current carrying path switching device may control each phase of electric power by movement of a common assembly under the influence of a single operator (e.g., an electromagnetic operator). Thus, in some embodiments, to facilitate independent control, each pole may be connected to the common assembly in an offset manner, thereby enabling movement of the common assembly to affect one or more of the poles differently.

In other embodiments, the one or more switching devices may include multiple single pole switching devices. As used herein a “single pole switching device” is intended to differentiate from a multi-pole, multi current-carrying path switching device in that each phase is controlled by movement of a separate assembly under influence of a separate operator. In some embodiments, the single pole switching device may be a single pole, multi-current carrying path switching device (e.g., multiple current carrying paths controlled by movement of a single operator) or a single-pole, single current-carrying path switching device, which will be described in more detail below.

As described above, controlling the making (e.g., closing) of the one or more switching devices may facilitate reducing magnitude of in-rush current and/or current oscillations, which may strain the load **14**, the power source **12**, and/or other connected components. As such, the one or more switching devices may be controlled such that they make

15

based at least in part on a predicted current zero-crossing (e.g., within a range slightly before to slightly after the predicted current zero crossing).

To help illustrate, closing the switching devices to provide three-phase electric power to an electric motor **24** in a wye configuration is described in FIGS. 5A-5C. More specifically, FIG. 5A illustrates the voltage of three-phase electric power (e.g., a first phase voltage curve **66**, a second phase voltage curve **68**, and a third phase voltage curve **70**) provided by a power source **12**. FIG. 5B illustrates the line to neutral voltage supplied to each terminal (e.g., first terminal voltage curve **72**, second terminal voltage curve **74**, and third terminal voltage curve **76**) of the electric motor **24**. FIG. 5C illustrates line current supplied to each winding (e.g., first winding current curve **77**, second winding current curve **78**, and third winding current curve **80**) of the electric motor **24**. As described above, the waveforms depicted in FIGS. 5A-5C may be determined by control and monitoring circuitry **18** based on measurements collected by the sensors **22**.

As depicted, between  $t_0$  and  $t_1$ , electric power is not connected to the electric motor **24**. In other words, each of the switching devices is open. At  $t_1$ , one or more switching devices are closed to start current flow from the power source **12** in two phases (e.g., a first phase and a second phase) of the electric motor **24**. To minimize inrush current and/or current oscillations, a first phase and a second phase are connected based upon a predicted current zero-crossing. Accordingly, as depicted in FIG. 5A, the first phase and the second phase are connected when the line-to-line voltage of the first phase (e.g., first phase voltage curve **66**) and the second phase (e.g., a second phase voltage curve **68**) is at a maximum (e.g.,  $90^\circ$  after a line-to-line voltage zero-crossing). Once connected, the first phase of the electric power flows into the first winding of the electric motor **24**, the second phase of the electrical flows into the second winding of the electric motor **24**, and the third winding of the electric motor **24** is at an internal neutral (e.g., different from line neutral), as depicted in FIG. 5B. Additionally, since the two phases are connected at a predicted current zero-crossing, the current supplied to the first winding (e.g., first winding current curve **77**) and the second winding (e.g., second winding current curve **78**) start at zero and gradually increase, as depicted in FIG. 5C, thereby reducing magnitude of in-rush current and/or current oscillations supplied to the first and second windings.

After the first two phases are connected, at  $t_2$ , the one or more switching devices are closed to connect a third phase of the electric power to the electric motor **24**. Similar to the first phase and the second phase, to minimize inrush current and/or current oscillations, the third phase is also connected based upon a predicted current zero-crossing. Accordingly, as depicted in FIG. 5A, the third phase is connected when sum of line-to-line voltage between the first phase (e.g., first phase voltage curve **66**) and the third phase (e.g., third phase voltage curve **70**) and the line-to-line voltage between the second phase (e.g., second phase voltage curve **68**) and the third phase (e.g., third phase voltage curve **70**) is at a maximum (e.g., a predicted current zero-crossing), which occurs when the line-to-line voltage between the first phase and the second phase is at a minimum and third phase is at a maximum.

It should be noted that although the third phase is depicted as being connected at the first such subsequent occurrence, the third phase may additionally or alternatively be connected at any subsequent occurrence, for example at  $t_3$ . Once connected, the third phase of the electric power flows

16

into the third winding of the electric motor **24**, as depicted in FIG. 5B. Additionally, since the third phase is connected based upon a predicted current zero-crossing, the third winding current **80** gradually changes from zero, as depicted in FIG. 5C, thereby reducing magnitude of in-rush current and/or current oscillations supplied to the third winding.

Additionally, as described above, controlling the breaking (e.g., opening) of the one or more switching devices may facilitate reducing likelihood and/or magnitude of arcing, which may strain and/or wear contactor pads in the switching devices and/or other connected components. As such, the one or more switching devices may be controlled such that they break based at least in part on a current-zero crossing (e.g., within a range slightly before to at the current zero-crossing across that switching device).

To help illustrate, opening the switching devices to disconnect three-phase electric power from an electric motor **24** is described in FIG. 6. More specifically, FIG. 6 depicts the current supplied to the windings (e.g., first winding current curve **77**, second winding current curve **78**, and third winding current curve **80**) of the electric motor **24**. As described above, the waveform depicted in FIG. 6 may be determined by control and monitoring circuitry **18** based on measurements collected by the sensors **22**.

As depicted, prior to  $t_4$ , electric power is connected to the electric motor **24**. In other words, each of the switching devices is closed. At  $t_5$ , one or more of the switching devices is opened to disconnect the third phase of the electric power from the electric motor **24**. As described above, to minimize arcing, the third phase disconnected is based at least in part on a current zero-crossing in the third phase of electric power. Accordingly, as depicted, the third phase is disconnected when the current supplied to the third winding (e.g., third winding current curve **80**) is approximately zero. Once disconnected, the current supplied to the second winding current the first winding current adjust to the removal of the third phase.

After the third phase is disconnected, the one or more of the switching devices are opened to disconnect the other two phases (e.g., the first phase and the second phase) of electric power to the electric motor **24** at  $t_6$ . Similar to disconnecting the third phase, to minimize arcing, the first phase is disconnected based at least in part on a current zero-crossing in the first phase of electric power and the second phase is disconnected based at least in part on a current zero-crossing in the second phase of electric power. Accordingly, as depicted, the first phase and the second phase are disconnected when current supplied to the second winding (e.g., second winding current curve **78**) and the first winding (e.g., first winding current curve **77**) are approximately zero. Once disconnected, the electric power supplied to the electric motor **24** begins to decrease. It should be noted that although the first phase and the second phase are depicted as being disconnected at the first subsequent current zero-crossing, the first and second phase may additionally or alternatively be disconnected at any subsequent current zero-crossings. Single-Pole, Single Current-Carrying Path Switching Device

FIGS. 7-24 depict a presently contemplated arrangement for providing a single-pole, single current-carrying path switching device. The device may be used in single-phase applications, or very usefully in multi phase (e.g., three-phase) circuits. It may be used alone or to form modular devices and assemblies such as for specific purposes as described below. Moreover, it may be designed for use in POW power application, and in such applications, synergies may be realized that allow for very compact and efficient

designs due, as least in part, to the reduced operator demands, reduced arcing, and improved electromagnetic effects during the application of current through the device.

It should be noted that various embodiments of the single-pole switching devices may be used in single current-carrying path applications and also in multi current-carrying path applications. That is, references to single-pole switching devices throughout the disclosure may refer to single-pole, single current carrying path switching devices, single-pole, multiple current carrying path switching devices, or some combination thereof. In some embodiments, a single-pole, multiple current-carrying path switching device may allow for the repurposing of certain devices as modular three-phase circuits. For example, a single-pole, multiple current-carrying path may refer to a switching device with three current-carrying paths that have been interconnected to provide a single phase of power. Additionally, in some embodiments, three single-pole, single current-carrying path switching devices may each be configured to provide a separate phase of power (e.g., three-phase) and can be independently and/or simultaneously controlled in various beneficial configurations, as described in detail below. It should be understood, that the single-pole switching devices may be modularly configured to provide any number of power phases.

FIG. 7 illustrates a switching device **82** designed for use in certain of the applications described in the present disclosure. In the embodiment illustrated, a switching device is a single-pole, single current-carrying path device in the form of a contactor **84**. The contactor **84** generally includes an operator section **86** and a contact section **88**. As described more fully below, the operator section includes components that enable energization and de-energization of the contactor to complete and interrupt a single current-carrying path through the device. The section **88** includes components that are stationary and other components that are moved by energization and de-energization of the operator section to complete and interrupt the single-carrying path. In the illustrated embodiment, the upper conductive section has an upper housing **90**, while the operator section has a lower housing **92**. The housings fit together to form a single unitary housing body. In the illustrated embodiment flanges **94** extend from the lower housing allowing the device to be mounted in operation. Other mounting arrangements may certainly be envisaged. A line-side conductor **96** extends from the device to enable connection to a source of power. A corresponding load-side conductor **98** extends from an opposite side to enable the device to be coupled to a load. In other embodiments, conductors may exit the housing **90** and **92** in other manners. In this illustrated embodiment the device also includes an upper or top-side auxiliary actuator **100** and a side mount auxiliary actuator **102**.

FIG. 8 illustrates certain of the mechanical, electrical and operational components of the contactor in an exploded view. As shown, the operator section is mounted in the lower housing **92** and includes an operator designated generally by reference numeral **104** which itself is a collection of components including a magnetic core comprised of a yoke **106** and a central core section **108**. A return spring **110** is mounted through the central core section **108** as described more fully below for biasing movable contacts towards an open position. An operator coil **112** is mounted around the core section **108** and between upturned portions of the yoke **106**. As will be appreciated by those skilled in the art, the coil **112** will typically be mounted on a bobbin and is formed of multiple turns of magnet wire, such as copper. The operator includes leads **114**, which in this embodiment

extend upwardly to enable connection to the operator when the components are assembled in the device. As will also be appreciated by those skilled in the art, the core, including the yoke and central core section, along with the coil **112** form an electromagnet which, when energized, attracts one or more parts of the movable contact assembly described below, to shift the device between an open position and a closed position.

A movable contact assembly **116** similarly includes a number of components assembled as a sub-assembly over the operator. In the embodiment illustrated in FIG. 8, the movable assembly includes an armature **118** that is made of a metal or material that can be attracted by flux generated by energization of the operator. The armature is attached to a carrier **120** which typically is made of a non-conductive material, such as plastic or fiberglass, or any other suitable electrically insulating material. A conductor assembly **122** is mounted in the carrier and is moved upwardly and downwardly by movement of the carrier under the influence of electromagnetic flux that draws the armature downwardly, and, when the fluxes are removed, the entire assembly may be moved upwardly under the influence of the return spring **110** mentioned above.

The device further includes a stationary contact assembly **124**. In the illustrated embodiment, this contact assembly is formed of multiple hardware components, including a mounting assembly **126** that is fitted between the lower housing **92** and the upper housing **90**. This mounting assembly will typically be made of an electrically non-conductive material, and it includes various features for allowing the mounting of the line and load-side conductors **96** and **98**. It may be noted that the structure illustrated in FIG. 8 has been rotated 180 degrees as compared to that of FIG. 7. Each conductor includes a contact pad that comes into contact with a corresponding contact pad of the movable contact assembly when the device is closed or “made”. Moreover, turnbacks **128** are provided on each conductor and may be screwed or riveted into place, or attached by any other suitable method, and at least partially span the contact pad of the corresponding conductor. In the final assembly, these turnbacks are fitted adjacent to a series of splitter plates or shunts **130** on either side. As described more fully below, when the device makes or breaks, any arcing that occurs can be driven to the turnbacks and splitter plates where the arc is divided into several smaller arcs and ionized particles and hot gasses are cooled and routed toward the exterior device.

FIGS. 9 and 10 illustrate the same device assembled in top and bottom perspective views, with certain of the components removed, including certain housing sections to illustrate the interior components and their interior connection. In particular, as shown in FIG. 9, the coil **112** of the operator is positioned in a lower location, although in practice the device may be mounted in various orientations. The mounting assembly **126** holding the line and load-side conductors is fitted above the operator coil and the movable contact assembly **116** is positioned above the mounting assembly such that contact pads of movable contacts within this assembly are positioned in facing relation to corresponding contact pads on the conductors. More detail regarding the various components of these assemblies is provided below. As can also be seen in FIGS. 9 and 10, guides **132** may be formed, such as in the mounting assembly **126** for receiving the terminals of the operator coil. In this illustrated embodiment the terminals extend upwardly and are formed so that plug-in connections can be made to the operator coil. As will be appreciated by those skilled in the art, in operation, a signal that energizes the operator coil is provided by way of

the terminals, and typical signals may include alternating current (A/C) or direct current (DC) signals, such as 24 or 48 vDC signals. Although AC signals may be provided for the operator coil, in some applications, such as POW energization strategies, predictability in times of closure and opening are provided by DC signals. In some alternative embodiments the terminals, or leads for the operator coil may be caused to exit other locations in device, such as through the lower housing. Such applications may provide for plug-in mounting of the contactor or any similar switching device such that contacts are made for at least the operator by simply mounting the device on a suitable base. In some arrangements it may also be suitable to allow for power, both line and load, to be made through such a base.

FIGS. 11 and 12 provide additional detail of the currently contemplated single-pole, single current-carrying path switching device. As shown in FIG. 11, the operator coil 112 is disposed within the yoke 106 such that the yoke channels flux generated by operator coil when energized. In this arrangement, the return spring 110 is provided around an alignment pin 134 that is fixed to and moves with the movable contact assembly, and specifically in this arrangement is mounted to the carrier. FIG. 11 illustrates the foregoing components in a de-energized or open position of the device. In this position, the movable contact assembly is distanced from the stationary contacts of the conductors so that current-carrying path through the device is interrupted. The device is thus electrically open.

FIG. 12 illustrates the same components, in a view in which certain of them have been shown in section to illustrate their inter-relationship and operation. Here again, the device is shown in an electrically open position that will exist when the operator is de-energized prior to making or after breaking. As shown in FIG. 12, in the de-energized position, the entire movable contact assembly is held in a raised position by the return spring 110. Here again, the device may be oriented differently so that the terms "raised" or "lowered" or similar terms are intended as only given the orientation shown in the figures. In this position, the armature 118 is separated from the operator assembly, in particular from the yoke 108 and the core 108. The carrier 120 holds the conductor assembly 122 spaced from the contact pads of the line and load-side conductors 96 and 98. The assembly is illustrated as including guides 132 (see FIGS. 9 and 10) through edge the terminals 114 may be routed.

In the currently contemplated embodiment, to reduce size and weight but to provide an excellent working structure, a guide or alignment pin 134 is provided in the movable assembly. The pin may be secured in place by any suitable means, such as a clip or retaining ring in the carrier. The pin is recessed within the carrier to provide the desired degree of perpendicularly and alignment with the other components of the movable structure. The operator assembly, on the other hand, comprises one or more core windings 136 which are made of a series of electrically insulated conductive wire, such as copper. The wires typically wound on a bobbin 138 which is placed between the yoke 106 and the core section 108. The core assembly is typically formed as a separate component which is assembled with the other elements of the other elements of the operator during manufacture. In the illustrated embodiment, the core section 108 is formed as a cylindrical structure having a central aperture 140 for receiving the alignment pin 134. An extension 142 of this core section is affixed to a lower opening in the yoke 106, such as by staking, threading, or any suitable means. The aperture 140 comprises at least two sections, including a central alignment section 144 that is dimen-

sioned to fit relatively snugly with the alignment pin, but to allow for easy movement of the alignment pin therein, providing the desired alignment function. An upper recess 146 is somewhat enlarged in forms of shoulder within the core section to receive the return sprig 110 and to form a foundation against which the return spring bears during operation. In the depicted embodiment, the return spring 110 is provided in a convenient location, but may be provided in other locations in other embodiments.

The upper portion of the carrier 120 includes a window 150 in which the conductor assembly 122 is positioned. The window is contoured to receive and to hold in place a movable conductor biasing spring 152 that enables some movement of the conductor assembly 122 as it comes into contact with the line and load-side conductors 196 and 198. As will be appreciated by those skilled in the art, in the illustrated embodiment, the conductor assembly 122 includes a turnback element, a conductive bridge or spanner, and contact pads affixed to this spanner. The spanner will typically be made of a highly conductive material, such as copper, and the contact pads will be made of a conductive material that is nevertheless resistant to arcing that may occur, such as silver, silver/tin oxide, silver nickel alloys, and so forth.

The line and load-side conductors 96 and 98 may be mounted to the mounting assembly 126 in any suitable manner, such as by screws or rivets 154. As can be best seen in the exploded view of FIG. 8, contact pads of the line and load-side conductors are positioned to come into contact with the contact pads of the movable conductor assembly when the device is closed or "made". The turnbacks 128 fit around this contact pad and are themselves are secured by fasteners. One or more insulative elements, such as synthetic membranes may be placed between the turnbacks 128 and the conductors 96 and 98 when desired. In the illustrated embodiment bumps 156 are formed on the turnbacks to promote migration of any arcs that are formed during operation of the device.

The elements of the movable contact assembly are illustrated in greater detail in FIG. 13. Here again, the conductor assembly 122 may include an upper auxiliary actuator 100, where desired. A side auxiliary actuator 102 may also be included. The assembly itself is formed around the conductor 158 which forms the bridge for the structure. Contact pads 160 are affixed to a lower side of this conductor and come into contact with the stationary contact pads of the line and low-side conductors when the device is closed or energized. The carrier assembly 122 itself also includes a base 164 to which the armature 118 is secured by appropriate fasteners 166. Again, the alignment pin 134 extends downwardly from the base 164 of the carrier.

Additionally, a turnback 162 is formed in a metallic element that rests adjacent to the conductive span 158. In the illustrated embodiment the turnback 162 also contacts the conductor biasing spring 152 to hold the movable conductors in a lower position in the window 150. In some embodiments, the turnback 162 may shape the magnetic field during opening by providing an alternate path for the current. More specifically, the arc may be attached up onto a face 163 of the turnback 162 and stay there during the arcing event. In this manner, the arcing experienced by the contactor pads 160 may be reduced, thereby enabling the ionized atmosphere around the contact pads 160 to regain their dielectric strength

FIG. 14 illustrates the foregoing structure in the energized or shifted position. This position corresponds to energization of the operator coil, typically by application of a DC voltage.

21

So long as the coil is energized, the coil generates a flux that is channeled by the yoke **106** and core **108** of the operator assembly, drawing the armature toward the operator assembly, shifting the entire movable contact assembly downwardly. Thus, in FIG. **14** the armature **118** is illustrated in a downward position adjacent to the yoke **106**. The alignment pin has guided the movable assembly in its motion, and protrudes further into the alignment portion **144** of the aperture in the core section **108**. The return spring is shown compressed. The movable contacts, hidden here behind the fasteners of the turnbacks in the stationary contact assembly are in contact to complete a current carrying path through the device. In the presently contemplated embodiment, a single current carrying path is defined through the device that includes the line-side conductor **96**, the load-side conductor **98**, the contact pads of these conductors, the movable contact pads of the movable contact assembly, and the conductive spanner of the movable contact assembly. The device is thus a single-pole device that is suitable for passing current of a single phase of AC power (or DC power).

Certain presently contemplated details of this assembly are illustrated in FIGS. **15** and **16**. As shown in FIG. **15**, to promote saturation of the yoke **106**, upper ends of the yoke may have a reduced dimension **170** in a region where they come into contact with or are close to the armature **118** when shifted. Such saturation may facilitate holding of the movable assembly in the shifted position while reducing required holding current in the coil. As shown in FIG. **16**, moreover, a gap **172** may be formed between the upper surface of the central core section **108** of the operator assembly and the armature **118**. Such gaps may be formed by air spacing, insulating elements, or by any similar means. Such gaps may aid in avoiding residual flux in the armature **118**, yoke **106** and/or core **108** that may otherwise preclude or slow the separation or movement of the movable assembly upon de-energization of the operator coil.

FIG. **17A** illustrates a presently contemplated alternative configuration in which current may be sensed by the effects of the current on signals through the operator coil itself. That is, before the device is shifted or energized to make or close the device, no current should flow between the line and low-side conductors. Once the device is shifted, however, current may flow through the single current-carrying path as described herein. When current does flow, various mechanisms may be envisaged for sensing the current, including separate current sensors, which may be internal or external to the switching device. It is presently contemplated, however, that certain elements of the structure may themselves permit sensing of the main current through the single current-carrying path. Such sensing may, for example, be performed by monitoring current through the operator coil described below. The current to the operator coil may be perturbed in detectable ways by current through the single current-carrying path. Such perturbations may be evaluated by the coil control circuitry and used as an indication of the main current through the device. In the illustration of FIG. **17A**, the armature **118** may provide sufficient coupling of flux generated by the main current through the device with current through the operator coil to enable such sensing. Where enhanced sensing is desired, it is possible to design the armature **118** to promote the sensing, such as by the inclusion of wings **168** or other structures that tend to enhance the uptake of flux through the armature that may be generated by the current through the main current-carrying path.

An alternative or complimentary arrangement for sensing current is illustrated in FIG. **17B**. In this arrangement, one

22

or more sense windings **174** are provided on the operator coil **112**. The sense winding may be made of a similar or different material, and will typically not require more than one or a few turns. Where desired, a secondary groove may be provided in the bobbin discussed above to receive the sense winding. The sense winding, where provided, will have lead as illustrated in FIG. **17B** that will be coupled to measurement circuitry used to detect current through the main current-carrying path of the device.

The contactor illustrated in the figures also includes integral structures for routing plasma and hot gasses and facilitating their migration out of the device where desired. As illustrated in FIGS. **18** and **19**, these might include features of the splitter plates **130** and the upper housing. As shown in FIG. **18**, for example, a current design for the splitter plates **130** includes stake ridges that allow the plates to be pressed into place within the upper housing and held into place, preventing their withdrawal. A lower recess **178** is formed in each plate, and upper recesses **180** are formed that enable the passage of plasma and hot gasses during opening and closing of the device. As best illustrated in FIG. **19**, the upper housing may include alignment features, such as recesses **180** that may also enable the passage of operator coil leads, where such designs are used. Within the upper housing, plate guides **182** may be formed that receive the splitter plates therebetween, and hold the splitter plates in spaced relation with one another. On ends of the interior surface of the upper housing, gas guides **184** may be formed that are separated from one another by grooves **186**. These may be placed in general alignment with the recesses **180** formed in the splitter plates. Gasses may thus be channeled upwardly around the movable contact assembly, through the upper recesses **180**, which form passage ways with the upper interior wall of the upper housing, and then downwardly through the grooves **186**. The gasses may exit gaps formed between line and load-side conductors and the upper housing. In the illustrated embodiment, the upper housing (and where desired the lower housing and even the mounting assembly for the stationary contact assembly) may be bilaterally symmetrical so that its orientation is arbitrary, greatly facilitating assembly of the device. Such innovations may also facilitate ease of manufacturing and reduced number of different parts.

FIG. **20** illustrates a cross-sectional view of the single current-carrying path switching device. More specifically, when the switching device is closed (e.g., core windings **136** are energize), as indicated by arrow **188** in FIG. **20**, a single current-carrying path is established through the device when closed, allowing for single-pole operation. As discussed in greater detail below, the device may be made much smaller physically than previous devices of the same type. This is particularly true owing to the mechanical design of the components. The design around a single-pole strategy rather than a three-phase strategy, and so forth. The device may be particular reduced in size and mass by the use of POW switching strategies which greatly reduce arcing and wear within the device. As also noted elsewhere in the present discussion, where the switching devices used for three-phase applications, and POW switching strategies are employed, adjusting order and/or timing of opening/closing switching devices may greatly prolong the life of the device while allowing for reduced size and mass. The reduction in size and mass affectively also reduces the cost of the individual components, particularly the relatively expensive conductive materials used. Further, smaller devices may also reduce the electrical enclosure used to house these components and,

thus, reduce the amount of space within a factory or facility occupied by such components.

On the other hand, when the switching device opens from the closed position plasma and/or gasses may be generated. Accordingly, as indicated by arrow **190**, the plasma and/or gasses are routed upwardly through passageways and the splitter plates **130** and then downwardly through grooves in the upper housing **90**. In fact, such routing facilitates interruption of current through the device by the action of the splitter plates **130**, and also significantly cools plasma and gasses as they are routed through the device and exit.

The single-pole, single current-carrying path device described above may be used in a variety of applications and ways. For example, the device may be energized by controlled DC currents as described elsewhere in the present disclosure. Such control facilitate carefully timed switching, such as for POW switching strategies. The device may be used for single-phase switching or multi-phase switching, such as in three-phase systems. The reduced size, weight and mass of the device discussed above greatly facilitate the assembly of the device in various ways, promoting a modular approach to a system design. As discussed below, such modularity may enable the construction of a wide range of complex devices that have heretofore been designed with three-phase contactors, relays and other switches, complex wiring, complex assembly, and so forth.

One mechanism for enabling the interconnection of the devices may be based around the use of mechanical interlocks that are positioned between mated devices. FIGS. **21-24** illustrate the use such interlocks. In the illustration of FIG. **21**, two switching devices **82** and **82'** are shown positioned side-by-side with an assembly **192**. The assembly includes an interlock **194** that is positioned between, secured to and that interfaces with the side auxiliary actuators of the devices as described above. As shown in FIG. **22**, various assemblies of this type may be envisaged. In the more complex assembly of FIG. **22**, a number of switching devices are positioned side-by-side, with interlocks **194** being placed between certain devices that should not be switched or energized at the same time. Owing to the particular construction and design of the devices it has been found that reduced distances may be allowed while nevertheless respecting requirements of electrical codes. Where desired, to define the desired circuitry, one or more conjunctive jumpers **196** may be routed between line and/or load-side conductors as generally shown in FIG. **22**. Where desired, insulated materials may be placed between such jumpers to enable definition of complex circuitry that includes the current-carrying paths defined by the modular devices. Pairs **198** of the devices may be positioned side-by-side, while other pairs are positioned side-by-side with the interlocks **194** provided therebetween.

Again, the interlocks may enable mechanical control of the modular switching devices, and in particular prevent two switching devices from being closed at the same time. As will be appreciated by those skilled in the art, many power circuits require that such mutual energization may be avoided, and the interlocks enable a simple mechanism to maintain the current-carrying path open through one device while it is closed through one another. A currently contemplated design for the interlock as illustrated in FIGS. **23** and **24**. The interlock may include a housing **200** that is generally symmetrical about a vertical center line allowing for reduction in parts because only a front and a back of the housing are required. The housing may be structured to be easily mounted between adjacent module switching devices. The housing may include a window opening **202** on both sides

through which an actuating element **204** is accessible. The element **204** interfaces mechanically with the side auxiliary actuators of the switching devices described above (see, e.g., FIG. **7**). As best illustrated in FIG. **24**. A current design for the interlock includes self-similar lever arms **206** and **208** that are mounted pivotally within the housing. Pivot pins **210** and **212** enable pivotal movement of the lever arms **206** and **208**. These may be integrally formed with the housing, or may be defined by separate components (e.g., roll pins) inserted in the housing. Each lever arm carries a respective actuating element **204**, with one element extending on one side of the structure and the other element extending on an opposite side. Each lever arm includes an integral cam arrangement **214** and **216** that contact one another to prevent one of the lever arms from moving to a downward position when the other lever arm is already in a downward position. Thus, when connected to the side auxiliary actuators of two modular switching devices that are mounted side-by-side, only one of the actuating elements **204** is allowed to a lower position at a time. When the energized and shifted switching device is de-energized and shifted to an open position then, interference between the integral cams is eliminated and one or the other device is then free to shift to its energized or closed position. Many advantages may flow from the interlock arrangement illustrated, particularly the simplicity of the structure, the reduction in the number of parts, the ability to fabricate the parts from easily-molded materials (typically non-conductive plastics) and the ease of manufacture. In the illustrated embodiment, as noted above, the housing may comprise two self-similar housing shelves, while the lever arms **206** and **208** may also be identical, as may the actuating elements **204**.

#### Operation of a Single-Pole Switching Device

Referring to FIG. **25**, based on the above described switching device (e.g., single-pole, single current-carrying path switching device), designated in this figure by reference numeral **218**, operation (e.g., opening and closing) of the switching device **218** is based on controlling electric power supplied to the operating coil **220**. To control operation of the single-pole, single current-carrying path switching device **218**, as well as any other switching device with an operating coil, an operating coil driver circuitry **222** may be utilized. To simplify discussion, the operating coil driver circuitry **222** will be described in relation to the single-pole, single current-carrying path switching device **218** described above. As depicted, the operating coil driver circuitry **222** includes a processor **224**, memory **226**, an SR flip-flop **228**, a comparator **230**, a switch **232**, and a flyback diode **234**. More specifically, as will be described in more detail below, the memory **226** may be a tangible non-transitory medium that stores computer-readable instructions that when executed perform various processes described. Accordingly, in some embodiments, the processor **224** and memory **226** may be included in the automation controller **44** or control and monitoring circuitry **18**. It should be noted that although the SR flip-flop **228** and the comparator **230** are described as discrete hardware components, in other embodiments, they may be implemented by the processor **224** as computer readable instructions.

As will be described in more detail below, the operating coil driver circuitry **222** controls operation of the switching device **218** by controlling the current in the operating coil (i.e., Icoil). In the depicted embodiment, the operating coil current may be determined by measuring the voltage at node **236** (i.e., Vnode). More specifically, since the operating coil current flows through resistor **238** to ground, the operating coil current is equal to the voltage at node **236** divided by the

resistance of the resistor **238**. As such, the resistor **238** is generally referred to as a current measuring resistor. In other words, the voltage at node **236** may be used as a proxy for the operating coil current.

Additionally, as depicted, the node voltage is applied to the non-inverting terminal of the comparator **230** and compared to a reference voltage (i.e.,  $V_{ref}$ ), which is applied to the inverting terminal of the comparator **230**. More specifically, the processor **224** outputs a voltage that is smoothed into the DC reference voltage by resistor **240** and capacitor **242**, which corresponds with the voltage expected to be measured at node **236** when the target (e.g., desired) operating coil current flows through resistor **238**. In other embodiments, the processor **224** may include a digital-to-analog (DAC), thereby obviating the resistor **240** and the capacitor **242**. In this manner, the reference voltage may be equal to the target operating coil current multiplied by the resistance of resistor **238**.

Accordingly, when the node voltage is higher than the reference voltage, the output of the comparator **230** is high indicating that the operating coil current is higher than the target. On the other hand, when the node voltage is lower than the reference voltage, the output of the comparator **230** is low indicating that the operating coil current is lower than the target. In other words, the processor **224** may indicate the target operating coil current with the reference voltage.

The result of the comparison performed by the comparator **230** is applied to the R terminal of the SR flip-flop **228**. At the S terminal of the SR flip-flop **228**, the processor applies a trigger signal **244**, which periodically goes high to set the SR flip-flop **228**. Based on the result of the voltage comparison and the trigger signal **244**, the SR flip-flop **228** outputs a pulse-width-modulated (PWM) signal to the switch **232** and the processor **224**. More specifically, the PWM signal is low when the input from the comparator **230** is high, thereby instructing the switch to turn off and disconnect electric power from the operating coil **220**. On the other hand, the PWM signal goes high when the input from comparator **230** is low and the trigger signal **244** is high, thereby instructing the switch **232** to turn on and supply electric power from the power supply **246** to the operating coil **220**.

In this manner, the trigger signal **244** is input to the SR flip-flop **228** to facilitate generating the PWM signal by periodically attempting to turn on the switch **232**. In some embodiments the frequency of the trigger signal **244** may be based at least in part on desired resolution, how quickly current decays in the coil **220**, and/or line frequency of the power supply **246**. For example, when the line frequency is 60 Hz, the trigger signal may have a frequency of 21.6 kHz (i.e.,  $1/(60 \cdot 360)$ ) to achieve a one electrical degree resolution.

Based on the PWM signal, the switch **232** selectively connects or disconnects the operating coil **220** from electric power supplied by the power supply **246** to a DC bus **248**. More specifically, the power supply **246** may output DC electric power to the DC bus **248** based on an external AC or DC power source, such as power source **12**. In some embodiments, the power supply **246** may store some electric power to decouple the operating coil control circuitry **222** from the power source. For example, decoupling may reduce the effect of variations in the power source, such as a brown out, on the operation of the operating coil control circuitry **222**.

As described above, when the PWM signal is high, the switch **232** connects the operating coil **220** to the DC bus **248** to supply electric power to the operating coil **220**. On

the other hand, when the PWM signal is low, the switch **232** disconnects the operating coil **220** from the DC bus **248** to remove electric power from the operating coil **220**. In this manner, the PWM signal may control the duration the electric power is connected and, thus, the operating coil voltage.

More specifically, the operating coil voltage may be equal to the DC bus voltage when the switch **232** is on and equal to voltage across the flyback diode **234** when the switch **232** is off. As such, the average operating coil voltage (i.e., voltage drop across the operating coil **220**) may approximately equal to the DC bus voltage times the PWM signal duty cycle. Since the operating coil current is directly related to the operating coil voltage, the operating coil current may also be controlled by adjusting the duty cycle of the PWM signal. For example, when duty cycle is increased, the operating coil current increases and, when the duty cycle is decreased, the operating coil current decreases.

Accordingly, aside from providing the reference voltage and the trigger signal **244**, the operating coil current may be adjusted to the target coil current relatively independent from the processor **224**. For example, when the operating coil current is lower than the target, the SR flip-flop **228** outputs the PWM signal to instruct the switch **232** to connect electric power from the power supply **34** to the operating coil **220**. On the other hand, when the comparator **230** determines that the operating coil current is higher than the target, the SR flip-flop **228** outputs the PWM signal to instruct the switch **232** to disconnect the power supply **246** from the operating coil **220**.

In this manner, the operating coil current may be regulated relatively independent from the processor **224**. Nevertheless, the processor **224** may still receive the PWM signal from the SR flip-flop **228**. As will be described in more detail below, the PWM signal may enable the processor **224** to determine when the switching device **218** makes or breaks, as well as other diagnostic information.

As described above, the operating coil driver circuitry **222** may control operation of the switching device **218** by controlling the operating coil current. For example, to make (i.e., close) the switching device **218**, the operating coil driver circuitry **222** may supply electric power to the operating coil **220**, which magnetizes the operating coil **220**. The magnetized operating coil **220** then attracts the armature **118**, one embodiment of which is depicted in FIG. **8**, to close the switching device **218**. To help illustrate, a profile of the operating coil current **250** used to make the switching device **218** is shown in FIGS. **26A** and **26B**, which is a zoomed in view of FIG. **26A**.

As depicted in FIG. **26A**, between  $t_0$  and  $t_1$ , current is not supplied to the operating coil **220**. At  $t_1$ , a small amount of current insufficient to close the switching device **218** is supplied to the operating coil **220**. More specifically, as will be described in more detail below, the small amount of current may be utilized to measure the temperature (e.g., actual or relative temperature) of the operating coil **220**. Accordingly, the operating coil current **250** between  $t_1$  and  $t_2$  is generally referred to herein as the "measurement current." Moreover, the measurement current may also serve to "precharge" the magnetic flux in the operating coil **220**, thereby reducing amount of current increase to close the switching device. In this manner, repeatability and/or timing of closing the switching device **218** may be further improved.

Between  $t_2$  to  $t_3$ , the operating coil current **250** is ramped up from the measurement current to a level sufficient to close the switching device **218**. Accordingly, the operating coil

current 250 between t3 and t4 is generally referred to herein as the “pull-in current.” It should be noted that as in the depicted embodiment, the current is partially ramped up to an intermediate current level between the measurement current and the pull-in current. In some embodiments, the operating coil driver circuitry 222 may ramp the current to the intermediate current level to further precharge the magnetic flux in the operating coil 220, thereby reducing amount of current increase to close the switching device. Additionally or alternatively, the current may be directly ramped up from the measurement current to the pull-in current.

Upon ramping the operating coil current 250 up to the pull-in current, the armature 118 may begin to move. As the armature 118 moves, the impedance of the operating coil 220 increases. More specifically, the armature 118 may behave as both a position variable inductor and as a linear motor and, thus, affect inductance (e.g., impedance) of the operating coil 220 when in motion. Accordingly, to maintain the operating coil current 250 at the target level (e.g., pull-in current), the operating coil driver circuitry 222 may increase the amount of electric power supplied to the operating coil 220. As described above, this may include increasing the duty cycle of the PWM signal.

By design, at t4, the impedance of the operating coil 220 has increased to a point where the electric power supplied by the power supply 246 is no longer able to maintain the operating coil current 250 at the pull-in current. As depicted, the operating coil current 250 sharply drops. After the switching device 218 makes, the impedance of the operating coil 220 returns to normal, thereby enabling the operating coil current 250 to return to the pull-in current. More specifically, when the armature 118 stops moving (e.g., when it hits the yoke 106) inductance generated by movement of the armature may dissipate. Accordingly, as depicted, the operating coil current 250 returns to the pull-in current at t5, which produces a “V” between t4 and t5.

In fact, as will be described in more detail below, the profile of the operating coil current 250 (e.g., duration between t4 and t5) may be used as an indication of armature 118 position and, thus, when the switching device 218 makes. More specifically, at some time between t4 and t5, for example at tM, the switching device 218 makes. The drop in the operating coil current 250 between t4 and t5 is more clearly depicted in FIG. 26B.

As depicted, after t5, the operating coil current 250 is reduced to a current level sufficient to hold the switching device 218 closed. As such, the operating coil current 250 after t5 is generally referred to herein as the “hold-in current.” In some embodiments, the operating coil current 250 may be reduced to the hold-in current to reduce the power consumption of the switching device 218 and/or ohmic heating of the operating coil 220.

Based on the above description, the make time of the switching device 218 is generally not instantaneous. As used herein, the “make time” is generally intended to describe the time between when pull-in current is applied and when the switching device 218 makes. For example, there is a slight delay between when pull-in current is applied at t3 and when the switching device 218 actually makes at tM. Accordingly, the operating coil driver circuitry 222 may take into account the non-instantaneous nature of the switching device 218 to improve control of the switching device 218, for example, to facilitate making the switching device 218 at a specific point on the electric power waveform. To help illustrate, FIG. 27 depicts a source voltage waveform 252 of one phase of electric power supplied to the switching device 218 from the power source 12.

As described above, to reduce magnitude of inrush current and/or current oscillation, the switching device 218 may be closed based upon a predicted current zero-crossing (e.g., a point on source waveform 252 within a range from slightly before to slightly after the predicted current zero-crossing).

As described above, the predicted current zero-crossing may occur at a line-to-line voltage maximum (e.g., 90° after a line-to-line voltage zero crossing or 60° after a line-to-neutral voltage zero crossing). For example, in the depicted embodiment, the switching device 218 is desired to make at point 254 (e.g., a line-to-line voltage maximum). As described above, the switching device 218 may be closed by setting the operating coil current 250 to the pull-in current to attract the armature 118. Accordingly, since the switching device 218 generally does not make instantaneously, the operating coil current 250 may be set to the pull-in current at an earlier time to make the switching device 218 at a tM that corresponds with the point 254.

More specifically, the operating coil current 250 may be controlled based at least in part on the expected make time of the switching device 218. Based on the above described example, the operating coil current 250 is set to the pull-in current at t3 to make the switching device 218 at tM. In other words, the expected make time 256 of the switching device is the difference between t3 and tM. The operating coil current 250 may then be controlled based at least in part on the expected make time 256 of the switching device 218 (e.g., difference between t3 and tM).

One embodiment of a process 258 that may be used to make the switching device 218 at a specific point on an electric power waveform is shown in FIG. 28. The process 258 may be implemented via computer-readable instructions stored in the tangible non-transitory memory 226, 20, 46, and/or other memories and executed via processor 224, 19, 45, and/or other control circuitry. Generally, the process 258 includes determining a desired time to make the switching device 218 (process block 260), determining an expected make time of the switching device 218 (process block 262), and applying the current profile to make the switching device 218 at the desired time (process block 264). Additionally, the process 258 optionally includes determining when the switching device 218 makes (process block 266).

In some embodiments, the processor 224 may determine the desired time to make the switching device 218 (process block 260). As described above, the switching device 218 may be closed a specific point on the electric power waveform to minimize in-rush current, current transients, current oscillations and/or torque oscillations. Accordingly, in some embodiments, the processor 224 may determine that the specific point corresponds to a predicted current zero-crossing and/or a line-to-line voltage maximum. The processor 224 may then determine the time associated with the specific point.

As can be appreciated, each step in process 258 is generally not instantaneous. Accordingly, the desired time to make the switching device 218 may be selected to provide sufficient time to complete process 258. In other words, the desired time to make may not always correspond with the first subsequent predicted current zero-crossing. Additionally, in some embodiments, a user may instruct the operating coil driver circuitry 222 to close the switching device 218 as soon as possible independent of the electric power waveform and the processor 224 may determine the desired time to make accordingly.

The processor 224 may then determine the expected make time 256 of the switching device 218 (process block 262). The make time of the switching device 218 may be affected

by various operational parameters, such as temperature. As will be described in more detail below, the temperature (e.g., actual temperature or relative temperature) may be determined via impedance of the operating coil 220 or other methods, such as a temperature sensor. Accordingly, the processor 224 may determine the various operational parameters, for example via sensors 22 or the measurement current, to determine the expected make time 256 of the switching device 218.

More specifically, in some embodiments, the processor 224 may input the operational parameters into a make time look-up-table (LUT) that relates the determined operational parameters to an expected make time 256. For example, when a specific temperature is input to the make time LUT, the LUT may output an expected make time 256. Although the described embodiments describe the used of look-up tables (LUTs), in other embodiments, the same results may be achieved by calculations performed by the processor 224 using various algorithms or a combination of algorithms and LUTs. Additionally, since the make time LUT, may be determined during normal operations, the processor 224 may adjust for any other known operational parameters that may affect the expected make time 256, such as a filtering delay, device wear, and/or other environmental conditions.

In some embodiments, the make time LUT may be based on empirical tests, such as past make times. For example, in some embodiments, a manufacturer may conduct tests on the particular switching device 218 or a comparable switching device 218 to determine the make time of the switching device 218 under the various operational parameters and populate the make time LUT accordingly. Additionally, when the switching device 218 is put into commission, the switching device 218 may run a testing sequence to determine when the switching device 218 makes under the various sets of operational parameters to calibrate the make time LUT.

Since the techniques described herein are based on previous operations, it is emphasized that the single-pole, single current-carrying path switching device 218 described above is designed to have highly repeatable and, thus, highly predictable operation. As such, the make time LUT enables the processor 224 to determine, with a reasonable certainty, the make time of the switching device 218 based on the make time of the switching device 218 previously under similar parameters. Nevertheless, it should be appreciated that the techniques may also be used for other types of switching devices, such as a multi-pole switching device.

Based on the expected make time, the current profile may be applied to the switching device 218 to make the switching device 218 at the determined time (process block 264). For example, the current profile may set the operating coil current 250 to the pull-in current. More specifically, the processor 224 may determine when to apply the current profile to the switching device 218 to make at the desired time. In some embodiments, the processor 224 may determine a specific time to apply the current profile by subtracting the expected make time 256 from the desired time to make. For example, subtracting the expected make time 256 from  $tM$  (e.g., desired time to make) results in  $t3$  (e.g., the specific time to apply the current profile). Accordingly, as described above, the current profile is applied to the switching device 218 at  $t3$ .

Additionally, as described above, the operating coil current 250 may be ramped up to an intermediate level before the pull-in current. Accordingly, in such embodiments, the processor 224 may determine when to ramp up to the intermediate level. For example, the processor 224 may

determine a specific time to ramp up to the intermediate level by subtracting a ramp up period (e.g., time between  $t2$  and  $t3$ ) from  $t3$ .

After the current profile is applied, the processor 224 may optionally determine when the switching device 218 makes (process block 266). More specifically, determining when the switching device 218 makes may enable determining the actual make time of the switching device 218.

As described above, the make time LUT may be based at least in part on past make operations. However, the make time of the switching device 218 may gradually change over time. For example, as the switching device 218 ages, the force provided by the spring 110 that resists closing the switching device 218 may gradually decrease, which may gradually reduce the make time of the switching device 218. Additionally, as contact material wears away, the distance the switching device 218 moves to close may increase and/or debris may building up causing friction, which may gradually increase the make time of the switching device 218.

Accordingly, determining the actual make time may facilitate calibrating and/or updating the make time LUT to better account for operational changes in the switching device. In fact, as will be described in more detail below, keeping track of the actual make times may facilitate performing diagnostics on the switching device 218. For example, if the make time of the switching device 218 is different than expected, the processor 224 may identify that the switching device 218 may be obstructed in some way or suffering from some other anomalous condition.

In some embodiments, the processor 224 may utilize the PWM signal to determine when the switching device 218 makes. More specifically, as described above, the PWM signal output by the SR flip-flop 228 is fed back to the processor 224. Based on the duty cycle of the PWM signal, the processor 224 may determine duration of the drop in the operating coil current (e.g., duration between  $t4$  and  $t5$ ), which may be directly related to when the switching device 218 makes.

To help illustrate, FIG. 29 depicts the trigger signal 244 output by the processor 224 and the PWM signal 268 input to the processor 224. As described above, the trigger signal 244 is input to the SR flip-flop 228 to facilitate generating the PWM signal 268 by periodically attempting to set the SR flip-flop 228 (e.g., make the PWM signal 268 high). More specifically, when comparator 230 determines that the operating coil current 250 is lower than the target and the trigger signal 244 is high, the SR flop-lop 228 outputs a high PWM signal 268 instructing the switch to turn on, thereby supply electric power from the power supply 246 to the operating coil 220. On the other hand, when the comparator 230 determines that the operating coil 250 is not lower than the target, the SR flop-lop 228 outputs a low PWM signal 268 instructing the switch to turn off, thereby disconnecting electric power from the operating coil 220. In other words, the PWM signal 268 may turn on the switch 232 and the switch 232 may remain on until the comparator 230 determines that the operating coil current 250 is greater than the reference voltage (i.e.,  $V_{ref}$ ). At that point, the comparator 230 may reset the SR flip-flop 228, thereby turning off the switch 232.

As described above, between  $t3$  and  $t4$ , the operating coil current 250 is set at the pull-in current. Accordingly, in the depicted embodiment, supplying electric power to the operating coil 220 based on the PWM signal 268 depicted between  $t3$  and  $t4$  may maintain the operating coil current 250 at the pull-in current. Additionally, as described above,

after the armature **118** begins to move, the impedance of the operating coil **220** begins to increase. Accordingly, as depicted, the duty cycle of the PWM signal **268** gradually increases between **t3** and **t4** to compensate for the impedance increase and maintain the operating coil current **250** at the pull-in current.

In other words, the SR flip-flop **228** may continue to increase the duty cycle of the PWM signal **268** in an attempt to maintain the operating coil current **250** at the pull-in current. Accordingly, the sharp drop in operating coil current **250** between **t4** and **t5**, described above, indicates that even the maximum electric power output by the power supply **246** is insufficient to maintain the operating coil current **250** at the pull-in current. Thus, as depicted, the duty cycle of the PWM signal **268** is increased to 100% between **t4** and **t5**. As such, the processor **224** may determine the duration between **t4** and **t5** by determining duration the PWM signal **268** is at 100% duty cycle.

Accordingly, as will be described in more detail below, the power supply **246**, the magnitude of the pull-in current, and/or the coil design may be determined to produce the sharp operating coil drop between **t4** and **t5**. It should be noted that 100% duty cycle is merely intended to be illustrative. In other embodiments, the processor **224** may determine the make time and/or when the switching device makes by determining duration duty cycle of the PWM signal **268** is at another predetermined level.

As described above, the duration between **t4** and **t5** (e.g., when the PWM signal **268** is at 100% duty cycle) may be utilized to determine when the switching device **218** makes. One embodiment of a process **270** to determine when the switching device **218** makes is shown in FIG. **30**. The process **270** may be implemented via computer-readable instructions stored in the tangible non-transitory memory **226**, **20**, **46** and/or other memories and executed via processor **224**, **19**, **45** and/or other control circuitry. Generally, the process **270** includes determining when the PWM signal reaches 100% duty cycle (process block **272**), determining when the PWM signal duty cycle falls below 100% (process block **274**), determining the duration the PWM signal is at 100% duty cycle (process block **276**), determining when the switching device makes (process block **278**), and updating the LUT with the determined make time (process block **280**).

In some embodiments, the processor **224** may determine when the duty cycle of the PWM signal **268** reaches 100% (process block **272**). As described above, the duty cycle reaching 100% may indicate that the maximum amount of electric power is being supplied to the operating coil **220**, which corresponds with when the operating coil current **250** begins to drop (e.g., at **t4**). Additionally, the processor **224** may determine when the duty cycle of the PWM signal **268** falls below 100% (process block **274**). As described above, the duty cycle falling below 100% may indicate that the armature **119** is no longer moving and the switching device **218** is closed, which correspond with when the operating coil current **250** returns to the pull-in current (e.g., at **t5**). Accordingly, based on when the duty cycle reaches 100% and when the duty cycle falls below 100%, the processor **224** may determine the duration the duty cycle of the PWM signal **268** remains at 100%, which may indicate duration of the drop in the operating coil current **250** (e.g., duration between **t4** and **t5**) (process block **276**).

Based on the duration the duty cycle is at 100%, the processor **224** may determine when the switching device **218** makes (process block **278**). More specifically, a relationship between **tM** and the duration between **t4** and **t5** may

be defined based on empirical testing (e.g., historical data). In some embodiments, the historical data may define that **tM** occurs at a certain percentage between **t4** and **t5**. For example, the historical data may define that **tM** occurs at a time 30% between **t4** and **t5**. In fact, in some embodiments, the switching device **218** may be periodically recalibrated to determine the relationship between **tM** and the duration between **t4** and **t5**, for example, using a high speed camera and/or current sensors.

Similar to the make time LUT, a manufacturer of the switching device **218** may conduct tests on the particular switching device **218** or a comparable switching device **218** to determine when **tM** occurs in relation to the duration of **t4** to **t5**. Additionally, it is again emphasized that the single-pole, single current-carrying path switching device **218** described above is designed to have a highly repeatable and, thus, highly predictable, operation. In other words, the defined relationship between **tM** and the duration of **t4** to **t5** enables the processor **224** to determine, with a reasonable certainty, when the switching device **218** makes.

Additionally or alternatively, when the switching device **218** makes may be verified by measuring when current begins to flow through the switching device **218**. For example, a sensor **22** may be placed between the switching device **218** and the load to feed back a signal indicating that a current is flowing. Thus, the processor **224** or other control circuitry may verify when the switching device **218** makes. Other techniques, such as high speed cameras, auxiliary contacts, optical or magnetic position sensors, and/or flux detectors, may also be used to verify when the switching device **218** makes.

Furthermore, in some embodiments, the instant the switching device **218** closes may be determined based at least in part on other characteristics the operating coil current **250**, such as an inflection in the current waveform. More specifically, when the switching device **218** closes, the biasing spring **152** may be added to the load seen by the armature **118** (e.g., magnetic system), thereby causing the armature **118** to slow down and causing an inflection in the operating coil current **250**. In some embodiments, the verification may be performed at a later time and used to calibrate the make time LUT.

The processor **224** may then update the make time LUT with the determined make time (process block **280**). More specifically, the processor **224** may determine the make time based on the time difference between when the pull-in current is applied (e.g., at **t3**) and when the switching device makes (e.g., at **tM**). As described above, updating the make time LUT with the determined make time may enable the operating coil driver circuitry **222** to compensate for operational changes in the switching device **218** as well as perform diagnostics on the switching device **218**.

In addition to controlling the make operation of the switching device **218**, the operating coil driver circuitry **222** may be used to control the break (i.e., open) operation of the switching device **218**. For example, to break the switching device **218**, the operating coil driver circuitry **222** may reduce electric power to the operating coil **220**, which reduces the magnetic force generated by the operating coil **220** to hold the switching device **218** closed. Accordingly, the spring **110** may overcome the magnetic force generated by the operating coil **220** and open the switching device **218**. To help illustrate, the operating coil current **250** and the target operating coil current **282** to break the switching device **218** are shown in FIG. **31**.

As depicted in FIG. **31**, before **t6**, the operating coil current **250** is generally set at the target operating coil

current **282**. More specifically, as described above, the operating coil driver circuitry **222** may adjust the operating coil current **250** by connecting and disconnecting electric power supplied from the power supply **246** from the operating coil **220**. In some embodiments, the operating coil current **250** may be set at the hold-in current.

At  $t_6$ , the target operating coil current **282** is reduced to a level insufficient to hold the switching device **218** closed. As will be described in more detail below, the target operating coil current **282** after  $t_6$  may be utilized to determine when the switching device **218** breaks. Accordingly, the target operating coil current after  $t_6$  is generally referred to herein as the “break current.” Initially when the target operating coil current is reduced to the break current at  $t_6$ , the operating coil current **250** is higher than the target and electric power is disconnected from the operating coil **220**. More specifically, as depicted, the operating coil current **250** gradually decreases as the operating coil **220** dissipates energy stored in its magnetic field via the flyback diode **234**. In other embodiments, the flyback diode **234** may be connected between resistor **238** and ground. Additionally, in other embodiments, the flyback diode **234** may be replaced with an active device, such as a field effect transistor (FET).

As the operating coil current **250** continues to decrease, the magnetic force produced by the operating coil **220** will no longer be sufficient to hold the switching device **218** closed, thereby causing the switching device **218** to begin to move (e.g., open). Additionally, the collapse of the magnetic field collapses may generate (e.g., induce) a current in the operating coil **220** due to back electromotive force (EMF). More specifically, the back EMF may be caused by the line of flux being dragged along the armature **118** and the coil windings **112** as the switching device **218** opens. Accordingly, when the switching device **218** breaks may be determined by detecting when the current is generated in the operating coil **220**.

As described above, the operating coil current **250** may gradually decrease as the operating coil **220** dissipates the energy stored in its magnetic field. In other words, if electric power is not reconnected to the operating coil **220**, the generated current may be determined by identifying the minimum in the operating coil current **250**. As depicted, the operating coil current **250** is maintained at the target operating coil current **282** between  $t_7$  and  $t_8$ . Accordingly, the minimum operating coil current **250** is at some time between  $t_7$  and  $t_8$ . In other words, the switching device **218** breaks at some time between  $t_7$  and  $t_8$ , for example at  $t_B$ . Thus, similar to determining when the switching device **218** makes the duration between  $t_7$  and  $t_8$  may be used with historical data and/or design attributes of the switching device **218** to determine when the switching device **218** breaks (e.g., at  $t_B$ ).

As depicted, at  $t_8$ , the generated current in the operating coil **220** causes the operating coil current **250** to increase above the target operating coil current **282** (e.g., break current). In other words, even though the power supply **246** is disconnected from the operating coil **220**, the operating coil current **250** rises above the target operating coil current **282**. Accordingly, to facilitate determining the duration between  $t_7$  and  $t_8$ , the break current is set slightly below the current induced in the operating coil **220** by the movement of the armature **118**. Additionally, as depicted, after  $t_9$ , the operating coil current **250** is maintained at the break current.

Similar to the make time, based on the above description, the break time of the switching device **218** is generally not instantaneous. In other words, there is a slight delay between when the target operating coil current **282** is reduced to the

break current (e.g., at  $t_6$ ) and when the switching device **218** actually breaks (e.g., at  $t_B$ ). As used herein, the “break time” is generally intended to describe that time period. Accordingly, the operating coil driver circuitry **222** may take into account the non-instantaneous nature of the switching device **218** to improve control of the switching device **218**, for example, to break the switching device **218** at a specific point on the electric power waveform. To help illustrate, FIG. **32** depicts a switching device current waveform **284** of electric power conducted by the switching device **218**.

As described above, to reduce electrical arcing, the switching device **218** may be opened based upon a current zero-crossing (e.g., a point on the switching device current waveform **284** within a range from slightly before to the current zero-crossing). For example, in the depicted embodiment, the switching device **218** is desired to break at a current zero-crossing at point **286**. As described above, the switching device **218** may be opened by setting the operating coil current **250** to the break current to enable the spring **110** to overpower the magnetic force generated by the operating coil **220**. Accordingly, since the switching device **218** generally does not break instantaneously, the operating coil current **250** may be set to the break current at an earlier time to break the switching device **218** at  $t_B$ , which corresponds with the point **286**.

More specifically, the operating coil current **250** may be controlled based at least in part on the expected break time of the switching device **218**. Based on the above described example, the target operating coil current **282** is set to the break current at  $t_6$  to break the switching device **218** at  $t_B$ . In other words, the expected break time **288** of the switching device is the difference between  $t_6$  and  $t_B$ .

One embodiment of a process **290** that may be used to break the switching device **218** at a specific point on an electric power waveform is shown in FIG. **33**. The process **290** may be implemented via computer-readable instructions stored in the tangible non-transitory memory **226**, **20**, **46** and/or other memories and executed via processor **224**, **19**, **45** and/or other control circuitry. Generally, the process **290** includes determining a desired time to break the switching device **218** (process block **292**), determining an expected break time of the switching device **218** (process block **294**), and applying the current profile to break the switching device **218** at the desired time (process block **296**). Additionally, the process **290** optionally includes determining when the switching device **218** breaks (process block **298**).

In some embodiments, the processor **224** may determine the desired time to break the switching device (process block **292**). As described above, the switching device **218** may be opened based on a current-zero crossing of the conducted electric power. Additionally, the processor **224** may determine the time associated with the specific point. Accordingly, in some embodiments, the processor **224** may determine the desired time to break the switching device **218** based on a subsequent current zero-crossing.

As can be appreciated, each step in process **290** may generally be non-instantaneous. Accordingly, in some embodiments, the desired time to break the switching device **218** may be selected to provide sufficient time to complete process **290**. In other words, the desired time may not always correspond with the first subsequent zero-crossing. In other embodiments, it may be desired to break the switching device **218** as soon as possible independent of the electric power waveform and the processor **224** may determine the desired time to break accordingly.

The processor **224** may then determine the expected break time **288** of the switching device **218** (process block **294**).

Similar to the make time, the break time of the switching device **218** may be affected by various operational parameters, such as temperature, wear, fatigue, and/or debris. As will be described in more detail below, the temperature (e.g., actual temperature or relative temperature) may be determined via impedance of the operating coil **220** or other methods, such as a temperature sensor. Accordingly, the processor **224** may determine the various operational parameters, for example via sensors **22** or the hold-in current, to determine the expected make time **256** of the switching device **218**.

More specifically, the processor **224** may input the operational parameters into a break time look-up-table (LUT) that relates the determined operational parameters to an expected break time **288**. For example, when a specific temperature is input to the break time LUT, the LUT may output an expected break time **288**. Additionally, the processor **224** may adjust for any other known offsets that may affect the expected break time **288**, such as a filtering delay. Although the described embodiments describe the use of look-up tables (LUTs), in other embodiments, the same results may be achieved by calculations performed by the processor **224** using various algorithms or a combination of algorithms and LUTs. Additionally, since the break time LUT, may be determined during normal operations, the processor **224** may adjust for any other known operational parameters that may affect the expected make time **256**, such as a filtering delay, device wear, and/or other environmental conditions.

Similar to the make time LUT, the break time LUT used to determine expected break time may be based on empirical tests, such as past break times. For example, in some embodiments, a manufacturer may conduct tests on the particular switching device **218** or a comparable switching device **218** to determine the break time of the switching device **218** under the various operational parameters and populate the break time LUT accordingly. Additionally, when the switching device **218** is put into commission, the switching device **218** may run a testing sequence to determine when the switching device **218** breaks under the present parameters and calibrate the break time LUT.

Since the techniques described herein are based on previous operations, it is again emphasized that the single-pole, single current-carrying path switching device **218** described above is designed having a highly repeatable and thus highly predictable operation. In other words, the break time LUT enables the processor **224** to determine, with a reasonable certainty, the break time of the switching device **218** based on the break time of the switching device **218** previously under similar parameters. Nevertheless, it should be appreciated that the techniques may also be used for other types of switching devices, such as a multi-pole switching device.

Based on the expected break time, the current profile may be applied to the switching device **218** to break the switching device **218** at a determined time (process block **296**). More specifically, the processor **224** may determine when to apply the current profile to the switching device **218** to break at the desired time. In some embodiments, the processor **224** may determine a specific time to apply the current profile by subtracting the expected break time **288** from the desired time to make. For example, subtracting the expected break time **288** from  $t_B$  (e.g., desired time to make) results in  $t_6$  (e.g., the specific time to apply the current profile). Accordingly, as described above, the target operating coil current **282** is set at the hold-in current (e.g., current profile) at  $t_6$ . It should be noted that it may be desirable to break the

switching device **218** slightly before the current zero-crossing to minimize the chances of breaking after the zero-crossing.

After the current profile is applied, the processor **224** may optionally determine when the switching device **218** breaks (process block **298**). More specifically, determining when the switching device **218** makes may enable determining the actual make time of the switching device **218**.

As described above, the break time LUT may be based at least in part on past break operations. However, the break time of the switching device **218** may gradually change over time. For example, as the switching device **218** ages, the force provided by the spring **110** that opens the switching device **218** may gradually decrease, which may gradually increase the break time of the switching device **218**. Additionally, as contact material wears away, the distance the switching device **218** moves to open may increase and/or debris may build up causing friction, which may gradually increase the break time of the switching device **218**.

Accordingly, determining the actual break time may facilitate calibrating and/or updating the break time LUT to better account for operational changes in the switching device. In fact, as will be described in more detail below, keeping track of the actual break times may facilitate performing diagnostics on the switching device **218**. For example, if the break time of the switching device **218** is different than expected, the processor **224** may identify that the switching device **218** may be obstructed in some way or suffering from some other anomalous condition.

In some embodiments, the processor **224** may utilize the PWM signal to determine when the switching device **218** makes. More specifically, as described above, the PWM signal output by the SR flip-flop **228** is fed back to the processor **224**. Based on the duty cycle of the PWM signal, the processor **224** may determine in duration the operating coil current is below the break current (e.g., duration between  $t_4$  and  $t_5$ ), which may be directly related to when the switching device **218** breaks.

To help illustrate, FIGS. **34A** and **34B** depicts the trigger signal **244** output by the processor **224** and the PWM signal input **268** to the processor **224**. More specifically, FIG. **34A** depicts the PWM signal **268** output by a standard SR flip-flop and FIG. **34B** depicts the PWM signal **268** output by an SR flip-flop that is set each time the S terminal goes high.

As described above, the trigger signal **244** is input to the SR flip-flop **228** to facilitate generating the PWM signal **268** by periodically attempting to set the SR flip-flop **228** (e.g., make the PWM signal **268** high). More specifically, when comparator **230** determines that the operating coil current **250** is lower than the target and the trigger signal **244** is high, the SR flip-flop **228** outputs a high PWM signal **268** instructing the switch to turn on, thereby supply electric power from the power supply **246** to the operating coil **220**. On the other hand, when the comparator **230** determines that the operating coil current **250** is not lower than the target, the SR flip-flop **228** outputs a low PWM signal **268** instructing the switch to turn off, thereby disconnecting electric power from the operating coil **220**. In other words, the trigger signal **244** may turn on the switch **232** and the switch **232** may remain on until the comparator **230** determines that the operating coil current **250** is greater than the reference voltage (i.e.,  $V_{ref}$ ). At that point, the comparator **230** may reset the SR flip-flop **228**, thereby turning off the switch **232**.

As described above, between  $t_6$  and  $t_7$ , the operating coil current **250** is higher than the target operating coil current **282**. Thus, the comparator **230** will input a high signal to the

R terminal of the SR flip-flop 228. In other words, in a standard SR flip-flop, the PWM signal 268 will be low regardless of the input at the S terminal. Accordingly, as depicted, duty cycle of the PWM signal 268 between t6 and t7 is 0%. In other words, the power supply 246 is disconnected from the operating coil 220 as the energy stored in the operating coil 220 is gradually dissipated.

Additionally, as described above, the SR flip-flop 228 may increase the duty cycle of the PWM signal 268 to maintain the operating coil current 250 at the target operating coil current 282. Thus, when the operating coil current 250 begins to drop below the target operating coil current 282 between t7 and t8, electric power is supplied to the operating coil 220 to maintain the operating coil current 250 at the target operating coil current 282. Accordingly, in the depicted embodiment, the PWM signal 268 has a non-zero duty cycle to maintain the operating coil current 250 at the break current. As such, the process 224 may determine the duration between t7 and t8 by determining the duration the PWM is at a non-zero duty cycle.

Furthermore, as described above, when the armature 118 begins to move, a current is generated in the operating coil 220, which causes the operating coil current 250 to rise above the target operating coil current 282 between t8 and t9. Since the operating coil current 250 is higher than the target operating coil current 282, electric power is disconnected from the operating coil 220. Accordingly, as depicted, the duty cycle of the PWM signal 268 between t8 and t9 is 0%.

Additionally, as described above, after t9, the generated current decreases below the target operating coil current 282 and the operating coil current 250 is maintained at the target operating coil current 282 by connecting and disconnecting electric power. Accordingly, in the depicted embodiment, the PWM signal 268 has a non-zero duty cycle after t9 to maintain the operating coil current 250 at the break current. Thus, it may be determined that the armature 118 is no longer moving when the duty cycle again goes non-zero (e.g., at t9).

The embodiment of the PWM signal 268 shown in FIG. 34B is similar to the one shown in FIG. 34A with the distinction that the SR flip-flop 228 used to generate the PWM signal 268 shown in FIG. 34B goes high whenever the input to the S terminal goes high. In other words, as depicted, between t6 and t7, since the operating coil current 250 is higher than the target operating coil current 282, the duty cycle of the PWM signal 268 is at its minimum. In some embodiments, the minimum duty cycle may be equal to the duty cycle of the trigger signal 244. Accordingly, the duration between t7 and t8 may be determined by the duration the duty cycle of the PWM signal 268 is above its minimum.

In fact, since minimum duty cycle is non-zero, the PWM signal 268 may instruct the switch 232 to turn on for at least the duty cycle of the trigger 244. As such, a minimum amount of electric power may be supplied to the operating coil 220. In some embodiments, supplying a positive minimum amount of electric power to the operating coil 220 may facilitate stabilizing oscillations in the operating coil current 250, thereby providing a more accurate determination of the duration the operating coil current 250 is below the break current.

Similarly, as depicted, between t8 and t9, since the operating coil current 250 is higher than the operating current target 282 due to the current generated by the movement of armature 118, the duty cycle of the signal 268 is again at its minimum. More specifically, the duty cycle of

the PWM signal 268 may again be equal to the duty cycle of the trigger signal 244. Accordingly, it may be determined that the armature 118 is no longer moving when the duty cycle of the PWM signal 268 increases above its minimum (e.g. after t9).

Although either embodiment of the SR flip-flop 228 may be utilized. To simplify the following discussion, the embodiment shown in FIG. 34A will be utilized. It should be noted that one of ordinary skill in art will be able to easily convert between looking for a minimum duty cycle, a 0% duty cycle, and another predetermined duty cycle.

As described above, the duration between t7 and t8 (e.g., when the PWM signal 268 is non-zero) may be utilized to determine when the switching device breaks. One embodiment of a process 300 is shown in FIG. 35. The process 300 may be implemented via computer-readable instructions stored in the tangible non-transitory memory 226, 20, 46 and executed via processor 224, 19, 45 and/or other control circuitry. Generally, the process 300 includes determining when the PWM signal reaches 0% duty cycle (process block 302), determine when the PWM signal duty cycle is non-zero (process block 304), determining when the PWM signal again reaches 0% duty cycle (process block 306), determining duration the PWM signal duty cycle is non-zero (process block 308), determining when the switching device breaks (process block 310), and updating the LUT with the determined break time (process block 312).

In some embodiments, the processor 224 may determine when the duty cycle of the PWM signal 268 reaches 0% (process block 302). As described above, the duty cycle falling to 0% (e.g., minimum level) may indicate that the operating coil 220 is dissipating energy stored in its magnetic field, but still above the break current. In other words, the armature 118 has not begun to move because the minimum of the operating coil current 250 has not yet been reached.

Additionally, the processor 224 may determine when the duty cycle of the PWM signal 268 is non-zero (process block 304). As described above, the duty cycle increasing to non-zero (e.g., above minimum level) may indicate that electric power is being supplied to the operating coil 220, which corresponds with when the operating coil current 250 begins to fall below the target operating coil current 282 (e.g., at t7). Furthermore, the processor 224 may determine when the duty cycle of the PWM signal 268 again goes to 0% (process block 306). As described above, the duty cycle again falling to 0% (e.g., minimum level) may indicate that the operating coil current 250 is higher than the target operating coil current 282 due to the induced current in the operating coil 220 (e.g., at t8). In other words, at this point, the armature 118 is in motion and, thus, the switching device 218 has opened at some time between t7 and t8. Accordingly, based on when the duty cycle is non-zero and when the duty cycle again goes to 0%, the processor 224 may determine the duration the duty cycle of the PWM signal 268 is non-zero, which may indicate the operating coil current 250 is below the break current (e.g., duration between t7 and t8) (process block 308).

Based on the duration the PWM signal is non-zero, the processor 224 may determine when the switching device 218 breaks (process block 310). More specifically, a relationship between tB and the duration between t7 and t8 may be defined based on empirical testing (e.g., historical data). In some embodiments, the historical data may define that tB occurs at a certain percentage between t7 and t8. For example, the historical data may define that tB occurs at 45% between t7 and t8. In fact, in some embodiments, the

switching device **218** may be periodically recalibrated to determine the relationship between  $t_B$  and the duration between  $t_7$  and  $t_8$ , for example, using a high speed camera and/or current sensors.

Similar to the break time LUT, a manufacturer of the switching device **218** may conduct tests on the particular switching device **218** or a comparable switching device **218** to determine when  $t_B$  occurs in relation to the duration between  $t_7$  to  $t_8$ . Additionally, it is again emphasized that the single-pole, single current-carrying path switching device **218** described above is designed having a highly repeatable and thus highly predictable operation. In other words, the defined relationship between  $t_B$  and the duration of  $t_7$  to  $t_8$  enables the processor **224** to determine, with a reasonable certainty, when the switching device **218** breaks.

Additionally or alternatively, when the switching device **218** breaks may be verified by measuring when current ceases to flow through the switching device **218**. For example, a sensor **22** may be placed between the switching device **218** and load to feed back a signal indicating that a current has stopped flowing. Thus, the processor **224** or other control circuitry may verify when the switching device **218** breaks. Other techniques, such as a high speed camera, may also be used to verify when the switching device **218** breaks. In some embodiments, the verification may be performed at a later time and used to calibrate the break time LUT.

The processor **224** may then update the break time LUT with the determined break time (process block **312**). More specifically, the processor **224** may determine the break time based on the time difference between when the target operating coil current **282** is set at the break current (e.g., at  $t_6$ ) and when the switching device breaks (e.g., at  $t_B$ ). As described above, updating the break time LUT with the determined break time may enable the operating coil driver circuitry **222** to compensate for operational changes in the switching device **218** as well as perform diagnostics on the switching device **218**.

In addition to utilizing the PWM signal **268**, in some embodiments, the processor **224** may determine when the switching device makes or breaks based directly on the output of the comparator **230**. More specifically, in such embodiments, the output of comparator **230** may be input to the processor **224**, as depicted in FIG. **36**.

As such, the processor **224** may determine whether the operating coil current **250** is higher or lower than a target level based on the output of the comparator **230**. As described above, the processor **224** may output a reference voltage (e.g.,  $V_{ref}$ ) that corresponds with the target operating coil current **282**. Accordingly, the processor **224** may determine when the operating coil current **250** is below the target operating coil current **282** when the output of the comparator **230** is low. On the other hand, the processor **224** may determine when the operating coil current **250** is above the target operating coil current **282** when the output of the comparator **230** is high. In fact, the processor **224** may adjust the trigger signal **224** to better handle oscillations in the operating coil current **250**, for example, by adjusting the duty cycle to adjust minimum amount of electric power be supplied to the operating coil **220**.

In fact, such an embodiment of the operating coil driver circuitry **222** may enable electric power to be completely disconnected during a break operation. More specifically, since the processor **224** may determine when the operating coil current **250** falls below the break current (e.g., duration between  $t_7$  and  $t_8$ ) directly from the comparator **230**, the operating coil driver circuitry **222** may allow the operating

coil current **250** to dissipate naturally. In other words, the duty cycle of the PWM signal **268** may be set to 0% to disconnect electric power from the operating coil **220**. For example, the processor **224** may cease the trigger signal **244** input to the S terminal of the SR flip-flop **228**, which causes the PWM signal **268** to remain low and disconnects the power supply **246**. In some embodiments, disconnecting the power supply **246** may reduce the power consumption of the operating coil driver circuitry **222**. Similarly, the operating driver circuitry **222** may also enable the processor **224** to determine when the operating coil current **250** falls below the pull-in current (e.g., duration between  $t_4$  and  $t_5$ ) directly from the comparator **230**.

As described above, to facilitate determining when the switching device **218** makes, the operating coil current **250** drops because the power supply **246** is no longer sufficient to maintain the operating coil current **250** at the pull-in current due to the impedance increase in the operating coil **220**. More specifically, as the operating coil **220** draws electric power from the DC bus **248**, the voltage on the DC bus **248** (e.g., bus voltage) may begin to droop because electric power is being drawn from the power supply **246** faster than it is being replenished by the power source **12**. To help illustrate, FIG. **37** depicts the bus voltage **314** during a make operation.

As described above, the operating coil current **250** begins to be ramped up to the pull-in current at  $t_2$ . As such, the electric power drawn by the operating coil **220** increases to maintain the operating coil current **250** at the target current (e.g., pull-in current). However, as depicted, the bus voltage **314** begins to sag at  $t_2$ . The bus voltage **314** continues to sag until some time after the switching device **218** makes at  $t_M$ . In other words, the power supply **246** may set the bus voltage **314** such that it is sufficient to maintain the operating coil current **250** at the pull-in current without sagging.

Based on the techniques described herein, when the switching device **218** makes may be determined based on the duration of the operating coil current **250** drop (e.g., duration between  $t_4$  and  $t_5$ ). Thus, it is important to clearly define when the PWM signal **268** is at 100% duty cycle. However, the bus voltage **314** may affect this determination because the bus voltage **314** affects the electric power supplied to the operating coil **220** to make the switching device **218**. Additionally, as the switching device **218** makes, the impedance of the operating coil **220** may increase. In other words, a higher the bus voltage **314** may enable more electric power to be supplied, thereby decreasing the make time and increasing rate of impedance change. On the other hand, a lower bus voltage may enable less electric power to be supplied, thereby increasing the make time and decreasing the rate of impedance change.

Accordingly, the bus voltage **314** may be adjusted so that sufficient electric power may be supplied to operating coil **220** make the switching device **218** while also causing a drop form the 100% duty cycle. Additionally, the bus voltage **314** may be adjusted to control the duration and/or aggressiveness of the drop in operating coil current **250**. For example, when the bus voltage **314** is higher, the drop in operating current may be narrower shallower. On the other hand, when the bus voltage **314** is lower, the drop in the operating current may be later, wider, and deeper.

Thus, duration of the operating coil current drop may be adjusted to enable the duration the PWM signal **268** is at 100% duty cycle to be easily detected. For example, by reducing the bus voltage **314**, the duration of the current drop may be increased. Additionally, the aggressiveness of the drop may be adjusted to ensure that the duration of the

operating coil current drop corresponds with the duration the PWM signal 268 is at 100% duty cycle. More specifically, when the slope of the operating coil current 250 entering or exiting the drop is less aggressive, the possibility of the PWM signal duty cycle dropping below 100% while the operating coil current 250 is still in the drop increases. Such stray pulses may make determining the duration of the current drop more difficult because it is unclear at what instant the operating coil 250 enters or exits the drop. Accordingly, for example, the bus voltage 314 may be increased to increase the aggressiveness of the operating coil current drop.

Additionally, the magnitude of the pull-in current that the operating coil driver circuitry 222 attempts to maintain the operating coil current 250 may also affect the drop in the operating coil current 250. More specifically, when the pull-in current is higher, the electric power supplied is higher, thereby decreasing the make time while increasing the power consumption of the switching device 218. In other words, a higher pull-in current may increase rate of impedance change and, thus, cause a more dramatic drop in the bus voltage 314. On the other hand, when the pull-in current is lower, the electric power supplied may be lower, thereby increasing the make time while decreasing power consumption of the switching device 218. In other words, a lower pull-in current may decrease rate of impedance change and, thus, cause a less dramatic drop in the bus voltage 314.

Accordingly, an optimal balance between the bus voltage 314 and the pull-in current may be determined to improve detection of when the switching device 218 makes. Moreover, the optimal balance may further be adjusted when multiple switching devices 218 make. For example, as described above, a first switching device 218 may connect a first phase of electric power and a second switching device 218 may connect a second phase of electric power to an electrical motor 24 at a first time (e.g., based upon a predicted current zero-crossing). A third switching device 218 may then connect a third phase of electric power at to the electrical motor 24 at a second time. To help illustrate, the first and the second switching device 218 may close at  $t_M$  and the third switching device 218 may close at  $t_M'$ , as depicted in FIG. 33.

As depicted, the bus voltage 314 at  $t_M$  may differ from the bus voltage at  $t_M'$ . As described above, the bus voltage 314 during a make operation may affect the operating coil current 250 drop used to detect when the switching device 218 makes. Such effects may be compounded with regard to the third switching device 218 because the effects of the first and second switching device 218 are integrated through to  $t_M'$ . For example, as depicted, the electric power drawn by the first and second switching devices 218 to make at  $t_M$  sags the bus voltage 314. After  $t_M$ , the third switching device 218 continues to draw electric power and may sag the bus voltage 314 even further. In other words, the third switching device 218 may utilize a lower bus voltage 314 than the first and second switching device 218.

Accordingly, in addition to adjusting the bus voltage, the pull-in current for each switching device 218 may be individually adjusted. In other words, an optimal balance between the bus voltage 314 and the pull-in currents may be determined to improve detection of when each of the switching devices 218 makes. Additionally, when switching devices 218 are closed sequentially, the timing of the make operation may be adjusted. For example, the third switching device 218 may be closed at a later time to enable the bus voltage 314 to recover as the power supply 246 replenishes the DC bus 248. In other words, the bus voltage 314 used to

make the third switching device 218 may be controlled by adjusting when the third switching device 218 makes.

As described above, the temperature of the switching device 218 may affect the make time and/or break time of the switching device 218. To help illustrate, FIG. 38 is a plot that depicts the make time 316 versus temperature 318. As depicted, the make time 316 of the switching device 218 increases as the temperature 318 increases. In some embodiments, the make time may change by approximately 50 microseconds per degree Celsius. The break time of the switching device 218 may similarly also be affected by temperature. Accordingly, the temperature of the switching device 218 may be determined before each make operation and break operation to facilitate determining when to apply a current profile (e.g., make current or break current) that enables the switching device 218 to make or break at a desired time.

Additionally, the plot depicts an impedance index 320 versus temperature 222. More specifically, the impedance index 320 may represent the inverse of a measured impedance of the operating coil. Since the resistance of a conductor generally increases with temperature and the operating coil 220 is simply a long conductive wire, the impedance of the operating coil 220 may also increase with temperature. Accordingly, as depicted the impedance index 320 (e.g., inverse of measured impedance) varies inversely with temperature.

As such, the impedance of the operating coil 220 may be utilized to determine the temperature 318 of the switching device 218. For example, FIG. 39 depicts a process 322 for determining the temperature of the switching device 218 during a make operation. The process 322 may be implemented via computer-readable instructions stored in the tangible non-transitory memory 226, 20, 46 and/or other memories and executed via processor 224, 19, 45 and/or other control circuitry. Generally, process 322 includes applying the measurement current to the operating coil (process block 324), determining voltage across operating coil (process block 326), determining impedance of the operating coil (process block 328), and determining temperature of the switching device (process block 330). Process 322 may be performed before each make operation to facilitate determining the expected make time of the switching device 218 based on temperature, as described above.

In some embodiments, the processor 224 may instruct the operating coil driver circuitry 222 to supply the measurement current to the operating coil 220 (process block 324). More specifically, the processor 224 may output a reference voltage (e.g.,  $V_{ref}$ ) that corresponds with the measurement current. Based at least on the comparison of the node voltage and the reference voltage, the SR flip-flop 228 outputs a PWM signal 268 that instructs the switch 232 to supply the measurement current to the operating coil 220 by selectively connecting and disconnecting electric power from the DC bus 248. Accordingly, the processor 224 may determine the operating coil voltage by multiplying the bus voltage 314 with the duty cycle of the PWM signal 268 (process block 326).

Based on the operating coil voltage, the processor 224 may determine the impedance of the operating coil 220 (process block 328). More specifically, since the operating coil voltage and the operating coil current (e.g., measurement current) are known, the processor 224 may determine the operating coil impedance by dividing the operating coil voltage by the measurement current and, thus, the impedance index 320.

Based on the operating coil impedance, the processor 224 may then determine the switching device temperature 318 (process block 330). As described above, the operating coil impedance directly relates to its temperature 318. Accordingly, the processor 224 may determine the temperature 318 based on that relationship. More specifically, in some embodiments, the relationship between temperature 318 and impedance may be defined by a manufacturer. For example, the manufacture may define a temperature look-up-table (LUT) that takes the impedance index 320 (e.g., inverse of operating coil impedance) input and outputs a temperature 318. Additionally or alternatively, in other embodiments, it may be unnecessary to determine the exact temperature of the switching device 218. Instead, it may be sufficient to use the operating coil impedance 320 or the operating coil voltage with the operating coil current as a proxy for temperature. In other words, the operating coil impedance 320 or the operating coil voltage with the operating coil current may be used as inputs to the make time LUT.

Furthermore, as described above, the break operation may also be affected by the temperature of the switching device 218. Accordingly, FIG. 40 depicts one embodiment of a process 332 for determining the temperature of the switching device 218 during a break operation. The process 332 may be implemented via computer-readable instructions stored in the tangible non-transitory memory 226, 20, 46 and/or other memories and executed via processor 224, 19, 45 and/or other control circuitry. Generally, the process 332 includes applying the hold-in current to the operating coil (process block 334), determining voltage across the operating coil (process block 336), determining impedance of the operating coil (process block 338), and determining temperature of the switching device (process block 340). Process 332 may be performed before each break operation to facilitate determining the expected break time of the switching device 218 based on temperature, as described above.

In some embodiments, the processor 224 may instruct the operating coil driver circuitry 222 to supply the hold-in current to the operating coil 220 (process block 334). More specifically, similar to process block 324, the processor 224 may output a reference voltage (e.g.,  $V_{ref}$ ) that corresponds with the hold-in current. Based at least on the comparison of the node voltage and the reference voltage, the SR flip-flop 228 outputs a PWM signal 268 that instructs the switch 232 to supply the hold-in current to the operating coil 220 by selectively connecting and disconnecting electric power from the DC bus 248. Accordingly, similar to process block 326, the processor 224 may determine the operating coil voltage by multiplying the bus voltage 314 with the duty cycle of the PWM signal 268 (process block 336).

Similar to process block 328, the processor 224 may determine the impedance of the operating coil 220 based on the operating coil voltage (process block 338). More specifically, since the operating coil voltage and the operating coil current (e.g., hold-in current) are known, the processor 224 may determine the operating coil impedance by dividing the operating coil voltage by the hold-in current and, thus, the impedance index 320.

Similar to process block 330, the processor 224 may then determine the switching device temperature 318 based on the operating coil impedance (process block 340). As described above, the operating coil impedance directly relates to its temperature. Accordingly, the processor 224 may determine the temperature 318 based on that relationship, which may be defined a manufacturer. Additionally or alternatively, in some embodiments, it may be sufficient to use the operating coil impedance or the operating coil

voltage with operating coil current as a proxy for temperature. In other words, the impedance index 320 (e.g., inverse of operating coil impedance) or the operating coil voltage with the operating coil current may be used as inputs to the break time LUT.

Accordingly, based on the techniques described above, the processor 224 may use the PWM signal 268 to determine operational parameters of the switching device 218, such as when the switching device 218 makes, when the switching device 218 breaks, and/or the temperature of the switching device 218. Additionally, other diagnostic information may also be determined. For example, FIGS. 41A-C depict embodiments of determining wellness of the switching device 218. More specifically, FIG. 41A depicts one embodiment of a process 342 for determining wellness of the switching device 218 with the measurement current, FIG. 41B depicts one embodiment of a process 344 for determining wellness of the switching device 218 during a make or break operation, and FIG. 41C depicts one embodiment of a process 346 for determining wellness of the switching device 218 with the hold-in current. The processes 342-346 may be implemented via computer-readable instructions stored in the tangible non-transitory memory 226, 20, 46 and/or other memories executed via processor 224, 19, 45 and/or other control circuitry.

As shown in FIG. 41A, process 342 generally includes applying the measurement current to the operating coil (process block 348), monitoring the PWM signal (process block 350), and determining wellness of the switching device (process block 352). More specifically, as described above, the processor 224 may determine the switching device temperature 318 using the measurement current. Accordingly, the processor 224 may detect when excessive temperatures (e.g., out of specification) are present.

Additionally, in some embodiments, the processor 224 may detect whether a short circuit or an open circuit condition exists in the operating coil 220. For example, if the PWM signal duty cycle jumps to 100%, the processor 224 may determine that an open circuit condition is present. On the other hand, if the PWM signal duty cycle is much lower than expected, the processor 224 may determine that a short circuit condition is present. Furthermore, the measurement current may also monitor temperature changes in the switching device 218. For example, if the PWM signal duty cycle begins to increase, the processor 224 may determine that the temperature 318 is increasing. On the other hand, if the PWM signal duty cycle begins to decrease, the processor 224 may determine that the temperature is decreasing.

As shown in FIG. 41B, process 344 generally includes applying the pull-in or break current to the operating coil (process block 354), determining the make or break time of the switching device (process block 356), and determining wellness of the switching device (process block 358). More specifically, as described above, the processor 224 may determine the expected make time and/or break time of the switching device 218. Additionally, the processor 224 may determine the actual make time or break time. Accordingly, the processor 224 may detect when a faulty condition is present in the switching device 218. For example, if the determined make time is much shorter than expected, the processor 224 may determine that the armature 118 is obstructed and not closing from a fully open position. On the other hand, if the determined make time is much longer than expected, the processor 224 may determine that the armature 118 is obstructed from closing smoothly.

Additionally, the processor 224 may look at the trend of make times or break times. More specifically, the trend may

indicate the gradual aging of the switching device **218**. For example, the processor **224** may estimate the age of the switching device (e.g., amount of life left) based on how much the make time or break time of the switching device **218** has changed. Furthermore, as depicted in FIG. **38**, the make time **316** trend is generally linear with regard to temperature **318**. Accordingly, if the relationship begins to deviate from the expected or historical norm, the processor **224** may determine specific changes to the switching device **218**. For example, if the make time varies unpredictably, the processor **224** may determine that environmental conditions, such as vibrations for surround machinery, are affecting the make times.

As shown in FIG. **41C**, process **346** generally includes applying the hold-in current to the operating coil (process block **360**), monitoring the PWM signal (process block **362**), and determining wellness of the switching device (process block **364**). More specifically, as described above, the processor **224** may determine the switching device temperature **318** using the hold-in current. Accordingly, the processor **224** may detect when excessive temperatures (e.g., out of specification) are present. Additionally, since the hold-in current may be applied to the operating coil **220** for an extended period of time, the processor **224** may also monitor temperature changes in the switching device **218**. For example, if the PWM signal duty cycle begins to increase, the processor **224** may determine that the temperature **318** is increasing. On the other hand, if the PWM signal duty cycle begins to decrease, the processor **224** may determine that the temperature is decreasing. Furthermore, in some embodiments, if the PWM duty cycle is excessively varying, the processor **224** may determine that the armature **118** is chattering (e.g., not still).

Since the hold-in current is generally applied to the operating coil **220** for an extended period, the hold-in current may additionally be utilized to monitor wellness of the system **10** that includes the switching device **218**. For example, one embodiment of a process **366** for monitoring the wellness of the system is shown in FIG. **41D**. Generally, the process **366** includes applying the hold-in current to the operating coil (process block **368**), monitoring the PWM signal (process block **370**), and monitoring wellness of the system (process block **372**). In other words, the processor **224** may monitor the PWM signal **268** to monitor the wellness of the system.

More specifically, electric power carried by the switching device **218** generates a magnetic field, which may act on the operating coil **220**. For example, in some embodiments, the magnetic field may induce a positive voltage in the operating coil **220**, which enables the voltage supplied by the power source **246** to be reduced while still maintaining the hold-in current. As such, the PWM duty cycle may decrease. On the other hand, the magnetic field may induce a negative voltage in the operating coil **220**, which causes the power source **246** to supply larger amount of voltage to maintain the hold-in current. As such, the PWM duty cycle may increase.

Additionally, when the switching device **218** is closed, conducted electric power may cause the stationary contactor assembly **124** to exert a force on the movable contactor assembly **116**. In fact, under excessive current, the stationary contact assembly **124** may exert sufficient force on the movable contactor assembly **116** to cause armature **118** movement. As described above, movement may change impedance of the operating coil **220**. Accordingly, to maintain the operating coil current **250** at its target, the duty cycle of the PWM signal may adjust to compensate for the change

in impedance. In this manner, the PWM duty cycle may facilitate detecting excessive current conditions.

The PWM signal may also facilitate determining other characteristics of the source electric power and/or the load. For example, since the electric power carried may be AC, the polarity and magnitude of the current may continuously change. As such, since the magnitude and polarity of the induced voltage depends on the magnitude and polarity of current being conducted, the processor **224** may determine the phase of the current being conducted by the switching device **218** based at least in part on the changes in the PWM duty cycle. Thus, in some embodiments, since current will be largely cyclical, the processor **224** may determine when current zero-crossings will occur.

Based on the phase of the electric power, the processor **224** may also determine the type of load the electric power is being supplied to. Generally, when electric power is supplied to an inductive load, the current and the voltage will be out of phase. On the other hand, when electric power is supplied to a resistive load, the current and voltage will be in phase. As such, the processor **224** may determine whether the electric power is being supplied to an inductive load or a resistive load by comparing the phase of the current to phase of the voltage, for example, determined using sensors **22**.

#### Phase Sequential Switching

As described above, one or more switching devices may be used to connect or disconnect electric power from a load **18**, such as an electric motor **24**. In some embodiments, to improve control over the connection/disconnection of electric power, the switching devices may be single pole switching devices, such as the single pole, single current carrying path switching devices **218**. For example, three single pole switching devices may be used in a direct on-line configuration with each single pole switching device used to connect/disconnect one phase of electric power. In fact, since they are single pole switching devices, the switching devices be independently controlled, thereby enabling various closing and/or opening sequences.

To help illustrate, a three phase direct on-line configuration is described in **42A**. As depicted, a first single pole switching device **335** may control supply of a first phase (e.g., phase A) of electric power from the power source **12** to the load **14**, a second switching device **337** may control supply of a second phase (e.g., phase B) of electric power from the power source **12** to the load **14**, and a third single pole switching device **339** may control supply of a third phase (e.g., phase C) of electric power from the power source **12** to the load **14**. As such, the single pole switching devices **335**, **337**, and **339** may be opened/closed in various sequences.

For example, in some embodiments, the single pole switching devices **335**, **337**, and **339** may be controlled to sequentially open/close. One embodiment of a process **341** for sequentially opening/closing the single pole switching devices is described in **42B**. Generally, the process **341** includes opening/closing a first switching device (process block **343**), opening/closing a second switching device (process block **345**), and opening/closing a third switching device (process block **347**). In some embodiments, process **341** may be implemented via computer-readable instructions stored in a non-transitory article of manufacture (e.g., the memory **226**, **20**, **46** and/or other memories) and executed via processor **224**, **19**, **45** and/or other control circuitry.

Accordingly, at a first time, control circuitry **18** may instruct the first single pole switching device **335** to open or close (process block **343**). In this manner, the first phase of

electric power may be connected or disconnected at the first time. Additionally, at a second time, the control circuitry **18** may instruct the second single pole switching device **337** to open or close (process block **345**). In this manner, the second phase of electric power may be connect or disconnected at the second time. Furthermore, at a third time, the control circuitry **18** may instruct the third single pole switching device **339** to open or close (process block **347**). In this manner, the third phase of electric power may be connected or disconnected at the third time. As such, the single pole switching devices **335**, **337**, and **339** may be controlled to sequentially connect/disconnect each phase of electric power from the power source **12** to the load **14**.

In other embodiments, the single pole switching devices **335**, **337**, and **339** may be controlled to open/close two and then open/close one or open/close one and then open/close two. One embodiment of a process **349** for opening/closing two and then opening/closing one is described in **42C**. Generally, the process **349** includes opening/closing a first switching device and a second switching device (process block **351**) and opening/closing a third switching device (process block **343**). In some embodiments, process **349** may be implemented via computer-readable instructions stored in a non-transitory article of manufacture (e.g., the memory **226**, **20**, **46** and/or other memories) and executed via processor **224**, **19**, **45** and/or other control circuitry.

Accordingly, at a first time, control circuitry **18** may instruct the first single pole switching device **335** and the second single pole switching device **337** to open or close (process block **351**). In this manner, the first phase and the second phase of electric power may be connected or disconnected at the first time. Additionally, at a second time, the control circuitry **18** may instruct the third single pole switching device **339** to open or close (process block **35**). In this manner, the third phase of electric power may be connect or disconnected at the second time. As such, the single pole switching devices **335**, **337**, and **339** may be controlled to connect/disconnect electric power from the power source **12** to the load **14** by opening/closing two and then one.

In further embodiments, the single pole switching devices **335**, **337**, and **339** may be controlled to open/close one and then open/close two. One embodiment of a process **355** for opening/closing one and then opening/closing two is described in **42D**. Generally, the process **355** includes opening/closing a first switching device (process block **357**) and opening/closing a second switching device and a third switching device (process block **359**). In some embodiments, process **355** may be implemented via computer-readable instructions stored in a non-transitory article of manufacture (e.g., the memory **226**, **20**, **46** and/or other memories) and executed via processor **224**, **19**, **45** and/or other control circuitry.

Accordingly, at a first time, control circuitry **18** may instruct the first single pole switching device **335** to open or close (process block **357**). In this manner, the first phase of electric power may be connected or disconnected at the first time. Additionally, at a second time, the control circuitry **18** may instruct the second single pole switching device **339** and the third single pole switching device **339** to open or close (process block **35**). In this manner, the second phase and the third phase of electric power may be connect or disconnected at the second time. As such, the single pole switching devices **335**, **337**, and **339** may be controlled to connect/disconnect electric power from the power source **12** to the load **14** by opening/closing one and then two.

Moreover, since the single pole switching devices **335**, **337**, and **339** may be independently controlled, this may

enable adjusting the open/close sequence based on various desired. For example, this may be particularly useful to implement point-on-wave (POW) techniques. More specifically, when connecting electric power, control circuitry **18** may utilize a close two then one sequence, thereby reducing magnitude of in-rush current and/or current oscillations. On the other hand, when disconnecting electric power, the control circuitry **18** may utilize an open one then two sequence, thereby reducing likelihood and/or magnitude of arcing.

In addition to connecting/disconnecting electric power direct on-line, the one or more switching devices (e.g., single-pole, single current-carrying path switching devices) may be used in a wye-delta starter, which provides electric power to the electric motor **24**. Generally, the wye-delta starter may start the electric motors **24** by connecting the windings in a wye (e.g., star) configuration in order to limit the amount of voltage supplied to the windings, thereby limiting in rush current to the motor **24** and/or torque produced by the motor **24**. Subsequently, the wye-delta starter may connect the windings in the electric motor **24** in a delta configuration after the motor **24** is started to increase the voltage supplied to the windings, thereby increasing the torque produced by the motor. In other words, a wye-delta starter may ease starting of the electric motor **24** by gradually increasing supplied electric power, thereby gradually increasing produced torque.

In some instances, opening and closing the switching devices to transition the electric motor **24** between the various configurations may discharge electric power (e.g., arcing), cause negative torque in the electric motor **24**, cause current spikes that could trip upstream devices, cause current oscillations, or the like. As can be appreciated, such events may reduce the lifespan of the switching devices, the electric motor **24**, the load, and/or other connected equipment.

As such, it would be beneficial to reduce likelihood and/or magnitude of such events when transitioning between the various configurations. As will be described in more detail below, one embodiment described herein may reduce these effects by transition between the wye configuration and the delta configuration using single-pole switching devices, such as the single pole, single current path switching devices **218** described above. More specifically, using single-pole switching devices may enable relatively independently controlling opening and/or closing, for example, in a sequential manner. In other words, each of the windings of the motor **24** may not simultaneously transition from a wye configuration to delta configuration or vice versa.

To help illustrate, a process for sequential starting of a motor **24** using a 5-pole wye-delta starter **374** is described in reference to FIGS. **43A-H**. To simplify the following discussion, the wye-delta starter **374** is described as using five single pole switching devices, such as the single-pole, single current-carrying path switching devices **218** described above. However, any other suitable switching device may additionally or alternatively be used in the techniques described herein. For example, in some embodiments, a multi pole, multi-current carrying path switching device (e.g., three-pole contactor) with off-set poles may be used.

It should be further noted that point-on-wave (POW) techniques may or may not be utilized in the embodiments described below. As described above, when POW techniques are utilized, sensors **22** may monitor (e.g., measure) the characteristics (e.g., voltage or current) of the electric power supplied to the electric motor **24**. The characteristics may be communicated to the control and monitoring cir-

cuitry **18** to enable determining the timing for making and/or breaking the switching devices at a specific point on the electric power waveform.

More specifically, when POW techniques are utilized, a reference point may be selected on a waveform and the timings for energizing the coils and opening/closing switching devices may be calculated. Commands may be sent to timers and the like based on the calculated timings. Once the reference point is hit, the sequence may begin and the timers may trigger the switching devices to open or close when the calculated times are encountered (e.g., after a configurable amount of electrical degrees and/or based a predicted current zero-crossing). In this manner, when POW techniques are utilized, the wye-delta starter **374** may progress through each step in a two-step start and a wye-delta phase sequential transition based at least in part on current zero-crossings and/or predicted current zero-crossing. On the other hand, when POW techniques are not utilized, the wye-delta starter **374** may progress through each step in the two-step start and the wye-delta phase sequential transition one at a time, for example, after a brief time delay (e.g., milliseconds).

In some embodiments, continuous current flow may be provided to the motor **24** during the transition from wye to delta (e.g., "closed transition") by supplying current to at least one winding during the transition. More specifically, supplying current to at least one winding may facilitate maintaining a relationship between the rotor field and the line electric power. In this manner, when subsequent windings are connect to the line electric power, in rush current may be reduced, which may obviate transition resistors.

As depicted, the 5-pole wye-delta starter **374** includes five switching devices **376**, **378**, **380**, **382**, and **384** used to selectively connect three motor windings **386**, **388**, and **390** to a three-phase power source (e.g., mains lines **392**, **394**, and **396** each carrying a single phase of power). In some embodiments, the first wye switching device **376** and the second wye switching device **378** may have the same operational characteristics. Additionally, the first delta switching device **380**, the second delta switching device **382**, and the third delta switching device **384** may have the same operational characteristics. For example, in some embodiments, the delta switching device **380**, **382**, and **384** may be single-pole, single current carrying path switching devices **218** and the wye switching devices **376** and **378** may be power electronic switching devices, such as silicon-controlled rectifiers (SCRs), insulated-gate bipolar transistors (IGBTs), or power field-effect transistors (FETs), or other bidirectional devices.

In the depicted embodiment, dashed lines are used to indicate non-conducting pathways and solid lines are used to indicate conducting pathways. As such, FIG. **43A** describes when each of the switching devices **376**, **378**, **380**, **382**, and **384** is open, thereby disconnecting the electric power from the windings **386**, **388**, and **390**. The wye-delta starter **374** may then transition to a wye configuration using a two-step start sequence, as described in FIGS. **43B** and **43C**. From the wye configuration, the wye-delta starter **374** may then transition to a delta configuration using phase sequential switching, as described in FIGS. **43D-H**.

As described above, FIGS. **43B** and **43C** describe transitioning the electric motor **24** to a wye configuration using a two-step process. More specifically, as shown in FIG. **43B**, the second wye switching device **378** may be closed to provide power to the motor windings **388** and **390**. In some embodiments, the second wye switching device **378** may be closed based at least in part on a predicted current zero-crossing to reduce magnitude of in rush current and current

oscillations. Additionally, as shown in FIG. **43B**, the first wye switching device **376** may be closed to provide three-phase power to the motor windings **386**, **388**, and **390**. In some embodiments, the first wye switching device **376** may be closed after a delay to reduce magnitude of current and/or torque oscillations, for example, based on a predicted current zero-crossing. In this manner, the wye-delta starter may run the electric motor **24** in the wye configuration.

After the electric motor **24** is running in the wye configuration, current flowing through windings **386**, **388**, and **390** may be balanced. As described above, the electric motor **24** may be started in the wye configuration so that the electric motor **24** produces a reduced amount of torque and consumes less power. In other words, as will be described in more detail below, starting in the wye configuration enables the electric motor **24** to be gradually started.

The wye-delta starter **374** may then transition to running the electric motor **24** in a delta configuration to increase torque output (e.g., ramp up the motor **24**). In some embodiments, the transition to the delta configuration may initiate after connecting in the wye configuration, for example, to enable the electric motor **24** to reach steady state and/or reduce magnitude of torque adjustments.

More specifically, the wye-delta starter **374** may begin transition from the wye configuration to the delta configuration by opening the first wye switching device **376**, as shown in FIG. **43D**. As a result, electric power is only supplied to motor windings **388** and **390**, which stops the stator field. More specifically, as shown in FIG. **43E**, the first delta switching device **380** may be closed, thereby connecting first winding **386** in the delta configuration (e.g., line **392** to line **394**) while windings **388** and **390** remain connect in the wye configuration. As a result, the stator field may be reintroduced, thereby producing a positive torque. In fact, in some embodiments, the closure of first delta switching device **380** may be delayed to enable any arcing produced from the opening first wye switching device **376** to dissipate and/or mute adjustment between the stator field and the rotor field, for example, to reduce magnitude of current and/or torque oscillations.

Additionally, as depicted in FIG. **43F**, the second wye switching device **378** may be opened such that only the first winding **386** continues to receive power. In some embodiments, the opening of the second wye switching device **378** may occur based on (e.g., at or ahead of) a current zero-crossing in order to reduce likelihood and/or magnitude of arcing.

Furthermore, the second delta switching device **382** may be closed after the opening of the second wye switching device **378**, thereby providing power to second winding **388** as depicted in FIG. **43G**. More specifically, when the second wye switching device **378** is open, the stator field stops rotating and while the speed strength of the rotor field gradually diminishes. Thus, waiting too long to close second delta switching device **382** may increase inrush current and/or cause the rotor field to pass the stator field, thereby producing a whipsaw effect of braking torque as the stator and rotor fields try to sync.

Accordingly, in some embodiments, the closure timing of second delta switching device **382** may be a short delay (e.g., a few milliseconds or a configurable number of electrical degrees) after second wye switching device **378** opens to reduce the likelihood of the rotor field passing the stator field. For example, the second delta switching device **382** may close based upon where a predicted current zero-crossing. Additionally, the closure timing of second delta switching device **382** may enable any arcing resulting from

the opening of second wye switching device **378** to be extinguished before closing. For example, in some embodiments, second delta switching device **382** may be closed two hundred forty electrical degrees after the first delta switching device **380** closure.

As depicted in FIG. **43H**, the third delta switching device **384** may be closed. In some embodiments, the third delta switching device **384** may close based upon a predicted current-zero crossing. Once the third delta switching device **384** is closed, three-phase power is supplied to the three motor windings **386**, **388**, and **390** via the closed switching devices **380**, **382**, and **384** in the delta configuration. As such, the motor **24** may accelerate to full torque capabilities in the delta configuration.

Although each switching device **376**, **378**, **380**, **382**, and **384** is described as sequentially opening or closing, in other embodiments one or more of the switching devices may open or close substantially simultaneous. For example, in some embodiments, switching devices **382** and **384** may be closed substantially simultaneously. In this manner, an interim torque levels may be removed and the motor may accelerate to full load faster.

One embodiment of a process **398** for controlling the wye-delta starter **374** to transition an electric motor **24** from an open configuration to a wye configuration and to a delta configuration is described in FIG. **44A**. Generally, the process **398** includes closing a second wye switching device **378** (process block **399**) and closing a first wye switching device **376** after closing first wye switching device **376** (process block **400**) to run the electric motor **24** in the wye configuration. Additionally, the process **398** includes opening the first wye switching device **376** (process block **401**), closing a first delta switching device **380** after the first wye switching device **376** opens (process block **402**), opening the second wye switching device **378** (process block **404**), closing a second delta switching device **382** after the first delta switching device **380** closes (process block **406**), and closing a third delta switching device **384** after the first delta switching device **380** closes (process block **408**) to run the electric motor **24** in the delta configuration. In some embodiments, process **398** may be implemented via computer-readable instructions stored in a non-transitory article of manufacture (e.g., the memory **226**, **20**, **46** and/or other memories) and executed via processor **224**, **19**, **45** and/or other control circuitry.

In some embodiments, process **398** may begin when the wye-delta starter **374** is in the open configuration, thereby disconnecting electrical power from the electric motor **24** (e.g., FIG. **43A**). To connect the electric motor **24** in the wye-configuration, control circuitry **18** may instruct the second wye switching device **378** to close (process block **399**) and the first wye switching device **376** to close after closure of the second wye switching device **378** (process block **400**). In some embodiments, the control circuitry **18** may instruct the wye switching devices **376** and **378** to close based at least in part on a predicted current zero-crossing and/or at a configurable number of electrical degrees apart from each other. For example, the control circuitry **18** may instruct second wye switching device **378** to close at a line-to-line voltage maximum (e.g., a predicted current zero-crossing) and the first wye switching device **376** to close sixty electrical degrees later (e.g., a predicted current zero-crossing), thereby reducing magnitude of in-rush current and/or current oscillations.

From the wye configuration, control circuitry **18** may instruct the first wye switching device **376** to open (process block **401**). In some embodiments, the control circuitry **18**

may instruct the first wye switching device **376** to open based at least in part on a current zero-crossing (e.g. at or before a current zero-crossing), which may reduce arcing and extend the life of the first wye switching device **376**, the electric motor **24**, the load, and/or other connected electrical components.

After first wye switching device **376** is opened, control circuitry **18** may instruct the first delta switching device **380** to close (process block **402**). In some embodiments, the control circuitry **18** may instruct the first delta switching device **380** to close based at least in part on a predicted current zero-crossing and/or at a configurable number of electrical degrees after the first switching device **376** opens. For example, in some embodiments, the control circuitry **18** may instruct first delta switching device **380** to close thirty electrical degrees (e.g., a predicted current zero-crossing) after first wye switching device **376** is opened.

Control circuitry **18** may then instruct second wye switching device **378** to open (process block **404**). In some embodiments, the control circuitry **18** may instruct second wye switching device **378** to open based at least in part on a next subsequent current zero-crossing, thereby reducing likelihood and/or magnitude of arcing and current spikes.

Additionally, after first delta switching device **380** is closed, the control circuitry **18** may instruct second delta switching device **382** to close (process block **406**) and third delta switching device **384** to close (process block **408**). In some embodiments, the control circuitry **18** may instruct second delta switching device **382** and third delta switching device **384** to close based at least in part on a predicted current zero-crossing and/or at a configurable number of electrical degrees after the first wye switching device **376** opened. For example, the control circuitry **18** may instruct second delta switching device **382** to close a two hundred forty electrical degrees (e.g., a predicted current zero-crossing) after the first delta switching device **380** closure and instruct third delta switching device **384** to close four hundred twenty electrical degrees (e.g., a predicted current zero-crossing) after the first delta switching device **380** closure.

In some embodiments, it may be desirable to close the second delta switching device **382** quickly because the stator field may stall after the second wye switching device **378** opens. As such, waiting an extended period before closing second delta switching device **382** may result in the rotor field to passing the stator field, which may lead to torque oscillations (e.g., a whipsaw effect) as the fields try to sync and/or current spikes in the motor **24**.

In this manner, the control circuitry **18** may instruct the wye-delta starter **374** to gradually transition an electric motor **24** from the open configuration to the wye-configuration and to the delta-configuration. In other words, the wye-delta starter **374** may be controlled to gradually adjust speed and/or torque of the motor **24** by sequentially opening/closing the switching devices **376-384**.

Additionally, it should be noted that the described electrical degrees are merely intended to be illustrative. In fact, in some embodiments, the number of electrical degrees may be dynamically adjusted by the control circuitry **18** and/or firmware of the switching devices based at least in part on supplied electrical power, application (e.g., load), environmental factors (e.g., dust, condition of switching devices and/or load, etc.), and so forth. For example, as described above, the timing of opening/closing a switching device may be adjusted to reduce likelihood of arcing, magnitude of arcing, magnitude of current oscillations, magnitude of torque oscillations, magnitude of in-rush current, likelihood

of current spikes, magnitude of current spikes, or any combination thereof. Additionally, in some embodiments, the timings may be adjusted based at least in part on the type of application the electric motor 24 is used in. For example, when driving a chiller, long delays may not be acceptable because and, thus, the adjusted to be shorter. Further, the timings may be adjusted based at least in part on the power factor of the AC electric power system.

To facilitate, the timings may be adjusted by multiples of thirty electrical degrees (e.g., thirty, sixty, ninety, etc.), multiples of one hundred eighty electrical degrees (e.g., one hundred eighty, three hundred sixty), multiples of three hundred sixty degrees, multiples of seven hundred twenty degrees, or so forth. In fact, delaying the timings may enable electric power to stabilize, thereby reducing magnitude of current oscillations and/or current spikes. More specifically, a lower magnitude of current oscillation and/or current spikes may improve adjustments between the stator field and the rotor field. As such, in some embodiments, the timing of each subsequent opening/closing may be based at least in part on when electric power supplied to the windings 386, 388, and 390 stabilize.

To help illustrate, a plot 409 of magnitude of current supplied to the electric motor 24 is described in FIG. 44B. More specifically, the plot 409 includes a current curve 411 that describes magnitude of current supplied to windings 386, 388, and 390 in the electric motor between t0 when motor 24 is connect in an open configuration (e.g., FIG. 43A) to t7 when the motor 24 is connected in a delta configuration (e.g., FIG. 43H).

As described by the current curve 411, the magnitude of current supplied to the electric motor 24 is zero between t0 and t1. Thus, between t0 and t1, the wye-delta starter 374 may be in the configuration described in FIG. 43A, thereby disconnecting electric power from the windings 386, 388, and 390. Additionally, the magnitude of current supplied to the electric motor 24 increases at t1 and reaches a steady state before t2. Thus, between t1 and t2, the wye-delta starter 374 may be in the configuration described in FIG. 43B, thereby connecting electric power to windings 388 and 390 in the wye configuration. Furthermore, the magnitude of current supplied to the electric motor 24 again increases at t2 and reach a steady state before t3. Thus, between t2 and t3, the wye-delta starter 374 may be in the configuration described in FIG. 43C, thereby connecting electric power to each of the windings 386, 388, and 390 in the wye configuration.

As described by the current curve 411, the magnitude of the current supplied to the electric motor 24 may decrease at t3 and reach a steady state before t4. Thus, between t3 and t4, the wye-delta starter 374 may be in the configuration described in FIG. 43D, thereby connecting electric power to windings 388 and 390 in the wye configuration. Additionally, the magnitude of the current supplied to the electric motor 24 may increase at t4 and reach a steady state before t5. Thus, between t4 and t5, the wye-delta starter 374 may be in the configuration described in FIG. 43E, thereby connecting electric power to windings 388 and 390 in the wye configuration and first winding 386 in the delta configuration.

Furthermore, the magnitude of current supplied to the electric motor 24 may be again increased at t5 and reach a steady state before t6. In some embodiments, between t5 and t6, the wye-delta starter 374 may operate such that, at a first time, the second winding 388 is connected in the wye configuration, first winding 386 is connected in a delta configuration, and third winding 390 is connected in both the

wye and the delta configuration and, at a second time, the second winding 388 remains connected in the wye configuration and windings 386 and 388 are connected in the delta configuration. In other embodiments, between t5 and t6, the wye delta starter 384 may operate such that, at a first time, the first winding 386 is connected in the delta configuration (e.g., FIG. 43F) and, at a second time, windings 386 and 388 are connected in the delta configuration (e.g., FIG. 43G).

As described by the current curve 411, the magnitude of the current supplied to the electric motor 24 may increase at t6 and reach a steady state before t7. Thus, between t6 and t7, the wye-delta starter 374 may be in the configuration described in FIG. 43H, thereby connecting electric power to windings 386, 388 and 390 in the delta configuration. Thus, in the described embodiment, the timing of opening/closing of the switching devices 376-384 may be determined such that subsequent opening/closing is performed after the electric motor 24 stabilizes (e.g., magnitude of current reaches a steady state), thereby reducing magnitude of current spikes, current oscillations, and/or torque oscillations produced by sequential switching.

Moreover, in some embodiments, POW techniques may also be utilized to improve sequential switching of the wye-delta starter 374. As described above, when POW techniques are utilized, the wye-delta starter 374 may progress through each step in the sequential switching based at least in part on current zero-crossings and/or predicted current zero-crossings. To help illustrate, current and voltage waveforms of the power source 12 and the windings 386, 388, and 390 are described.

Since connecting the windings 386, 388, and 390 in a wye configuration is essentially connecting three phase electric power, the current and voltage waveforms describing transitioning from disconnected to the wye configuration are described in relation to FIGS. 5A-5C between t0 and t2. In this context, FIG. 5A illustrates the voltage of three-phase electric power (e.g., a first phase voltage curve 66, a second phase voltage curve 68, and a third phase voltage curve 70) provided by a power source 12. FIG. 5B illustrates the line to neutral voltage supplied to each terminal (e.g., first terminal voltage curve 72, second terminal voltage curve 74, and third terminal voltage curve 76) of the electric motor 24. FIG. 5C illustrates line current supplied to each winding (e.g., first winding current curve 77, second winding current curve 78, and third winding current curve 80) of the electric motor 24.

As described above, between t0 and t1, the switching devices 376-384 are open and electric power is not connected to the electric motor 24. At t1, the second wye switching device 378 is closed to connect a first phase (e.g., phase A) and a second phase (e.g., phase B) of the electric power to the second winding 388 and the third winding 390 in the wye configuration. To reduce magnitude of in-rush current and/or current oscillations, the wye-delta starter 374 may close the second wye switching device 278 based at least in part on a predicted current zero-crossing (e.g., within a range from slightly before to slightly after the predicted current zero-crossing).

As described above, a predicted current zero-crossing may correspond with a line-to-line voltage maximum (e.g., 90° after a voltage zero-crossing). With regard to FIG. 5A, the predicted current zero-crossing occurs approximately when the line-to-line voltage between the second phase (e.g., second phase voltage curve 68) and the third phase (e.g., third phase voltage curve 70) is at a maximum. Accordingly, by closing the second wye switching device 278 at t1, electric power is connected to the second winding

**388** and the third winding **390** at approximately the predicted current zero-crossing. In fact, as depicted in FIG. 5C, since electric power is connected based at least in part on a predicted current zero-crossing, the current supplied to the second winding **388** (e.g., second winding current curve **79**) and the third winding **390** (e.g., second winding current curve **80**) start at zero and gradually change, thereby reducing magnitude of in-rush current and/or current oscillation.

After second wye switching device **378** is closed, first wye switching device **376** is closed at  $t_2$  to supply the third phase (e.g., phase C) of the electric power to the first winding **386** in the wye configuration. To reduce magnitude of in-rush current and/or current oscillations, the wye-delta starter **374** may connect electric power to the first winding **386** based at least in part on a predicted current zero-crossing. With regard to FIG. 5A, the predicted current zero-crossing occurs when the sum of line-to-line voltage between the first phase (e.g., first phase voltage curve **66**) and the third phase (e.g., third phase voltage curve **70**) and the line-to-line voltage between the first phase (e.g., second phase voltage curve **66**) and the second phase (e.g., third phase voltage curve **68**) is at a maximum. Accordingly, by closing the first wye switching device **376** at  $t_2$ , electric power is connected to the first winding **386** at approximately the predicted current zero-crossing. In fact, as depicted in FIG. 5C, since the electric power connected based at least in part on a predicted current zero-crossing, the current supplied to the first winding **386** (e.g., first winding current curve **78**) starts at zero and gradually change, thereby rotating the electric motor **24** and reducing magnitude of in-rush current and/or current oscillation.

To further illustrate, FIGS. 45A-C depicts current and voltage waveforms for transitioning from the wye configuration to the delta configuration. Specifically, FIG. 45A illustrates the line to neutral voltage supplied to each terminal (first terminal voltage curve **414**, second terminal voltage curve **412**, and third terminal voltage curve **416**) of the electric motor **24**. Additionally, 45B illustrates the voltage of three-phase electric power (e.g., a first phase voltage curve **420**, a second phase voltage curve **418**, and a third phase voltage curve **422**) provided by a power source **12**. FIG. 45C illustrates line current supplied to each winding (e.g., first winding current curve **422**, second winding current curve **424**, and third winding current curve **426**) of the electric motor **24**.

As described above, the first wye switching device **376** is opened at  $t_3$  to disconnect electric power from the first winding **386**. To reduce the likelihood and/or magnitude of arcing, the wye-delta starter **374** may open the first wye switching device **376** based at least in part of a current zero-crossing (e.g., at or slightly before the current zero-crossing). With regard to FIG. 45C, the current zero-crossing occurs when current supplied to the first winding **386** (e.g., first winding current curve **422**) is zero. Accordingly, by opening the first wye switching device **376** at  $t_3$ , electric power is disconnected from the first winding **386** at approximately the current zero-crossing.

After the first wye switching device **376** is opened, first delta switching device **380** may be closed at  $t_4$  to connect electric power to the first winding **386** in the delta configuration. To reduce magnitude of in-rush current and/or current oscillations, the wye-delta starter **374** may close the first delta switching device **380** based at least in part on a predicted current zero-crossing (e.g., within a range from slightly before to slightly after the predicted current zero-crossing). With regard to FIG. 45B, the predicted current zero-crossing occurs halfway between  $t_3$  and  $t_4$  when the

sum of line-to-line voltage between the first phase (e.g., first phase voltage curve **420**) and the third phase (e.g., third phase voltage curve **416**) and the line-to-line voltage between the first phase (e.g., second phase voltage curve **420**) and the second phase (e.g., second phase voltage curve **418**) is at a maximum. Accordingly, by closing the first wye switching device **376** at  $t_4$ , the first wye switching device **376** is closed slightly after the predicted current zero-crossing. Nevertheless, as depicted in FIG. 45C, since electric power is connected based at least in part on the predicted current zero-crossing, the current supplied to the first winding **386** (e.g., first winding current **422**) starts at zero and gradually changes, thereby reducing magnitude of in-rush current and/or current oscillation.

Furthermore, at  $t_4$ , the electric motor windings **386-390** are connected in a mixed wye-delta configuration. Accordingly, as depicted in FIG. 45C, the current supplied to the windings (e.g., first winding current curve **422**, second winding current curve **424**, and third winding current curve **426**) is unbalanced, which may cause the winding (e.g., **388** and **390**) connected in wye and the winding (e.g., **386**) connected in delta to produce varying magnetic fields. In other words, the electric motor **24** may be unbalanced while still producing a positive torque.

After first delta switching device **380** is closed, second wye switching device **378** may be opened and second delta switching device **382** may be closed at  $t_5$  to connect the second winding **388** in the delta configuration. To reduce the likelihood and/or magnitude of arcing, the wye-delta starter **374** may open the second wye switching device **378** based at least in part of a current zero-crossing. With regard to FIG. 45C, the current zero crossing occurs when current supplied to the second winding **388** (e.g., second winding current curve **424**) and the third winding **390** (e.g., third winding current curve **426**) are zero. Accordingly, by opening the second wye switching device **378** at  $t_5$ , the second and third windings **388** and **390** are disconnected approximately at the current zero-crossing.

Additionally, to reduce magnitude of in-rush current and/or current oscillations, the wye-delta starter **374** may close the second delta switching device **382** based at least in part on a predicted current zero-crossing. With regard to FIG. 45B, the predicted current zero-crossing occurs at a line-to-line voltage maximum between the first phase (e.g., first phase voltage curve **420**) and the second phase (e.g., second phase voltage curve **418**). Accordingly, by closing the second delta switching device **382** at approximately  $t_5$ , electric power is connect to the second winding **388** at approximately the predicted current zero-crossing. In fact, as depicted in FIG. 45C, since electric power is connected based at least in part on the predicted current zero-crossing, the current supplied to the second winding **388** (e.g., second winding current **424**) starts at zero and gradually changes, thereby reducing magnitude of in-rush current and/or current oscillation.

After first delta switching device **380** is closed, the third delta switching device **384** is may be close at  $t_6$ . To reduce magnitude of in-rush current and/or current oscillations, the wye-delta starter **374** may close the third delta switching device **384** based at least in part on a predicted current zero-crossing. With regard to FIG. 45B, the predicted current zero-crossing occurs when the sum of line-to-line voltage between the first phase (e.g., first phase voltage curve **420**) and the third phase (e.g., third phase voltage curve **416**) and the line-to-line voltage between the third phase (e.g., third phase voltage curve **416**) and the second phase (e.g., second phase voltage curve **418**) is at a maxi-

mum. Accordingly, by closing the third delta switching device **384** at  $t_6$ , electric power is connect to the third winding **390** at approximately the predicted current zero-crossing. In fact, as depicted in FIG. **45C**, since electric power is connected based at least in part on the predicted current zero-crossing, the current supplied to the third winding **390** (e.g., third winding current **426**) starts at zero and gradually changes, thereby reducing magnitude of in-rush current and/or current oscillation.

Thus, in the described embodiment, the timing of opening/closing of the switching devices **376-384** may be determined such based at least in part on current zero-crossings and/or predicted current zero-crossings. As discussed above, this may facilitate reducing in-rush current and/or current oscillations when a switching device is closed and reduce likelihood and/or magnitude of arcing when a switching device is open. In this manner, the wye-delta starter **374** may utilize sequential switching to gradually adjust speed and/or torque of the electric motor **24**, particularly during startup.

In fact, the timing of the sequential switching may also be determined based on a balance between desired ramp up duration, strain on the motor **24**, and/or strain on the load **14**. For example, in some embodiments, to reduce ramp up duration, the wye-delta starter **374** may adjust configuration of the first wye switching device **376-382** as soon as magnitude of the supplied current stabilizes. Additionally, to reduce strain on the motor **24**, the wye-delta starter **374** may remain at each configuration a differing duration. For example, duration that the electric motor **24** is run a wye configuration (e.g., between  $t_2$  and  $t_3$ ) may be longer than duration that the electric motor **24** is run in a mixed wye-delta configuration (e.g., between  $t_3$  and  $t_4$ ). In some embodiments, duration that the electric motor **24** is run in a first mixed wye-delta configuration (e.g., between  $t_4$  and  $t_5$ ) may be longer than duration that the electric motor **24** is run in a second mixed wye-delta configuration (e.g., between  $t_3$  and  $t_4$ ).

Once in the delta configuration, the wye-delta starter **374** may enable the electric motor **24** to utilize maximum (e.g., 100%) torque and/or maximum (e.g., 100%) speed capabilities. In other words, the torque and/or speed capabilities of the electric motor **24** may be increased when running in the delta configuration as compared to running in the wye configuration. However, power consumption by the electric motor **24** may also be increased. As such, in certain scenarios, it may be beneficial for the wye-delta starter **374** to transition the motor **24** from the delta configuration back to the wye configuration, thereby reducing power consumption.

One embodiment of a process **428** that describes the transition between wye to delta and vice versa is shown in FIG. **46**. Generally, the process **428** includes the same steps **401-408** shown in FIG. **44A** to phase sequentially switch from wye to delta. To transition from delta to wye, the process **428** includes opening the third delta switching device **384** (process block **430**), opening the second delta switching device **382** (process block **432**), closing the second wye switching device **378** after the second delta switching device **382** opens (process block **434**), opening the first delta switching device **380** (process block **436**), and closing the first wye switching device **376** after the second wye switching device **378** closes (process block **438**). In some embodiments, the process **428** may be implemented via computer-readable instructions stored in a tangible non-transitory article of manufacture (e.g., the memory **226**, **20**, **46** and/or other memories) and executed via processor **224**, **19**, **45** and/or other control circuitry.

As previously noted, when POW techniques are not utilized the wye-delta starter may progress through each step in the sequential switching after a brief time delay (e.g., milliseconds) or substantially simultaneously. On the other hand, when POW techniques are utilized the wye-delta starter may progress through each step in the wye two-step start and phase sequential wye-delta switching after a configurable number of electrical degrees and/or based at least in part on current zero-crossings.

Turning now to the process **428**, the phase sequential wye-delta switching process blocks (process blocks **401**, **402**, **404**, **406**, and **408**) described above with reference to FIG. **44A** are reproduced in order to aid in understanding how the techniques enable sequentially switching back and forth between wye and delta as desired. As such, the detailed description of each process block in the phase sequential wye-delta switching in FIG. **44A** is incorporated here by reference.

Thus, at process block **408**, the electric motor **24** is running in a delta configuration. From the delta configuration, control circuitry **18** may instruct third delta switching device **384** to open (process block **430**) and instruct second delta switching device **382** to open (process block **432**). In some embodiments, the control circuitry **18** may instruct third delta switching device **384** and second delta switching device **382** to open based at least in part on current zero-crossings (e.g., slightly before or at the current zero-crossings) to reduce likelihood and/or magnitude of arcing. Additionally or alternatively, the control circuitry **18** may instruct the third delta switching device **384** to open at any time while the electric motor **24** is running in the delta configuration. For example, in some embodiments, third delta switching device **384** may be opened first and second delta switching device **382** opened subsequently. In other embodiments, both of the switching devices **382** and **384** may be opened simultaneously. After both the switching devices **382** and **384** are opened, the electric power is only connect to the first winding **386** connected in the delta configuration.

After switching devices **382** and **384** are opened, the control circuitry **18** may instruct the second wye switching device **378** to close (process block **434**). In some embodiments, the control circuitry **18** may instruct second wye switching device **378** to based at least in part on a predicted current zero-crossing after the wye switching devices are opened. Once second wye switching device **378** is closed, the motor may be running in a mixed wye-delta configuration with first winding **386** in connected in the delta configuration and windings **388** and **390** connected in the wye configuration. As a result, as discussed above, the winding currents may be unbalanced.

Then, control circuitry **18** may instruct the first delta switching device **380** to open (process block **436**). In some embodiments, the control circuitry **18** may instruct first delta switching device **380** to open based at least in part on a current zero-crossing (e.g., slightly before or at the current zero-crossing) to reduce magnitude and/or likelihood of arcing. Opening the first delta switching device **380** may remove power from the first winding **386**. As such, at this point, windings **388** and **390** may be supplied power in the wye configuration.

Additionally, after first delta switching device **378** is opened, control circuitry **18** may instruct first wye switching device **376** to close (process block **438**). In some embodiments, the control circuitry **18** may instruct first wye switching device **376** to close based at least in part on a predicted current zero-crossing. Once the first wye switching device

**376** closes, the electric motor **24** may be running in the wye configuration. As a result, the current in windings **386**, **388**, and **390** may be balanced and the amount of power consumed and torque produced may be reduced.

It should be noted that once the electric motor **24** is running in the wye configuration, the process **428** enables phase sequentially switching back to delta configuration by returning to process block **401**. In this manner, the wye-delta starter **374** may transition running the electric motor **24** in either configuration (e.g., wye or delta) as desired (represented by arrows **440**).

In the above described embodiments, the five switching device are utilized in the wye-delta starter **374**. As such, the above wye-delta starter **374** may be referred to herein as a 5-pole wye-delta starter. However, in other embodiments, it may be possible to increase amount of control over electric power supplied to the electric motor **24** by increasing number of switching devices utilized in the wye-delta starter. For example, in some embodiments, six switching devices may be utilized. Thus, such a wye-delta starter may be referred to herein as a 6-pole wye-delta starter. As will be described in more detail below, a 6-pole wye-delta starter may further extend the life span of the switching devices by enabling the switching devices to take turns when switching.

To help illustrate, a 6-pole wye-delta starter **442** is described in FIGS. **47A-G**. To simplify the following discussion, the wye-delta starter **442** is described as using single pole switching devices, such as the single-pole, single current-carrying path switching devices **218** described above. However, any other suitable switching device may additionally or alternatively be used in the techniques described herein. For example, in some embodiments, a multi-pole, multi-current carrying path switching device (e.g., three-pole contactor) with off-set poles may be used.

As with the 5-pole wye-delta starter **374**, is defined by the circuit diagrams **442** FIGS. **47A-G**. It should be further noted that point-on-wave (POW) techniques may or may not be utilized in the embodiments described below. As described above, when POW techniques are utilized, sensors **22** may monitor (e.g., measure) the characteristics (e.g., voltage or current) of the electric power supplied to the electric motor **24**. The characteristics may be communicated to the control and monitoring circuitry **18** to enable determining the timing for making and/or breaking the switching devices at a specific point on the electric power waveform.

As depicted, the 6-pole wye-delta starter **442** includes six switching devices **444**, **446**, **448**, **450**, **452**, and **454** used to selectively connect three motor windings **456**, **458**, and **460** to a three-phase power source (e.g., mains lines **462**, **464**, and **466** each carrying a single phase of power). In some embodiments, the first wye switching device **444**, the second wye switching device **446**, and the third wye switching device **448** may have the same operational characteristics. Additionally, the first delta switching device **450**, the second delta switching device **452**, and the third delta switching device **454** may have the same operational characteristics. For example, in some embodiments, the first delta switching device **450**, **452**, and **454** may be single-pole, single current carrying path switching devices **218** and the wye switching devices **444**, **446**, and **448** may be power electronic switching devices, such as silicon-controlled rectifiers (SCRs), insulated-gate bipolar transistors (IGBTs), power field-effect transistors (FETs), and/or other bidirectional devices.

In the depicted embodiment, dashed lines are used to indicate non-conducting pathways and solid lines are used to indicate conducting pathways. As such, FIG. **47A** describes when each of the switching devices **444**, **446**, **448**, **450**, **452**,

and **454** is open, thereby disconnecting the electric power from the windings **456**, **458**, and **460**. The wye-delta starter **442** may then transition to a wye configuration using a two-step start sequence, as described in FIGS. **47B** and **47C**. From the wye configuration, the wye-delta starter **442** may then transition to a delta configuration using phase sequential switching, as described in FIGS. **47D-H**.

The steps in the phase sequential wye-delta transition using 6-pole wye-delta starter **442** is essentially the same as the 5-pole wye-delta starter **374**, which is shown in FIGS. **43A-G**. However, the 6-pole wye-delta starter utilizes three wye switching devices (**444**, **446**, and **448**), as opposed to two. As such, the order in which the wye switching devices are closed in the wye two-step start and the order in which the wye switching devices are opened in the phase sequential wye-delta switching may change. In particular, regarding the wye two-step start, in order to provide current to the windings using three wye switching devices, one of the steps may close two wye switching devices simultaneously, and the other step may close the third switching device. For example, as depicted in FIG. **47B**, the switching devices **446** and **448** may close simultaneously to connect windings **458** and **460** from line **464** to line **466**. Subsequently, as depicted in FIG. **47C**, the first wye switching device **444** may close, thereby connecting the windings **454**, **456**, and **458** in the wye configuration.

Once the electric motor **24** is running in wye configuration, the phase sequential switching to delta may initiate. As with the 5-pole wye-delta starter **374**, one of the wye switching devices **444** may be opened as shown in FIG. **47D**. Next, as shown in FIG. **47E**, the first delta switching device **450** may be closed to connect the first winding **456** in the delta configuration. After switching device **450** closes, the motor **24** may be running in a mixed wye-delta configuration with first winding **456** connected in delta and windings **458** and **460** connected in wye. Then, as shown in FIG. **47F**, the remaining two closed wye switching devices **446** and **448** may be opened, for example, sequentially or simultaneously. Subsequently, switching devices **452** and **454** may be closed either one after the other, as shown in FIGS. **47F** and **47G**, or simultaneously.

It should be noted that utilizing three wye switching devices (**444**, **446**, and **448**) may enable wear balancing by keeping track of which switching device(s) opened first. In some embodiments, the first switching device that opens may experience a larger amount of wear compared to the subsequently opened switching devices. As such, the switching device that opens first may be rotated during subsequent sequential wye-delta transitions to even out the wear on the switching devices and lengthen the lifespan of the switching devices. In other embodiments, the order that the wye switching devices opens may be determined by statistically by randomizing the order, which may obviate persistent memory.

For example, in the depicted embodiment shown in FIGS. **47D-F**, the first wye switching device **444** may be opened first to disconnect electric power from the first winding **456**. In certain embodiments, control and monitoring circuitry **18** connected to the wye-delta starter may record that the first wye switching device **444** opened first. Then, the next time phase sequential wye-delta switching is initiated, the control and monitoring circuitry **18** may determine that the first wye switching device **444** opened first previously and, thus, instruct the second wye switching device **446** or the third wye switching device **448** to open first. For example, since switching device **444** opened first previously, the control and

monitoring system **18** may instruct the second wye switching to open first in a subsequent wye to delta transition.

Similar wear balancing may be performed when phase sequentially switching from the delta configuration back to the wye configuration. For example, in some embodiments, the first delta switching device **450** may be opened first to disconnect electric power from the first winding **456**. In certain embodiments, control and monitoring circuitry **18** connected to the wye-delta starter may record that the first delta switching device **450** opened first. Then, the next time phase sequential wye-delta switching is initiated, the control and monitoring circuitry **18** may determine that the first delta switching device **450** opened first previously and, thus, instruct the second delta switching device **452** or the third delta switching device **454** to open first. For example, since switching device **450** opened first previously, the control and monitoring system **18** may instruct the second delta switching device **452** to open first in a subsequent delta to wye transition.

With the foregoing in mind, FIG. **48** depicts an embodiment of a process **468** for wye-delta motor starting over a series of starts. Generally, the process **468** includes receiving a signal to start the motor (process block **470**), selecting the switching device to close and/or open first (process block **472**), executing phase sequential wye-delta switching and close and/or open the selected switching device (process block **474**), and recording which switching device was selected and opened and/or closed first (process block **476**). In some embodiments, process **468** may be implemented via computer-readable instructions stored in the tangible, non-transitory memory **226**, **20**, **46** and/or other memories and executed via processor **224**, **19**, **45** and/or other control circuitry.

The process **468** may enable wear balancing for various configuration of switching devices performing various switching operations. However, to help illustrate, the process **468** is described in relation to transition from the wye configuration to the delta configuration using the 6-pole wye-delta starter **442**. For example, the control and monitoring circuitry **18** may receive a signal to transition from the wye configuration to the delta configuration (process block **470**). As described above, the wye delta starter **442** may transition from the wye configuration to the delta configuration by first opening a wye switching device **444**, **446**, or **448**.

Accordingly, the control and monitoring circuitry **18** may select one of the wye switching devices **444**, **446**, and **448** to open first (process block **472**). As described above, the control and monitoring circuitry **18** may select which wye switching device to open first based at least in part on previous open operations. For example, when the first wye switching device **444** was opened first in a previous operating, the control and monitoring system **18** may select the second wye switching device **446** or the third wye switching device **448** to open first. Additionally, if this is the first time switching operating, the control and monitoring circuitry **18** may select one of the wye switching devices **444**, **446**, or **448** as a default.

The control and monitoring circuitry **18** may instruct the selected wye switching device to open (process block **474**). Additionally, the control and monitoring circuitry **18** may instruct the remaining switching devices to open or close to perform the transition from the wye configuration to the delta configuration.

Furthermore, the control and monitoring circuitry **18** may keep a record of the selected wye switching device to facilitate determining which switching device to select in

subsequent switching operations (process block **476**). In some embodiments, the switching device that opened first may be stored in memory **226**, **20**, or **46**. In this manner, when another signal to transition from the wye configuration to the delta configuration is received, the control and monitoring circuitry **18** may retrieve the switching order used in the previous operation (arrow **478**).

Based at least in part on the previous switching order, the control and monitoring circuitry **18** may select a different wye switching device **444**, **446**, or **448** to open first (process block **472**). Subsequently, the control and monitoring circuitry **18** may instruct the selected wye switching device to open (process block **472**) and the remaining switching devices to open or close to perform the transition from the wye configuration to the delta configuration.

Moreover, the techniques described herein may be extended to other wye-delta configurations. For example, FIGS. **49A** and **49B** depict circuit diagrams for 8 and 9 pole wye-delta switching arrangements, respectively. In particular, the circuit diagram **480a** depicted in FIG. **49A** includes two wye switching devices **482** and **484** and three delta switching devices **486**, **488**, and **490**, and three mains switching devices **492a**, **494a**, and **496a**. Likewise, the 9-pole wye-delta starter circuit diagram **498a** depicted in FIG. **49B** includes three wye switching devices **500**, **502**, and **504**, the delta switching devices **506**, **508**, and **510**, and three mains switching devices **512a**, **514a**, and **516a**. As shown in the depicted embodiments, the mains switching devices **492a**, **494a**, **496a**, **512a**, **514a**, and **516a** are inside the delta configuration. More specifically, the mains switching devices **492a**, **494a**, **496a**, **512a**, **514a**, and **516a** may be utilized as disconnect switches to isolate the windings from the mains power when desired.

Other embodiments of the 8 and 9 pole wye-delta switching arrangements are shown in FIGS. **49C** and **49D**, respectively. In particular, the circuit diagram **480b** depicted in FIG. **49C** includes two wye switching devices **482** and **484** and three delta switching devices **486**, **488**, and **490**, and three mains switching devices **492b**, **494b**, and **496b**. Likewise, the 9-pole wye-delta starter circuit diagram **498b** depicted in FIG. **49D** includes three wye switching devices **500**, **502**, and **504**, the delta switching devices **506**, **508**, and **510**, and three mains switching devices **512b**, **514b**, and **516b**. As shown in the depicted embodiments, the mains switching devices **492b**, **494b**, **496a**, **512b**, **514b**, and **516b** are outside the delta configuration. The mains switching devices **492b**, **494b**, **496a**, **512b**, **514b**, and **516b** may be used as disconnect switches to isolate the electric motor **24** from the mains power.

Similar to the 5 and 6 pole wye-delta switching arrangements discussed above, the 8 and 9 pole wye-delta switching arrangements may perform the wye two-step start and the phase sequential wye-delta switching, except that, before running through the openings and closings, the mains switching devices may be closed to provide power to the windings. In addition, the 8 and 9 single-pole switching arrangements may or may not utilize POW techniques to execute the wye two-step start and the phase sequential wye-delta sequencing. Also, the physical layout of the various wye-delta switching arrangements may be highly configurable due to the modularity enabled by utilizing single-pole switching devices, which will be discussed in further detail below.

Motor Torque-Based Phase Sequential Switching

As noted above, a wye-delta starter (e.g., a 5-pole wye-delta starter **374** or a 6-pole wye-delta starter **442**) may supply electric power to an electric motor **24** to run the

motor **24** in a wye configuration or a delta configuration. In should be noted that a 5-pole wye-delta starter **374** may be a special case of a 6-pole wye-delta starter **442**. As such, techniques applicable to a 5-pole wye-delta starter **374** may be easily adaptable to a 6-pole wye-delta starter **44**.

In some instances, when the electric motor **24** is run in wye, the electric motor **24** may use less electric power to produce a first (e.g., lower) torque level, and when the electric motor **24** is run in delta, the electric motor **24** may use more electric power to produce a second (e.g., higher) torque level. In other words, supplying electric power to the electric motor **24** using a wye-delta starter **374** enables at least two operating modes (e.g., less power consumption lower torque and more power consumption higher torque).

However, there may be instances when it is desirable to operate the motor **24** somewhere between the two operating modes. For example, it may be desirable to produce more torque than produced when operating in wye, but consume less electric power than consumed when operating in delta. In contrast, it may be desirable to produce less torque than produced when operating in delta, but consume more power than consumed when operating in wye. Thus, the wye-delta starter may sequentially traverse through mixed wye-delta configurations to increase or decrease the torque level and/or power consumption as desired.

To help illustrate, FIGS. **50A-F** describes configurations (e.g., open/close switching devices) of a 5-pole wye-delta starter **374** long with corresponding torque levels produced by the electric motor **24**. Turning to FIG. **50A**, when the second wye switching device **378** is closed, the wye-delta starter **374** may provide two phases of electric power to the motor windings **388** and **390**. However, merely supplying two phases of electric power may be insufficient to rotate the electric motor **24** because the resultant field cannot initiate rotation. As such, the electric motor **24** may produce 0% of the motor's potential maximum torque level (e.g., in the delta configuration) and consume minimal electric power.

As shown in FIG. **50B**, when first wye switching device **376** and second wye switching device **378** are closed, the wye-delta starter **374** may provide three-phase power to the motor windings **386**, **388**, and **390**. More specifically, in this configuration, the wye-delta starter **374** may supply electric power to the electric motor **24** in a wye configuration. As such, the motor **24** may produce less than or equal to 33% of the motor's potential maximum torque level (e.g., in the delta configuration). Additionally, in some embodiments, the power consumption of the electric motor **24** may be less than or equal to 33% of the maximum power consumption (e.g., in the delta configuration).

As shown in FIG. **50C**, when first wye switching device **376** is opened and second wye switching device **378** remains closed, the wye-delta starter **374** may again provide two phases of electric power to the motor windings **388** and **390** in a wye configuration. However, when the motor **24** has already begun rotating, the two phases of electric power may be sufficient to maintain rotation of the motor **24**. As such, in this configuration, the motor **24** may produce less than or equal to 22% of the maximum torque level and power consumption may drop to less than or equal to 22% of maximum power consumption.

As shown in FIG. **50D**, when first delta switching device **380** is closed and second wye switching device **378** remains closed, the wye-delta starter **374** may provide three-phase electric power to the motor **24**. More specifically, the motor **24** may run in a mixed wye-delta configuration with windings **388** and **390** connected in wye and first winding **386** connected in delta. As a result, the current waveforms may

be unbalanced. Nevertheless, in this configuration, the motor **24** may produce torque less than or equal to 55% of the maximum torque level and the power consumption may increase to less than or equal to 55% of the maximum power consumption.

As shown in FIG. **50E**, when third delta switching device **384** is closed and switching devices **380** and **378** remain closed, the wye-delta starter **374** may remain providing three-phase electric power to the motor **24**. More specifically, the motor **24** may continue running in a mixed wye-delta configuration with first winding **386** connected in delta, second winding **388** connected in wye, and third winding **390** connected in both delta and wye. As such, in this configuration, the motor **24** may produce less than or equal to 66% of the maximum torque level and power consumption may increase to less than or equal to 66% of the maximum power consumption.

As shown in FIG. **50F**, when second wye switching device **378** is open, switching devices **380**, **382**, and **384** remain closed, the wye-delta starter may provide three-phase electric power to the motor **24** in a delta configuration. As such, in this configuration, the motor **24** may produce less than or equal to 100% of the maximum torque level and power consumption may increase to less than or equal to 100% of the maximum power consumption. It should be noted that throughout the phase sequential wye-delta switching steps, the torque is in the same direction (e.g., positive).

Thus, as described above, the wye-delta starter **374** may facilitate reducing strain on the motor **24** and/or a connected load **18** by gradually adjusting torque, particularly when starting up the motor **24**. To help illustrate, a plot **518** of torque produced when starting up a motor **24** using sequential switching of a wye-delta starter is described in FIG. **50G**. More specifically, a motor torque curve **519** describes torque produced by the motor **24** between  $t_0$  and  $t_7$ . In the depicted embodiment, the wye-delta starter **374** may be disconnected between  $t_0$  and  $t_1$ , in the configuration described in FIG. **50A** between  $t_1$  and  $t_2$ , in the configuration described in FIG. **50B** between  $t_2$  and  $t_3$ , in the configuration described in FIG. **50C** between  $t_3$  and  $t_4$ , in the configuration described in FIG. **50D** between  $t_4$  and  $t_5$ , in the configuration described in FIG. **50E** between  $t_5$  and  $t_6$ , and in the configuration described in FIG. **50F** between  $t_6$  and  $t_7$ .

Thus, as described by the motor torque curve **519**, the motor **24** may produce 0% of the motor's potential maximum torque level between  $t_0$  and  $t_1$  since electric power is not supplied to the windings **386**, **388**, and **390**. The motor **24** may continue producing 0% of the motor's potential maximum torque level between  $t_1$  and  $t_2$ . More specifically, as described above, two phases of electric power are supplied to windings **388** and **390** in a wye configuration. However, the two phases may be insufficient to initiate rotation of the motor **24**.

As described by the motor torque curve **519**, the motor **24** may begin rotating and producing torque between  $t_2$  and  $t_3$ . More specifically, as described above, in this configuration the windings **386**, **388**, and **390** may be connected in the wye configuration, thereby enabling the motor **24** to produce less than or equal to 33% of the maximum torque level. In some embodiments, connecting the windings **386**, **388**, and **390** in wye may be a stable configuration. As such, the wye-delta starter **374** may remain in this configuration for extended durations of time.

Additionally, as described by the motor torque curve **519**, the motor **24** may continue rotating but produce a reduced amount of torque between  $t_3$  and  $t_4$ . More specifically, as described above, in this configuration the windings **388** and

**390** may remain connected in the wye configuration. However, since the motor **24** is already in rotation, the two phases of electric power supplied to windings **388** and **390** are sufficient to maintain the rotation. In some embodiments, the rotation of the motor **24** may begin to slow when run in this configuration for an extended period. As such, the wye-delta starter **374** may remain in this configuration for a shorter duration.

Furthermore, as described by the motor torque curve **519**, the motor **24** increase produced torque between **t4** and **t5**. More specifically, as described above, in this configuration windings **388** and **390** may remain connected in wye and first winding **386** may be connected in delta, thereby enabling the motor **24** to produce less than or equal to 55% of the maximum torque level. In some embodiments, since electric power is supplied to each of the windings **386**, **388**, and **390**, this mixed wye-delta configuration may be a stable. As such, the wye-delta starter **374** may remain in this configuration for extended durations of time.

As described by the motor torque curve **519**, the motor **24** may again increase produced torque between **t5** and **t6**. More specifically, as described above, in this configuration windings **388** may remain connected in wye, first winding **386** may remain connected in delta, and third winding **390** may be connected in both wye and delta, thereby enabling the motor **24** to produce less than or equal to 66% of the maximum torque level. In some embodiments, since electric power is supplied to each of the windings **386**, **388**, and **390**, this mixed wye-delta configuration may be a stable. As such, the wye-delta starter **374** may remain in this configuration for extended durations of time.

Additionally, as described by the motor torque curve **519**, the motor **24** may again increase produced torque between **t6** and **t7**. More specifically, as described above, in this configuration windings **386**, **388**, and **390** may each be connected delta, thereby enabling the motor **24** to produce less than or equal to 100% of the maximum torque level. In some embodiments, connecting the windings **386**, **388**, and **390** in delta may be a stable configuration. As such, the wye-delta starter **374** may remain in this configuration for extended durations of time.

Thus, in the above described example, the wye-delta starter **374** may utilize at least four intermediate torque levels to gradually ramp up the motor **24**. In fact, a number configurations used to produce the intermediate torque levels may be stable. As such, in addition to merely ramping up the motor **24**, the wye-delta starter **374** may operate the motor **24** at multiple torque controlled configurations. For example, when less than or equal to 55% of the maximum torque is desired, the wye-delta starter **374** may close second wye switching device **378** and first delta switching device **380**.

As described above, power consumption of the motor **24** may correlate with configuration of the wye-delta starter **374**. For example, power consumption may be greater when the connected in a delta configuration than when connected in a wye configuration. As such, when desired torque of the motor **24** capable of being produced by a lower stable configuration, the wye-delta starter **374** may transition to a lower stable state, thereby reducing power consumption.

In other words, the steps described above regarding phase sequential wye-delta switching may be reversed (e.g., transition from delta to an intermediate configuration) in order to reduce the amount of torque produced and power consumed by the motor. That is, by reversing the phase sequential wye-delta steps described, the torque and power consumption may be stepped down. For example, while the

motor is running in delta configuration, the second delta switching device **382** may open and the second wye switching device **378** may close. Accordingly, the motor may be running in a mixed wye-delta configuration and the torque may reduce to less than or equal to 66% of the maximum torque level and power consumption may reduce to less than or equal to 66% of the maximum power consumption. Similarly, the wye-delta starter **374** may transition to any of the intermediate configurations (e.g., stable and less stable intermediate configurations) to achieve the desired torque production and power consumption.

Moreover, the stepwise motor torque and power consumption progressive wye-delta phase sequential switching described above provides various benefits to different applications. For example, a water pump may use the disclosed techniques to slowly increase torque when switching from wye to delta, thereby slowly increasing the amount of water delivered to pipes, as opposed to turning the pump on full bore immediately and blasting water through the pipes. This may increase the lifespan of the pipes. In addition, it may be desirable to put certain loads in a power save mode but still keep the motor running. Thus, if the motor **24** is running in delta, it can reverse the sequential steps, as mentioned above, and ramp down the amount of power consumed until a desired amount is reached. As may be appreciated, the techniques disclosed herein enable configuring the amount of torque produced and power consumed by the motor **24** as desired by utilizing single-pole devices (e.g., single-pole, single current-carrying path switching devices **218**) in a phase sequentially transition.

As such, the configuration of the motor starter (e.g., which switching devices are open and which switching devices are closed) may be based on a desired output torque level or a desired power consumption. As such, one embodiment of a process **520** for determining configuration of the switching devices in the motor starter based on a desired torque level is shown in FIG. **51A**. Generally, process **520** includes selecting a desired torque level (process block **522**), determining a configuration of the motor starter based on the desired torque level (process block **524**), and setting the configuration (process block **526**). In some embodiments, the process **520** may be implemented via computer-readable instructions stored in a non-transitory article of manufacture (e.g., the memory **226**, **20**, **46** and/or other memories) and executed via processor **224**, **19**, **45** and/or other control circuitry.

Accordingly, control circuitry **18** may determine the desired torque level to be produced by the motor **24** (process block **522**). More specifically, in some embodiments, the desired torque level may be input to the control circuitry **18** by a user. In other embodiments, the desired torque level may be pre-configured in the control circuitry **18**. For example, certain loads may be started and the amount of torque produced may be incrementally increased by the control circuitry **18** over a period of time in order to gradually ramp up to 100% torque produced in delta. Alternatively, it may be desirable to reduce the amount of torque a load is producing if it has been running for a certain period of time, and, thus, the control and monitoring circuitry **18** may select a reduced torque level to produce.

In any embodiment, after the desired torque is determined, the control and monitoring circuitry **18** may determine the configuration to apply based upon the desired torque level (process block **524**). As described above with reference to FIGS. **50A-F**, each step of the phase sequential switching may produce a different amount of torque. For example, when the motor is running in a wye configuration

supplying three-phase power to all three windings, less than or equal to 33% torque may be produced (FIG. 50B). When the motor is running in a mixed wye-delta configuration where two windings are in wye and one winding is in delta, less than or equal to 55% torque may be produced (FIG. 50D). Also, when one winding is in delta, one winding is in wye, and one winding is in both wye and delta, less than or equal to 66% torque may be produced (FIG. 50E), and when the motor is running in delta, less than or equal to 100% torque may be produced (FIG. 50F). Thus, the control and monitoring circuitry 18 may select the configuration that achieves the desired torque level.

In alternative embodiments, if the desired torque is not exactly one of the possible options, the control and monitoring circuitry may determine which configuration most closely achieves the desired torque. For example, the control and monitoring circuitry 18 may round the torque up or down based on which available torque values are provided by the different configurations. More specifically, if a user desires the electric motor 24 to produce 40% torque and the two closest available torque options are 33% and 55% torque production, the control and monitoring circuitry 18 may round down to 33% because it is closer to 40% than 55%. As a result, the control and monitoring circuitry 18 may select the wye configuration depicted in FIG. 50B to apply to achieve the torque closest to the desired 40% torque. Additionally or alternatively, the control and monitoring circuitry 18 may round up to 55% torque to ensure that sufficient torque is provided.

In further embodiments, the control and monitoring circuitry 18 may periodically alternate between any two torque states to achieve the desired (e.g., intermediate) torque level. More specifically, the duration at each of the two torque states may adjust the resulting torque level. For example, to produce a torque level of 60.5%, the control and monitoring circuitry 18 may operate the wye-delta starter 374 in a first mixed wye-delta configuration that produces 55% torque with a 50% duty cycle and a second mixed wye-delta configuration that produce 66% torque with a 50% duty cycle. In this manner, various intermediate torque levels may be produced, which may be particularly useful for high inertia loads like long conveyer lines and long sections of pipe (e.g., a water hammer).

Once the configuration is determined, the control and monitoring circuitry 18 may set the selected configuration by instructing the switching devices to open or close to implement the determined configuration (process block 526). It should be noted that in some embodiments, determined configuration may be implemented with POW techniques. As described above, utilizing POW techniques may prolong the life span of the switching devices.

It should be further noted that, in some embodiments, the switching devices may be opened or closed in accordance with the phase sequential wye-delta switching. In other words, the control unit 18 may determine the state (e.g., open or closed) of each of the switching device and sequentially instruct each of the switching devices to open, close, or maintain its current state. To help illustrate, if 55% torque level is selected and the motor is started, the control and monitoring circuitry 18 may sequentially open and close the switching device, in accordance with the phase sequential switching, to set the motor in the mixed wye-delta configuration that achieves 55% torque level. Likewise, if the motor is running in delta (e.g., 100% torque) and a lower torque is selected, the control and monitoring circuitry 18 may determine and set a different configuration by reverse the steps in the phase sequential wye-delta switching. Additionally or

alternatively, once the configuration is determined, the control circuitry 18 may instruct the switching devices to implement the configuration in any order, for example, simultaneously.

Similarly, one embodiment of a process 530 for determining configuration of the switching devices in the motor starter based on a desired power consumption is shown in FIG. 51B. Generally, process 530 includes selecting a desired power consumption (process block 532), determining a configuration of the motor starter based on the desired power consumption (process block 534), and setting the configuration (process block 536). In some embodiments, the process 530 may be implemented via computer-readable instructions stored in a non-transitory article of manufacture (e.g., the memory 226, 20, 46 and/or other memories) and executed via processor 224, 19, 45 and/or other control circuitry.

As can be appreciated, process 530 includes many of the same processing steps as process 520. Specifically, the control circuitry 18 may determine a desired power consumption (process block 532). In some embodiments, the control and monitoring circuitry 18 may select the power consumption level based upon the type of load, pre-configured power modes (e.g., power save mode), power consumption schedules, and so forth. For example, the control circuitry 18 may determine amount of power consumption based on the amount of power available. In other words, if the control and monitoring circuitry 18 determine that a high amount of power is available, the control and monitoring circuitry 18 may determine that the maximum power consumption may be utilized. On the other hand, if the control and monitoring circuitry 18 determine that a low amount of power is available, the control and monitoring circuitry 18 may determine that a power consumption less than the maximum should be utilized.

As described with reference to FIGS. 50A-F, each varying configuration in the wye-delta starter may result in different power consumptions. Thus, the control and monitoring circuitry 18 may determine the motor configuration based upon the desired power consumption level (process block 534). That is, the control and monitoring circuit 18 may select the configuration (e.g., wye, mixed wye-delta, delta, etc.) that consumes the desired amount of power. The control and monitoring circuitry 18 may then instruct the switching devices to implement the determined configuration.

Based on the above, the described techniques enables running a wye-delta motor starter with varying torque levels and varying power consumptions simply by opening and closing switching devices in the motor starter.

#### Operator-Initiated Point-on-Wave Switching

As used in the various operations described herein, switching device 218 may be used to selectively connect and/or disconnect electric power from a load 14. For example, in a close operation, switching devices 218 may be used to connect three-phase electric power to an electric motor 24 in a manner that reduces electric arcing. More specifically, as described above, two phases may be connected at a first time in coordination with a predicted current zero-crossing and the third phase may be connected based upon a subsequent predicted current zero-crossing. In other words, the switching device 218 may close at specific points on the electric power waveform.

In some embodiments, the various operations may be initiated by an operator. For example, an operator may instruct the switchgear 16 to connect electric power to the load 14 via a human-machine interface on the control and monitoring circuitry 18. Accordingly, the operator instruc-

tion may be received at any suitable time during operation via the network 21. In other words, different operator instructions may be received independent of the electric power to be connected or disconnected from the load. Thus, to perform the operator initiated operation at specific points on the electric power waveform, the control and monitoring circuitry 18 may take into account the unpredictable nature of when an operator instruction is received.

To help illustrate, FIG. 52 depicts a source voltage waveform 540 of one phase of electric power supplied by the power source 12 during an operator-initiated make operation. As described above, an operator instruction to make may be received independent from the source voltage 540. In other words, in the depicted embodiment, the operator instruction may be received at some time before tR. To account for the unpredictable timing of receiving the operator instruction, a reference point 542 in the future may be selected. In the depicted embodiment, the reference point 542 corresponds to a voltage zero-crossing (e.g., a predicted current zero-crossing) at tR. In other embodiments, any suitable reference point may be used.

From the reference point 542, the close operation may be performed. More specifically, as described above, the processor 224 may determine the expected make time 544 of the switching device 218. The processor 224 may determine a specific point 546 that is at least the expected make time later than the reference point 542 to enable the switching device 218 to close at the specific point 546. Additionally, the processor 224 may determine when to apply the current profile (e.g., pull-in current) to the operating coil 220 to make at the desired point 546 and instruct the operating current to apply the current profile at the determined time.

More generally, a process 548 for performing an operator-initiated operation is shown in FIG. 53. The process 548 may be implemented via computer-readable instructions stored in the tangible non-transitory memory 226, 20, 46 and/or other memories and executed via processor 224, 19, 45 and/or other control circuitry. Generally, the process 548 includes receiving an operator instruction (process block 550), determining the electric power waveform (process block 552), selecting a reference point (process block 554), and initiating the operation (process block 556).

In some embodiments, the control and monitoring circuitry 18 may receive the operator instruction via a human-machine interface, such as a keyboard or a push button, at any suitable time during operation (process block 550). More specifically, the operator instruction may contain an instruction to perform a specific operation. For example, the operator may instruct the wye-delta starter 374 to transition from wye to delta. Accordingly, the control and monitoring circuitry 18 may determine what operation to perform based on the operator instruction.

Additionally, as described above, the operation may be carried out by making and/or breaking switching devices 218 at specific points on the electric power waveform. Accordingly, the control and monitoring circuitry 18 may determine the electric power waveforms based on sensor measurement feedback (process block 552). More specifically, the control and monitoring circuitry 18 may determine particular electric power waveforms based on the operation that will be performed. For example, when the operation is a make operation, the control and monitoring circuitry 18 may determine the source voltage waveform. Additionally, when the operation is a break operation, the control and monitoring circuitry 18 may determine the current voltage waveform.

It should be noted that although the depicted embodiment depicts that the electric power waveform is determined in response to the operator instruction, additionally or alternatively, the control and monitoring circuitry 18 may continuously determine the electric power waveforms. In other words, the electric power waveforms may be determined regardless of whether an operator instruction is received. For example, the control and monitoring circuitry 18 may determine the source voltage waveform and the source current waveform throughout operation. In some embodiments, continuously determining the electric power waveforms may enable diagnostics on the source 12, the switching device 218, the load 14, or any combination thereof.

On the electric power waveform, the control and monitoring circuitry 18 may then select a reference point 542 in the future (process block 554). As described above, the reference point may be used to account for the unpredictable timing of the operator instruction. Accordingly, in some embodiments, the reference point 542 may be selected based on repeatable criteria to enable the operation to be initiated from a predictable starting point. For example, the reference point 542 may be selected from the future voltage zero-crossings on the electric power waveform.

From the reference point, the control and monitoring circuitry 18 may initiate the operation (process block 556). More specifically, the control and monitoring circuitry 18 may determine which switching device 218, and more specifically which operating coil driver circuitry 222, will be used to carry out the operation. Additionally, the control and monitoring circuitry 18 may determine the desired make times and/or desired break times for each switching device 218. As described above, the desired make times and desired break times may be specific points on the electric power waveform. In other words, the control and monitoring circuitry 18 may coordinate the switching of the various switching device 218 at specific points on a wave to perform the operation. As described herein, examples of the operation may include closing switching devices 218, opening switching devices 218, transitioning from wye to delta, transitioning from delta to wye, setting a specific torque or power level, reversing an electric motor 24, or bypassing a load, such as a motor drive.

It should be noted that there are certain asymmetrical edge conditions that may be taken into consideration when attempting to break ahead of a current zero-cross and/or when setting the electrical degree separations of making and breaking the switching devices. For example, if the selected reference point or amount of electrical degrees actually causes an opening to occur after a current zero-crossing there may be penalizing consequences. In fact, missing a current zero-crossing mark when breaking may increase arcing because a half line cycle of increasing current is applied during the opening in the switching device and the stronger arc may prevent the switching device from opening. Thus, it may be desirable to miss the mark short of the current zero-crossing and open when the current is going downward on a half cycle to the current zero-cross, as opposed to missing the mark after the current zero-crossing.

Additionally or alternatively, the control and monitoring circuitry 18 may determine whether to perform process 548 based on the importance of the operator instruction. For example, although the switching device 218 may break at specific points on a wave to reduce electric arcing, it may be desirable to remove electric power from the load 14 as soon as possible. In other words, the control and monitoring circuitry 18 may determine the importance of the operator

instruction and weigh the importance against the consequences of performing the operation at any point on the wave.

#### Synchronous Re-Closure

As described above, one or more switching devices **218** may be used to connect and/or disconnect electric power from an electric motor **24**. For example, electric power may be connected to rotate the electric motor **24**. Once the electric motor **24** is spinning, electric power may be disconnected from the electric motor **24** for various reasons. Even though electric power is removed, the momentum of the electric motor **24** and any load actuated by the motor (e.g., a fan **47**, a conveyer belt **48**, or a pump **50**) may keep rotating the electric motor **24** while friction begins to slow the electric motor **24**. As the electric motor **24** continues to rotate, a back electromotive force (EMF) is generated. In other words, the electric motor **24** acts as a generator to produce a voltage (e.g., back EMF) with a changing frequency.

To restart the electric motor **24**, electric power may be reconnected to the electric motor **24**. In some embodiments, it may be desirable to restart the electric motor **24** as soon as possible. For example, if an electric motor **24** in a chiller **54** completely stops, the gas and liquid refrigerant in the chiller **54** may become displaced. Thus, to restart the electric motor **24** may take an inconvenient period of time. Accordingly, electric power may be reconnected while the electric motor **24** is still rotating. As described above, the electric motor **24** generates a back EMF with a changing frequency commensurate with its rotational frequency while it is rotating. However, since the frequency is changing, the back EMF and the electric power to be reconnected to electric motor **24** may be out of phase. In some embodiments, when electric power is reconnected while the electric power is lagging behind the back EMF, negative torque may be generated in the electric motor **24**, which may decrease the lifespan of the motor and/or a connected load or result in surge currents that trip protection circuitry.

Accordingly, one embodiment of the present disclosure describes a method for synchronously re-closing (i.e., reconnecting) electric power to an electric motor **24**. More specifically, the method includes starting a counter when either the source electric power or the back EMF crosses zero volts (i.e., voltage zero-crossings) and stopping the counter at the next subsequent voltage zero-crossing. Additionally, the method includes monitoring the counter value trend to determine whether the source electric power or the back EMF is leading. Furthermore, the method includes reconnecting the source electric power while it is leading the back EMF based at least in part on the counter value trend. More specifically, the source electric power may be reconnected at or after a local minimum in the counter value trend. In other words, the local minimum in the counter value trend may indicate when the source electric power switches from lagging to leading the back EMF. Thus, reconnecting at or after a local minimum facilitates reconnecting the source electric power when it is leading the back EMF, which reduces the chances of producing negative torque when re-closing. Additionally, it may be beneficial to begin using the counter to monitor voltage zero-crossings as soon as the electric motor is disconnected to reduce the likelihood of the electric power and the EMF from being 180° out of phase when re-closing.

To help illustrate, FIG. **54** is a plot that depicts the source electric power voltage waveform **558** and the back EMF voltage waveform **560** for one phase. As can be appreciated, the waveforms for the other two phases of three-phase

electric power will be offset by 120 degrees. In some embodiments, the waveforms may be determined based on measurements gathered by sensors **22** that monitor voltage at the power source **12** and sensors **22** that monitor voltage at the electric motor **24**. Additionally, FIG. **54** depicts the counter value **562**.

As depicted, the source voltage **558** and the back EMF voltage **560** have different frequencies. Thus, over time, the source voltage **558** and the back EMF voltage **560** will drift into and out of phase from one another. For example, at **t1**, the source voltage **558** is leading the back EMF voltage **560**. As the phases drift past each other, at **t4**, the source voltage **558** transitions from leading to lagging behind the back EMF voltage **560**. As used herein, “leading” is generally intended to describe when one waveform is between 0 to 180 degrees ahead of a subsequent waveform, and “lagging” is generally intended to describe when one waveform is between 0 to 180 degrees behind a preceding waveform.

Thus, to facilitate reconnecting the source electric power when the source voltage **558** is leading the back EMF voltage **560**, the control and monitoring circuitry **18** (e.g., processor **224**) may determine when the source voltage **558** transitions from lagging to leading. In some embodiments, the control and monitoring circuitry **18** may utilize a counter, such as a free running counter (FRC) included in the processor **224**, to facilitate keeping track of the transitions.

More specifically, the counter may be started at either a source voltage **558** zero-crossing or a back EMF voltage **560** zero-crossing. The counter may continue counting until a subsequent voltage zero-crossing is reached. For example, the source voltage **558** zero-crossing at **t1** starts the counter. As the counter runs, the counter value **562** continues to increase. The counter stops at the next subsequent voltage zero-crossing, which is the back EMF voltage **560** zero crossing at **t2**. After **t2**, the counter value **562** is reset. Thus, the counter value **562** may be used to indicate the time difference between adjacent voltage zero-crossings. In other words, the counter value **562** at **t2** indicates the lead the source voltage **558** has over the back EMF voltage **560** (e.g., time difference between **t1** and **t2**). Since the frequency of the source voltage **558** is higher than the back EMF voltage **560**, the source voltage’s lead over the back EMF voltage **560** continues to increase. Accordingly, as depicted, the trend of the counter value **562** is increasing when the source voltage **558** is leading.

It is noted that the counter may stop at any subsequent voltage zero-crossing. For example, the source voltage **558** zero-crossing at **t3** starts the counter and the counter value **562** increases until the subsequent source voltage **558** zero-crossing at **t4**. In other words, the counter is started and stopped by the same voltage waveform. Thus, the counter value **562** at **t4** is at a maximum and corresponds with half the period of the source voltage **558** (e.g., 180 degrees). In other words, the source voltage **558** is ahead of the back EMF voltage **560** by more than 180 degrees. Thus, based on the definitions above, the source voltage **558** has transitioned to lagging behind the back EMF voltage **560**. In other words, a local maximum of the counter value **562** trend indicates the transition of the source voltage **558** from leading to lagging behind the back EMF voltage **560**.

Accordingly, after **t4**, the source voltage **558** is lagging behind the back EMF voltage **560**. As described above, the frequency of the source voltage **558** is higher than the back EMF voltage **560**. In other words, the source voltage **558** lag behind the back EMF voltage **560** continues to decrease. Accordingly, as depicted, the trend of the counter value **562** is decreasing when the source voltage **558** is lagging.

As the amount of lag continues to decrease, the source voltage 558 eventually overtakes the back EMF voltage 560 and transitions to leading the back EMF voltage 560. Similar to the transition from leading to lagging, the transition from lagging to leading may be based on the counter value 562 trend. For example, minimum amount of lag occurs at t5. Accordingly, as depicted, a first minimum counter value 562 occurs at t5. Thus, the source voltage 558 will shortly thereafter transition to leading the back EMF voltage 560. Additionally, as depicted, a second minimum counter value 562 occurs at t6 because the source voltage 558 has transitioned to slightly leading the back EMF voltage 560. In other words, a local minimum of the counter value 562 trend indicates the transition of the source voltage 558 from lagging to leading the back EMF voltage 560.

Accordingly, the electric power may be reconnected to the electric motor 24 when the source voltage 558 is leading the back EMF voltage 560 based at least in part on the counter value 562. One embodiment of a process 564 for reconnecting electric power to the electric motor 24 is shown in FIG. 55. Generally, the process 564 includes starting a counter at a source voltage zero-crossing or a back EMF voltage zero-crossing (process block 566), stopping the counter at the next source voltage zero-crossing or back EMF voltage zero-crossing (process block 568), monitoring the counter value trend (process block 570), and reconnecting electric power after a local minimum in the counter value trend (process block 572).

In some embodiments, the processor 224 included in the operating coil driver circuitry 222 may be used to execute the process 564. As described above, the counter used may be included in the processor 224. Accordingly, the processor 224 may start the counter when it detects a source voltage 558 zero-crossing or a back EMF voltage 560 zero-crossing (process block 566). Additionally, the processor 224 may stop the counter when it detects a next subsequent source voltage 558 zero-crossing or a back EMF voltage 560 zero-crossing (process block 568). To facilitate detecting the voltage zero-crossings, sensors 22 that monitor voltage at the power source 12 and/or the electric motor 24 may feedback measurements to enable the processor 224 to determine the source voltage 558 and the back EMF voltage 560.

Additionally the processor 224 may monitor the trend of the counter value 562 (process block 570). More specifically, the processor 224 may store the counter value 562 each time the counter stops, for example in memory 226. Additionally, the processor 224 may store a time corresponding with when each counter value 562 was stopped. Thus, the processor 224 may determine the trend of the counter value 562 by looking at the previously stored counter values 562. For example, in chronological order, a first counter value, a second counter value, and a third counter value may be stored. Thus, when the second counter value is less than the first counter value and the third counter value, the processor 224 may determine that a local minimum occurs at the time corresponding with the second counter value. On the other hand, when the second counter value is higher than the first counter value and the third counter value, the processor 224 may determine that a local maximum occurs at the time corresponding with the second counter value.

Based on the counter value 562 trend, electric power may be reconnected after a local minimum (process block 572). As discussed above, the processor 224 may determine when a local minimum occurs. Accordingly, once the local minimum is detected, the processor 224 may reconnect electric

power to the electric motor 24. In some embodiments, the processor 224 may instruct the operating coil driver circuitry 222 to re-close the switching device 218, which may include setting the operating coil current 250 to the pull-in current. More specifically, once it is determined that the source voltage 558 is leading, the processor 224 may execute process 258 to re-close the switching device 218 at a desired time to make, for example, based upon a predicted current zero-crossing, as described above. Additionally or alternatively, other means for reconnecting the electric power may be used, such as insulated-gate bipolar transistors.

As described above, when the trend of the counter values 562 is increasing, the source voltage 558 is leading the back EMF voltage 560. Thus, if the switching device 218 is closed between t1 to t4, electric power will be reconnected while the source voltage 558 is leading the back EMF voltage 560. However, the amount the source voltage 558 leads the back EMF voltage 560 may affect the increase in positive torque generated in the electric motor 24 when electric power is reconnected. Accordingly, to limit the positive torque produced, a threshold counter value may be used. For example, if trend is increasing (e.g., after a local minimum) and the counter value 562 is less than the threshold value, the switching device 218 may be closed. On the other hand, if counter value 562 is greater than the threshold value, the switching device 218 may wait for a subsequent local minimum to close.

Additionally, as discussed in previous sections, the make operation of the switching device 218 is generally not instantaneous. In other words, the source voltage 558 may be leading the back EMF voltage 560 by a larger amount than when the local minimum was detected. In most embodiments, the amount of torque generated when the source voltage 558 leads the back EMF voltage 560 by between 0-90 degrees will not negatively affect the electric motor 24. Accordingly, the threshold counter value may be reduced to account for the delay.

Nevertheless, in some embodiments, the processor 224 may predict when a local minimum in the counter value 562 will occur. More specifically, the processor 224 may predict the next local minimum based on the load actuated by the electric motor 24. For example, when the electric motor 24 is actuating a pump 50, the electric motor 24 may slow according to a square log curve. Thus, the processor 224 may determine how the frequency of the back EMF voltage 560 generated by the motor will change, which then may be used to predict when the next local minimum will occur.

In fact, in some embodiments, the processor 224 may determine the type of load the electric motor 24 is actuating based at least in part on where the local minimums occur. For example, when the occurrence of the local minimums quickly decreases, the processor 224 may determine that the frequency of the back EMF voltage 560 is quickly decreasing. As such, the processor 224 may determine the relative magnitude of the inertia of a load.

As can be appreciated, the techniques described above may be utilized for reconnecting multiple phases of electric power. For example, process 564 may be executed with regard to each phase independently. Additionally or alternatively, since each phase of the source voltage 558 and the back EMF voltage 560 will be proportionally offset (e.g., by 120 degrees) from one another, the counter may be utilized on a single phase. More specifically, when the processor 224 determines that one phase of the source voltage 558 is leading the back EMF voltage 560, the other phases of the source voltage 558 will also be leading. Thus, in some embodiments, each phase may be connected substantially

simultaneously. Accordingly, this may be useful in an open non-sequential wye-delta starter. For example, after the wye connections open, the electric motor **24** will continue rotating. To close the delta connections, the processor **224** may determine when the source voltage **558** is leading the back EMF voltage **560** by examining a single phase.

#### Switch-Based Detection of Motor Conditions

Utilizing the single-pole switching devices (e.g., single-pole, single current-carrying path switching devices **218** described above) may enable increasing the amount of control over the electric power supplied to the electric motor **24**. For example, the single-pole switching devices may enable independently controlling each phase of supplied three-phase power, which may enable detection of faults (e.g., a phase-to-ground short or a phase-to-phase short) while minimizing duration of the faulty condition and amount of energy present during the faulty condition. As will be described in detail herein, in some embodiments, faults (e.g., a short circuit) may be detected by applying a very brief, low voltage pulse (e.g., lower than the line voltage) to the motor **24** at a point on the sinusoidal waveform coordinated with a voltage zero-crossing. The pulse may be applied for a minimal time sufficient for fault detection. Thus, if a short circuit exists, the energy remains relatively small due to the low voltage and short duration. As a result, the fault may be cleared without tripping any connected circuit breakers, and be detrimental to the electric motor **24** and its windings may be reduced.

Examples of faulty motor conditions that may be detected using the disclosed techniques include a phase-to-ground short, a phase-to-phase short, and a phase-to-phase open circuit, among others. A phase-to-ground short may occur when the insulation to ground has deteriorated and current flows into the ground, for example, in a winding of a motor. A phase-to-phase short may occur when phases come into contact without any load or resistance, such as when wires have been connected improperly (e.g., two phases wired together), an external object has been laid across the wires, two motor windings are shorted, and so forth. Additionally, a phase-to-phase open circuit may occur when windings in a motor are disconnected or otherwise open circuited.

To determine whether such faults exist, a technique referred to as “sniffing,” herein, may be employed. Generally, as will be described in more detail below, sniffing may be defined as momentarily connecting a phase of electrical power to test for a phase-to-ground short and/or momentarily connecting two phases of electrical power to test for phase-to-phase faults. Depending on the load being started, these techniques may be performed before each start or may be performed intermittently over a plurality of starts or during commissioning of a new or revised installation.

The benefits of using the techniques before starting may extend the lifespan of a load (e.g., electric motor **24**) by supply power to the load advantageous for protection circuitry to handle potential fault currents. In fact, in some embodiments, different trip behavior may be used during the sniffing process. For example, the protection circuitry may use a higher protection scheme (e.g., more sensitive) when sniffing and return to a normal protection scheme thereafter. In this manner, any results of a possible fault detection during sniffing may be more effectively mitigated by the protection circuitry.

With the foregoing in mind, FIG. **56A** is a diagrammatical representation of circuitry for detecting motor conditions utilizing single-pole switching devices and a corresponding timing diagram, respectively. Although single-pole, single current-carrying path switching devices are described, any

other type of switching device, such as a three-phase offset pole switching device, may be used.

As depicted in the motor system **574**, a power source **12** provides three-phase electric power to an electric motor **24** via three single-pole switching devices (**576**, **578**, and **580**), one for each phase. It should be noted that the single-pole switching devices may include the single-pole, single current path switching devices described above (e.g., contactors, relays, etc.). Additionally or alternatively, single-pole, multiple current-carrying path switching devices may be used. Each phase may be connected to a separate winding on the motor **24** via separate motor terminal. Further, the electric motor **24** may be connected to the ground **582**.

In some embodiments, the operation (e.g., opening or closing) of the single-pole switching devices may be controlled by control and monitoring circuitry **18**. In other words, the control and monitoring circuitry **18** may instruct the single-pole switching devices (**576**, **578**, and **580**) to connect or disconnect electric power. Additionally, as depicted, the control and monitoring circuitry **18** may be remote from the single-pole switching devices (**576**, **578**, and **580**). In other words, the control and monitoring circuitry **18** may be communicatively coupled to the single-pole switching devices (**576**, **578**, and **580**) via a network **21**. In some embodiments, the network **21** may utilize various communication protocols such as DeviceNet, Profibus, or Ethernet. The network **21** may also communicatively couple the control and monitoring circuitry **18** to other parts of the system **574**, such as other control circuitry or a human-machine-interface (not depicted). Additionally or alternatively, the control and monitoring circuitry **18** may be included in the single-pole switching devices (**576**, **578**, and **580**) or directly coupled to the single-pole switching devices, for example, via a serial cable.

Furthermore, as depicted, the electric power output from the single-pole switching devices (**576**, **578**, and **580**) may be monitored by sensors **22**. More specifically, the sensors **22** may monitor (e.g., measure) the characteristics (e.g., voltage or current) of the electric power. Accordingly, the sensors **22** may include voltage sensors and current sensors. Additionally, the characteristics of the electric power measured by the sensors **22** may be communicated to the control and monitoring circuitry **18** to generate waveforms (e.g., voltage waveforms or current waveforms) that depict the electric power. The waveforms generated based on the sensors **22** monitoring the electric power output from the single-pole switching devices (**576**, **578**, and **580**) and supplied to the motor **24** may be used in a feedback loop to, for example, monitor conditions of the motor **24**.

For example, the sensors **22** may sense whether current is flowing when any of the single-pole switching devices (**576**, **578**, and **580**) close and report this information to the control and monitoring circuitry **18**. If current is flowing, the control and monitoring circuitry **18** may then determine how much current is flowing by generating a graph that analyzes change in current ( $di$ ) versus change in time ( $dt$ ), which may be referred to as the “ $di/dt$  slope.” In some embodiments, the control and monitoring circuitry **18** may look at the change in voltage ( $dv$ ) versus change in time ( $dt$ ) to determine the current. As will be explained in detail below, sensing whether current is flowing and determining the change in the current (e.g.,  $di/dt$  slope) may enable detecting whether a phase-to-ground short or phase-to-phase fault is present.

Turning now to the operation of the sniffing process, which may be utilized in some embodiments to detect phase-to-ground faults, the control and monitoring circuitry **18** may utilize POW techniques to determine a desired point

on the waveform to close ahead of a voltage zero-crossing. That is, each phase output by the power source **12**, the control and monitoring circuitry **18** may analyze the phase voltage to determine when it will cross zero on the voltage waveform and pick a desired point to close a few electrical degrees before that zero-crossing. Then, the control and monitoring circuitry **18** may apply a very brief, low line voltage pulse (e.g., lower than the line voltage) to the motor **24** by closing the switching device at the desired point on the wave and quickly (e.g., milliseconds) opening the single-pole switching device. One reason to close a few electrical degrees ahead of a voltage zero-crossing (e.g., on the downward slope of a positive half cycle on the AC waveform) is so that the energy remains small if a short circuit exists due to the low voltage and short duration of the closure. If there is any current (e.g., not zero) sensed by the sensors **22**, then a phase-to-ground fault may be present because the ground has closed the circuit and current is flowing. However, if there is zero current sensed by the sensors **22**, then there may not be a phase-to-ground fault present.

This process may be utilized to test each phase independently. For example, the control and monitoring circuitry **18** may determine a desired point on the phase A waveform to close ahead of a voltage zero-crossing and then send a signal to the single-pole switching device **576** to close accordingly. Very quickly thereafter (e.g., a few milliseconds), the single-pole switching device **576** may be instructed to open by the control and monitoring circuitry **18** and the control and monitoring circuit **18** may be notified if current is sensed by the sensor **22**. If a current is sensed, this may indicate that a phase-to-ground short is present in the motor system **574**. More specifically, if any current (e.g., not zero) is sensed by the sensors a short may be present in a winding of the motor **24** that receives phase A or an interconnect that carries phase A to the motor **24**.

Additionally, the control and monitoring circuitry **18** may determine a desired point on the phase B waveform to close ahead of a voltage zero-crossing and then sending a signal to the single-pole switching device **578** to close accordingly. Very quickly thereafter (e.g., a few milliseconds), the single-pole switching device **578** may be instructed to open by the control and monitoring circuitry **18** and the control and monitoring circuit **18** may be notified if current is sensed by the sensor **22**. More specifically, if any current (e.g., not zero) is sensed by the sensors a short may be present in a winding of the motor **24** that receives phase B or an interconnect that carries phase B to the motor **24**.

Furthermore, the control and monitoring circuitry **18** determine a desired point on the phase C waveform to close ahead of a voltage zero-crossing and then sending a signal to the single-pole switching device **580** to close accordingly. Very quickly thereafter (e.g., a few milliseconds), the single-pole switching device **580** may be instructed to open by the control and monitoring circuitry **18** and the control and monitoring circuit **18** may be notified if current is sensed by the sensor **22**. More specifically, if any current (e.g., not zero) is sensed by the sensors a short may be present in a winding of the motor **24** that receives phase C or an interconnect that carries phase C to the motor **24**. Additionally, if a phase-to-ground fault is detected, it may be desirable to delay starting the motor so that the fault may be remedied and detriment to the motor, load, and/or power circuit may be inhibited.

To help illustrate, the duration of each switching device closing and opening, FIG. **56B** presents a timing diagram of the operations. As depicted, the y-axis represents the voltage

applied to the coil, and the x-axis represents the amount of time in milliseconds. The graph shows all three phases being briefly pulsed and tested consecutively. A first phase-to-ground fault detection begins by closing the single-pole switching device **576** at **t1** and opening the single-pole switching device **576** at **t2**. As may be seen, the elapsed time that the single-pole switching device **576** remained closed between **t1** and **t2** is very brief (e.g., a few milliseconds). In other words, the switching device **576** is pulsed to detect phase-to-ground shorts related to phase A.

Similarly, a second phase-to-ground fault detection begins by closing the single-pole switching device **578** at **t3** and opening the single-pole switching device **578** at **t4**, which is a few milliseconds after at **t3**. As such, the switching device **578** is pulse to detect phase-to-ground shorts related to phase B. Additionally, a third phase-to-ground fault detection begins by closing the single-pole switching device **580** at **t5** and opening the single-pole switching device **580** at **t6**, which is a few milliseconds after **t5**. As such, the switching device **580** is pulsed to detect phase-to-ground shorts related to phase C.

As described above, a low amount of voltage applied briefly to the motor system **574** during the phase-to-ground testing because the switching devices **576-580** are closed near a voltage zero-crossing for each phase. Accordingly, low voltage and brief duration may reduce likelihood of circuit breakers tripping, as well as reduce detriments to the motor and its windings in the instance that a phase-to ground short is present.

Additionally, as described above, the sniffing process may also be utilized to detect phase-to-phase shorts utilizing the system **574** in FIG. **56A**. For example, the control and monitoring circuitry **18** may close and open a single-pole switching device that supplies a first phase of electric power and a single-pole switching device that supplies a second phase of electric power one after the other such that there is a brief overlap between when single-pole switching devices are closed. More specifically, the switching devices may be pulsed when at a phase-to-phase predicted current zero-crossing. In some embodiments, a phase-to-phase predicted current zero-crossing may occur phase-to-phase voltage is at a maximum. In some embodiments, the single pole switching devices arranged in a delta configuration of a wye-delta motor starter may be used to detect for phase-to-phase shorts.

Based on the current measured by the sensors **22**, the control and monitoring circuitry **18** may determine if a phase-to-phase fault is present. More specifically, if no current is sensed, a phase-to-phase open circuit may be present in the motor system **574** and require maintenance. On the other hand, if a current is sensed, the control and monitoring circuitry **18** may determine and analyze the change in the current (e.g., di/dt slope). More specifically, a nearly vertical (e.g., rapidly increasing) di/dt slope may indicate that a phase-to-phase short is present. In some embodiments, the phase-to-phase short may be caused by the interconnects being in contact without a load or the windings are shorted. When a phase-to-phase short is present, the motor windings may be inspected to check the wiring before starting. If the di/dt slope is changing over time or has some angle to it, the control and monitoring circuitry **18** may determine that there is no phase-to-phase fault present.

This process may be repeated for each phase-to-phase combination. For example, the phase A and phase B single-pole switching devices may be controlled as described above to determine whether a phase-to-phase fault is present. Next,

the phase B and phase C single-pole switching devices may be controlled as described above to determine whether a phase-to-phase fault is present. Last, the phase A and phase C single-pole switching devices may be controlled as described above to determine whether a phase-to-phase fault is present.

In some embodiments, the above described sniffing process may be utilized to test for phase-to-ground and phase-to-phase faults in systems with any number of phases. For example, in a system that is receiving single phase electric power, phase-to-ground short testing may be performed by briefly pulsing the switching device closed and opened and measuring for current. In addition, in a system receiving two phase electric power, phase-to-ground testing may be performed for both phases by briefly pulsing the respective switching devices closed and measuring for current. Further, phase-to-phase short testing may be performed by briefly overlapping the closures of the switching devices providing the two phase power and analyzing the di/dt slope.

Further, the above described sniffing process using single-pole switching devices and POW techniques for both phase-to-ground and phase-to-phase short detection may be combined into a thorough detection sequence that may be executed prior to starting the electric motor 24. One embodiment of a process 584 for the sniffing process is shown in FIG. 57, which is a block diagram of logic for detecting motor conditions. The process 584 may be implemented via computer-readable instructions stored in a non-transitory article of manufacture (e.g., the memory 226, 20, 46 and/or other memories) and executed via processor 224, 19, 45 and/or other control circuitry. It should be noted that the depicted sequence of the process 584 is not meant to be limiting, and is for illustrative purposes. Indeed, any one of the process blocks may be rearranged and performed in different order than the depicted embodiment.

In some embodiments, the sequence 584 may begin by testing for phase-to-ground shorts; however, in other embodiments, the sequence 584 may begin by testing for phase-to-phase faults. As such, phase A may be analyzed for a phase-to-ground short by closing the single-pole switching device 576 at a desired point on the waveform ahead of a voltage zero-crossing, opening the single-pole switching device 576 after a few milliseconds, and measuring for current (process block 586). Next, in process block 588, the control and monitoring circuitry 18 may perform sniffing on phase B to detect whether a phase-to-ground short exists (process block 588). That is, the single-pole switching device 578 may be briefly pulsed closed ahead of a voltage zero-crossing. Then, the single-pole switching device 578 may be opened after a few milliseconds, and the current may be measured to determine whether current is flowing to the ground. In process block 590, the control and monitoring circuitry 18 may perform sniffing on phase C to detect whether a phase-to-ground short exists (process block 590).

If there is current sensed by the sensors 22 for any one of the phases, a phase-to-ground short may be present, and a user may determine how much current is present and decide whether to start the load (e.g., electric motor 24) or not. If there is no current sensed for any of the phases during the phase-to-ground detection, or the user decides to proceed with starting, the sequence 584 may move to testing for phase-to-phase faults.

To test for phase-to-phase faults, the control and monitoring circuitry 18 may utilize sniffing to detect whether there is a phase A to phase B fault present (process block 592). Additionally, the control and monitoring circuitry 18 may utilize sniffing to detect whether there is a phase B to

phase C fault present (process block 594) and utilize sniffing to detect whether there is a phase A to phase C fault present (process block 596). More specifically, if the di/dt slope indicates a phase-to-phase fault is present, the user may decide to delay starting until the condition is remedied. The combined sequence of phase-to-ground short detecting process blocks 586-590 and the phase-to-phase short detecting process blocks 592-596 may be executed as desired prior to starting a load (e.g., electric motor 24), such as each time before the load starts or on a periodic basis.

As previously mentioned, the benefits of performing the sequence 584, or a combination thereof, may reduce undesirable maintenance conditions of the electric motor 24 and its windings and inhibit tripping any connected devices through the use of single-pole switching devices and POW techniques to detect faults using near minimal energy.

In an alternative embodiment, sniffing may be performed two single-pole switching devices in series to detect phase-to-ground shorts and/or phase-to-phase faults. It should be noted that the single-pole switching devices may include the single-pole, single current-carrying path switching devices 218. Additionally or alternatively, in some embodiments, single-pole, multiple current-carrying path switching devices may be used. The benefits of using two single-pole switching devices in series is that it may enable a smaller more accurate time window at which electric power is provided to the electric motor 24. FIG. 58A displays an embodiment of a motor system 598 that utilizes two single-pole switching devices in series (576 & 600, 578 & 602, 580 & 604). More specifically, each pair of switching devices is used to supply a single phase of electric power from the power source 12 to the electric motor 24. Additionally, the electric motor 24 may be connected to ground 584.

As such, FIG. 58A is almost identical to FIG. 56A except for the addition of the second set of single-pole switching devices 600, 602, and 604. In some embodiments, the second set of single-pole switching devices 600, 602, and may form a controllable disconnect switch. It should be noted that the disclosed techniques are not limited to two switching devices. Indeed, any number of single-pole switching devices may be utilized. The two single-pole switching devices in series may detect faults by briefly overlapping the closures so as to momentarily allow closing of the circuit. Then, any current that is sensed by sensors 22 may be measured and analyzed by control and monitoring circuitry 18. For example, a phase-to-ground short may be detected if any current is detected by the sensors 22 when the circuit is briefly closed. Also, a phase-to-phase short may be detected if the di/dt slope is nearly vertical after syncing the overlapping closure of the two single-pole switching devices in series for two phases.

Beginning with phase-to-ground short detection, it may be useful to walk through how each pair of single-pole switching devices is utilized. Specifically, with regards to phase A, the control and monitoring circuitry 18 may utilize POW techniques to pick a desired point on the sinusoidal waveform to close the first single-pole switching device 576 in the series ahead of a voltage zero-crossing and another desired point to close the second single-pole switching device 600 ahead of the voltage zero-crossing so that both single-pole switching devices' closures overlap for some brief period of time (e.g., a couple milliseconds) prior to the voltage zero-crossing. Further, the control and monitoring circuitry 18 may also pick a desired point to open the single-pole switching devices 576 ahead of the voltage zero-crossing and another point to open the single-pole switching device 600. Then, the control and monitoring

circuitry 18 may pulse the single-pole switching devices 576 and 600 closed and opened based upon the desired points. In this way, the overlapping closure of both single-pole switching devices may be controlled so that the closure is opened before the voltage crosses zero. Thus, the amount of energy present if there is a fault may be more precisely controlled when two or more single-pole switching devices in series. Also, the amount of time that the switching devices 576 and 600 are closed is minimal. As such, it should be noted that the switching devices may be opened and close anywhere on the sinusoidal waveforms due to the very brief amount of time that their closures overlap.

Accordingly, the control and monitoring circuitry 18 may determine whether a phase-to-phase fault is present based on the current sensed by the sensors 22. The above described phase-to-ground short detection process utilizing two single-pole switching devices in series may be repeated for both phase B and phase C using their respective single-pole switching devices in series (578 & 602, 580 & 604).

The duration of the closure overlap may be better understood with reference to FIG. 58B, which is a timing diagram of closing and opening two single-pole switching devices in series. The y-axis represents the voltage in the coil, and the x-axis represents time in milliseconds. Each solid line and respective dotted line represent a pair of single-pole switching devices in series applying voltage of a single phase to the electric motor 24. For example, the control and monitoring circuitry 18 closes the first single-pole switching device 576 at t1 and closes the second single-pole switching device 600 at t2. Additionally, the control and monitoring circuitry 18 opens the first single-pole switching device 576 at t3 and opens the second single-pole switching device 600 at t4. Accordingly, since both of the single-pole switching devices 576 and 600 are closed between t2 to t3, electric power is supplied to the electric motor 24 between t2 to t3. This timeframe or window may be referred to as the "closure overlap." The closure overlap may be only one or two milliseconds long. Indeed, closing of the single-pole switching devices 576 and 600 may be intended to enable a controlled pulse of line voltage to be applied that has insufficient energy to cause an undesirable maintenance condition to the motor and/or its windings.

It is during the closure overlap that the current is measured to detect phase-to-ground shorts. If any current is sensed by the sensors 22, there may be a phase-to-ground short present. In contrast, if no current is sensed then there may not be a phase-to-ground short present. As depicted, the timings of the closing and openings of the other pairs of single-pole switching devices in series for phase B (t5-t8) and phase C (t9-t12) may be similar. More specifically, as depicted, electric power is applied between t6-t7 and between t10-t11. In other embodiments, the phase-to-ground shorts may be tested in any desirable order. However, two phases should not be tested simultaneously because if the closure overlaps are synced current will be flowing and it may appear as though there is a phase-to-ground fault when there is not.

To further illustrate the points on the sine wave that the two single-pole switching devices in series may close and open, FIG. 59 depicts a graphical representation of timing for the motor condition detection. The graph shows the voltage sine wave for a single phase of electric power over time. For example, the sine wave may represent phase A and the timings (t1-t4) represent the same single-pole switching device closings and openings shown in FIG. 58B.

As described above, the first single-pole switching device 576 may close at t1 and open at t3. Additionally, the second

single-pole switching device 600 may close at t2 and open at t4. Accordingly, electric power may be applied to the electric motor 24 between t2 and t3, which as depicted is slightly before the voltage zero crossing so that the amount of energy available if a fault is present is low. That is, as displayed, the voltage is only applied for a couple of milliseconds while it is low before zero is crossed.

Similarly, the control and monitoring circuitry 18 may also detect phase-to-phase faults utilizing the two single-pole switching devices in series. For example, in some embodiments, the control and monitoring circuitry 18 may pulse closed pairs of single-pole switching devices in series such that electric power is connected for a brief period slightly before a phase-to-phase predicted current zero-crossing. This may enable brief closing of the circuit between phases to apply a small amount of voltage for a few milliseconds so that if a fault exists, the fault may be cleared quickly without causing an undesirable maintenance condition. In addition, the brief closing of the circuit may enable the sensors 22 to sense any current that is flowing and the control and monitoring circuitry 18 to analyze the di/dt slope of the current to determine whether a phase-to-phase fault is present.

More specifically, the control and monitoring circuitry 18 may utilize the two single-pole switching devices and POW techniques to detect phase-to-phase faults between phase A to phase B, phase B to phase C, and phase A to phase C, in any order. Taking phase A to phase B short detection as an example, the control and monitoring circuitry 18 may utilize POW techniques to pick points on phase A and phase B where a phase-to-phase voltage maximum (e.g., a predicted current zero-crossing) occurs. Additionally or alternatively, the phase-to-phase current and/or voltage may be explicitly measured to determine when a current is approaching between phases. For example, the voltage may be measured between phase A and phase B, between phase B and phase C, and between phase A and phase C to determine when to perform the sniffing for phase-to-phase shorts. It is noted that the current conducted may be asymmetrical. As such, it may be possible to determine other desirable points to perform sniffing operations, for example, based at least in part on characteristics of the load.

Next, the control and monitoring circuitry 18 may determine another set of points on the phase A and phase B waveforms that are a few electrical degrees prior to the predicted current zero-crossings to ensure that a low current is applied when the circuit is closed. Then, the control and monitoring circuitry 18 may pulse close and open the pairs of single-pole switching devices for both phase A and phase B to create closure overlaps that coincide (e.g., overlap briefly) between the phases at the determined points before the predicted current zero-crossing.

That is, the control and monitoring circuitry 18 may pulse close the single-pole switching device 576 and then 600 at the desired point before the predicted current zero-crossing to apply voltage for phase A, while at nearly the same time, pulse close the single-pole switching devices 578 and then 602 at the desired point before the predicted current zero-crossing to apply voltage for phase B. Thus, both phases' pairs of single-pole switching devices may create closure overlaps that apply voltage for both phases at the same time in order to detect whether there is a phase-to-phase fault. Quickly thereafter (e.g., milliseconds), the single-pole switching device 576 supplying phase A and the single-pole switching device 578 supplying phase B may be pulsed open before the predicted current zero-crossing to break the circuit, thereby opening the closure overlap.

As such, utilizing the single-pole switching devices in series between phases in this manner may provide the benefit of generating a more accurate pulse that is more precise in both amount of current applied and the duration of current application in relation to the predicted current zero-crossing. As a result, the controlled pulse of line voltage applied may be insufficient to cause an undesirable maintenance condition and/or trip connected devices (e.g., feeder circuit breaker) if a short is present. Further, if a short is detected the electric motor **24** may not be started so that the problem may be remedied and detriments inhibited.

In some embodiments, the above described sniffing process utilizing two switching devices in series may be utilized to test for phase-to-ground and phase-to-phase faults in systems with any number of phases. For example, in a system that is receiving single phase electric power, phase-to-ground short testing may be performed by briefly overlapping the closure of the two switching devices in series and measuring for current. In addition, in a system receiving two phase electric power, phase-to-ground testing may be performed for each individual phase by briefly overlapping the closures of the switching devices in series for that particular phase and measuring for current. Further, phase-to-phase short testing may be performed for a system receiving two phase power by briefly overlapping the closures of the switching devices in series for both phases and analyzing the di/dt slope.

Accordingly, utilizing the sniffing techniques described above may enable controlling the amount and duration of electric power applied to a motor. As such, potential undesirable maintenance conditions that may occur when a fault is present may be reduced and protection circuitry may not trip if a fault is present. More specifically, in the event of a short circuit, the fault current may be much smaller than when closing at full voltage, and the very brief pulse may easily clear the fault current. Thus, expensive repairs may be reduced, equipment up time may be increased, and operator safety may be improved.

#### Modular System Constructions

There are multiple configurations of devices enabled to meet desired needs by leveraging the techniques described herein. Specifically, the electromechanical single-pole switching devices described above, such as the single-pole, single current-carrying path switching devices **218**, provide modularity that enables highly configurable devices. Further, the mechanical interlock described above enhances device configurability by preventing a particular switching device from closing when an interlocked switching device is closed, which may inhibit shorts. One such modular device that utilizes the techniques described herein is the wye-delta starter described above. Indeed, in the embodiments described below, 5-pole, 6-pole, 8-pole, and 9-pole wye-delta starters are enabled utilizing electromechanical single-pole switching devices (e.g., single-pole, single current-carrying path switching devices) in conjunction with the mechanical interlock. It should be noted that the number of poles may correspond to the number of single-pole switching devices utilized in the configuration. In general, using the single-pole switching devices in the described wye-delta starter embodiments may result in devices having a compact size, which may save a user money due to less hardware utilized and less complex wiring, and a lower thermal footprint, which may improve ability to package such a device in a smaller electrical enclosure with a smaller factory footprint.

To help illustrate, one embodiment of a polyphase 5-pole wye-delta starter **374** is shown in FIG. **60**. As depicted, the

5-pole wye-delta starter **374** includes five single-pole switching devices **376**, **378**, **380**, **382**, and **384**, which may be electromechanical single-pole, single current-carrying path switching devices. Additionally or alternatively, the switching devices **376**, **378**, **380**, **382**, and **384** may include single-pole, multiple current-carrying path switching devices. Specifically, the 5-pole wye-delta starter **374** includes two wye switching devices **376** and **378** and three delta switching devices **380**, **382**, and **384**. The switching devices are coupled to three-phase power from three mains lines **392**, **394**, and **396**, and are further coupled to three motor windings **386**, **388**, and **390**. An advantage provided by using the single-pole, single current-carrying path switching devices instead of switches arranged on a common switch carrier is the number of power poles may be reduced (e.g., fewer switching devices). For example, the 5-pole wye-delta switching device utilizes two wye switching devices (**376** and **378**) instead of three.

As depicted, the first delta switching device **380** and the first wye switching device **376** are mechanically coupled via a first interlock **608**, and the second delta switching device **382** and the second wye switching device **378** are mechanically coupled via a second interlock **610**. It should be noted that the first interlock **608** and second interlock **610** may be the mechanical interlock described above. As such, only one of the first delta switching device **380** and the first wye switching device **376** may be closed at a time. Similarly, only one of the second delta switching device **382** and the second wye switching device **378** may be closed at a time. In addition, operation of the wye-delta starter **374** may be controlled by the control and monitoring circuitry **18**.

Additionally, as depicted, the output of first delta switching device **380** and the output of first wye switching device **376** are electrically coupled via a first interconnection **628**. Similarly, the output of second delta switching device **382** and the output of second wye switching device **378** are electrically coupled via a second interconnection **624**. Furthermore, the output of third delta switching device **384**, the input of first wye switching device **376**, and the input of first delta switching device **380** are electrically coupled via a third interconnection **620**.

In the operation, the wye-delta starter **374** may receive a signal to start the motor. Using the techniques above, the wye-delta starter **374** may initially execute a wye two-step start and then phase sequential wye-delta switching. Both processes may include the control and monitoring circuitry **18** opening and/or closing specified switching devices in a sequential order so as to minimize negative torque, current spikes, and oscillation magnitudes. As such, the wye two-step start may be initiated by the second wye switching device **378** closing. Thus, a first phase of electric power (e.g., phase A) is connected from the mains line **394** to the motor second winding **388** and a second phase of electric power (e.g., phase B) may be connected from the mains line **396** to the third winding **390**. During the second step of the wye two-step start, the second first wye switching device **376** closes and a third phase of electric power (e.g., phase C) is connected from the mains line **392** to the first winding **386** of the electric motor **24**. Thus, when the wye switching devices **376** and **378** are the only switching devices closed in the wye-delta starter **374**, the motor is running in a wye configuration.

When initiated, the wye-delta starter **374** may execute the phase sequential wye-delta switching. As such, the switching may begin by opening the first wye switching device **376**. As a result of breaking first wye switching device **376**, the motor windings **388** and **390** are being supplied power.

Next, the first delta switching device **380** may be closed, resulting in first winding **386** being connected line **394** to line **392**. Windings **388** and **390** are still connected line **394** to line **396**. As a result of first delta switching device **380** closing, the windings **386**, **388**, and **390** are receiving three-phase unbalanced power due to the motor running in a mixed wye-delta configuration. Then, the second wye switching device **378** may be opened as the third step in the phase sequential wye-delta transition. As a result, only motor first winding **386** is receiving power and the electric motor **24** is single phasing. Further, the second delta switching device **382** may be closed after the opening of the second wye switching device **378**, thereby providing power to second winding **388** in addition to **386**. Last, the third delta switching device **384** may be closed in order to complete the delta configuration. Thus, three-phase power may be supplied via lines **392**, **394**, and **396** to the motor windings **386**, **388**, and **390** in a delta configuration.

As previously discussed, in some embodiments, the 5-pole wye-delta starter **374** may be implemented with single-pole, single current-carrying path switching devices **218**, as depicted in FIG. **61**. More specifically, as depicted, the mains line **394** is electrically coupled to input terminal **612** of the first delta switching device **380**, the mains line **396** is electrically coupled to input terminal **614** of the second delta switching device **382**, and the mains line **392** is electrically coupled to input terminal **616** of the third delta switching device **384**.

Additionally, the output terminal **626** of the first delta switching device **380** and the output terminal of the first wye switching device **376** are electrically coupled by the first interconnect **628** (e.g., a first bus bar). Similarly, the output terminal **632** of the second delta switching device **382** and the output terminal **636** of the second wye switching device **378** are electrically coupled by the second interconnect **634** (e.g., a second bus bar). Furthermore, the input terminal **618** of the first wye switching device **376**, the input terminal **622** of the second wye switching device **378**, and the output terminal **624** of the third delta switching device **384** are electrically coupled by the third interconnect **620** (e.g., a third bus bar).

Thus, the first winding **386** may be electrically coupled to either output terminal **626**, output terminal **630**, or the first interconnect **628**. Additionally, the second winding **388** may be electrically coupled to either output terminal **632**, output terminal **624**, or the second interconnect **634**. Furthermore, the third winding **390** may be electrically coupled to either input terminal **618**, input terminal **622**, or output terminal **624**.

Additionally, as depicted, the first delta switching device **380** and the first wye switching device **376** are mechanically coupled by the first interlock **608**. Similarly, second delta switching device **382** and second wye switching device **378** are mechanically coupled by the second interlock **610**. It should be noted that the first interlock **608** and second interlock **610** may be the mechanical interlock described above.

In another embodiment, a polyphase 6-pole wye-delta starter **442** is enabled utilizing six switching devices, as shown in FIG. **62**. As with the 5-pole wye-delta starter, the switching devices may be electromechanical single-pole, single current-carrying path switching devices independently operated by the control and monitoring circuitry **18**. Additionally or alternatively, the switching devices may be single-pole, multiple current carrying path switching devices. As depicted, the configuration of the switching devices is almost identical as the 5-pole wye-delta starter

except another wye switching device is included in this embodiment. Indeed, the 6-pole wye-delta starter **442** includes six switching devices **444**, **446**, **448**, **450**, **452**, and **454**. Specifically, the 6-pole wye-delta starter **442** includes three wye switching devices **444**, **446**, and **448** and three delta switching devices **450**, **452**, and **454**.

The switching devices are coupled to three-phase power from three mains lines **462**, **464**, and **466**, and are further coupled to three motor windings **456**, **458**, and **460**. As discussed above, the 6-pole wye-delta starter **442** may be controlled by the control and monitoring circuitry **18** to keep track of which switching devices open and/or close first during a start and select a different switching device to open and/or close during the next start. In this way, the control and monitoring circuitry **18** may evenly distribute the number of switching operations each switching device performs, which may increase the lifespan of the switching devices.

As depicted, the first delta switching device **450** and the wye switching **444** are coupled via a first interlock **638**, the second delta switching device **452** and the second wye switching device **446** are coupled via a second interlock **640**, and the third delta switching device **454** and the third wye switching device **448** are coupled via a third interlock **642**. It should be noted that the interlocks **638**, **640**, and **642** may be the mechanical interlocks described above. As such, only one of the first delta switching device **450** and the first wye switching device **444** may be closed at a time, only one of the second delta switching device **452** and the second wye switching device **446** may be closed at a time, and only one of the third delta switching device **454** and the third wye switching device **448** may be closed at a time.

Additionally, as depicted, the output of first delta switching device **450** and the output of first wye switching device **444** are electrically coupled via a first interconnection **660**. Similarly, the output of second delta switching device **452** and the output of second wye switching device **446** are electrically coupled via a second interconnection **666**, and the output of third delta switching device **454** and the output of third wye switching device **448** are electrically coupled via a third interconnection **672**. Furthermore, the input of first wye switching device **444**, the input of second wye switching device **446**, and the input of third wye switching device **448** are electrically coupled via a fourth interconnection **665**.

The steps in the wye two-step start and the phase sequential wye-delta switching using six switching devices are essentially the same as using five switching devices, which was described with reference to FIG. **60**. However, in the circuit diagram **442** depicted in FIG. **62** there are three wye switching devices (**444**, **446**, and **448**), as opposed to two in FIG. **60**. Thus, the order in which the wye switching devices are closed in the wye two-step start may change, and the order in which the wye switching devices are opened in the phase sequential wye-delta switching may change. In particular, regarding the wye two-step start, in order to provide current to the windings using three wye switching devices, one of the steps may close two wye switching devices simultaneously and the other step may close the third switching device. For example, the wye switching devices **446** and **448** may close simultaneously to connect windings **458** and **460** from line **464** to line **466**. Then, in the second step, the third first wye switching device **444** may close in order to complete the wye configuration. If POW techniques are utilized, these closures may occur at desired points on the sinusoidal waveforms as determined by the control and monitoring circuitry **18**.

Once the electric motor **24** is running in wye configuration and the winding current waveforms have reached steady state, the phase sequential switching to delta may initiate. Alternatively, the phase sequential switching to delta may initiate any point after the motor is set in the wye configuration. As with the phase sequential wye-delta switching utilizing a 5-pole wye-delta starter, in one embodiment, the first step in the sequence utilizing a 6-pole wye-delta starter may include opening one of the wye switching devices **444**. Next, the switching device **450** may be closed to connect first winding **456** in delta. After switching device **450** closes, the motor is running in a mixed wye-delta configuration with first winding **456** in delta and windings **458** and **460** in wye. Then, the remaining two closed wye switching devices **446** and **448** may be opened simultaneously and the electric motor **24** may be single phasing (e.g., phase A) with only first winding **456** connected line **462** to line **464**. The switching devices **452** and **454** may be closed following the closure of the switching device **450** either one after the other or simultaneously. As a result, the windings **456**, **458**, and **460** are receiving three-phase electric power and the electric motor is running in a delta configuration.

As previously discussed, in some embodiments, the 6-pole wye-delta starter **442** may be implemented with single-pole, single current-carrying path switching devices **218**, as depicted in FIG. **63**. More specifically, as depicted, the mains line **464** is electrically coupled to input terminal **644** of first delta switching device **450**, the mains line **466** is electrically coupled to input terminal **646** of second delta switching device **452**, and the mains line **462** is electrically coupled to input terminal **648** of third delta switching device **454**.

Additionally, the output terminal **658** of first delta switching device **450** and the output terminal **662** of the first wye switching device **444** are electrically coupled by the first interconnect **660** (e.g., a first bus bar). Similarly, the output terminal **664** of the second delta switching device **452** and the output terminal **668** of the second wye switching device **446** are electrically coupled by the second interconnect **666** (e.g., a second bus bar), and the output terminal **670** of the third delta switching device **454** and the output terminal of the third wye switching device **448** are electrically coupled by the third interconnect **672** (e.g., a third bus bar). Furthermore, the input terminal **650** of the first wye switching device **444**, the input terminal **654** of the second wye switching device **446**, and the input terminal **656** of the third wye switching device **448** are electrically coupled by the fourth interconnect **665** (e.g., a fourth bus bar).

Thus, the first winding **456** may be electrically coupled to either output terminal **658**, output terminal **662**, or the first interconnect **660**. Additionally, the second winding **458** may be electrically coupled to either output terminal **664**, output terminal **668**, or the second interconnect **666**. Furthermore, the third winding **460** may be electrically coupled to either output terminal **670**, output terminal **674**, or the third interconnect **672**.

Additionally, as depicted, the first delta switching device **450** and the first wye switching device **444** are mechanically coupled by the first interlock **638**. Similarly, the second delta switching device **452** and the second wye switching device **446** are mechanically coupled by the second interlock **640**. Furthermore, the third delta switching device **454** and the third wye switching device **448** are mechanically coupled by the third interlock **642**. It should be noted that the interlocks **638**, **640**, and **642** may each be the mechanical interlock described above.

In another embodiment, the polyphase 5-pole wye-delta starter may be modified to isolate the motor windings by adding three mains lines switching devices, which results in the polyphase 8-pole wye-delta starter **676** shown in FIG. **64**. As with the 5-pole wye-delta starter, the switching devices may be electromechanical single-pole, single current-carrying path switching devices independently operated by the control and monitoring circuitry **18**. Additionally or alternatively, the switching devices may be single-pole, multiple current carrying path switching devices. Independent operation enables making/breaking at different times and in different orders. As depicted, the configuration of the switching devices is identical to the 5-pole wye-delta starter except for the addition of three mains lines switching devices in the 8-pole wye-delta starter embodiment. The 8-pole wye-delta starter **676** includes eight switching devices **678**, **680**, **682**, **686**, **688**, **690**, **692**, and **694**.

Specifically, the 8-pole wye-delta starter **676** includes two wye switching devices **678** and **680**, three delta switching devices **682**, **684**, and **686**, and three mains lines switching devices **688**, **690**, and **692**. The three mains lines switching devices **688**, **690**, and **692** are electrically coupled to three-phase power from three mains lines **694**, **696**, and **698** and are further coupled to three motor windings **700**, **702**, and **704** and the delta switching devices **682**, **684**, and **686**. The delta switching devices **682**, **684**, and **686** are also electrically coupled to the wye switching devices **678** and **680** and the windings **700**, **702**, and **704**. An advantage of utilizing the mains line switching devices **688**, **690**, and **692** is that they may be utilized as disconnects in order to protect the electric motor **24** from undesirable maintenance by faulty conditions or the like. Additionally, utilizing the mains lines switching devices **688**, **690**, and **692** may enable testing condition of the electric motor **24** before performing a start. For example, as discussed above, phase-to-ground and phase-to-phase shorts may be tested using the mains lines switching devices. Further, the mains lines switching devices may act as disconnects in case a short is present or the windings need to be isolated from the mains power.

As depicted, the first delta switching device **682** and the first wye switching device **678** are coupled via a first interlock **706**, and the second delta switching device **684** and the second wye switching device **680** are coupled via a second interlock **708**. It should be noted that the interlocks **706** and **708** may be the mechanical interlocks described above. As such, only one of the first delta switching device **682** and the first wye switching device **678** may be closed at a time, and only one of the second delta switching device **684** and the second wye switching device **680** may be closed at a time.

Additionally, as depicted, the output of first delta switching device **682** and the output of first wye switching device **678** are electrically coupled via a first interconnection **738**. Similarly, the output of the second delta switching device **684** and the output of second wye switching device **680** are electrically coupled via a second interconnection **744**. Furthermore, the input of the first wye switching device **678**, the input of the second wye switching device **680**, and the output of the third delta switching device **686** are electrically coupled via a third interconnection **732**.

The steps in the wye two-step start and the phase sequential wye-delta switching using eight switching devices are essentially the same as using five switching devices. However, in the circuit diagram **676** depicted in FIG. **64** there are three mains lines switching devices (**694**, **696**, and **698**) that are isolating the windings (**700**, **702**, and **704**). Thus, when a signal to start the motor is received by the 8-pole wye-delta

starter, the mains line switching devices (688, 690, and 692) may close prior to running the wye two-step start and the phase sequential wye-delta switching. After the mains line switching devices are closed, the wye two-step start and the phase sequential wye-delta switching may be executed the same as the 5-pole wye-delta starter.

Specifically, the wye two-step start may begin by the second wye switching device 680 closing. Thus, windings 702 and 704 may be receiving power from line 696 to line 698. During the second step of the wye two-step start the first wye switching device 678 closes and a third phase of electric power (e.g., phase C) is connected from the mains line 694 to the first winding 700 of the electric motor 24. Thus, when the wye switching devices 678 and 680 and the mains line switching devices 688, 690, and 692 are the only switching devices in the 8-pole wye-delta starter 676 that are closed, the motor is running in a wye configuration.

When initiated, the 8-pole wye-delta starter 676 may execute phase sequential wye-delta switching. As such, the transition may begin by opening the first wye switching device 678. As a result of breaking switching device 678, only motor windings 702 and 704 are being supplied power. Next, the first delta switching device 682 may be closed, resulting in first winding 700 being connected line 696 to line 694 in delta. Windings 702 and 704 are still connected line 696 to line 698 in wye. Thus, as a result of the first delta switching device 682 closing, the windings 700, 702, and 704 are receiving three-phase unbalanced power due to the motor running in a mixed wye-delta configuration. Then, the second wye switching device 680 may be opened as the third step in the phase sequential wye-delta transition. As a result, only motor first winding 700 is receiving power and the electric motor 24 is single phasing. Further, the second delta switching device 684 may be closed after the opening of the second wye switching device 680, thereby providing power to second winding 702 in addition to 700.

The third delta switching device 686 may then be closed in order to complete the delta configuration. Thus, three-phase power being may be supplied via lines 694, 696, and 698 to the motor windings 700, 702, and 704 in a delta configuration. However, if at any time the control and monitoring circuitry 18 determines that power needs to be cut off from the electric motor 24, the mains line switching devices (688, 690, and 692) may be signaled to open one at a time or all at once. If POW techniques are utilized the openings may be ahead of current zero-crossings.

In some embodiments, the 8-pole wye-delta starter 676 may be implemented with single-pole, single current-carrying path switching devices 218, as depicted in FIG. 65. More specifically, as depicted, the first mains line 696 is electrically coupled to input terminal 712 of the first mains line switching device 690, the second mains line 698 is electrically coupled to input terminal 714 of the second mains line switching device 692, and the third mains line 694 is electrically coupled to input terminal 710 of the third mains line switching device 688. The output terminal 716 of the third mains line switching device 688 is electrically coupled to the input terminal 718 of the third delta switching device 682, the output terminal 720 of the first mains line switching device 690 is electrically coupled to the input terminal 722 of the first delta switching device 682, and the output terminal 724 of the second mains line switching device 692 is electrically coupled to the input terminal 726 of the second delta switching device 684.

Additionally, the output terminal 736 of first delta switching device 682 and the output terminal 740 of the first wye switching device 678 are electrically coupled by the first

interconnect 738 (e.g., a first bus bar). Similarly, the output terminal 742 of the second delta switching device 684 and the output terminal 746 of the second wye switching device 680 are electrically coupled by the second interconnect 744 (e.g., a second bus bar). Furthermore, the input terminal 728 of the first wye switching device 678, the input terminal 730 of the second wye switching device 746, and the output terminal 734 of the third delta switching device 686 are electrically coupled by the third interconnect 732 (e.g., a third bus bar).

Thus, the first winding 700 may be electrically coupled to either output terminal 736, output terminal 740, or the first interconnect 738. Additionally, the second winding 702 may be electrically coupled to either output terminal 742, output terminal 746, or the second interconnect 744. Furthermore, the third winding 704 may be electrically coupled to either output terminal 734, input terminal 728, input terminal 730, or the third interconnect 732.

Additionally, as depicted, the first delta switching device 682 and the first wye switching device 678 are mechanically coupled by the first interlock 706. Similarly, the second delta switching device 684 and the second wye switching device 680 are mechanically coupled by the second interlock 702. It should be noted that the interlocks 702 and 706 may each be the mechanical interlock described above.

In another embodiment, the polyphase 6-pole wye-delta starter may be modified to isolate the motor windings by adding three mains line switching devices, which results in the polyphase 9-pole wye-delta starter 748 shown in FIG. 66. As with the 6-pole wye-delta starter, the switching devices may be electromechanical single-pole, single current-carrying path switching devices independently operated by the control and monitoring circuitry 18. Additionally or alternatively, the switching devices may include single-pole, multiple current carrying path switching devices. Independently operating the switching devices enables making/breaking at different times and in different orders. Further, the 9-pole wye-delta starter 748 may be enabled with or without POW techniques. As depicted, the configuration of the switching devices is almost identical as the 6-pole wye-delta starter except for the addition of three mains line switching devices in the 9-pole wye-delta starter embodiment. As such, the 9-pole wye-delta starter 748 includes nine switching devices 750, 752, 754, 756, 758, 760, 762, 764, and 766.

Specifically, the 9-pole wye-delta starter 748 includes three wye switching devices 750, 752, and 754, three delta switching devices 756, 758, and 760, and three mains line switching devices 762, 764, and 766. The three mains line switching devices are electrically coupled to three-phase power from three mains lines 768, 770, and 772 and are further electrically coupled to three motor windings 774, 776, and 778 and the delta switching devices 756, 758, and 760. The delta switching devices 756, 758, and 760 are also electrically coupled to the wye switching devices 750, 752, and 754 and the windings 774, 776, and 778. An advantage of utilizing the mains line switching devices 762, 764, and 766, is that they may be utilized as disconnects in order to protect the electric motor 24 from undesirable maintenance by faulty conditions or the like. By acting as a gatekeeper to the mains power, the mains line switching devices 762, 764, and 766 are able to isolate the windings 774, 776, and 778. Further, in some embodiments, the mains line switching devices 762, 764, and 766 may be utilized to test for phase-to-ground and phase-to-phase shorts before starting the motor.

As depicted, the first delta switching device **756** and the wye switching **750** are coupled via a first interlock **780**, the second delta switching device **758** and the second wye switching device **752** are coupled via a second interlock **782**, and the third delta switching device **760** and the third wye switching device **754** are coupled via a third interlock **784**. It should be noted that the interlocks **780**, **782**, and **784** may be the mechanical interlocks described above. As such, only one of the first delta switching device **756** and the first wye switching device **750** may be closed at a time, only one of the second delta switching device **758** and the second wye switching device **752** may be closed at a time, and only one of the third delta switching device **760** and the third wye switching device **754** may be closed at a time.

Additionally, as depicted, the output of first delta switching device **756** and the output of first wye switching device **750** are electrically coupled via a first interconnection **826**. Similarly, the output of the second delta switching device **758** and the output of second wye switching device **752** are electrically coupled via a second interconnection **832**, and the output of the third delta switching device **760** and the output of the third wye switching device **754** are electrically coupled via a third interconnection **820**. Furthermore, the input of the first wye switching device **750**, the input of the second wye switching device **752**, and the input of the third wye switching device **754** are electrically coupled via a fourth interconnection **831**.

The steps in the wye two-step start and the phase sequential wye-delta switching using nine switching devices are essentially the same as using six switching devices. However, in the circuit diagram **748** depicted in FIG. **66** there are three mains line switching devices **762**, **764**, and **766** that are isolating the windings **774**, **776**, and **778**. Thus, before running the wye two-step start and the phase sequential wye-delta switching, the control and monitoring circuitry **18** may send signals to close the mains line switching devices **762**, **764**, and **766**. After the mains line switching devices are closed, the wye two-step start and the phase sequential wye-delta switching may be executed the same as the 6-pole wye-delta starter.

More specifically, the control and monitoring circuitry **18** may initiate the wye two-step start by closing the wye switching devices **754** and **752** simultaneously to connect windings **776** and **778** from line **770** to line **772**. Then, in the second step of the wye two-step start, the third first wye switching device **750** may close in order to complete the wye configuration and provide power to first winding **774**.

Once the electric motor **24** is running in wye configuration and the winding current waveforms have reached steady state, the phase sequential switching to delta may initiate. Alternatively, the phase sequential switching to delta may initiate any point after the motor is set in the wye configuration. In some embodiment, the first step in the sequence may include opening the wye switching devices **750**. Thus, only windings **776** and **778** are connected and receiving power from line **770** to **772**. Next, the switching device **756** may be closed to connect first winding **774** in delta. After switching device **756** closes, the motor is running in a mixed wye-delta configuration with first winding **774** in delta and windings **776** and **778** in wye. Then, the remaining two closed wye switching devices **752** and **754** may be opened simultaneously and the electric motor **24** may be single phasing (phase A) with only first winding **774** connected between line **768** to line **770**. As a result, the windings **774**, **776**, and **778** may receive three-phase electric power from lines **768**, **770**, and **772**, and the electric motor **24** is running in a delta configuration.

In some embodiments, the 9-pole wye-delta starter **676** may be implemented with single-pole, single current-carrying path switching devices **218**, as depicted in FIG. **67**. More specifically, as depicted, the first mains line **770** is electrically coupled to input terminal **788** of the first mains line switching device **764**, the second mains line **772** is electrically coupled to input terminal **790** of the second mains line switching device **766**, and the third mains line **768** is electrically coupled to input terminal **786** of the third mains line switching device **762**. The output terminal **792** of the third mains line switching device **762** is electrically coupled to the input terminal **794** of the third delta switching device **760**, the output terminal **798** of the first mains line switching device **764** is electrically coupled to the input terminal **800** of the first delta switching device **756**, and the output terminal **804** of the second mains line switching device **766** is electrically coupled to the input terminal **806** of the second delta switching device **758**.

Additionally, the output terminal **824** of first delta switching device **756** and the output terminal **828** of the first wye switching device **750** are electrically coupled by the first interconnect **828** (e.g., a first bus bar). Similarly, the output terminal **830** of the second delta switching device **758** and the output terminal **834** of the second wye switching device **752** are electrically coupled by the second interconnect **832** (e.g., a second bus bar), and the output terminal **828** of the third delta switching device **760** and the output terminal **822** of the third wye switching device **754** are electrically coupled by the third interconnect **820** (e.g., a third bus bar). Furthermore, the input terminal **814** of the first wye switching device **750**, the input terminal **816** of the second wye switching device **752**, and the input terminal **810** of the third wye switching device **754** are electrically coupled by the fourth interconnect **831** (e.g., a fourth bus bar).

Thus, the first winding **774** may be electrically coupled to either output terminal **824**, output terminal **828**, or the first interconnect **826**. Additionally, the second winding **776** may be electrically coupled to either output terminal **830**, output terminal **834**, or the second interconnect **832**. Furthermore, the third winding **704** may be electrically coupled to either output terminal **818**, output terminal **822**, or the third interconnect **826**.

Additionally, as depicted, the first delta switching device **756** and the first wye switching device **750** are mechanically coupled by the first interlock **780**. Similarly, the second delta switching device **758** and the second wye switching device **752** are mechanically coupled by the second interlock **782**. Furthermore, the third delta switching device **760** and the third wye switching device **754** are mechanically coupled by the third interlock **784**. It should be noted that the interlocks **780**, **782**, and **784** may each be the mechanical interlock described above.

An alternative embodiment of the 9-pole wye-delta starter **498** is depicted in FIG. **68**. In this embodiment, instead of utilizing three mains line switching devices, this 9-pole wye-delta starter **498** utilizes three additional delta switching devices. Thus, the 9-pole wye-delta starter **498** includes three wye switching devices **500**, **502**, and **504** and six delta switching device **506**, **508**, **510**, **512**, **514**, and **516**. It should be noted that the switching devices may be electromechanical single-pole, single current-carrying path switching devices independently operated by the control and monitoring circuitry **18**. Additionally or alternatively, the switching devices may include single-pole, multiple current-carrying path switching devices. Independently operating the switching devices enables making/breaking at different times and in different orders, among other things. Further, the 9-pole

wye-delta starter **498** may be enabled with or without POW techniques. Similar to the previous embodiment of the 9-pole wye-delta starter **748**, the depicted embodiment of the 9-pole wye-delta starter **498** isolates the motor windings **836**, **838**, and **840** from mains lines **842**, **844**, and **846** by utilizing the three additional delta switching devices **512**, **514**, and **516**.

More specifically, the three mains lines **842**, **844**, and **846** supply three-phase power and are electrically coupled to the six delta switching devices **506**, **508**, **510**, **512**, **514**, and **516**. Three of the delta switching devices **512**, **514**, and **516** are further electrically coupled to the motor windings **836**, **838**, and **840**, and the other three delta switching devices **506**, **508**, and **510** are further electrically coupled to the wye switching devices **500**, **502**, and **504** as well as the three motor windings **836**, **838**, and **840**. Additionally, an advantage of utilizing the three additional delta switching devices **512**, **514**, and **516** to isolate the electric motor **24**, is that they may be utilized as disconnects in order to protect the electric motor **24** from undesirable maintenance by faulty conditions or the like. Furthermore, in some embodiments, delta switching devices **506**, **508**, **510**, **512**, **514**, and **516** may be utilized to test for phase-to-ground and phase-to-phase shorts before starting the motor.

In fact, the depicted embodiment may further improve detecting phase-to-phase shorts by reducing duration electrical power is applied during testing. More specifically, as depicted, when the first wye switching device **500** is open, the first delta switching device **506** and a first auxiliary delta switching device **512** are coupled in series with the first winding **836**. Similarly, when the second wye switching device **502** is open, the second delta switching device **508** and a second auxiliary delta switching device **514** are coupled in series with the second winding **838**. Furthermore, when the third wye switching device **504** is open, the third delta switching device **510** and a third auxiliary delta switching device **516** are coupled in series with the third winding **840**. Thus, the opening/closing of each delta switching device and auxiliary delta switching device may be offset from one another. In this manner, duration the electric power is applied to the winding may be reduced even less than the minimum duration either of the switching devices is closed.

Additionally, as depicted, the first delta switching device **506** and the wye switching **500** are coupled via a first interlock **848**, the second delta switching device **508** and the second wye switching device **502** are coupled via a second interlock **850**, and the third delta switching device **510** and the third wye switching device **504** are coupled via a third interlock **852**. It should be noted that the interlocks **848**, **850**, and **852** may be the mechanical interlocks described above. As such, only one of the first delta switching device **506** and the first wye switching device **500** may be closed at a time, only one of the second delta switching device **508** and the second wye switching device **502** may be closed at a time, and only one of the third delta switching device **510** and the third wye switching device **504** may be closed at a time.

Similar to the previously described embodiment of the 9-pole wye-delta starter **748**, the output of first delta switching device **506** and the output of first wye switching device **500** are electrically coupled via a first interconnection **888**. Similarly, the output of the second delta switching device **508** and the output of second wye switching device **502** are electrically coupled via a second interconnection **894**, and the output of the third delta switching device **510** and the output of the third wye switching device **504** are electrically coupled via a third interconnection **900**. Furthermore, the

input of the first wye switching device **500**, the input of the second wye switching device **502**, and the input of the third wye switching device **504** are electrically coupled via a fourth interconnection **901**.

Additionally, since the 9-pole wye-delta starter **498** include auxiliary delta switching devices instead of mains switching devices, the input of the first auxiliary delta switching device **512** and the third delta switching device **510** are electrically coupled via a fifth interconnection **862**. Similarly, the input of the second auxiliary delta switching device **514** and the input of the first delta switching device **506** are electrically coupled via a sixth interconnection **864**. Furthermore, the input of the third auxiliary switching device **516** and the input of the second delta switching device **508** are electrically coupled via a seventh interconnection **868**.

The steps in the wye two-step start and the phase sequential wye-delta switching using nine switching devices are essentially the same as using six switching devices. However, in the depicted circuit diagram **498** there are three auxiliary delta switching devices (**512**, **514**, and **516**) may isolate the windings (**836**, **838**, and **840**). Thus, before running the wye two-step start and the phase sequential wye-delta switching, the control and monitoring circuitry **18** may send signals to close the auxiliary delta switching devices (**512**, **514**, and **516**). After the auxiliary delta switching devices are closed, the wye two-step start and the phase sequential wye-delta switching may be executed the same as the 6-pole wye-delta starter as discussed above with reference to the other embodiment of the 9-pole wye-delta starter FIG. **66**.

In some embodiments, the 9-pole wye-delta starter **498** may be implemented with single-pole, single current-carrying path switching devices **218**, as depicted in FIG. **69**. More specifically, the output terminal **886** of first delta switching device **506** and the output terminal **884** of the first wye switching device **500** are electrically coupled by the first interconnect **888** (e.g., a first bus bar). Similarly, the output terminal **892** of the second delta switching device **508** and the output terminal **890** of the second wye switching device **502** are electrically coupled by the second interconnect **894** (e.g., a second bus bar). Furthermore, and the output terminal **898** of the third delta switching device **510** and the output terminal **896** of the third wye switching device **504** are electrically coupled by the third interconnect **900** (e.g., a third bus bar). Furthermore, the input terminal **870** of the first wye switching device **500**, the input terminal **872** of the second wye switching device **502**, and the input terminal **874** of the third wye switching device **504** are electrically coupled by the fourth interconnect **901** (e.g., a fourth bus bar).

Thus, the first winding **836** may be electrically coupled to either output terminal **884**, output terminal **886**, or the first interconnect **888**. Additionally, the second winding **838** may be electrically coupled to either output terminal **890**, output terminal **892**, or the second interconnect **894**. Furthermore, the third winding **840** may be electrically coupled to either output terminal **896**, output terminal **898**, or the third interconnect **900**.

Additionally, as depicted, the input terminal **854** of the first auxiliary delta switching device **512** and the input terminal of the third delta switching device **512** are electrically coupled by the fifth interconnection **862** (e.g., a fifth bus bar). Similarly, the input terminal **856** of second auxiliary delta switching device **514** and the input terminal of the first delta switching device **506** are electrically coupled by the sixth interconnection **864** (e.g., a sixth bus bar). Fur-

thermore, the input terminal **858** of the third auxiliary delta switching device **516** and the input terminal **866** of the second delta switching device **508** are electrically coupled by the seventh interconnection **868** (e.g., a seventh bus bar).

Thus, the first mains line **842** may be electrically coupled to either input terminal **854**, input terminal **860**, or the fifth interconnection **862**. Additionally, the second mains line **844** may be electrically coupled to either input terminal **856**, input terminal **858**, or the sixth interconnection **864**. Furthermore, the third mains line **846** may be electrically coupled to either input terminal **858**, input terminal **866**, or seventh interconnection **868**.

Furthermore, as depicted, the first delta switching device **506** and the first wye switching device **500** are mechanically coupled by the first interlock **848**. Similarly, the second delta switching device **508** and the second wye switching device **502** are mechanically coupled by the second interlock **850**. Furthermore, the third delta switching device **510** and the third wye switching device **504** are mechanically coupled by the third interlock **852**. It should be noted that the interlocks **848**, **850**, and **852** may each be the mechanical interlock described above.

As evidenced by the varying configurations of a 9-pole wye-delta starter, one of ordinary skill the art should appreciate that the modularity provided by single pole, single current carrying path switching device **218** enables varying advantages, such as adjusting configuration based on size constraints. For example, one arrangement may be desirable over the other depending on various factors (e.g., the enclosure constraints, location of the electric motor **24**, etc.), and while either may achieve similar functions.

In addition to the wye-delta starters, other devices may also utilize the techniques described herein, such as an electric motor reverser, a two speed motor, or a motor drive bypass. To help illustrate, one embodiment of an electric motor reverser **902**, is shown in FIG. **70**. As depicted, the reverser **902** includes a first forward switching device **904**, a second forward switching device **906**, a first reverse switching device **908**, a second reverse switching device **910**, and a common switching device **912**. More specifically, as depicted, the input of the first forward switching device **904** and the input of the second reverse switching device **910** are electrically coupled by a first interconnect **934**. Similarly, the input of the first reverse switching device **908** and the input of the second forward switching device **906** are electrically coupled by a second interconnect **940**. Furthermore, the output of the first forward switching device **904** and the output of the first reverse switching device **908** are electrically coupled by a third interconnect **946**. Similarly, the output of the second reverse switching device **910** and the output of the second forward switching device **906** are electrically coupled by a fourth interconnect **952**.

Additionally, as depicted, the first forward switching device **904** and the first reverse switching device **908** are coupled via a first interlock **914**, and the second forward switching device **906** and the second reverse switching device **910** are coupled via a second interlock **916**. In other words, only one of the first forward switching device **904** and the first reverse switching device **908** may be closed at a time. Similarly, only one of the second forward switching device **906** and the second reverse switching device **910** may be closed at a time. Additionally, operation of the reverser **902** may generally be controlled by the control and monitoring circuitry **18**.

In the depicted embodiment, when the first forward switching device **904** is closed, a first phase of electric power (e.g., phase A) is connected from the first mains line

**918** to the first motor terminal **920** of the electric motor **24**; when the second forward switching device **906** is closed, a second phase of electric power (e.g., phase B) is connected from the second mains line **922** to the second motor terminal **924** of the electric motor **24**; and when the common switching device **912** is closed, a third phase of electric power (e.g., phase C) is connected from the third mains line **926** to the third motor terminal **928** of the electric motor **24**. Thus, when the first forward switching device **904**, the second forward switching device **906**, and the common switching device **912** are closed, the motor rotates in a forward direction (e.g., first direction).

Generally, a reverser may change the rotational direction of an electric motor **24** (e.g., from forward to reverse) by disconnecting electric power and reconnecting the electric power with two of the phases switched. Accordingly, in some embodiments, to reverse the electric motor, the control and monitoring circuitry **18** may break the first forward switching device **904**, the second forward switching device **906**, and the common switching device **912**. For example, the second forward switching device **906** may be opened based upon a first current zero-crossing, and the first forward switching device **904** and the common switching device **912** may be opened based upon a subsequent zero-crossing. Additionally or alternatively, POW techniques are not used and the switching devices may be opened after a brief delay.

Then, the first reverse switching device **908**, second reverse switching device **910**, and the common switching device **912** may be closed. For example, the second reverse switching device **910** and the common switching device **912** may be closed based upon a first predicted current zero-crossing (e.g., maximum line-to-line voltage), and the first reverse switching device **908** may be closed based upon a subsequent predicted current zero-crossing. More specifically, when the first reverse switching device **908** is closed, the second phase of electric power (e.g., phase B) is connected from the second mains line **922** to the first motor terminal **920**; when the second reverse switching device **910** is closed, the first phase of electric power (e.g., phase A) is connected from the first mains line **918** to the second motor terminal **924**, and when the common switching device **912** is closed, the third phase of electric power (e.g., phase C) is connected from the third mains line **926** to the third motor terminal **928**. Thus, when the first reverse switching device **908**, the second reverse switching device **910**, and the common switching device **912** are closed, the motor rotates in the reverse direction (e.g., opposite direction).

In some embodiments, since the common switching device **912** simply disconnects and reconnects the same phase of electric power (e.g., phase C) to the same motor terminal (e.g., third motor terminal) of the electric motor, the common switching device **912** may remain closed during the reverse operation. In such embodiments, even though the common switching device **912** remains closed, the common switching device **912** may still be included to disconnect the third phase of electric power from the electric motor **24**. Additionally or alternatively, in other embodiments, the common switching device **912** may be removed entirely.

In either embodiment where the one phase of electric power remains connected during the reverse operation, the control and monitoring circuitry **18** may break the first forward switching device **904** and the second forward switching device **906**. For example, the second forward switching device **906** may be opened based upon a first current zero-crossing and the first forward switching device **904** may be opened based upon a subsequent current zero-crossing. Then the control and monitoring circuitry may

make the first reverse switching device **908** and the second reverse switching device **910**. For example, the second switching device **910** may be closed based upon a first predicted current zero-crossing and the first reverse switching device **908** may be closed based upon a subsequent predicted current zero-crossing.

In some of the embodiments of the reverser **902** described above, each switching device may be controlled independently. For example, as described above, the first forward switching device **904** and the second forward switching device **906** may make/break at different times and in different orders. Accordingly, to improve the control over each switching device, the reverser **902** may be implemented with single-pole switching devices (e.g., single-pole, single current-carrying path switching devices **218**), as depicted in FIG. 71.

To implement the reverser **902**, as depicted, the input terminal **930** of the first forward switching device **904** and the input terminal **932** of the second reverse switching device **910** are electrically coupled via the first interconnection **934** (e.g., a first bus bar). Thus, the first mains line **918** may be connected to either input terminal **930**, input terminal **932**, or the first interconnection **934**. Additionally, as depicted, the input terminal **936** of the first reverse switching device **908** and the input terminal **938** of the second forward switching device **906** are electrically coupled via the second interconnection **940** (e.g., a second bus bar). Thus, the second mains line **922** may be connected to either input terminal **936** or **938**.

On the output side, the output terminal **942** of the first forward switching device **904** and the output terminal **944** of the first reverse switching device **908** are electrically coupled via the third interconnect **946** (e.g., a third bus bar). Thus, the first motor terminal **920** may be connected to either output terminal **942**, output terminal **944**, or the third interconnect **946**. Additionally, as depicted, the output terminal **948** of the second reverse switching device **910** and the output terminal **950** of the second forward switching device **906** are electrically coupled via the fourth interconnect **952** (e.g., a fourth bus bar). Thus, the second motor terminal **924** may be connected to either output terminal **948**, output terminal **950**, or the fourth interconnect **952**.

Furthermore, in the depicted embodiment, the input terminal **954** of the common switching device **912** may be connected to the third mains line **926** and the output terminal **956** of the common switching device **912** may be connected to the third motor terminal **928**. As described above, the reverser **902** may be implemented with or without the common switching device **912**. Thus, the modular nature of the single-pole path switching devices **218** (e.g., single-pole, single current-carrying path switching devices) enables each implementation to be individually configured. For example, in a first configuration, the reverser **902** may include the common switching device **912**, but in a second configuration, the reverser **902** may exclude the common switching device **912**. Even though the common switching device **912** is excluded in the second configuration, the configuration of the remaining switching devices (e.g., **904-910**) will largely remain the same.

Similar to the motor reverser **902**, a two speed motor may be implemented using five single pole, single current carrying path switching devices **218**. As described above, a motor drive bypass may also utilize the techniques described herein. To help illustrate, one embodiment of a motor drive bypass **958** that may be utilized to bypass the motor drive **960**, is shown in FIG. 72. In some embodiments, the motor

drive **960** may be a soft starter, across the line starter, variable frequency drive, or the like.

As depicted, the motor drive bypass **958** includes a first mains disconnect **962**, a second mains disconnect **964**, a third mains disconnect **966**, a first input disconnect **968**, a second input disconnect **970**, a third input disconnect **972**, a first bypass switching device **974**, a second bypass switching device **976**, a third bypass switching device **978**, a first output disconnect **980**, a second output disconnect **982**, and a third output disconnect **984** (e.g., switching devices). More specifically, the output of the first mains disconnect **962**, the input of the first input disconnect **968**, and the input of the first bypass switching device **974** are electrically coupled by a first interconnect **986**. Similarly, the output of the second mains disconnect **964**, the input of the second input disconnect **970**, and the input of the second bypass switching device **976** are electrically coupled by a second interconnect **996**. Furthermore, the output of the third mains disconnect **966**, the input of the third input disconnect **972**, and the input of the third bypass switching device **978** are electrically coupled by a third interconnect **1006**.

Additionally, as depicted, the output of the first bypass switching device **974** and the output of the first output disconnect **980** are electrically coupled by a fourth interconnect **992**. Similarly, the output of the second bypass switching device **976** and the output of the second output disconnect **982** are electrically coupled by a fifth interconnect **1002**. Furthermore, the output of the third bypass switching device **978** and the output of the third output disconnect **984** are electrically coupled by a sixth interconnect **1012**.

Operation of the motor drive bypass **958** may generally be controlled by the control and monitoring circuitry **18**. Generally, when the disconnects are closed and the bypass switching devices **974-978** are open, the motor drive **960** receives three-phase electric power and outputs three-phase electric power. For example, in the depicted embodiment, the r input of the motor drive **960** receives a first phase of electric power (e.g., phase A) from the first mains line **918**, the s input of the motor drive **960** receives a second phase of electric power (e.g., phase B) from the second mains line **922**, and the t input of the motor drive **960** receives a third phase of electric power (e.g., phase C) from the third mains line **926**. Additionally, the u output of the motor drive **960** outputs the first phase of electric power to the first motor terminal **920**, the v output of the motor drive **960** outputs the second phase of electric power to the second motor terminal **924**, and the w output of the motor drive **960** outputs the third phase of electric power to the third motor terminal **928**. It should be noted that other motor or load controlling devices may be used.

Accordingly, control and monitoring circuitry **18** may utilize the mains disconnects **962-966** to selectively connect and disconnect electric power from both the motor driver **960** and the electric motor **24**. More specifically, when the first mains disconnect **962** is opened, the first phase of electric power is disconnected; when the second mains disconnect **964** is opened, the second phase of electric power is disconnected; and when the third mains disconnect **966** is opened, the third phase of electric power is disconnected. For example, the second mains disconnect **964** may be opened based upon a first current zero-crossing, and the first mains disconnect **962** and the third mains disconnect **966** may be opened based upon a subsequent current zero-crossing. However, in some embodiments, POW techniques may not be used and the switching devices may be closed and opened in any desired manner. In some embodiments,

the mains disconnects **962-966** may be optionally excluded because the electric power may be selectively connected and disconnected from both the motor drive **960** and the electric motor **24**, for example, by the input disconnects **966-970**.

Instead of completely disconnecting electric power to the electric motor **24**, at times, it may be desirable to disconnect electric power from the motor drive **960** but continue supplying power to the electric motor **24**, for example, to reduce power consumption or to perform maintenance on the motor drive **960**. Accordingly, the bypass switching devices **974-978** may be closed to bypass the motor drive **960**.

More specifically, control and monitoring circuitry **18** may open the input disconnects **968-972** and the output disconnects **980-984** to disconnect electric power from the motor drive **960**. In some embodiments, the input disconnects **968-972** may be opened substantially simultaneously. In other embodiments, the input disconnects **968-972** may be opened using point-on-wave (POW) techniques. For example, the second input disconnect **970** may be opened based upon a first current zero-crossing, and the first input disconnect **968** and the third input disconnect **972** may be opened based upon a subsequent current zero-crossing. Similarly, in some embodiments, the output disconnects **980-984** may be opened substantially simultaneously. In other embodiments, the output disconnects **980-984** may be opened using POW techniques. For example, the second output disconnect **982** may be opened based upon a first current zero-crossing, and the first output disconnect **980** and the third output disconnect **984** may be opened based upon a subsequent current zero-crossing.

To reduce the possibility of electric power being back fed into the motor drive **960** via the outputs, the bypass switching devices **974-978** may be closed after the output disconnects **980-984** are opened. In some embodiments, the bypass switching devices **974-978** may be closed substantially simultaneously. In other embodiments, the bypass switching devices **974-978** may be closed using POW techniques. For example, the first bypass switching device **974** and the third bypass switching device **978** may close based upon a first predicted current zero-crossing, and the second bypass switching device **976** may close based upon a subsequent predicted current zero-crossing.

Once the bypass switching device **974-978** make, the first phase of electric power may be supplied from the first mains lines **918** through the first bypass switching device **974** to the first motor terminal **920**, the second phase of electric power may be supplied from the second mains lines **922** through the second bypass switching device **976** to the second motor terminal **924**, and the third phase of electric power may be supplied from the third mains line **926** through the third bypass switching device **978** to the third motor terminal **928**. In other words, the drive bypass **958** enables the electric motor **24** to continue actuating even after the motor drive **960** is bypassed. This may prove especially useful for high reliability systems, such as a waste management system.

In some of the embodiments of the drive bypass **958** described above, each switching device may be controlled independently. For example, as described above, the first bypass switching device **974** and the second bypass switching device **976** may make/break at different times and in different orders. Accordingly, to improve the control over each switching device, the drive bypass **958** may be implemented with single-pole switching devices **218** (e.g., single-pole, single current-carrying path switching devices), as depicted in FIG. 73.

To implement the drive bypass **958**, as depicted, the output terminal of the first mains disconnect **962** is electrically coupled to the input terminal of the first input disconnect **968** and the input terminal of the first bypass switching device **974** via the first interconnect **986** (e.g., a first bus bar). Thus, the first mains line **918** may be connected to the input terminal **988** of the first mains disconnect **962** and the output terminal **990** of the first input disconnect **968** may be connected to the r input of the motor drive **960**.

Similarly, as depicted, the output terminal of the second mains disconnect **964** is electrically coupled to the input terminal of the second input disconnect **970** and the input terminal of the second bypass switching device **976** via the second interconnect (e.g., a second bus bar). Thus, the second mains line **922** may be connected to the input terminal **998** of the second mains disconnect **964** and the output terminal **1000** of the second input disconnect **970** may be connected to the s input of the motor drive **960**.

Furthermore, as depicted, the output terminal of the third mains disconnect **966** is electrically coupled to the input terminal of the third input disconnect **972** and the input terminal of the third bypass switching device **978** via the third interconnect **1006** (e.g., a third bus bar). Thus, the third mains line **926** may be connected to the input terminal **1008** of the third mains disconnect **966** and the output terminal **1010** of the third input disconnect **972** may be connected to the t input of the motor drive **960**.

As depicted, the output terminal of the first output disconnect **980** and the output terminal of the first bypass switching device **974** are electrically coupled by the fourth interconnect **992** (e.g., a fourth bus bar). Similarly, the output terminal of the second output disconnect **982** and the output terminal of the second bypass switching device **976** are electrically coupled by the fifth interconnect **1002** (e.g., a fifth bus bar). Additionally, the output terminal of the third output disconnect **984** and the output terminal of the third bypass switching device **978** are electrically coupled by the sixth interconnect **1012** (e.g., a sixth bus bar).

Thus, the input terminal **994** of the first output disconnect **980** may be connected to the u output of the motor drive **960**, the input terminal **1004** of the second output disconnect **982**, may be connected to the v output of the motor drive **960**, and the input terminal **1014** of the third output disconnect **984** may be connected to the w output of the motor drive **960**. Moreover, the first motor terminal **920** may be electrically coupled to the output terminal of the first output disconnect **980**, the output terminal of the first bypass switching device **974**, or the fourth interconnect **992**. Similarly, the second motor terminal **924** may be electrically coupled to the output terminal of the second output disconnect **982**, the output terminal of the second bypass switching device **976**, or the fifth interconnect **1002**. Furthermore, the third motor terminal **928** may be electrically coupled to the output terminal of the third output disconnect **984**, the output terminal of the third bypass switching device **978**, or the sixth interconnect **1012**.

Additionally, as described above, the drive bypass **958** may be implemented with or without the main line disconnects **962-966**. Thus, the modular nature of the single-pole switching devices **218** (e.g., single-pole, single current-carrying path switching devices) enables each implementation to be individually configured. For example, in a first configuration, the drive bypass **958** may include the main line disconnects **962-966**, but in a second configuration, the drive bypass **958** may exclude the main line disconnects **962-966**. In fact, in some embodiments, excluding the main line disconnects **962-966** may enable the bypass switching

## 101

devices **974-978** and the output disconnects **980-984** to be adjacent with a mechanical interlock placed therebetween. Moreover, by adjusting the size and length of the bus bars may enable the placement of each switching device **218** to be individually determined.

Starting with FIG. **74**, the single-pole switching devices **1014**, **1016**, and **1018** may function as a three pole contactor using direct on line (DOL) operation to connect and disconnect three phase power from the power source **12** to the load **14**. It should be appreciated that the configuration depicted in FIG. **74** may function as a three pole contactor using DOL with or without POW techniques. As described above, various benefits may be achieved using POW techniques, such as reducing inrush current when closing and inhibiting arcing when opening.

In some embodiments, each of the single-pole switching devices **1014**, **1016**, and **1018** may be independently controllable and can be operated in any desired sequence. For example, each single-pole switching device may be opened/closed at the same time. In another example, two of the single-pole switching devices **1014** and **1016** may be opened/closed at a first time and a third single-pole switching device **1018** may be closed at a second time after the first time. In yet another example, one of the single-pole switching devices **1014** may be opened/closed at first time and then the other two single-pole switching devices **1016** and **1018** may be closed at a second time after the first time.

To this end, using single-pole switching devices enables taking turns between the order with which the single-pole switching devices are opened/closed to enable reducing wear and tear on the switching devices. For example, the single-pole switching device that breaks first during one operation may be controlled to break last in a subsequent operation. Indeed, certain schemes may be used, such as round robin, when selecting the order in which to break and/or make the single-pole switching devices.

FIG. **75** depicts the three single-pole switching devices **1014**, **1016**, and **1018** with an added fourth single-pole switching device **1020** used as a neutral or ground. The single-pole switching devices **1014**, **1016**, **1018**, and **1020** may supply power from the power source **12** to the load **14**. Essentially, in some embodiments, the depicted configuration may be operated in the same way as the configuration in FIG. **74** as a standard three pole contactor using DOL operation with or without POW techniques but accounting for the fourth single-pole switching device **1020** to connect and disconnect to ground as desired. Additionally, in some embodiments, the four single-pole switching devices **1014**, **1016**, **1018**, and **1020** may be independently controlled to connect and disconnect in any sequence to function as a soft starter for a motor (e.g., using wye-delta) with or without POW techniques, as described above.

The modular configurations of single-pole switching devices described above may be achieved through various connection arrangements as shown in FIGS. **76-80**. As may be appreciated, the design of the power terminals on the single-pole switching devices may be modified as desired to enable the switching devices to be connected in multiple ways that may reduce wiring complexity and configuration size.

For example, FIG. **76** illustrates two identical single-pole switching devices **1022** and **1024** arranged next to one another. The single-pole switching device **1022** and **1024** each includes two power terminals located at the same height protruding from two opposite sides of the switching devices **1022** and **1024**. That is, the single-pole switching device **1022** includes a first power terminal **1026** and a

## 102

second power terminal **1028** at the same height and the single-pole switching device **1024** includes a first power terminal **1030** and a second power terminal **1032** at the same height. As depicted, the second power terminal **1028** of the single-pole switching device **1022** is aligned with the first power terminal **1030** of the single-pole switching device **1024**. The power terminals **1028** and **1030** may be connected using a bus bar **1034** with connecting pins **1036** that are inserted through apertures **1038** in the bus bar **1034** and the power terminals **1028** and **1030**.

In another embodiment, the power terminals of the single-pole switching devices may be located at different heights on the two opposing sides, as shown in FIG. **77**. As illustrated, a single-pole switching device **1040** includes a first power terminal **1042** located at a lower height on one side than a second power terminal **1044** on an opposing side of the single-pole switching device **1040**. Using an identical single-pole switching device **1046** with power terminals located at the same heights, the two switching devices **1040** and **1046** may be connected by overlapping the power terminals. As shown, a first power terminal **1048** of the single-pole switching device **1046** aligns underneath the second power terminal **1044** of the single-pole switching device **1040**, and the power terminals **1044** and **1048** are connected via a connecting pin **1036**. As such, the depicted configuration may obviate use of a bus bar to connect the single-pole switching devices **1040** and **1046**.

In another embodiment, the power terminals of the single-pole switching devices may be configured to fit together, as shown in FIG. **78**. As illustrated, a single-pole switching device **1050** includes a first power terminal **1052** with a groove on the bottom of the terminal on one side and a second power terminal **1054** with a groove on the top of the terminal that matches the groove of the first power terminal **1052** on the opposing side. Using an identical single-pole switching device **1056** with power terminals including the grooves, the two switching devices **1050** and **1056** may be connected by mating the power terminals together. As shown, a first power terminal **1058** of the single-pole switching device **1056** fits with the second power terminal **1054** of the single-pole switching device **1050** by mating grooves, and the power terminals **1054** and **1058** are connected via a single connecting pin **1036**. As such, the depicted configuration may obviate use of a bus bar to connect the single-pole switching devices **1050** and **1056**.

FIGS. **79** and **80** depict top views of various configurations of more than two single-pole switching devices that reduce the amount of wiring needed to connect the switching devices. For example, FIG. **79** illustrates single-pole switching devices **1060**, **1062**, and **1064** that include power terminals at varying heights so the power terminals may overlap one another. That is, power terminal **1066** of switching device **1060** is highest, power terminal **1068** of switching device **1062** is at an intermediate height, and power terminal **1070** is at a lowest height. Accordingly, the power terminals may be stacked on top of one another and connected via a single connecting pin **1036**. As may be appreciated, single-pole switching devices may be arranged to fit within the physical constraints of certain housings and may do so by reducing wiring through direct connections via power terminals with a single connector pin **1036**.

Additionally, FIG. **80** illustrates single-pole switching devices **1072**, **1074**, and **1076** that include power terminals **1078**, **1080**, and **1082** located at the same heights. As described above, a bus bar may be used to connect power terminals that do not overlap. For example, in the depicted embodiment, the three power terminals **1078**, **1080**, and

1082 are connected via a "T" bus bar 1084 that aligns with apertures 1038 and secured with connecting pins 1036. Using the above configurations to connect the single-pole switching devices may provide the benefit of reducing wiring complexity when arranging certain motor starters. Provided System Improvements

Moreover, the techniques described herein may facilitate improved operation of one or more components in the system 10. In some embodiments, sniffing techniques may be used to facilitate controlling temperature of a load 14, particularly when the load 14 is not in operation. For example, control circuitry 18 may instruct single pole switching devices (e.g., 576, 578, or 580) to periodically conduct current through windings in an electric motor 24, thereby heating the windings. In some embodiments, heating the windings may facilitate subsequent startup of the motor 24, particularly in cold environments.

To help illustrate, one embodiment of a process 1100 for maintaining temperature in an electric motor is described in FIG. 81. Generally, process 1100 includes ceasing operation of a load (process block 1102) and determining whether desirable to heat the load (decision block 1104). When desirable to heat the load, the process 1100 further includes supplying a first phase and a second phase of electric power (process block 1106), supplying the first phase and a third phase of electric power (process block 1108), and supplying the second phase and the third phase of electric power (process block 1110). The process 1100 may be implemented via computer-readable instructions stored in a non-transitory article of manufacture (e.g., the memory 226, 20, 46 and/or other memories) and executed via processor 224, 19, 45 and/or other control circuitry.

Accordingly, control circuitry 18 may instruct an electric motor 24 to cease operation (process block 1102). In some embodiments, the control circuitry 18 may cease operation of the electric motor 24 by instructing one or more switching devices (e.g., single pole switching devices 576, 578, and 580) to open, thereby disconnecting electric power from the motor 24.

The control circuitry 18 may then determine whether it is desirable to heat the electric motor 24 (decision block 1104). In some embodiments, the control circuitry 18 may determine temperature of the electric motor 24 via a temperature sensor. In such embodiments, the control circuitry 18 may determine that it is desirable to heat the electric motor 24 when the temperature of the motor 24 reaches a threshold. Additionally or alternatively, the control circuitry 18 may periodically determine that it is desirable to heat the electric motor, for example, based on a timer.

When not desirable to heat the electric motor, control circuitry 18 may continue waiting until heating is desired (arrow 1112). In some embodiments, the control circuitry 18 may periodically poll the temperature sensors to determine whether temperature has reached the threshold.

On the other hand, when heating is desirable, the control circuitry 18 may instruct the one or more switching devices to connect a first phase (e.g., phase A) and a second phase (e.g., phase B) of electric power to a first winding in the motor 24 for the short duration (process block 1106). For example, in some embodiments the control circuitry 18 may instruct the first single pole switching device 576 and the second single pole switching device 578 to close for a short duration (e.g., sniff) at a first time. In this manner, the first winding may be heated due to conduction of current.

Additionally, the control circuitry 18 may instruct the one or more switching devices to connect the first phase (e.g., phase A) and a third phase (e.g., phase C) of electric power

to a second winding in the motor 24 for the short duration (process block 1108). For example, in some embodiments, the control circuitry 18 may instruct the first single pole switching device 576 and the third single pole switching device 580 to close for a short duration (e.g., sniff) at a second time. In this manner, the second winding may be heated due to conduction of current.

Furthermore, the control circuitry 18 may instruct the one or more switching devices to connect the second phase (e.g., phase B) and the third phase (e.g., phase C) of electric power to a third winding in the motor 24 for the short duration (process block 1110). For example, in some embodiments, the control circuitry 18 may instruct the second single pole switching device 578 and the third single pole switching device 580 to close for a short duration (e.g., sniff) at a third time. In this manner, the third winding may be heated due to conduction of current.

As described above, supplying two phases of electric power when the motor 24 is stationary may be insufficient to begin rotation of the motor 24. As such, the heating of the windings may be performed while maintaining the motor 24 stationary (e.g., non-operational). Additionally, in some embodiments, heating of the electric motor 24 may be coordinated with testing for phase-to-ground faults and/or phase-to-phase faults. Accordingly, the control circuitry 18 may instruct each pair of the single pole switching device 576, 578, and 580 to close based at least in part on a predicted current-zero crossing, thereby reducing impact of any potential faults.

Moreover, even when the load 14 is in operation (e.g., electric motor 24 is rotating), the temperature of the load 14 may be controlled to improve operation. For example, when an electric motor 24 is connected in a partial wye, a partial delta, or a mixed wye-delta configuration, the electric power supplied to each of the windings may vary. As such, the temperature of each winding may differ based at least in part on the amount of conducted electric power. Thus, to facilitate maintaining approximately equal temperature between the windings, a wye-delta starter may periodically rotate which windings are connected in what configuration, particularly remaining in a configuration for an extended period.

For example, in a configuration where the wye-delta starter only connects one winding in a delta configuration (e.g., a partial delta configuration described in FIG. G), the wye-delta starter may periodically change which winding is connected in the delta configuration. More specifically, the wye-delta starter may periodically rotate between connecting the first winding 386 in the delta configuration, connecting the second winding 388 in the delta configuration, and connecting the third winding 390 in the delta configuration. In this manner, by connecting each winding for approximately the same duration in the delta configuration, the temperature of the windings may be maintained approximately equal. One of ordinary skill should appreciate that such a rotation between the windings may also be applicable to other partial delta configuration, partial wye configurations, and mixed wye delta configurations.

In addition to improving operation of a load 14, the techniques described herein may also facilitate improving operation of the switching devices. More specifically, oxidation may build up on contactor pads of the switching devices due to contactor contamination or environmental conditions, such as dust. Accordingly, controlled arcing may be used to clean the contactor pads by burning off oxidation, thereby improving performance and/or lifespan of the switching device.

To help illustrate, one embodiment of a process **1114** for cleaning contactor pads of a switching device is described in FIG. **82**. Generally, the process **1114** includes making a switching device (process block **1116**) and determining when desirable to break the switching device (decision block **1118**). When desired to break the switching device, the process includes determine whether desirable to clean the switching device (decision block **1120**), breaking based on a current zero-crossing when not desirable to clean the switching device (process block **1122**), and creating an arc when breaking when desirable to clean the switching device (process block **1124**). The process **1114** may be implemented via computer-readable instructions stored in a non-transitory article of manufacture (e.g., the memory **226**, **20**, **46** and/or other memories) and executed via processor **224**, **19**, **45** and/or other control circuitry.

Accordingly, control circuitry **18** may instruct a switching device to make, thereby connecting electric power to a load **14** (process block **1116**). The control circuitry **18** may then determine whether it is desirable to break the switching device (process block **1118**). In some embodiments, the control circuitry **18** may determine that it is desirable to break when desirable to disconnect electric power from the load **14**. If not desirable to break, the control circuitry **18** may instruct the switching device to remain closed and wait until desirable to break (arrow **1126**).

On the other hand, when desirable to break, the control circuitry **18** may determine whether it is desirable to clean the switching device (decision block **1120**). In some embodiments, the control circuitry **18** may determine that is desirable to clean the switching device after a set number of breaks, for example, every twentieth break. Additionally or alternatively, the control circuitry **18** may determine that it is desirable to clean based on duration the switching device has been in operation and/or duration the switching device has been closed.

When not desirable to clean, the control circuitry **18** may instruct the switching device to break based at least in part on a current zero-crossing of the conducted electric power (process block **1122**). In some embodiments, the control circuitry **18** may instruct the switching device to break slightly before or at the current zero-crossing, thereby reducing the likelihood and/or magnitude of any arcing. As described above, it may be desirable to miss the mark short of the current zero-crossing and open when the current is going downward on a half cycle to the current zero-cross, as opposed to missing the mark after the current zero-crossing.

On the other when desirable to clean, the control circuitry **18** may instruct the switching device to break such that an arc is created as the contactor pads open (process block **1124**). In this manner, the heat produced by the arcing may burn off any oxidation on the contactor pads, thereby cleaning the switching device. As described above, the magnitude of arcing may be directly based on where on the current waveform the switching device breaks. More specifically, the farther the break is from a subsequent current zero-crossing the larger the magnitude of produced arcing. As such, in some embodiments, the control circuitry **18** may determine when to break based on a desired amount of arcing. For example, when the switching device has not been cleaned for a longer duration, the control circuitry **18** may determine that greater amount of cleaning is desirable and break farther from the subsequent current-zero crossing.

Additionally, in some instances, arcing may cause atoms from one contactor pad to transfer to the other contactor pad. Thus, in some embodiments, the control circuitry **18** may also determine when to break the switching device based on

direction desirable to transfer atoms. In fact, in some embodiments, the control system **18** may break the switching device such that the contact pads take turns being the anode and the cathode. In this manner, it may be possible to retain relatively even number of atoms on each contactor pad.

**74** illustrates an embodiment where three single-pole switching devices **1014**, **1016**, and **1018** are used to connect and disconnect three phase power and FIG. **75** illustrates an embodiment where four single-pole switching devices **1014**, **1016**, **1018**, and **1020** are used to connect and disconnect three phase power plus a neural (e.g., ground).

While only certain features of the disclosure have been illustrated and described herein, many modifications and changes will occur to those skilled in the art. It is, therefore, to be understood that the appended claims are intended to cover all such modifications and changes as fall within the true spirit of the disclosure.

The invention claimed is:

1. A method comprising:
  - in a system comprising a plurality of electromechanical switches each having a respective operating coil controllable to make and break conductive paths between movable and stationary contacts, determining a signal based upon temperature associated with each operating coil; and
  - based upon the determined temperature signals, applying a pull-in current to each operating coil to close the respective switching device to make the respective conductive paths at desired make times, or removing current to each operating coil to open the respective switching device to break the respective conductive paths at desired break times, wherein the desired make and break times are based at least in part on desired points in a waveform of incoming alternating current power applied to the switches, and wherein the desired points are at least partially based upon a voltage and/or current zero crossing, or a phase-to-phase zero crossing.
2. The method of claim 1, wherein the temperature signals are determined by at least one of: applying a measurement current to the respective operating coils, and detecting a temperature-related signal via sensors associated with the switches.
3. The method of claim 1, wherein each switch carries power for only one phase of three-phase power.
4. The method of claim 1, comprising controlling a magnitude of pull-in current applied to each operating coil based upon the determined temperatures.
5. The method of claim 1, comprising controlling a time of application of the pull-in current applied to each operating coil based upon the determined temperature signals.
6. The method of claim 1, comprising altering switching times of the operating coils over different cycles of making of the switches to provide consistent operation of the switches.
7. The method of claim 1, wherein the system comprises coil control circuitry configured to control application of current to the operating coils to make two phases of three-phase power at a first desired time, and then to make a third phase of the three-phase power at a second time after the first time, or to break one phase of three-phase power at a first desired time, and then to break two remaining phases of the three-phase power at a second time after the first time.
8. The method of claim 1, wherein at least one of the desired points comprise a current zero-crossing or a phase-to-phase voltage crossing.

9. A method comprising:  
 in a system comprising a plurality of electromechanical switches each having a respective operating coil controllable to make and break conductive paths between movable and stationary contacts, monitoring temperature-indicative signals from sensors associated with the switches;

based upon the temperature-indicative signals, applying a pull-in current to each operating coil to close the respective switching device to make the respective conductive paths at desired make times, or removing current to each operating coil to open the respective switching device to break the respective conductive paths at desired break times, wherein the desired make and break times are based at least in part on desired points in a waveform of incoming alternating current power applied to the switches; and

altering switching times of the operating coils over different cycles of making of the switches to provide consistent operation of the switches.

10. The method of claim 9, wherein each switch carries power for only one phase of three-phase power.

11. The method of claim 9, wherein the system comprises coil control circuitry configured to control application of current to the operating coils to make two phases of three-phase power at a first desired time, and then to make a third phase of the three-phase power at a second time after the first time, or to break one phase of three-phase power at a first desired time, and then to break two remaining phases of the three-phase power at a second time after the first time.

12. The method of claim 9, wherein at least one of the desired points comprise a current zero-crossing or a phase-to-phase voltage crossing.

13. A system comprising:  
 a plurality of electromechanical switches each having an operating coil controllable to make and break conductive paths between movable and stationary contacts;

means for determining temperature signals based on a temperature associated with each operating coil; and control circuitry configured command, based upon the determined temperature signals, application a pull-in current to each operating coil to close the respective switching device to make the respective conductive paths at desired times, or removal of current to each operating coil to open the respective switching device to break the respective conductive paths at desired break times, wherein the desired make and break times are based at least in part on desired points in a waveform of incoming alternating current power applied to the switches, wherein the desired points are at least partially based upon a voltage and/or current zero crossing, or a phase-to-phase zero crossing.

14. The system of claim 13, wherein each switch carries power for only one phase of three-phase power.

15. The system of claim 13, wherein the control circuitry is configured to alter switching times of the operating coils over different cycles of making of the switches to provide consistent operation of the switches.

16. The system of claim 13, wherein the control circuitry is configured to control application of current to the operating coils to make two phases of three-phase power at a first desired time, and then to make a third phase of the three-phase power at a second time after the first time, or to break one phase of three-phase power at a first desired time, and then to break two remaining phases of the three-phase power at a second time after the first time.

17. The system of claim 13, wherein the control circuitry is configured to control a magnitude of pull-in current applied to each operating coil based upon the determined temperatures.

18. The system of claim 13, wherein the control circuitry is configured to control a time of application of the pull-in current applied to each operating coil based upon the determined temperature signals.

\* \* \* \* \*