



(22) Date de dépôt/Filing Date: 1993/09/21

(41) Mise à la disp. pub./Open to Public Insp.: 1994/03/25

(45) Date de délivrance/Issue Date: 2003/02/04

(30) Priorité/Priority: 1992/09/24 (950,598) US

(51) Cl.Int.⁵/Int.Cl.⁵ H01R 9/09, G11B 33/02


(72) Inventeurs/Inventors:
HASTINGS, ROBERT J., US;
VARGHESE, PAULY T., US

(73) Propriétaire/Owner:
COMPAQ COMPUTER CORPORATION, US

(74) Agent: FINLAYSON & SINGLEHURST

(54) Titre : SUPPORT POUR PLUSIEURS LECTEURS DE DISQUE RIGIDE AMOVIBLES SOUS TENSION

(54) Title: APPARATUS FOR REMOVABLY SUPPORTING A PLURALITY OF HOT PLUG-CONNECTED HARD DISK DRIVES

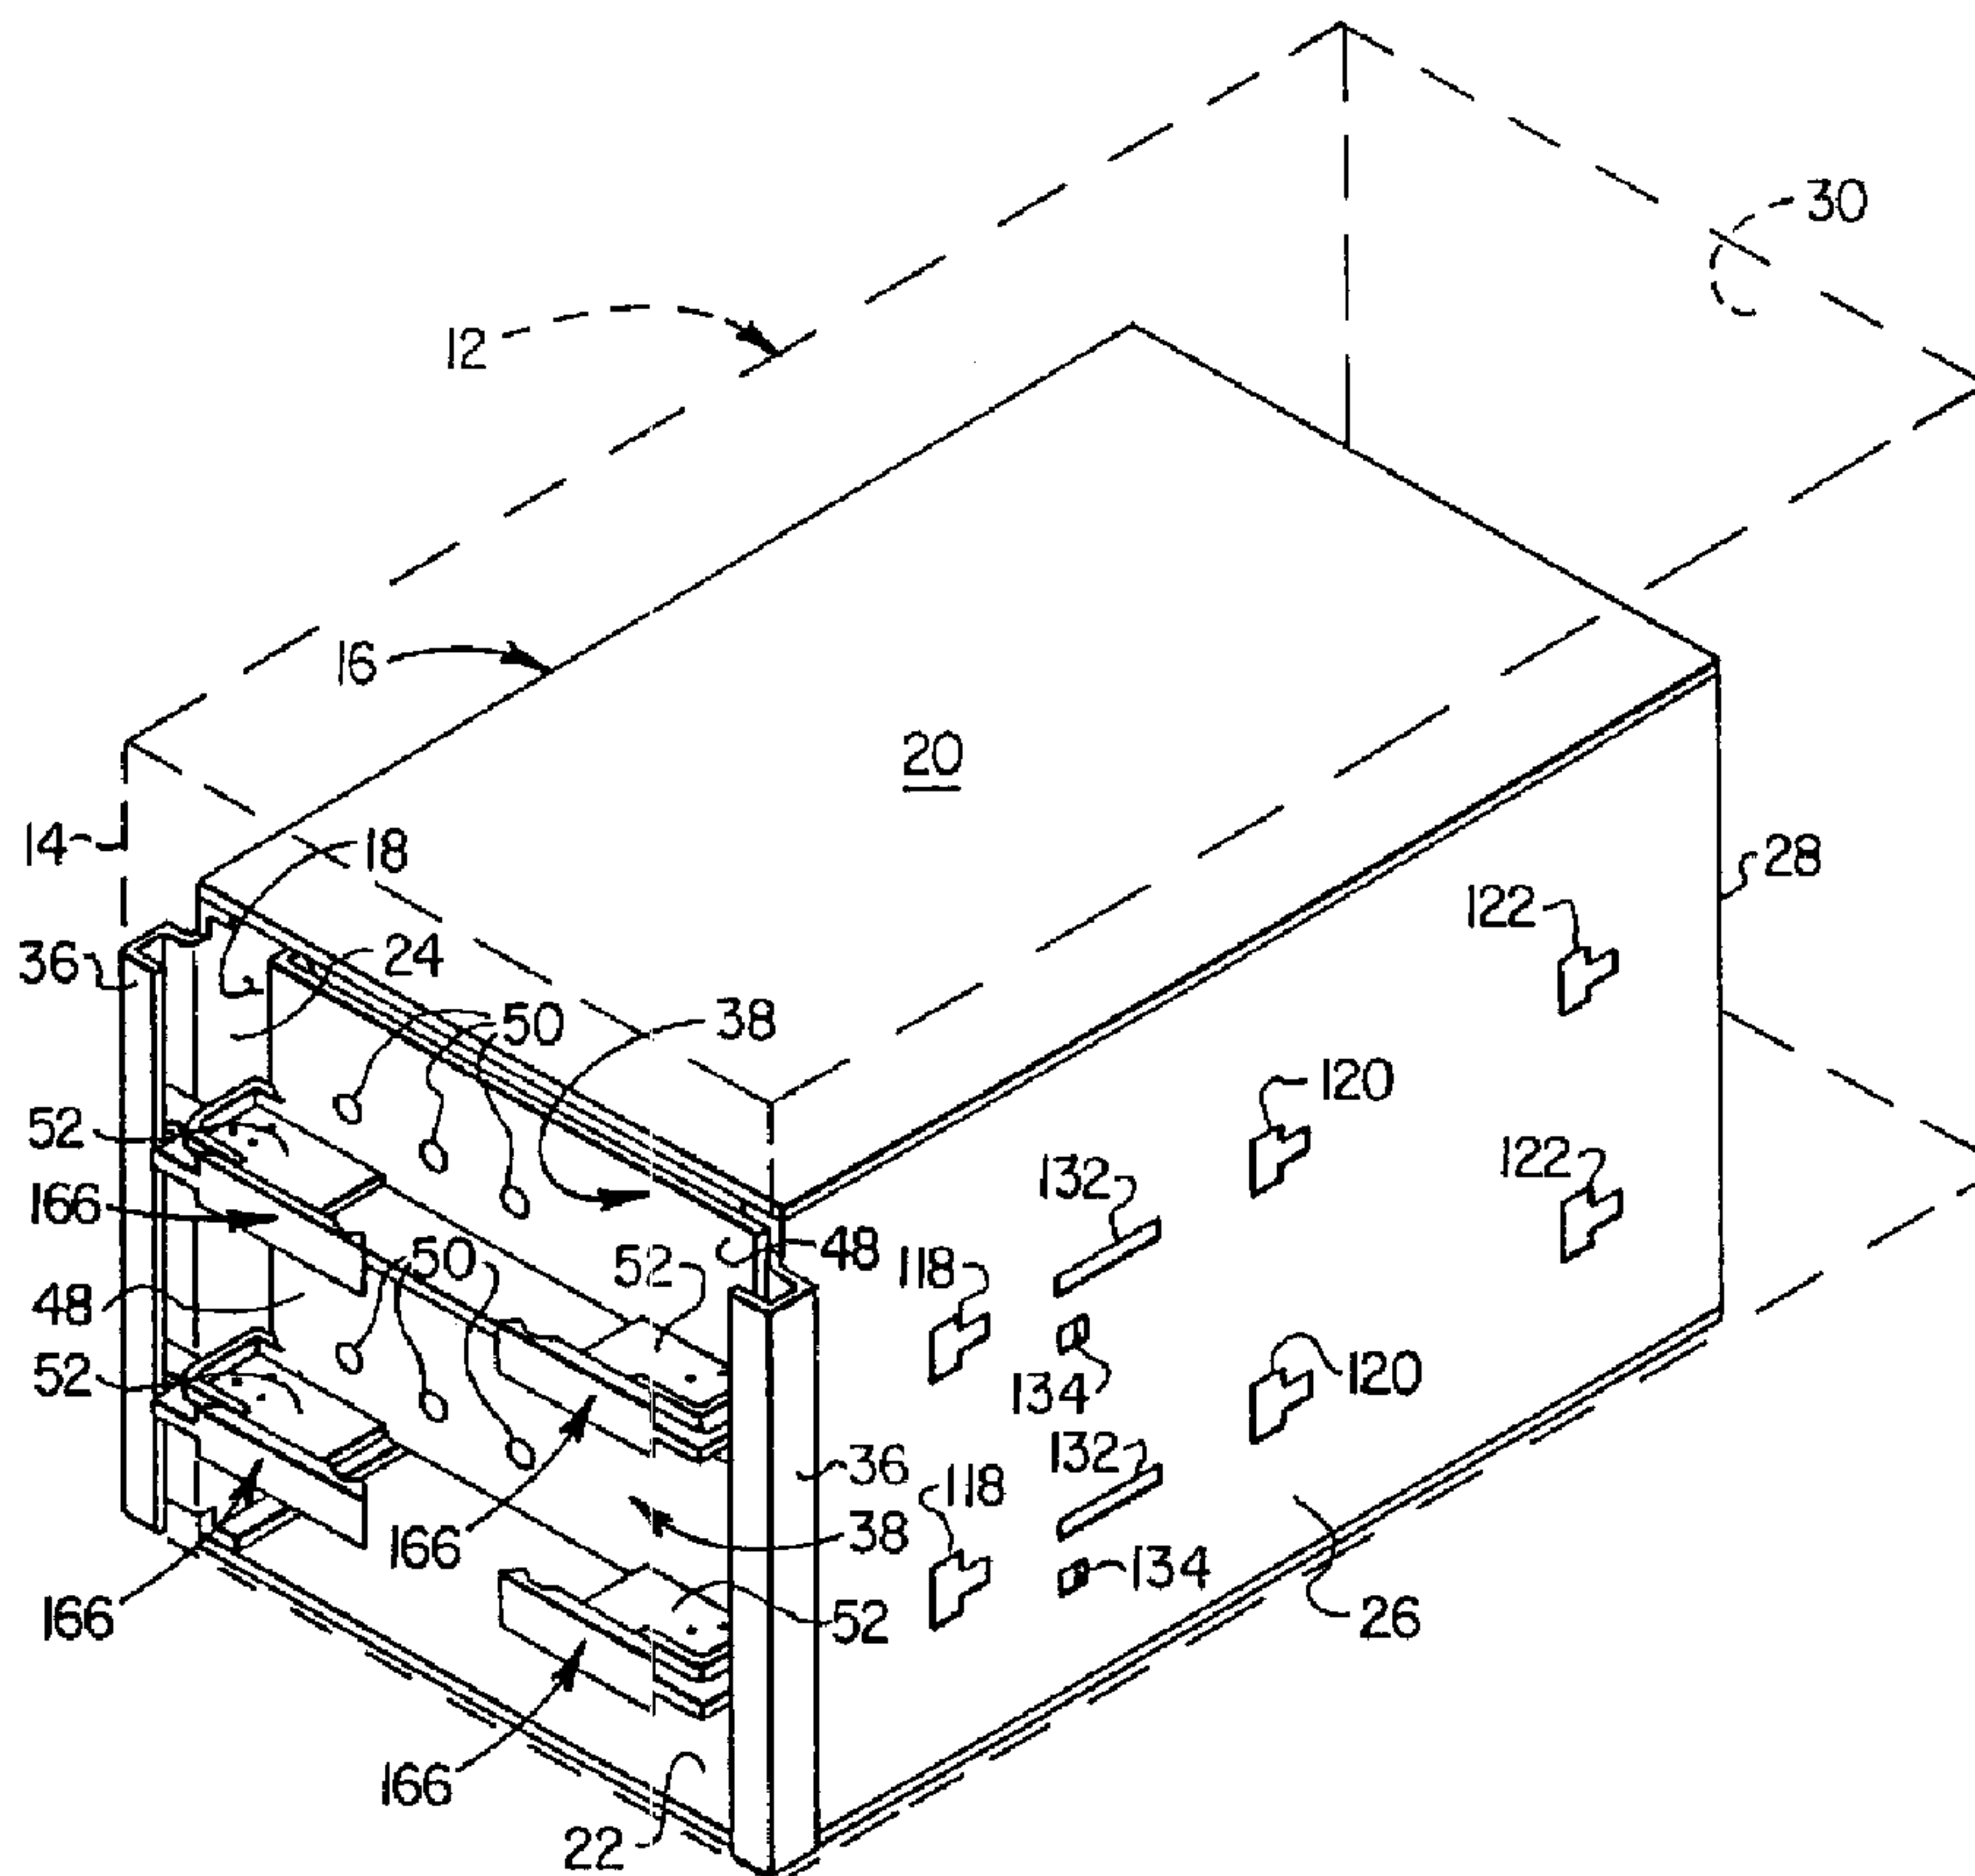

(57) Abrégé/Abstract:

A series of hard disk drives are secured atop molded plastic support trays slidably and removably received in opposing guide channel member pairs snap-fitted into opposite side walls of a sheet metal cage structure externally used in conjunction with a



(57) Abrégé(suite)/Abstract(continued):

file server or other computer device. Snap-fitted into rear end portions of the trays are small printed circuit boards that are insertable into hot plug sockets at the rear of the cage. Forwardly projecting guard plates on the rear end of the cage block manual access to the board/socket interface, and the surface mounted grounding leads on the board extend rearwardly beyond its signal leads to enhance grounding safety during disk drive installation and removal. At the front end of each tray is a vertical support plate upon which LED indicating lights are conveniently mounted for the associated disk drive. Each guide channel member has a metal grounding clip portion that is pressed against the adjacent cage wall and is contacted by a grounding screw on the disk drive as the drive is slid into the housing, the grounding screw also functioning to prevent inadvertent upside-down installation of the drive. To assist in installing and removing each disk drive, its associated support tray is provided at its front corners with pivotable ejection latch members removably secured thereto using a molded connection structure that eliminates the requirement for attachment screws or rivets.

2106626

APPARATUS FOR REMOVABLY SUPPORTING A PLURALITY
OF HOT PLUG-CONNECTED HARD DISK DRIVES

ABSTRACT

A series of hard disk drives are secured atop
molded plastic support trays slidably and removably
received in opposing guide channel member pairs snap-
fitted into opposite side walls of a sheet metal cage
structure externally used in conjunction with a file
server or other computer device. Snap-fitted into rear
end portions of the trays are small printed circuit
boards that are insertable into hot plug sockets at the
rear of the cage. Forwardly projecting guard plates on
the rear end of the cage block manual access to the
board/socket interface, and the surface mounted
grounding leads on the board extend rearwardly beyond
its signal leads to enhance grounding safety during
disk drive installation and removal. At the front end
of each tray is a vertical support plate upon which LED
indicating lights are conveniently mounted for the
associated disk drive. Each guide channel member has
a metal grounding clip portion that is pressed against
the adjacent cage wall and is contacted by a grounding
screw on the disk drive as the drive is slid into the
housing, the grounding screw also functioning to
prevent inadvertent upside-down installation of the
drive. To assist in installing and removing each disk
drive, its associated support tray is provided at its
front corners with pivotable ejection latch members
removably secured thereto using a molded connection
structure that eliminates the requirement for
attachment screws or rivets.

2106626

**APPARATUS FOR REMOVABLY SUPPORTING A PLURALITY
OF HOT PLUG-CONNECTED HARD DISK DRIVES**

5 The present invention relates generally to the mounting and support of hard disk drives for computers, and more particularly relates to apparatus for removably supporting a plurality of hot plug-connected hard disk drives.

10 Hard disk drives for a file server or other computer are often mounted, in a vertically spaced array external to the file server, in a rectangular sheet metal "cage" structure within an external disk
15 drive support housing. For operational convenience and flexibility, each disk drive is typically "hot plug" connected within the support housing. This type of electrical connection permits any of the supported disk

drives to be removed and re-installed within the support housing without disturbing the operation of the other disk drives.

5 Under a conventional practice, each disk drive is mounted atop a printed circuit board having a rear card edge portion which is insertable into a back plane hot plug socket within the cage structure. To install each disk drive within the cage, side edge portions of its supporting printed circuit board are inserted into a
10 pair of track members mounted on opposed side wall portions of the cage and then slid rearwardly along the tracks until the rear card edge portion of the circuit board is operatively received its associated hot plug socket at the back of the cage.

15 Some or all of the following problems, limitations and disadvantages are commonly associated with conventional hot plug disk drive support apparatus of this general type:

20 1. The use of a printed circuit board to underlie and carry each hard disk drive tends to increase both the complexity and cost associated with removably supporting each disk drive, and additionally presents sharp solder and wire points along the underside of the board which the installer must
25 carefully handle to avoid scratches and nicks in his fingers when installing and removing the disk drive from the cage.

30 2. On some circuit board-supported disk drives, a considerable amount of manual pulling force is required to disconnect the board from its associated hot plug socket within the cage. On other conventionally supported disk drives, the circuit board is provided with pivotable ejection latches that must be

screwed or pinned to the circuit board, thereby increasing the overall complexity and fabricational cost of the support system.

5 3. A typical method of securing an installed disk drive within the cage is to install a screw in the cage which acts as a stop to prevent removal of the disk drive assembly from the cage. This undesirably complicates and lengthens the individual disk drive installation and removal procedure.

10 4. Among other grounding-related problems, the necessary grounding between each disk drive and the sheet metal cage in which it is removably supported often requires fairly complex interconnections therebetween which tend to be rather tedious and time
15 consuming to properly utilize. Additionally, the card edge hot plug socket interface area is normally exposed within the cage where it can be inadvertently touched by an installer trying to make alignment or other adjustments within the cage.

20 5. It is conventional to provide each disk drive with a plurality of indicating lights showing the operative state of the drive. However, under conventional practice, these indicating light arrays typically must be located on the support housing remote
25 from the disk drives. This can lead to visual confusion as to which indicating lights are associated with which disk drive.

30 It can be seen from the foregoing that it would be desirable to provide external hot plug disk drive support apparatus, of the general type described above, with a variety of operational, fabricational and safety improvements. It is accordingly an object of the present invention to provide hot plug-connected

external disk drive support apparatus incorporating such improvements.

5 In carrying out principles of the present invention, in accordance with a preferred embodiment thereof, apparatus is provided for removably supporting and providing a hot plug connection for a disk drive such as one of a series of external disk drives used in conjunction with a file server or other computer
10 device. In accordance with various separate aspects of the present invention, the preferred embodiment of the apparatus incorporates therein a variety of operational, fabrication and safety improvements.

The overall disk drive support apparatus
15 representatively comprises a housing structure with a sheet metal cage structure disposed therein and having an open front end, a rear end wall having a hot plug socket thereon, first and second opposite side walls extending between the open front end and the rear end
20 wall, and an opposing pair of wall channel portions formed on front ends of the cage structure side walls.

First and second molded plastic guide channel members having open side portions, and generally U-shaped cross-sections along their lengths are mounted
25 on the facing surfaces of the cage structure side walls in a parallel relationship in which the open side portions of the guide channel members face one another, the lengths of the guide channel members are generally transverse to the front wall channel portions of the cage structure, and the guide channel members are in a
30 generally laterally aligned relationship with the hot plug socket.

The disk drive to be supported within the cage structure is removably secured to the top side of a molded plastic support tray having opposite side edges slidably and supportingly receivable in the interiors
5 of the guide channel members in a manner permitting the support tray to be slid rearwardly along the guide channel members to bring the support tray to an operating position within the cage structure.

A printed circuit board is removably mounted on a
10 rear end portion of the support tray in a manner such that when the support tray is rearwardly moved through the cage structure to its operating position therein the circuit board is conductively and removably received within the hot plug socket. Wiring means are
15 provided for electrically coupling the printed circuit board to the disk drive to transmit power thereto from the hot plug socket.

The use of the molded plastic support tray to carry the disk drive, and the use of a relatively small
20 connector circuit board on the rear end of the tray to connect to the hot plug socket reduces the cost of operatively supporting the disk drive, compared to the conventional practice of using a larger printed circuit board to both carry the disk drive and connect it to
25 the hot plug socket, and further provides more user friendly handling characteristics by eliminating the sharp solder and wiring points typically found along the entire underside of the larger circuit board.

Extending rearwardly along a side surface of the
30 small printed circuit board are pluralities of conductive ground and signal traces. The ground traces extend rearwardly beyond the signal traces. This aspect of the present invention facilitates the

electrical performance of the disk drive support structure since when the disk drive is rearwardly moved to its operating position within the cage structure a grounding connection is formed between the circuit board before a signal connection therebetween. Conversely, as the circuit board is unplugged from the hot plug socket, the signal connection is broken before the grounding connection is. To facilitate the mounting of the circuit board on the rear end of the support tray, means are formed on the tray for providing a releasable snap-fit attachment engagement with the circuit board.

Projecting upwardly from the front end of the support tray body is a transverse end plate upon which a plurality of disk drive indicating lights are operatively mounted, the wiring means from the circuit board being conveniently routed to the indicating lights via a wire passage formed by wall means on the top side of the support tray body beneath the disk drive.

To assist in inserting and withdrawing the disk drive from the cage structure, ejection latch members are pivotally secured to front corner portions of the support tray and operate in a generally conventional manner, via reactive forces with the front wall channel portions of the cage structure, to exert leveraged insertion and withdrawal forces on tray. According to a feature of the present invention, the latch members are removably secured to the front corner tray portions using a specially designed molded connection structure that eliminates the requirement for attachment screws or rivets and simplifies the fabrication of the overall disk drive support structure.

As a safety feature, the rear end wall of the cage structure has guard wall means projecting forwardly therefrom and operative to block manual access to the printed circuit board when it is adjacent the hot plug socket. For electrostatic discharge purposes, the guide channel members, which are preferably plastic moldings, have snap-fitted thereon sheet metal grounding clips that are deformingly pressed against the metal cage side walls. Grounding screws secured to and projecting outwardly beyond the disk drive are brought into contact with the clips when the tray is rearwardly moved to its operating position within the cage structure, thereby reliably grounding the inserted disk drive to the metal cage structure.

Inward projections formed on the cage structure side walls are positioned to block these grounding screws, in the event that an attempt is made to rearwardly insert the tray in an upside-down orientation, in a manner preventing the tray from being fully inserted in this improper orientation.

While the various aspects of the present invention summarized above have been described in conjunction with the removable support and hot plug connection of a single disc drive, it will be readily appreciated that by simply using additional hot plug sockets and support components, such as additional guide channel members, support trays and rear end circuit boards, grounding clips, etc., a spaced array of disk drives may be removably supported and hot plug-connected within a housing cage structure.

FIG. 1 is a partially phantomed, simplified perspective view of a representative external, hot-plug connection hard disk drive support housing structure embodying principles of the present invention;

FIG. 2 is an enlarged scale, partially exploded fragmentary perspective view of an interior sheet metal cage portion of the housing, with one of the tray-supported disk drives removed therefrom;

FIG. 3 is an enlarged scale partially exploded perspective view of the removed FIG. 2 disk drive and its underlying support tray structure;

FIG. 4 is an exploded perspective view of a rear end portion of the support tray structure illustrating the snap-fit installation thereon of a printed circuit board connector member, appearing with FIG. 1;

FIG. 5 is an exploded outer side perspective view of a specially designed support rail structure used to slidably carry the disk drives within the cage;

FIG. 6 is an exploded perspective view of the support rail structure and a side wall portion of the cage, and illustrates the snap-fit connection between the support rail structure and the cage wall;

FIG. 7 is a schematic cross-sectional view through one of the support tray structures illustrating the operation of a grounding clip portion of one of its associated support rail structures;

FIG. 8 is a schematic cross-sectional view through a rear end portion of the cage taken along line 8-8 of FIG. 2 and illustrating the operation of a spaced series of forwardly projecting safety guard plates therein; and

FIGS. 9A-9D are bottom side perspective views of a rear corner portion of one of the disk drive support trays and sequentially illustrate the unique installation and operation thereon of an ejection latch member utilized to facilitate the installation and removal of a disk drive into and from the cage.

Referring initially to FIGS. 1 and 2 of the drawings, in a preferred embodiment thereof the present invention provides apparatus for removably supporting and providing hot plug connections for a vertically spaced plurality of disk drives 10 (FIG. 2) such as those externally utilized in conjunction with a file server (not shown) or other computer device. The support apparatus representatively includes a generally rectangular housing 12 having an open front end 14, and a generally rectangular sheet metal cage structure 16 disposed within the housing.

Cage 16 has an open front end 18 rearwardly adjacent the housing end 14, top and bottom walls 20 and 22, left and right side walls 24 and 26, and a rear end wall 28 spaced inwardly apart from the rear end wall 30 of housing 12. A vertically spaced pair of horizontally elongated hot plug sockets 32 are mounted on the rear cage end wall 28 (FIG. 2).

For purposes later described, three vertically spaced, horizontally elongated rectangular guard plate members 34 project forwardly beyond the rear cage end wall 28, with each of the sockets 32 being disposed between and parallel to a vertically adjacent pair of the plates 34. Front end portions of the cage side walls 24, 26 are bent to form a pair of vertically extending wall channel portions 36 having generally U-

shaped cross-sections along their lengths, and horizontally facing open sides.

Referring now to FIGS. 1-4, each of the disk drives 10 is supported on the top side of one of a specially designed pair of molded plastic support trays 38 each having a generally rectangular body 40. Body 40 has a series of cooling holes 42 formed therethrough; a rear end portion 44 (see FIG. 4); a pair of outwardly projecting opposite side edges 46 rearwardly terminating at rear end portion 44; an upwardly projecting front end plate portion 48 with three LED disk drive activity indicating lights 50 mounted thereon; and a pair of opposite front corner portions 52 projecting outwardly beyond the lower side edge of the front end plate 48.

Each disk drive 10 is of a conventional construction and has a pair of mounting rail sections 54 extending forwardly and rearwardly along opposite lower side portions thereof. For purposed later described, metal grounding screws 56 are connected to and project outwardly from the mounting rails adjacent their rear ends. When each disk drive 10 is operatively mounted atop the body portion 40 of its associated support tray 38, the disk drive is positioned between the plate 48 and the rear end portion 44 of the tray body. Each disk drive 10 is removably secured to its associated support tray 38 by screws 58 extending upwardly through the tray body and threaded into the bottom side of the disk drive.

Mounted atop the rear end portion 44 of each support tray 38 is a small printed circuit board 60 having an elongated rectangular body portion 62 from which a somewhat shorter rectangular plug portion 64

centrally projects in a rearward direction. Plug portion 64 has formed on its top side a series of forwardly and rearwardly extending electrically conductive surface traces including grounding traces 66 and signal traces 68. For purposes later described, the grounding traces 66 extend rearwardly beyond the signal traces 68. A slot 78, parallel to the traces 66 and 68, is formed in the circuit board plug portion 64 and functions in a conventional manner to assure the proper orientation of the plug portion when it is operatively inserted into one of the hot plug sockets 32 as later described.

With reference now to FIG. 4, each circuit board body portion 62 is releasably snap-fitted onto the top of its associated rear support tray end portion 44 by means of a pair of abutment tabs 72 formed on opposite sides of the tray body 40; a pair of upwardly projecting latch portions 74 formed on the rear end of the tray; a pair of upwardly projecting cylindrical post portions 76 formed on the rear tray end portion 44 between the facing abutment and latch pairs 72,74; and a pair of circular holes 78 formed through the circuit board body 62.

As may be seen by comparing FIGS. 3 and 4, the circuit board 60 is removably installed on the rear support tray end portion 44 by inserting a front side edge portion 80 of the circuit board body under the abutment tabs 72 and then downwardly pivoting the circuit board 60 to cause the posts 76 to upwardly enter the circuit board body holes 78. As the circuit board is pivoted downwardly to its operative position on the support tray, rear side edge portions 82 of the circuit board body rearwardly deflect the latch

portions 74 until hooked upper end portions thereof forwardly snap over top side portions of the circuit board body (see FIG. 3) to releasably lock the circuit board on the rear end portion of the support tray 38.

5 With the circuit board 70 releasably mounted on the support tray 38 in this manner, the posts 76 preclude edgewise movement of the circuit board relative to the support tray so that the posts 76 resist in shear the insertion and removal loads imposed
10 on the circuit board as its plug portion 64 is pushed into and pulled out of its associated hot plug socket 32 as later described. To protect the latch portions 74 against excessive rearward bending, due to installation forces or other forces exerted thereon, a
15 protective abutment wall section 84 is formed on the rear tray end portion 44 a short distance behind and around the outer side of each latch portion 74. These abutment walls 84 act as stops to limit the rearward deflection of each latch portion 74, and as guards to
20 protect the latch portions from damage.

 As best illustrated in FIG. 3, with the circuit board 70 mounted on the support tray 38, opposite end edge portions 90 of the circuit board body 62 define rearward continuations of the side edge portions 46 of
25 the support tray 38. To provide for operative wiring interconnections between the circuit board 70, the disk drive 10, and the indicating lights 50, various connector pin sections, such as the illustrated pin sections 86 and 88, are mounted on the circuit board
30 body 62.

 Pin section 86 is operatively connected to the rear end of the mounted disk drive 10 by a conventional ribbon cable 92, pin section 88 is operatively

connected to the indicating lights 50 by wires 94 (see FIG. 3), and pin section 88 is operatively connected to the underside of the disk drive 10 by wires 96. The wires 94,96 are conveniently routed to the indicating lights 50 and the underside of the disk drive 10 through a wire passage disposed on the top side of the support tray body 40 and generally defined by notches 98 formed in transverse stiffening rib portions 100 of the support tray body, and holding tab portions 102 that overlies the routed wiring.

Referring now to FIGS. 2, 5 and 6, the support trays 38 are slidably and removably mounted within the cage structure 16 by means of four molded plastic guide channel members 106, one of which is visible in FIG. 2 and perspective illustrated in FIGS. 5 and 6. Each guide channel member 106 has an elongated configuration; a rear end 108; a transversely enlarged front end 110; an outer side 112; an inner side 114; and a generally U-shaped cross-section along its length. The cross-sectional configuration of each guide channel member defines therein a longitudinally extending channel or track 116 that laterally opens through the inner side 114 of the member and vertically widens at the front end of the member to facilitate the slidable insertion therein of a circuit board end edge portion as later described.

The four guide channel members 106 are arranged in an upper pair removably secured in a parallel, laterally opposing relationship to the inner sides of the cage side walls 24 and 26, and a lower pair removably secured in a parallel, laterally opposing relationship to the inner sides of the cage side walls 24 and 26. Guide channel members 106 are releasably

snap-fitted onto the cage side walls 24,26 using upper and lower horizontal rows of generally T-shaped openings 118,120,122 formed in each of the cage side walls 24 and 26 (see FIGS. 1, 2 and 6).

5 As best illustrated in FIG. 6, each of the side wall openings 118,120,122 has a vertically enlarged front end portion 124, and a rear end portion 126 that is vertically narrowed by upper and lower portions 128,130 or the particular cage side wall. For purposes
10 later described, horizontally elongated rectangular openings 132 are formed in the cage side walls 24,26 between each pair of openings 118 and 120, and inturned side wall tab portions 134 are positioned beneath the front ends of the openings 132.

15 Formed on the outer side of each of the guide channel members 106, and projecting outwardly therefrom, are three longitudinally spaced pairs of upwardly and downwardly extending holding tabs 136 and 138. Between the front two sets of tabs 136,138 the
20 guide channel member has formed thereon a horizontally elongated, inwardly deflectable resilient latch portion 140 laterally projecting outwardly beyond the outer side surface 112 of the guide channel member and having a front end surface 142.

25 Between its rear two pairs of tabs 136,138 each guide channel member 106 has two longitudinally spaced pairs 144,146 of ribbed outward projections formed on its top and bottom side edge surfaces. These
30 projections have removably snap-fitted thereon clip member pairs 148,150 projecting inwardly from the outwardly bowed body portion 152 of a resiliently deformable sheet metal grounding clip member 154 positioned on the outer side of the guide channel

member as illustrated in FIGS. 5 and 6. Projecting inwardly from the top and bottom side edges of the grounding clip member 154, and respectively overlying the top and bottom side edges of the guide channel member 106, are top and bottom side portions 156 and 158. As illustrated, side portion 156 has upturned front and rear ends, and side portion 158 has downturned front and rear ends.

As representatively illustrated in FIG. 6, each guide channel member 106 is removably snap-fitted onto its associated cage side wall (for example, the illustrated left cage side wall 24) by first outwardly inserting the three tab pairs 136,138 into the enlarged front portions 124 of the side wall openings 118,120,122 as indicated by the dashed arrows in FIG. 6, and pressing the guide channel member against the interior surface of the cage side wall. This initial insertion and pressing causes the latch portion 140 to be engaged and inwardly depressed by the side wall 24, and also resiliently bends the clip member body portion 152 against the side wall 24.

With the guide channel member 106 pressed against the cage side wall, the guide channel member is then rearwardly slid along the side wall until the latch portion 140 snaps outwardly into the side wall opening 132. This releasably locks the guide channel member in place on the cage side wall, the front end surface 142 of the latch portion 140 rearwardly overlying the front end surface 162 of the side wall opening 132 and preventing forward movement of the guide channel member relative to the cage, and the rear edge portions of the tab pairs 136,138 abutting the rear end surfaces 164 of the side wall opening portions 126 and preventing

2106626

-16-

rearward movement of the guide channel member relative to the cage.

Each guide channel member 106 may be quickly removed from the cage 16 simply by depressing the latch
5 portion 140 from the outside of the cage, forwardly sliding the guide channel member along the inner surface of its associated cage side wall, and then removing the tab pairs 136,138 from the front end portions 124 of the side wall openings 118,120 and 122.
10 The configuration of each guide channel member 106 makes it reversible - i.e., each guide channel member may be operatively installed on either of the cage side walls 24 and 26. For example, the illustrated FIG. 2 guide channel member 106 installed on the left cage
15 side wall 24 can be alternately installed on the right cage side wall 26 simply by removing the guide channel member from the left side wall, rotating the removed guide channel member 180° about its longitudinal axis, and then snapping the guide channel into place on the
20 right cage side wall 26.

With the two horizontally opposed pairs of guide channel members 106 operatively installed on the inner sided of the cage side walls 24,26 as described above, the two tray-mounted disk drives 10 may simply be
25 pushed into place within the cage 16 by inserting opposite end edge portions of the circuit board body portions 62 into the track portions of the upper and lower opposing guide channel pairs and rearwardly sliding the circuit board and tray edge portions along
30 the tracks until the circuit board portions 64 are operatively hot-plugged into their associated sockets 32 at the rear end of the cage. Either of the disk drives 10 may be removed from the cage, without

disturbing the operation of the other disk drive, by simply pulling the disk drive rearwardly out of the cage.

Referring now to FIG. 7, as each of the disk drives 10 rearwardly reaches its operating position within the cage 16, the grounding screws 56 projecting outwardly from opposite sides of the disk drive slide under and upwardly engage the upper side portions 156 of the resilient sheet metal grounding clips 154 on the two guide channel members 106 that slidably support the inserted disk drive. This engagement between the grounding screws 56 and the upper grounding clip side portions 156 forms secure and reliable electrical grounding connections between the disk drive and the metal cage structure via the grounding screws and the grounding clips. It should be noted that if the guide channel member 106 shown in FIG. 7 was installed on cage side wall 26 instead of the illustrated cage wall 24, the clip member side portion 158, and not the side portion 156, would be engaged by one of the grounding screws 56.

In addition to their electrical grounding function, the two metal grounding screws 56 attached to the opposite sides of each of the disk drives 10 provide another useful function in the overall disk drive support apparatus of the present invention - they cooperate with the intumed cage side wall projections 134 (FIG. 6) to prevent the full rearward insertion of either disk drive into the cage in the event that the disk drive is in an improper upside-down orientation. Specifically, if either disk drive is turned upside-down and then inserted into the cage, the two disk drive 56 strike and are rearwardly stopped by an

associated opposing pair of the inturned side wall portions 134, thereby preventing further rearward insertion of the improperly oriented disk drive into the cage. In turn, this prevents the disk drive
5 circuit board 70 from improperly engaging its associated hot plug socket 32.

Referring now to FIG. 8 it can be seen that as each of the disk drives 10 rearwardly reaches its operative position in which its circuit board 60 is
10 fully inserted into its associated hot plug socket 32, a pair of the forwardly projecting guard plates 34 come into play to block both upper and lower manual access to the circuit board as it approaches its associated hot plug socket, the circuit board passing between the
15 two guard plates as it approaches the socket.

Referring now to FIGS. 1, 2 and 9A-9D, the manual pushing and pulling forces on the support trays 38 necessary to respectively insert their circuit board portions into the hot plug sockets, and remove their
20 circuit board portions from the sockets, are desirably lessened by the use of pairs of ejection latch members 166 pivotally secured to the front corner portions 52 of the support trays 38. As representatively illustrated in FIG. 2, each ejection latch member 166
25 is pivotable relative to its associated tray corner portion 52 between an outwardly pivoted dotted line release position and an inwardly pivoted solid line locking position. The inner ends of the latch members 166 are provided with hook portions 168 that extend
30 into the interiors of the wall channel portions 36 of the cage structure 16.

In a conventional manner, when a given pair of latch members 166 are manually pivoted outwardly from

their solid line positions (when their associated disk drive is in its operatively inserted position within the cage) their hook portions 168 bear against the interiors of the channel wall portions 36 in a manner forcibly moving the disk drive rearwardly to unplug its circuit board from its associated hot plug socket. When the latch members 166 are fully pivoted outwardly to their dotted line positions, their hook portions 168 are automatically removed from the wall channel portions 36, thereby permitting the disc drives to be slid rearwardly out of the cage.

Conversely, when one of the disk drives 10 is slid partially into the cage with its latch members 166 in their dotted line positions, to bring the hook portions 168 into alignment with their associated wall channel portions 36, inward pivoting of the latch members 166 from their dotted line positions to their solid line positions causes the hook portions to enter the wall channel portions 36 and then bear against them in a manner forcing the support tray circuit board 60 rearwardly into its associated hot plug socket 32.

Although the general operation of the ejection latch members 166 is conventional, they are pivotally and removably secured to the support tray corner portions 52 in a unique manner that avoids the necessity using of connecting screws or rivets, and which will now be described in conjunction with FIGS. 9A-9D.

Projecting outwardly from the underside of each of the support tray corner portions 52 are a cylindrical boss 170; an inwardly depressible resilient latch portion 172 having an outer end surface 174; and a cylindrical post 176 having a circular outer end

portion 178 from which three circumferentially and equally spaced projections 180 radially outwardly extend.

5 The illustrated ejection latch member 166 has a connection plate portion 182 from which the hook portion 168 outwardly extends. Extending outwardly from the plate portion 182 in the opposite direction is a lever plate section 184. Lever plate section 184 has an inner side surface 186 from which a laterally spaced
10 pair of elongated resilient latch portions 188 outwardly extend, outer end sections of the latch portions 188 having facing arcuate notches 190 formed therein.

A hole 192 is formed transversely through the
15 connection plate portion 182 and is complementarily configured relative to the upper post end 178, the hole having three circumferentially spaced radially outwardly projecting portions through which the upper post end projections 180 may be passed when the upper
20 post end projections 180 and the hole portions 194 are circumferentially aligned.

Each ejection latch member 166 is pivotally and removably installed on the underside of its associated support tray corner portion 52 in the following manner.
25 Referring first to FIG. 9A, the latch member 166 is oriented as shown so that its connection plate hole 192 is positioned outwardly from the outer post end portion 175 in a manner such that the hole portions 194 are circumferentially aligned with the post end projections
30 180.

Next, as depicted in FIG. 9B, the latch member connection plate portion 182 is moved inwardly toward and pressed against the underside of the corner portion

52 to cause the post projections 180 to pass through the hole portions 194 and outwardly overlies the connection plate portion 182. With the connection plate portion 182 in its FIG. 9B orientation it contacts and inwardly depresses the corner portion latch 172.

While the connection plate portion 182 is held against the support tray corner portion 52, the latch member 166 is rotated a short distance about post 176 in a clockwise direction to move the plate hole portions 194 out of circumferential alignment with the post projections 180 as shown in FIG. 9C. At this point, in which the latch member 166 is in its dotted line position shown in FIG. 2, the latch portion 172 pops back up so that its end surface 174 faces the plate portion edge surface 196, and the latch member 166 is pivotally and captively retained on the support tray corner portion 52.

It can be seen that, due to the latch end abutment surface 174, the latch member cannot be pivoted in a counterclockwise direction past its FIG. 9C position, to align the hole portions 194 with the post end portions 180 and permit removal of the connecting plate portion 182 from the post 176, unless the latch portion 172 is manually depressed and the latch 166 pivoted back to its FIG. 9B position.

From its FIG. 9C open position the latch member 166 may be pivoted in a clockwise direction to its FIG. 9D closed position in which the boss 170 is received within and releasably held between the arcuate notches 190 in the latch portions 188. At this point the latch member is still captively retained on the post 176 since the hole portions 194 have not been rotated far

enough to be brought into alignment with the post end portions 180.

5 The latch member may be quickly removed from the post 176 simply by rotating the latch member in a counterclockwise direction to its FIG. 9C position, manually depressing the latch 172 and further rotating the latch member to its FIG. 9B position, and then lifting the connecting plate portion 182 off the post 176.

10 While the disk drive support apparatus representatively described above provides hot plug connections for the disk drives, it will readily be appreciated by those skilled in this art that it could also be employed using non-hot plug socket connections
15 for the disk drives if desired.

20 The foregoing detailed description is to be clearly understood as being given by way of illustration and example only, the spirit and scope of the present invention being limited solely by the appended claims.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OR PRIVILEGE IS CLAIMED IS DEFINED AS FOLLOWS:

1. Apparatus for supporting and providing a plug
connection for a disk drive, comprising:
 - a housing cage structure having an open front end,
a rear end wall having a plug socket thereon, and first
and second opposite side walls extending between said
open front end and said rear end wall;
 - first and second elongated guide channel members
having open side portions, and generally U-shaped
cross-sections along their lengths;
 - means for mounting said guide channel members on
the facing surfaces of said first and second side walls
in a parallel relationship in which said open side
portions of the mounted first and second guide channel
members face one another and said first and second
guide channel members longitudinally extend toward said
plug socket in a generally laterally aligned
relationship therewith;
 - a support tray member having opposite side edge
portions slidably and supportingly receivable in the
interiors of said first and second guide channel
members in a manner permitting said support tray member
to be slid rearwardly along said first and second guide
channel members to bring said support tray member to an
operating position within said cage structure, said
support tray member having a rear end portion and a top
side portion disposed forwardly of said rear end
portion;
 - a printed circuit board;
 - means for removably mounting said printed circuit
board on said rear end portion of said support tray
member for movement therewith in a manner such that
when said support tray member is rearwardly moved
through said cage structure to said operating position

34 the mounted printed circuit board is conductively and
35 removably received within said plug socket;

36 means for removably securing the disk drive to
37 said top side portion of said support tray member for
38 movement therewith; and

39 means for electrically coupling said printed
40 circuit board to the disk drive.

2. The apparatus of Claim 1 wherein :

2 said printed circuit board has formed on a side
3 surface thereof a plurality of conductive, rearwardly
4 extending signal traces electrically connectable to
5 said plug socket in response to operative rearward
6 insertion of said printed circuit board into said plug
7 socket, and a plurality of conductive grounding traces
8 electrically connectable to said plug socket in
9 response to operative rearward insertion of said
10 printed circuit board into said plug socket,

11 said grounding traces extending rearwardly beyond
12 said signal traces, whereby, upon insertion of said
13 printed circuit board into said plug socket a grounding
14 connection is formed therebetween before a signal
15 connection and, upon removal of said printed circuit
16 board from said plug socket, the signal connection
17 therebetween is broken before the grounding connection.

3. The apparatus of Claim 1 wherein said means
2 for removably mounting said printed circuit board on
3 said rear end portion of said support tray member
4 include:

5 upwardly projecting clip means formed on said rear
6 end portion of said printed circuit board and operative
7 to engage said printed circuit board and provide for a

8 releasable snap-on fit thereof on said rear end portion
9 of said support tray member.

4. The apparatus of Claim 3 wherein:

2 said clip means include a spaced plurality of
3 upwardly projecting resilient clip members positioned
4 on a rear edge portion of said support tray member and
5 being rearwardly deflectable to lockingly engage rear
6 edge portions of said printed circuit board, and

7 said support tray member has wall means formed
8 thereon and operative to protectively limit rearward
9 deflection of said resilient clip members.

5. The apparatus of Claim 3 wherein said means
2 for removably mounting said printed circuit board on
3 said rear end portion of said support tray member
4 further include:

5 a spaced plurality of holes extending transversely
6 through said printed circuit board, and

7 a spaced plurality of upwardly projecting post
8 portions disposed on said rear end portion of said
9 support tray member and being receivable in said holes
10 to essentially preclude edgewise movement of said
11 printed circuit board relative to said support tray
12 member.

6. The apparatus of Claim 1 wherein:

2 said support tray member is of a molded plastic
3 construction.

7. The apparatus of Claim 1 wherein:

2 said support tray member has a plate member
3 projecting upwardly from the front end thereof in front
4 of the front end of the mounted disk drive,
5 said plate member has a plurality of disk drive
6 indicating lights operatively mounted thereon, and
7 said apparatus further comprises wiring means,
8 interconnected between said printed circuit board and
9 said indicating lights, for transmitting electrical to
10 said indicating lights.

8. The apparatus of Claim 7 further comprising:

2 wall means associated with said support tray
3 member for forming thereon a wire passage, beneath the
4 mounted disk drive, through which said wiring means
5 extend.

9. The apparatus of Claim 1 wherein:

2 said housing cage structure has opposing channel
3 portions formed on said open front end thereof and
4 extending transversely to said guide channel members,
5 said support tray member has opposite front corner
6 portions, and
7 said apparatus further comprises a pair of
8 ejection latch members pivotally mountable on said
9 opposite front corner portions and operative, when
10 pivoted relative thereto, to engage said cage channel
11 portions in a manner selectively creating an insertion
12 or withdrawal force on said support tray member, and
13 means for removably and pivotally mounting said
14 ejection latch members on said opposite front corner
15 portions of said support tray members.

10. The apparatus of Claim 9 wherein, for each of
2 said ejection latch members, said means for removably
3 and pivotally mounting said ejection latch members
4 include:

5 a hole formed through the ejection latch member,
6 a post member formed on one of said front corner
7 portions of said support tray and insertable through
8 said hole, when the latch member is in a first pivotal
9 orientation relative to the post member, to rotatably
10 support the latch member on the post member,

11 first cooperating means on the post member and the
12 latch member for preventing withdrawal of the post
13 member from the latch member hole when the latch member
14 is rotated about the post member away from said first
15 pivotal orientation relative thereto, and

16 second cooperating means on said one of said front
17 corner portions and the latch member for releasably
18 blocking rotation of the latch member to said first
19 pivotal orientation thereof after the latch member is
20 operatively installed on the post member.

11. The apparatus of Claim 10 wherein:

2 said first cooperating means include a
3 circumferentially spaced plurality of radially
4 outwardly extending projections on an outer end portion
5 of the post member, and a complementarily configured
6 circumferentially spaced plurality of radially
7 outwardly extending portions of the latch member hole
8 through which said projections may be extended to
9 outwardly overlies the latch member when it is in said
10 first pivotal orientation relative to the post member,
11 and

12 said second cooperating means include a stop
13 surface on the latch member and a resilient locking
14 portion disposed on said one of said corner portions of
15 said support tray member, the locking portion being
16 depressible to permit rotation of the latch member
17 about the post member to said first pivotal
18 orientation, and releasable to form an abutment for
19 said stop surface to releasably preclude rotation of
20 the latch member to said first pivotal orientation
21 thereof.

12. The apparatus of Claim 1 wherein:

2 said printed circuit board has opposite side edge
3 portions slidably receivable in said guide channel
4 members and defining rearward extensions of said
5 opposite side edge portions of said support tray
6 member.

13. The apparatus of Claim 1 wherein:

2 said rear end wall of said housing cage structure
3 has guard wall means projecting forwardly therefrom and
4 operative to block manual access to said printed
5 circuit board when it is adjacent said plug socket.

14. The apparatus of Claim 13 wherein:

2 said plug socket is horizontally elongated, and
3 said guard wall means include first and second
4 guard plates projecting forwardly beyond said rear end
5 wall of said housing cage structure above and below
6 said plug socket.

15. The apparatus of Claim 1 wherein:

2 said housing cage structure is formed from a metal
3 material,
4 said first and second guide channel members are
5 formed from a plastic material, and
6 said apparatus further comprises sheet metal
7 grounding clip members carried by said guide channel
8 members and deformingly pressed against said first and
9 second side walls of said housing cage structure, and
10 metal grounding members secured to and projecting
11 outwardly beyond opposite side portions of the mounted
12 disk drive, said metal grounding members being
13 configured and positioned to releasably engage said
14 grounding clip members when said support member is
15 rearwardly brought to said operating position thereof
16 within said housing cage structure.

16. The apparatus of Claim 15 further comprising:

2 cooperating means on said grounding clip members
3 and said guide channel members for providing a
4 releasable snap-fit mounting connection between said
5 grounding clip members and their associated guide
6 channel members.

17. The apparatus of Claim 1 further comprising:

2 cooperating means on said guide channel members
3 and said side walls of said housing cage structure for
4 providing a releasable snap-fit attachment engagement
5 between said guide channel members and said side walls
6 of said housing cage structure.

18. The apparatus of Claim 1 further comprising:
2 cooperating means disposed on the disk drive and
3 said side walls of said housing cage structure for
4 preventing upside-down insertion of said support tray
5 member fully into said housing cage structure.

19. The apparatus of Claim 18 wherein said
2 cooperating means include:
3 an inward projection formed on one of said side
4 walls of said housing cage structure, and
5 a stop member secured to and projecting outwardly
6 from a side portion of the disk drive,
7 said inward projection being positioned to be
8 engaged by said stop member, when said support tray
9 member is partially inserted rearwardly into said guide
10 channel members in an upside-down orientation, in a
11 manner precluding further rearward insertion into said
12 housing cage structure.

20. Apparatus for removably supporting a disk
2 drive, comprising:
3 a housing cage structure having an open front end,
4 a rear end wall having a plug socket thereon, and first
5 and second opposite side walls extending between said
6 open front end and said rear end wall, and opposing
7 wall channel portions formed on said open front end;
8 first and second elongated guide channel members
9 having open side portions, and generally U-shaped
10 cross-sections along their lengths;
11 means for mounting said guide channel members on
12 the facing surfaces of said first and second side walls
13 in a parallel relationship in which said open side
14 portions of the mounted first and second guide channel

15 members face one another and said first and second
16 guide channel members longitudinally extend toward said
17 plug socket in a generally laterally aligned
18 relationship therewith and generally perpendicular to
19 said opposing wall channel portions of said housing
20 cage structure;

21 a generally flat support member having opposite
22 front corner portions, and opposite side edge portions
23 slidably and supportingly receivable in the interiors
24 of said first and second guide channel members in a
25 manner permitting said support member to be slid
26 rearwardly along said first and second guide channel
27 members to bring said support member to an operating
28 position within said housing cage structure;

29 a pair of ejection latch members pivotally
30 mountable on said opposite front corner portions of
31 said support member and operative, when pivoted
32 relative thereto, to engage said wall channel portions
33 of said housing cage structure in a manner selectively
34 creating an insertion or withdrawal force on said
35 support member; and

36 means for removably and pivotally mounting said
37 ejection latch members on said opposite front corner
38 portions of said support member, said means for
39 removably and pivotally mounting, for each ejection
40 latch member, including:

41 a hole formed through the ejection latch
42 member,

43 a post member formed on one of said front
44 corner portions of said support member and insertable
45 through said hole, when the latch member is in a first
46 pivotal orientation relative to the post member, to
47 rotatably support the latch member on the post member,

48 first cooperating means on the post member
49 and the latch member for preventing withdrawal of the
50 post member from the latch member hole when the latch
51 member is rotated about the post member away from said
52 first pivotal orientation relative thereto, and

53 second cooperating means on said one of said
54 front corner portions of said support member and the
55 latch member for releasably blocking rotation of the
56 latch member to said first pivotal orientation thereof
57 after the latch member is rotatably installed on the
58 post member.

21. The apparatus of Claim 20 wherein:

2 said first cooperating means include a
3 circumferentially spaced plurality of radially
4 outwardly extending projections on an outer end portion
5 of the post member, and a complementarily configured
6 circumferentially spaced plurality of radially
7 outwardly extending portions of the latch member hole
8 through which said projections may be extended to
9 outwardly overlies the latch member when it is in said
10 first pivotal orientation relative to the post member,
11 and

12 said second cooperating means include a stop
13 surface on the latch member and a resilient locking
14 portion disposed on said one of said corner portions of
15 said support member, the locking portion being
16 depressible to permit rotation of the latch member
17 about the post member to said first pivotal
18 orientation, and releasable to form an abutment for
19 said stop surface to releasably preclude rotation of
20 the latch member to said first pivotal orientation
21 thereof.

2106626

-33-

22. The apparatus of Claim 20 wherein said plug
2 socket is a hot plug socket.

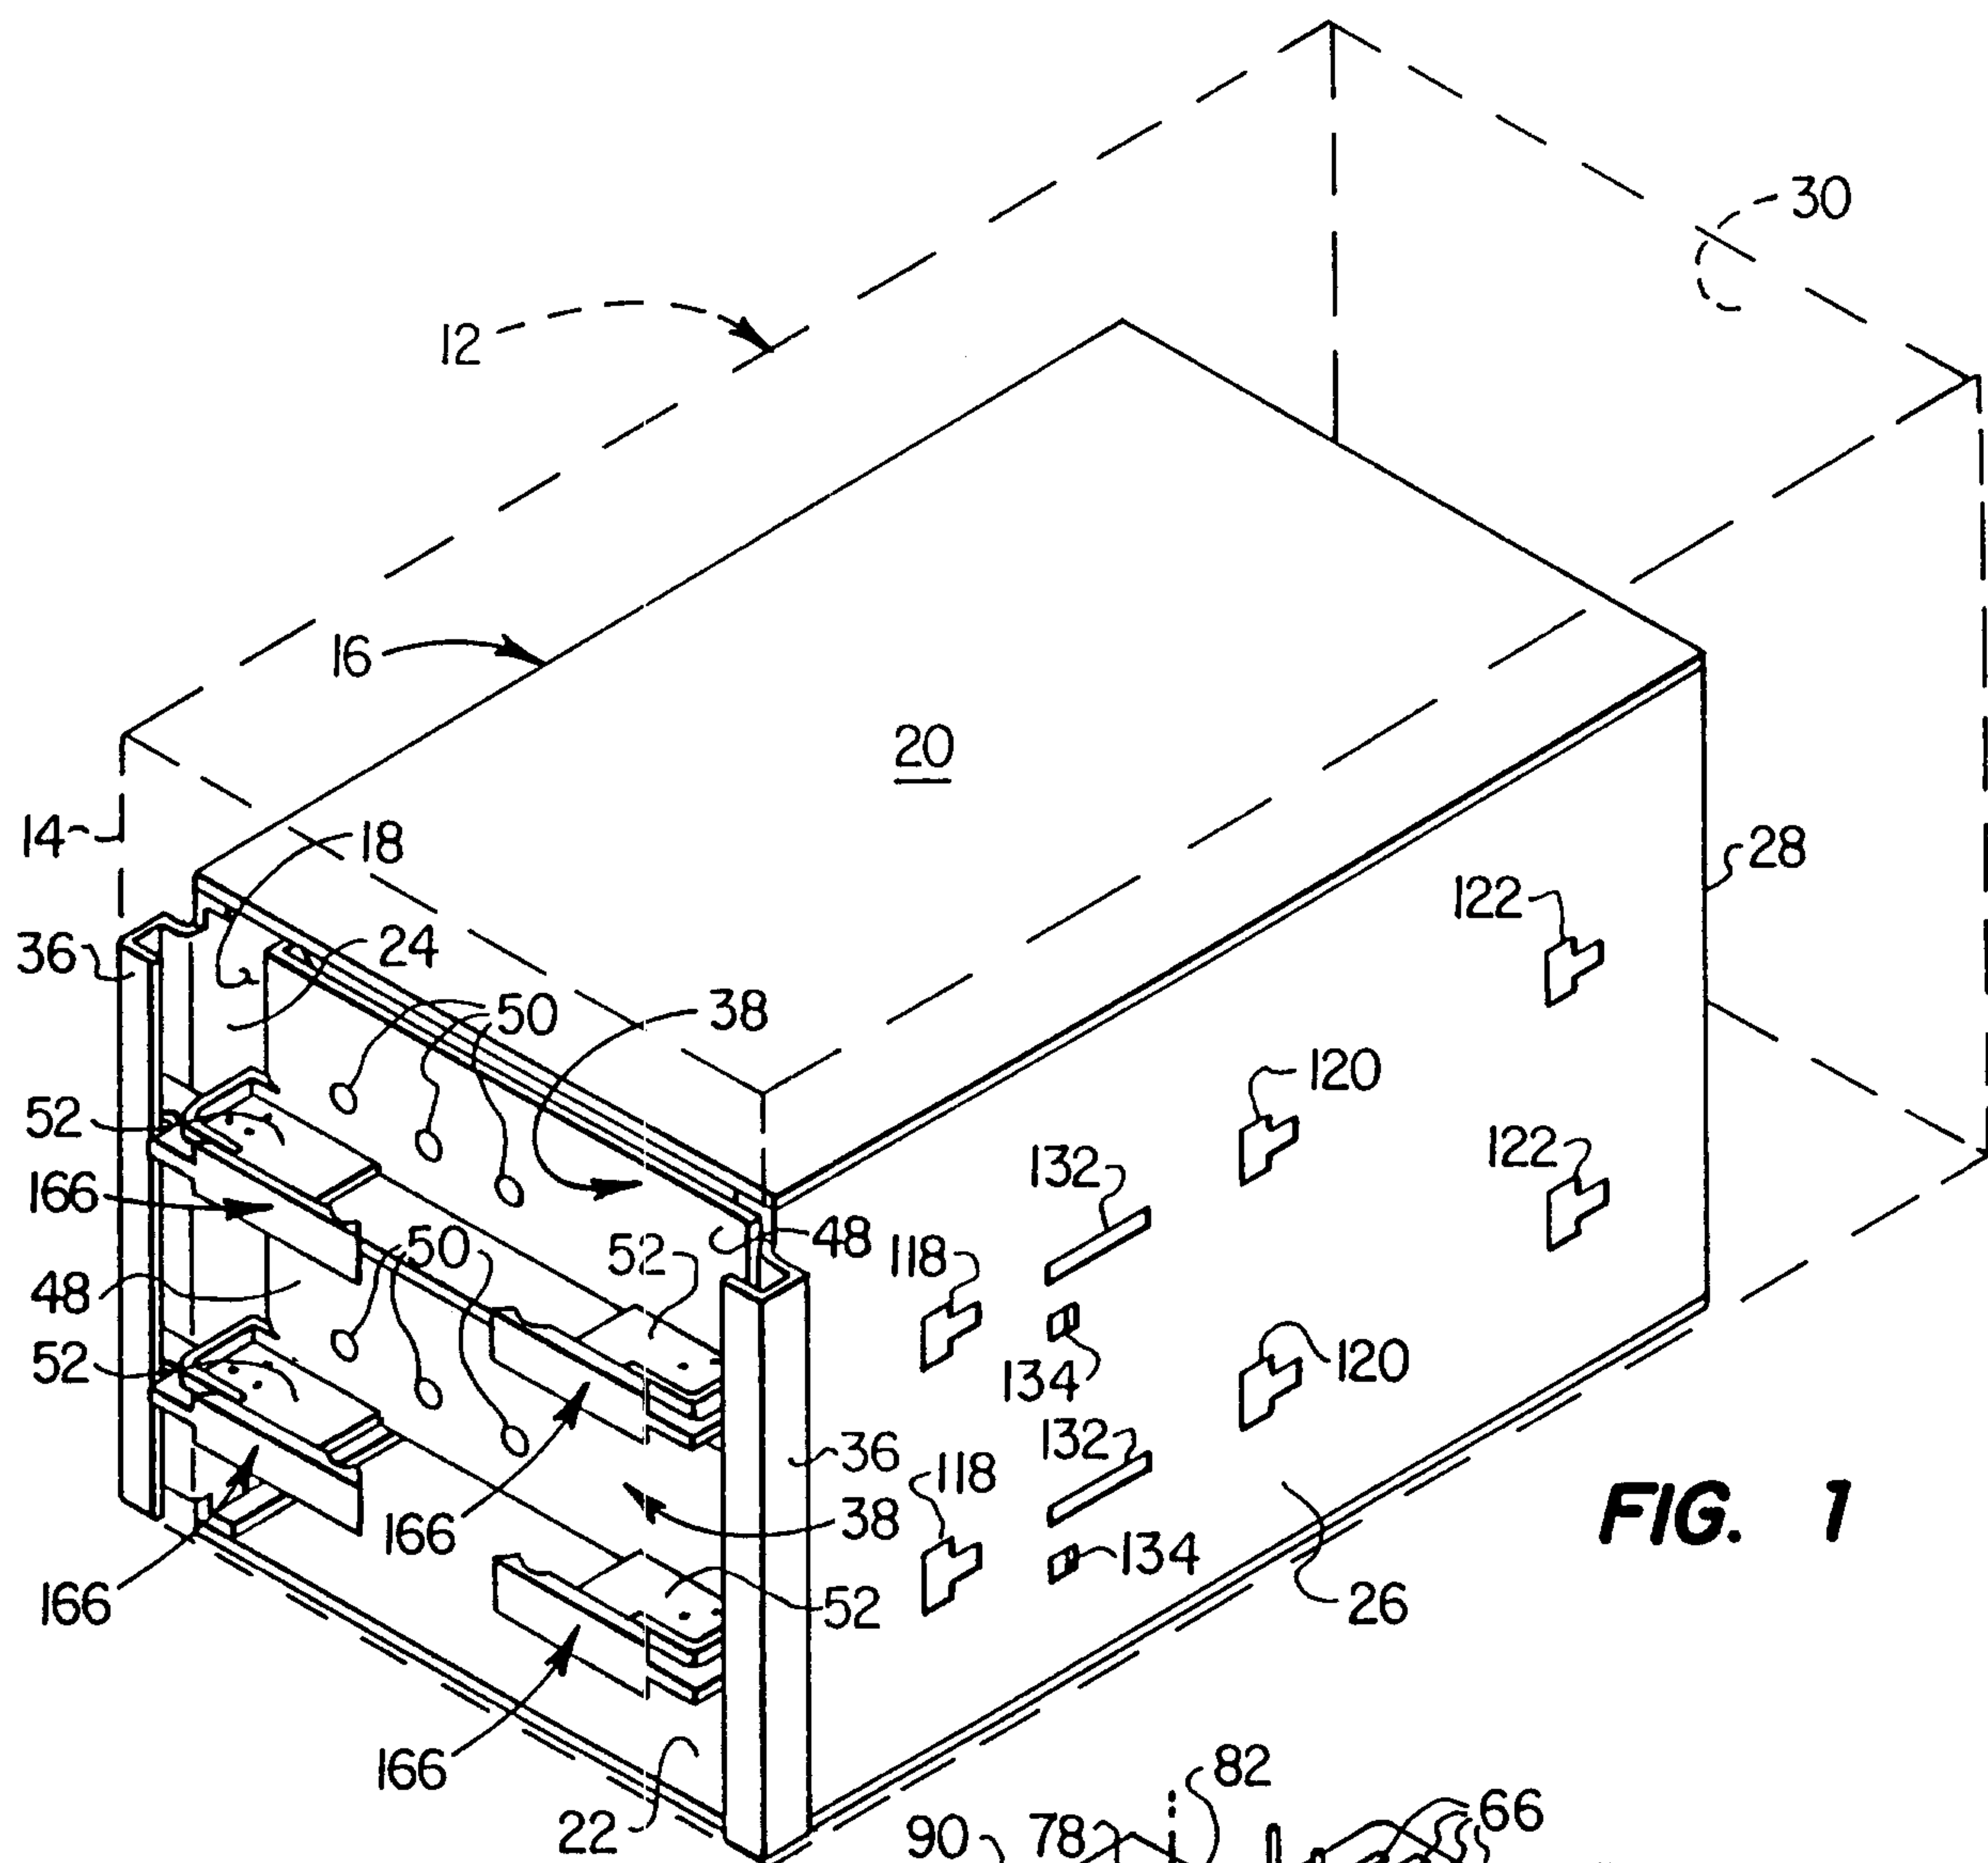


FIG. 1

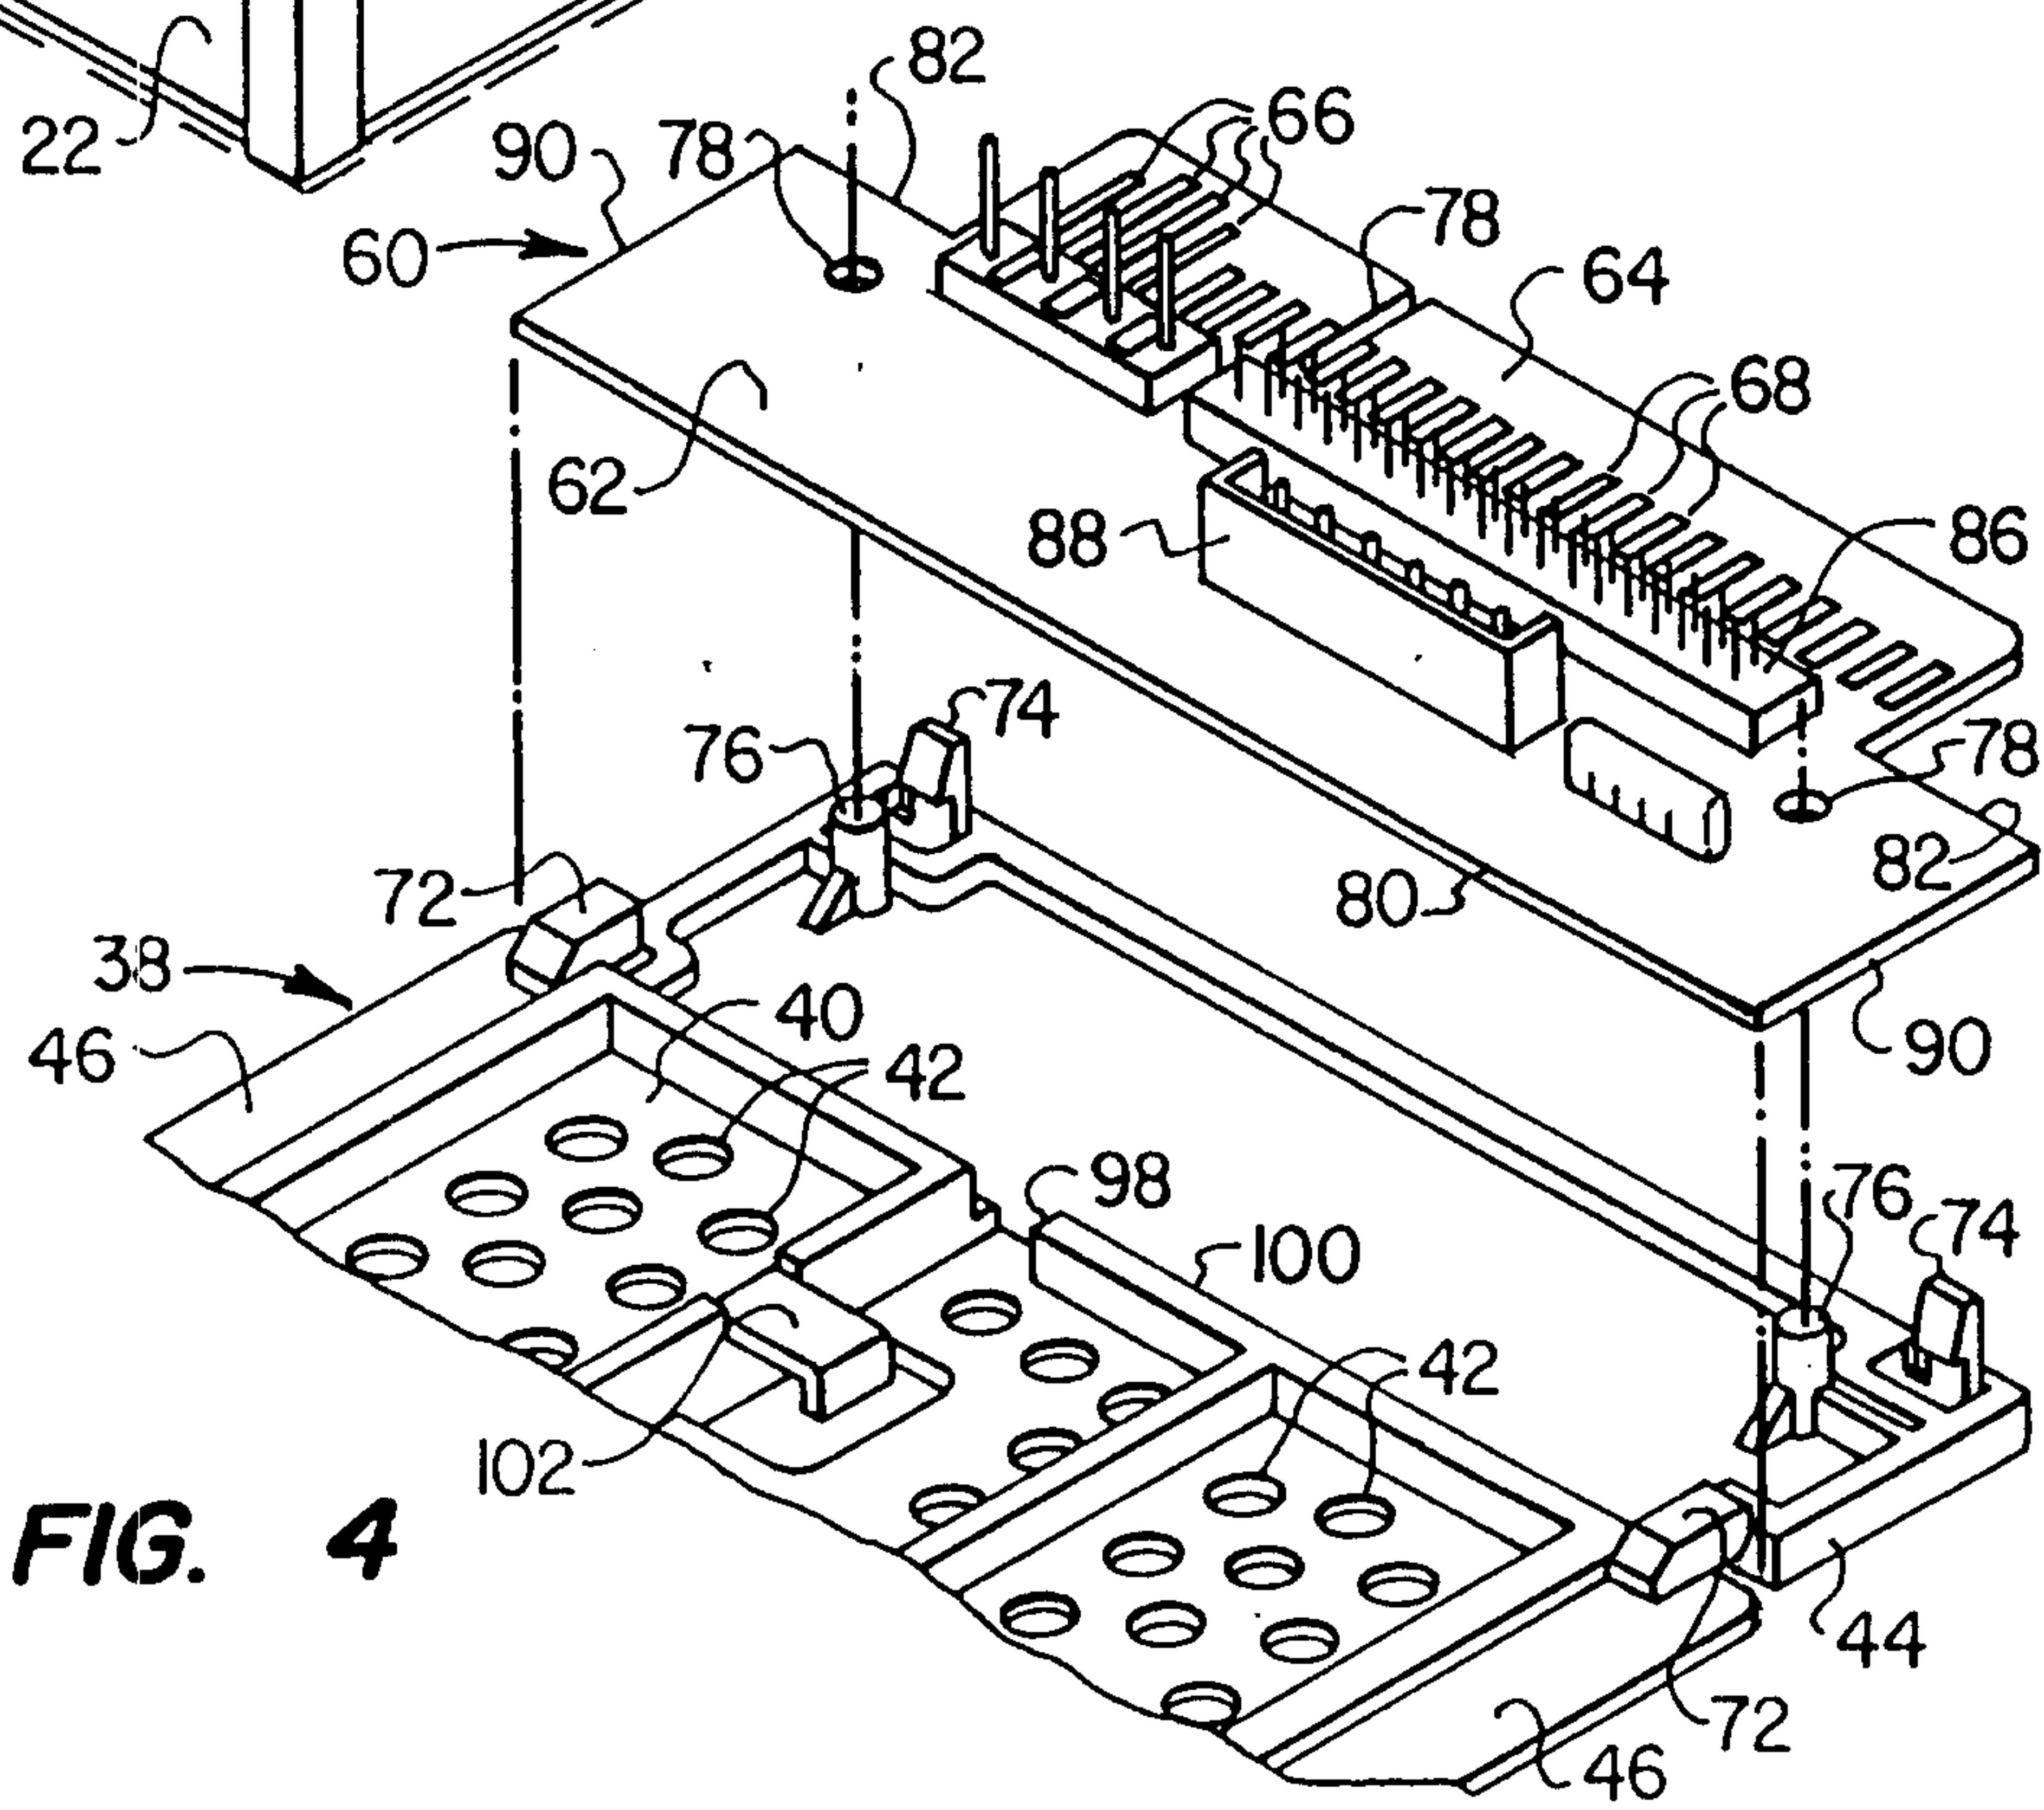


FIG. 4

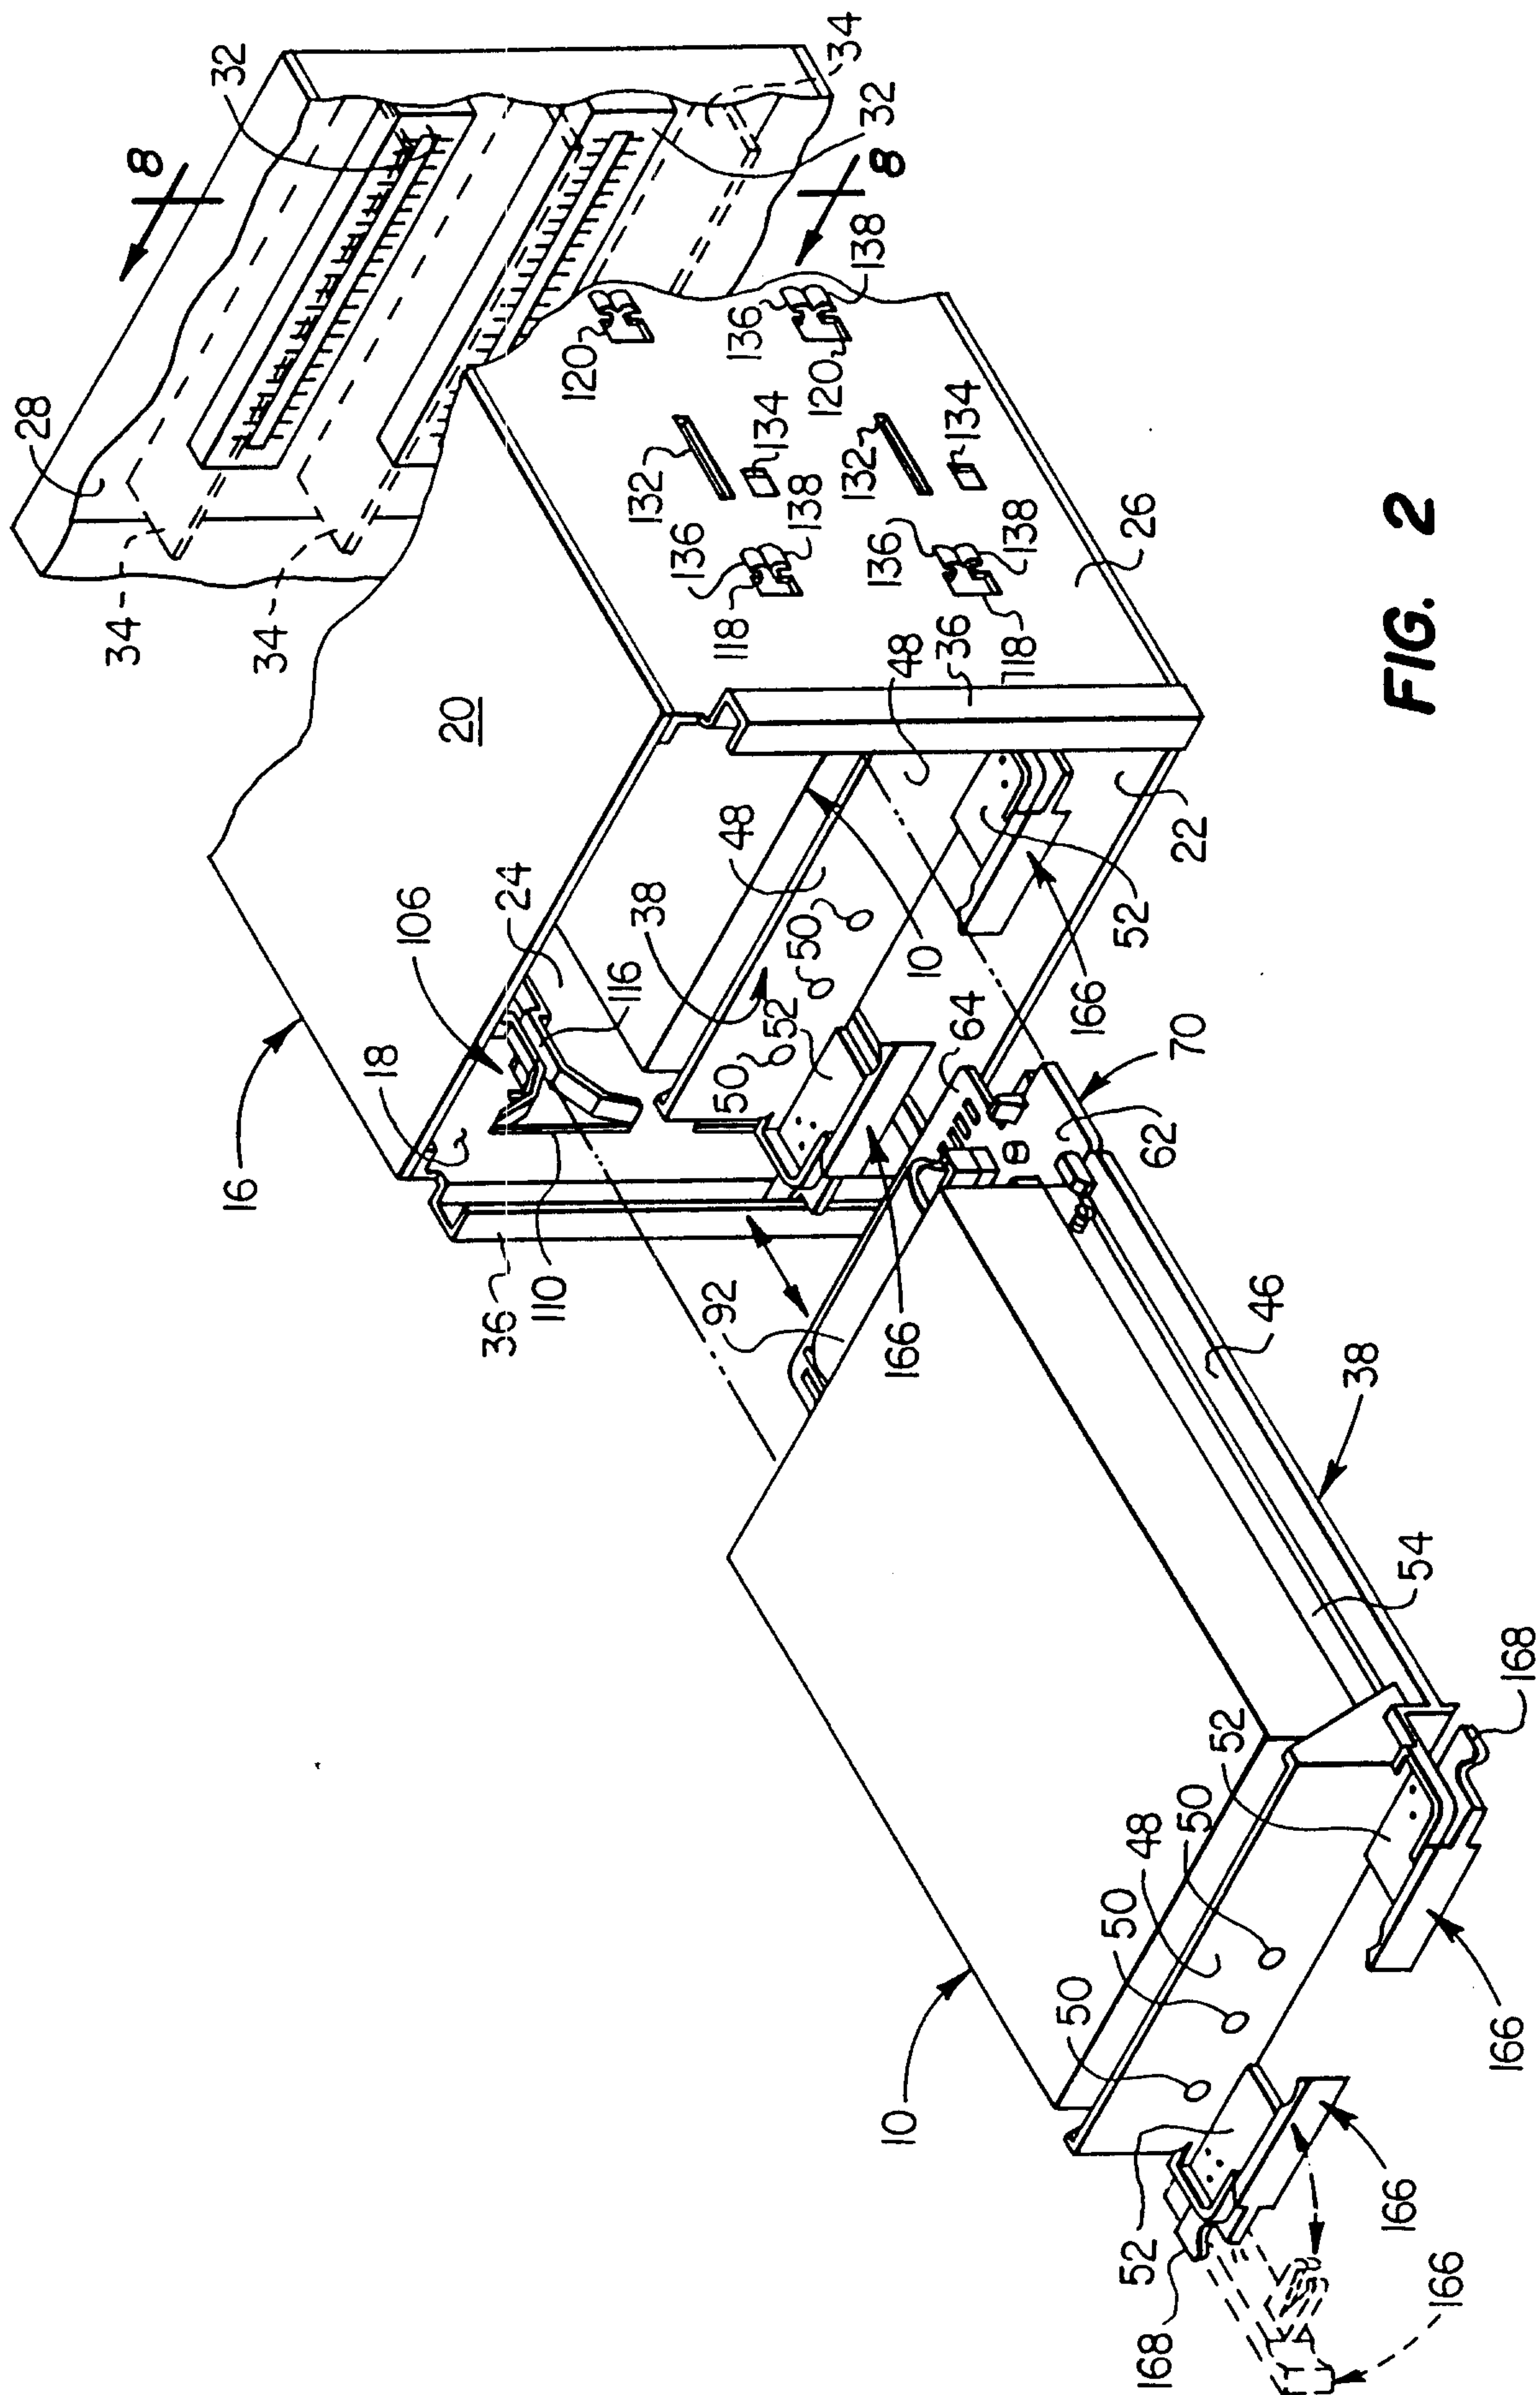


FIG. 2

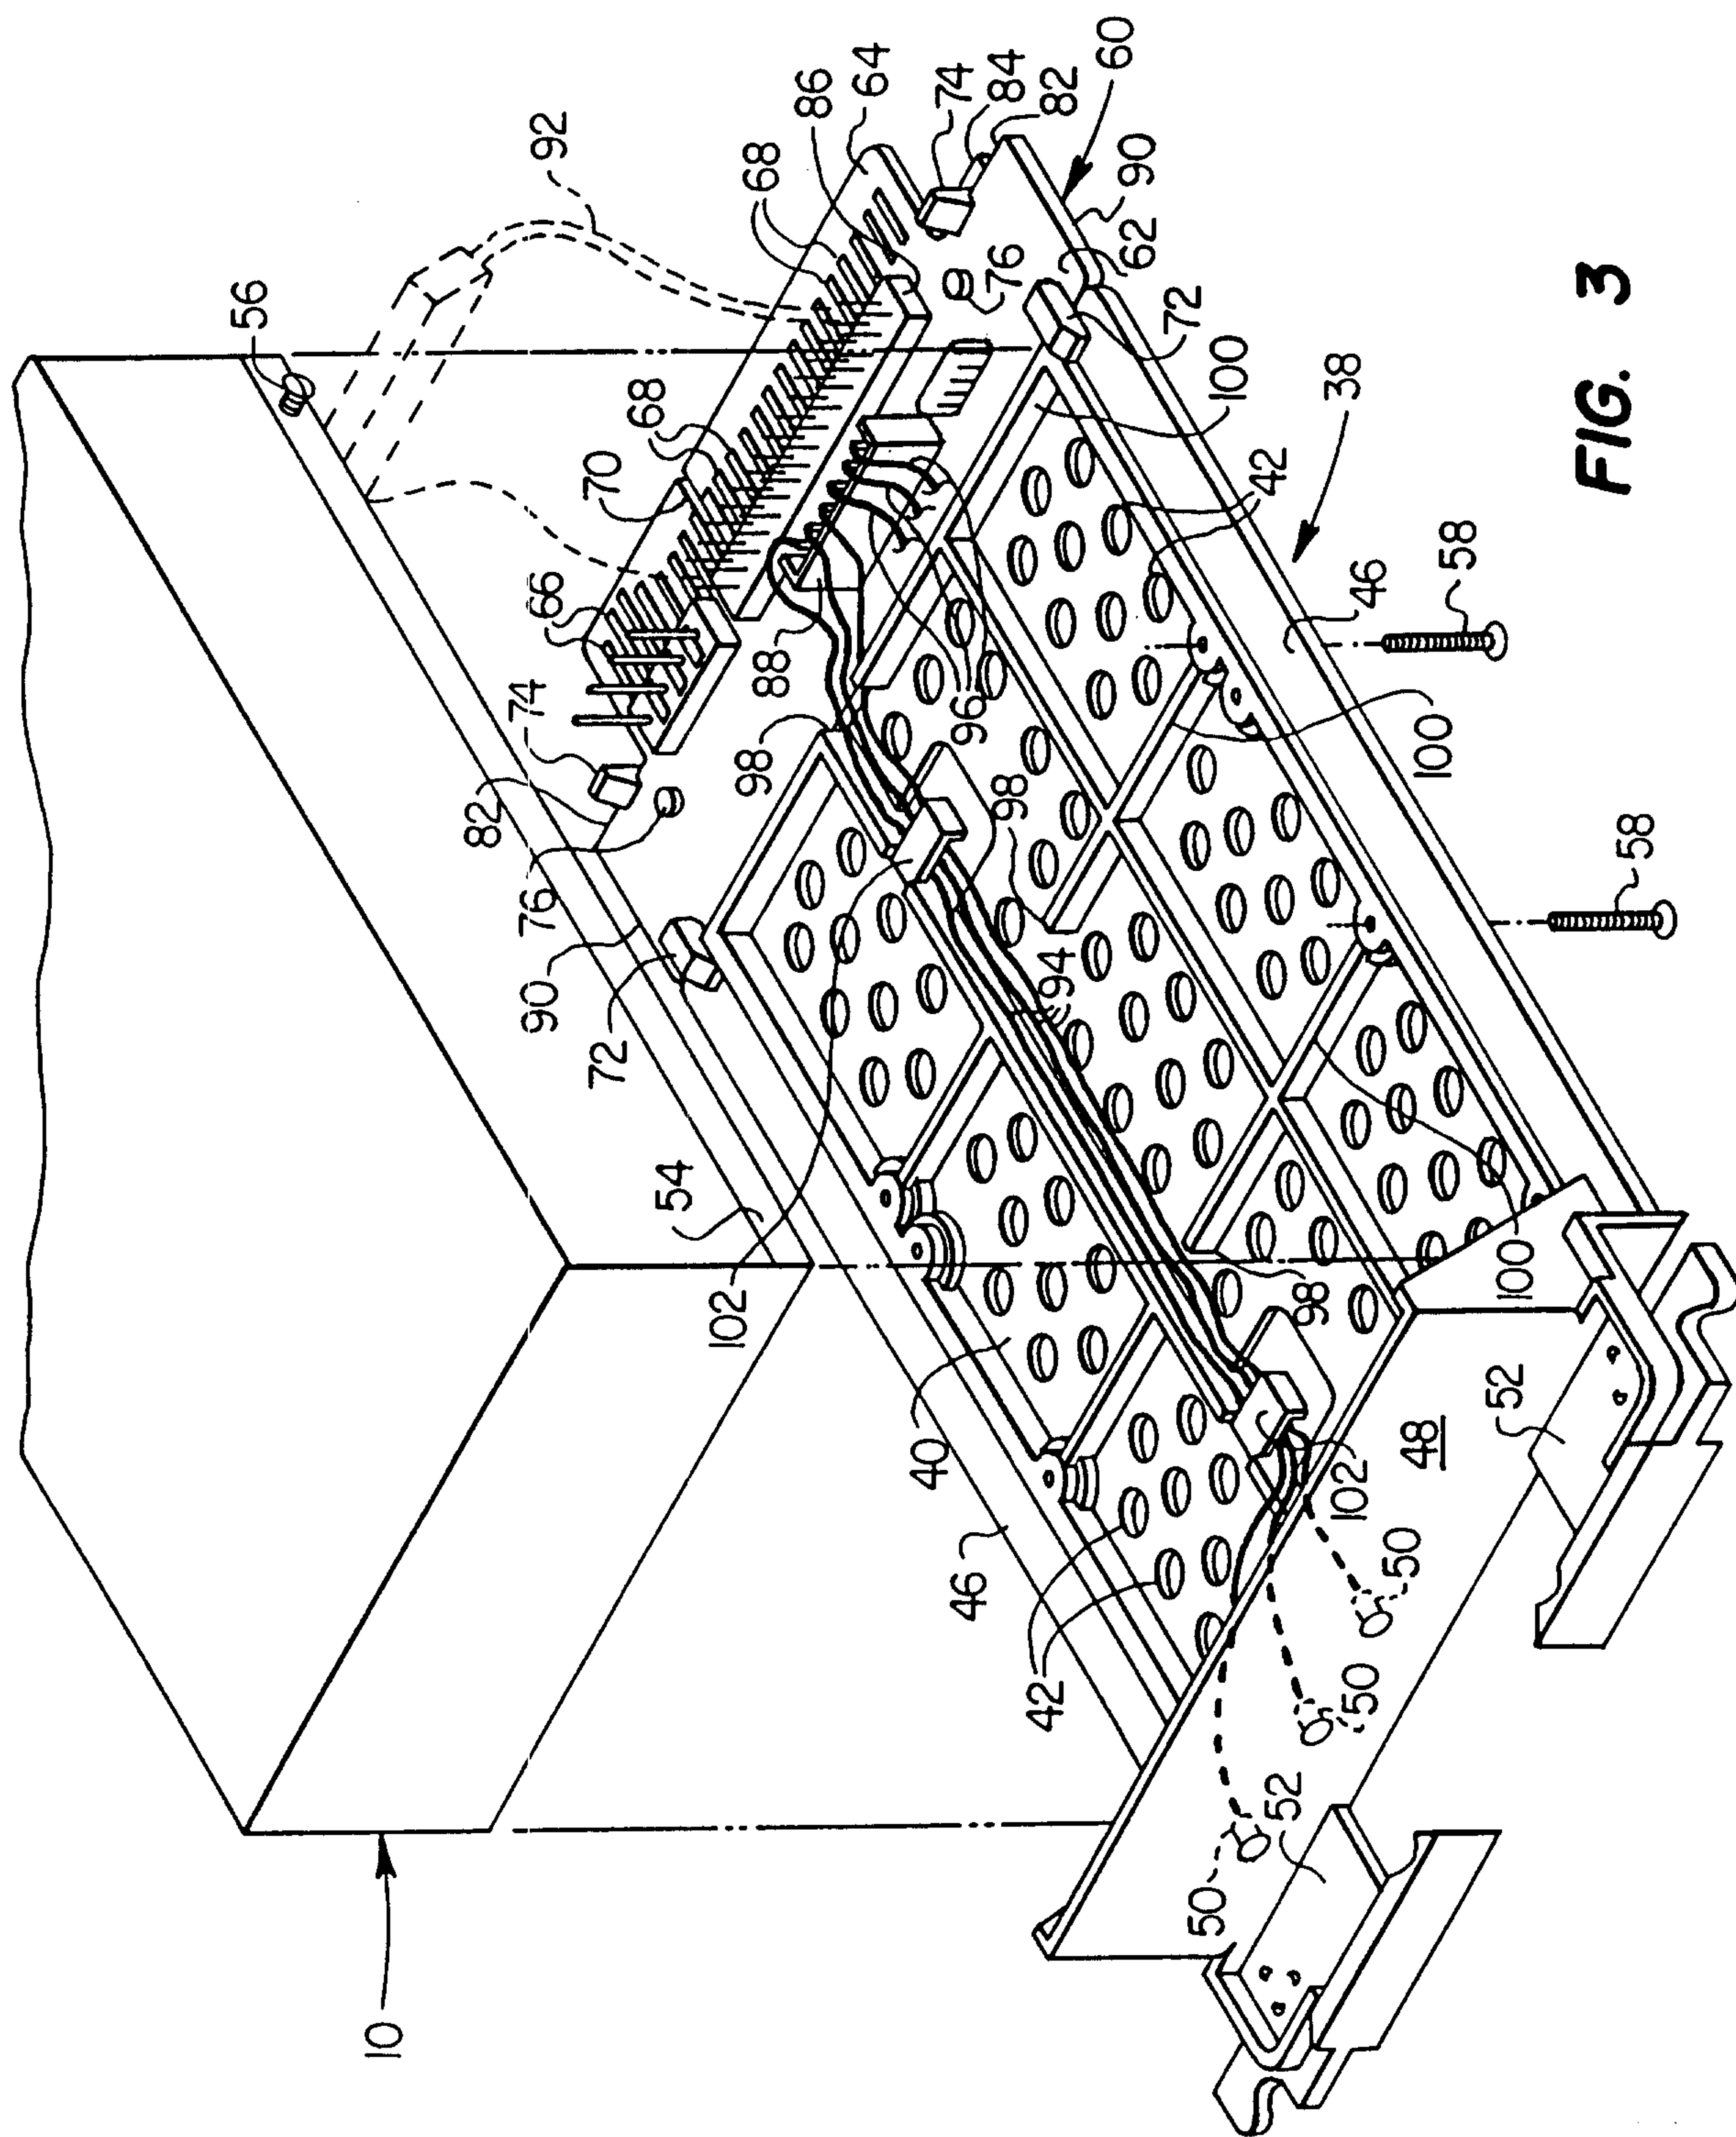


FIG. 3

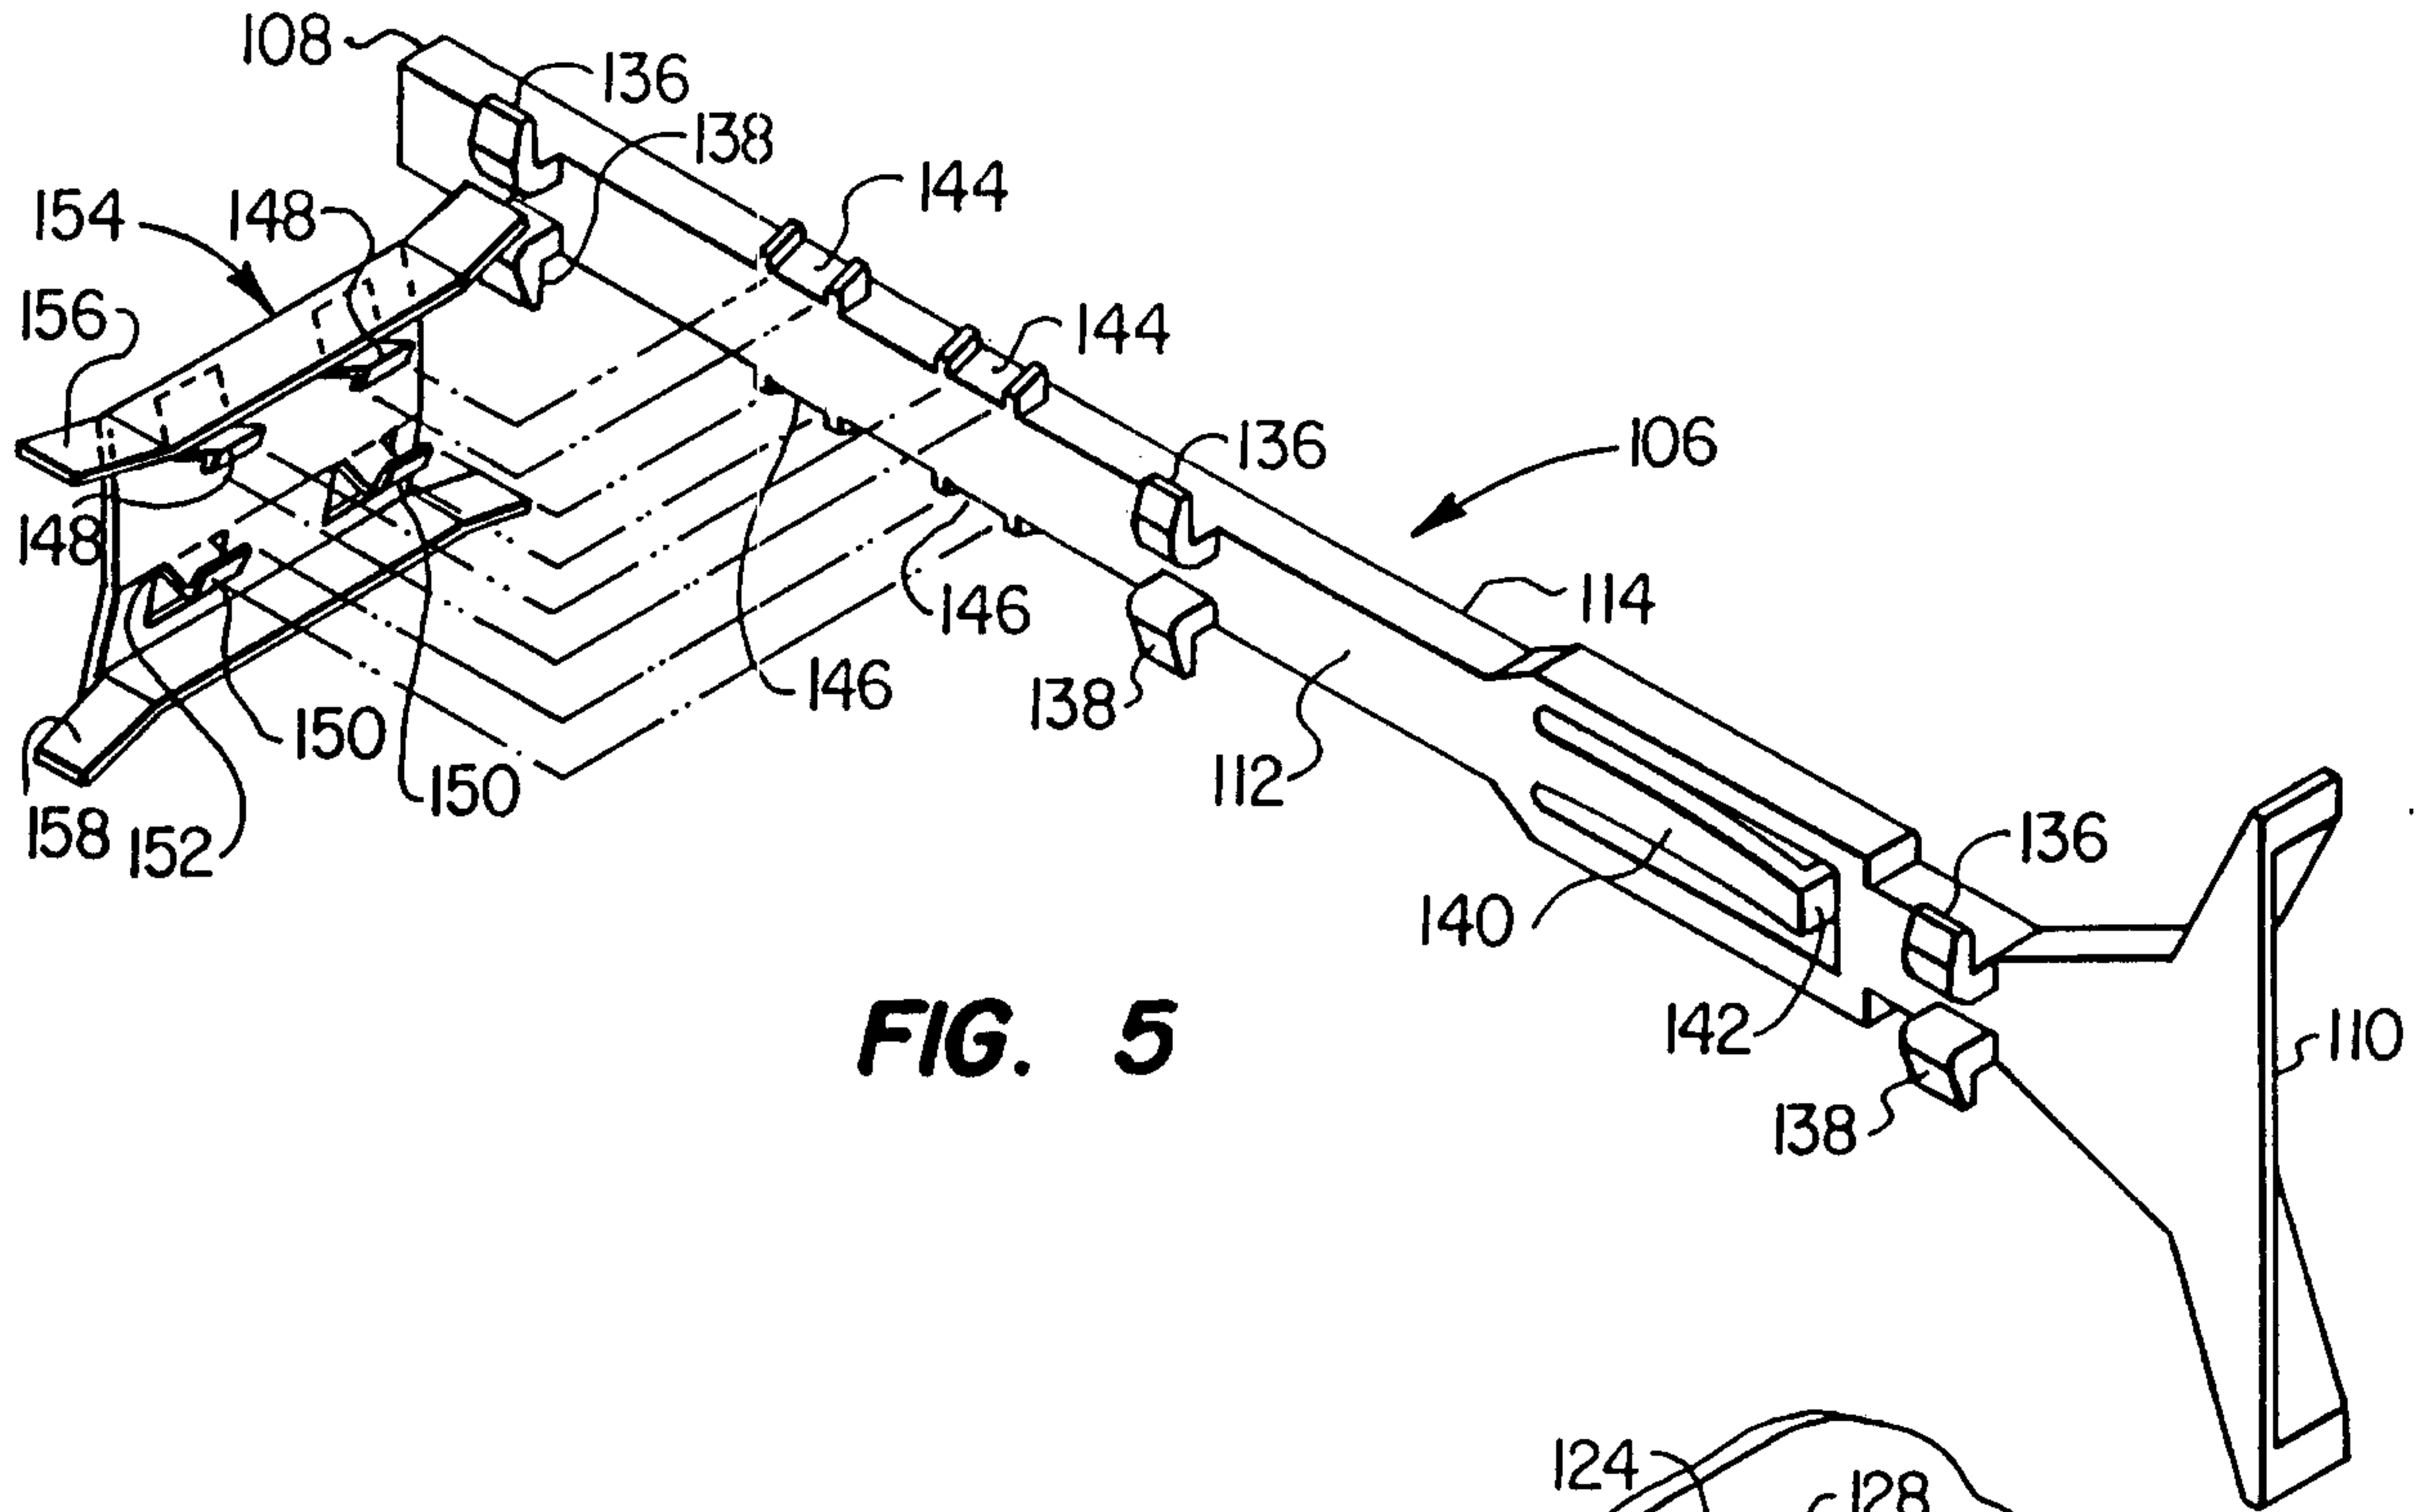


FIG. 5

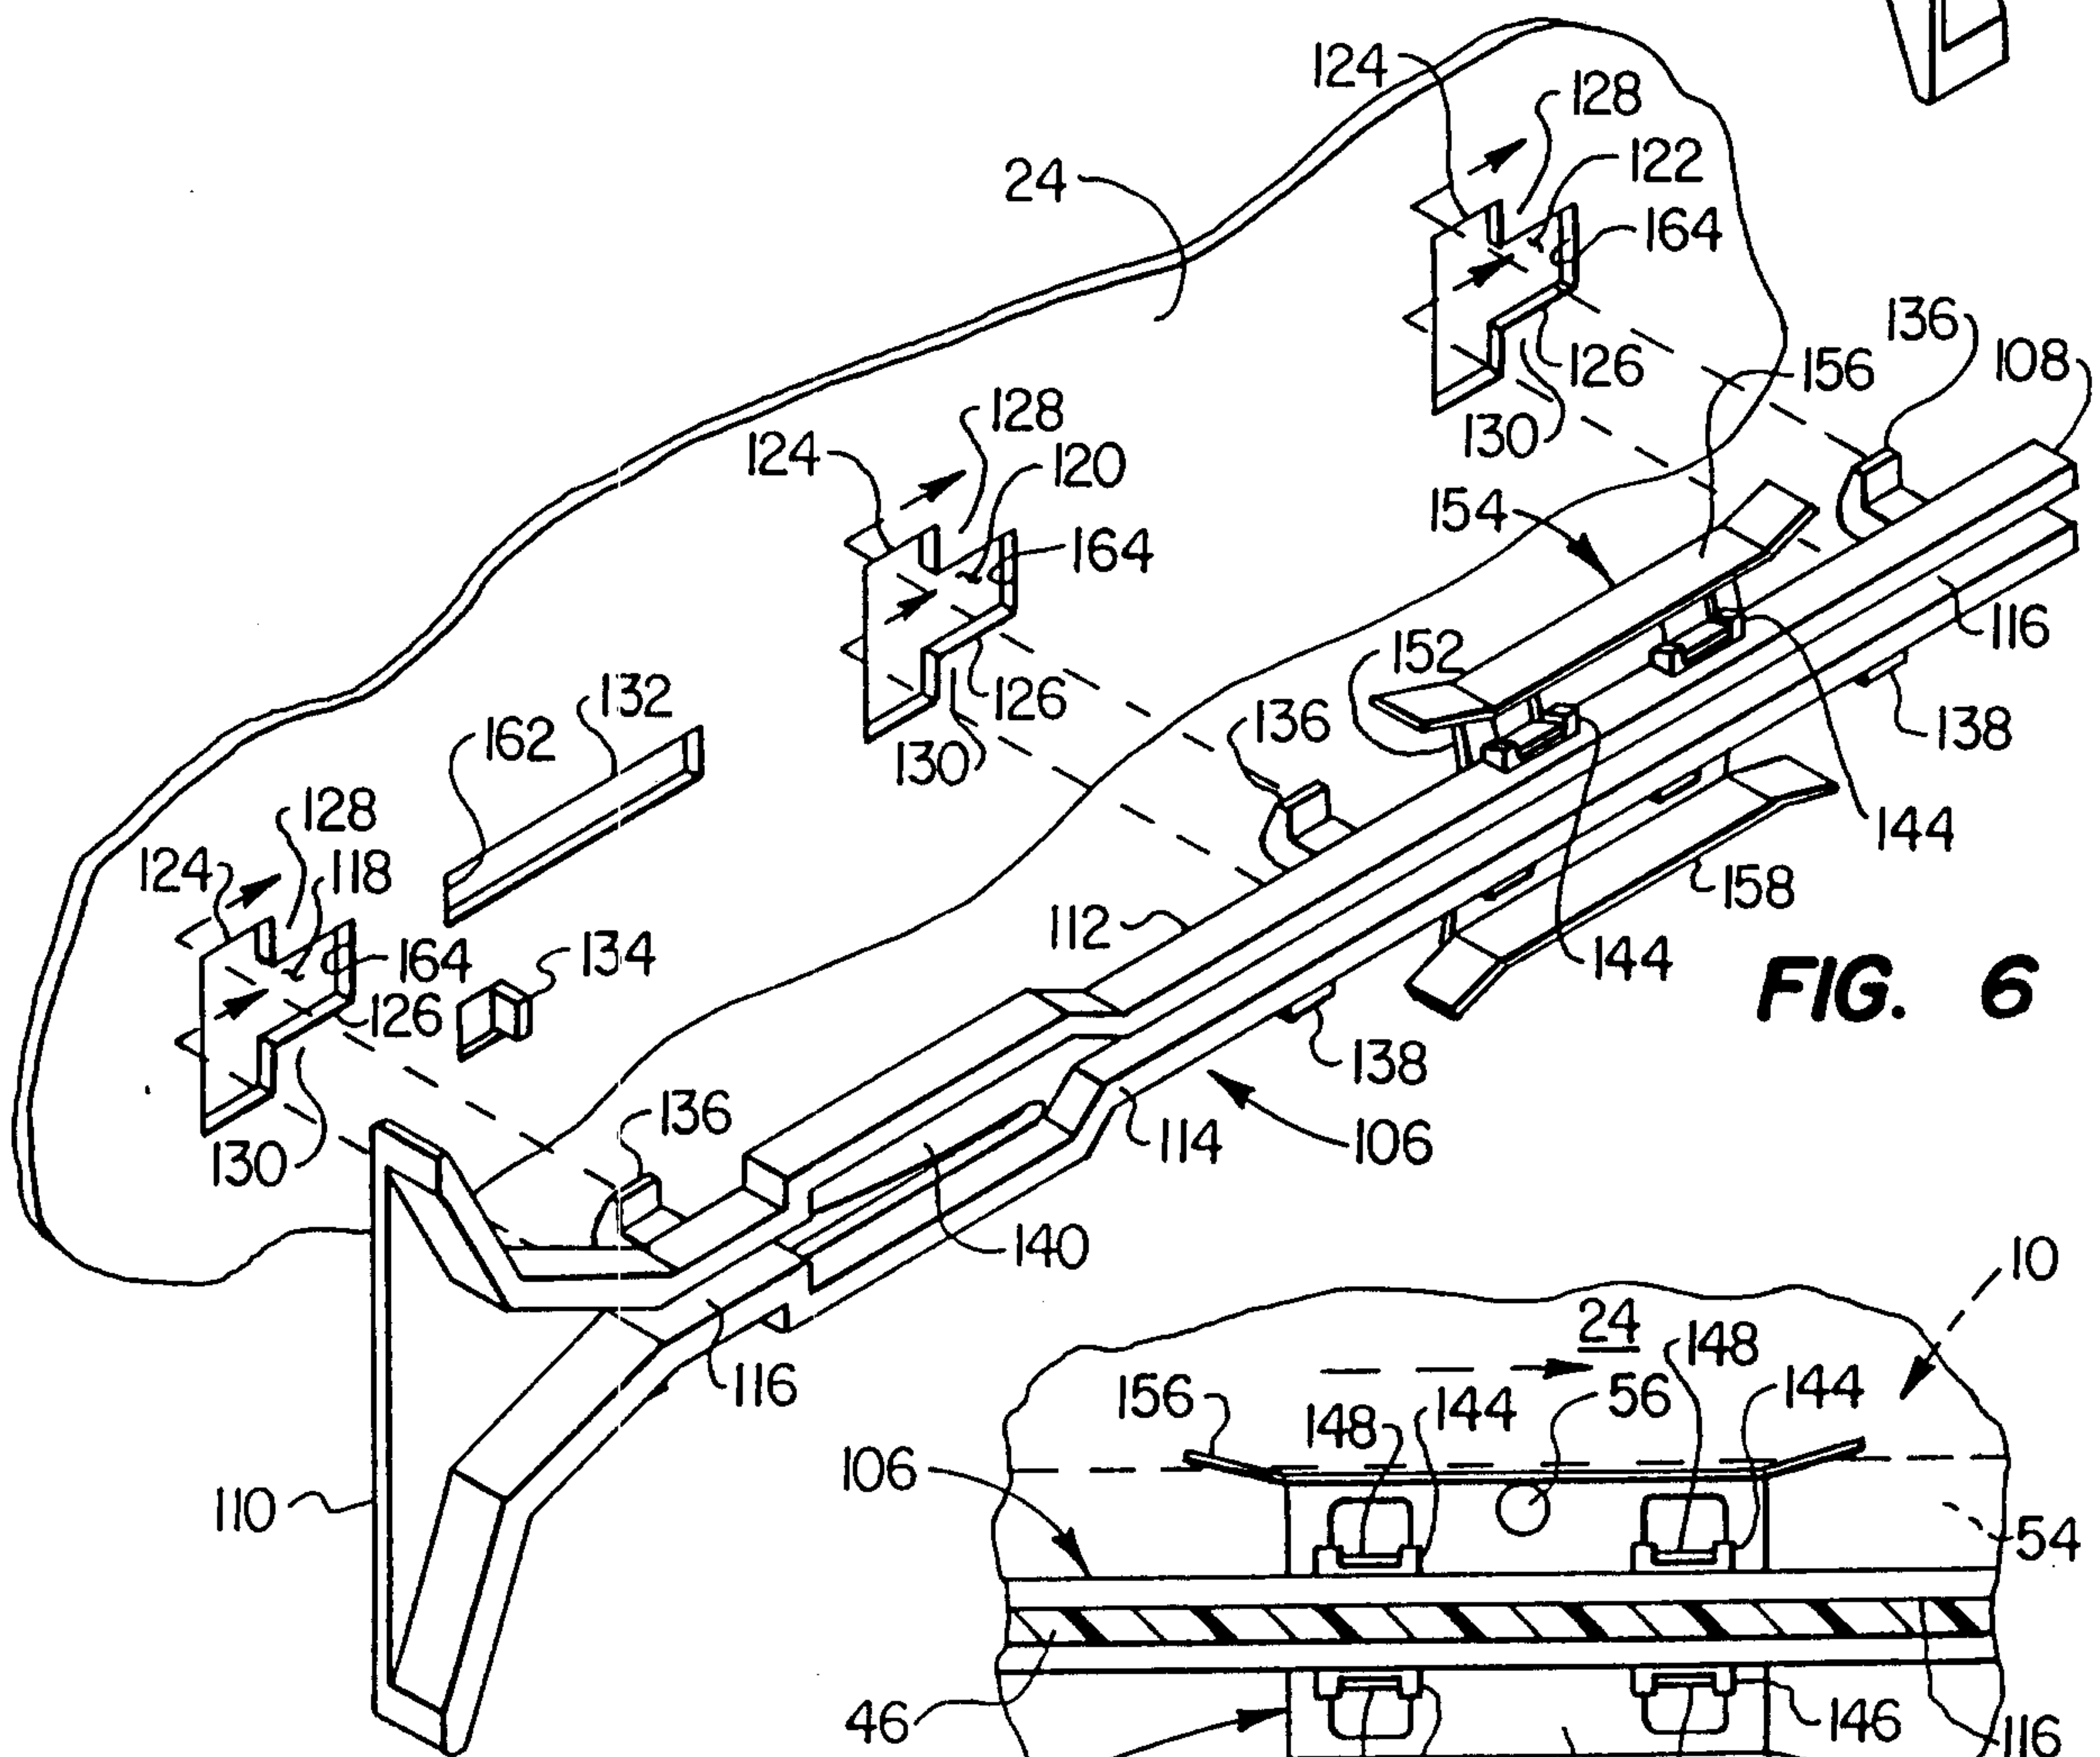


FIG. 6

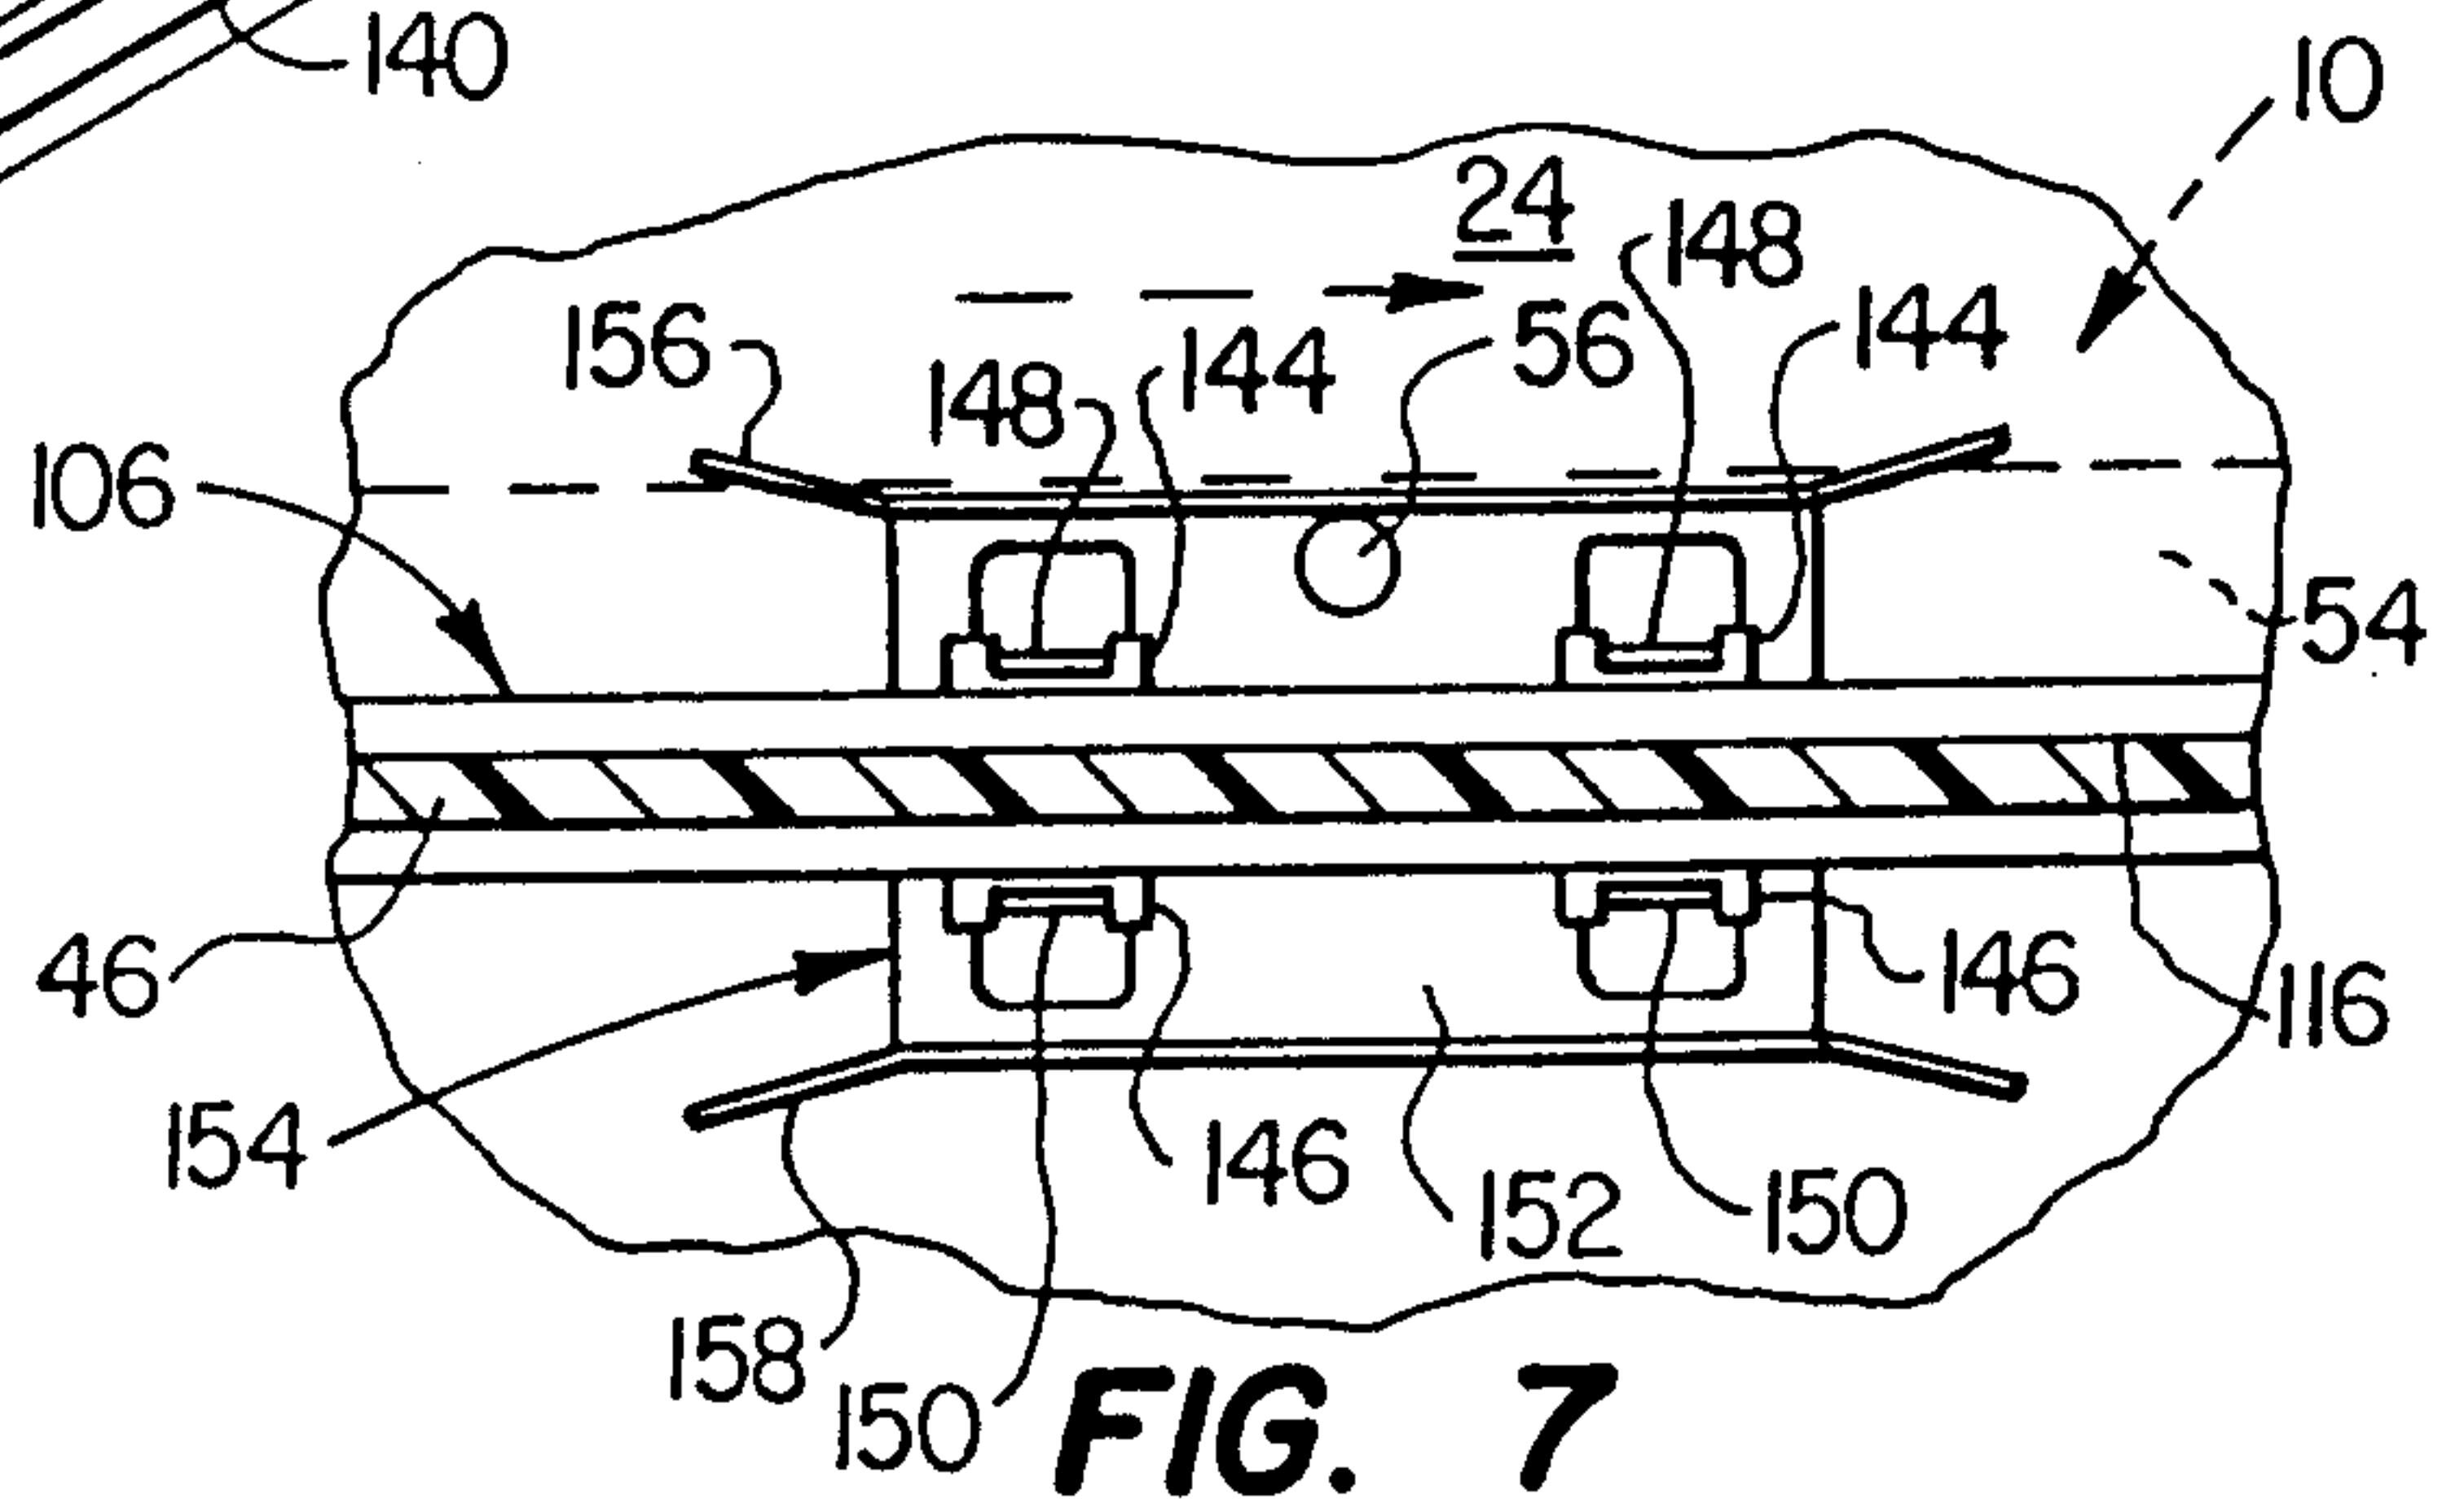


FIG. 7

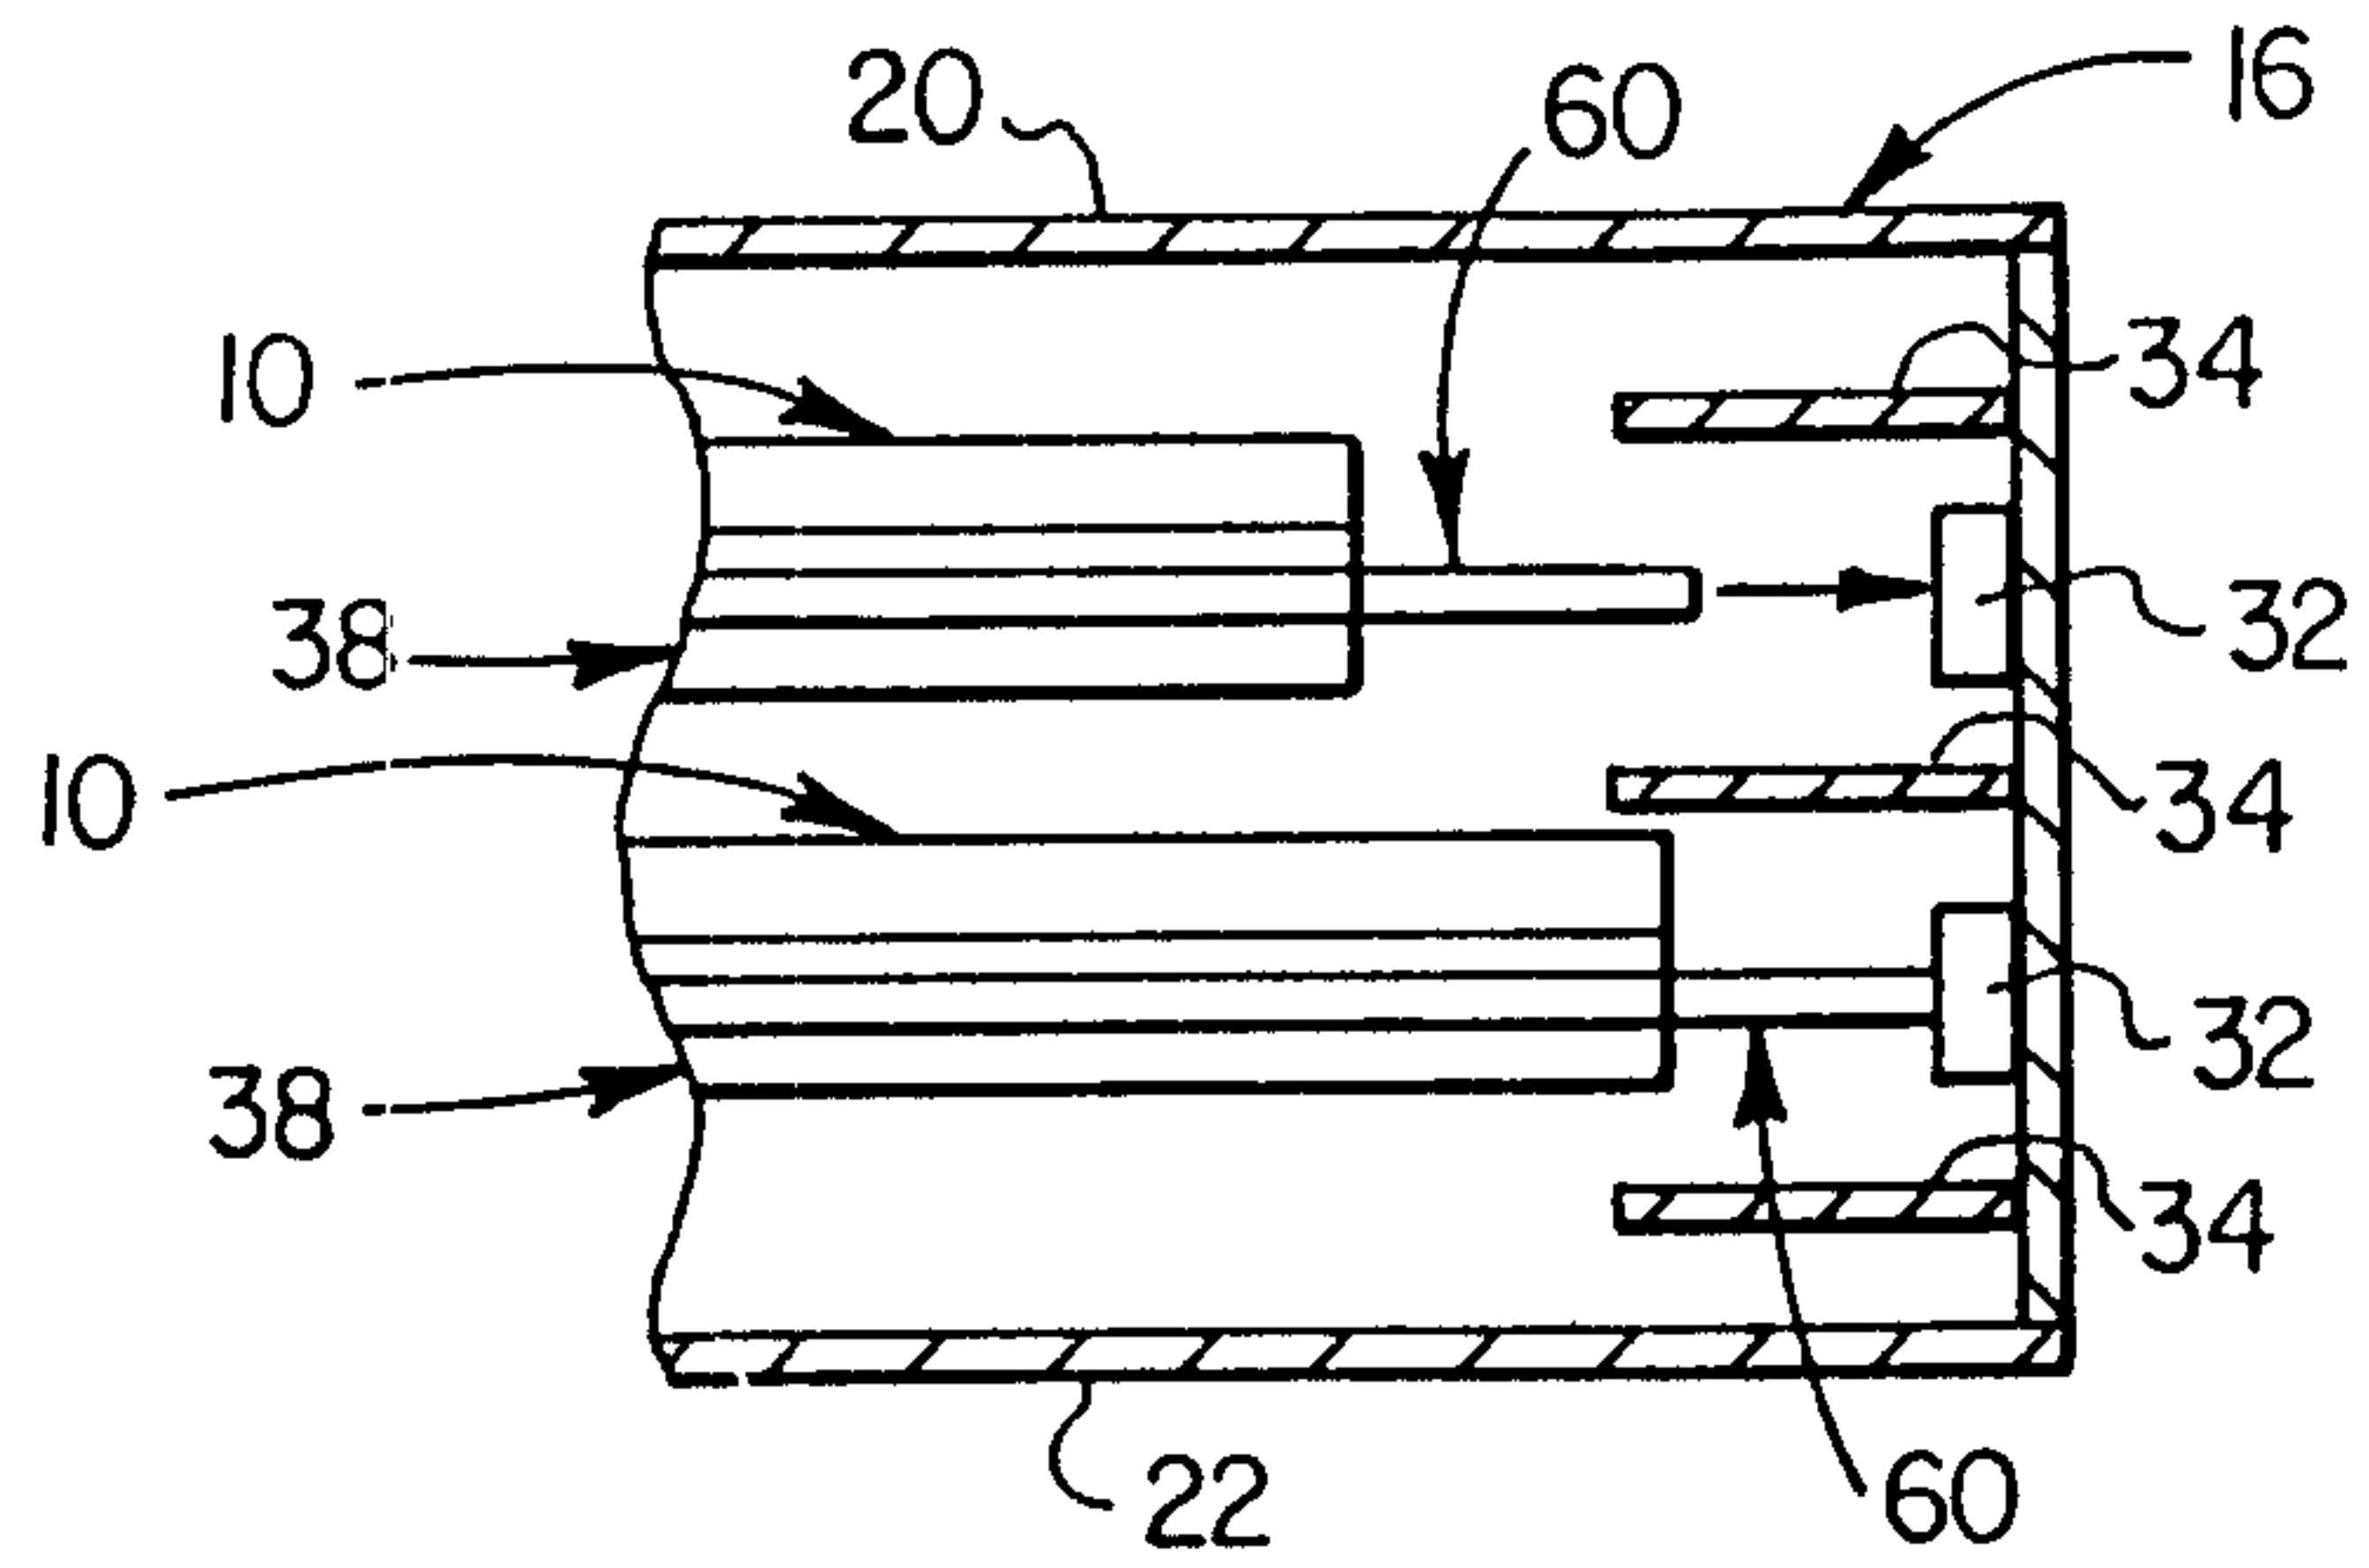


FIG. 8

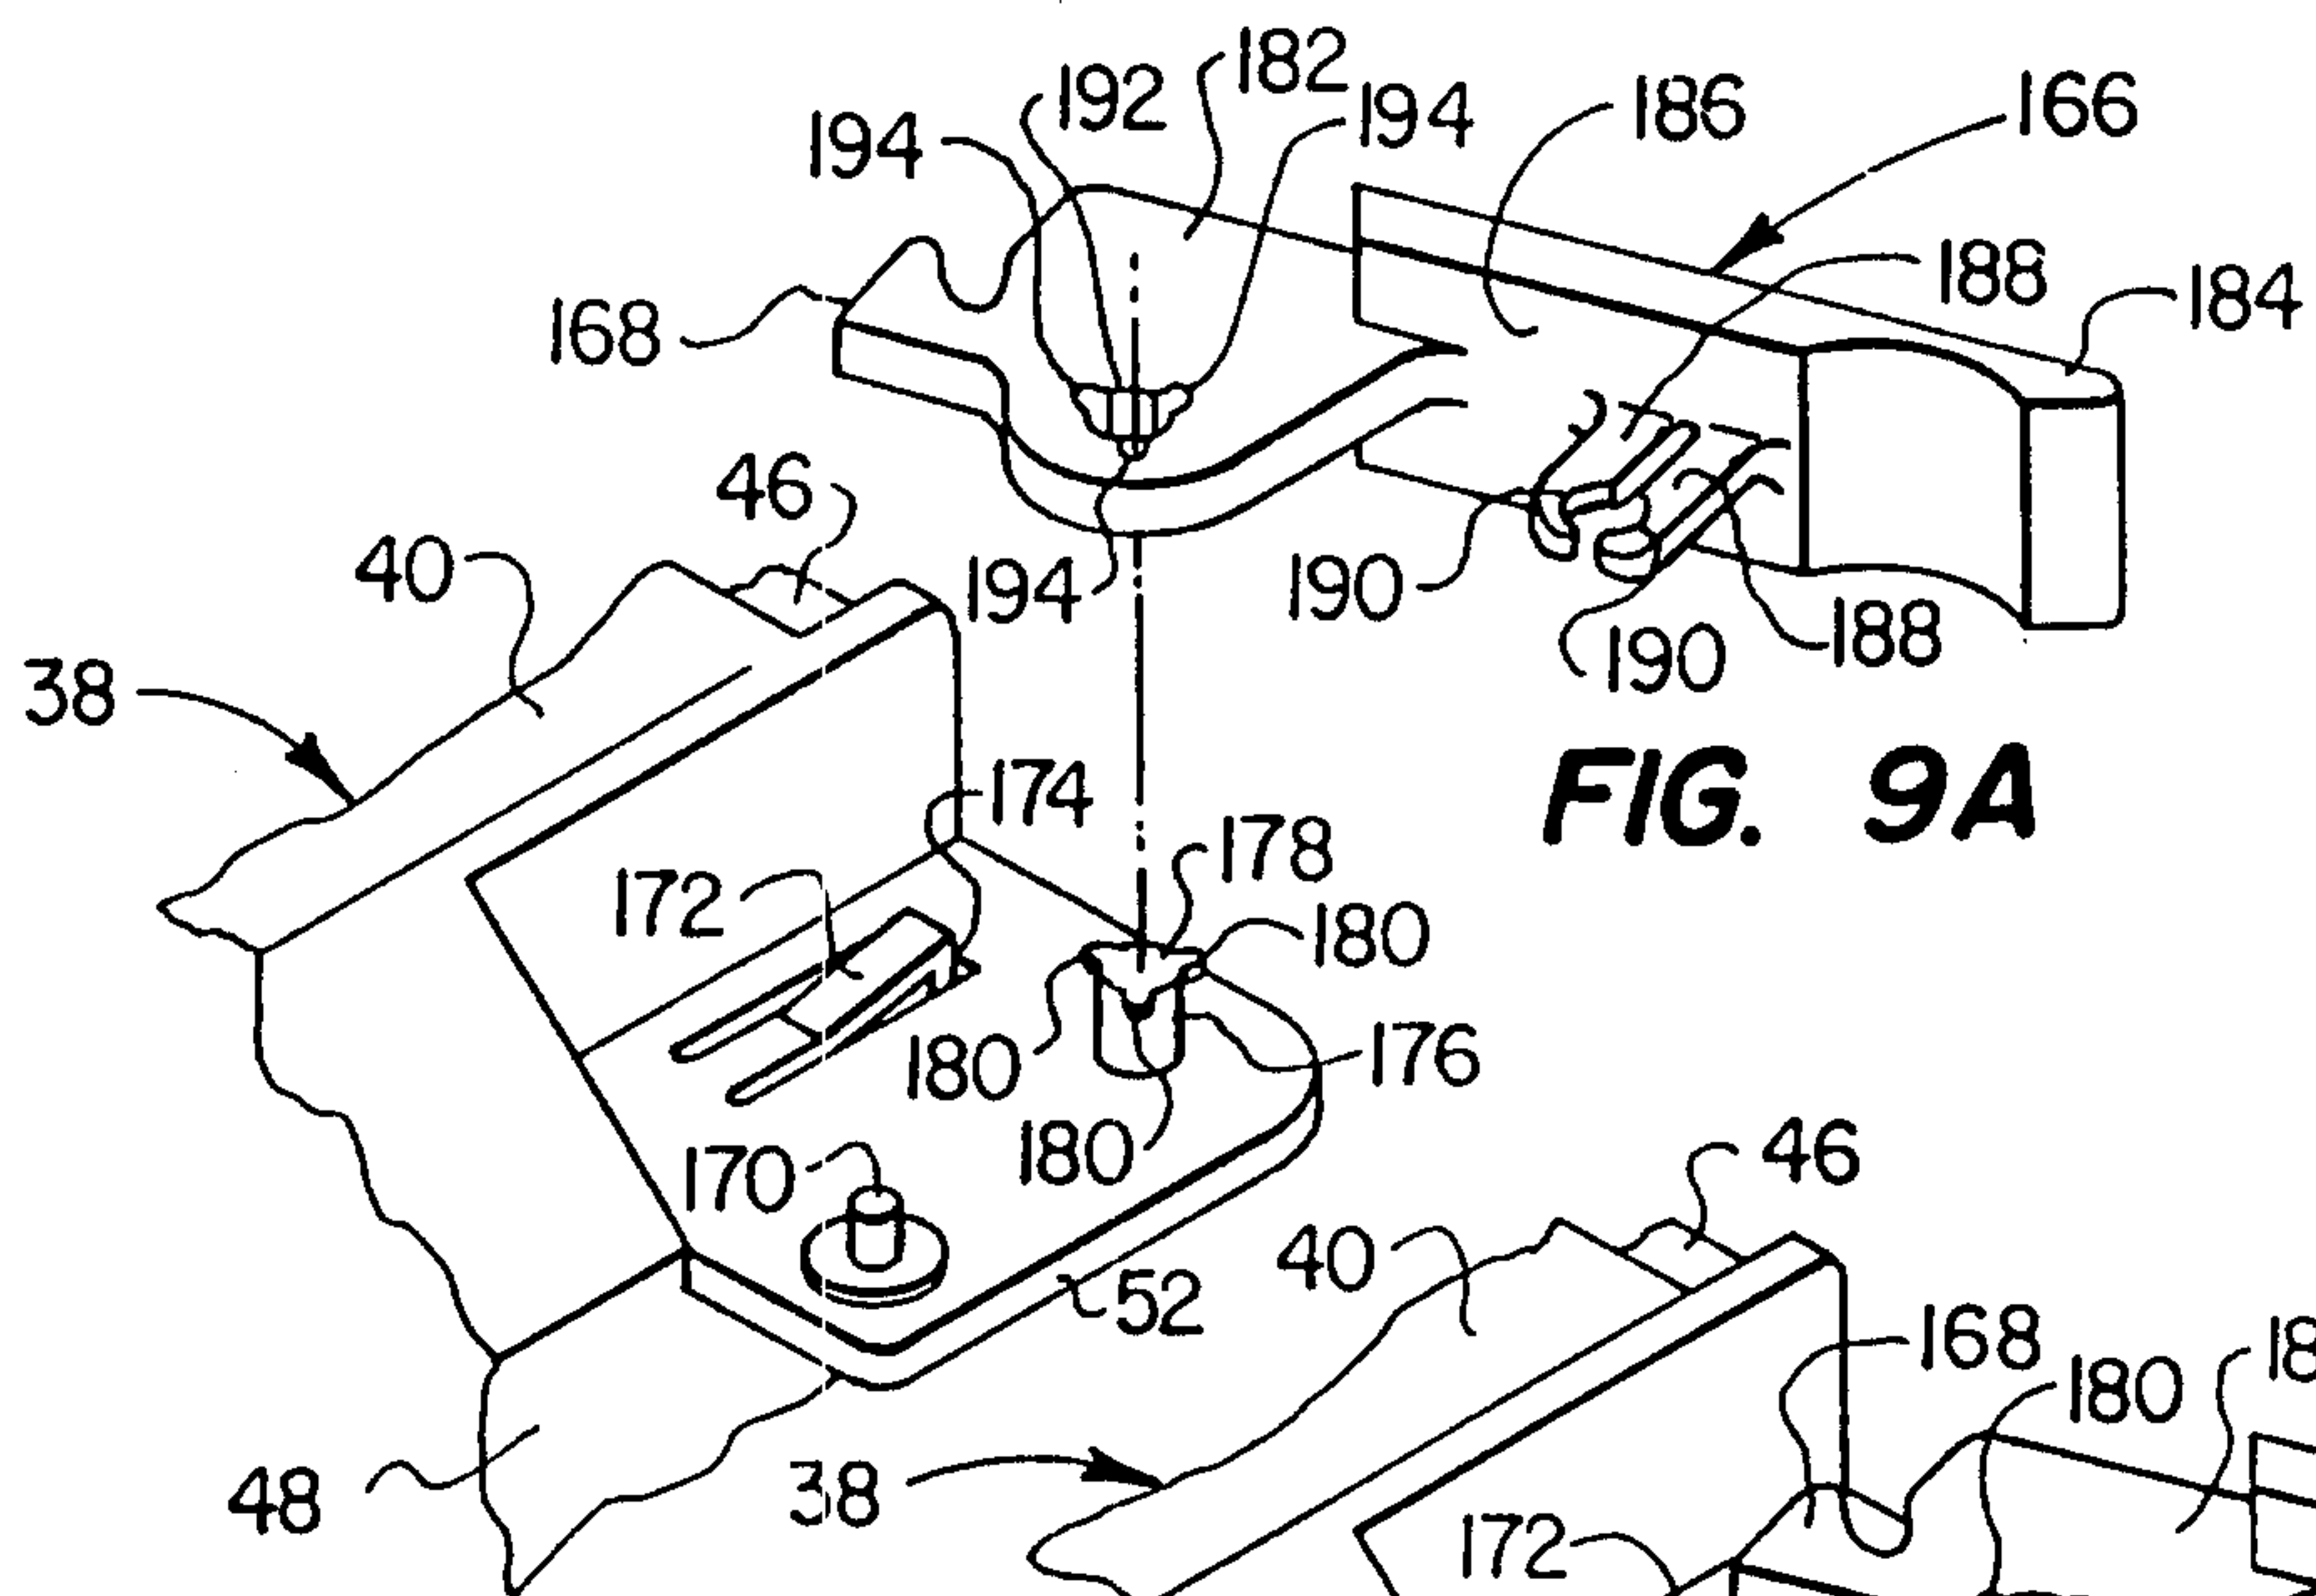


FIG. 9A

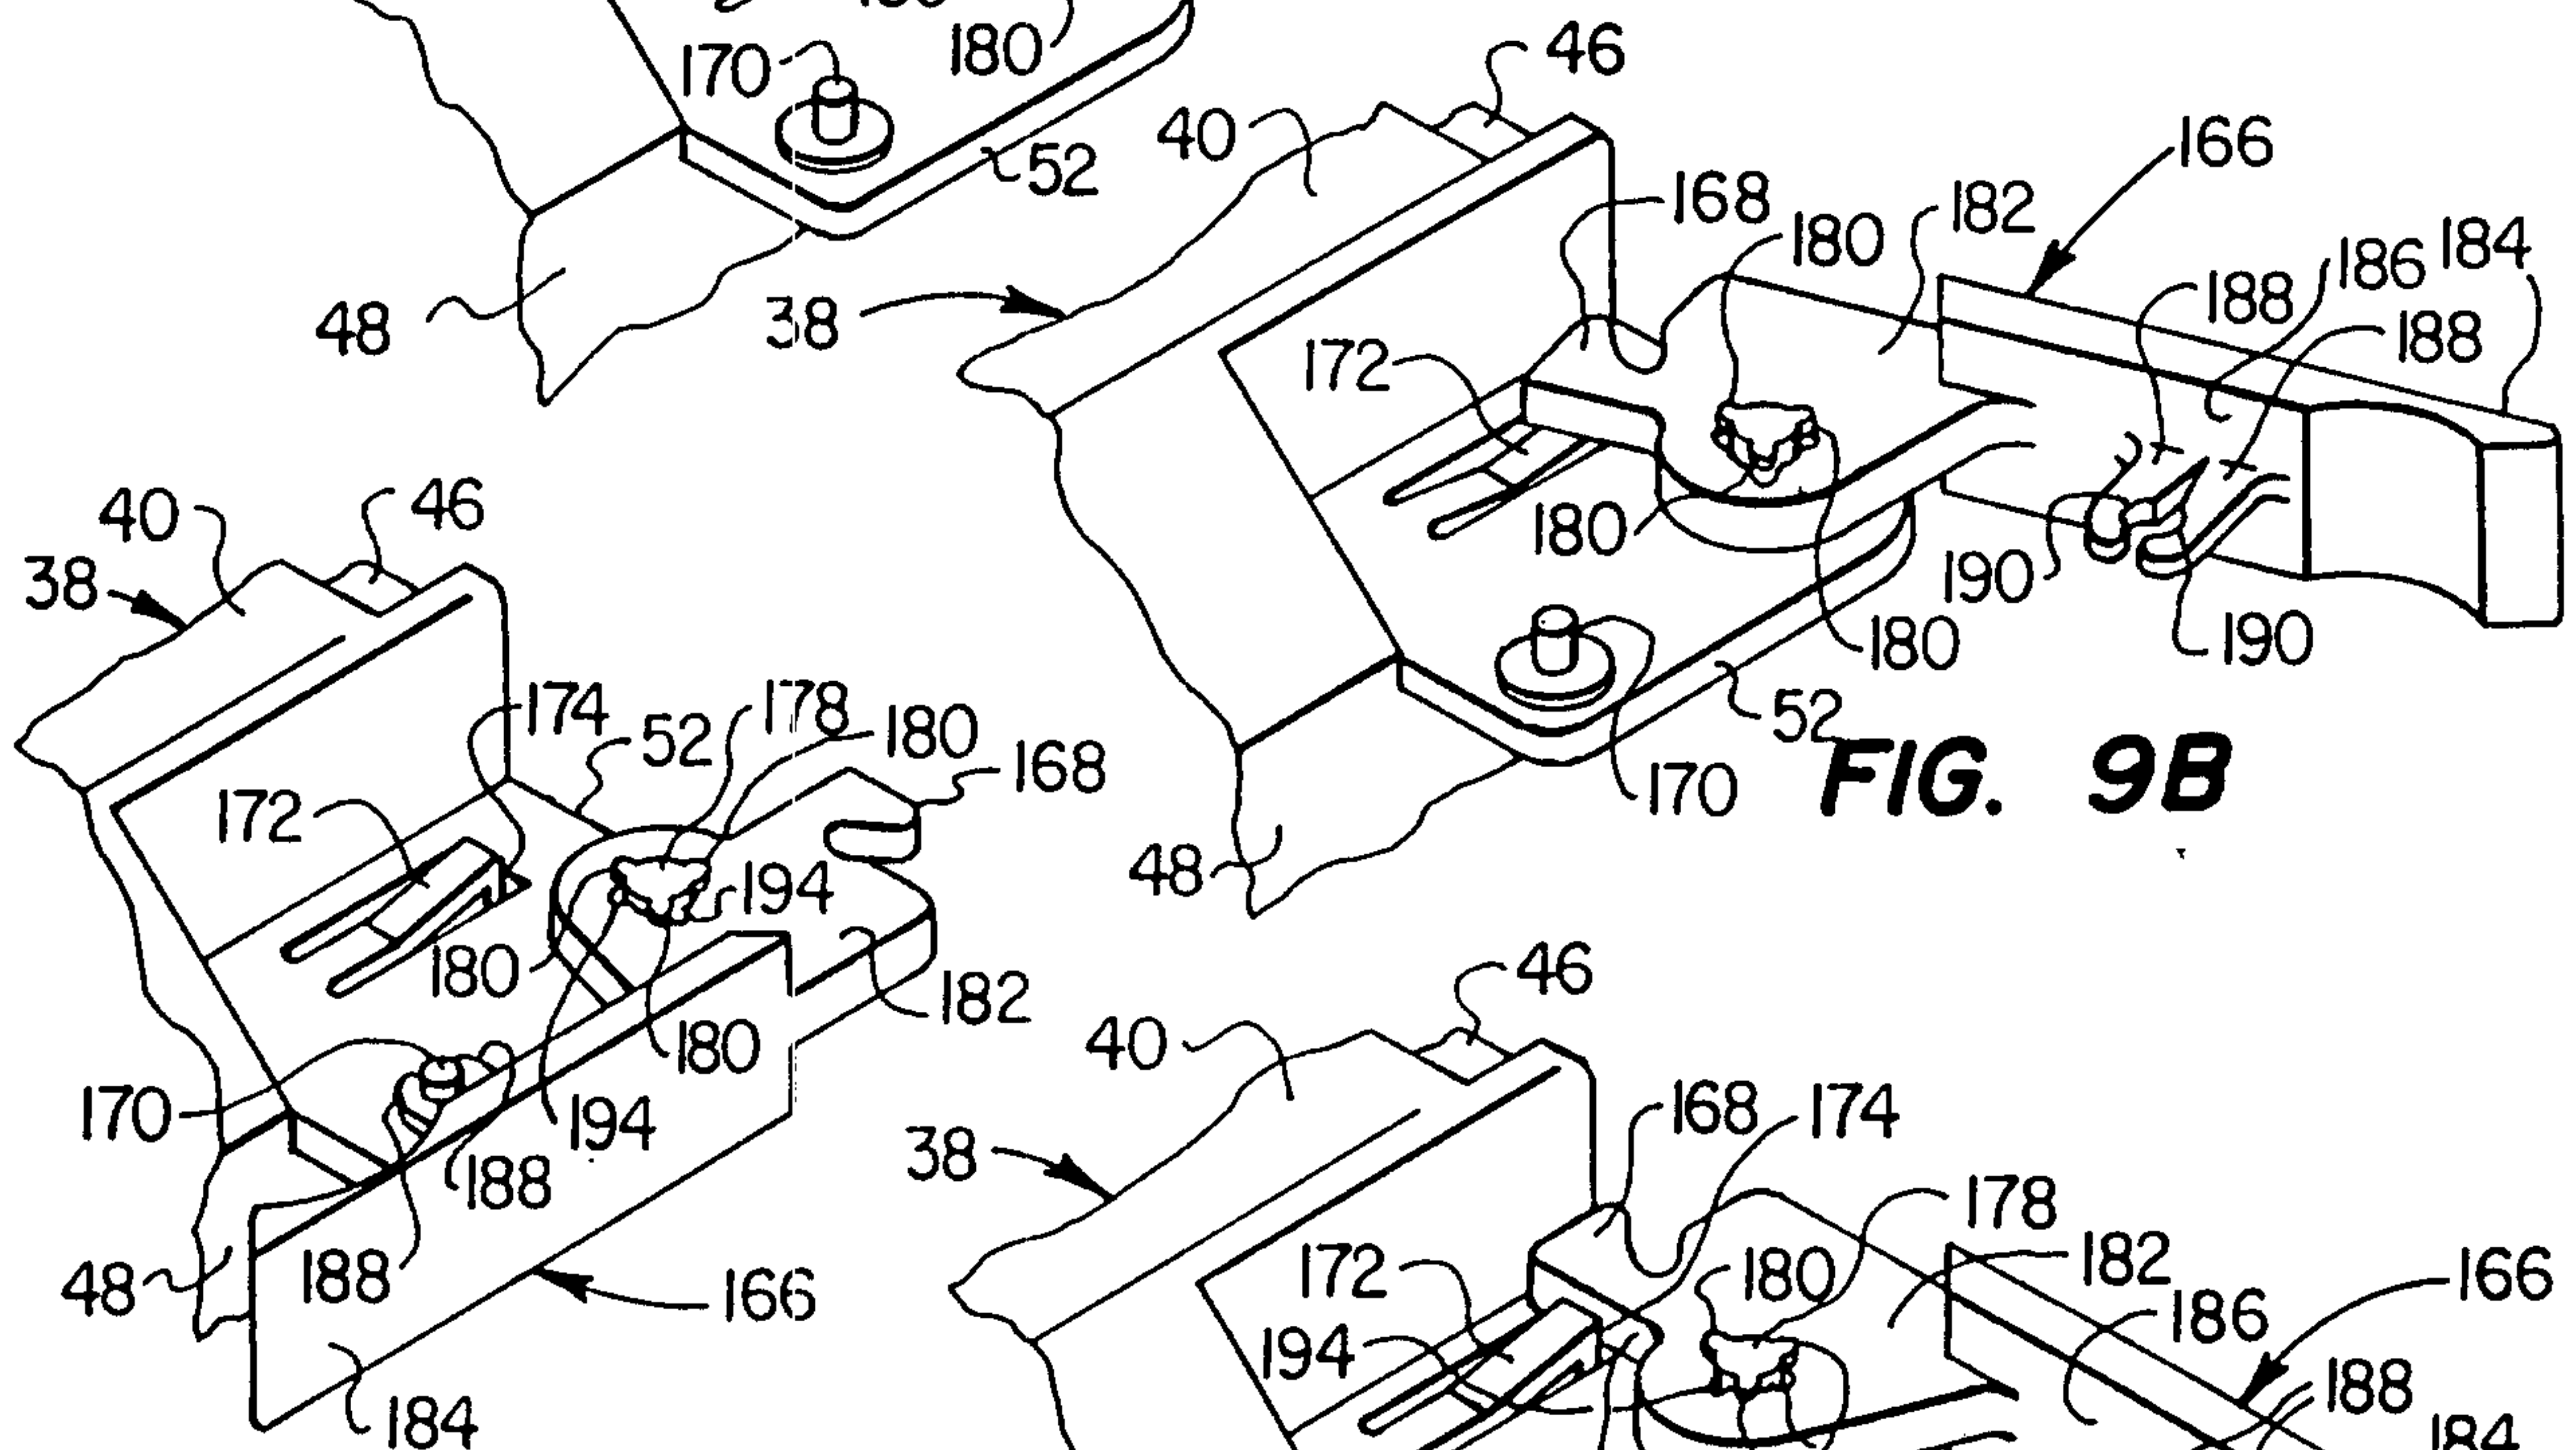


FIG. 9B

FIG. 9D

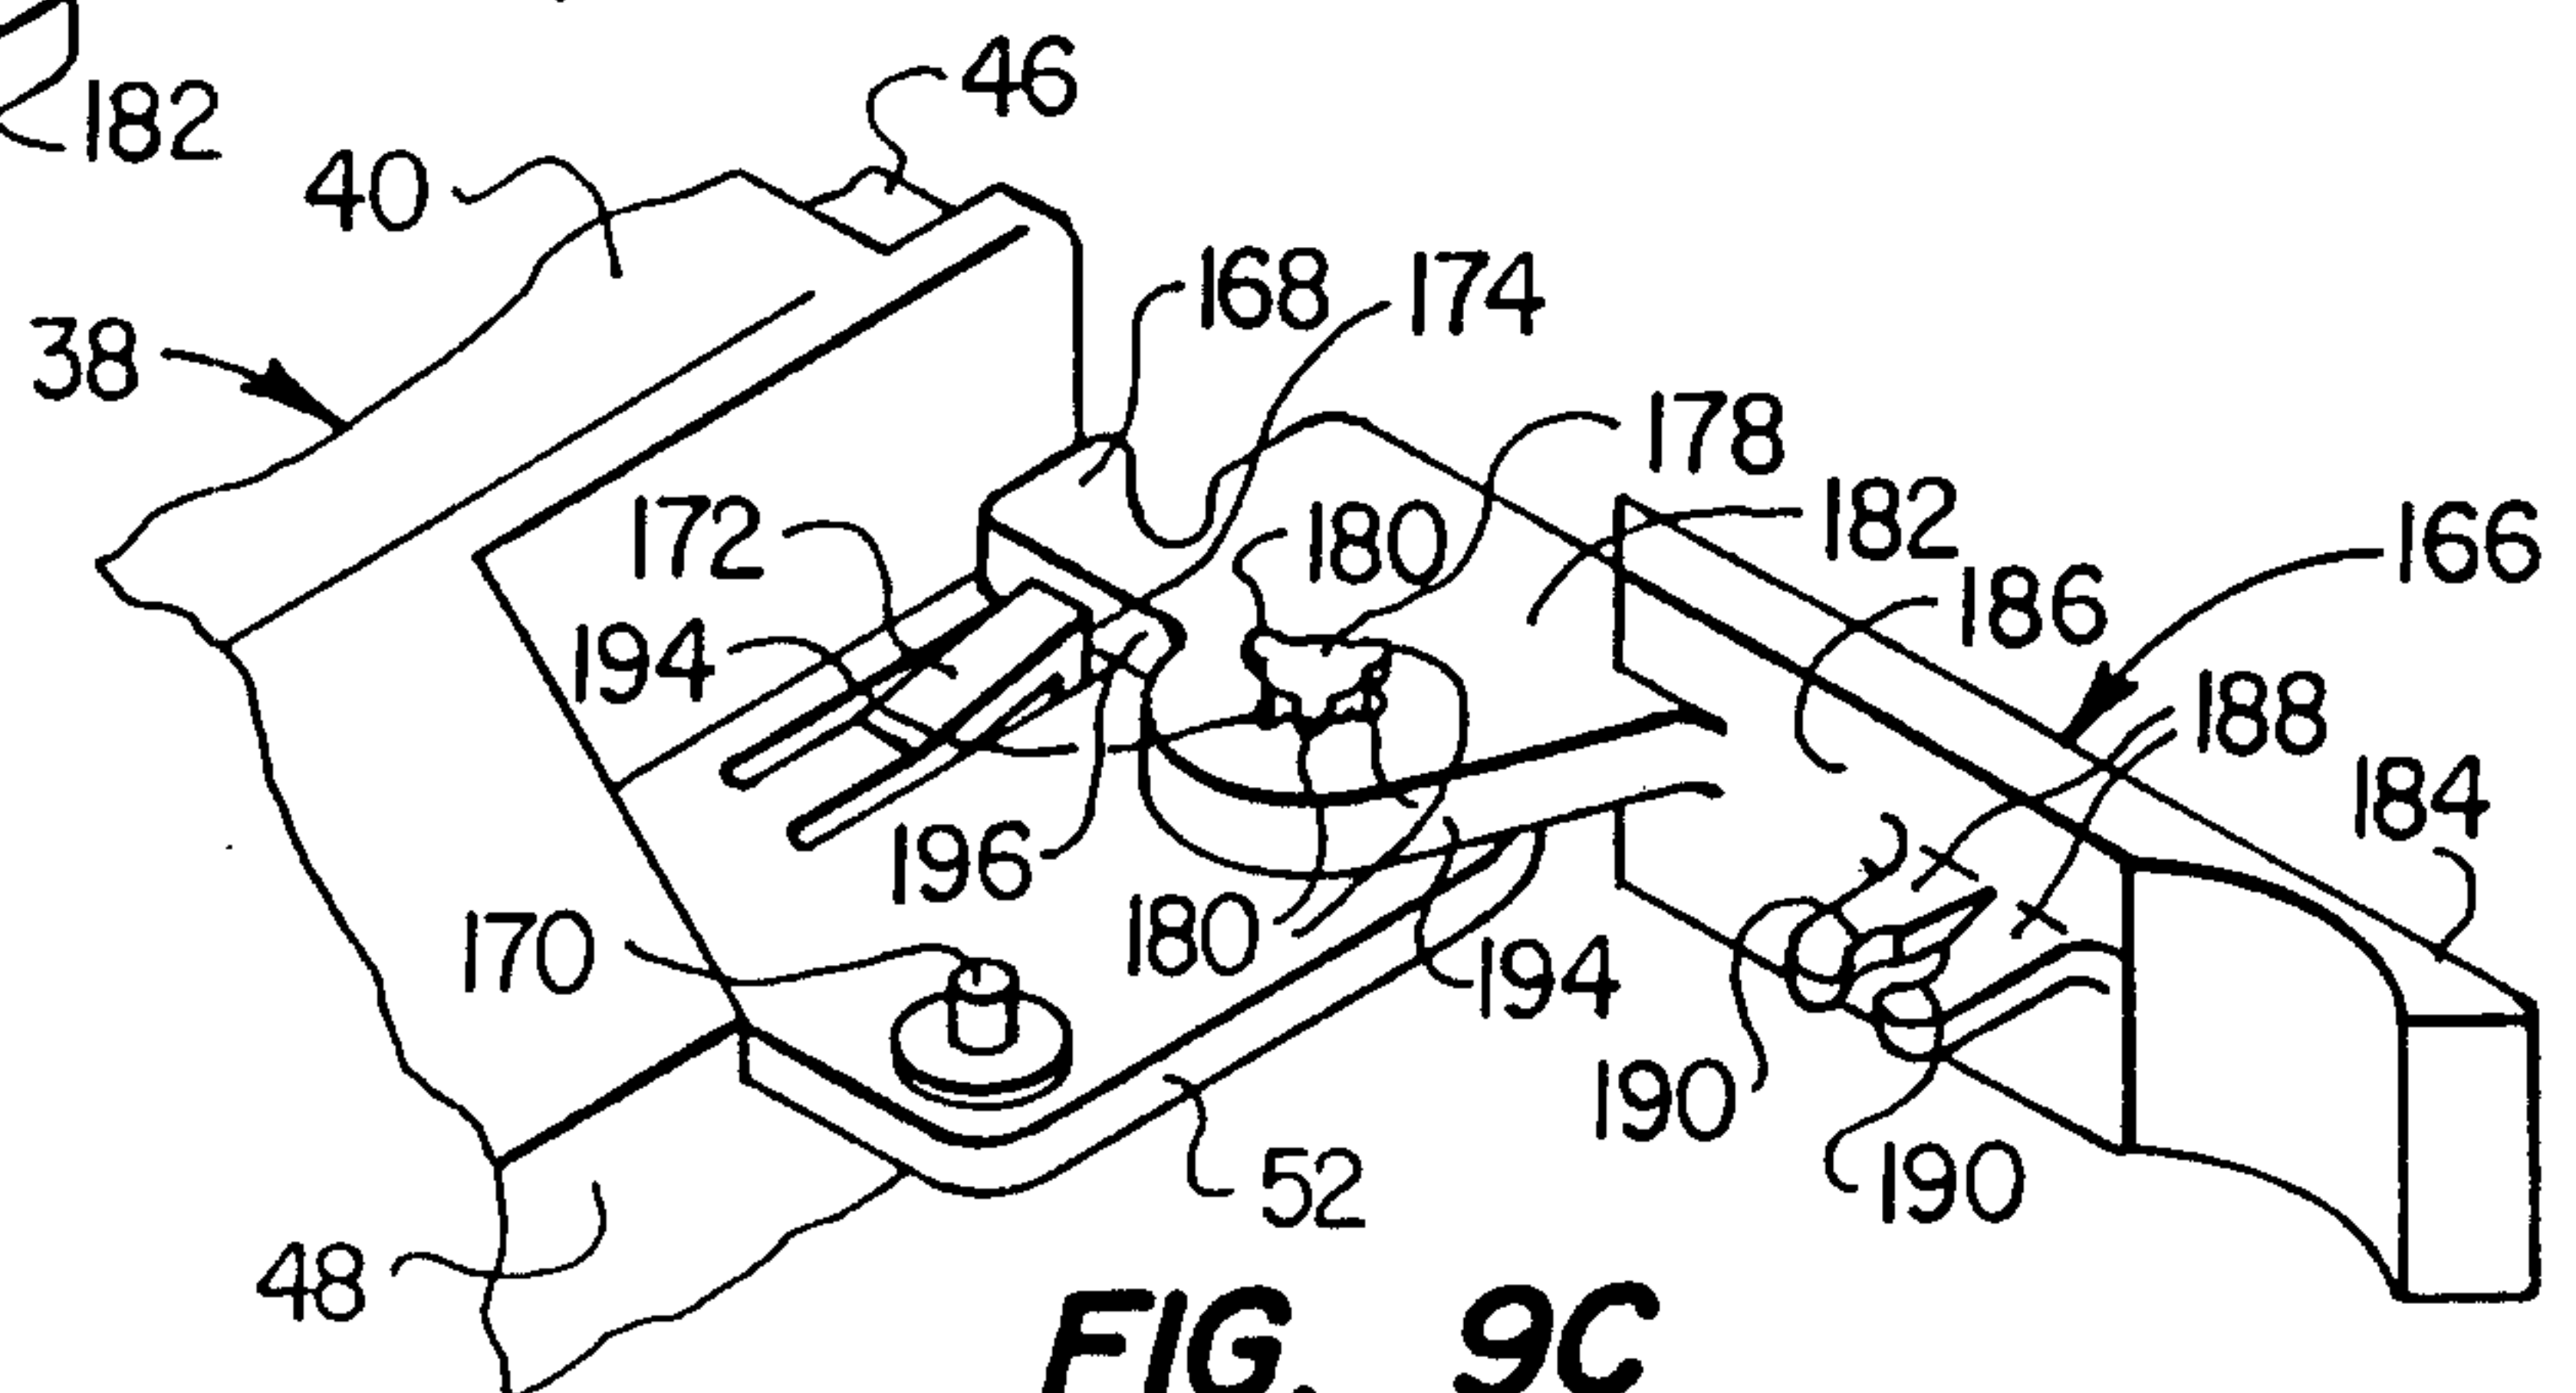


FIG. 9C

