



(22) Date de dépôt/Filing Date: 2020/11/12

(41) Mise à la disp. pub./Open to Public Insp.: 2021/06/17

(45) Date de délivrance/Issue Date: 2023/03/14

(30) Priorité/Priority: 2019/12/17 (ES201931113)

(51) Cl.Int./Int.Cl. *B23Q 11/10* (2006.01),
B23D 59/02 (2006.01), *B23Q 11/08* (2006.01),
B24B 55/02 (2006.01), *B24B 55/04* (2006.01)


(72) Inventeur/Inventor:
QUESADA BARBERO, JUAN ANTONIO, ES

(73) Propriétaire/Owner:
GERMANS BOADA, S.A., ES

(74) Agent: RICHES, MCKENZIE & HERBERT LLP

(54) Titre : DISPOSITIF DE REFROIDISSEMENT POUR SCIES A DISQUE

(54) Title: COOLING DEVICE FOR DISC CUTTERS

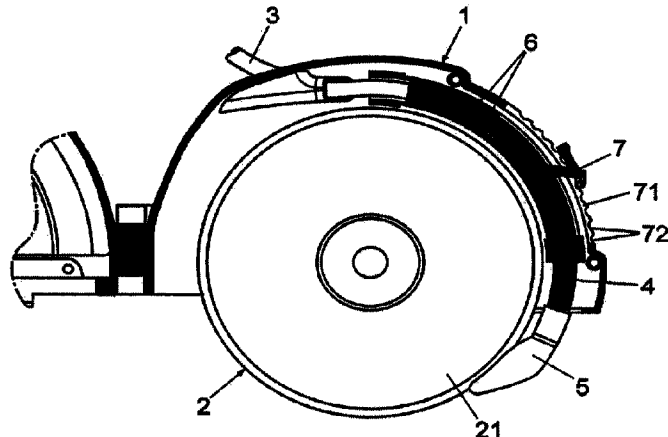

(57) Abrégé/Abstract:

The present invention relates to a cooling device for disc cutters, which comprises: - a curved, tubular guide (6), with a radius of curvature slightly greater than the cutter disc and concentric with the periphery of the disc (2); - a curved cannula (4), made of semi-rigid material, mounted inside the curved guide capable of longitudinal movement between two end positions, connected to a tube (3) for supplying coolant to a nozzle (5); and - means for attaching the cannula (4) in any position comprised between the two end positions of movement with respect to the curved guide. The nozzle (5) moves over a lower sector (21) of the periphery of the disc, and during the cutting of parts (P) of different thicknesses, said nozzle (5) is located at different heights and facing the disc (2) contact and penetration area in the part (P) to be cut

ABSTRACT

COOLING DEVICE FOR DISC CUTTERS

5 The present invention relates to a cooling device for disc cutters, which
comprises: - a curved, tubular guide (6), with a radius of curvature slightly
greater than the cutter disc and concentric with the periphery of the disc (2); - a
curved cannula (4), made of semi-rigid material, mounted inside the curved
10 guide capable of longitudinal movement between two end positions, connected
to a tube (3) for supplying coolant to a nozzle (5); and - means for attaching the
cannula (4) in any position comprised between the two end positions of
movement with respect to the curved guide. The nozzle (5) moves over a lower
sector (21) of the periphery of the disc, and during the cutting of parts (P) of
15 different thicknesses, said nozzle (5) is located at different heights and facing
the disc (2) contact and penetration area in the part (P) to be cut

COOLING DEVICE FOR DISC CUTTERS

Technical field.

5 This invention relates to a cooling device applicable to cutters that have a disc for cutting materials, for example building materials.

Prior state of the art

10 Disc cutters that have a device for cooling the disc, in order to prevent the deterioration thereof due to overheating and to extend the useful life of the disc, are currently known on the market.

Document US385666 describes a machine provided with a protective cover for a cutter disc and with two tubes for supplying coolant to the disc, connected by means of a key to a single feed tube, and which enable the coolant to be supplied on the upper half of the cutter disc.

15 In this type of machine, the supply of coolant on the upper area or half of the cutter disc has a relatively low effectiveness, since the high rotational speed of the disc causes the coolant to be thrown tangentially practically immediately, minimising the capacity for cooling the disc.

20 Invention patent ES 2 630 366 B1, of the same holder of the present invention, describes a protective cover with cooling for cutter discs. Said protective cover defines a cavity, generally semi-cylindrical, which comprises fastening means inside a tube and a nozzle for supplying coolant at different heights on the upper half of the cutter disc.

25 Said protective cover with cooling for cutter discs uses a single tube for supplying coolant, which is an advantage over patent US385666 by simplifying the construction thereof; further exhibiting the particularity that the lateral walls of the cover comprise fins internally, the purpose of which is to redirect the coolant that is thrown tangentially against the perimeter wall of the cover due to the rapid rotational movement of the disc towards the lateral faces of the disc.

30 This background ES 2 630 366 B1 provides clear advantages of use with respect to the aforementioned background US385666, although the cooling capacity of the disc is also limited by the projection of coolant on the upper area of the disc, either by means of the nozzle or by means of the fins defined on the lateral walls of the cover.

35 Therefore, the technical problem that arises is the development of a

cooling device that enables the cooling capacity of the disc to be increased, applying the coolant in the area of the disc where the heating thereof originates, and that does not require fins to be defined on the lateral walls of the protective cover of the disc for redirecting the coolant projected tangentially by the rotational
 5 movement of the disc towards the disc.

Description of the invention

The cooling device for disc cutters, object of the present invention and provided with a protective cover that covers approximately the upper half of the
 10 disc and which comprises: a tube for supplying coolant and a nozzle that pours the coolant on the disc.

An objective of the invention is to cool the disc by means of tangential pouring of the coolant on a lower sector of the disc and specifically in the area where the heating thereof takes place, i.e., in the disc contact and penetration
 15 area in the part to be cut.

Another objective of the invention is to ensure that the nozzle maintains a constant separation with respect to the periphery of the disc when said nozzle moves away from the cover, towards the lower cantilevered area, to approach the cutting area of the part.

20 For this, and according to the invention, this device comprises:

- a curved, tubular guide, with a radius of curvature slightly greater than the cutter disc, attached inside the cover and concentric with the periphery of the disc;
- a curved cannula, made of semi-rigid material, mounted inside the curved
 25 guide capable of longitudinal movement between two end positions and provided with an upper end connected to the tube for supplying coolant and a lower end that protrudes to a greater or lesser extent, cantilevered, below the cover;
- means for attaching a cannula in any position comprised between the two end positions of movement, said cannula projecting the coolant in a direction
 30 tangential to the rotation of the disc.
- wherein the nozzle for supplying coolant is coupled to the lower end of the cannula and can be moved over a lower sector of the periphery of the disc, located below the cover, said nozzle being attached during the cutting of parts of
 35 different thicknesses in a disc contact and penetration area in said part.

By means of the movement of the curved cannula, made of semi-rigid material, over the curved guide, it is ensured that the lower end of said cannula and the nozzle coupled thereto can approach the cutting area of the part, maintaining the appropriate position and separation with respect to the disc, for dispensing the coolant in a tangential direction in the disc cutting and penetration area.

According to the invention, the means for attaching the cannula at different points of the path thereof comprise a fastening clip attached to said cannula and it passes to the outside of the cannula through a groove that affects at least one section of the curved guide and the outer surface of the cover.

The cover exhibits a series of reliefs along said groove for coupling the fastening clip and holding the cannula at different points of the path thereof.

The arrangement of said clip on the cover enables the user to comfortably and easily adjust the position of the nozzle to bring it closer to the cutting area, even during the cutting operation, without approaching the disc and therefore without risk of accidents.

An additional advantage, derived from the ease and comfort of actuation of these attachment means, is that the cannula can be initially arranged in the highest position so that the nozzle does not pose a visual obstruction when the cutting begins and then bring it closer to the cutting area to improve disc cooling.

However, it should be mentioned that the means for attaching the cannula in different positions can be of any other suitable type and equivalent to those mentioned above.

Another objective of the invention is to ensure that the pouring of coolant is carried out in the indicated area and simultaneously on the two opposite faces and on the periphery of the perimeter portion of the disc, thus ensuring a uniform and highly efficient cooling of the disc.

To do this, a nozzle that exhibits a specific configuration has been designed, said nozzle comprising an upper mouth, coupled to the tube for supplying coolant, a visor for pouring coolant facing the inside of the disc and which has a cut shaping a passage area of a perimeter portion of the disc at the end thereof, said visor simultaneously pouring coolant on the two opposite faces and on the periphery of said perimeter portion of the disc.

With the features indicated above, it is achieved, on the one hand, that the disc is cooled specifically in the area where the heating of the disc is produced, i.e., in the disc contact and penetration area in the part to be cut and, on the other hand, that the coolant causes uniform cooling of said contact area by being simultaneously applied on the two opposite faces and on the peripheral edge of said area of the disc.

Brief description of the contents of the drawings.

As a complement to the description provided herein, and for the purpose of helping to make the features of the invention more readily understandable, the present specification is accompanied by a set of drawings which, by way of illustration and not limitation, represent the following:

- Figure 1 shows a partial elevation view of the cooling device for disc cutters according to the invention, wherein the protective cover of the disc has been partially represented and in an open position to enable the cannula connected to the coolant dispenser tube and the nozzle in an intermediate position of the path thereof on a lower sector of the cutter disc to be seen.

- Figure 2 shows a partial perspective view of the cutter, wherein the means for attaching the cannula in different positions are observed.

- Figures 3 and 4 show respective elevation views of the cutter during the cutting of parts of different thickness with the dispensing nozzle located on the disc contact and penetration area in said parts.

- Figures 5 and 6 show respective partial views of the cutter seen from the front with the nozzle located in an upper position at the beginning of the cutting of a part, enabling the cutting area to be visualised, and in a lower position during the cutting of said part.

- Figures 7 and 8 show two elevation views of two interchangeable nozzles coupled to the movable cannula.

- Figure 9 shows an upper plan detail view of an exemplary embodiment of the nozzle and the relative position thereof with respect to the periphery of the cutter disc.

Detailed description of embodiments of the invention.

Figure 1 shows a disc cutter provided with a protective cover (1) which covers approximately the upper half of the cutting disc (2).

The cooling device comprises a tube (3) for supplying coolant, a cannula (4) and a nozzle (5) that pours the coolant on the periphery of the disc (2);

5 The cannula (4) is mounted and capable of longitudinal movement in a curved, tubular guide (6), which has a radius of curvature slightly greater than the cutter disc and which is attached inside the cover (1) and concentric with the periphery of the disc (2).

10 The cannula (4) is made of a semi-rigid material and has a curvature according to the curved guide, so that when said cannula moves towards the lower area, the end carrying the nozzle protrudes in a cantilever below the cover, ensuring that the nozzle describes a path parallel to the contour of the disc (2).

15 The device comprises means for attaching the cannula (4) at different points of the path thereof along the curved guide (6) and consequently for attaching the nozzle (5) on different points of a lower sector (21) of the periphery of the disc.

20 In the embodiment shown in Figures 1, 3 and 4, the means for attaching the cannula (4) comprise a fastening clip (7) attached to said cannula (4) and which protrudes through a groove (71) that affects at least one section of the curved guide (6) and of the cover (1).

25 On the outside of the protective cover (1), along the groove (71) of the cover, there are a series of reliefs (72) for coupling the fastening clip (7) and holding the cannula (4) in different positions.

30 As shown in Figures 3 and 4, during the cutting of parts (P) of different thicknesses, the means for attaching the cannula (4) enable the nozzle (5) to be located at different heights, and in a position facing the disc (2) contact and penetration area in the part (P) to be cut, ensuring proper cooling.

35 As shown in Figures 5 and 6, the means for attaching the cannula enable the nozzle (5) to be located in an upper position, close to the cover, at the beginning of the cutting of a part, so that said nozzle does not pose an obstruction and enables the cutting area to be visualised; and in a lower position during the cutting of said part, ensuring the effective cooling of the disc cutting area.

As shown in Figures 7 and 8, the nozzle (5) is interchangeable and can exhibit different configurations, suitable for projecting the coolant tangentially to the rotation of the disc, and always in the disc cutting area.

As shown in Figure 9, the nozzle shown in Figure 5 has a specific configuration for projecting the coolant tangentially on the disc (2) cutting area.

5 Said nozzle (5) comprises an upper mouth (51) for coupling thereof to the cannula (4) for supplying coolant, said nozzle (5) extending towards the lower area into a visor (52) for pouring coolant, facing the inside of the disc (2) and which has a cut (53) shaping a passage area of a perimeter portion of the disc (2) at the end thereof, said visor (52) simultaneously pouring coolant on the two opposite faces and on the periphery of said perimeter portion of the disc (2).

10 Having sufficiently described the nature of the invention, in addition to a preferred exemplary embodiment, it is hereby stated for the relevant purposes that the materials, shape, size and layout of the described elements may be modified, provided that it does not imply altering the essential features of the invention claimed below.

We claim:

1. A cooling device in combination with a disc cutter having a cutting disc and a protective cover (1) which covers approximately an upper half of the disc (2), said device comprising: a tube (3) for supplying coolant and a nozzle (5) for providing a coolant flow on the disc (2); the device further comprising:

- a curved, tubular guide (6), with a radius of curvature slightly greater than the cutter disc (2), attached inside the cover (1) and positionable so as to be concentric with the periphery of the disc (2);

- a curved cannula (4), made of semi-rigid material, mounted inside the curved guide (6) adapted for longitudinal movement between two end positions and provided with an upper end connected to the tube (3) for supplying coolant and a lower end which protrudes below the cover (1) and wherein the nozzle (5) is coupled,

- means for attaching the cannula (4) at different points of the path thereto;

so that during the movement of the cannula (4), the nozzle (5) is movable over a lower sector (21) of the periphery of the disc (2), and during the cutting of parts (P) of different thicknesses, said nozzle (5) is locatable at different heights and facing a disc contact and penetration area in a part (P) to be cut.

2. The cooling device in combination with the disc cutter of claim 1, wherein the means for attaching the cannula (4) at different points of the path thereof comprise a fastening clip (7) attached to said cannula (4) and which protrudes through a groove (71) and which engages at least one section of the curved guide (6) and of an outer surface of the cover (1).

3. The cooling device in combination with the disc cutter of claim 2, further comprising a series of reliefs (72) along the groove (71) of the cover (1) for coupling the fastening clip (7) and holding the cannula (4) in different positions.

4. The cooling device in combination with the disc cutter according to any one of claims 1 to 3, wherein the nozzle (5) comprises an upper mouth (51) for coupling thereof to the cannula (4) for supplying coolant, and it extends towards the lower area into a visor (52) for pouring coolant facing the inside of

the disc (2) and which has a cut (53) shaping a passage area of a perimeter portion of the disc (2) at the end thereof; said visor (52) simultaneously pouring coolant on the two opposite faces and on the periphery of said perimeter portion of the disc (2).

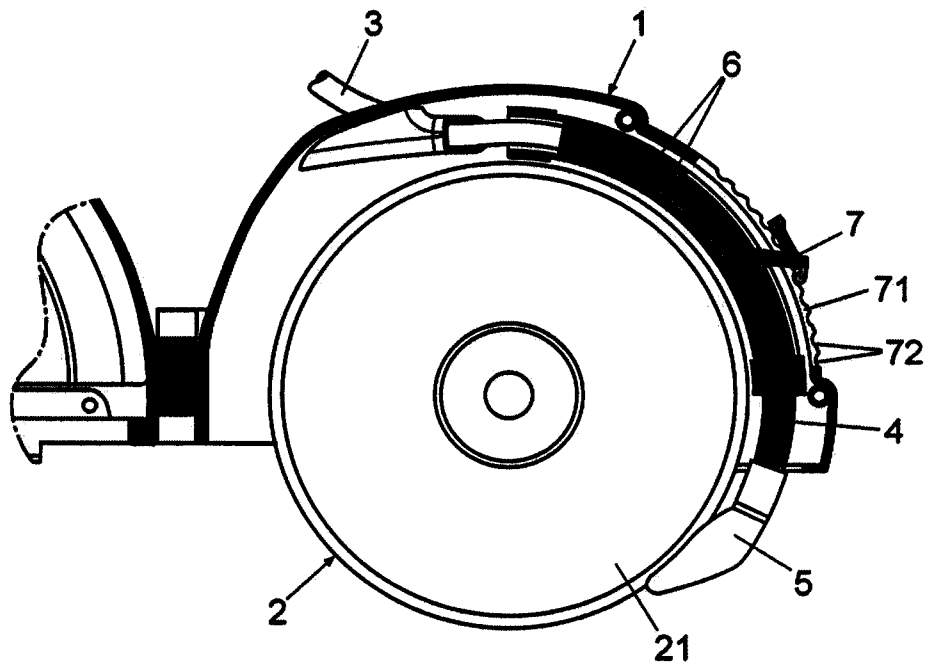


Fig. 1

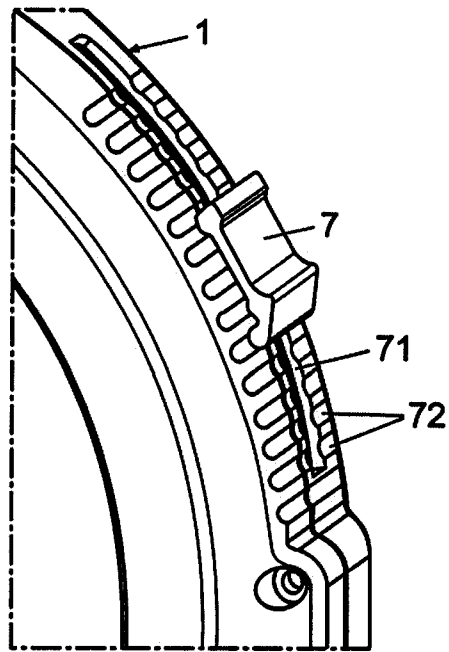
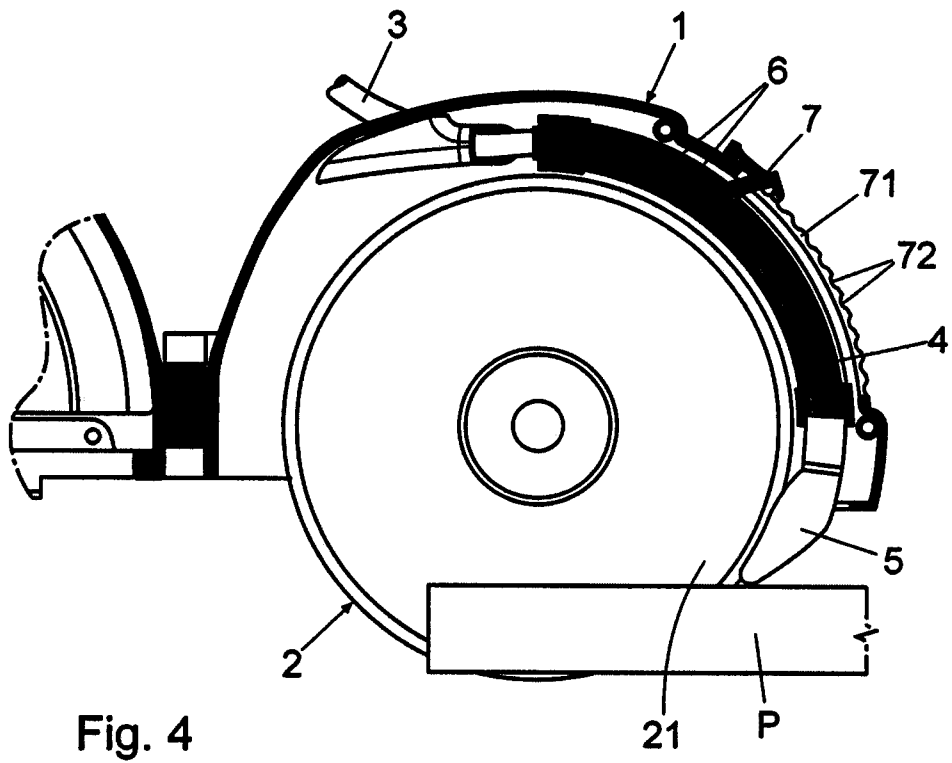
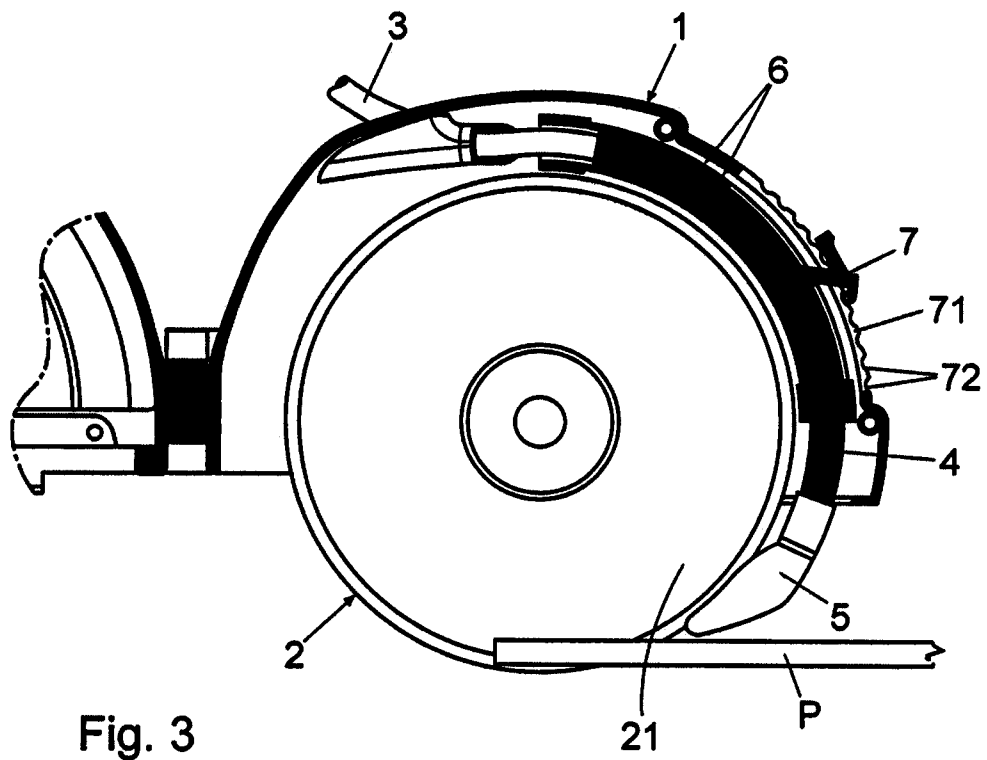


Fig. 2



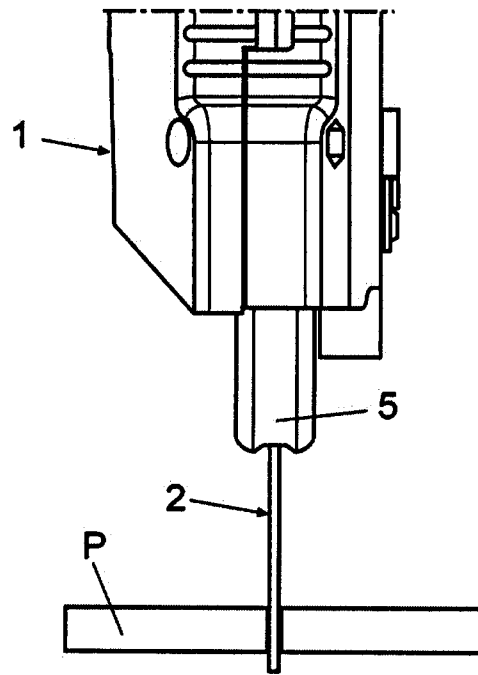


Fig. 5

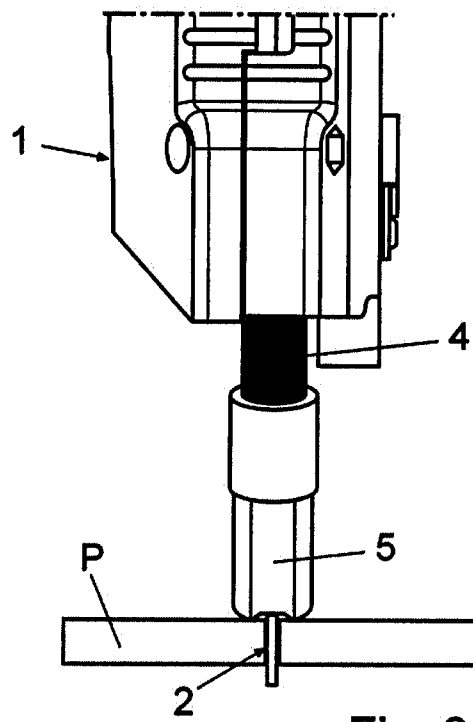


Fig. 6

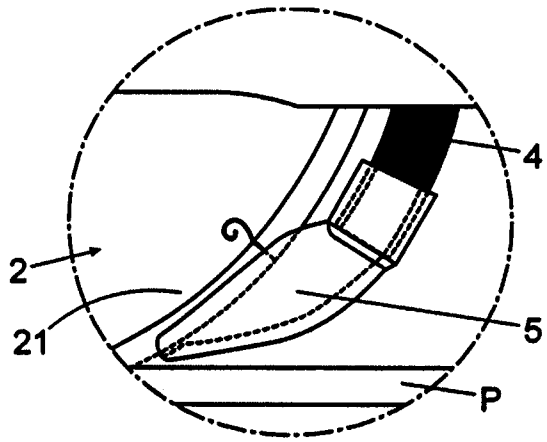


Fig. 7

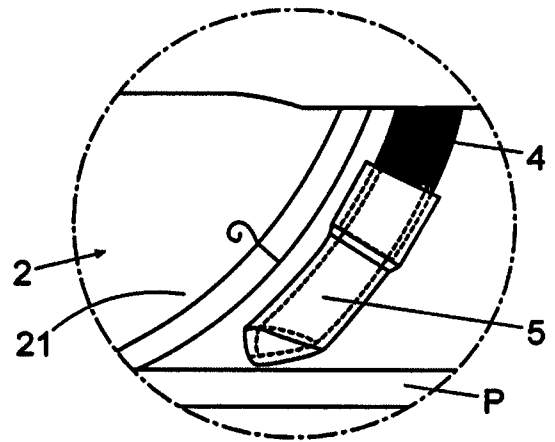


Fig. 8

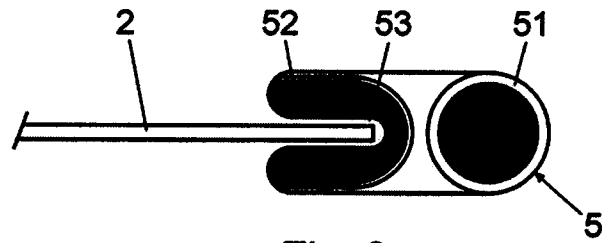


Fig. 9

