




- (51) **International Patent Classification:**
H04N 21/84 (2011.01) *H04N 21/235* (2011.01)
- (21) **International Application Number:**
PCT/IB2015/057882
- (22) **International Filing Date:**
14 October 2015 (14.10.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
62/063,555 14 October 2014 (14.10.2014) US
- (71) **Applicant:** EIGEN INNOVATIONS INC. [CA/CA]; 234 Bliss Carman Drive, Fredericton, New Brunswick E3B 9P6 (CA).
- (72) **Inventors:** EVERETT, Scott; 845 McLeod Avenue, Apt #321, Fredericton, New Brunswick E3B 9Y4 (CA). JONES, Richard; 2 Southwood Drive, Quispamsis, New Brunswick E2E 4Y6 (CA).
- (74) **Agent:** PERRY + CURRIER; 1300 Yonge Street, Suite 500, Toronto, Ontario M4T1X3 (CA).

- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

- (54) **Title:** SYSTEM, APPARATUS AND METHOD FOR CONFIGURATION OF INDUSTRIAL VISION CONTROL MODULES

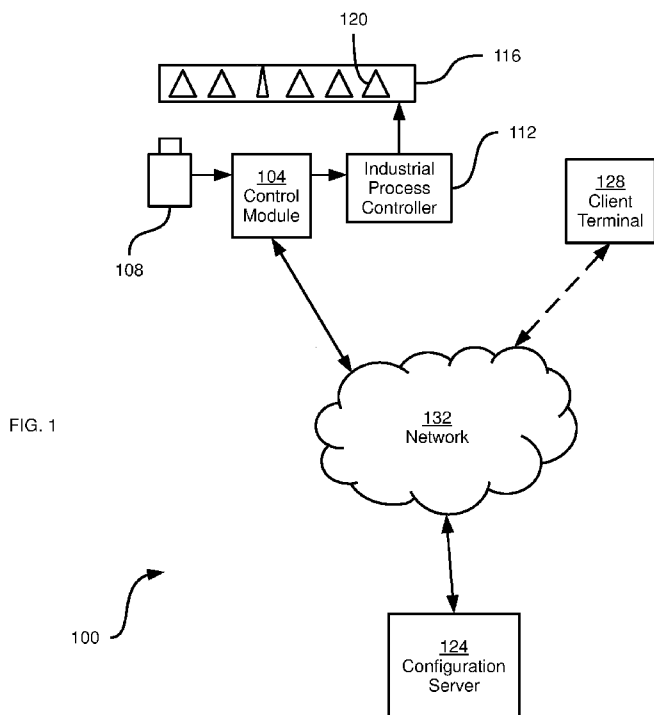

- (57) **Abstract:** A server for configuring an industrial vision control module includes: a memory; a network interface; and a processor interconnected with the memory and the network interface, the processor configured to: receive, via the network interface, image data from a vision system; determine at least one attribute of the image data; store at least one label in association with the at least one attribute; and transmit the at least one attribute and the at least one label to the vision system.

SYSTEM, APPARATUS AND METHOD FOR CONFIGURATION OF INDUSTRIAL VISION CONTROL MODULES

CROSS-REFERENCE TO RELATED APPLICATION

- 5 **[0001]** This application claims priority from U.S. Provisional Patent Application No. 62/063555, filed October 14, 2014, the contents of which is incorporated herein by reference.

FIELD

- 10 **[0002]** The specification relates generally to configuration of industrial vision systems, and more specifically to a method and system for configuring industrial vision systems through a process of comparative analysis of output samples.

BACKGROUND

- 15 **[0003]** Setup and configuration of conventional industrial vision systems requires knowledge of operational settings for a large number of complex control parameters to optimize the camera and processing module in use. These parameters are generally set manually by an operator with in depth knowledge of the parameter settings for the specific vision system used in the industrial setting.
- 20 These parameters control various aspects of the vision system such as contrast, focus, edge detection, shape detection, pattern matching, etc.

SUMMARY

- 25 **[0004]** According to aspects of the specification, systems and methods are provided to allow simplified configuration of vision systems (such as thermal cameras) by comparison of multiple visual output samples and related data, allowing the system to devise an ideal configuration based on categorization of the collected samples.

[0005] The system can refine its own configuration and logic through successive iterations of validation of automatically categorized samples (samples automatically categorized against a known base sample).

5 **BRIEF DESCRIPTIONS OF THE DRAWINGS**

[0006] Embodiments are described with reference to the following figures, in which:

[0007] FIG. 1 depicts a system for configuring an industrial vision control module, according to a non-limiting embodiment;

10 **[0008]** FIG. 2 depicts certain internal components of the server and the client terminal of the system of FIG. 1, according to a non-limiting embodiment;

[0009] FIG. 3 depicts a method of configuring an industrial vision control module, according to a non-limiting embodiment;

15 **[0010]** FIG. 4 depicts example image data received and processed during the performance of the method of FIG. 3, according to a non-limiting embodiment;

[0011] FIG. 5 depicts an interface presented by the client terminal of FIG. 1 during the performance of the method of FIG. 3, according to a non-limiting embodiment;

20 **[0012]** FIG. 6 depicts a further interface presented by the client terminal of FIG. 1 during the performance of the method of FIG. 3, according to a non-limiting embodiment;

[0013] FIG. 7 depicts a further interface presented by the client terminal of FIG. 1 during the performance of the method of FIG. 3, according to a non-limiting embodiment; and

25 **[0014]** FIG. 8 depicts a further interface presented by the client terminal of FIG. 1 during the performance of the method of FIG. 3, according to a non-limiting embodiment.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0015] FIG. 1 depicts a system 100 for configuring an industrial vision control module 104. System 100 includes the industrial vision control module 104, also referred to herein as control module 104. Control module 104 receives image data from an imaging device 108, either via a direct communications link (e.g. a Universal Serial Bus, USB connection or a Bluetooth™ connection), or via a network (e.g. via a wireless access point, router or other networking device), examples of which will be discussed below. Imaging device 108 can be any one of, or any suitable combination of optical cameras (i.e. capturing visible light), thermal cameras (i.e. capturing near-infrared and infrared radiation) and the like. More than one imaging device 108 can be provided in some embodiments. An examples of imaging device 108 is a thermal camera manufactured by FLIR®.

[0016] Control module 104 generally comprises a computing device (e.g. having one or more integrated circuits such as a central processing unit, a memory and the like) executing a control application. Control module 104 is configured, based on the image data received from imaging device 108, to generate control instructions and transmit (via either a direct connection or a network) the control instructions to an industrial process controller 112. Industrial process controller 112, in turn, acts on instructions received from control module 104 to control industrial equipment, such as a conveyor belt 116 or other equipment carrying manufactured products or subcomponents 120. For example, process controller 112, which can be any one of a programmable logic controller (PLC), laptop computer, desktop computer or the like, can control the speed of conveyor belt 116, and/or can control associated equipment (e.g. an air ejection device) to remove a defective one or a plurality of items 120 travelling along conveyor belt 116. As will now be apparent to those skilled in the art, in the present embodiment, imaging device 108 is configured to capture (and provide to control module 104) image data depicting the equipment controlled by process controller 112. For example, imaging device 108 can be configured to collect a series of images (including, but not limited to, a video stream) of items 120 travelling along conveyor belt 116. Each image may depict one item 120.

[0017] A wide variety of suitable conventional imaging devices 108, control modules 104, and industrial process controllers 112 and industrial process equipment will now occur to those skilled in the art.

[0018] System 100 also includes a configuration server 124 (also referred to
5 herein as server 124) and a client terminal 128 interconnected with each other and with control module 104 via a network 132. Server 124 can be based on any suitable server computing environment; examples of certain internal components of server 124 will be discussed below. Client terminal 128 can be based on any
10 of a variety of computing environments, including a desktop computer, a laptop computer, a tablet computer, a smart phone and the like. In some embodiments, the link between client terminal 128 and network 132 can be wireless (as shown in FIG. 1). The links between other components of system 100 can also be either wired or wireless, or a combination of wired and wireless.

[0019] Network 132 can be the same network as mentioned above
15 (interconnecting imaging device 108 and control module 104), or an additional network. Network 132 can include any one of, or any combination of, a local area network (LAN) defined by one or more routers, switches, wireless access points or the like. Network 132 can also include any suitable wide area network (WAN), including cellular networks and the Internet.

[0020] In brief, before analyzing image data and issuing control instructions to
20 controller 112, control module 104 is configured. Configuration of control module 104 involves the storage, at control module 104, of image attributes to be detected in the image data received from imaging device 108 and corresponding control instructions to be issued when such image attributes are present in the
25 image data. As will be discussed in greater detail below, server 124 and client terminal 128 interact with each other and with control module 104 to collect and classify image data, derive configuration parameters and deploy the configuration parameters to control module 104.

[0021] Before discussing the configuration procedures performed by server 124 and client terminal 128 in detail, a brief description of internal components of server 124 and client terminal 128 will be provided.

[0022] Referring to FIG. 2, server 124 includes a central processing unit (CPU) 200, also referred to herein as a processor 200, interconnected with a memory 204. Processor 200 and memory 204 are generally comprised of one or more integrated circuits (ICs), and can have a variety of structures, as will now occur to those skilled in the art (for example, more than one CPU can be provided).

[0023] Memory 204 can be any suitable combination of volatile (e.g. Random Access Memory ("RAM")) and non-volatile (e.g. read only memory ("ROM"), Electrically Erasable Programmable Read Only Memory ("EEPROM"), flash memory, magnetic computer storage device, or optical disc) memory. In the present example, memory 204 includes both volatile and non-volatile storage.

[0024] Processor 200 is also interconnected with one or more network interfaces, such as a network interface controller (NIC) 208, which allows server 124 to connect to other computing devices, such as control module 104 and client terminal 128 via network 132. NIC 208 thus includes the necessary hardware to communicate via network 132. Server 124 can also include input devices (not shown) interconnected with processor 200, such as a keyboard and mouse, as well as output devices (not shown) interconnected with processor 200, such as a display. In some embodiments, the input and output devices can be connected to processor 200 via NIC 208 and another computing device. In other words, input and output devices can be local to server 124, or remote.

[0025] Memory 204 stores a plurality of computer-readable programming instructions, executable by processor 200, in the form of various applications, and also stores various types of data for use during the execution of those applications. As will be understood by those skilled in the art, processor 200 can execute the instructions of or more such applications in order to perform various actions defined within the instructions. In the description below, processor 200 or

server 124 are said to be “configured to” perform certain functions. It will be understood that server 124 is so configured via the execution of the instructions of the applications stored in memory 204 by processor 200. Among the applications stored in memory 204 is a configuration application 212, which is executable by processor 200 to perform various actions described herein.

[0026] Client terminal 128 includes a central processing unit (CPU) 250, also referred to herein as a processor 250, interconnected with a memory 254. Processor 250 and memory 254 are generally comprised of one or more integrated circuits (ICs), and can have a variety of structures, as will now occur to those skilled in the art (for example, more than one CPU can be provided).

[0027] Memory 254 can be any suitable combination of volatile (e.g. Random Access Memory (“RAM”)) and non-volatile (e.g. read only memory (“ROM”), Electrically Erasable Programmable Read Only Memory (“EEPROM”), flash memory, magnetic computer storage device, or optical disc) memory. In the present example, memory 254 includes both volatile and non-volatile storage.

[0028] Processor 250 is also interconnected with one or more network interfaces, such as a network interface controller (NIC) 258, which allows client terminal 128 to connect to other computing devices, such as server 124 via network 132. NIC 258 thus includes the necessary hardware (e.g. a WiFi radio) to communicate via network 132.

[0029] Client terminal 128 can also include an input device 262 interconnected with processor 250, such as any one of, or any suitable combination of, a keyboard, a mouse, a touch screen integrated with a display, a microphone, and the like. Client terminal 128 also includes an output device interconnected with processor 250, such as a display 266. Display 266 can include any suitable display panel or combination of display panels. In some embodiments, display 266 can be integrated with input device 262 (e.g. when input device 262 includes a touch screen).

[0030] Memory 254 stores a plurality of computer-readable programming instructions, executable by processor 250, in the form of various applications,

and also stores various types of data for use during the execution of those applications. As will be understood by those skilled in the art, processor 250 can execute the instructions of or more such applications in order to perform various actions defined within the instructions. Processor 250 or client terminal 128 are
5 therefore said to be “configured to” perform certain functions, via the execution of the instructions of the applications stored in memory 254 by processor 250. Among the applications stored in memory 254 is a client configuration application 270, which is executable by processor 200 to perform various actions described herein.

10 **[0031]** Referring now to FIG. 3, a method 300 of configuring an industrial vision control module, such as control module 104. Method 300 will be described in conjunction with its performance in system 100, although it is contemplated that method 300 can also be performed by other suitable systems. In particular, the blocks of method 300 are performed by server 124, via the execution of
15 application 212 and various interactions with control module 104 and client terminal 128.

[0032] At block 305, server 124 is configured to receive image data from control module 104, for example via network 132. The image data received at block 305 includes any one of, or any suitable combination of, a stream of video
20 data, a video file, a plurality of still images, and the like, captured by imaging device 108 under the control of control module 104. Upon receipt of the image data, server 124 is configured to store the image data in memory 204 for further processing.

[0033] At block 310, server 124 is configured to classify the image data received at block 305. In brief, classification of image data includes determining
25 which of a plurality of predefined classes corresponds to the image data. For example, when the image data includes a plurality of still images captured by imaging device 108, the classification at block 310 includes a determination, for each of the images, which of a plurality of classes best fits the image. In brief,
30 each class corresponds to a set of image attributes, and images having the same

class have those attributes in common and may therefore, for example, depict similar objects. A variety of classification techniques can be applied at block 310 by server 124, as will be discussed in greater detail below.

[0034] At block 315, server 124 is configured to determine whether an error metric associated with the classification at block 310 exceeds a predefined threshold. Various classification techniques include the generation of a measurement of confidence in the classification of each image (i.e. likelihood that the classification is incorrect). Server 124 is configured at block 315 to compare such error measurements to a threshold. When the determination at block 315 is affirmative (indicating that the classification is likely to be erroneous), the performance of method 300 proceeds to block 320.

[0035] In the present embodiment, it is assumed that control module has not yet been configured, and that no image classes have been created. Thus, the performance of blocks 310 and 315 may be omitted entirely, or a set of default classes can be employed for the first performance of block 310 which result in an affirmative determination at block 315. In any event, at block 320 server 124 is configured to generate one or more clusters, or groups, of images from the image data received at block 305. The performance of blocks 310 and 315 can be repeated for each received image, and server 124 can be configured to wait until a predefined number of affirmative determinations occur at block 315 to perform block 320, rather than performing block 320 immediately upon a single affirmative determination.

[0036] At block 320, server 124 is configured to execute any suitable clustering (also referred to as unsupervised learning) process on the subset of image data for which classification error exceeded the above-mentioned threshold. A variety of clustering processes that will occur to those skilled in the art can be applied at block 320. In general, server 124 is configured to analyze each image in the subset of image data for which block 320 is being performed, to generate at least one preconfigured image attribute. For example, server 124 can be configured to generate, for each image in the subset, a histogram (e.g.

intensity, red, green, blue, and the like), an image moment, feature descriptors such as contours, edges, corners and patterns, and the like. Server 124 is then configured to group images having similar combinations of image attributes together. For example, in an implementation of k-means clustering, server 124
5 can be configured to define (e.g. at random) a plurality of cluster centroids, each centroid defined by a value for each of the above-mentioned image attributes. In other words, for n image attributes, each cluster centroid is a point in n -dimensioned space. Server 124 is then configured to place each image in the cluster whose centroid is closest to the n -dimensional point defined by the image
10 attributes of that particular image. Following the initial placement of images in the randomly-defined clusters, server 124 is configured to compute new centroids for each cluster as the averages of all the image points. The above process is repeated until the cluster centroids remain fixed, or substantially fixed.

[0037] At block 320, for example, a set of one hundred images that could not
15 be accurately classified at block 310 (whether the images comprise frames of a video stream, or individual still images), server 124 may subdivide the images into groups of less than one hundred based on similarities between the images. Turning to FIG. 4, an example of input image data received at block 305 is shown in the form of a set of images 400.

[0038] In the present example, it is assumed that in the first performance of
20 method 300, blocks 310 and 315 are skipped, and the performance of method 300 proceeds directly to block 320. At block 320, server 124 divides the input images 400 into three clusters 404, 408 and 412. It is contemplated that although clusters 404, 408 and 412 are shown as having the same number of member
25 images, in other performances of method 300 any number of images can appear in any cluster. As seen in FIG. 4, the images of each cluster 404, 408 and 412 bear certain resemblances.

[0039] Returning to FIG. 3, responsive to generating one or more clusters of
30 images from the image data received at block 305 (or, more specifically, from the image data that was not successfully classified at block 310), at block 325 server

124 is configured to select at least one sample image from each cluster and present the sample images. Which images are selected as samples can be performed in a variety of ways. For example, server 124 can be configured to select an image from each cluster whose image attributes (e.g. whose point in n -dimensioned space defined by the image attributes mentioned above) is closest to the centroid of the respective cluster. In another example, server 124 can select a sample image at random from each cluster. In a further example, server 124 is configured to select a plurality of sample images from each cluster. For example, the closest image to the cluster centroid, and the furthest image from the cluster centroid can both be selected for presentation. In other words, the sample images can include both the image that deviates least from the average of the images in the cluster, and the image that deviates most from the average of the images in the cluster.

[0040] Presentation of the sample images at block 325 can be achieved in a variety of ways. For example, server 124 can present the sample images on a display connected directly to processor 200. In other embodiments, including the present embodiment, presentation of the sample images includes transmitting the sample images to client terminal 128, which in turn is configured (via execution of application 270) to present the sample images on display 266.

[0041] Turning to FIG. 5, an example of the results of the performance of block 325 is shown. In particular, display 266 of client terminal 128 is depicted, presenting one representative image from each cluster 404, 408 and 412. Specifically, sample image 500 corresponds to cluster 404, sample image 504 corresponds to cluster 408, and sample image 508 corresponds to cluster 412. As mentioned above, the sample images were received from server 124, for example over network 132. In some embodiments, server 124 is configured to transmit the sample images to client terminal 128 in response to a request from client terminal 128, while in other embodiments, server 124 is configured to send the sample images without a request.

[0042] Referring again to FIG. 3, at block 330 server 124 is configured to received input data defining one or more labels corresponding to each of the sample images. The input data is generally received from the same computing device as the sample images were transmitted to. Thus, in the present example, the input data is received at server 124 from client terminal 128. Client terminal 128 is configured to render the sample images 500, 504 and 508 as selectable elements on display 266. Upon selection of a sample image, client terminal 128 is configured to present a prompt for the creation of a new label, or the selection of one or more existing labels (that is, previously created in an earlier performance of method 300).

[0043] Referring to FIG. 6, an updated interface is shown rendered on display 266, responsive to a selection of sample image 500 being made (e.g. via input device 262). Interface 600 includes a plurality of selectable prompts for receiving input data defining labels associated with the selected sample image. A first label, "widget", has been entered in one of the prompts, for example via input data received at input device 262. Upon receipt of the input data, client terminal 128 is configured to transmit the label, along with an identifier of the associated sample image, to server 124. Although three prompts are shown in FIG. 6, fewer or more prompts can be provided in other embodiments. Additionally, in subsequent performances of method 300, previously created labels can be selected, e.g. from drop-down menus in interface 600.

[0044] In some embodiments, labels can also be received for images beyond those selected as sample images. For example, client terminal 128 can be configured to render a selectable button or other element on display 266 that, when selected, causes client terminal 128 to request additional images from the cluster corresponding to a given sample images. Server 124 is configured to transmit the additional images to client terminal 128 in response to the request, and client terminal 128 can display the additional images (up to and including every image in a given cluster), and receive labels for each additional image.

[0045] FIGS. 7 and 8 illustrate additional interfaces 700 and 800, respectively, for use in labelling sample images 504 and 508, respectively. It is contemplated that in some embodiments, labelling interfaces such as interfaces 600, 700 and 800 can allow for certain image-editing functions, such as cropping an image to replace the image with a portion of the original image, prior to labelling the
5 cropped portion.

[0046] As illustrated by FIGS. 7 and 8, it is also contemplated that sample images from different clusters can be assigned the same label. In other words, clusters 404 and 408 are effectively combined by labelling their sample images in
10 the same way.

[0047] Having received label data for the sample images (and in some embodiments, for additional images in the clusters represented by the sample images), server 124 is configured to perform block 335. Server 124 is configured, in the present embodiment, to wait until label data has been received at least for
15 every sample image presented at block 325 before performing block 335. However, in other embodiments, server 124 need not wait for all label data to be received.

[0048] At block 335, server 124 is configured to execute a classification training process to generate classification parameters, based on the image
20 parameters discussed earlier and the labels received at block 330. In other words, while the clustering performed at block 320 is an example of an unsupervised learning process, the generation of classification parameters at block 335 is referred to as a supervised learning process, due to the availability of labels associated with the images.

[0049] A variety of classification processes can be executed at block 335 to generate classification parameters. In general, server 124 is configured to identify a set of image parameters that, when applied to the labelled images, successfully divides the labelled images into groups according to their labels. For example, server 124 can be configured to plot the image attributes (e.g.
25 histograms and the like) mentioned earlier in n -dimensional space (or higher
30

dimensions, in some classification techniques), such that each labelled image is assigned to one point in n -dimensional space. Server 124 can then be configured to identify one or more geometric structures (e.g. lines, planes, hyperplanes and the like) that correctly divide a group of points having one label from all other points. This method of classification is referred to as a support vector machine (SVM). A variety of other classification techniques can also be applied at block 335.

[0050] Prior to generating the classification parameters, server 124 is configured to apply the labels received at block 330 to all images in the clusters corresponding to those labels. For example, when the label “widget” is received in connection with sample image 500 (via interface 600), server 124 is configured to apply the same label to the other image in cluster 404 (that is, to store both images in cluster 404 in memory in association with the label “widget”), even though no labels were received directly corresponding to the other image of cluster 404.

[0051] Responsive to generating classification parameters at block 335, server 124 is configured to perform block 340. At block 340, server 124 is configured to generate and deploy control parameters to control module 104, based on the classification parameters generated at block 335. In other words, server 124 is configured to convert the classification parameters into alert conditions, image attribute ranges, or other parameters that control module 104 is capable of using to classify images received from imaging device 108.

[0052] The generation of control parameters at block 340 includes retrieving, from memory 204, an identifier of one or more formats of control parameters that control module 104 is configured to use. Server 124 can also retrieve from memory 204 one or more conversion rules. The conversion rules instruct server 124 on how to convert the classification parameters into control parameters. For example, server 124 can be configured at block 340 to convert the above-mentioned n -dimensional geometric structures into n pairs of values. Each pair of values defines an upper boundary and a lower boundary for one image attribute.

The control parameters generated at block 340 include, for each label, the complete set of n boundary pairs, such that control module 104 is configured to assign the relevant label to an image whose attributes fall within each respective boundary pair. In other embodiments, control module 104 may be capable of
5 implementing the same classification technique as employed by server 124, and thus no conversion may be necessary.

[0053] Thus, the control parameters generated at block 340 identify, for each of a plurality of labels, a set of image attributes corresponding to that label. The control parameters generated at block 340 also include a control action
10 corresponding to each set of image attributes. The control action represents the control instruction to be sent to process controller 112 by control module 104 in response to detection of the corresponding set of image attributes. For example, when control module 104 detects the set of image attributes corresponding to the “defective widget” label (see FIG. 8), control module 104 can be configured to
15 transmit a control instruction to process controller 112 to activate an air ejector to remove a defective one of the items 120 from conveyor belt 116.

[0054] Responsive to generating the control parameters, server 124 is configured to transmit the control parameters to control module 104, for example via network 132. Following the receipt of the control parameters, control module
20 104 can receive image data from imaging device, and generate control instructions to control equipment such as conveyor belt 116 by comparing the image data to the control parameters. Control module 104 is also configured to continue to send the image data to server 124.

[0055] Following the performance of block 340, at block 345 server 124 is
25 configured to store the classified images and their associated error metrics in memory 204. At block 350, server 124 is configured to determine whether validation of the image classifications has been requested. When the determination is negative, server 124 returns to block 305 to receive additional image data and repeat the performance of method 300.

[0056] The determination at block 350 can be made based on input data received by server 124, and can also be made automatically by server 124. For example, in some embodiments, server 124 can automatically initiate validation for any images whose classification error metrics are above a certain threshold
5 (which can be lower than the threshold applied at block 315). In other embodiments, server 124 can receive a validation request from client terminal.

[0057] Upon a positive determination at block 350, server 124 proceeds to block 355. At block 355, server 124 presents a selection of images stored at block 345 for validation. For example, server 124 can transmit to client terminal
10 128 any images with elevated classification error as mentioned above (that is, with low classification confidence or reliability). Client terminal 128 can then be configured to present those images on display 266 along with the labels assigned by server 124 via classification (either at block 335 or block 310).

[0058] At block 360, server 124 is configured to receive validation data either
15 confirming that the labels assigned at block 310 or 335 are correct, or indicating that those labels are not correct. The validation data can also include new labels to replace the originally assigned labels. Having received the validation data, server 124 is configured to repeat the performance of block 335 to generate updated classification parameters. Those classification parameters are, in turn,
20 converted to updated control parameters, which are deployed to control module 104 as mentioned above.

[0059] Thus, the performance of method 300 can continue in parallel with the control of industrial process equipment by control module 104, in order to refine the control parameters applied by control module 104.

[0060] Those skilled in the art will appreciate that in some embodiments, the
25 functionality of either or both of client terminal 128 and server 124 may be implemented using pre-programmed hardware or firmware elements (e.g., application specific integrated circuits (ASICs), electrically erasable programmable read-only memories (EEPROMs), etc.), or other related
30 components.

[0061] The scope of the claims should not be limited by the embodiments set forth in the above examples, but should be given the broadest interpretation consistent with the description as a whole.

We claim:

1. A server comprising:
 - a memory;
 - a network interface; and
 - 5 a processor interconnected with the memory and the network interface, the processor configured to:
 - receive, via the network interface, image data from a vision control module;
 - determine at least one attribute of the image data;
 - 10 store at least one label in association with the at least one attribute; and
 - transmit control parameters to the vision system based on the at least one label and the at least one attribute.
- 15 2. The server of claim 1, the processor further configured to store the at least one label by comparing the at least one attribute to previous attributes stored in the memory in association with labels.
3. The server of claim 1, the processor further configured, prior to
 - 20 transmitting the at least one attribute and the at least one label to the vision control module, to transmit the image data and at least one label to a terminal via the network interface.
4. The server of claim 3, the processor further configured to receive, via the
 - 25 network interface, input data from the terminal confirming or rejecting the association of the at least one label with the image data.
5. The server of claim 4, the processor further configured to receive, from the
 - 30 terminal, a further label; the processor further configured to store the further label in association with the at least one attribute.

6. The server of claim 5, the processor further configured to repeat the receipt of image data, the determination of at least one attribute, and the storage of at least one label.

5

7. A system, comprising:
the server of any one of claims 1 to 6;
a vision control module connected to the server via a network;
an imaging device connected to the vision control module, the imaging
10 device configured to provide the image data to the vision control module for
transmission to the server; and
a process control apparatus connected to the vision control system, the
vision control system configured to send control instructions to the process
control apparatus based on the control parameters received from the server.

15

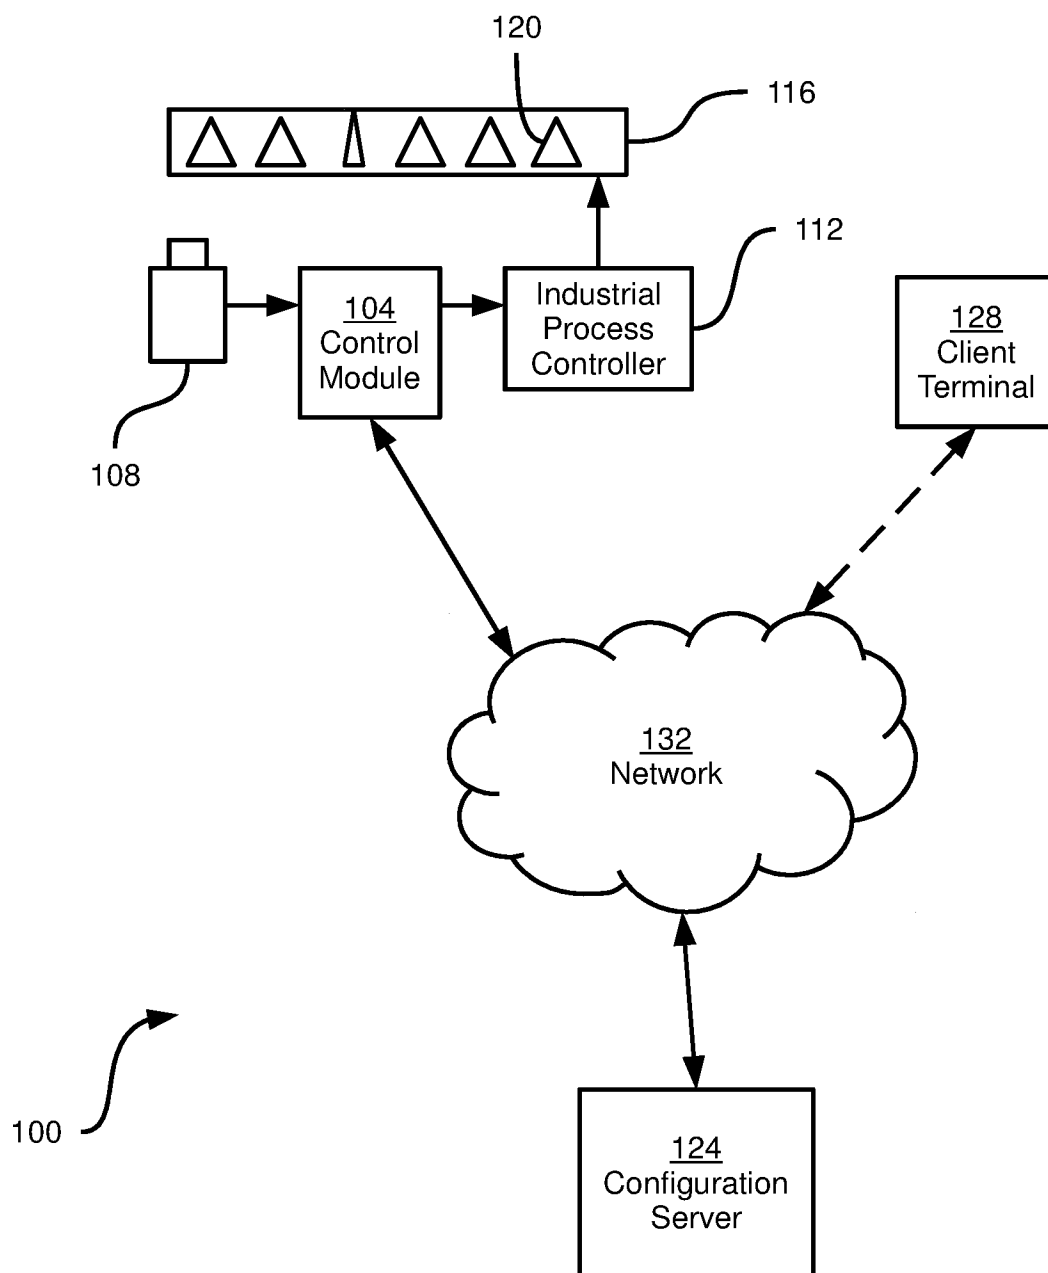


FIG. 1

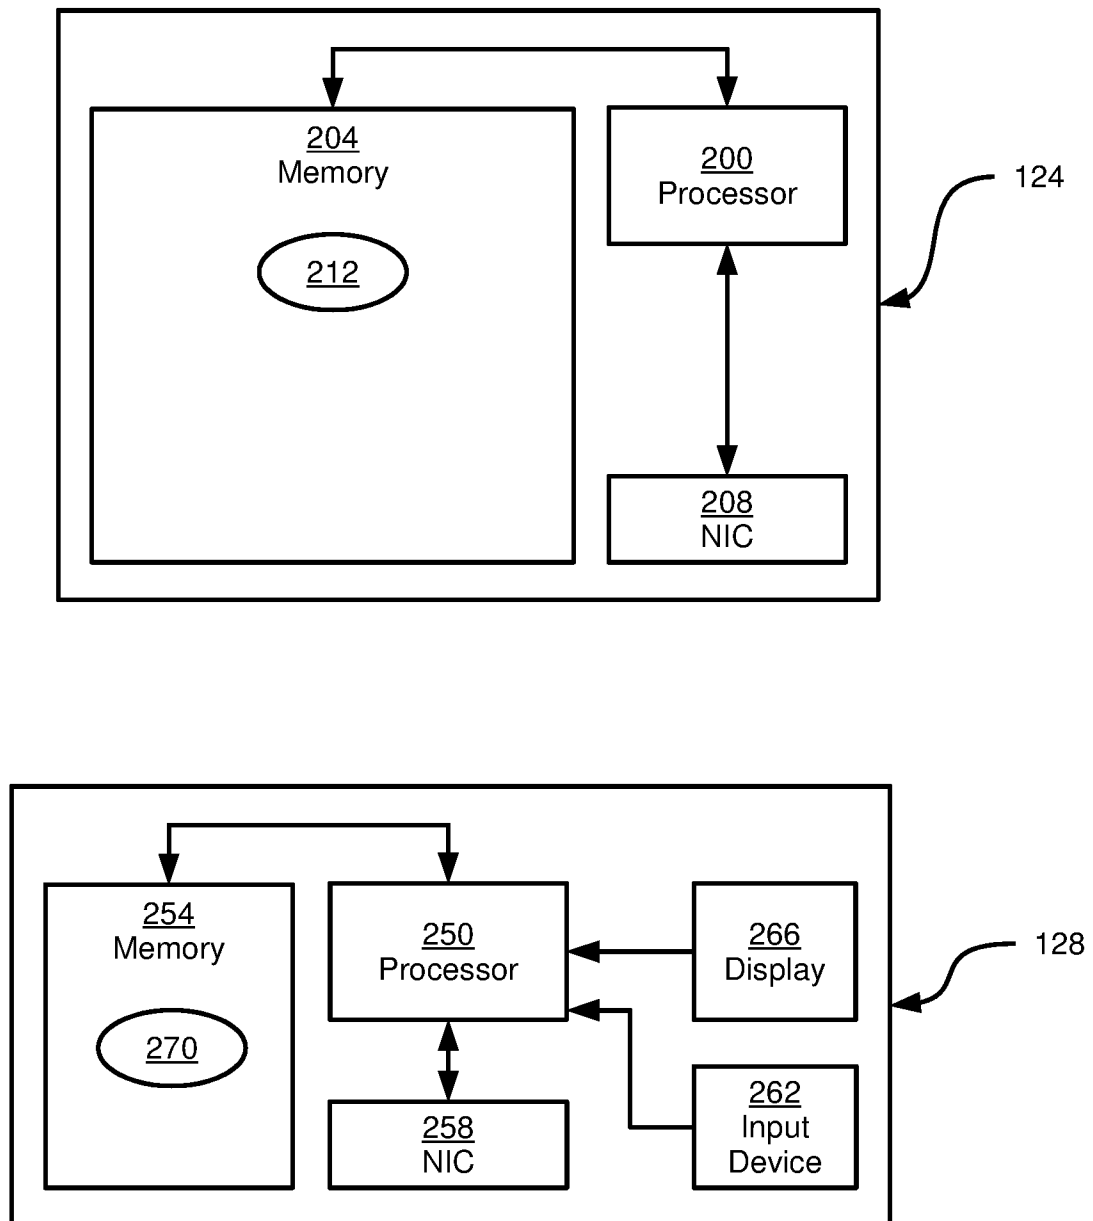


FIG. 2

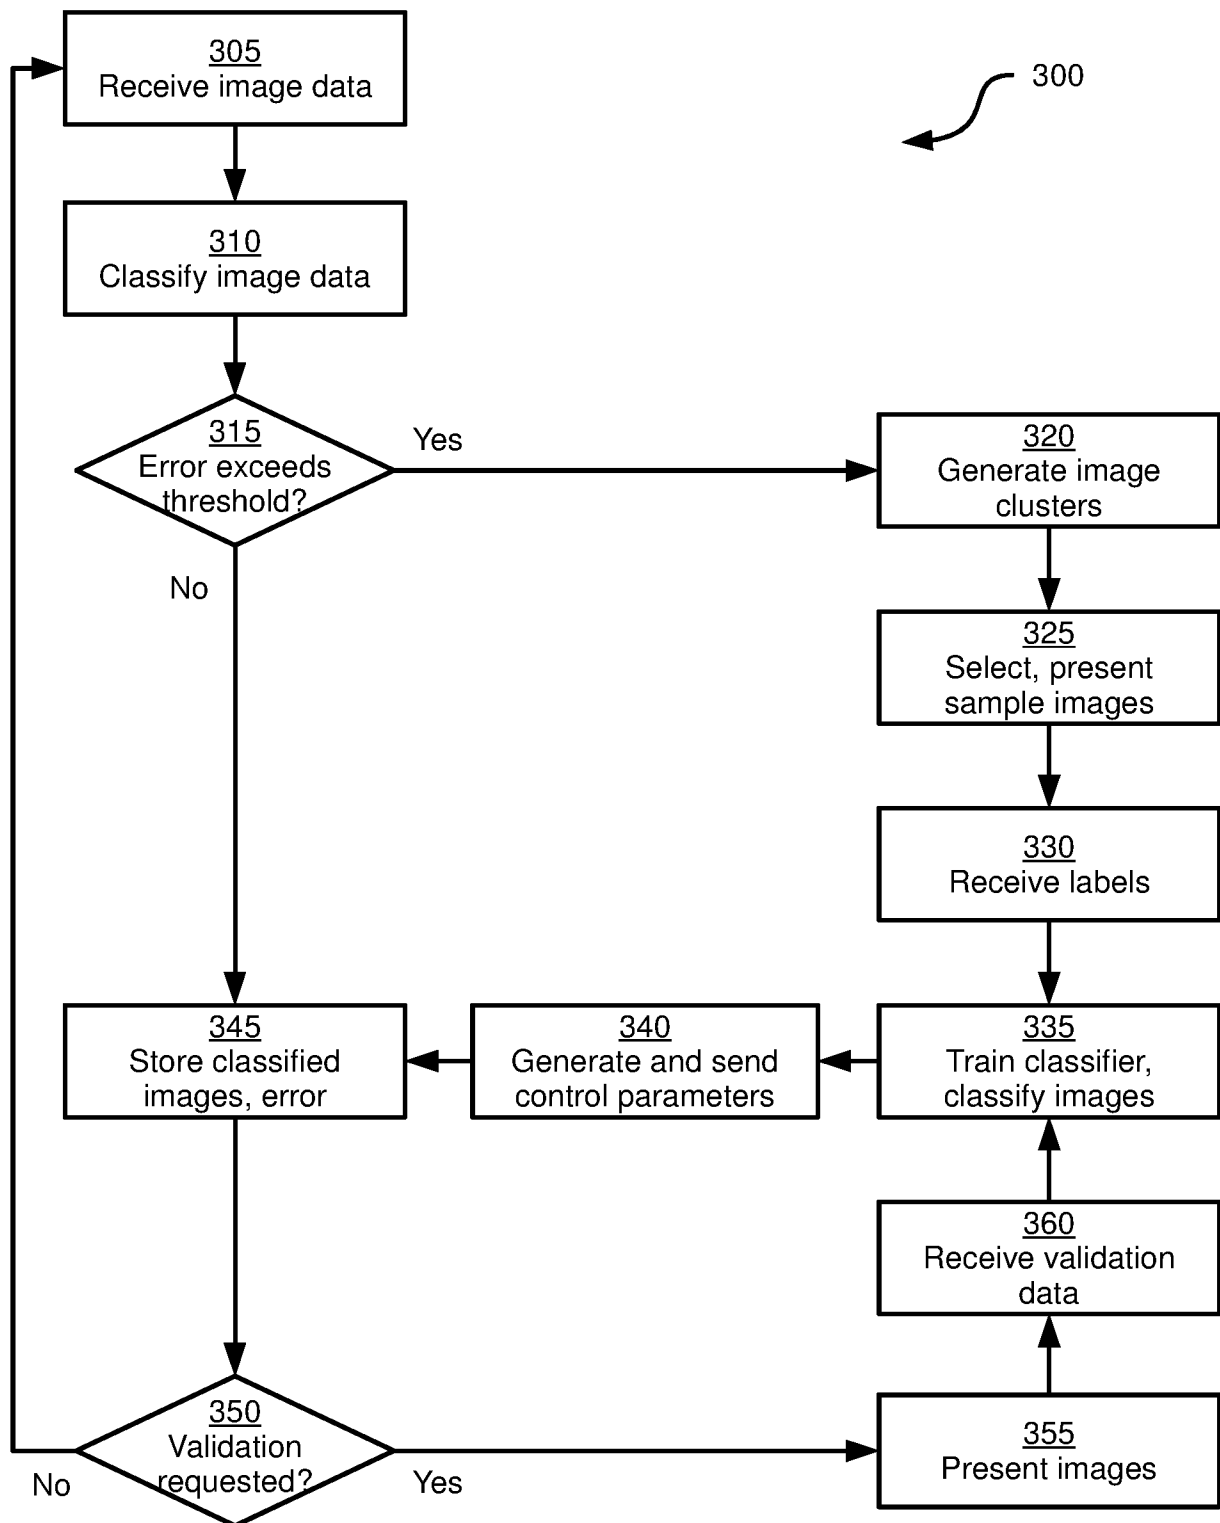


FIG. 3

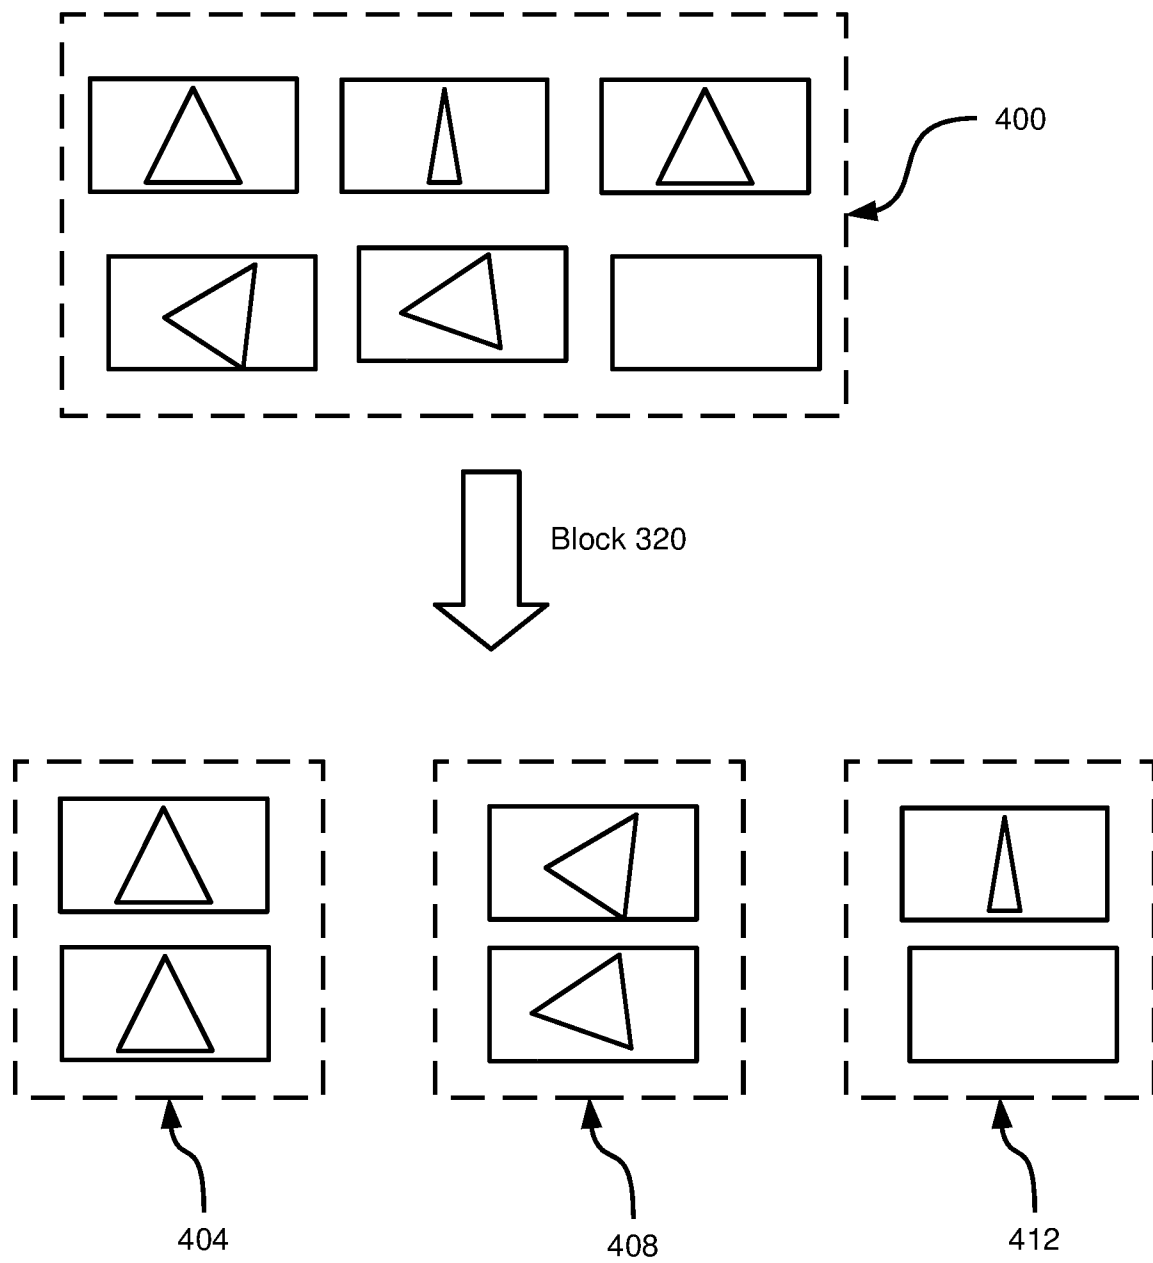


FIG. 4

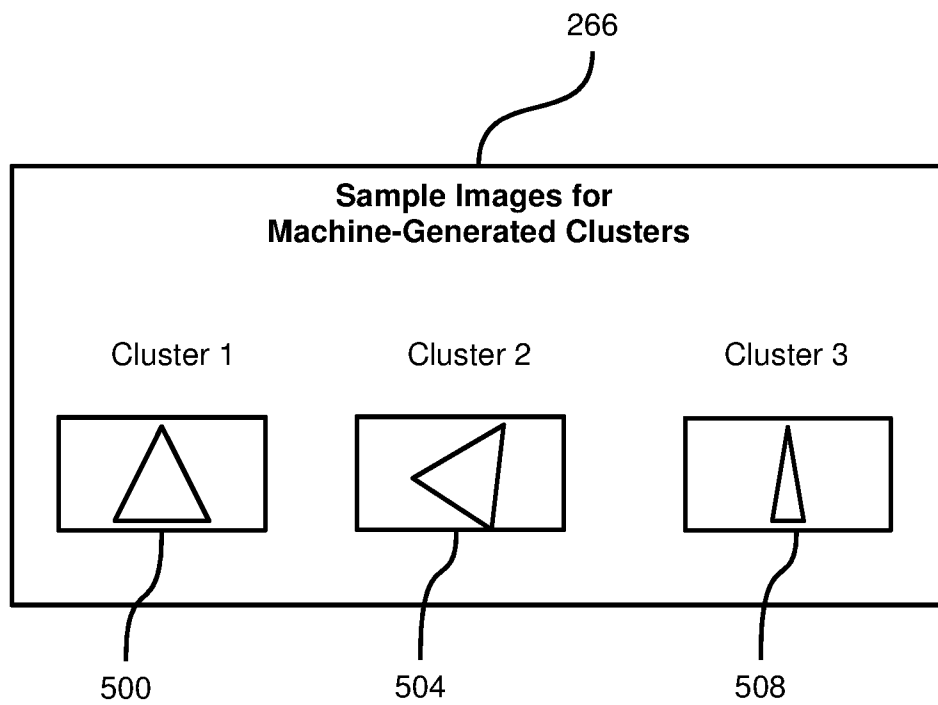


FIG. 5

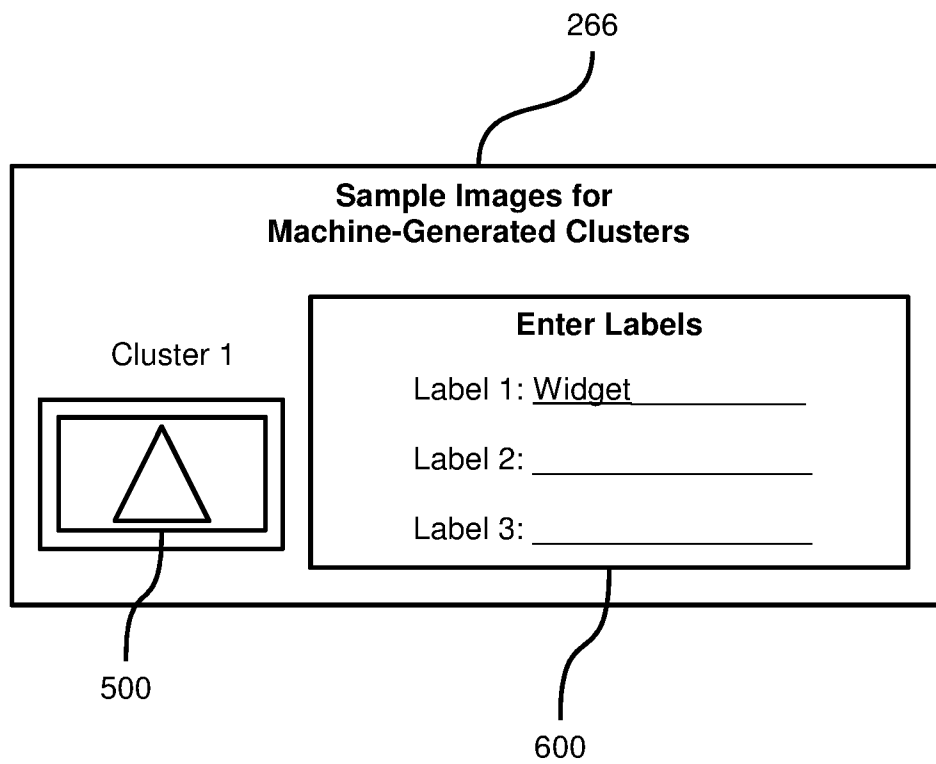


FIG. 6

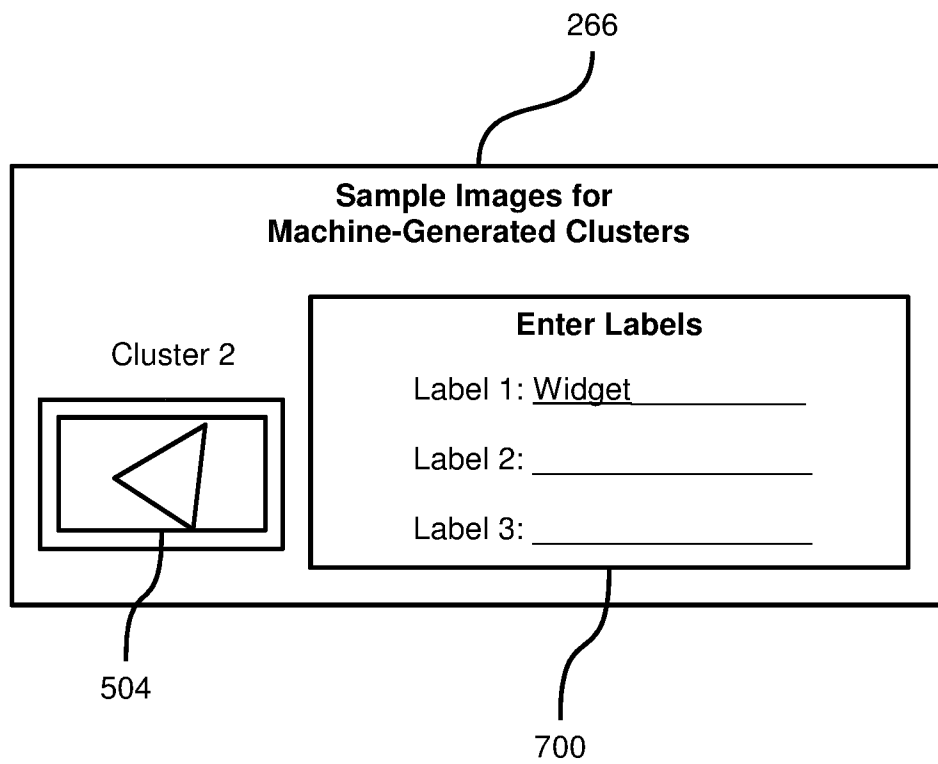


FIG. 7

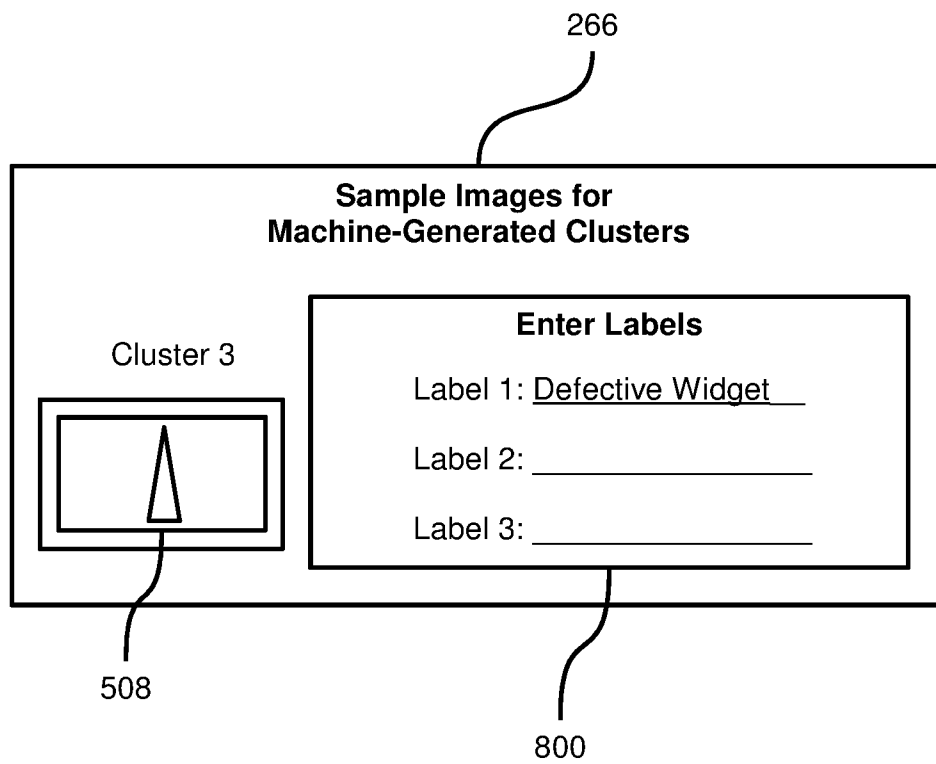


FIG. 8

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB2015/057882

A. CLASSIFICATION OF SUBJECT MATTER
IPC: **H04N 21/84** (2011.01), **H04N 21/235** (2011.01)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC: **H04N 21/84** (2011.01), **H04N 21/235** (2011.01)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used)

Questel-Orbit, Esp@cenet, Canadian Patent Database, USPTO Database, IEEE Xplore.

Keywords: automatic, configuration, industrial, image, vision, control, module, network, label, attribute.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CN101184167A (HAN ET AL.) 21 May 2008 (21-05-2008)* -see abstract; -see claims 1-2; -see figures 1-4. *machine translation used for English translation.	1-7
X	US7120644B1 (CANESSA ET AL.) 10 October 2006 (10-10-2006) -see abstract; -see column 2, lines 37-67; -see column 3, line 34 to column 6, line 54; -see figures 1-5.	1-7
A	US2004201702A1 (WHITE, Craig R.) 14 October 2004 (14-10-2004) -see whole document.	1-7

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
01 December 2015 (01-12-2015)

Date of mailing of the international search report
15 December 2015 (15-12-2015)

Name and mailing address of the ISA/CA
Canadian Intellectual Property Office
Place du Portage I, C114 - 1st Floor, Box PCT
50 Victoria Street
Gatineau, Quebec K1A 0C9
Facsimile No.: 001-819-953-2476

Authorized officer

Hassan Bayaa (819) 997-7810

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB2015/057882

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US6705992B2 (GATZKE, Ronald D.) 16 March 2004 (16-03-2004) -see whole document.	1-7

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/IB2015/057882

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
CN101184167A	21 May 2008 (21-05-2008)	CN101184167A CN100512385C	21 May 2008 (21-05-2008) 08 July 2009 (08-07-2009)
US7120644B1	10 October 2006 (10-10-2006)	None	
US2004201702A1	14 October 2004 (14-10-2004)	None	
US6705992B2	16 March 2004 (16-03-2004)	US2003163045A1 AT517580T AU2003248357A1 CN1688256A CN100413470C EP1480562A1 EP1480562B1 JP2006505294A WO03071951A1	28 August 2003 (28-08-2003) 15 August 2011 (15-08-2011) 09 September 2003 (09-09-2003) 26 October 2005 (26-10-2005) 27 August 2008 (27-08-2008) 01 December 2004 (01-12-2004) 27 July 2011 (27-07-2011) 16 February 2006 (16-02-2006) 04 September 2003 (04-09-2003)