

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
5 March 2009 (05.03.2009)

PCT

(10) International Publication Number  
**WO 2009/027151 A1**

- (51) **International Patent Classification:**  
H04L 12/56 (2006.01) H04B 7/02 (2006.01)
- (21) **International Application Number:**  
PCT/EP2008/059450
- (22) **International Filing Date:** 18 July 2008 (18.07.2008)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**  
07291057.3 31 August 2007 (31.08.2007) EP
- (71) **Applicant (for all designated States except US):** ALCA-  
TEL LUCENT [FR/FR]; 54, rue La Boétie, F-75008 Paris  
(FR).
- (72) **Inventors:** CONTE, Alberto; 41, Bld St. Jacques,  
F-75014 Paris (FR). DE JUAN HUARTE, Federico;  
23 bis rue Morere, F-75014 Paris (FR). BALAGEAS,  
Carine; 12 avenue Montaigne, F-91190 Gif Sur Yvette  
(FR).
- (74) **Agent:** WETZEL, Emmanuelle; Alcatel Lucent, Intel-  
lectual Property & Standards, Lorenzstrasse 10, 70435  
Stuttgart (DE).

- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


**Declaration under Rule 4.17:**

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(54) **Title:** WIRELESS MULTIPLE CONNECTIONS AND METHOD THEREOF

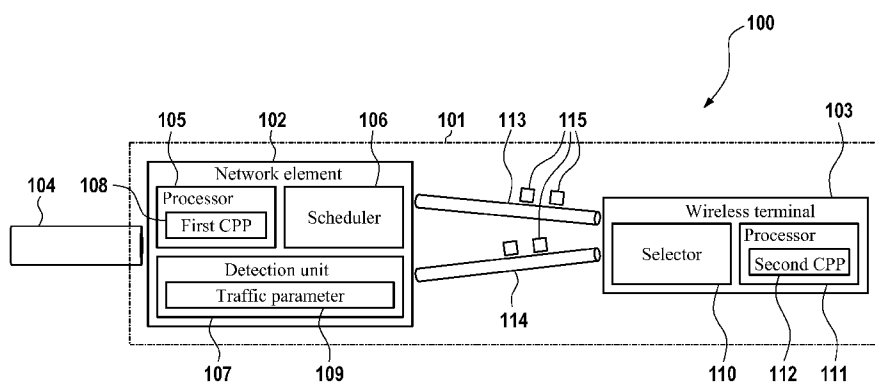

**Fig. 1**

(57) **Abstract:** The present invention provides a method for wireless transmission of a single packet flow from a network element. The method comprises establishing a first logical connection to a first wireless terminal for transmission of said single packet flow, determining at least one traffic parameter, establishing at least a second logical connection to the wireless terminal depending on said traffic parameter, for transmission of said single packet flow and transmitting the single packet flow using at least one of the first and second logical connections to the wireless terminal.

WO 2009/027151 A1

## Wireless Multiple Connections and Method thereof

-----  
Description  
-----**Technical field**

The invention relates to a wireless transmission of a single packet flow, and more particularly without limitation to a method of wireless transmission of a single packet flow, to a network element, to a wireless terminal, and to a computer program product adapted to perform the method in accordance with the invention.

**Background and related art**

A connection between a terminal and a network element of a wireless communication network is generally established via an air interface. The air interface can for example be compliant with the IEEE 802.16 standard. The functions of a protocol can be divided into a series of layers in accordance with the open systems interconnection reference model (OSI model), starting on the applications layer up to the air interface. One of these layers is the so called data link layer.

One of the main tasks of the link layer includes establishing a logical link connection between a transmitter and a receiver and using an identification number to identify the logical connections. The sub-layer responsible for controlling this traffic on the communications channel used by different network devices is called the Media Access Network (MAC).

There are different types of logical connections between network elements. One of the most common is the unicast mode that sends information packets to a single destination, setting up independent connections and copying the information from end-to-end to every user that requires it. The extreme opposite is the broadcasting

mode, which uses the network capabilities to send information to all destinations without congesting the network capacity, using either broadcast channels or different routing methods. A more controlled approach is reached using the multicast mode, as it transports the packets to a group of destinations simultaneously, delivering the message over each link of the network only once and creating copies only when the links to the destinations split. All mentioned methods use in general a single transmitter to send the information to one or more users. If it is necessary to transmit simultaneously a message from different transmitters, there is a commonly technique known as simulcast. In this case, there is a transmission area covered by several transmitters or network elements. One of the disadvantages of this type of connections in standards as IEEE 802.16 is that the connection mode is established at the beginning of the connection, before the delivery of the packet flow, leading to a congestion of the network or to a waste of network resources.

There is therefore a need for a method of establishing wireless multiple connections in a communication network, an improved component of the wireless communication network, an improved terminal, and a computer program product that is adapted for performing the method in accordance with the invention.

20

### **Summary of the invention**

The present invention provides a method for wireless transmission of a single packet flow from a network element. The method comprises establishing a first logical connection to a first wireless terminal for transmission of said single packet flow, determining at least one traffic parameter, establishing at least a second logical connection to the wireless terminal depending on said traffic parameter, for transmission of said single packet flow and transmitting the single packet flow using at least one of the first and second logical connections to the wireless terminal.

30

The method in accordance with the invention is particularly advantageous as by establishing simultaneous connections for a single packet flow between the transmitter and a receiver, it allows performing more advanced processing and handling to de-

liver the given single packet flow. For example, it is possible to switch from a type of connection to the other based on the reception quality and transmission speed, or to handle specific packets of the single packet flow in different ways. The network is then able for example to adapt the transmission of packets based on service priorities or based on changes in the geographical position of the mobile.

In accordance with an embodiment of the invention, the first logical connection corresponds to a unicast connection, the second logical connection corresponds to a multicast connection for transmission to a plurality of wireless terminals including the first wireless terminal and the at least one traffic parameter corresponds to a number of the plurality of wireless terminals. This method further comprises selecting one of the first and second logical connections for transmission of the single packet flow to the wireless terminal, depending on the number of the plurality of wireless terminals.

In accordance with an embodiment of the invention, a first plurality of logical connections including the first logical connection correspond to a plurality of unicast connections for transmission to a plurality of wireless terminals including the first wireless terminal, the second logical connection corresponds to a multicast connection for transmission to the plurality of wireless terminals including the first wireless terminal and the at least one traffic parameter corresponds to a number of the plurality of wireless terminals. This method further comprises selecting one of the first and second logical connections for transmission of the single packet flow to the plurality of wireless terminals including the first wireless terminal, depending on the number of the plurality of wireless terminals. This method allows adapting the transmission to the changes in the characteristics of the network elements, allowing a more efficient use of the network resources. Another advantage is that the connection mode can be switched at the beginning or during the transmission of the packet flow, using a dynamic creation of logical connections.

In accordance with an embodiment of the invention, the first logical connection corresponds to a simulcast connection for transmission to a plurality of wireless terminals including the first wireless terminal inside a predefined transmission area, the

second logical connection corresponds to a unicast connection, the at least one traffic parameter corresponds to a first wireless terminal location. This method further comprises selecting the unicast connections for transmission of the single packet flow, if the first wireless terminal location is not inside the predefined transmission area. One of the advantages of the method is that the terminal receives a continuous packet flow independent of its geographical location and using the best adapted connection mode to obtain a good reception quality without wasting network resources.

10 In accordance with an embodiment of the invention, the first logical connection and the second logical connection correspond to unicast connections to the first wireless terminal, the at least one traffic parameter correspond to a packet parameter. This method further comprises selecting on a per packet basis one or more of the unicast connections for transmission of the single packet flow to the first wireless terminal,  
15 depending on the traffic parameter. This embodiment is particularly advantageous as it allows setting two logical connections with different characteristics, sending each packet based on its specific packet parameters and improving the reception quality on the receiver side. This one or more packet parameters could be e.g. a packet priority or the type of packets. According to the inventor, this embodiment is  
20 especially useful during congestion periods of the wireless network.

In accordance with an embodiment of the invention, the wireless transmission is compliant with the WiMAX standard and the logical connection is identified with a connection ID (CID).

25

In another aspect, the invention relates to a wireless terminal that comprises means for establishing a first logical connection from a network element, means for establishing a second logical connection from the network element, means for receiving a packet flow of a first and second logical connection from the network element, and  
30 means for associating data packets received over the at least first and second logical connection with the single packet flow.

In accordance with an embodiment the invention relates to a network element that comprises means for establishing a first logical connection to a first wireless terminal, means for determining at least one traffic parameter, means for establishing at least a second logical connection to the first wireless terminal depending on the traffic parameter, and means for transmitting the single packet flow using at least one of the first and second logical connections to the wireless terminal.

In another aspect the invention relates to a computer program product comprising computer executable instructions, wherein the instructions are adapted to perform the steps of: establishing a first logical connection to a wireless terminal, determining at least one traffic parameter, establishing an at least second logical connection to the wireless terminal depending on the traffic parameter, and transmitting the single packet flow using at least one of the first and second logical connections to the wireless terminal.

In another aspect the invention relates to a computer program product in a wireless terminal comprising computer executable instructions, wherein the instructions are adapted to perform the steps of: establishing first logical connection from a network element, establishing second logical connection from the network element, receiving a packet flow over at least one of the first and second logical connections from the network element, and associating data packets received over at least one of the first and second logical connections with the single packet flow.

## **Brief description of the drawings**

In the following preferred embodiments of the invention are described in greater detail by way of example only making reference to the drawings in which:

Fig. 1 is a block diagram of a wireless transmission method in accordance with a first preferred embodiment of the invention,

Fig. 2 is a flow diagram illustrating a preferred embodiment of a method of the invention,

5 Fig. 3 is a block diagram illustrating a second preferred embodiment of a method of the invention,

Fig. 4 is a block diagram of a further preferred embodiment of a wireless transmission method of the invention,

10 Fig. 5 is a block diagram of a further preferred embodiment of a wireless transmission method of the invention,

Fig. 6 is a block diagram of a further preferred embodiment of a wireless transmission method of the invention.

15

### Detailed description

Fig. 1 shows a block diagram 100 of a wireless communication network 101 that includes a network element 102, a wireless terminal 103, and a single packet flow 20 104. The network element comprises a processor unit 105, a scheduler 106 and a detection unit 107. The processor unit 105 further comprises a first computer program product 108. The detection unit 107 comprises a traffic parameter 109. On the wireless terminal 103 a selector 110 and a processor unit 111 are included. This 25 processor unit 111 further comprises a second computer program product 112.

The network element 102 establishes a first logical connection 113 with the wireless terminal 103 for transmission of the single packet flow 104. Once this first logical connection 113 has been established, the detection unit 107 determines at least one 30 traffic parameter 109. Depending on the result of the traffic parameter 109, a second logical connection 114 may be established and the scheduler 106 will transmit the single packet flow 104 to the wireless terminal 103, using at least one of the first and second logical connections 113, 114. Alternatively, the second logical connection

114 can be established simultaneously with the first logical connection 113 at the beginning of the transmission of the single packet flow 104. The network element 102 may select at least one of the first and second logical connections for transmission of the single packet flow 104 to the wireless terminal 103, depending on the traffic parameters 109. On the wireless terminal 103 side, the selector 110 associates data packets 115 received over the at least first and second logical connections 113, 114 with the single packet flow 104.

One of the advantages of the invention is that, allowing a dynamic connection switch between the at least two connections, the network adapts better to the channel characteristics, the service provided or the required priorities of the transmission, improving the overall network performance and resources usage, as well as the quality of the reception in the wireless terminal. If the wireless communication network 101 uses for example the IEEE 802.16 standard, then the network may identify the logical connections using the Connection ID (CID). All CIDs may be transmitted using frames compliant with IEEE 802.16. The header of the frames contains a DL-MAP informing the wireless terminals of which CIDs are carried in the specific frame. The network element or base station creates several connections (CIDs) sending to the terminal (or mobile station) the 802.16 DSx messages (DSa, DSc and DSd) and informing the mobile terminal to use the same packet classification rule for the CIDs with the same packet flow. The DSa message further informs which CIDs are associated to the mobile station. Once the mobile station receives a frame, it can now learn from the frame header (DL\_MAP) if one (or more) of its associated CIDs are transported in the frame.

25

Fig. 2 shows a flow diagram 200 of the basic steps performed by a method in accordance with the invention. In step 201 a first logical connection 113 between a network element 102 and a wireless terminal 103 is established, then in 202 at least one traffic parameter 109 is determined. In a step 203 depending on the traffic parameter 109 detected on 202, a second logical connection 114 to the wireless terminal 103 is established. Then, in 204 a single packet flow 104 using at least one of the first and second logical connections to the wireless terminal 103 is transmitted.

30



Fig. 3 shows a block diagram of the network element 102 communicating with the wireless terminal 103. The elements in the embodiment shown in fig. 3 that correspond to elements of the embodiment of fig. 1 have been designated by the same reference signals. The first logical connection 113 corresponds to a unicast connection 301 and the second logical connection 114 corresponds to a multicast connection 302, which may transmit the single packet flow 104 to other wireless terminals, apart from wireless terminal 103. If required by an element of the wireless communication network 101, the network element 102 establishes a unicast connection 301 with the wireless terminal 103 for transmission of the single packet flow 104. Then, depending on the traffic parameters 103, it may initiate a multicast connection 302 with the wireless terminal 103 and with other wireless terminals for transmission of the same single packet flow 104. The network element 102 may select between at least the unicast connection 301 and the multicast connection 302 to transmit to the wireless terminal 103, depending on the traffic parameters 109 and using the scheduler 109.

The traffic parameter 109 can be the number of wireless terminals where the single packet flow 104 is transmitted to. If the number of wireless terminals is below a predefined amount, a unicast connection will be established between the network element 102 and each of the wireless terminals, as the unicast delivers an optimum resources usage for the number of users. If the number of wireless terminals is increased to another predefined amount, a multicast connection to the wireless terminals is established as it improves the efficiency of the resources usage. When both logical connections are established between the network element 102 and the wireless terminal 103, both connections are kept active, so if the number of wireless terminals changes, the network element can switch again to transmit the single packet flow 104 using a suitable connection mode.

Fig. 4 shows a block diagram of the communication between the network element 102 and a plurality of wireless terminals 401. The elements in the embodiment shown in fig. 4 that correspond to elements of the embodiment of fig. 1 have been designated by the same reference signals. At least a first unicast connection 404, a second unicast 406 and a third unicast 408 are connected from the network element

102 to the wireless terminals 403, 405 and 407 respectively. A second logical connection is the multicast mode 302, connected to the wireless terminals 403,405,407. The detection unit 107 determines a traffic parameter 109 that may be the number of the plurality of wireless terminals. If the number of wireless terminals reaches a certain amount, a multicast connection to the wireless terminals is established for the transmission of the single packet flow 104. The scheduler 106 switches the connection from the unicast transmission to the multicast connection.

If for example an element of the network requires a connection with a wireless terminal 403 for transmission of the single packet flow 104, the network element 102 establishes a unicast connection 404. Then, the network element may establish a multicast connection 302 with the wireless terminal 403 as an alternative medium of transmission. Alternatively, the network element may wait for the detection unit 107 to detect, for example, at least three wireless terminals to establish the multicast connection 302. The transmission of the single packet flow 104 uses the unicast connection 404. When a request for a connection to a second wireless terminal 405 is completed, a second unicast connection 406 is established. The wireless terminal 405 is informed by the network element 102 about the multicast connection 302. The multicast connection 302 remains active but without transmitting the single packet flow 104. If a third wireless terminal 407 requires the establishment of a connection with the network element 102, then a unicast connection 408 is established and the wireless terminal 408 is informed about the multicast connection 302. When the traffic parameter reaches the predetermined value of, for example, three wireless terminals requesting the single packet flow 104, the detection unit 107 informs the scheduler 106 and it starts transmitting the single packet flow 104 using the multicast connection 302, in order to improve the efficiency of the resources usage within the wireless communication network. Alternatively, the multicast connection 302 may need to be established prior to the transmission of the packet flow 104.

Fig. 5 shows a block diagram of the communication between a plurality of network elements 501 and a plurality of wireless terminals 502 including the first wireless terminal 103. The plurality of network elements 501 is connected to the single packet flow 104 and transmits to a predefined transmission area 503 using a simul-

cast connection 505. The plurality of wireless terminals 502 is located inside the predefined transmission area 503 and a first wireless terminal 103 is outside the predefined area 503. One of the network elements is outside the predefined transmission area 503 and is connected to the first wireless terminal 103 using a unicast connection 504. The elements in the embodiment shown in fig. 5 that correspond to elements of the embodiment of fig. 1 have been designated by the same reference signals.

If the wireless communication network 101 requires a plurality of network elements 501 to transmit the single packet flow 104 to the predefined transmission area 503, the plurality of network elements 501 establishes a simulcast transmission of the single packet flow to the predefined transmission area 503. The plurality of wireless terminals 502 will receive the single packet flow if they are located within the predefined transmission area. If for example the first wireless terminal 103 moves outside the predefined transmission area 503, the communication established with the network elements 501 may be dropped. In this case, a network element can establish a unicast connection 504 to the wireless terminal 103 that is located outside the predefined transmission area 503, while keeping the established logical simulcast connection in case that it returns to the predefined transmission area. The advantage of this aspect of the invention is that the user of a wireless terminal will receive a continuous stream of single packet flow when they are, for example, using a TV channel service.

Fig. 6 shows a block diagram of the communication between a network element 102 and the wireless terminal 103. The elements in the embodiment shown in fig. 6 that correspond to elements of the embodiment of fig. 1 have been designated by the same reference signals. The first logical connection corresponds to a first unicast connection 601 and the second logical connection corresponds to a second unicast connection 602. A first type of packets 603 are sent via the first unicast connection 601 and a second type of packet 604 are sent using the second unicast connection 602. The scheduler 106 decides over what connection 601,602 to send the packet based on the traffic parameter 109. This traffic parameter can be some packet parameter as the packet priority or the packet type. Both types of packets belong to the

same single packet flow. When a connection between the network element 102 and the wireless terminal 103 is initiated, both logical connections are established and used simultaneously for the transmission of the single packet flow 104.

5 If for example the single packet flow represents a video stream as H.264, MPEG-4, MPEG-2, or H.263, these are usually composed of three types of packets: I, P and B. According to the inventor, in order to improve the quality of the reception during congestion periods, it is recommended to transmit the I and B packets over for example the unicast connection 601 with good error protection (e.g. FEC or H-ARQ) and robust modulation (e.g. QPSK 3/4), while the B frames can be transmitted over  
10 the second unicast connection 602 with less robust modulation (e.g. QPSK 3/4) and coding, and with faster data transmission rate. The scheduler 106 will decide, on a per packet basis, which packets should be transmitted over the more secure connection and which packets should be delivered to a less robust but faster transmission. The detection unit 106 that determines the traffic parameter 109 can decide,  
15 based on the parameters of the packet, over which connection it should be sent to. One of the advantages of the embodiment is that the at least two logical connections 601,602 can be established with different transmission characteristics, using different modulation orders, modulation types, error protections or coding schemes,  
20 allowing different speeds and robust transmissions. Therefore, the packets will be sent over the logical connection that is best adapted to packet parameters and the service characteristics.

25

## List of reference numerals

---

100	Block diagram
101	Wireless communication network
102	Network element
103	Wireless terminal
104	Single packet flow
105	Processor unit
106	Scheduler
107	Detection unit
108	First computer program product
109	Traffic parameter
110	Selector
111	Processor unit
112	Second computer program product
113	First logical connection
114	Second logical connection
115	Packets
220	Flow chart
301	Unicast connection
302	Multicast connection
401	Plurality of wireless terminals
402	Plurality of unicast connections
403	First wireless terminal
404	First unicast connection
405	Second wireless terminal
406	Second unicast connection
407	Third wireless terminal
408	Third unicast connection
500	Simulcast/unicast connection
501	Plurality of network elements

- 502 Plurality of wireless terminals
- 503 Predefined transmission area
- 504 Unicast connection
- 505 Simulcast connection
- 600 Unicast/unicast connection
- 601 First unicast connection
- 602 Second unicast connection
- 603 First type of packets
- 604 Second type of packets

## C l a i m s

-----

5

1. A method for wireless transmission of a single packet flow (104) from a network element (102), comprising:
- establishing a first logical connection (113) to a first wireless terminal (103) for transmission of said single packet flow (104),
  - 10 - determining at least one traffic parameter (109),
  - establishing at least a second logical connection (114) to said first wireless terminal (103), depending on said traffic parameter (109), for transmission of said single packet flow (104)
  - 15 transmitting said single packet flow (104) using at least one of said first and second logical connections (113,114) to said wireless terminal (103).

2. The method as in claim 1, wherein the first logical connection (113) is a unicast connection (301), wherein the second logical connection (114) is a multicast connection (302) for transmission to a plurality of wireless terminals (401) including said first wireless terminal (103) and wherein the at least one traffic parameter (103) is a number of said plurality of wireless terminals (401), said method further comprising:
- 20

- selecting one of the first and second logical connections (113,114) for transmission of the single packet flow (104) to said wireless terminal (103), depending on the number of said plurality of wireless terminals (401).
- 25

3. The method as in claim 1, wherein a first plurality of logical connections including said first logical connection (113) are a plurality of unicast connections (402) for transmission to a plurality of wireless terminals (401) including said first wireless terminal (103), wherein a second logical connection (114) is a multicast connection (302) for transmission to said plurality of wireless terminals (401).
- 30

minals (401) including said first wireless terminal (103) and wherein the at least one traffic parameter (109) is a number of said plurality of wireless terminals (401), said method further comprising:

5 selecting one of the first and second logical connections (113,114) for transmission of the single packet flow (104) to said plurality of wireless terminals (401) including said first wireless terminal (103), depending on the number of said plurality of wireless terminals (401).

4. The method as in claim 1, wherein the first logical connection (113) is a simulcast connection (505) for transmission to a plurality of wireless terminals (502) including said first wireless terminal (103) inside a predefined transmission area (503), the second logical connection (114) is a unicast connection (504) and wherein the at least one traffic parameter (109) is a first wireless terminal location, said method further comprising:

15 selecting the unicast connection (504) for transmission of the single packet flow (104), if the first wireless terminal location is not inside said predefined transmission area (503).

5. The method as in claim 1, wherein the first and second logical connections (113,114) are unicast connections (601,602) to said first wireless terminal (103) and wherein the at least one traffic parameter (109) is a packet parameter, said method further comprises:

20 selecting on a per packet basis one or more of the unicast connections (601,602) for transmission of the single packet flow (104) to said first wireless terminal (103), depending on said traffic parameter (109).

6. A method as claimed in claim 1, wherein the wireless transmission network (101) is compliant with the WiMAX standard and the at least first and second logical connections (113,114) are identified with a Connection ID (CID).

30

7. A wireless terminal (103) comprising:

- means for establishing a first logical connection (113) from a network element (102),



- means for establishing a second logical connection (114) from said network element (102),
    - means for receiving a single packet flow (104) over first and second logical connection (113,114) from said network element (102),
    - means for associating data packets (603,604) received over the at least said first and second logical connections (113,114) with said single packet flow.
- 5
- 10 8. A network element comprising (102):
- means for establishing a first logical connection (113) to a first wireless terminal (103),
  - means for determining at least one traffic parameter (109),
  - means for establishing at least a second logical connection (114) to said first wireless terminal (103), depending on said traffic parameter (109),
  - means for transmitting said single packet flow (104) using at least one of said first and second logical connections (113,114) to said wireless terminal (103).
- 15
- 20
9. A computer program product (108) comprising computer executable instruction, said instructions being adapted to perform the steps:
- establishing a first logical connection (113) to a wireless terminal (103),
    - determining at least one traffic parameter (109),
  - establishing an at least second logical connection (114) to said wireless terminal (103), depending on said traffic parameter (109),
  - transmitting said single packet flow (104) using at least one of said first and second logical connections (113,114) to said wireless terminal (103).
- 25
- 30

10. A computer program product (112) in a wireless terminal (103) comprising computer executable instruction, said instructions being adapted to perform the steps:
- 5 - establishing first logical connection (113) from a network element (102),
  - establishing second logical connection (114) from said network element (102),
  - receiving a single packet flow (104) over at least one of said first and second logical connections (113,114) from said network element (102),
  - 10 - associating data packets (115) received over at least one of said first and second logical connections (113,114) with said single packet flow (104).


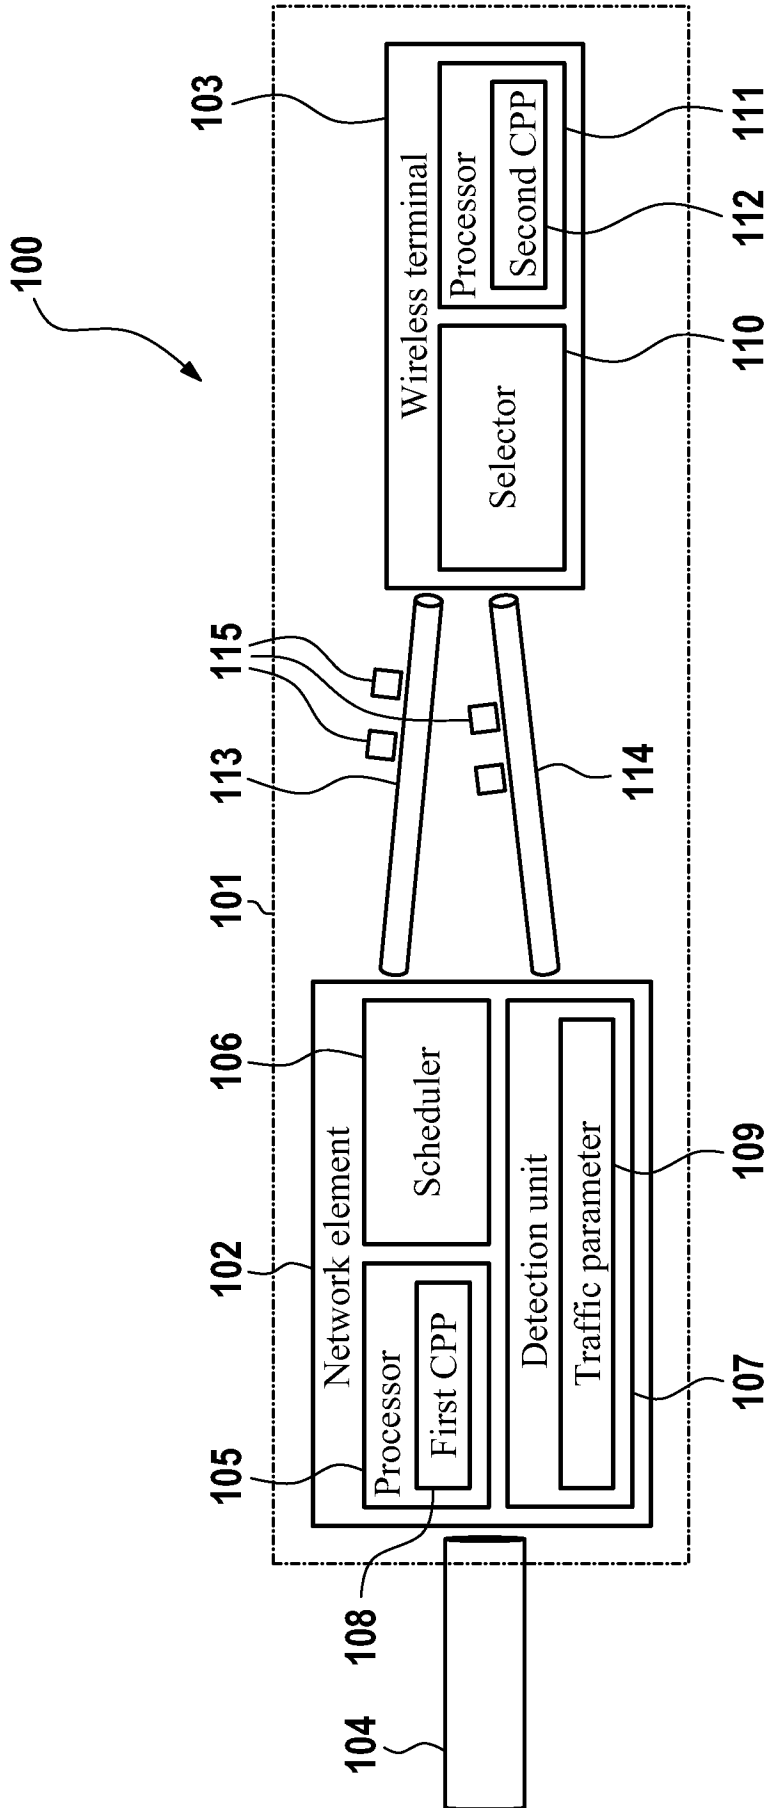


Fig. 1

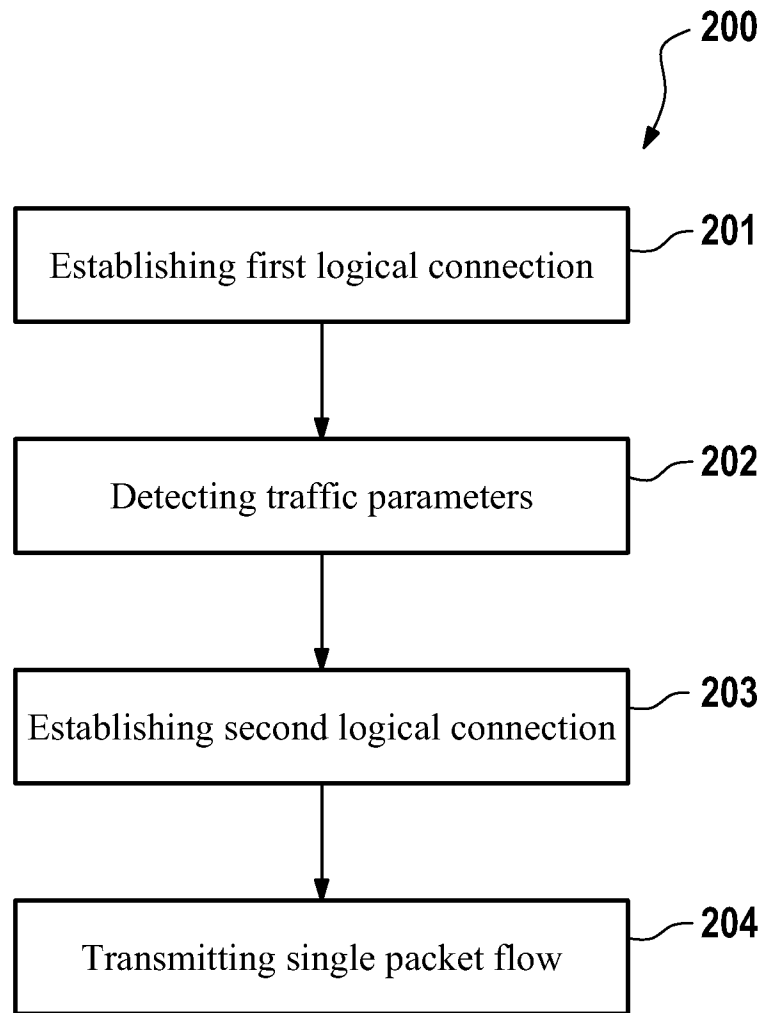

**Fig. 2**

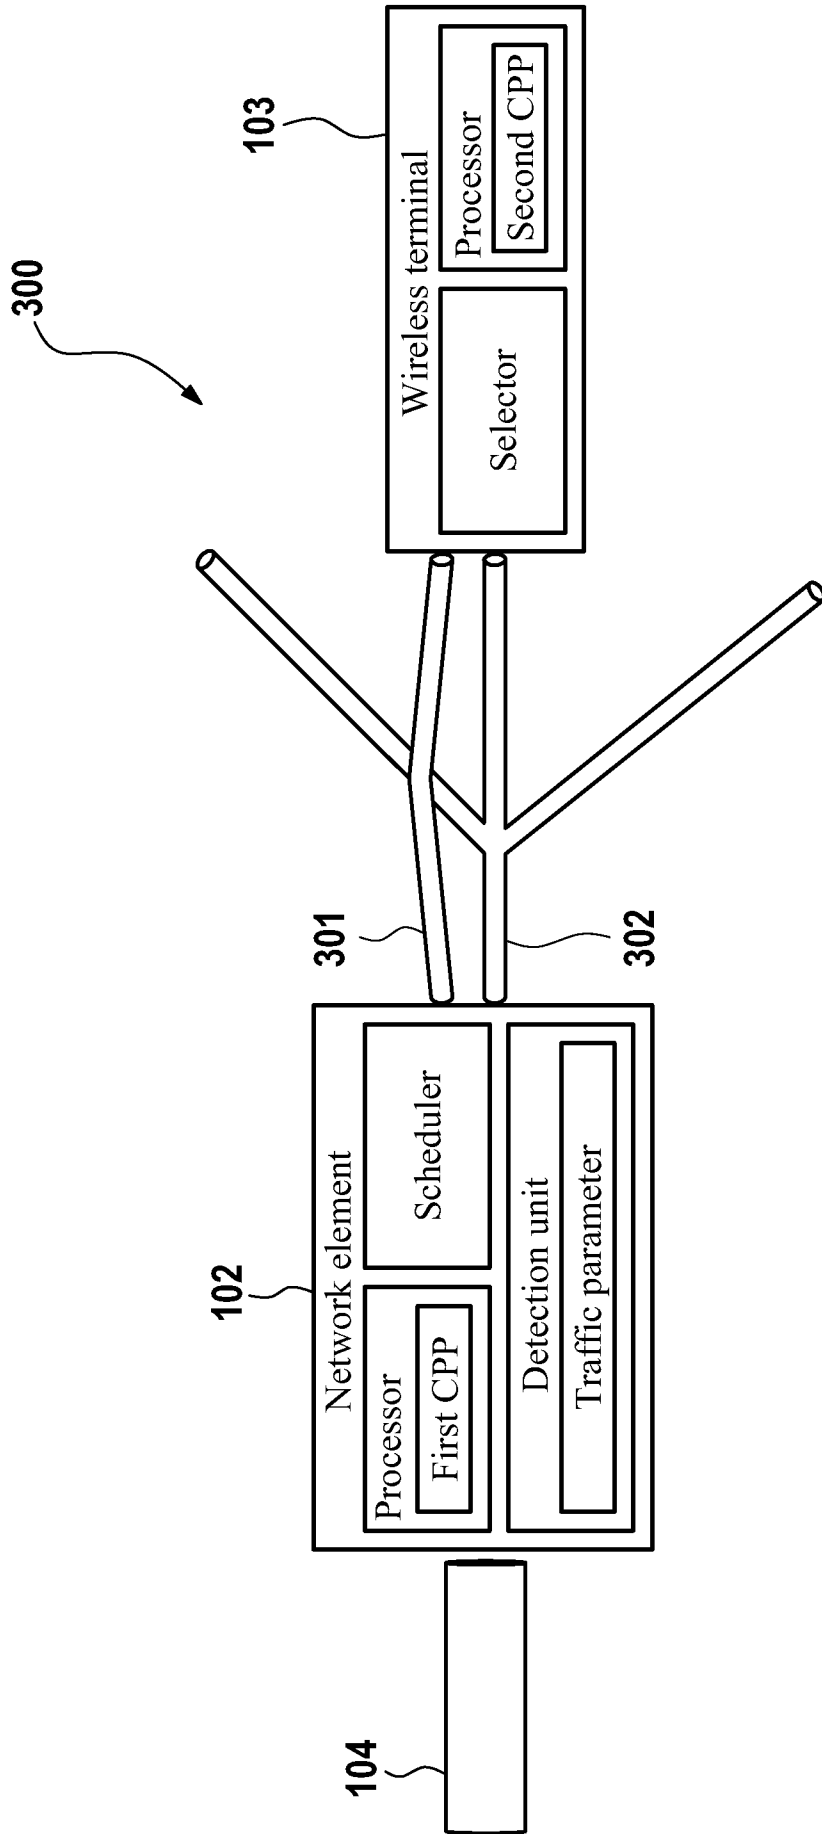


Fig. 3

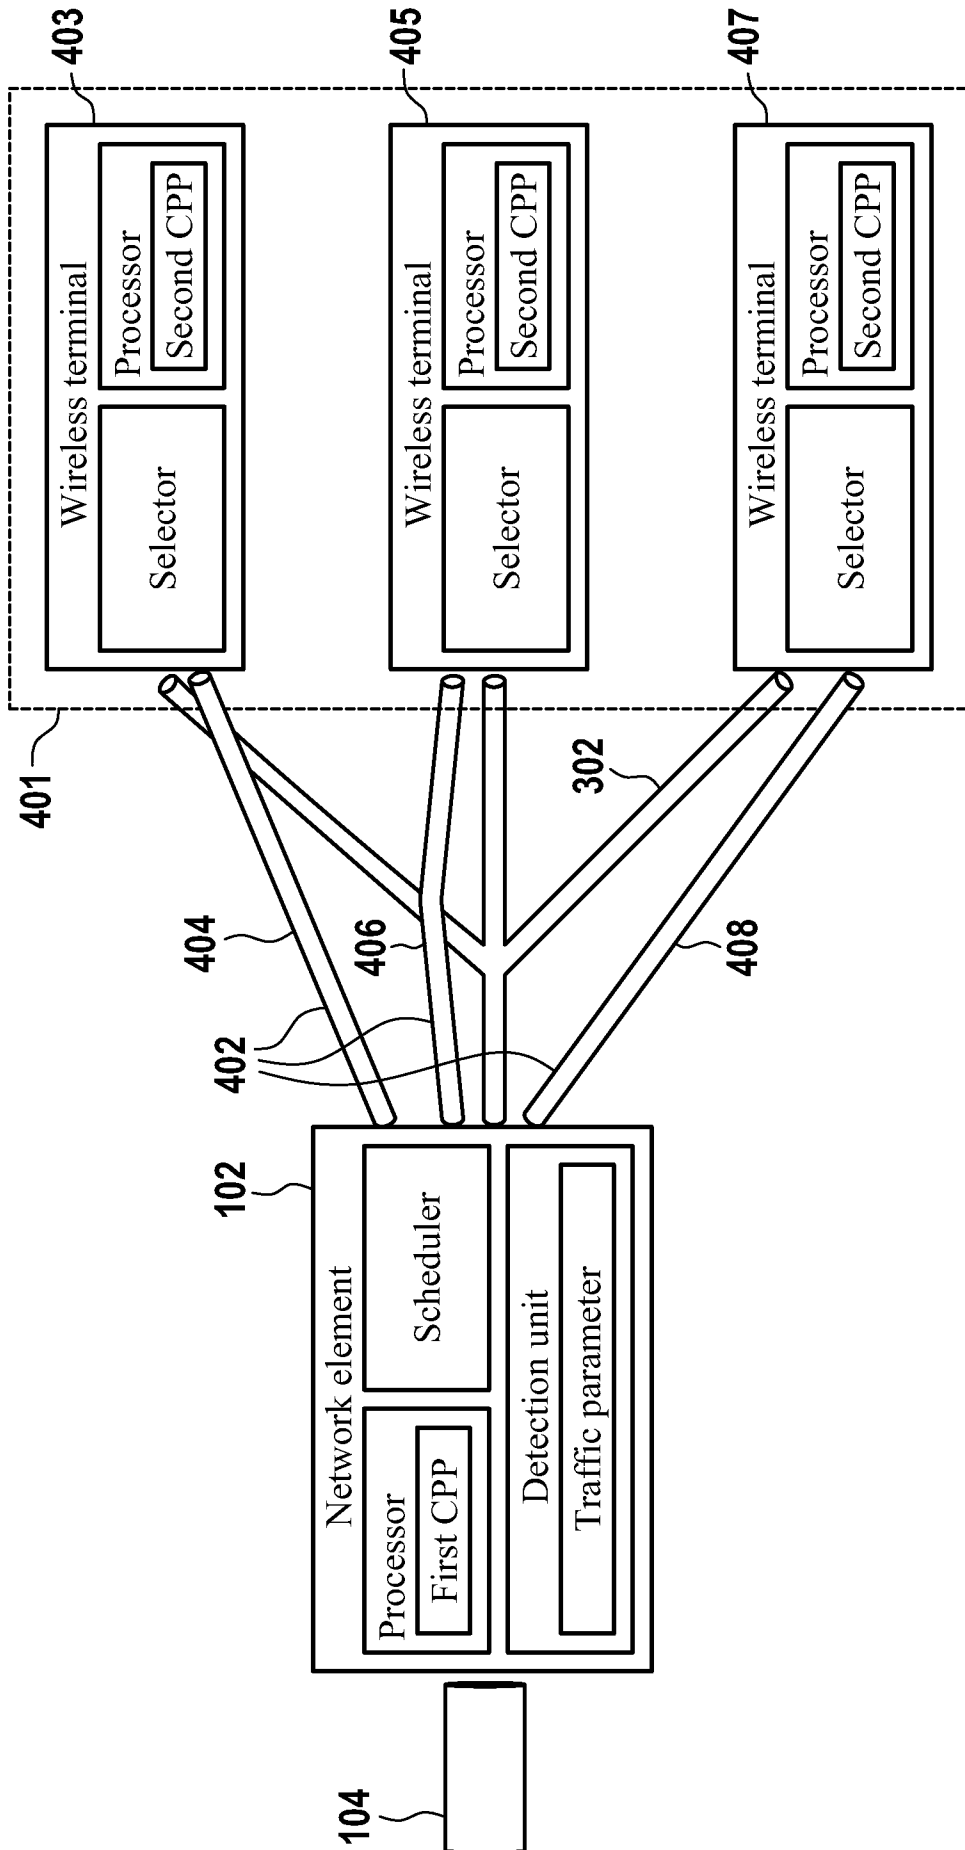


Fig. 4

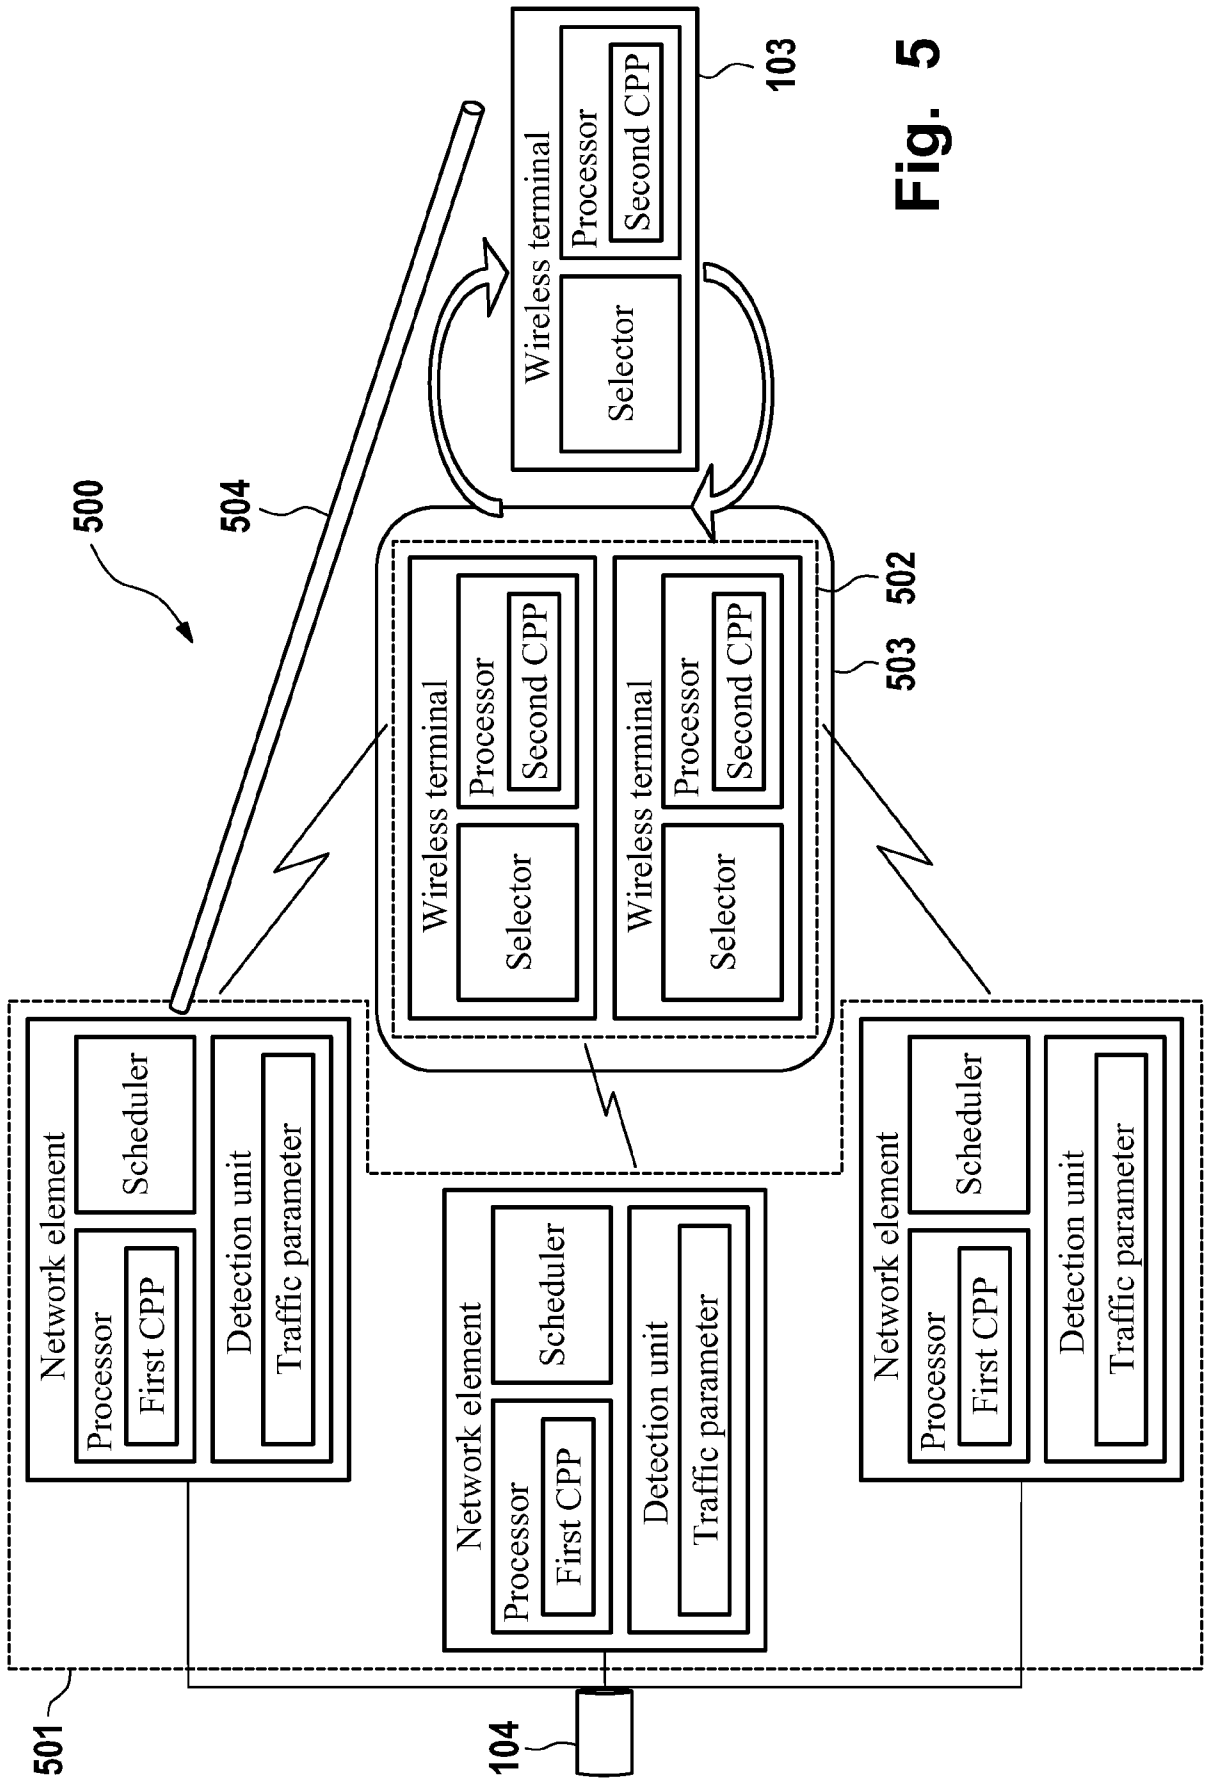


Fig. 5

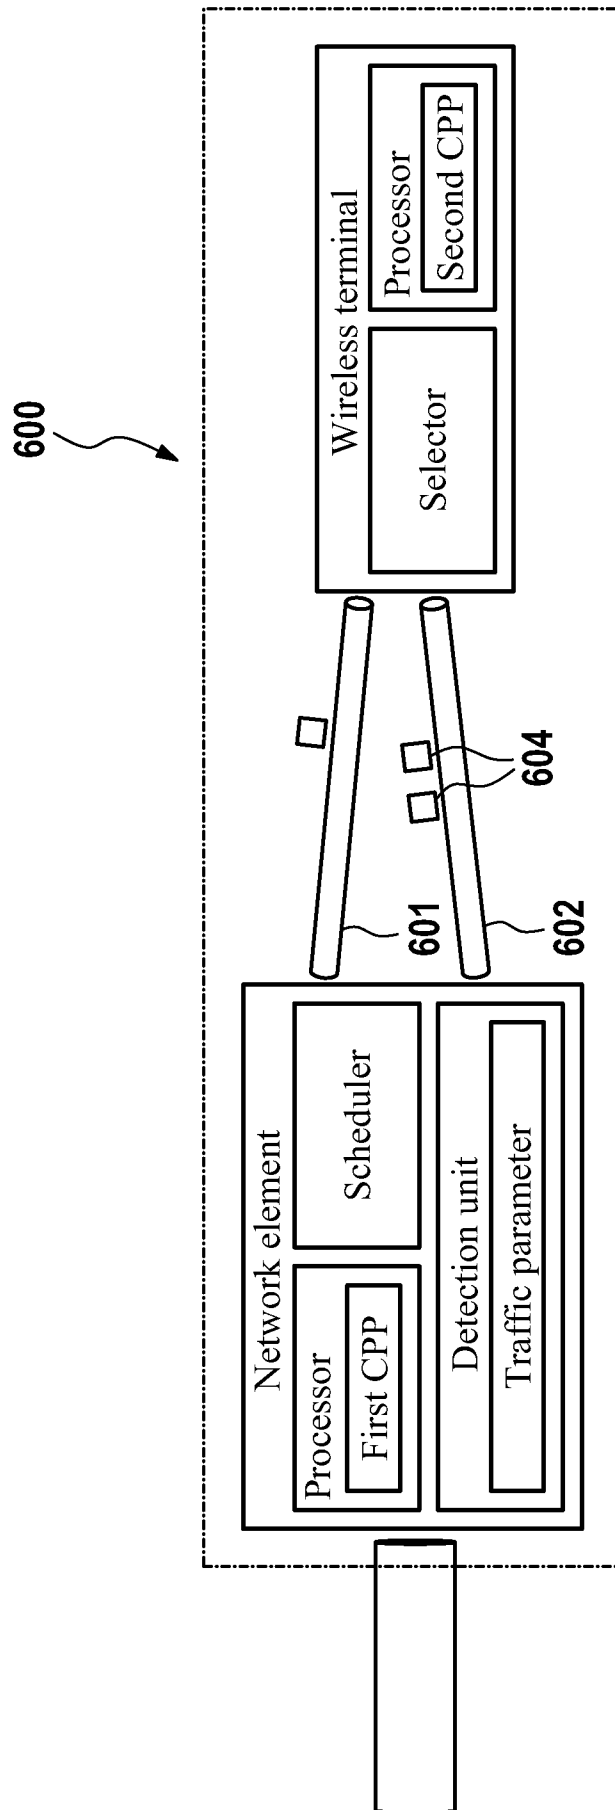


Fig. 6



**INTERNATIONAL SEARCH REPORT**

International application No  
**PCT/EP2008/059450**

**A. CLASSIFICATION OF SUBJECT MATTER**  
INV. H04L12/56 H04B7/02

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
H04L H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	WO 2005/062636 A (ERICSSON TELEFON AB L M [SE]; RUNE JOHAN [SE]; WESTBERG LARS [SE]) 7 July 2005 (2005-07-07) abstract page 1, line 6 - page 6, line 24 page 7, line 17 - page 13, line 3 figures 1-6	1,6-10  2-5
X A	WO 03/049482 A (NOKIA CORP [FI]; NIEMELAE KARI [FI]; PAJUKOSKI KARI [FI]) 12 June 2003 (2003-06-12) abstract page 1, line 3 - page 9, line 7 figures 1,2	1,6-10  2-5
	----- -/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

**29 January 2009**

Date of mailing of the international search report

**09/02/2009**

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040.  
Fax: (+31-70) 340-3016

Authorized officer

**Mariggis, Athanasios**

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/EP2008/059450

## C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 2006/025148 A1 (KARAOGUZ JEYHAN [US] ET AL) 2 February 2006 (2006-02-02) abstract paragraphs [0006] - [0011], [0020] - [0053] figures 1-5 -----	1,5-10  2-4
X A	WO 2006/028409 A (ERICSSON TELEFON AB L M [SE]; MAGNUSSON PER [SE]; PRYTZ MIKAEL [SE]; S) 16 March 2006 (2006-03-16) abstract page 1, line 9 - page 8, line 30 page 9, line 17 - page 10, line 3 figures 1,2 -----	1,5-10  2-4
A	EP 1 296 530 A (MOTOROLA INC [US]) 26 March 2003 (2003-03-26) abstract paragraphs [0013] - [0022] figures 1-3 -----	1-10

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/EP2008/059450

## Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1.  Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2.  Claims Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
  
3.  Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1.  As all required additional search fees were timely paid by the applicant, this international search report covers allsearchable claims.
2.  As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
3.  As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4.  No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

### Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.

**FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210**

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-3,6-10

A method and corresponding apparatuses for establishing simultaneous connections for a single packet flow between a wireless transmitter and at least one wireless receiver inside a predefined transmission area.

---

2. claim: 4

A method for establishing simulcast connections for a single packet flow between wireless transmitters and at least one wireless receiver inside a predefined transmission area and a unicast connection, if the wireless receiver moves outside the predefined transmission area.

---

3. claim: 5

A method for establishing simultaneous unicast connections for a single packet flow between wireless transmitters and at least one wireless receiver, whereby the single packet flow is split into sub-flows and transmitted in parallel via the different simultaneous unicast connections.

---

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2008/059450

Patent document cited in search report	A	Publication date		Patent family member(s)	Publication date
WO 2005062636	A	07-07-2005		AU 2003288877 A1	14-07-2005
				CN 1886997 A	27-12-2006
				EP 1698190 A1	06-09-2006
				JP 2007521707 T	02-08-2007
				US 2007086457 A1	19-04-2007
<hr/>					
WO 03049482	A	12-06-2003		AT 400154 T	15-07-2008
				AU 2002223706 A1	17-06-2003
				EP 1444853 A1	11-08-2004
				US 2004209618 A1	21-10-2004
<hr/>					
US 2006025148	A1	02-02-2006		NONE	
<hr/>					
WO 2006028409	A	16-03-2006		CN 101015174 A	08-08-2007
				EP 1787437 A1	23-05-2007
				US 2008031188 A1	07-02-2008
<hr/>					
EP 1296530	A	26-03-2003		CN 1411157 A	16-04-2003
				US 2003060221 A1	27-03-2003
<hr/>					