

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 March 2006 (02.03.2006)

PCT

(10) International Publication Number
WO 2006/022469 A1

(51) International Patent Classification⁷: **H04B 7/26**

& Marine, Insurance Building 43, Taepyeongno 2-ga, Jung-gu, Seoul, 100-733 (KR).

(21) International Application Number:
PCT/KR2005/000447

(22) International Filing Date:
17 February 2005 (17.02.2005)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:
10-2004-0067107 25 August 2004 (25.08.2004) KR

(71) Applicants (for all designated States except US): **Electronics and Telecommunications Research Institute** [KR/KR]; 161, Gajeong-dong, Yuseong-gu, Daejeon, 305-350 (KR). **SAMSUNG ELECTRONICS CO., LTD.** [KR/KR]; 416, Maetan-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do, 442-742 (KR). **KT Corporation** [KR/KR]; 206, Jungja-dong, Bundang-gu, Seongnam-city, Gyeonggi-do, 463-711 (KR). **SK Telecom Co., Ltd.** [KR/KR]; 99, Seorin-dong, Jongro-gu, Seoul, 110-110 (KR). **KTFREETEL CO., LTD.** [KR/KR]; 890-20, Daechi-dong, Gangnam-gu, Seoul, 135-280 (KR). **HANARO TELECOM, INC.** [KR/KR]; Shindongah Fire

(72) Inventors; and


(75) Inventors/Applicants (for US only): **YUN, Mi-Young** [KR/KR]; Sindonga Apt. 1-702, Ojeong-dong, Daedeok-gu, Daejeon-city, 306-010 (KR). **MOON, Jung-Mo** [KR/KR]; 232-14, Neung-dong, Gwangjin-gu, Seoul 143-847 (KR). **YOON, Chul-Sik** [KR/KR]; Seonkyeong Apt. 4-402, 255-1, Hagye-dong, Nowon-gu, Seoul 139-230 (KR). **KIM, Yeong-Jin** [KR/KR]; Nuri Apt. 107-1401, Wolpyeong-dong, Seo-gu, Daejeon-city 302-280 (KR).

(74) Agent: **YOU ME PATENT AND LAW FIRM**; Seolim Bldg., 649-10, Yoksam-dong, Kangnam-ku, Seoul 135-080 (KR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,

[Continued on next page]

(54) Title: METHOD FOR SECURITY ASSOCIATION NEGOTIATION WITH EXTENSIBLE AUTHENTICATION PROTOCOL IN WIRELESS PORTABLE INTERNET SYSTEM

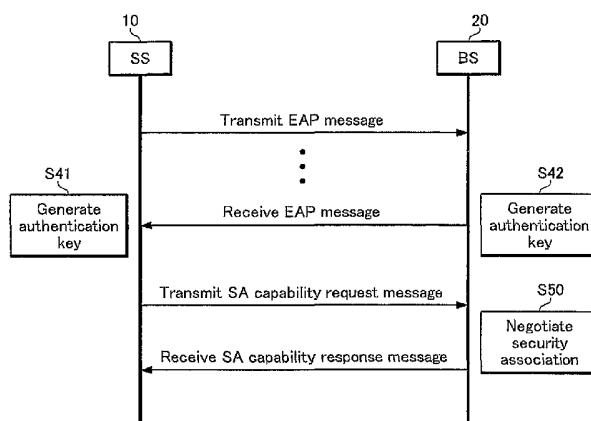

(57) Abstract: The present invention relates to a security association negotiation method of extensible authentication protocol (EAP) for authenticating a subscriber station user in a wireless portable Internet system. An exemplary security association negotiation method using a user authentication in a wireless portable Internet system according to an embodiment of the present invention includes following steps. A base station generates an authentication key for authenticating a user of a subscriber station. The base station receives a security association capability request message including security association capability information of the subscriber station from the subscriber station after generating the authentication key. The base station determines whether the base station is able to accept a security association capability of the subscriber station included in the security association capability request message. The base station transmits a security association capability response message including the security association capability information which is selected for a security association with the subscriber station by the base station when the security association capability of the subscriber station can be accepted. According to the present invention, a subscriber authentication for EAP may be efficiently performed without an additional message after a handover.

WO 2006/022469 A1



TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

TITLE OF THE INVENTION**METHOD FOR SECURITY ASSOCIATION NEGOTIATION WITH
EXTENSIBLE AUTHENTICATION PROTOCOL IN WIRELESS PORTABLE
INTERNET SYSTEM**

5

BACKGROUND OF THE INVENTION**(a) Field of the Invention**

The present invention relates to a security association negotiation method of extensible authentication protocol (EAP) for authenticating a subscriber station user in a wireless portable Internet system. More particularly, the present invention relates to a security association negotiation method for generating an authentication key without an additional message exchange in an authentication scheme using EAP in a wireless portable Internet system.

15

(b) Description of the Related Art

As the next-generation communication technology, wireless portable Internet further provides mobility to a local data communication system such as a conventional wireless local area network (LAN) using a stationary access point (AP). There are various standard protocols that have been developed for supporting the wireless portable Internet, and the IEEE 802.16 working group attempts to establish an international standard of the wireless portable Internet protocol.

The authentication and authorization standard defined by the IEEE 802.16 establishes authentication functions for stations in a wide area network configured with wireless networks. In particular, since the subscriber station (SS) authentication function standardized by a privacy layer
5 of the IEEE 802.16 is defined only for SSs within a fixed network, it is inappropriate for the authentication function to apply SSs or subscribers to be capable of supporting mobility, which is a current trend of mobile services. That is, in the wireless portable Internet system, the subscriber station has mobility, so it moves from a base station to another base station, and when a
10 handover occurs, authentication key generation and security association negotiation need to be performed with a new base station.

As methods for authenticating a mobile terminal or a user, a PKM- (public key management) RSA method which utilizes a certificate of the mobile terminal and a PKM-EAP method for authenticating a mobile
15 subscriber are defined. As such authentication methods, the PKMv1 protocol may be exemplified. According to the PKMv1 protocol, a terminal is authenticated by using a certificate of a mobile terminal in the IEEE 802.16 standard, and an authentication key (AK) and a traffic encryption key (TEK) are generated.

20 In addition, a newly defined PKMv2 protocol provides more various authentication methods than does the PKMv1 protocol. When classifying with reference to an authentication subject, the PKM-RSA method for authenticating a mobile terminal, the PKM-EAP method for authenticating a

mobile subscriber, and PKM-RSA with EAP for authenticating both a mobile terminal and a mobile subscriber may be exemplified. According to the basic design concept of the PKMv2 protocol, the authentication key is generated by using a master key (MK) which may be obtained after authentication of a
5 mobile terminal or a user.

However, according to the prior art, in the subscriber authentication methods such as EAP, the authentication key is generated after authenticating a mobile subscriber and exchanging the master key (MK) and random numbers of the base station and the subscriber station. In other
10 words, it does not follow the basic design concept of the PKMv2 protocol. Therefore, when a handover of the subscriber station occurs, an additional message exchange is necessary, and the exchange of the random numbers through an authentication message is necessary for generating the authentication key for a new base station.

15 These problems of the prior art cause mobility of the subscriber station in the wireless portable Internet system to be reduced, and delay the data transmission.

The above information disclosed in this Background section is only for enhancement of understanding of the background of the invention and
20 therefore it may contain information that does not form the prior art that is already known in this country to a person of ordinary skill in the art.

SUMMARY OF THE INVENTION

The present invention has been made in an effort to provide a security

association negotiation method having the advantage of corresponding to a basic design concept of the PKMv2 protocol.

An exemplary security association negotiation method using a user authentication in a wireless portable Internet system according to an embodiment of the present invention includes the following steps. A base station generates an authentication key for authenticating a user of a subscriber station. The base station receives a security association capability request message including security association capability information of the subscriber station from the subscriber station after generating the authentication key. The base station determines whether the base station is able to accept a security association capability of the subscriber station included in the security association capability request message. The base station transmits a security association capability response message including the security association capability information which is selected for a security association with the subscriber station by the base station when the security association capability of the subscriber station can be accepted.

An exemplary security association negotiation method using a user authentication in a wireless portable Internet system according to another embodiment of the present invention includes the following steps. A first base station generates a second authentication key by transmitting a master key, which is to be a seed of a first authentication key of a subscriber station which hands over to a second base station, to the second base station. The

first base station provides a first security association descriptor including security association capability information, which is previously negotiated with the subscriber station, to the second base station. The subscriber station exchanges a register request message (REG-REQ) and a register response
5 message (REG-RSP) with the second base station. A second security association descriptor generated based on the first security association descriptor is provided by using the register response message to the subscriber station, and it is determined whether a security association capability is fulfilled. A security association identifier included in the second
10 security association descriptor is admitted and a security association is renewed when the security association capability is fulfilled.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic diagram illustrating a configuration of wireless
15 portable Internet according to an exemplary embodiment of the present invention.

FIG. 2 shows a layer structure of the wireless portable Internet system shown in FIG. 1.

FIG. 3 is a schematic diagram illustrating a connection between a
20 subscriber station and a base station in the wireless portable Internet system shown in FIG. 1.

FIG. 4 is a flowchart showing an authentication key generating process using EAP according to an exemplary embodiment of the present invention.

FIG. 5 shows a message flow illustrating an authentication process according to an exemplary embodiment of the present invention.

FIG. 6 to FIG. 8 show message configurations for security association negotiation according to an exemplary embodiment of the present invention.

5 FIG. 9 illustrates a method for performing EAP authentication and security association negotiation after a handover according to an exemplary embodiment of the present invention.

FIG. 10 is a flowchart showing a security association negotiation method according to an exemplary embodiment of the present invention.

10 FIG. 11 is a flowchart showing a method for performing a security association negotiation when a handover occurs, according to an exemplary embodiment of the present invention.

DETAILED DESCRIPTION OF THE EMBODIMENTS

15 An embodiment of the present invention will hereinafter be described in detail with reference to the accompanying drawings.

In the following detailed description, only certain exemplary embodiments of the present invention have been shown and described, simply by way of illustration. As those skilled in the art would realize, the described embodiments may be modified in various different ways, all without
20 departing from the spirit or scope of the present invention.

Accordingly, the drawings and description are to be regarded as illustrative in nature and not restrictive. Like reference numerals designate

like elements throughout the specification. (Phrases such as “one thing coupled to another” can refer to either directly coupling a first one to a second one or coupling the first one to the second one with a third one provided therebetween.)

5 Hereinafter, a security association negotiation method according to an exemplary embodiment of the present invention will be described in detail while referring to drawings.

FIG. 1 is a schematic diagram illustrating a configuration of wireless portable Internet according to an exemplary embodiment of the present
10 invention.

As shown in FIG. 1, the wireless portable Internet system includes a subscriber station 10 (SS), base stations 20 and 21 (BS) performing a wireless communication with the subscriber station 10, routers 30 and 31 connected with the base stations 20 and 21 through a gateway, and an AAA
15 server (AAA: authentication, authorization, and accounting) 40 connected to the routers 30 and 31 for performing an authentication for the subscriber station 20 and 21.

A conventional wireless LAN such as IEEE 802.11 provides a data communication scheme in which only near distance wireless communication
20 using a stationary access point is possible. Therefore, this does not support the mobility of the subscriber station, and merely support a wireless local data communication.

Meanwhile, the wireless portable Internet system being developed by

the IEEE 802.16 group supports the mobility even when the subscriber station 10 shown in FIG. 1 moves from a cell controlled by the base station 20 to a cell controlled by the base station 21, so that it can provide the data communication service.

5 The IEEE 802.16 is a standard for supporting metropolitan area network (MAN). In other words, it supports a middle size network between local area information communication network (LAN) and wide area communication network (WAN).

 Therefore, the wireless portable Internet system supports a handover
10 of the subscriber station 10 like a mobile communication service, and performs a dynamic IP address allocation according to movement of the subscriber station.

 Here, the subscriber station 10 and the base stations 20 and 21 of the wireless portable Internet performs a communication in the orthogonal
15 frequency division multiplexing access (OFDMA) scheme. The OFDMA scheme is a multiplexing scheme that combines the frequency division multiplexing scheme using a plurality of orthogonal frequency sub-carriers as a plurality of sub-channels, and the time division multiplexing (TDM) scheme. The OFDMA scheme is robust against fading occurring in a multi-path, and
20 shows a good data transmission rate.

 When starting a communication, the subscriber station 10 and the base stations 20 and 21 negotiate an authentication mode for an authentication of the subscriber station 10, and perform an authentication

process according to the negotiated authentication mode. That is, the subscriber station 10 and the base stations 20 and 21 select the authentication mode from an authentication mode based on a digital certificate according to the conventional IEEE 802.16 privacy standard and
5 another authentication mode based on standardized authentication protocol of a higher layer, and according to the selected authentication mode, performs the authentication process for the subscriber station 10.

Here, the standardized authentication protocol of the higher layer may be one of EAP-TLS (Transport Layer Security) which is an EAP framework, or
10 EAP-TTLS (Tunneled TLS).

When the authentication mode based on the standardized authentication protocol of the higher layer is selected as a result of the negotiation between the subscriber station 10 and the base stations 20 and 21, the subscriber station 10 and base station 20 are ready for an
15 authentication process based on the standardized authentication protocol of the higher layer. The subscriber station 10 generates a message for the authentication and transmits it to the base station 20, and the base station 20 performs the authentication for the subscriber station 10 through an interaction with the AAA server 40.

20 FIG. 2 is a layer diagram showing a layer structure of the wireless portable Internet system shown in FIG. 1.

As shown in FIG. 2, the layer structure of the wireless portable Internet system according to IEEE 802.16 includes a physical layer L10 and media

access control (MAC) layers L21, L22, and L23.

The physical layer L10 provides wireless communication functions performed by a typical physical layer such as modulation/demodulation and coding.

5 Contrarily to the wire Internet system having fractionated layers according to various functions thereof, the wireless portable Internet system has one MAC layer for providing various functions.

The MAC layer includes a privacy sub-layer L21, a MAC common part sub-layer L22, and a service specific convergence sub-layer L23.

10 The privacy sub-layer L21 performs equipment authentication, security key exchange, encryption, etc. The privacy sub-layer L21 performs the authentication only for equipment, and a user authentication such as the EAP is performed by a higher layer of MAC (not shown).

The MAC common part sub-layer L22 is a core part of the MAC layer,
15 and it performs system access, bandwidth allocation, traffic connection set up and maintenance, QoS management, etc.

The service specific convergence sub-layer L23 performs payload header suppression, QoS mapping, etc., in continuous data communication.

FIG. 3 shows a connection configuration between the subscriber
20 station 10 and the base station 20 and 21 of the wireless portable Internet system shown in FIG. 1.

As shown in FIG. 3, there exists a traffic connection C1 between the MAC layer of the subscriber station 10 and the MAC layer of the base stations

20 and 21.

Here, the term "traffic connection C1" does not mean a physical connection but rather a logical connection, and is defined as a mapping relationship which is formed between peers of the equivalent MAC layers in
5 order to transmit traffic for a service flow.

Therefore, a parameter or a message defined on the traffic connection C1 are functions performed between the equivalent MAC layers. Actually, the parameter and the message are processed to be a frame, and are transmitted through the physical layer. Then, the frame is analyzed, and the
10 functions corresponding to the parameter or the message are performed in the MAC layer.

In addition, a MAC message includes various messages such as a request for some operation (REQ), a response (RSP), and an acknowledgement (ACK).

15 FIG. 4 is a flowchart showing a process for generating an authentication key using EAP according to an exemplary embodiment of the present invention.

When the subscriber station 10 is trying to connect with the base station, an authentication process between the AAA server 40 and the
20 subscriber station 10 is performed, and then an AAA key is generated in step S10. That is, the subscriber station transmits an EAP transmission request message which is a high authentication protocol to the base station, and the authentication server distributes the AAA key which is generated by

performing authentication and authority verification to the base station and the subscriber station. After that, the AAA is used as a seed of an authentication key (AK).

When the AAA key is generated, a master key MK is generated from
5 the AAA key. The master key MK may be generated by using 160 bits of the most significant bit (MSB) of the AAA key in step S20.

When the master key MK is generated, a pre-master key PMK is generated by using an identifier of the subscriber station and an identifier of the base station in step S30.

10 When the pre-master key PMK is generated, the authentication key AK for the EAP authentication is generated in the subscriber station and the base station. The authentication key is distributed to the subscriber station and the base station. In the exemplary embodiment of the present invention, only the authentication using the EAP is described, but the authentication key
15 may also have a field for an RSA authentication. According to an exemplary embodiment of the present invention, the field for the RSA authentication is given to be NULL.

According to the exemplary embodiment shown in FIG. 4, the negotiation process and the authentication process for the security
20 association (SA) are not operated together but are operated separately.

FIG. 5 shows a message flow illustrating the authentication process according to an exemplary embodiment of the present invention.

The generation of the authentication key shown in FIG. 4 is performed

by transmitting/receiving a plurality of EAP-transmission messages between the subscriber station 10 and the base station 20. An EAP message, which the subscriber station 10 requests to the base station 20, includes packet data supported by the subscriber station which requests the authentication, an
5 identifier for an encryption/authentication algorithm, a basic CID for the subscriber station, and an EAP payload which is authentication data for the user authentication. Another EAP message, that the base station 20 receiving the AAA key from the AAA server 40 (not shown in FIG. 5) transmits, includes the encryption algorithm co-owned with the subscriber station,
10 notification of success or failure of the authentication, valid time for the authentication key, and the EAP payload for the user authentication.

The EAP message request and response process may be performed several times until the authentication key is generated. When the authentication for the subscriber is successfully performed after the exchange
15 of the EAP messages, notification of success in the authentication for the EAP-transmission message is lastly transmitted to the subscriber station 10, and authentication keys AK of the subscriber station 10 and the base station 20 are generated in step S41 and S42.

According to an exemplary embodiment of the present invention, the
20 security association negotiating process is performed separately from the authentication key generating process in step S50. For the security association negotiation, in an exemplary embodiment of the present invention, a security association capability request message and a security association

capability response message are newly defined.

The subscriber station 10 transmits the security association (SA) capability request message including an HMAC tuple TLV generated by using the authentication key (AK). The base station 20 inspects suitability of the HMAC tuple, and transmits the security association capability response message to the mobile subscriber station. When the base station cannot accept the security association capability request which is requested by the mobile subscriber station, the base station 20 transmits a security association capability deny message to the mobile subscriber station.

Through the security association negotiation process, a security association capability corresponding to an intersection of the security association capabilities of the subscriber station 10 and the base station 20 is selected.

FIG. 6 to FIG. 8 show configurations of messages for the security association negotiation according to an exemplary embodiment of the present invention.

FIG. 6 shows a configuration of the security association capability request message according to an exemplary embodiment of the present invention.

After the EAP authentication, the subscriber station transmits the security association capability request message as shown in FIG. 6 to the base station. The security association capability request message includes security capability, primary security association identifier (SAID), and

characteristics of the HMAC tuple.

In the message shown in FIG. 6, the security capability is information about all capabilities of the security and encryption owned by the subscriber station. The primary SAID is an identifier for the security association (SA) of the subscriber station. It includes a basic CID.

HMAC tuple is generated by using the authentication key (AK). When performing an initial authentication, a key sequence number in the HMAC tuple is generated by using a hash function. Here, the authentication key (AK) is used as an input value for the hash function.

FIG. 7 shows a configuration of the security association capability response message according to an exemplary embodiment of the present invention.

The security association capability response message is a response for the security association capability request message. It is transmitted when the base station can accept the request of the subscriber station. The security association capability response message includes the key sequence number, a security association descriptor (SA descriptor), and characteristics of the HMAC tuple.

The key sequence number is information about a sequence number of the authentication key (AK). This may be generated by adding 1 to a previous key sequence number by the base station. The security association descriptor is a complex descriptor. It defines a security association identifier (SAID) and additional characteristics of the security

association. Here, the security association identifier (SAID) is an identifier for a cipher suit which is selected for a basic security association of the subscriber station. The security association descriptor includes information about a data encryption algorithm corresponding to the SAID, a message
5 authentication scheme, and a traffic key encryption scheme.

For example, for a SAID 1, it may be described that a DES algorithm is used for the data encryption algorithm, HMAC is used for the message authentication, and a 3DES algorithm is used for the traffic key encryption.

The HMAC tuple is generated by using the authentication key (AK).
10 When performing the initial authentication, a key sequence number in the HMAC tuple is generated by putting the authentication key (AK) as an input value for the hash function.

FIG. 8 shows the security association capability request deny message according to an exemplary embodiment of the present invention.

15 The security association capability request deny message includes an error code for identifying a denial reason for the security association capability request message, and the HMAC tuple is generated by using the authentication key.

According to an exemplary embodiment of the present invention, a
20 security association negotiation may be provided through the security association capability request message and the security association capability response message after generating the authentication key.

FIG. 9 is showing an EAP authentication and security association

negotiation method after a handover according to an exemplary embodiment of the present invention.

When a handover occurs in the subscriber station 10 from the base station 20 to the base station 21, the base station 21, which is a target base station, receives the master key from the base station 20 in order to generate the authentication key, and performs an authentication with the subscriber station 10. The base station 21, which has received the master key, generates the pre-master key (PMK) and the authentication key (AK) by using its own base station identifier.

10 In addition, a ranging process is performed for an initial timing synchronization. In order to register the subscriber station after the ranging process, a register request message (REG-REQ) and a register response message (REG-RSP), which are MAC messages, are exchanged.

It is determined when the security association capability is fulfilled with reference to the security association identifier (ID) included in the security association descriptor information received from the base station 20. When the subscriber station 10 selects the security association identifier which is one of the previously negotiated security association capabilities, the EAP authentication and security association of the subscriber station may be performed without an additional message.

When the security association negotiation of the base station 21 which is the target base station is newly needed, the subscriber station may transmit a security association capability adding message for the additional security

association negotiation. The security association capability adding message may be provided in substantially the same scheme as the security association capability request message.

Therefore, according to the exemplary embodiment of the present invention, after the handover, the efficient EAP authentication and security association negotiation which corresponds to the PKMv2 design concept can be provided without additional message exchanges between the base station and the subscriber station, such as the random number exchange.

FIG. 10 is a flowchart showing a security association negotiation method according to an exemplary embodiment of the present invention.

When the subscriber station tries an initial access with the base station, the subscriber station performs the authentication process with the AAA server, and the AAA key is randomly generated in step S100. The AAA key is distributed to the base station and the subscriber station, and is utilized as a seed of the authentication key.

The base station and the subscriber station generate the master key (MK) and the pre-master key (PMK) from the AAA key in step S110. In order to reduce size, the master key (MK) is generated by using a part of the AAA. The pre-master key (PMK) may be generated by using the master key, the subscriber station, and the base station.

When the pre-master key is generated, the base station and the subscriber station respectively generate the authentication key (AK) in step S120. Through the described process, the subscriber station and the base

station may generate the authentication key (AK) corresponding to the design concept of the PKMv2 protocol.

When the authentication key is generated, the subscriber station transmits the security association capability request message to the base station in step S130. For the security association capability request message, a PKM-REQ message defined by the PKM protocol may be used. The security association capability request message includes information about basic security capabilities of the subscriber station and a basic security association identifier of the subscriber station.

When the base station receives the security association capability request message, it determines whether the request of the subscriber station can be accepted in S140. An admission for the security association capability request depends on whether an intersection, between the security association capability which the base station can provide and the security association capability which the subscriber station requested, exists or not.

When the security association capability requested by the subscriber station can be admitted, then the security association negotiation is performed, the security association capability response message is transmitted, and the subscriber station receives the security association capability response message in step S170. The security association capability response message includes the security association identifier (SAID) and the security association descriptor which defines the additional characteristic.

When the generation of the authentication key and the security

association negotiation are finished, the master key (MK) and the security association identifier (SAID) related to the negotiated security association capability are stored. This enables reuse of the master key security association identifier in the EAP authentication, when the handover occurs, in
5 step S180.

Meanwhile, when the security association capability requested by the subscriber station cannot be accepted, or when there is an error in the security association capability request message, a deny message including an error code is transmitted, and the subscriber station receives the deny
10 message in step S150.

FIG. 11 is a flowchart showing a method for performing the security association negotiation when a handover occurs, according to an exemplary embodiment of the present invention.

The second base station generates the pre-master key by using the
15 master key (MK) received from the first base station, and generates the authentication key by using the pre-master key, when the handover occurs because the subscriber station moves from the first base station to the second base station.

The subscriber station exchanges the register request message
20 (REG-REQ) and the register response message (REG-RSP) in steps S200 and S210, in order to process a CID (connection ID) synchronization with the second base station.

The second base station transmits the register response message for

a security association (SA) renewal by using the ranging response message. Here, the register response message is based on the security association capability information received from the first base station. The subscriber station receives the register response message in step S220.

5 The subscriber station determines whether the security association capability corresponding to the security association identifier included in the security association descriptor fulfills the security association capability previously negotiated with the first base station in step S230.

 When the previously negotiated security association capability is
10 fulfilled, the corresponding security association identifier (SAID) is renewed, and the EAP authentication is finished in step S240.

 When the security association capability of the second base station can not fulfill the security association capability of the subscriber station, a security association adding message is transmitted, and the security
15 association negotiation is performed with the second base station in steps S250 and S260. The security association negotiation can be performed by using the security association capability request message and the security association capability response message.

 According to the embodiments of the present invention, the present
20 invention provides an efficient security association negotiation method having the advantage that the method corresponds to the design concept of the PKMv2 protocol in the EAP authentication of a mobile subscriber station.

 In addition, according to the embodiments of the present invention, the

authentication and the security association negotiation can be performed without additional exchange of a message or a random number even after the handover, so that the present invention may minimize transmission of messages and provide a delay-free communication environment.

- 5 While this invention has been described in connection with what is presently considered to be practical exemplary embodiments, it is to be understood that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims.

WHAT IS CLAIMED IS:

1. A security association negotiation method using a user authentication in a wireless portable Internet system, the method comprising:
5 a base station generating an authentication key for authenticating a user of a subscriber station;
receiving a security association capability request message comprising security association capability information of the subscriber station from the subscriber station after generating the authentication key;
10 determining whether the base station is able to accept a security association capability of the subscriber station comprised in the security association capability request message; and
transmitting a security association capability response message comprising the security association capability information which is selected for
15 a security association with the subscriber station by the base station when the security association capability of the subscriber station can be accepted.
2. A security association negotiation method using a user authentication in a wireless portable Internet system, the method comprising:
20 performing a user authority authentication by using an authentication authorization and accounting (AAA) server and generating an authentication key;
transmitting a security association capability request message

comprising security association capability information of the subscriber station to the base station after generating the authentication key; and

receiving a security association capability response message comprising the security association capability information which is selected for
5 a security association by the base station when the base station can accept the security association capability of the subscriber station.

3. The security association negotiation method of claim 1 or claim 2, wherein the generating the authentication key comprises:

10 generating a master key (MK) by using an AAA key generated by the AAA server;

generating a pre-master key (PMK) from the master key by using an identifier of the base station or the subscriber station; and

generating the authentication key from the pre-master key.

15

4. The security association negotiation method of claim 1 or claim 2, wherein the security association capability request message comprises capability information on security and encryption of the subscriber station, a security association identifier of the subscriber station, and an
20 HMAC tuple generated from the authentication key.

5. The security association negotiation method of claim 1 or claim 2, wherein the security association capability request response

message comprises sequence number information on the authentication key,
a security association identifier for the security association of the subscriber
station, a security association descriptor for defining additional characteristics
for the security association, and an HMAC tuple generated from the
5 authentication key.

6. The security association negotiation method of claim 5,
wherein the security association descriptor is recorded in correspondence
with information on at least one of a data encryption scheme, a message
10 authentication scheme, and a traffic key encryption scheme of the security
association identifier.

7. The security association negotiation method of claim 1 or
claim 2, wherein the method further comprises the base station transmitting a
15 security association denial reason message comprising an error code for
denying the security association to the subscriber station when the security
association capability of the subscriber station can be accepted.

8. The security association negotiation method of claim 1 or
20 claim 2, wherein, in the generating the authentication key, an authentication is
performed by using an extensible authentication protocol (EAP).

9. The security association negotiation method of claim 8,

wherein the security association capability request message and security association capability response message are transmitted by using a message defined by a PKM protocol.

5 10. A security association negotiation method using a user authentication in a wireless portable Internet system, the method comprising:

 a first base station generating a second authentication key by transmitting a master key, which is to be a seed of a first authentication key of a subscriber station which hands over to a second base station, to the second
10 base station;

 the first base station providing a first security association descriptor comprising security association capability information, which is previously negotiated with the subscriber station, to the second base station;

 the subscriber station exchanging a register request message
15 (REG-REQ) and a register response message (REG-RSP) with the second base station;

 providing a second security association descriptor generated based on the first security association descriptor by using the register response message, and checking whether a security association capability is fulfilled;
20 and

 admitting a security association identifier comprised in the second security association descriptor and renewing a security association when the security association capability is fulfilled.

11. The security association negotiation method of claim 10, wherein the second authentication key is generated by using the master key and an identifier of the second base station.

5

12. The security association negotiation method of claim 11, wherein the method further comprises transmitting a security association capability adding message, which comprises security association capability information of the subscriber station to be added, to the second base station, 10 when new security association identifier information needs to be added to the second security association capability descriptor.

13. The security association negotiation method of claim 12, wherein the method further comprises:

15 the second base station determining whether a security association capability of the subscriber station comprised in the security association capability adding message can be accepted; and

transmitting a security association capability response message comprising the security association capability information which is selected by 20 the second base station for a security association with the subscriber station, to the subscriber station, when the security association capability of the subscriber station can be accepted.

FIG.1

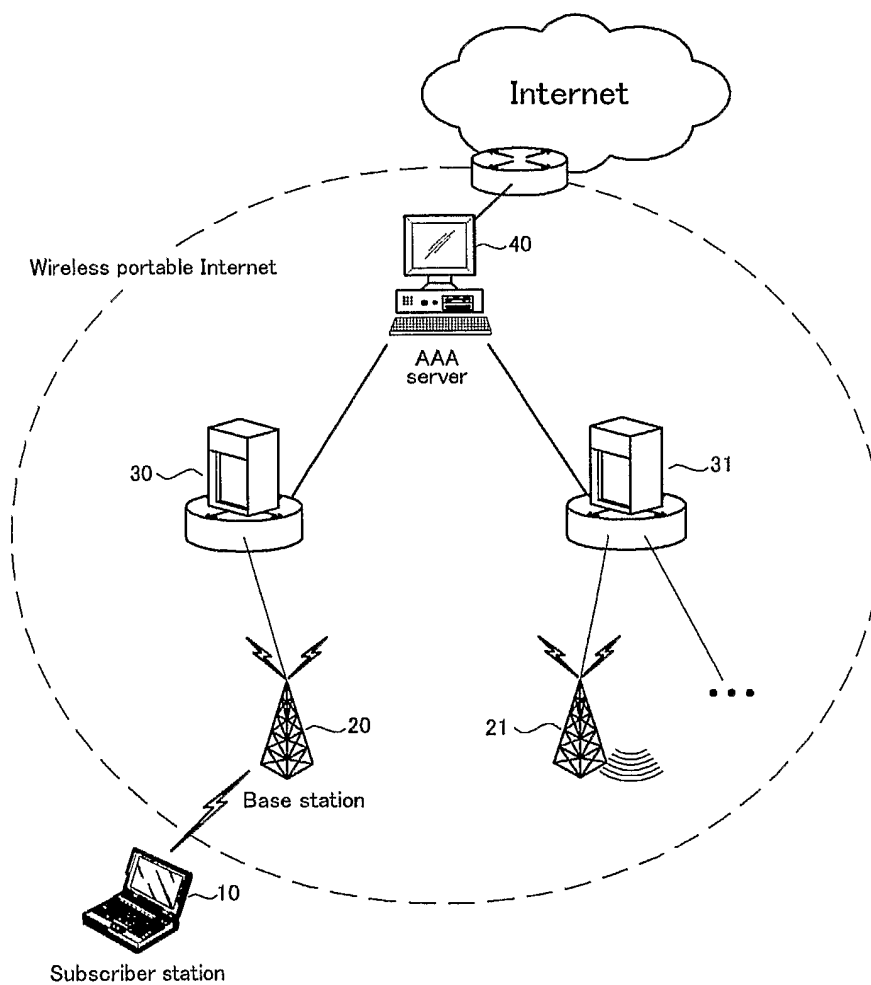


FIG.2

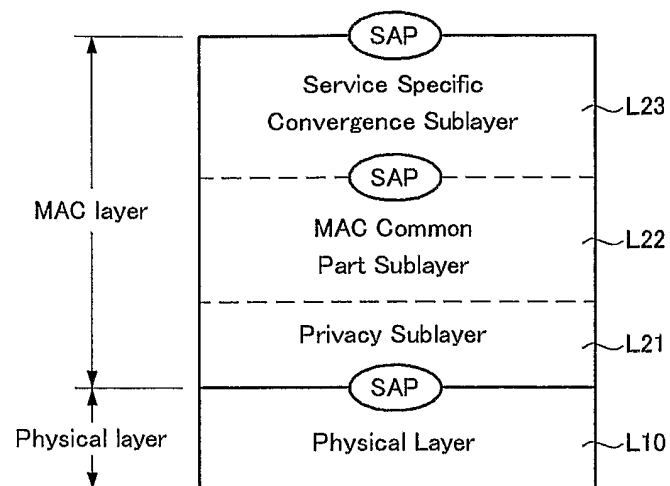


FIG.3

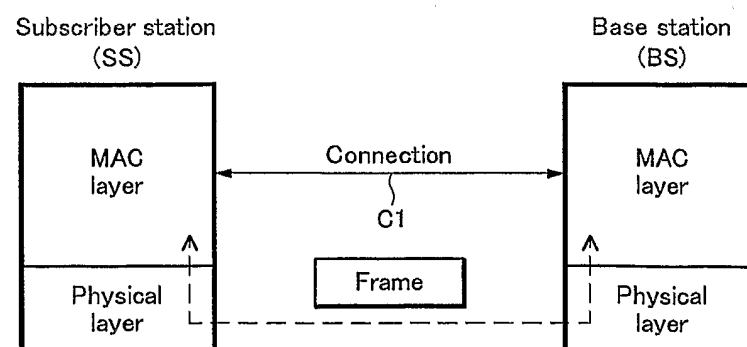


FIG.4

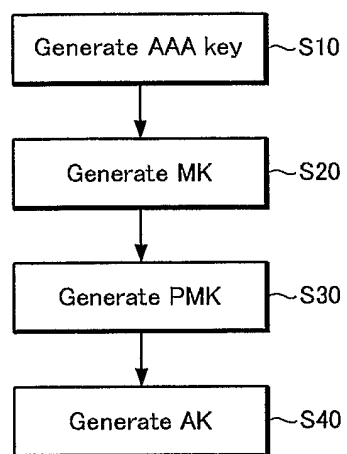


FIG.5

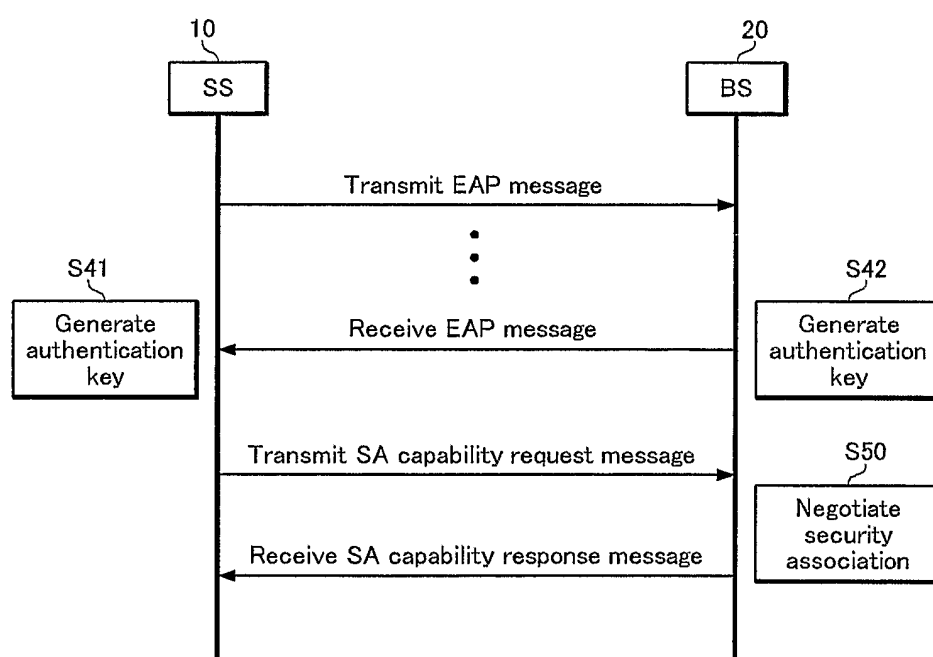


FIG.6

Characteristic	Content
Security capability	Describe security and encryption capability
Primary SAID	Basic SAID of subscriber station(Basic CID)
HMAC tuple	Encryption hash for a message

FIG.7

Characteristic	Content
Key sequence number	Information about a sequence number of AK
SA descriptor	Complex descriptor for defining SAID and additional security association characteristic
HMAC tuple	Encryption hash for a message

FIG.8

Characteristic	Content
Error code	code for identifying a denial reason for the security association capability request message
HMAC tuple	Encryption hash for a message

FIG.9

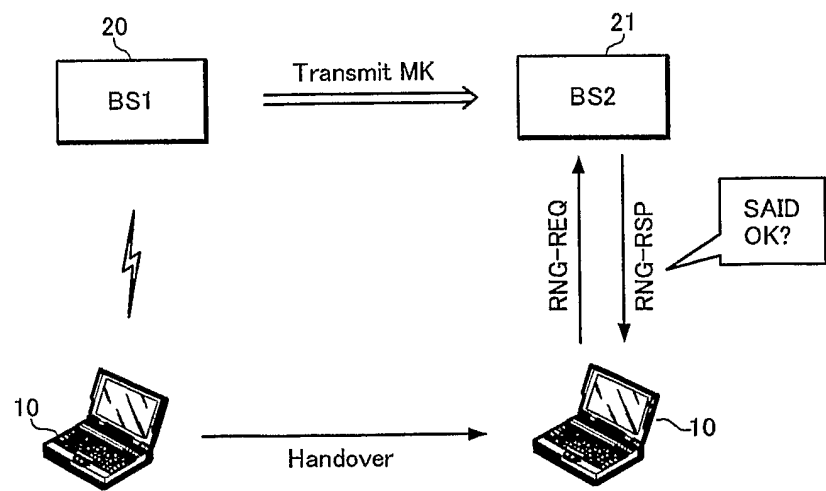


FIG.10


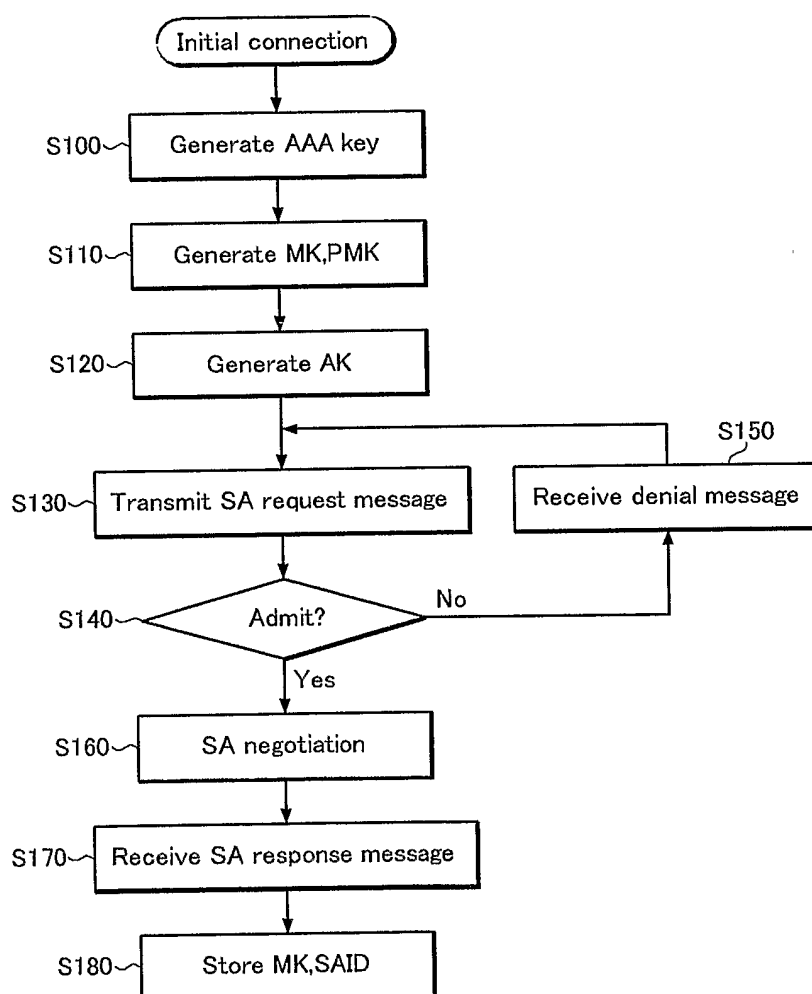


FIG.11

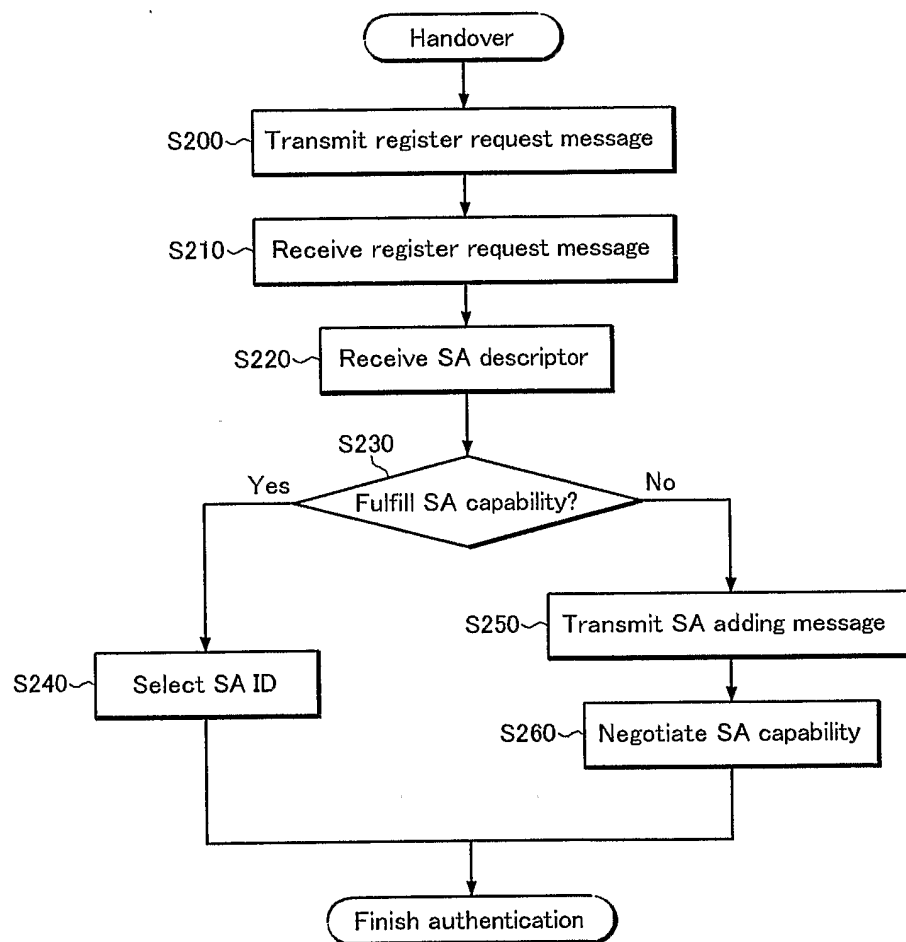

INTERNATIONAL SEARCH REPORT

International application No.
PCT/KR2005/000447

A. CLASSIFICATION OF SUBJECT MATTER**IPC7 H04B 7/26**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7 H04B7/26, H04L12/28, H04L29/06

ECLA : H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

KR : IPC as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

KIPASS, ESPACENET, INSPECT & Keywords : wireless, access, network, authentication, security, association, negotiate and similar terms

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2004/0010713 A1 (JOHN R. VOLLBRECHT ET AL.) 15 January 2004 * the whole document *	1 - 12
A	EP 1081895 A1 (INTEL CORPORATION) 7 March 2001 * the whole document *	1 - 12
A	EP 1414214 A2 (MICROSOFT CORPORATION) 28 April 2004 * abstract, paragraphs[0029]-[0031], figures 4-6*	1 - 12

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

22 JUNE 2005 (22.06.2005)

Date of mailing of the international search report

22 JUNE 2005 (22.06.2005)

Name and mailing address of the ISA/KR



Korean Intellectual Property Office
920 Dunsan-dong, Seo-gu, Daejeon 302-701,
Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

SHIN, Jun Ho

Telephone No. 82-42-481-8129



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2005/000447

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US2004010713A1	15-01-2004	AU2003263775A1 W02004008715A1	02-02-2004 22-01-2004
EP1081895A1	07-03-2001	NONE	
EP1414214A2	28-04-2004	EP1414214A3 US20040078597A1	06-04-2005 22-04-2004