




(22) Date de dépôt/Filing Date: 2000/06/09
 (41) Mise à la disp. pub./Open to Public Insp.: 2000/12/09
 (45) Date de délivrance/Issue Date: 2008/07/22
 (30) Priorité/Priority: 1999/06/09 (US60/138,217)

(51) Cl.Int./Int.Cl. *B60N 2/44* (2006.01),
B60R 7/04 (2006.01)
 (72) Inventeur/Inventor:
NEWMAN, PAUL E., US
 (73) Propriétaire/Owner:
MAGNA SEATING SYSTEMS INC., CA
 (74) Agent: IMAI, JEFFREY T.

(54) Titre : COUSSIN DE SIEGE AVEC COMPARTIMENT DE RANGEMENT A OUVERTURE PAR BASCULEMENT
 (54) Title: SEAT CUSHION WITH FLIP OPEN STORAGE BIN

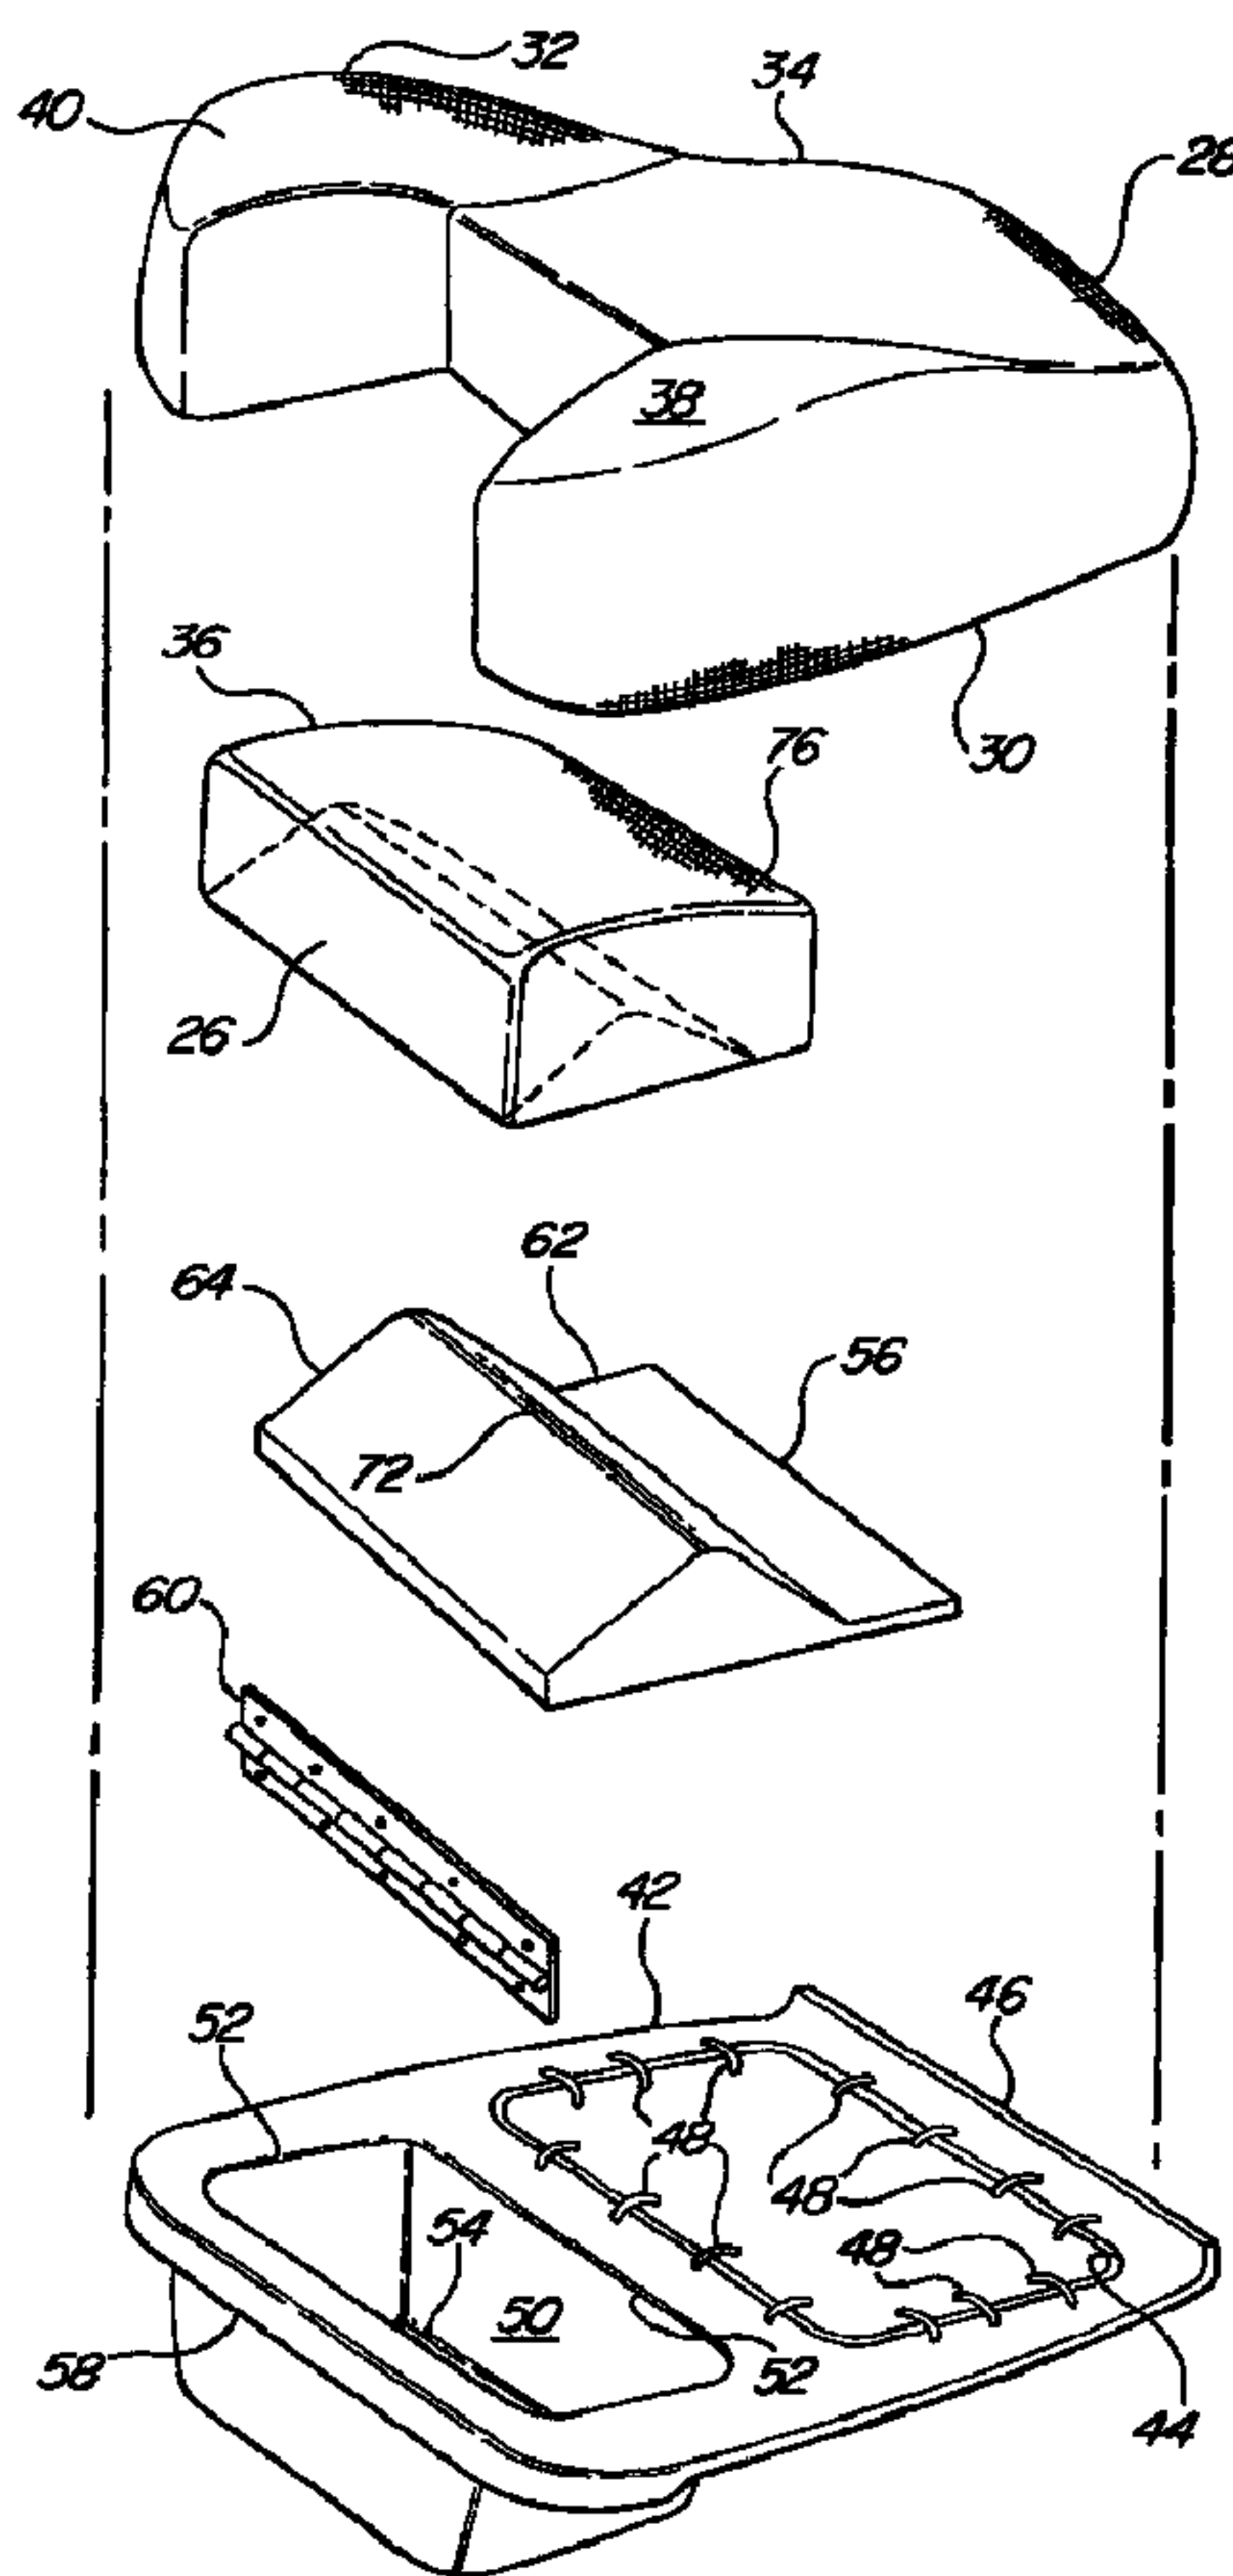

(57) Abrégé/Abstract:

A seat assembly is disclosed for use in an automotive vehicle having a floor. The seat assembly includes a seat frame secured to the floor of the automotive vehicle. A tray structure is secured to the seat frame. The tray structure includes a bin designed to have

(57) **Abrégé(suite)/Abstract(continued):**

items stored therein. A seat cushion is divided into a number of cushion members wherein a portion of the cushion members are immovable with respect to the tray structure and a portion of the cushion members are movable with respect to the tray structure. The movable cushion members provide access to the bin in the tray structure. The movable cushion members pivot about a hinge with respect to the immovable cushion members. By maintaining the immovable cushion members in place, an occupant can still sit on the immovable cushion members while accessing the bin by pivoting the movable cushion members.

SEAT CUSHION WITH FLIP OPEN STORAGE BIN

5

ABSTRACT

A seat assembly is disclosed for use in an automotive vehicle
10 having a floor. The seat assembly includes a seat frame secured to the floor of the
automotive vehicle. A tray structure is secured to the seat frame. The tray
structure includes a bin designed to have items stored therein. A seat cushion is
divided into a number of cushion members wherein a portion of the cushion
members are immovable with respect to the tray structure and a portion of the
15 cushion members are movable with respect to the tray structure. The movable
cushion members provide access to the bin in the tray structure. The movable
cushion members pivot about a hinge with respect to the immovable cushion
members. By maintaining the immovable cushion members in place, an occupant
can still sit on the immovable cushion members while accessing the bin by
20 pivoting the movable cushion members.

SEAT CUSHION WITH FLIP OPEN STORAGE BIN

Background Art

1. Field of the Invention

The present invention relates generally to a seat assembly for an automotive vehicle, and more particularly to a seat assembly having a storage
5 compartment under the seat cushion thereof.

2. Description of the Related Art

As the content of the automotive vehicle becomes more sophisticated, areas often left untouched are being converted to have increased functionality.
10 One such area is below the seat cushion of a seat assembly. United States Patent 5,816,650 discloses a storage bin for the area under the seat cushion. This patent discloses the cover of the underseat storage bin to be the entire seat cushion of the seat assembly. More specifically, the seat assembly includes two side walls that are disposed adjacent the guide tracks of the seat assembly. The seat assembly
15 also defines a front end and a rear end. The seat cushion extends to these parameters, i.e., to the side walls, the front and rear ends. The seat cushion, being pivotally connected to the seat assembly near the front end, is pivoted upwardly away from the side walls to expose the underseat storage bin.

20 The disadvantages associated with this design include the inability to use a portion of the seat cushion while accessing the underseat storage bin and the unnecessarily increased difficulty in gripping the seat cushion or handle thereto due to the proximity of the seat cushion to the seat back.

Summary of the Invention

A seat assembly is disclosed for use in an automotive vehicle. The seat assembly includes a seat frame that is secured to a floor of the automotive vehicle. A

5 seat back is secured to the seat frame. A tray structure is secured to the seat frame. The tray structure includes a bin for storing items therein. A first cushion member is secured to the tray structure covering a portion of the tray structure. The seat assembly also includes a second cushion member pivotally secured to the tray structure. The second cushion member is pivotal between a closed position

10 covering the bin and an open position providing access to the bin wherein the second cushion member pivots with respect to the first cushion member.

Brief Description of the Drawings

Other advantages of the invention will be readily appreciated as the

15 same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings, wherein:

Figure 1 is a perspective view of one embodiment of the invention shown in a passenger compartment, partially cut away;

Figure 2 is an exploded perspective view of one embodiment of the

20 invention;

Figure 3 is a cross-sectional side view of one embodiment of the invention;

Figure 4 is a perspective view, partially cut away, of an alternative embodiment of the invention; and

25 Figure 5 is a cross-sectional side view taken along lines 5-5 of Figure 4 with the seat cushion shown in phantom.

Detailed Description of the Preferred Embodiment(s)

Referring to Figures 1 through 3, a seat assembly is generally depicted at 10 for supporting a seat occupant on a floor 12 of an a passenger compartment of an automotive vehicle. The seat assembly 10 includes a seat cushion, generally indicated at 14, for supporting the seat occupant on the seat assembly 10 and a seat back 16 extending longitudinally between a lower portion 18 operatively connected to the seat frame 20 and an upper portion 22, as is commonly known in the art. The seat back 16 further includes a contoured front support surface 24 extending longitudinally between the lower portion 18 and the upper portion 22 for supporting the seat occupant in an upright seated position. It may be appreciated by those skilled in the art that the upper portion 22 of the seat back may have a headrest assembly formed integrally therewith as is shown in Figure 1 or it may be a separate structure engagable with the upper portion 22 as is well known in the art.

The seat cushion 14 is movably secured to the seat frame 20. Typically, the seat cushion 14 and the seat back 16 move using a set of guide tracks. The guide tracks (not shown) may be secured to the floor 12 of the passenger compartment or, in the alternative, may be secured to a riser assembly that may be used depending on the profile of the seat assembly 10 and the contour of the floor 12.

The seat cushion 14 defines front 26, back 28 and two side 30, 32 surfaces. The seat cushion 14 includes at least two cushion members 34, 36. In the embodiment shown in the Figures, the first cushion member 34 extends from

the back surface 28 up alongside the side surfaces 30, 32 whereas the second cushion member 36 is disposed adjacent the front surface 26. It may be appreciated that the first cushion member 34 may include multiple cushions. For example, two side bolsters 38, 40 could be independent cushions.

5

The first cushion member 34 is secured to the seat frame 20 through a tray structure 42. The tray structure 42 includes an opening 44. A suspension mat 46 extends over the opening 44. The suspension mat 46 is fabricated from a woven elastic material or a synthetic elastic material. The suspension mat 46 is shown being secured to the tray structure via clips 48. The clips 48 may include springs or have a spring-like quality to enhance the comfort of the seat assembly 10.

The tray structure 42 includes a bin 50. The bin 50 is a depressed area of the tray structure 42 suitable for storage of personal items, maps, tools and the like. The bin 50 includes a plurality of sides 52 and a bottom surface 54. While shown as a single depressed area, the bin 50 may include a plurality of depressed areas and/or compartments to help organize the items stored therein.

The tray structure 42 includes a bin lid 56 that is pivotal between a closed position over the bin 50 and an open position exposing the bin 50. The bin lid 56 is pivotally secured to the tray structure 42 at a front end 58 disposed adjacent the front surface 26 of the seat cushion 14. A hinge 60 extends along the front end 58 and secures the bin lid 56 thereto.

25

The bin lid 56 includes a tray-engaging portion 62 and a bin cover portion 64. The tray-engaging portion 62 is generally flat allowing it to rest on the tray structure 42 when the bin lid 56 is in the closed position. In an alternative embodiment not shown, the tray-engaging portion 62 may engage a portion of the seat frame 20 instead of the tray structure 42. In the preferred embodiment of Figures 1 through 3, the bin cover portion 64 includes convex surface, generally indicated at 66. The convex surface 66 includes two opposing surfaces 68, 70 adjoining at an apex 72. The convex surface 66 provides support strength across the bin 50 and provides an increased storage space allowing items to extend up over the tray structure 42 when the first seat cushion 34 is in its closed position.

A handle 74 is fixedly secured to a back side 76 of the second cushion member 36. The handle 74 facilitates the operator moving the second cushion member 36 from the closed position to the open position. Alternatively, a recess 78, shown in phantom in Figure 3, may be used in place of the handle 74. Alternatively, the second cushion member 36 could be spring biased. In this alternative embodiment, a latch secured to the tray structure 42 would be used in conjunction with a catch on the second cushion member 36 to maintain the second cushion member 36 in the closed position.

Referring to Figures 4 and 5, wherein like primed numerals represent similar structures to the elements of the first embodiment shown in Figures 1 through 3, the seat assembly has at least two cushion members 34', 36' supported by a tray structure 42' would include a bin 50' which extends under the tray structure 42'. The bin 50' includes a plurality of sides 52' and a bottom surface 54'. The bin lid 56' is pivotally secured to the tray structure 42' at a front end 58'. A hinge 60' extends along the front end 58' and secures the bin lid 56' thereto. The bin lid 56' includes a tray-engaging portion 62' and a bin cover portion 64'. A handle 74' is fixedly secured to a back side 76' of the second cushion member 36'.

The suspension mat 46 of the first embodiment is replaced with a solid tray structure 42' having a plurality of ribs 80 extend along the tray structure 42' and bin lid 56' to add strength thereto.



5 The present invention has been described in an illustrative manner. It is to be understood that the terminology, which has been used, is intended to be in the nature of words of description rather than of limitation.

10 Many modifications and variations of the present invention are possible in light of the above teachings. Therefore, within the scope of the appended claims, the present invention may be practiced other than as specifically described.

What is claimed is:

1. A seat assembly for use in an automotive vehicle having a floor, said seat assembly comprising:
 - a seat frame fixedly securable to the floor of the automotive vehicle;
 - a seat back secured to said seat frame;
 - a tray structure secured to said seat frame, said tray structure having a bin for storing items therein, said tray structure including a bin lid supported thereby and pivotally movable between a closed position covering said bin and an open position providing access to said bin;
 - a first cushion member secured to said tray structure covering said tray structure; and
 - a second cushion member secured to said bin lid and pivotally movable therewith, when said bin lid is in said closed position, said second cushion member cooperates with the first cushion member to present a seat cushion for supporting an occupant.
2. The seat assembly as set forth in claim 1 wherein said first cushion member includes two side bolsters extending out therefrom.
3. The seat assembly as set forth in claim 2, wherein said second cushion member is disposed between said two side bolsters.
4. The seat assembly as set forth in claim 3 wherein said bin lid includes a hinge extending along a front edge of said tray structure, enabling said second cushion member to pivot forwardly.
5. The seat assembly as set forth in claim 4 wherein said bin lid includes a tray engaging portion.
6. The seat assembly as set forth in claim 5 wherein said bin lid includes a convex bin cover portion extending within said tray engaging portion.
7. The seat assembly as set forth in claim 6 said bin extends under said tray structure.
8. The seat assembly as set forth in claim 7 wherein said tray structure has a mat suspended across an opening positioned under said first cushion member.
9. The seat assembly as set forth in claim 8 wherein said mat is an elastic material secured to said tray structure by clips.
10. The seat assembly as set forth in claim 1 wherein said second cushion member has a handle to facilitate moving the second cushion member from the closed position to the open position.

11. The seat assembly as set forth in claim 10 wherein said bin lid includes a hinge extending along a front edge of said tray structure, enabling said second cushion member to pivot forwardly.
12. The seat assembly as set forth in claim 11 wherein said bin lid includes a tray engaging portion and said tray structure is configured to complementarily receive said tray engaging portion.
13. The seat assembly as set forth in claim 12 wherein said first cushion member includes two side bolsters extending out therefrom.
14. The seat assembly as set forth in claim 13 wherein said second cushion member is disposed between said two side bolsters.
15. The seat assembly as set forth in claim 14 wherein said handle extends upwardly between said first and second cushion member.
16. The seat assembly as set forth in claim 15 wherein said tray structure has a plurality of ribs.

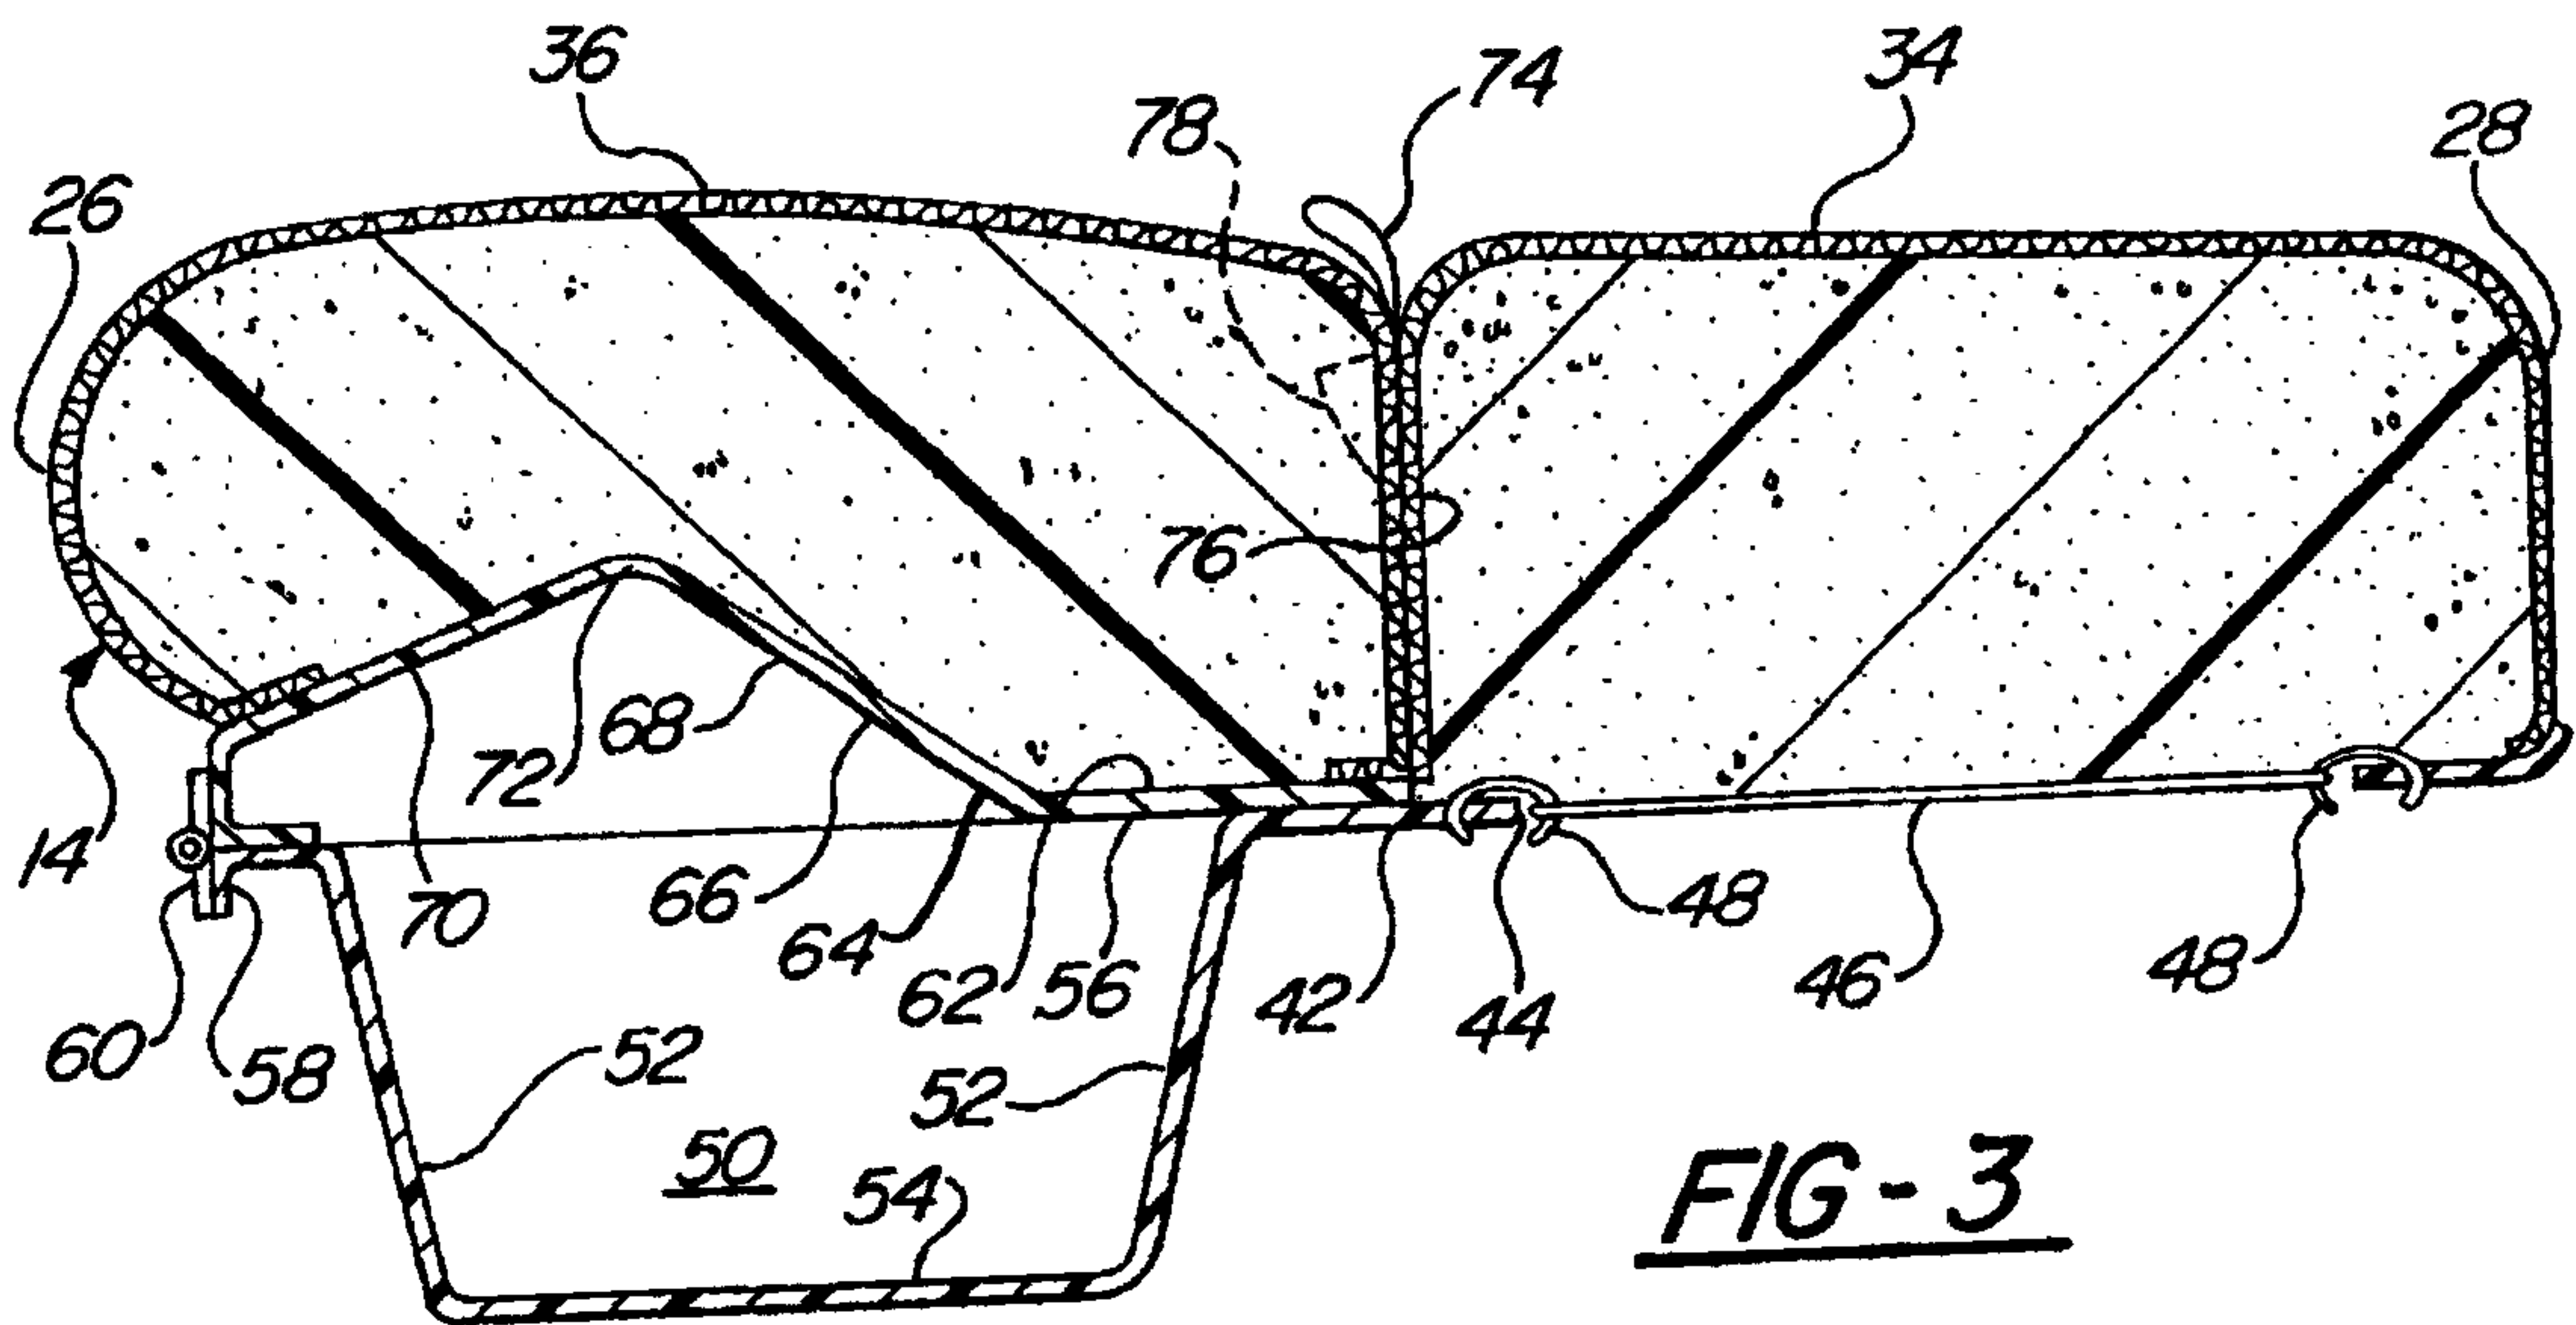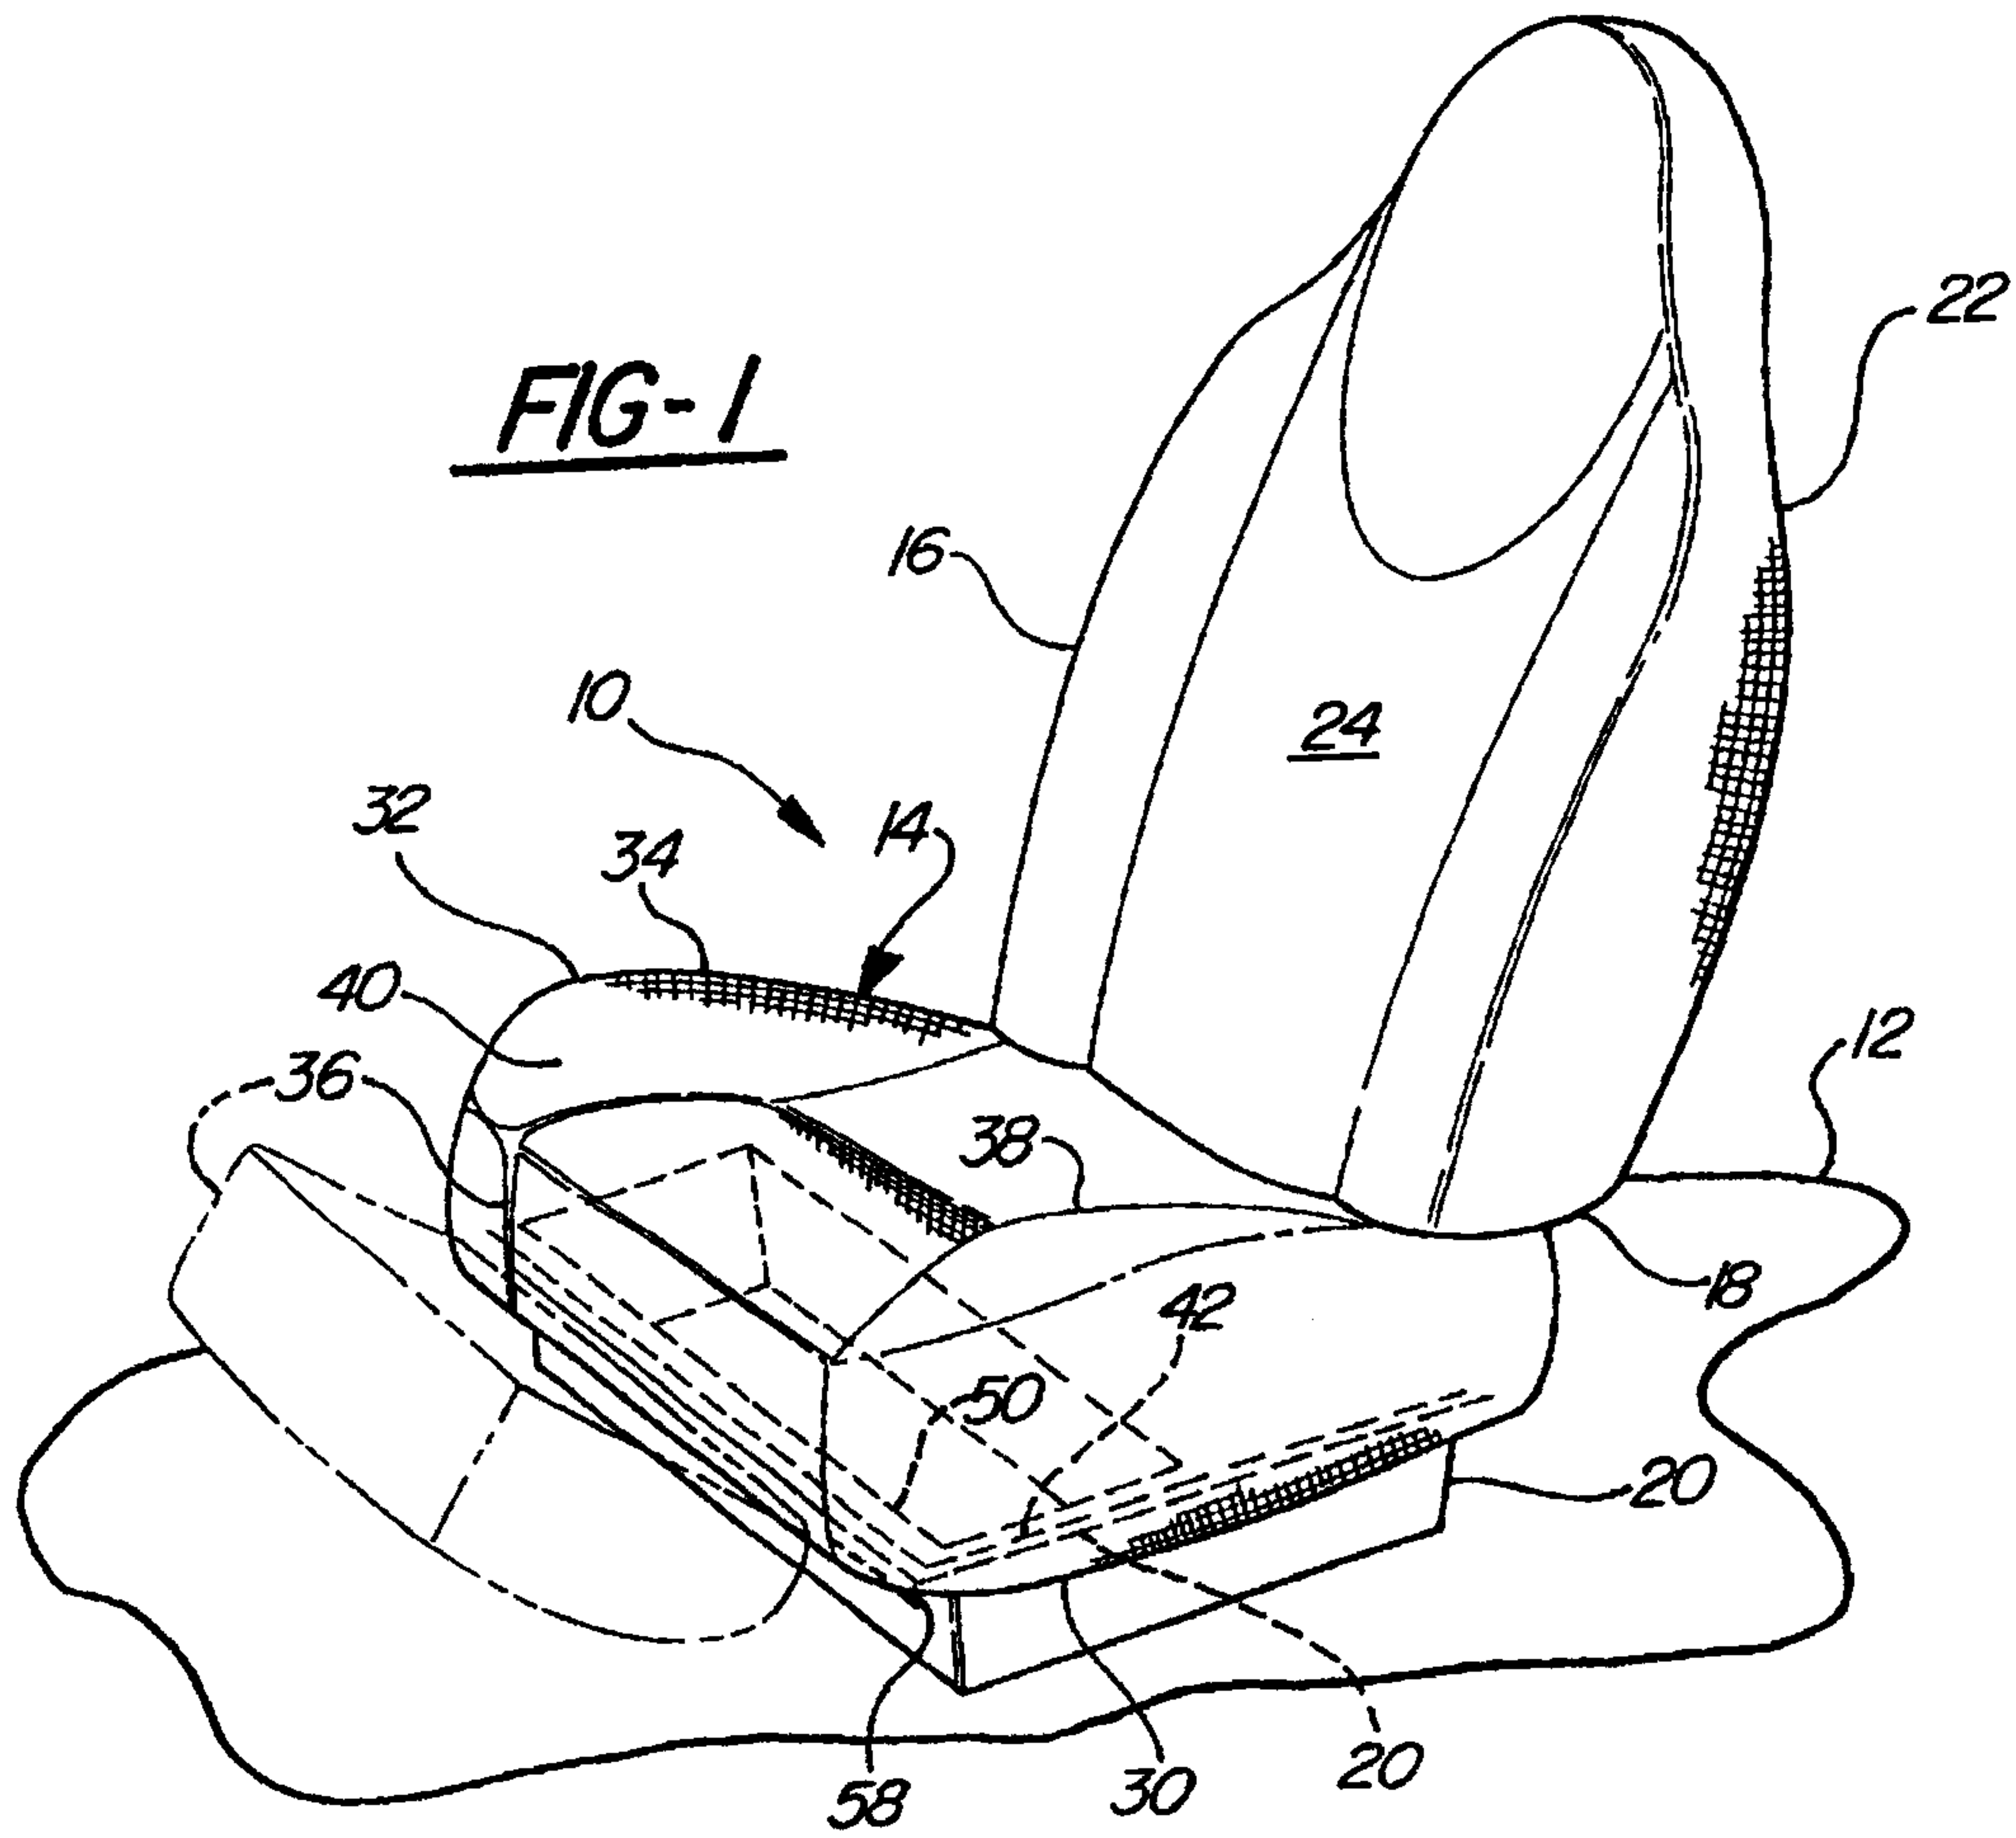

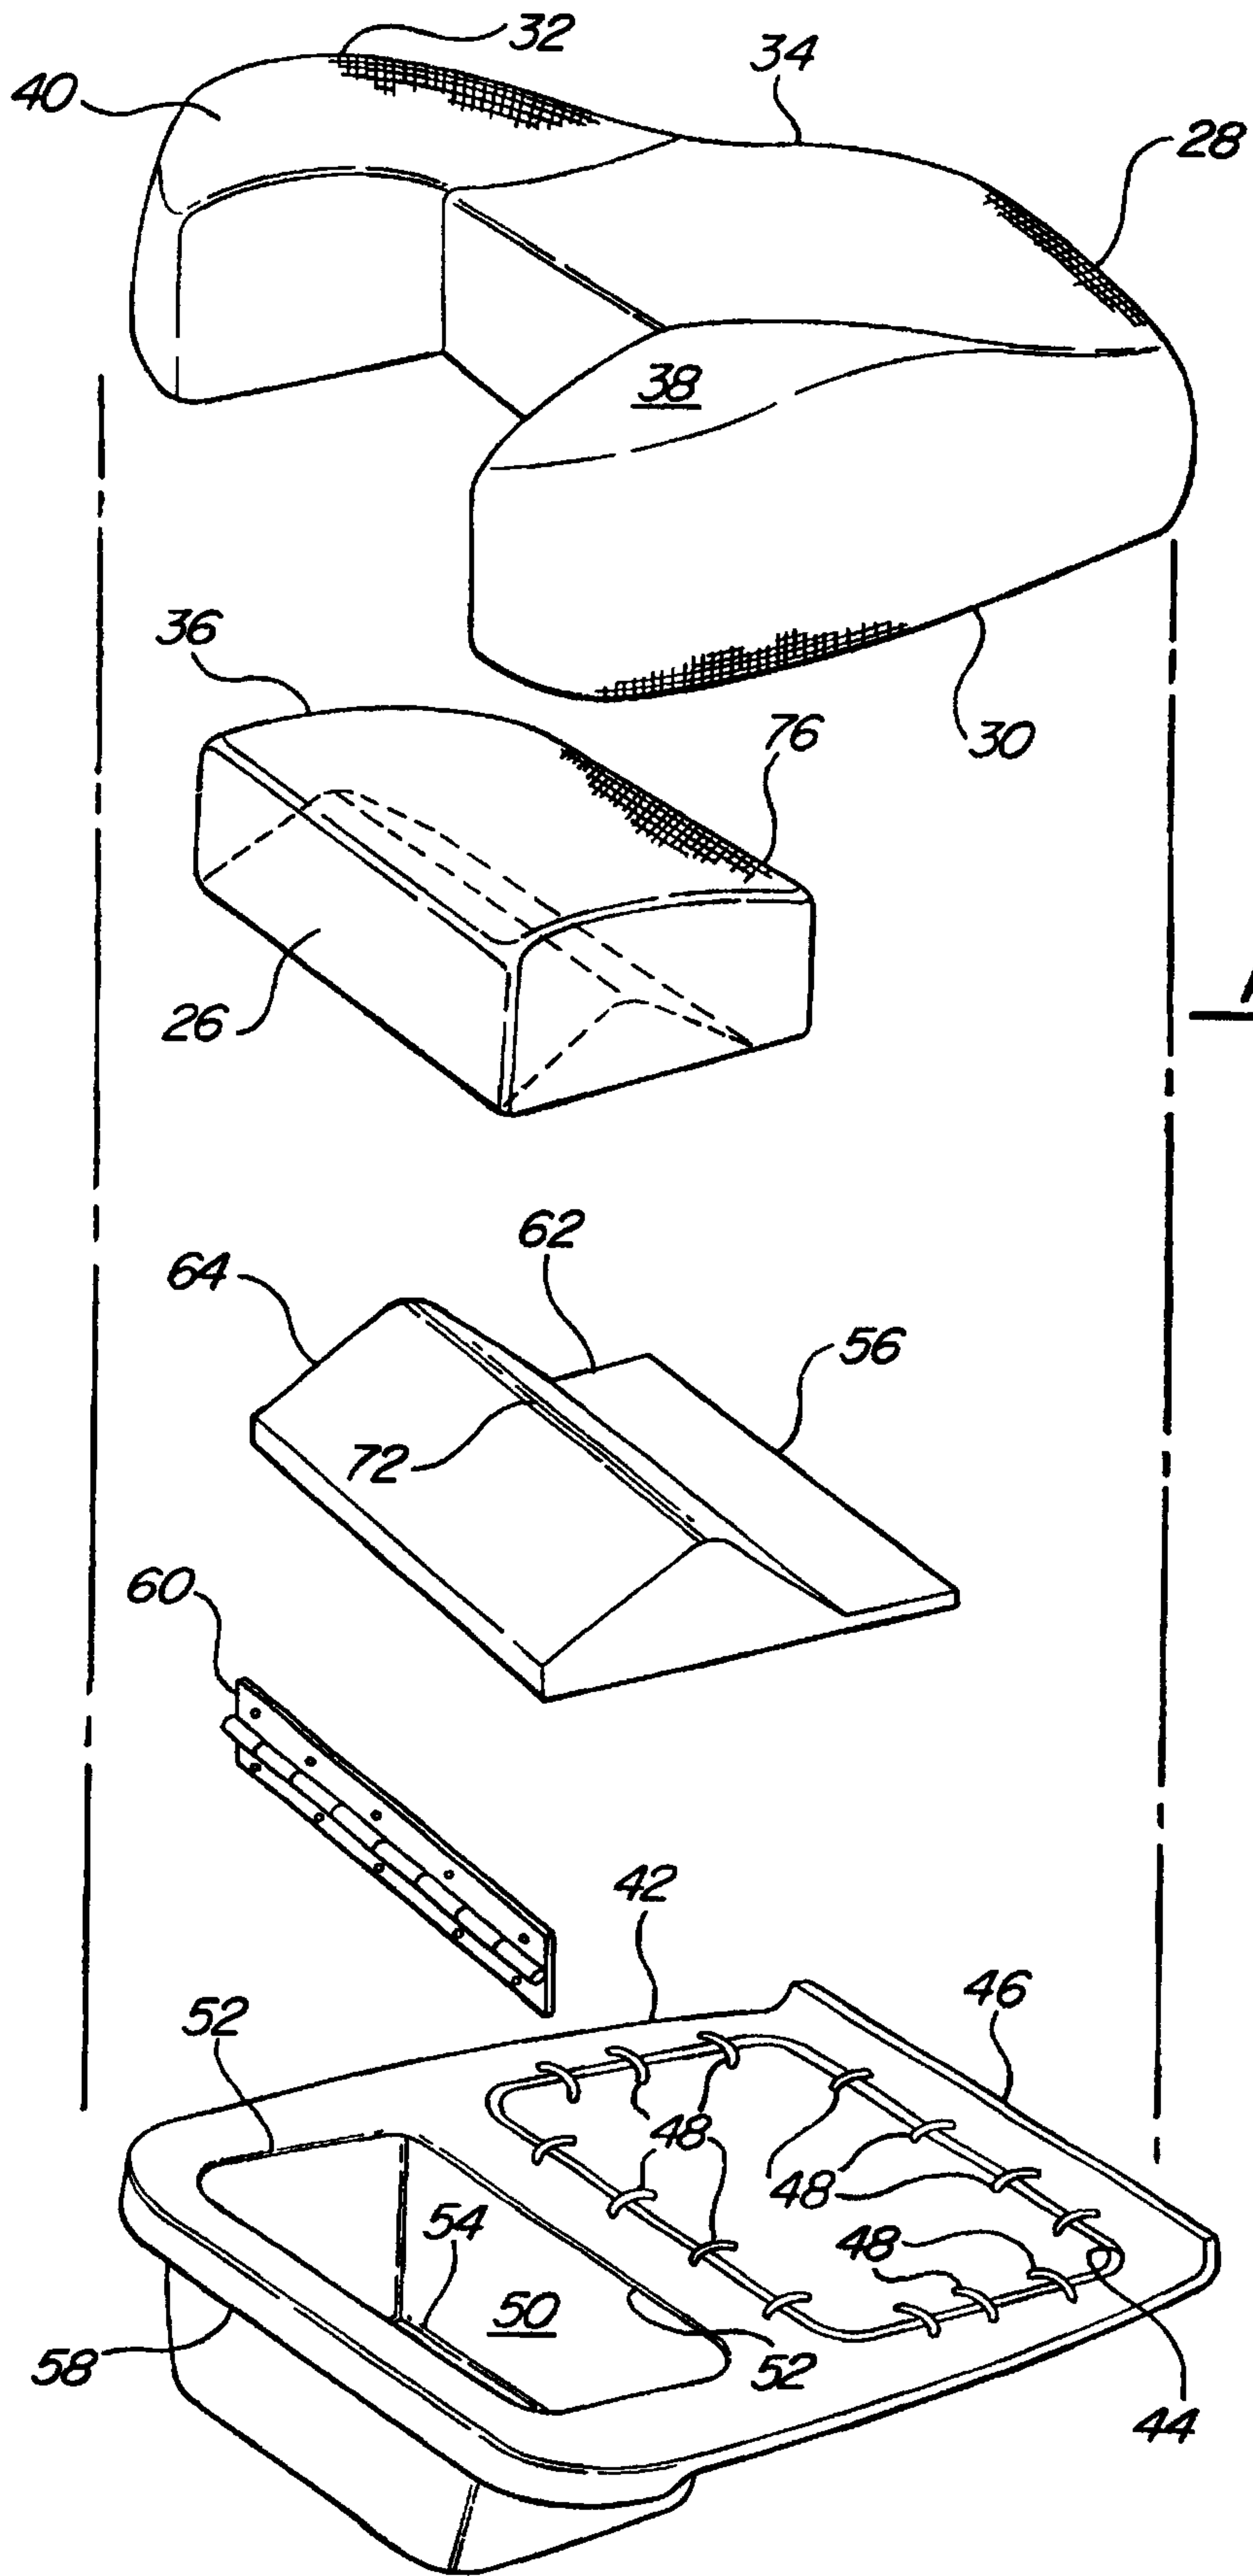


FIG-2

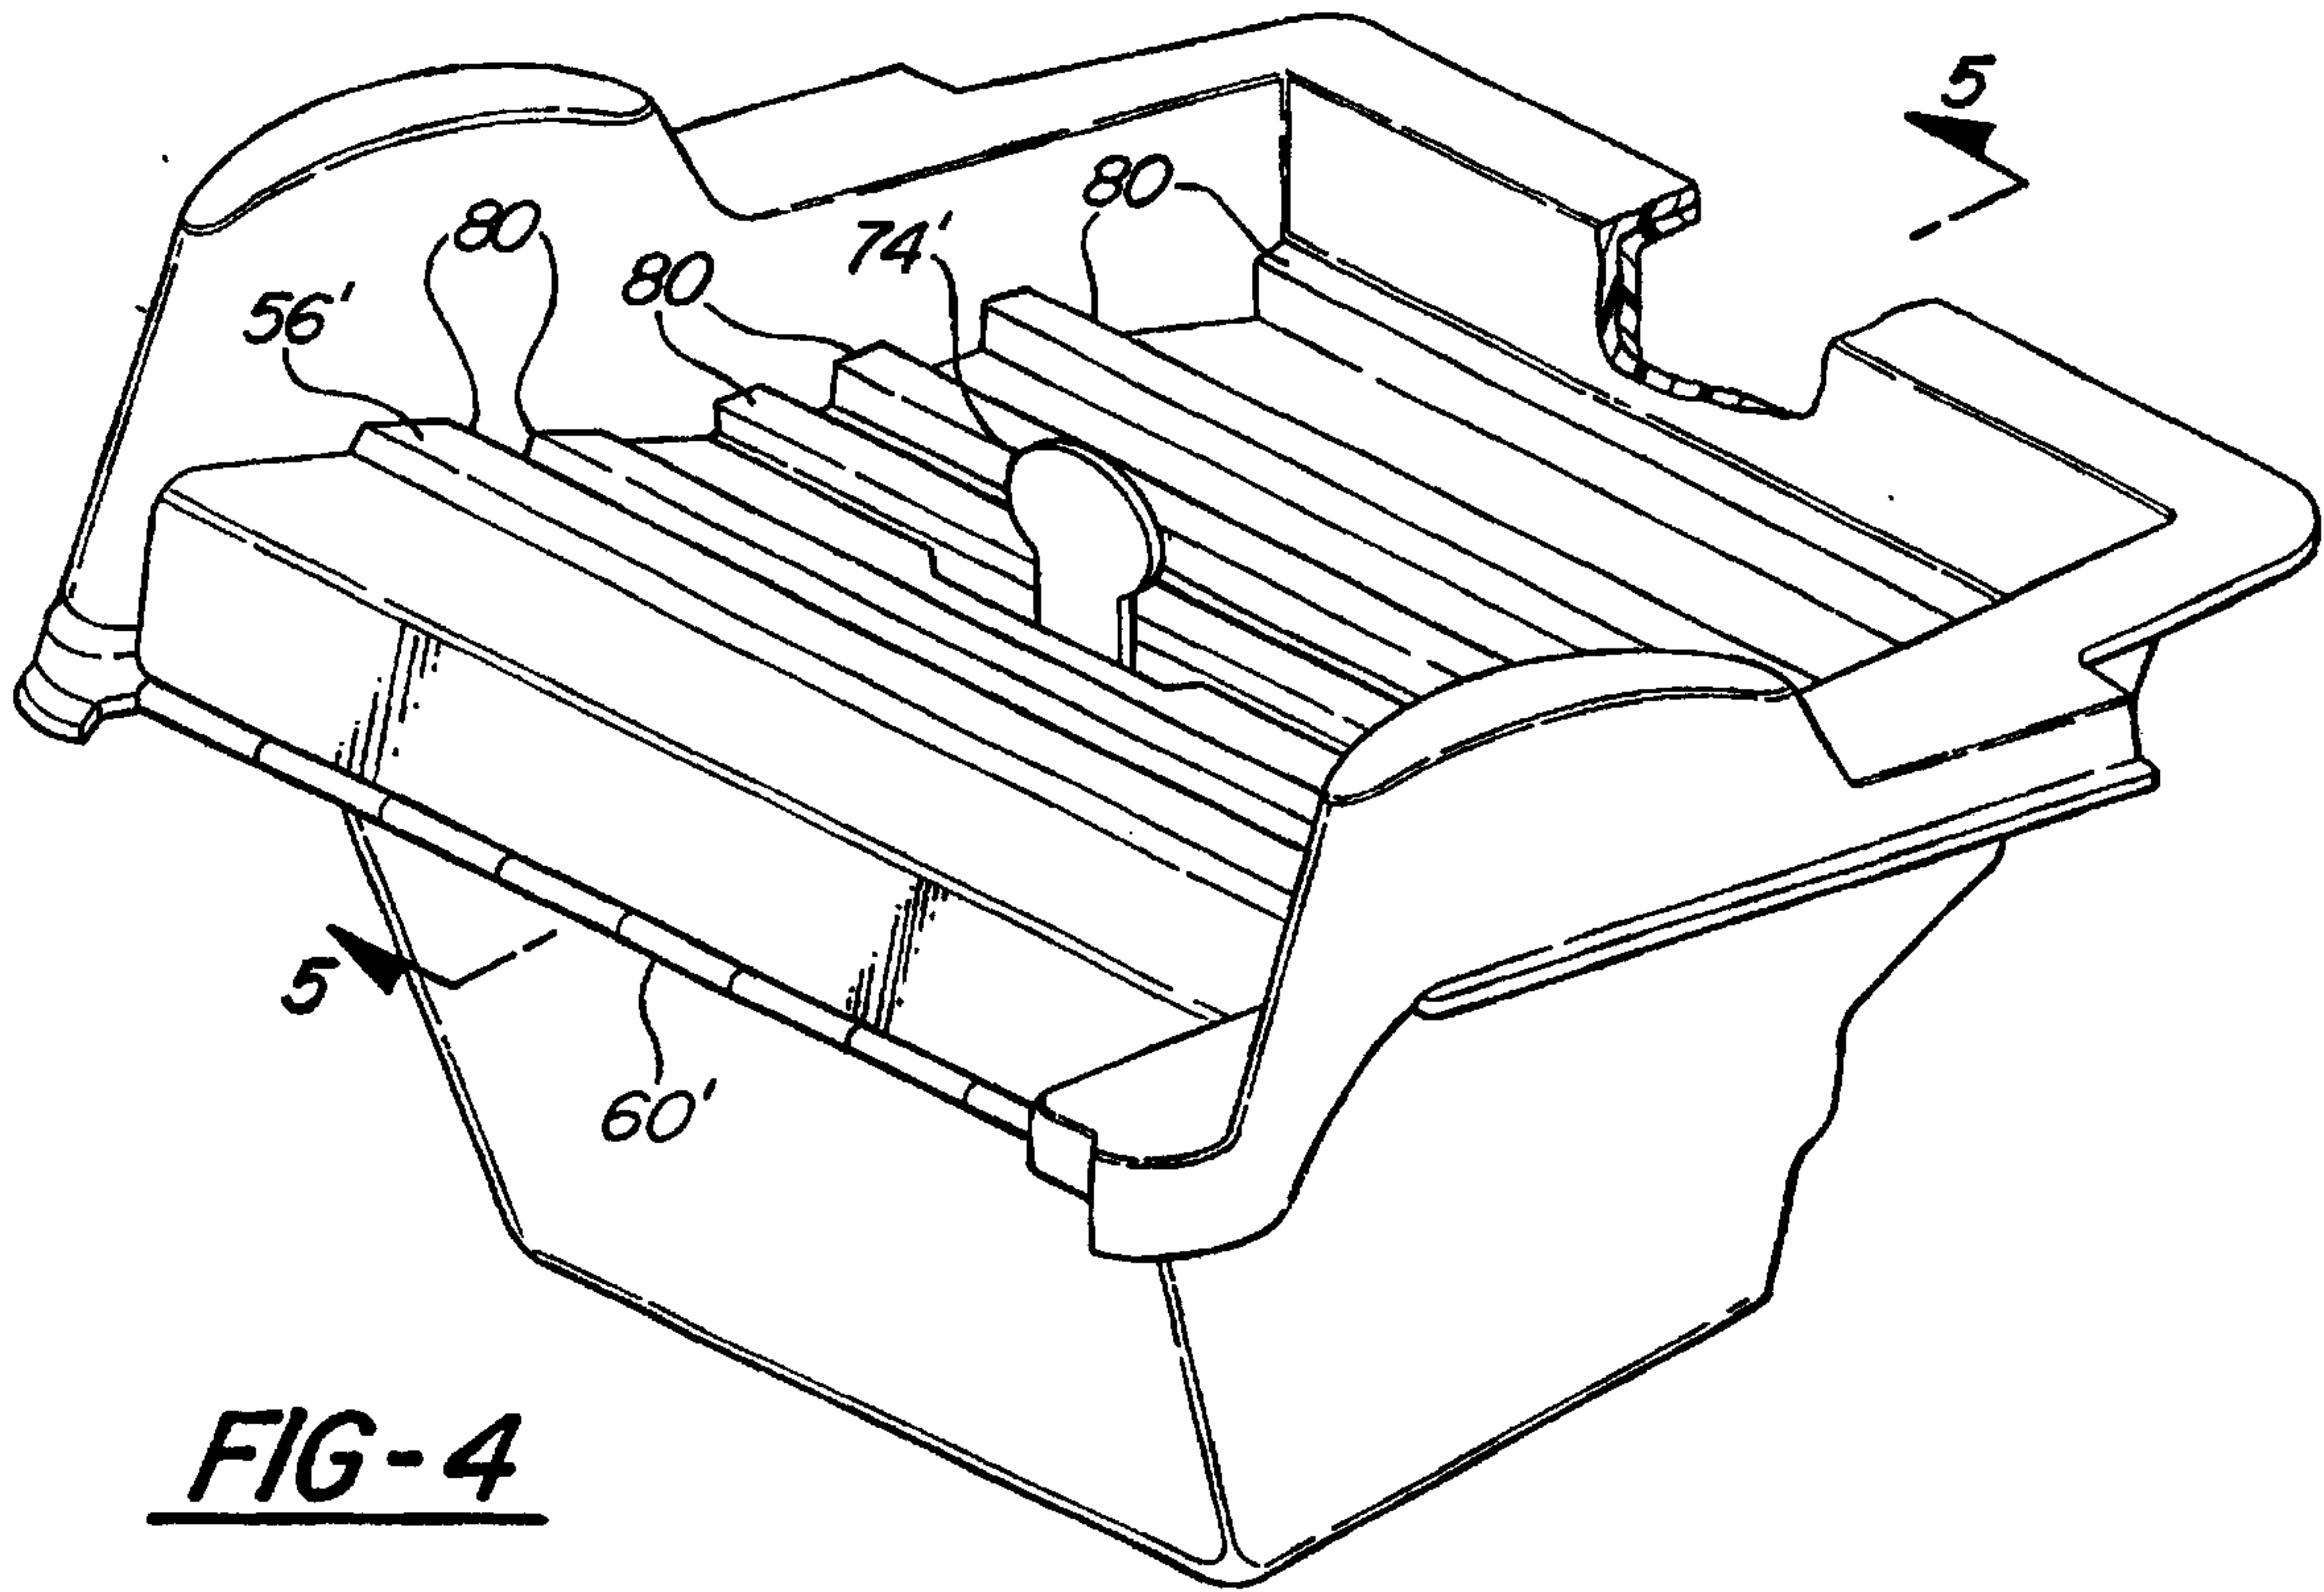


FIG-4

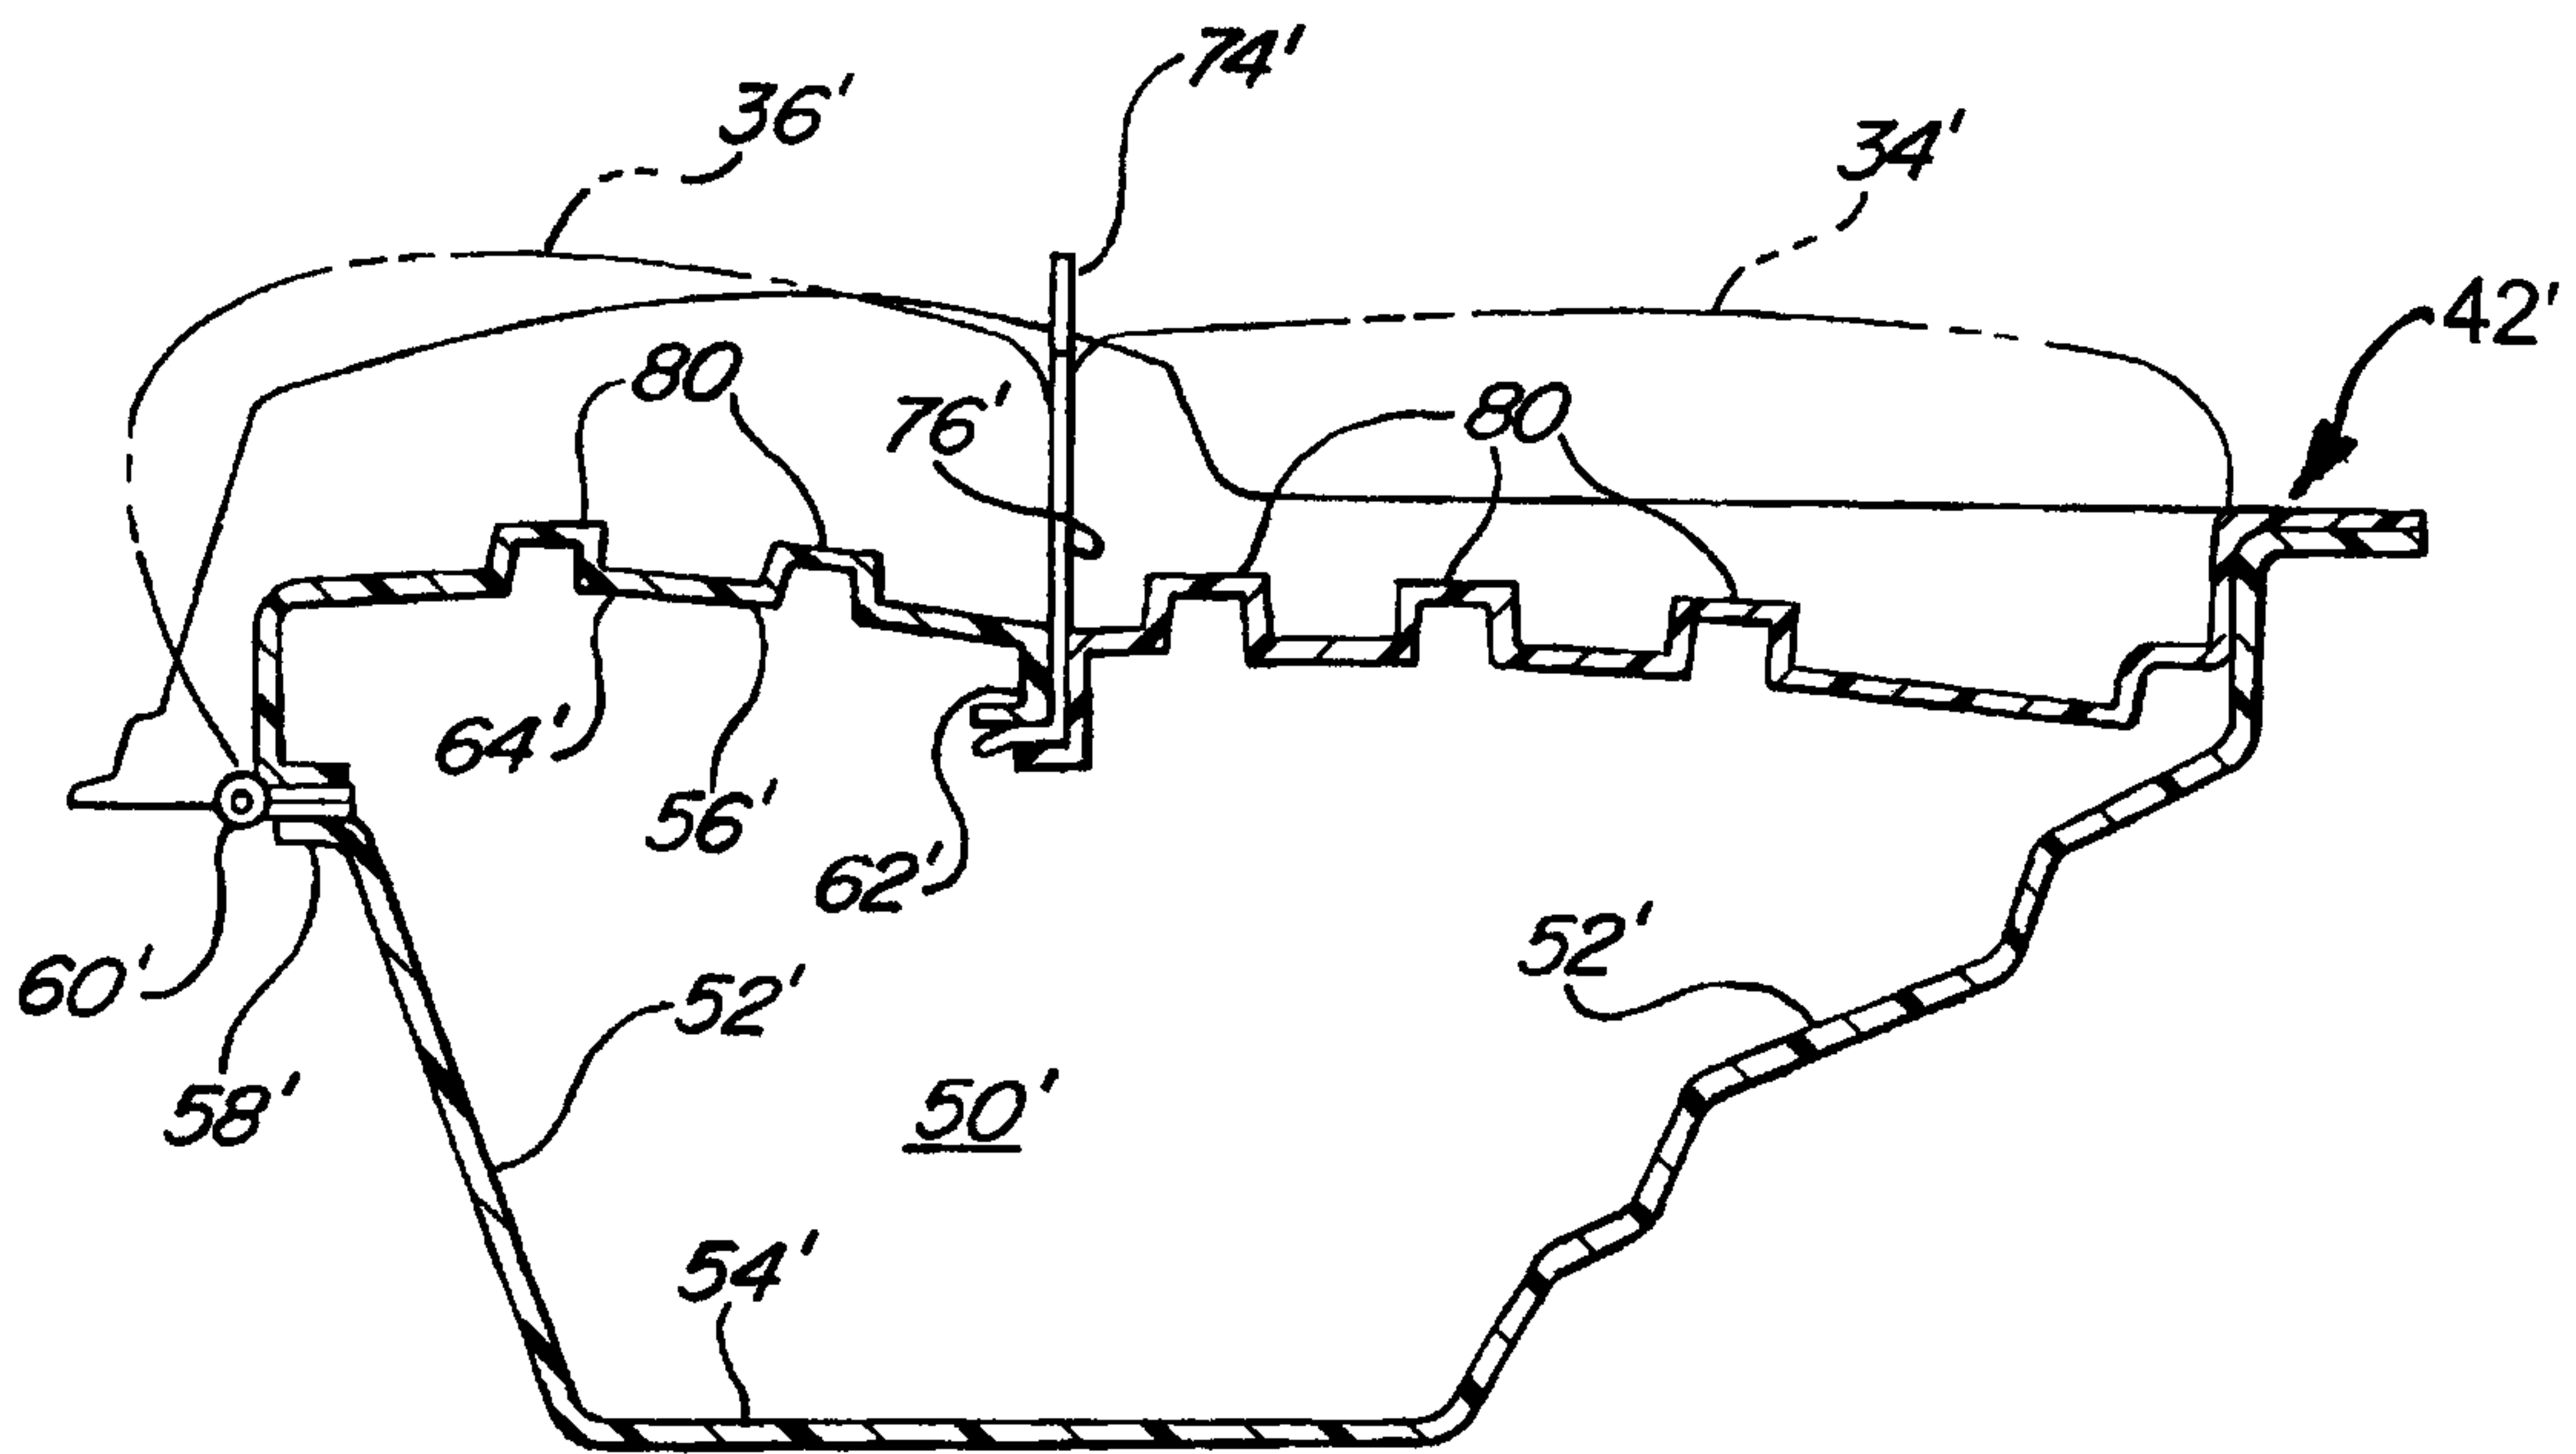


FIG-5

