



(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**

(86) **Date de dépôt PCT/PCT Filing Date:** 2015/08/06
(87) **Date publication PCT/PCT Publication Date:** 2016/02/11
(45) **Date de délivrance/Issue Date:** 2020/03/10
(85) **Entrée phase nationale/National Entry:** 2017/01/17
(86) **N° demande PCT/PCT Application No.:** US 2015/043985
(87) **N° publication PCT/PCT Publication No.:** 2016/022783
(30) **Priorités/Priorities:** 2014/08/07 (EP14180172.0);
2015/07/09 (EP15175998.2)

(51) **Cl.Int./Int.Cl. C11D 1/83** (2006.01),
C11D 1/04 (2006.01), **C11D 1/22** (2006.01),
C11D 1/72 (2006.01), **C11D 3/37** (2006.01),
C11D 3/50 (2006.01), **C11D 17/08** (2006.01)
(72) **Inventeurs/Inventors:**
DEPOOT, KAREL JOZEF MARIA, BE;
VAN ELSSEN, KATRIEN ANDREA LIEVEN, BE
(73) **Propriétaire/Owner:**
THE PROCTER & GAMBLE COMPANY, US
(74) **Agent:** KIRBY EADES GALE BAKER

(54) **Titre : COMPOSITION DE LESSIVE**
(54) **Title: LAUNDRY DETERGENT COMPOSITION**

(57) **Abrégé/Abstract:**

The present invention is directed to a liquid laundry detergent composition comprising an anionic surfactant, a non-ionic surfactant, between 0.5wt% and 25wt% water and 0.05% and 2% by weight of the composition of a cationic polymer being an hydroxyethyl cellulose polymer derivatised with trimethyl ammonium substituted epoxide. The anionic surfactant comprises fatty acid, and the weight ratio of cationic polymer to anionic surfactant is less than 1:5; the weight ratio of cationic polymer to non-ionic surfactant is more than 1:10; the weight ratio of cationic polymer to total surfactant is less than 1:5; and the weight ratio of anionic to non-ionic surfactant is from 5:1 to 23:1. 'Total surfactant' means the level of all surfactant present in the liquid laundry detergent composition, including but not limited to all anionic, non-ionic and cationic surfactant.

ABSTRACT

The present invention is directed to a liquid laundry detergent composition comprising an anionic surfactant, a non-ionic surfactant, between 0.5wt% and 25wt% water and 0.05% and 2% by weight of the composition of a cationic polymer being an hydroxyethyl cellulose polymer derivatised with trimethyl ammonium substituted epoxide. The anionic surfactant comprises fatty acid, and the weight ratio of cationic polymer to anionic surfactant is less than 1:5; the weight ratio of cationic polymer to non-ionic surfactant is more than 1:10; the weight ratio of cationic polymer to total surfactant is less than 1:5; and the weight ratio of anionic to non-ionic surfactant is from 5:1 to 23:1. 'Total surfactant' means the level of all surfactant present in the liquid laundry detergent composition, including but not limited to all anionic, non-ionic and cationic surfactant.

LAUNDRY DETERGENT COMPOSITION

FIELD

Laundry detergent compositions comprising hydroxyethyl cellulose polymer.

5

BACKGROUND

Cationic polymers, including hydroxyethyl cellulose polymers are known to provide softening benefit in laundry detergent compositions. Unfortunately, this softness benefit is often compromised due to the interaction of the cationic cellulose polymer with anionic cleaning surfactants present in the laundry detergent composition. Improved cleaning can be achieved by increasing the level of deterative surfactants, however, this is to the detriment of the softening benefit.

There remains a need in the art to provide a laundry detergent composition that provides improved softening benefits but which maintains fabric cleaning benefits during the laundry operation versus laundry detergent compositions comprising cationic cellulose polymers known in the art.

The inventors surprisingly found that by carefully controlling the ratio of cationic polymer, anionic surfactant and non-ionic surfactant in the detergent composition, the above-mentioned technical problem was solved.

20

SUMMARY

Certain exemplary embodiments provide a water-soluble unit dose article comprising a water-soluble film and a liquid composition, the water-soluble unit dose article comprising at least two compartments, the liquid composition being a liquid laundry detergent composition comprising an anionic surfactant, a non-ionic surfactant, between about 0.5wt% and about 25wt% water, and between about 0.05% and about 2% by weight of the composition of a cationic polymer being an hydroxyethyl cellulose polymer derivatised with trimethyl ammonium substituted epoxide, wherein the anionic surfactant comprises fatty acid, and wherein the non-ionic surfactant is selected from the group consisting of alcohol alkoxylate non-ionic surfactant, amine oxide surfactant, and mixtures thereof; and wherein the weight ratio of cationic polymer to anionic surfactant is less than 1:5; the weight ratio of cationic polymer to non-ionic surfactant is more than 1:10; the weight ratio of

cationic polymer to total surfactant is less than 1:5; and wherein the weight ratio of anionic to non-ionic surfactant is from about 5:1 to about 23:1, wherein 'total surfactant' means the level of all surfactant present in the liquid laundry detergent composition, and wherein the cationic polymer is present in the composition as a particle.

Certain embodiments are directed to a liquid laundry detergent composition comprising an anionic surfactant, a non-ionic surfactant, between 0.5wt% and 25wt% water and 0.05% and 2% by weight of the composition of a cationic polymer being an hydroxyethyl cellulose polymer derivatised with trimethyl ammonium substituted epoxide,

wherein the anionic surfactant comprises fatty acid; and

wherein;

- the weight ratio of cationic polymer to anionic surfactant is less than 1:5;
- the weight ratio of cationic polymer to non-ionic surfactant is more than 1:10;
- the weight ratio of cationic polymer to total surfactant is less than 1:5;
- and wherein the weight ratio of anionic to non-ionic surfactant is from 5:1 to 23:1,

wherein 'total surfactant' means the level of all surfactant present in the liquid laundry detergent composition, including but not limited to all anionic, non-ionic and cationic surfactant.

5 DETAILED DESCRIPTION OF SELECTED EMBODIMENTS

Liquid laundry detergent composition

The composition of the present invention is a liquid laundry detergent composition. The term 'liquid laundry detergent composition' refers to any laundry detergent composition comprising a liquid capable of wetting and treating fabric e.g., cleaning clothing in a domestic washing machine, and includes, but is not limited to, liquids, gels, pastes, 10 dispersions and the like. The liquid composition can include solids or gases in suitably subdivided form, but the liquid composition excludes forms which are non-fluid overall, such as tablets or granules.

The liquid composition may be formulated into a unit dose article. The unit dose 15 article of the present invention comprises a water-soluble film which fully encloses the liquid composition in at least one compartment. Suitable unit dose compositions are described in more detail below.

The liquid laundry detergent composition can be used as a fully formulated consumer product, or may be added to one or more further ingredients to form a fully formulated consumer product. The liquid laundry detergent composition may be a 'pre-treat' composition which is added to a fabric, preferably a fabric stain, ahead of the fabric being added to a wash liquor.

The liquid laundry detergent composition can be used in a fabric hand wash operation or may be used in an automatic machine fabric wash operation.

The liquid laundry detergent composition comprises an anionic surfactant. Suitable anionic surfactants are described in more detail below.

The liquid laundry detergent composition comprises a non-ionic surfactant. Suitable non-ionic surfactants are described in more detail below.

The liquid laundry detergent composition comprises a cationic polymer being an hydroxyethyl cellulose polymer. This polymer is described in more detail below.

The weight ratio of cationic polymer to anionic surfactant in the liquid laundry detergent composition is less than 1:5.

The weight ratio of cationic polymer to non-ionic surfactant in the liquid laundry detergent composition is more than 1:10.

The weight ratio of cationic polymer to total surfactant in the liquid laundry detergent composition is less than 1:5. By 'total surfactant', we herein mean the level of all surfactant present in the liquid laundry detergent composition, including but not limited to all anionic, non-ionic and cationic surfactant.

The weight ratio of anionic to non-ionic surfactant in the liquid laundry detergent composition is from 5:1 to 23:1, or even from 5:1 to 20:1, or even 5:1 to 15:1.

The weight ratio of anionic to non-ionic surfactant maybe from 5:1 to 20:1, or even from 5:1 to 18:1, or even from 5:1 to 15:1.

By 'weight ratio' we herein mean the ratio of the weight of a first ingredient present in the composition to that of the weight of a second ingredient present in the composition.

The composition may comprise a perfume, an encapsulated perfume, or a mixture thereof. Without wishing to be bound by theory, it was surprisingly found that the composition of the present invention also provided the additional benefit of improved deposition of perfume or encapsulated perfumes onto the fabrics.

The composition may have a pH of from 6-12, preferably from 7-9.

It is an object of the present invention to provide a laundry detergent composition that provides improved softening benefits but which maintains fabric cleaning benefits during the laundry operation versus laundry detergent compositions comprising cationic cellulose polymers known in the art. Another object of the present invention is to provide a laundry detergent composition that provides improved softening benefits as well as improved fabric cleaning benefits during the laundry operation versus laundry detergent compositions comprising cationic cellulose polymers known in the art.

Water-soluble unit dose article

The present invention is also directed to a water-soluble unit dose article comprising a water-soluble film and a liquid laundry detergent composition according to the present invention.

The unit dose article of the present invention comprises a water-soluble film which fully encloses the liquid composition in at least one compartment.

The unit dose article herein is typically a closed structure, made of the water-soluble film enclosing an internal volume which comprises the liquid laundry detergent composition. The unit dose article can be of any form and shape which is suitable to hold and protect the composition, e.g. without allowing the release of the composition from the pouch prior to contact of the pouch to water. The exact execution will depend on factors like the type and amount of the composition in the pouch, the number of compartments in the pouch, the characteristics required for the water-soluble film to hold, protect, and release the composition. The unit dose article may have a substantially, square, rectangular, oval, ellipsoid, superelliptical, or circular shape. The shape may or may not include any excess material present as a flange or skirt at the point where two or more films are sealed together. By substantially, we herein mean that the shape has an overall impression of being, for example, square. It may have rounded corners and/or non-straight sides, but overall it gives the impression of being square, for example.

The liquid composition preferably has a density in the range from of 0.9 to 1.3 grams per cubic centimeter, more preferably from 1.00 to 1.1 grams per cubic centimeter, excluding any solid additives, but including any bubbles, if present.

The unit dose pouch comprises a water-soluble film which fully encloses the liquid composition in at least one compartment. The unit dose article may optionally comprise

additional compartments; said additional compartments may comprise an additional composition. Said additional composition may be liquid, solid, or mixtures thereof. Alternatively, any additional solid component may be suspended in a liquid-filled compartment. Each compartment may have the same or different compositions. A multi-
5 compartment unit dose form may be desirable for such reasons as: separating chemically incompatible ingredients; or where it is desirable for a portion of the ingredients to be released into the wash earlier or later. The unit dose article may comprise at least one, or even at least two, or even at least three, or even at least four, or even at least five compartments. The unit dose article may comprise two compartments, wherein a first
10 compartment comprises from 5% to 20% by weight of the compartment of a chelant, preferably wherein the chelant is in a solid form.

The multiple compartments may be arranged in any suitable orientation. For example, the unit dose article may comprise a bottom compartment, and at least a first top compartment, wherein the top compartment is superposed onto the bottom compartment. The
15 unit dose article may comprise a bottom compartment and at least a first and a second top compartment, wherein the top compartments are arranged side-by-side and are superposed on the bottom compartment; preferably, wherein the article comprises a bottom compartment and at least a first, a second and a third top compartment, wherein the top compartments are arranged side-by-side and are superposed on the bottom compartment.

20 Alternatively, the compartments may all be positioned in a side-by-side arrangement. In such an arrangement the compartments may be connected to one another and share a dividing wall, or may be substantially separated and simply held together by a connector or bridge. Alternatively, the compartments may be arranged in a 'tyre and rim' orientation, i.e. a first compartment is positioned next to a second compartment, but the first compartment at
25 least partially surrounds the second compartment, but does not completely enclose the second compartment.

The film of the unit dose article is soluble or dispersible in water, and preferably has a water-solubility of at least 50%, preferably at least 75% or even at least 95%, as measured by the method set out hereafter using a glass-filter with a maximum pore size of 20 microns:

30 50 grams $\pm$ 0.1 gram of film material is added in a pre-weighed 400 ml beaker and 245ml $\pm$ 1ml of distilled water is added. This is stirred vigorously on a magnetic stirrer set at 600 rpm, for 30 minutes. Then, the mixture is filtered through a folded qualitative sintered-

glass filter with a pore size as defined above (max. 20 micron). The water is dried off from the collected filtrate by any conventional method, and the weight of the remaining material is determined (which is the dissolved or dispersed fraction). Then, the percentage solubility or dispersability can be calculated.

- 5 Preferred film materials are polymeric materials. The film material can, for example, be obtained by casting, blow-moulding, extrusion or blown extrusion of the polymeric material, as known in the art.

Preferred polymers, copolymers or derivatives thereof suitable for use as pouch material are selected from polyvinyl alcohols, polyvinyl pyrrolidone, polyalkylene oxides, acrylamide, acrylic acid, cellulose, cellulose ethers, cellulose esters, cellulose amides, 10 polyvinyl acetates, polycarboxylic acids and salts, polyaminoacids or peptides, polyamides, polyacrylamide, copolymers of maleic/acrylic acids, polysaccharides including starch and gelatine, natural gums such as xanthum and carragum. More preferred polymers are selected from polyacrylates and water-soluble acrylate copolymers, methylcellulose, 15 carboxymethylcellulose sodium, dextrin, ethylcellulose, hydroxyethyl cellulose, hydroxypropyl methylcellulose, maltodextrin, polymethacrylates, and most preferably selected from polyvinyl alcohols, polyvinyl alcohol copolymers and hydroxypropyl methyl cellulose (HPMC), and combinations thereof. Preferably, the level of polymer in the pouch material, for example a PVA polymer, is at least 60%. The polymer can have any weight 20 average molecular weight, preferably from about 1000 to 1,000,000, more preferably from about 10,000 to 300,000 yet more preferably from about 20,000 to 150,000.

Mixtures of polymers can also be used as the film material. This can be beneficial to control the mechanical and/or dissolution properties of the compartments or pouch, depending on the application thereof and the required needs. Suitable mixtures include, for 25 example, mixtures wherein one polymer has a higher water-solubility than another polymer, and/or one polymer has a higher mechanical strength than another polymer. Also suitable are mixtures of polymers having different weight average molecular weights, for example, a mixture of PVA or a copolymer thereof of a weight average molecular weight of about 10,000- 40,000, preferably around 20,000, and of PVA or copolymer thereof, with a weight 30 average molecular weight of about 100,000 to 300,000, preferably around 150,000. Also suitable herein are polymer blend compositions, for example, comprising hydrolytically degradable and water-soluble polymer blends such as polylactide and polyvinyl alcohol,

obtained by mixing polylactide and polyvinyl alcohol, typically comprising about 1-35% by weight polylactide and about 65% to 99% by weight polyvinyl alcohol. Preferred for use herein are polymers which are from about 60% to about 98% hydrolysed, preferably about 80% to about 90% hydrolysed, to improve the dissolution characteristics of the material.

5 Preferred films exhibit good dissolution in cold water, meaning unheated water straight from the tap. Preferably such films exhibit good dissolution at temperatures below 25°C, more preferably below 21°C, more preferably below 15°C. By good dissolution it is meant that the film exhibits water-solubility of at least 50%, preferably at least 75% or even at least 95%, as measured by the method set out here after using a glass-filter with a
10 maximum pore size of 20 microns, described above.

Preferred films are those supplied by Monosol under the trade references M8630, M8900, M8779, M8310, films described in US 6 166 117 and US 6 787 512 and PVA films of corresponding solubility and deformability characteristics. Further preferred films are those described in US2006/0213801, WO 2010/119022, US2011/0188784 and US6787512.

15 Preferred water soluble films are those resins comprising one or more PVA polymers, preferably said water soluble film resin comprises a blend of PVA polymers. For example, the PVA resin can include at least two PVA polymers, wherein as used herein the first PVA polymer has a viscosity less than the second PVA polymer. A first PVA polymer can have a viscosity of at least 8 cP (cP mean centipoise), 10 cP, 12 cP, or 13 cP and at most 40 cP,
20 20 cP, 15 cP, or 13 cP, for example in a range of about 8 cP to about 40 cP, or 10 cP to about 20 cP, or about 10 cP to about 15 cP, or about 12 cP to about 14 cP, or 13 cP. Furthermore, a second PVA polymer can have a viscosity of at least about 10 cP, 20 cP, or 22 cP and at most about 40 cP, 30 cP, 25 cP, or 24 cP, for example in a range of about 10 cP to about 40 cP, or 20 to about 30 cP, or about 20 to about 25 cP, or about 22 to about 24, or about 23 cP. The
25 viscosity of a PVA polymer is determined by measuring a freshly made solution using a Brookfield LV type viscometer with UL adapter as described in British Standard EN ISO 15023-2:2006 Annex E Brookfield Test method. It is international practice to state the viscosity of 4% aqueous polyvinyl alcohol solutions at 20 .deg.C. All viscosities specified herein in cP should be understood to refer to the viscosity of 4% aqueous polyvinyl alcohol
30 solution at 20 .deg.C, unless specified otherwise. Similarly, when a resin is described as having (or not having) a particular viscosity, unless specified otherwise, it is intended that the

specified viscosity is the average viscosity for the resin, which inherently has a corresponding molecular weight distribution.

The individual PVA polymers can have any suitable degree of hydrolysis, as long as the degree of hydrolysis of the PVA resin is within the ranges described herein. Optionally,
5 the PVA resin can, in addition or in the alternative, include a first PVA polymer that has a Mw in a range of about 50,000 to about 300,000 Daltons, or about 60,000 to about 150,000 Daltons; and a second PVA polymer that has a Mw in a range of about 60,000 to about 300,000 Daltons, or about 80,000 to about 250,000 Daltons.

The PVA resin can still further include one or more additional PVA polymers that
10 have a viscosity in a range of about 10 to about 40 cP and a degree of hydrolysis in a range of about 84% to about 92%.

When the PVA resin includes a first PVA polymer having an average viscosity less than about 11 cP and a polydispersity index in a range of about 1.8 to about 2.3, then in one type of embodiment the PVA resin contains less than about 30 wt.% of the first PVA
15 polymer. Similarly, when the PVA resin includes a first PVA polymer having an average viscosity less than about 11 cP and a polydispersity index in a range of about 1.8 to about 2.3, then in another, non-exclusive type of embodiment the PVA resin contains less than about 30 wt.% of a PVA polymer having a Mw less than about 70,000 Daltons.

Of the total PVA resin content in the film described herein, the PVA resin can
20 comprise about 30 to about 85 wt.% of the first PVA polymer, or about 45 to about 55 wt.% of the first PVA polymer. For example, the PVA resin can contain about 50 wt.% of each PVA polymer, wherein the viscosity of the first PVA polymer is about 13 cP and the viscosity of the second PVA polymer is about 23 cP.

One type of embodiment is characterized by the PVA resin including about 40 to
25 about 85 wt.% of a first PVA polymer that has a viscosity in a range of about 10 to about 15 cP and a degree of hydrolysis in a range of about 84% to about 92%. Another type of embodiment is characterized by the PVA resin including about 45 to about 55 wt.% of the first PVA polymer that has a viscosity in a range of about 10 to about 15 cP and a degree of hydrolysis in a range of about 84% to about 92%. The PVA resin can include about 15 to
30 about 60 wt.% of the second PVA polymer that has a viscosity in a range of about 20 to about 25 cP and a degree of hydrolysis in a range of about 84% to about 92%. One contemplated class of embodiments is characterized by the PVA resin including about 45 to about 55 wt.%

of the second PVA polymer. When the PVA resin includes a plurality of PVA polymers the PDI value of the PVA resin is greater than the PDI value of any individual, included PVA polymer. Optionally, the PDI value of the PVA resin is greater than 2.2, 2.3, 2.4, 2.5, 2.6, 2.7, 2.8, 2.9, 3.0, 3.1, 3.2, 3.3, 3.4, 3.5, 3.6, 3.7, 3.8, 3.9, 4.0, 4.5, or 5.0.

5 The film material herein can also comprise one or more additive ingredients. For example, it can be beneficial to add plasticisers, for example, glycerol, ethylene glycol, diethyleneglycol, propylene glycol, sorbitol and mixtures thereof. Other additives may include water and functional detergent additives, including water, to be delivered to the wash water, for example, organic polymeric dispersants, etc.

10 The film may be opaque, transparent or translucent. The film may comprise a printed area. The printed area may cover between 10 and 80% of the surface of the film; or between 10 and 80% of the surface of the film that is in contact with the internal space of the compartment; or between 10 and 80% of the surface of the film and between 10 and 80% of the surface of the compartment.

15 The area of print may cover an uninterrupted portion of the film or it may cover parts thereof, i.e. comprise smaller areas of print, the sum of which represents between 10 and 80% of the surface of the film or the surface of the film in contact with the internal space of the compartment or both.

20 The area of print may comprise inks, pigments, dyes, blueing agents or mixtures thereof. The area of print may be opaque, translucent or transparent.

25 The area of print may comprise a single colour or maybe comprise multiple colours, even three colours. The area of print may comprise white, black, blue, red colours, or a mixture thereof. The print may be present as a layer on the surface of the film or may at least partially penetrate into the film. The film will comprise a first side and a second side. The area of print may be present on either side of the film, or be present on both sides of the film. Alternatively, the area of print may be at least partially comprised within the film itself.

30 The area of print may comprise an ink, wherein the ink comprises a pigment. The ink for printing onto the film has preferably a desired dispersion grade in water. The ink may be of any color including white, red, and black. The ink may be a water-based ink comprising from 10% to 80% or from 20% to 60% or from 25% to 45% per weight of water. The ink may comprise from 20% to 90% or from 40% to 80% or from 50% to 75% per weight of solid.

The ink may have a viscosity measured at 20°C with a shear rate of 1000s⁻¹ between 1 and 600 cPs or between 50 and 350 cPs or between 100 and 300 cPs or between 150 and 250 cPs. The measurement may be obtained with a cone- plate geometry on a TA instruments AR-550 Rheometer.

5 The area of print may be achieved using standard techniques, such as flexographic printing or inkjet printing. Preferably, the area of print is achieved via flexographic printing, in which a film is printed, then moulded into the shape of an open compartment. This compartment is then filled with a detergent composition and a second film placed over the compartment and sealed to the first film. The area of print may be on either or both sides of
10 the film.

Alternatively, an ink or pigment may be added during the manufacture of the film such that all or at least part of the film is coloured.

The film may comprise an aversive agent, for example a bittering agent. Suitable bittering agents include, but are not limited to, naringin, sucrose octaacetate, quinine hydrochloride,
15 denatonium benzoate, or mixtures thereof. Any suitable level of aversive agent may be used in the film. Suitable levels include, but are not limited to, 1 to 5000ppm, or even 100 to 2500ppm, or even 250 to 2000rpm.

Anionic surfactant

The anionic surfactant may be selected from linear alkyl benzene sulfonate, alkyl ethoxylate sulphate and combinations thereof.

20 Suitable anionic surfactants useful herein can comprise any of the conventional anionic surfactant types typically used in liquid detergent products. These include the alkyl benzene sulfonic acids and their salts as well as alkoxylated or non-alkoxylated alkyl sulfate materials.

Exemplary anionic surfactants are the alkali metal salts of C₁₀-C₁₆ alkyl benzene
25 sulfonic acids, or C₁₁-C₁₄ alkyl benzene sulfonic acids. In one aspect, the alkyl group is linear and such linear alkyl benzene sulfonates are known as "LAS". Alkyl benzene sulfonates, and particularly LAS, are well known in the art. Such surfactants and their preparation are described for example in U.S. Pat. Nos. 2,220,099 and 2,477,383. Especially useful are the sodium, potassium and amine linear straight chain alkylbenzene sulfonates in which the

average number of carbon atoms in the alkyl group is from about 11 to 14. Sodium C₁₁-C₁₄, e.g., C₁₂, LAS is a specific example of such surfactants.

Specific, non-limiting examples of anionic surfactants useful herein include the acid or salt forms of: a) C₁₁-C₁₈ alkyl benzene sulfonates (LAS); b) C₁₀-C₂₀ primary, branched-
 5 chain and random alkyl sulfates (AS), including predominantly C₁₂ alkyl sulfates; c) C₁₀-C₁₈ secondary (2,3) alkyl sulfates with non-limiting examples of suitable cations including sodium, potassium, ammonium, amine and mixtures thereof; d) C₁₀-C₁₈ alkyl alkoxy sulfates (AE_xS) wherein x is from 1-30; e) C₁₀-C₁₈ alkyl alkoxy carboxylates in one aspect, comprising 1-5 ethoxy units; f) mid-chain branched alkyl sulfates as discussed in U.S. Pat.
 10 No. 6,020,303 and U.S. Pat. No. 6,060,443; g) mid-chain branched alkyl alkoxy sulfates as discussed in U.S. Pat. No. 6,008,181 and U.S. Pat. No. 6,020,303; h) modified alkylbenzene sulfonate (MLAS) as discussed in WO 99/05243, WO 99/05242, WO 99/05244, WO 99/05082, WO 99/05084, WO 99/05241, WO 99/07656, WO 00/23549, and WO 00/23548; i) methyl ester sulfonate (MES); and j) alpha-olefin sulfonate (AOS).

15 A suitable anionic deterative surfactant is predominantly alkyl C₁₆ alkyl mid-chain branched sulphate. A suitable feedstock for predominantly alkyl C₁₆ alkyl mid-chain branched sulphate is beta-farnesene, such as BioFeneTM supplied by Amyris, Emeryville, California.

The anionic surfactant comprises a fatty acid or fatty acid salts. The fatty acids are
 20 preferably carboxylic acids which are often with a long unbranched aliphatic tail, which is either saturated or unsaturated. Suitable fatty acids include ethoxylated fatty acids. Suitable fatty acids or salts of the fatty acids for the present invention are preferably sodium salts, preferably C₁₂-C₁₈ saturated and/or unsaturated fatty acids more preferably C₁₂-C₁₄ saturated and/or unsaturated fatty acids and alkali or alkali earth metal carbonates preferably
 25 sodium carbonate.

Preferably the fatty acids are selected from the group consisting of lauric acid, myristic acid, palmitic acid, stearic acid, topped palm kernel fatty acid, coconut fatty acid and mixtures thereof.

30 Non-ionic surfactant

Suitable nonionic surfactants useful herein can comprise any of the conventional nonionic surfactant types typically used in liquid detergent products. These include

alkoxylated fatty primary alcohol-based or secondary alcohol-based surfactants and amine oxide surfactants. In one aspect, for use in the liquid detergent products herein are those nonionic surfactants which are normally liquid.

Suitable nonionic surfactants for use herein include the alcohol alkoxylate nonionic surfactants. Alcohol alkoxylates are materials which correspond to the general formula: $R^1(C_mH_{2m}O)_nOH$ wherein R^1 is a C_8 - C_{16} alkyl group, m is from 2 to 4, and n ranges from about 2 to 12. In one aspect, R^1 is an alkyl group, which may be primary or secondary, that comprises from about 9 to 15 carbon atoms, or from about 10 to 14 carbon atoms. In one aspect, the alkoxylated fatty alcohols will also be ethoxylated materials that contain from about 2 to 12 ethylene oxide moieties per molecule, or from about 3 to 10 ethylene oxide moieties per molecule.

The alkoxylated fatty alcohol materials useful in the liquid detergent compositions herein will frequently have a hydrophilic-lipophilic balance (HLB) which ranges from about 3 to 17 from about 6 to 15, or from about 8 to 15. Alkoxylated fatty alcohol nonionic surfactants have been marketed under the trademarks Neodol and Dobanol by the Shell Chemical Company.

Suitable non-ionic surfactants can include ethoxylated nonionic surfactants, which may include primary and secondary alcohol ethoxylates, especially the C_8 - C_{20} aliphatic alcohols ethoxylated with an average of from 1 to 50 or even 20 moles of ethylene oxide per mole of alcohol, and more especially the C_{10} - C_{15} primary and secondary aliphatic alcohols ethoxylated with an average of from 1 to 10 moles of ethylene oxide per mole of alcohol. Non-ethoxylated alcohol nonionic surfactants include alkylpolyglycosides, glycerol monoethers, and polyhydroxyamides (glucamide), glycereth cocoate or mixtures thereof.

The ethoxylated alcohol non-ionic surfactant can be, for example, a condensation product of from 3 to 8 mol of ethylene oxide with 1 mol of a primary alcohol having from 9 to 15 carbon atoms.

The non-ionic surfactant may comprise a fatty alcohol ethoxylate of formula $R(EO)_n$, wherein R represents an alkyl chain between 4 and 30 carbon atoms, (EO) represents one unit of ethylene oxide monomer and n has an average value between 0.5 and 20.

Another suitable type of nonionic surfactant useful herein comprises the amine oxide surfactants. Amine oxides are materials which are often referred to in the art as "semi-polar" nonionics. Amine oxides have the formula: $R(EO)_x(PO)_y(BO)_zN(O)(CH_2R')_2 \cdot qH_2O$. In this


formula, R is a relatively long-chain hydrocarbyl moiety which can be saturated or unsaturated, linear or branched, and can contain from 8 to 20, 10 to 16 carbon atoms, or is a C₁₂-C₁₆ primary alkyl. R' is a short-chain moiety, in one aspect R' may be selected from hydrogen, methyl and --CH₂OH. When x+y+z is different from 0, EO is ethyleneoxy, PO is propyleneoxy and BO is butyleneoxy. Amine oxide surfactants are illustrated by C₁₂₋₁₄ alkyldimethyl amine oxide.

Non-limiting examples of nonionic surfactants include: a) C₁₂-C₁₈ alkyl ethoxylates, such as, NEODOL® nonionic surfactants from Shell; b) C₆-C₁₂ alkyl phenol alkoxyates wherein the alkoxyate units are a mixture of ethyleneoxy and propyleneoxy units; c) C₁₂-C₁₈ alcohol and C₆-C₁₂ alkyl phenol condensates with ethylene oxide/propylene oxide block polymers such as Pluronic® from BASF; d) C₁₄-C₂₂ mid-chain branched alcohols, BA, as discussed in U.S. Pat. No. 6,150,322; e) C₁₄-C₂₂ mid-chain branched alkyl alkoxyates, BAE_x, wherein x is from 1-30, as discussed in U.S. Pat. No. 6,153,577, U.S. Pat. No. 6,020,303 and U.S. Pat. No. 6,093,856; f) alkylpolysaccharides as discussed in U.S. Pat. No. 4,565,647 to Llenado, issued Jan. 26, 1986; specifically alkylpolyglycosides as discussed in U.S. Pat. No. 4,483,780 and U.S. Pat. No. 4,483,779; g) polyhydroxy fatty acid amides as discussed in U.S. Pat. No. 5,332,528, WO 92/06162, WO 93/19146, WO 93/19038, and WO 94/09099; and h) ether capped poly(oxyalkylated) alcohol surfactants as discussed in U.S. Pat. No. 6,482,994 and WO 01/42408.

Cationic Polymer

The cationic polymer is a hydroxyethyl cellulose polymer. Preferably, the hydroxyethyl cellulose polymer is derivatised with trimethyl ammonium substituted epoxide. The polymer may have a molecular weight of between 100,000 and 800,000 daltons.

Preferred cationic cellulose polymers for use herein include those which may or may not be hydrophobically-modified, including those having hydrophobic substituent groups, having a molecular weight of from 100,000 to 800,000. These cationic polymers have repeating substituted anhydroglucose units that correspond to the general Structural Formula I as follows:

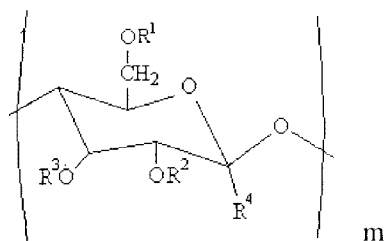**Structural Formula I**

wherein:

- a. m is an integer from 20 to 10,000
- 5 b. Each R^4 is H, and R^1 , R^2 , R^3 are each independently selected from the group consisting of: H; C_1 - C_{32} alkyl; C_1 - C_{32} substituted alkyl, C_5 - C_{32} or C_6 - C_{32} aryl, C_5 - C_{32} or C_6 - C_{32} substituted aryl or C_6 - C_{32} alkylaryl, or C_6 - C_{32} substituted alkylaryl,

and $\left(\text{CH}_2 \overset{\text{R}^5}{\underset{|}{\text{CH}}} - \text{O} \right)_n \text{Rx}$. Preferably, R^1 , R^2 , R^3 are each independently selected from


the group consisting of: H; C_1 - C_4 alkyl; $\left(\text{CH}_2 \overset{\text{R}^5}{\underset{|}{\text{CH}}} - \text{O} \right)_n$; and mixtures thereof;

10

wherein:


n is an integer selected from 0 to 10 and

Rx is selected from the group consisting of: R_5 ;

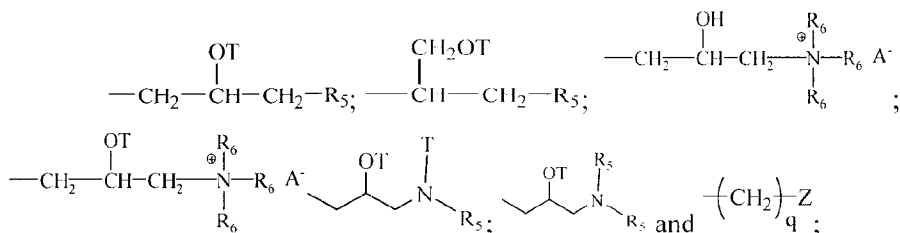

15

wherein said polysaccharide comprises at least one Rx , and said Rx has a structure selected from the group consisting of:



wherein A^- is a suitable anion. Preferably, A^- is selected from the group consisting of: Cl^- , Br^- , I^- , methylsulfate, ethylsulfate, toluene sulfonate, carboxylate, and phosphate;

Z is selected from the group consisting of carboxylate, phosphate, phosphonate, and sulfate.

q is an integer selected from 1 to 4;

each R_5 is independently selected from the group consisting of: H; C_1 - C_{32} alkyl; C_1 - C_{32} substituted alkyl, C_5 - C_{32} or C_6 - C_{32} aryl, C_5 - C_{32} or C_6 - C_{32} substituted aryl, C_6 - C_{32} alkylaryl, C_6 - C_{32} substituted alkylaryl, and OH. Preferably, each R_5 is selected from the group consisting of: H, C_1 - C_{32} alkyl, and C_1 - C_{32} substituted alkyl. More preferably, R_5 is selected from the group consisting of H, methyl, and ethyl.

Each R_6 is independently selected from the group consisting of: H, C_1 - C_{32} alkyl, C_1 - C_{32} substituted alkyl, C_5 - C_{32} or C_6 - C_{32} aryl, C_5 - C_{32} or C_6 - C_{32} substituted aryl, C_6 - C_{32} alkylaryl, and C_6 - C_{32} substituted alkylaryl. Preferably, each R_6 is selected from the group consisting of: H, C_1 - C_{32} alkyl, and C_1 - C_{32} substituted alkyl.

Each T is independently selected from the group: H, $\left(CH_2 - \overset{OT}{\underset{|}{CH}} - CH_2 - O \right)_v R_5$, $\left(CH - \overset{CH_2OT}{\underset{|}{CH_2}} - O \right)_v R_5$, and $-CH_2 - \overset{OH}{\underset{|}{CH}} - CH_2 - R_5$; $-CH - \overset{CH_2OH}{\underset{|}{CH_2}} - R_5$;

wherein each v in said polysaccharide is an integer from 1 to 10. Preferably, v is an integer from 1 to 5. The sum of all v indices in each R_x in said polysaccharide is an integer from 1 to 30, more preferably from 1 to 20, even more preferably from 1 to

10. In the last $-CH_2 - \overset{OT}{\underset{|}{CH}} - CH_2 - O - R_5$, $-CH - \overset{CH_2OT}{\underset{|}{CH_2}} - O - R_5$; $-CH_2 - \overset{OT}{\underset{|}{CH}} - CH_2 - R_5$ or $-CH - \overset{CH_2OT}{\underset{|}{CH_2}} - R_5$ group in a chain, T is always an H.

Alkyl substitution on the anhydroglucose rings of the polymer may range from 0.01% to 5% per glucose unit, more preferably from 0.05% to 2% per glucose unit, of the polymeric material.

The cationic cellulose may be lightly cross-linked with a dialdehyde, such as glyoxal, to prevent forming lumps, nodules or other agglomerations when added to water at ambient temperatures.

The cationic cellulose polymers of Structural Formula I likewise include those which are commercially available and further include materials which can be prepared by conventional chemical modification of commercially available materials. Commercially available cellulose polymers of the Structural Formula I type include those with the INCI name Polyquaternium 10, such as those sold under the trademarks: Ucare Polymer JR 30M, JR 400, JR 125, LR 400 and LK 400 polymers; Polyquaternium 67 such as those sold under the trademark Softcat SK™, all of which are marketed by Amerchol Corporation, Edgewater NJ; and Polyquaternium 4 such as those sold under the trademark: Celquat H200 and Celquat L-200, available from National Starch and Chemical Company, Bridgewater, NJ. Other suitable polysaccharides include hydroxyethyl cellulose or hydroxypropylcellulose quaternized with glycidyl C₁₂-C₂₂ alkyl dimethyl ammonium chloride. Examples of such polysaccharides include the polymers with the INCI names Polyquaternium 24 such as those sold under the trademark Quaternium LM 200 by Amerchol Corporation, Edgewater NJ. Cationic starches described by D. B. Solarek in Modified Starches, Properties and Uses published by CRC Press (1986) and in U.S. Pat. No. 7,135,451, col. 2, line 33 – col. 4, line 67.

The hydroxyethyl cellulose polymer may be added to the composition as a particle. It may be present in the composition of the particle or may be also be present as a liquid, or a mixture thereof.

The cationic polymer may be present at a level of between 0.1% and 1%, or even between 0.2% and 0.6% by weight of the of composition. Preferably, the cationic polymer may be present at a level of between 0.1% and 1%, or even between 0.2% and 0.6% by weight of the of composition.

25 Adjunct ingredients

The adjunct laundry detergent ingredient may be selected from bleach, bleach catalyst, dye, hucing agents, cleaning polymers, alkoxylated polyamines, polyethyleneimines, alkoxylated polyethyleneimines, soil release polymers, amphiphilic graft polymers, surfactants, solvents, dye transfer inhibitors, chelants, enzymes, perfumes, encapsulated perfumes, perfume delivery agents, suds suppressor, brighteners, polycarboxylates, structurants, anti-oxidants, deposition aids, silicones, clays, sucrose esters and mixtures thereof.

Hueing dye: The liquid laundry detergent composition may comprise a hueing dye. The hueing dyes employed in the present laundry care compositions may comprise polymeric or non-polymeric dyes, pigments, or mixtures thereof. Preferably the hueing dye comprises a polymeric dye, comprising a chromophore constituent and a polymeric constituent. The chromophore constituent is characterized in that it absorbs light in the wavelength range of blue, red, violet, purple, or combinations thereof upon exposure to light. In one aspect, the chromophore constituent exhibits an absorbance spectrum maximum from about 520 nanometers to about 640 nanometers in water and/or methanol, and in another aspect, from about 560 nanometers to about 610 nanometers in water and/or methanol.

Although any suitable chromophore may be used, the dye chromophore is preferably selected from benzodifuranes, methine, triphenylmethanes, naphthalimides, pyrazole, naphthoquinone, anthraquinone, azo, oxazine, azine, xanthene, triphenodioxazine and phthalocyanine dye chromophores. Mono and di-azo dye chromophores are preferred.

The hueing dye may comprise a dye polymer comprising a chromophore covalently bound to one or more of at least three consecutive repeat units. It should be understood that the repeat units themselves do not need to comprise a chromophore. The dye polymer may comprise at least 5, or at least 10, or even at least 20 consecutive repeat units.

The repeat unit can be derived from an organic ester such as phenyl dicarboxylate in combination with an oxyalkyleneoxy and a polyoxyalkyleneoxy. Repeat units can be derived from alkenes, epoxides, aziridine, carbohydrate including the units that comprise modified celluloses such as hydroxyalkylcellulose; hydroxypropyl cellulose; hydroxypropyl methylcellulose; hydroxybutyl cellulose; and, hydroxybutyl methylcellulose or mixtures thereof. The repeat units may be derived from alkenes, or epoxides or mixtures thereof. The repeat units may be C2-C4 alkyleneoxy groups, sometimes called alkoxy groups, preferably derived from C2-C4 alkylene oxide. The repeat units may be C2-C4 alkoxy groups, preferably ethoxy groups.

For the purposes of the present invention, the at least three consecutive repeat units form a polymeric constituent. The polymeric constituent may be covalently bound to the chromophore group, directly or indirectly via a linking group. Examples of suitable polymeric constituents include polyoxyalkylene chains having multiple repeating units. In one aspect, the polymeric constituents include polyoxyalkylene chains having from 2 to about 30 repeating units, from 2 to about 20 repeating units, from 2 to about 10 repeating units or

even from about 3 or 4 to about 6 repeating units. Non-limiting examples of polyoxyalkylene chains include ethylene oxide, propylene oxide, glycidol oxide, butylene oxide and mixtures thereof.

Chelant: The compositions herein may also optionally contain one or more copper, iron
 5 and/or manganese chelating agents. If utilized, chelating agents will generally comprise from about 0.1% by weight of the compositions herein to about 15%, or even from about 3.0% to about 15% by weight of the compositions herein. Suitable chelants may be selected from: diethylene triamine pentaacetate, diethylene triamine penta(methyl phosphonic acid), ethylene diamine-N'N'-disuccinic acid, ethylene diamine tetraacetate, ethylene diamine
 10 tetra(methylene phosphonic acid), hydroxyethane di(methylene phosphonic acid), and any combination thereof. A suitable chelant is ethylene diamine-N'N'-disuccinic acid (EDDS) and/or hydroxyethane diphosphonic acid (HEDP). The laundry detergent composition may comprise ethylene diamine-N'N'-disuccinic acid or salt thereof. The ethylene diamine-N'N'-disuccinic acid may be in S,S enantiomeric form. The composition may comprise 4,5-
 15 dihydroxy-m-benzenedisulfonic acid disodium salt, glutamic acid-N,N-diacetic acid (GLDA) and/or salts thereof, 2-hydroxypyridine-1-oxide, Trilon PTM available from BASF, Ludwigshafen, Germany. Suitable chelants may also be calcium carbonate crystal growth inhibitors. Suitable calcium carbonate crystal growth inhibitors may be selected from the group consisting of: 1-hydroxyethanediphosphonic acid (HEDP) and salts thereof; N,N-
 20 dicarboxymethyl-2-aminopentane-1,5-dioic acid and salts thereof; 2-phosphonobutane-1,2,4-tricarboxylic acid and salts thereof; and any combination thereof.

The composition may comprise a calcium carbonate crystal growth inhibitor, such as one selected from the group consisting of: 1-hydroxyethanediphosphonic acid (HEDP) and salts thereof; N,N-dicarboxymethyl-2-aminopentane-1,5-dioic acid and salts thereof; 2-
 25 phosphonobutane-1,2,4-tricarboxylic acid and salts thereof; and any combination thereof.

Polymers: Suitable polymers include carboxylate polymers, polyethylene glycol polymers, polyester soil release polymers such as terephthalate polymers, amine polymers, cellulosic polymers, dye transfer inhibition polymers, dye lock polymers such as a condensation oligomer produced by condensation of imidazole and epichlorhydrin, optionally in a ratio of
 30 1:4:1, hexamethylenediamine derivative polymers, and any combination thereof.

Enzymes: The compositions can comprise one or more detergent enzymes which provide cleaning performance and/or fabric care benefits. Examples of suitable enzymes include, but

are not limited to, hemicellulases, peroxidases, proteases, cellulases, xylanases, lipases, phospholipases, esterases, cutinases, pectinases, keratanases, reductases, oxidases, phenoloxidases, lipoxygenases, ligninases, pullulanases, tannases, pentosanases, malanases, β -glucanases, arabinosidases, hyaluronidase, chondroitinase, laccase, and amylases, or
 5 mixtures thereof. A typical combination is a cocktail of conventional applicable enzymes like protease, lipase, cutinase and/or cellulase in conjunction with amylase.

Solvent: The composition may comprise a solvent. The solvent preferably has molecular weight of less than 1500, more preferably less than 1000, even more preferably less than 700, even more preferably below 500. The solvent preferably has a molecular weight of greater
 10 than 10.

The solvent may be selected from alcohols, diols, monoamine derivatives, glycols, polyalkylane glycols, such as polyethylene glycol, propane diol, monoethanolamine or mixtures thereof.

The solvent may be selected from the group comprising of polyethylene glycol (PEG) polymer having molecular weight between 300 and 600, dipropylene glycol (DPG), n-butoxy propoxy propanol (nBPP) and mixtures thereof. More preferably the solvent may be selected from the group comprising polyethylene glycol (PEG) polymer having molecular weight between 400 and 600, dipropylene glycol (DPG), n-butoxy propoxy propanol (nBPP), polypropylene glycol (PPG) and mixtures thereof.

Structurant: The composition may comprise a structurant. Any suitable structurant may be used, however hydrogenated castor oil structurants such as commercially available Thixcin™ are preferred. The structurant may be selected from non-polymeric or polymeric structurants. The structurant may be a non-polymeric structurant, preferably a crystallisable glyceride. The structurant may be a polymeric structurant, preferably a fibre based polymeric
 20 structurant, more preferably a cellulose based fibre-based structurant.

Other polymeric structurants are selected from the group consisting of: hydrophobically-modified ethoxylated urethanes (HEUR); hydrophobically modified alkali swellable emulsion (HASE), and mixtures thereof.

Suds suppressor: The composition may comprise a suds suppressor, preferably a siloxane-based polymer suds suppressor (herein also referred to simply as 'suds suppressor'). The suds suppressor may be an organomodified siloxane polymer. The organomodified siloxane polymers may comprise aryl or alkylaryl substituents optionally combined with silicone resin
 30

and/or modified silica. In one embodiment, the suds suppressor is selected from organomodified silicone polymers with aryl or alkylaryl substituents combined with silicone resin and optionally a primary filler. Particularly preferred are silicone suds suppressor compounds consisting of organomodified silicone polymers with aryl or alkylaryl substituents combined with silicone resin and modified silica as described in US Patents 6,521,586 B1, 6,521,587 B1, US Patent Applications 2005 0239908 A1, 2007 01673 A1 to Dow Corning Corp. and US Patent Application 2008 0021152 A1 to Wacker Chemie AG.

Anti-oxidant: The liquid laundry detergent composition may comprise an anti-oxidant. The antioxidant is preferably selected from the group consisting of butylated hydroxyl toluene (BHT), butylated hydroxyl anisole (BHA), trimethoxy benzoic acid (TMBA), α , β , λ and δ tocopherol (vitamin E acetate), 6 hydroxy-2,5,7,8 – tetra-methylchroman -2-carboxylic acid (trolox), 1,2, benzisothiazoline - 3-one (proxel GLX), tannic acid, galic acid, Tinoguard™ AO-6, Tinoguard TS, ascorbic acid, alkylated phenol, ethoxyquine 2,2,4 trimethyl, 1-2-dihydroquinoline, 2,6 di or tert or butyl hydroquinone, tert-butyl-hydroxyl anisole, lignosulphonic acid and salts thereof, benzofuran, benzopyran, tocopherol sorbate, butylated hydroxyl benzoic acid and salts thereof, galic acid and its alkyl esters, uric acid, salts thereof and alkyl esters, sorbic acid and salts thereof, dihydroxy fumaric acid and salts thereof, and mixtures thereof. Preferred antioxidants are those selected from the group consisting of alkali and alkali earth metal sulfites and hydrosulfites, more preferably sodium sulfite or hydrosulfite.

Water: The liquid laundry detergent composition comprises between 0.5 and 25wt% water or even between 1 and 15wt% water.

The liquid laundry detergent composition may comprise from 2% to 20% or even from 3% to 15% by weight of the composition of water.

Process of making

Any suitable process can be used to make the composition of the present invention. Those skilled in the art will be familiar with suitable processes known in the art.

Method of Use

The composition or unit dose article of the present invention can be added to a wash liquor to which laundry is already present, or to which laundry is added. It may be used in an

automatic washing machine operation and added directly to the drum or to the dispenser drawer. It may be used in combination with other laundry detergent compositions such as fabric softeners or stain removers. It may be used as pre-treat composition on a stain prior to being added to a wash liquor.

5

EXAMPLES

Example 1

Below are liquid detergent compositions with different surfactant ratios. Example A is part of the invention, whereas examples B, C and D are outside of the scope of the present invention.

10

Ingredients (All levels are in weight percent of the composition.)	A	B	C	D
Linear C ₉ -C ₁₅ Alkylbenzene sulfonic acid	20.5	15.9	11.0	18.2
C12-14 alkyl ethoxy 3 sulfate	13.7	10.6	7.3	12.2
C ₁₂₋₁₄ alkyl 7-ethoxylate	3.9	13.3	22.8	8.6
Citric Acid	0.7	0.7	0.7	0.7
Fatty acid	10.8	10.8	10.8	10.8
Chelants	0.8	0.8	0.8	0.8
Cleaning polymers	3.2	3.2	3.2	3.2
Cationically modified hydroxy-ethyl cellulose	0.45	0.45	0.45	0.45
Enzymes	0.05	0.05	0.05	0.05
Structurant	0.16	0.16	0.16	0.16
Solvent system*	21.6	21.6	21.6	21.6
Water	10.3	10.3	10.3	10.3
Perfume	1.7	1.7	1.7	1.7
Perfume micro capsules (expressed as % encapsulated oil)	0.63	0.63	0.63	0.63
Mono-ethanolamine or NaOH (or mixture thereof)	neutralize to pH to about 7.4			
Other laundry adjuncts / minors	to 100%			

*May include, but not limited to propanediol, glycerol, ethanol, dipropyleneglycol, polyetheleneglycol, polypropyleneglycol.

28g of formulations A to D, encapsulated in a PVA-film (multi compartment - cationically modified hydroxy-ethyl cellulose separated from enzymes), were washed (Miele™ W1714 short cotton cycle at 40°C, 2.5mmol/L water hardness) 4 consecutive times together with terry tracers and 2.5kg of mixed (cotton and poly-cotton) ballast load. In

15

between the cycles, the terry tracers were tumble dried. After the 4th cycle, the terry fabrics were line-dried at a constant temperature (21°C) and relative humidity (50%). The next day, the terry tracers were equilibrated for 4 hours at 23°C/55%RH and while the conditions were kept constant, the kinetic coefficient of friction was measured using a Thwing Albert™ Friction Peel Tester FP-2250. A load cell of 2kg was used to pull a sled of 200g. The distance between the load cell and the sled was fixed to 4 inches (10.16cm), using a permanent string.

The test sample was put on the sample plate, oriented so that the weft is vertical and warp was horizontal. The grain of the loops should be pointing toward the left. The drag area of the terry was 4.5 in. x 2.5 in. (11.43cm x 6.35cm). A 4.5in. x 2.5in. (11.43cm x 6.35cm) sled cut sample (cut from the same test sample) was attached to the clamping sled with the face down (so that the face of the fabric on the sled is pulled across the face of the fabric on the sample plate). The loops/grain of the fabric on the sled were oriented such that when the sled is pulled, the fabric is pulled against the loops/grain.

The Thwing Albert was set to the following procedure: 5.0 seconds static measurement, followed by a 10 seconds kinetic measurement. The test rate was 20cm/minute. The crosshead height was 25mm.

The sled was placed on the swatch and attached to the load cell by securing the string to the sled hook. The crosshead was moved to the right until the load cell registers a force (~1.0 – 2.0gf). Then, the crosshead is moved back to the left until the load reads 0.0gf.

The measurement was started and the kinetic coefficient of friction of 10 replicates was recorded. The average values can be found in the table below.

	A	B	C	D
Kinetic coefficient of friction	1.50	1.62	1.60	1.60

Applying a student t- test on each individual pair, the following p-values and significances were extracted from a statistical software package (JMP):

p-value	A	Significance	C	Significance	D	Significance
B vs.	<0.001	Yes	0.2442	No	0.3061	No
C vs.	<0.001	Yes				
D vs.	<0.001	Yes	0.9380	No		

As can be seen from the results, the composition of the present invention provided improved softness to fabrics that had been washed with the composition as compared to fabrics washed with compositions outside of the scope. The difference in perceived softness was statistically relevant.

- 5 The dimensions and values disclosed herein are not to be understood as being strictly limited to the exact numerical values recited. Instead, unless otherwise specified, each such dimension is intended to mean both the recited value and a functionally equivalent range surrounding that value. For example, a dimension disclosed as “40 mm” is intended to mean “about 40 mm.”

CLAIMS

1. A water-soluble unit dose article comprising a water-soluble film and a liquid composition,

the water-soluble unit dose article comprising at least two compartments,

the liquid composition being a liquid laundry detergent composition comprising an anionic surfactant, a non-ionic surfactant, between about 0.5wt% and about 25wt% water, and between about 0.05% and about 2% by weight of the composition of a cationic polymer being an hydroxyethyl cellulose polymer derivatised with trimethyl ammonium substituted epoxide,

wherein the anionic surfactant comprises fatty acid, and wherein the non-ionic surfactant is selected from the group consisting of alcohol alkoxylate non-ionic surfactant, amine oxide surfactant, and mixtures thereof; and

wherein;

the weight ratio of cationic polymer to anionic surfactant is less than 1:5;

the weight ratio of cationic polymer to non-ionic surfactant is more than 1:10;

the weight ratio of cationic polymer to total surfactant is less than 1:5;

and wherein the weight ratio of anionic to non-ionic surfactant is from about 5:1 to about 23:1,

wherein 'total surfactant' means the level of all surfactant present in the liquid laundry detergent composition, and

wherein the cationic polymer is present in the composition as a particle.

2. The water-soluble unit dose article according to claim 1, wherein the weight ratio of anionic to non-ionic surfactant is from about 5:1 to about 20:1.

3. The water-soluble unit dose article according to claim 1, wherein the weight ratio of anionic to non-ionic surfactant is from about 5:1 to about 18:1.

4. The water-soluble unit dose article according to claim 1, wherein the weight ratio of the anionic to non-ionic surfactant is from about 5:1 to about 15:1.

5. The water-soluble unit dose article according to claim 1, wherein the non-ionic surfactant comprises a fatty alcohol ethoxylate of formula $R(EO)_n$, wherein R represents an alkyl chain between 4 and 30 carbon atoms, (EO) represents one unit of ethylene oxide monomer and n has an average value between 0.5 and 20.
6. The water-soluble unit dose article according to claim 1, wherein the cationic polymer has a molecular weight of between about 100,000 and about 800,000 daltons.
7. The water-soluble unit dose article according to claim 1, wherein the anionic surfactant comprises linear alkylbenzene sulphonate.
8. The water-soluble unit dose article according to claim 1, wherein the cationic polymer is present at a level of between about 0.1% and about 1% by weight of the composition.
9. The water-soluble unit dose article according to claim 8, wherein the cationic polymer is present at a level of between about 0.2% and about 0.6% by weight of the of composition.
10. The water-soluble unit dose article according to claim 1, wherein the composition comprises a perfume, an encapsulated perfume, or a mixture thereof.
11. The water-soluble unit dose article according to claim 1, comprising an adjunct laundry detergent ingredient, wherein the adjunct laundry detergent ingredient is selected from bleach, bleach catalyst, dye, hueing agents, cleaning polymers, alkoxylated polyamines, polyethyleneimines, alkoxylated polyethyleneimines, soil release polymers, amphiphilic graft polymers, surfactants, solvents, dye transfer inhibitors, chelants, enzymes, perfumes, encapsulated perfumes, perfume delivery agents, suds suppressor, brighteners, polycarboxylates, structurants, anti-oxidant, deposition aids, silicones, clays, sucrose esters and mixtures thereof.
12. The water-soluble unit dose article according to claim 1, comprising at least three compartments.

13. The water-soluble unit dose article according to claim 1, where the compartments are arranged in a superposed orientation or in a side-by-side orientation.
14. The water-soluble unit dose article according to claim 1, wherein the article comprises enzymes in a compartment separate from the liquid composition comprising the cationic polymer.