

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
17 March 2005 (17.03.2005)

PCT

(10) International Publication Number  
**WO 2005/024134 A1**

(51) International Patent Classification<sup>7</sup>: **D21H 25/10**,  
B05C 11/04

(74) Agents: **RUSSELL, Nan** et al.; Fasth Law Offices, 629 E.  
Boca Raton Road, Phoenix, AZ 85022 (US).

(21) International Application Number:  
PCT/SE2004/001166

(81) Designated States (*unless otherwise indicated, for every  
kind of national protection available*): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(22) International Filing Date: 4 August 2004 (04.08.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10/659,853 11 September 2003 (11.09.2003) US

(71) Applicant (*for all designated States except US*): **ULTRA  
TECHNOLOGY EUROPE AB** [SE/SE]; Videum Sci-  
ence Park, S-351 98 Vaxjo (SE).


(84) Designated States (*unless otherwise indicated, for every  
kind of regional protection available*): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **DAHLBERG, Hakan**  
[SE/SE]; Bellmansgatan 48, S-754 26 Uppsala (SE).

[Continued on next page]

(54) Title: DRY END SURFACE TREATMENT USING ULTRASONIC TRANSDUCERS

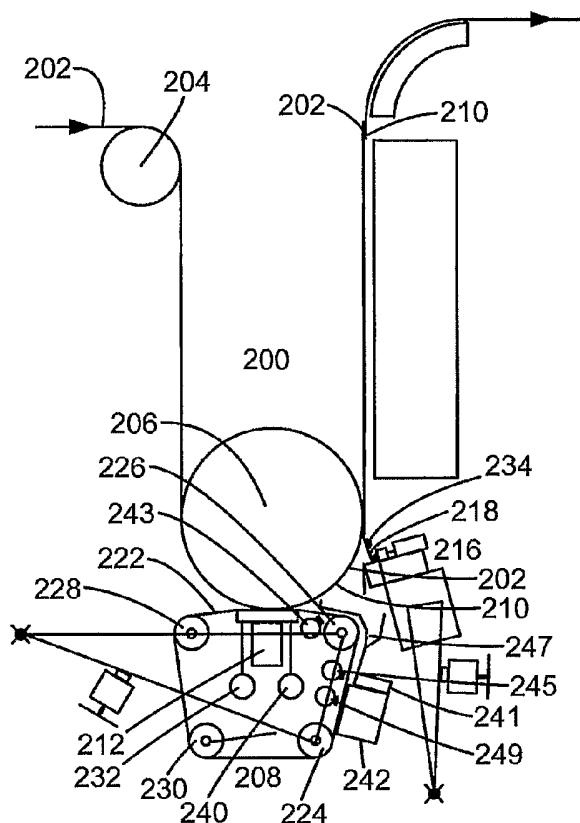

(57) Abstract: The method is for applying a coating  
on a paper substance. A paper moves over a set of  
rollers. A coating is applied with a coating applica-  
tor that has ultrasonic transducers to vibrate the coat-  
ing to reduce the viscosity of the coating. A down-  
stream blade has an ultrasonic transducer in operative  
engagement with the blade. The vibrating blade is ap-  
plied to the paper for scraping off excessive coating  
from the paper.



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, — *with amended claims*  
GW, ML, MR, NE, SN, TD, TG).

**Published:**

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

DRY END SURFACE TREATMENT USING ULTRASONIC TRANSDUCERSTechnical Field

5       The present invention is a method for a paper machine dry end or off line coater paper surface treatment using ultrasonic transducers.

Background and Summary of Invention

10       Ultrasonic energy has been applied to liquids in the past. Sufficiently intense ultrasonic energy applied to a liquid, such as water, produces cavitation that can induce changes in the physiochemical characteristics of the liquid. The subject of sonochemistry, which deals with phenomena of that sort, has grown very much during recent years.

15       The published material in sonochemistry and related subjects all pertains to batch processes, that is, the liquid solution or dispersion to be treated is placed in a container. The liquid in the container is then stirred or otherwise agitated, and ultrasound is applied thereto. It is then  
20       necessary to wait until the desired result, physical or chemical change in the liquid, is achieved, or until no improvement in the yield is observed. Then the ultrasound is turned off and the liquid extracted. In this way liquid does not return to its initial state prior to the treatment with  
25       ultrasonic energy. In this respect, the ultrasound treatment is regarded as irreversible or only very slowly reversible.

Far from all industrial processes using liquids are

appropriately carried out in batches, as described above. In fact, almost all large-scale processes are based upon continuous processing. The reasons for treating liquids in continuous processes are many. For example, the fact that a given process may not be irreversible, or only slowly reversible, and requires that the liquid be immediately treated further before it can revert to its previous state.

Shock waves external to collapsing bubbles driven onto violent oscillation by ultrasound are necessary for most if not all physiochemical work in liquid solutions. The under-pressure pulses form the bubbles and the pressure pulses compress the bubbles and consequently reduce the bubble diameter. After sufficient number of cycles, the bubble diameter is increased up to the point where the bubble has reached its critical diameter whereupon the bubble is driven to a violent oscillation and collapses whereby a pressure and temperature pulse is generated. A very strong ultrasound field is forming more bubbles, and drives them into violent oscillation and collapse much quicker.

A bubble that is generated within a liquid in motion occupies a volume within said liquid, and will follow the speed of flow within said liquid. The weaker ultrasound field it is exposed to, the more pulses it will have to be exposed to in order to come to a violent implosion. This means that the greater the speed of flow is, the stronger the ultrasound field will have to be in order to bring the bubbles to violent implosion and collapse. Otherwise, the bubbles will leave the

ultrasound field before they are brought to implosion. A strong ultrasound field requires the field to be generated by very powerful ultrasound transducers, and that the energy these transducers generate is transmitted into the liquid to be treated. Based upon this requirement, Bo Nilsson and Håkan Dahlberg started a development of new types of piezoelectric transducer that could be driven at voltages up to 13 kV, and therefore capable of generating very strong ultrasonic fields.

A very strong ultrasonic source will cause a cushion of bubbles near the emitting surface. The ultrasound cannot penetrate through this cushion, and consequently no ultrasound can penetrate into the medium to be treated. The traditional way to overcome this problem is to reduce the power in terms of watts per unit area of emitting surface applied to the ultrasonic transducers. As indicated above, the flow speed of the medium to be treated will require a stronger ultrasound field and therefore an increased power applied to the ultrasonic transducers. The higher the power input is, the quicker the cushion is formed, and the thicker the formed cushion will be. A thick cushion will completely stop all ultrasound penetration into a liquid located on the other side of this cushion. All the cavitation bubbles in this cushion will then stay in the cushion and cause severe cavitation damage to the ultrasound transducer assembly area leading to a necessary exchange of that part of the ultrasound system. This means that little or no useful ultrasound effect is achieved within the substrate to be treated, and that the

ultrasound equipment may be severely damaged.

The above problems also apply to the application of coating to papers. There is a need for a more effective way of applying a coating, removing excess coating from and  
5 forming a smooth coating surface on a movable paper substance when the coating color has very high dry solids content.

The method of the present invention provides a solution to the above outline problems. More particularly, the method is for applying a coating on a paper substance. A  
10 paper moves over a set of rollers. A coating is applied with a coating applicator that has ultrasonic transducers to vibrate the coating to reduce the viscosity of the coating. A downstream blade has an ultrasonic transducer in operative engagement with the blade. The vibrating blade is applied to  
15 the paper for scraping off excessive coating from the paper. The ultrasonic energy of the blade makes it possible to use a coating with a higher dryness so that there is less water to dry up and remove and still get a smooth coating surface.

## 20 Brief Description of the Drawings

Fig. 1 is a schematic side view of the formation of a reactor of a prior art system;

Fig. 2 is a graphical illustration of the correlation between iodine yield and acoustic power;

25 Fig. 3 is a perspective view of the transducer system of the present invention disposed below a movable endless member;

Fig. 4 is a cross-sectional view along line 4-4 in Fig. 3;

Fig. 5 is an enlarged view of cavitation bubbles dispersed in slurry disposed above the movable endless medium.

5 Fig. 6 is a cross-sectional view of a second embodiment of the transducer system of the present invention;

Fig. 7 is a cross-sectional view of a plurality of transducers disposed below a movable endless medium;

10 Fig. 8 is a cross-sectional view of a paper machine dry end paper surface treatment device;

Fig. 9 is a detailed view of a blade;

Fig. 10 is a cross-sectional view of a paper machine dry end paper surface treatment device with a bent blade;

15 Fig. 11 is a top view of a blade holder with grooves and ultrasonic transducers placed along a width of the blade holder;

Fig. 12 is a detailed view of a blade holder with an ultrasonic transducer and a stiff blade that together act as a sonotrode and transfers wave energy to the blade tip;

20 Fig. 13 is a top view and a side view of the pressure device, built as a sonotrode, used in Fig. 10; and

Fig. 14 is a side view of the pressure device, built as a sonotrode, used in Fig. 10; and

25 Fig. 15 is a side view of the sonotrode used in Fig. 12 combined with a short dwell time applicator for thin paper.

Detailed Description

Fig. 1 is a side view of a prior art transducer system 10 that has a container 11, such as a stainless reactor, with a wall 12 for containing a liquid 13. A transducer 14 is attached to an outside 16 of the wall 12. When the transducer 14 is activated, a pillow 18 of cavitation bubbles 20 are formed on an inside 22 of the wall 12 due to the fracture zone in the liquid 13 that may be a result of fracture impressions on the inside 22 of the wall 12. The bubbles may be held to the inside wall due to the surface tension of the liquid 13. The bubbles 20 are good insulators and prevent the effective transmission of the ultrasonic energy into the liquid 13. The under-pressure pulses of the ultrasonic energy transmitted by the transducer 14 create the cavitation bubbles. In this way, the pressure inside the bubbles is very low.

Fig. 2 is a graphical illustration that shows the iodine yield is affected by increased acoustic power on the system 10. The more power is applied, the thicker the formation of the bubbles 20, as shown in Fig. 1, and the yield increase is reduced and drops sharply at power ratings over 100 Watts in this case. In this way, the cavitation bubbles severely limit the usefulness of increasing the acoustic power to improve the iodine yield.

Fig. 3 is a perspective view of the transducer system 100 of the present invention. The system has a movable endless permeable medium 102, such as a woven material, paper

machine plastic wire or any other bendable medium permeable to liquids, that is rotatable about rollers 104 that guide the medium 102 in an endless path. As explained below, it is important that the medium is permeable to a liquid that may carry ultrasonic energy to the liquid disposed above the medium 102 so as to effectively create the cavitation bubbles in the liquid or slurry to be treated. The ultrasonic energy may be used to reduce flocculation 163, best shown in Fig. 5A, of fibers in the liquid to be treated because the bubbles implode or collapse to generate pressure pulses to the fiber flocculation 163 so that the fibers are separated from one another to evenly distribute or disperse the fibers in the liquid. The pressure pulses may be about 500 to 1000 bars so the pulses are more forceful than the forces that keep the fiber flocculation together. In general, the longer the fibers are or the higher the fiber consistency is, the higher the tendency of flocculation.

The medium may have a rotational speed up to 2000 meters per minute in a forward direction as shown by an arrow (F). An elongate foil 106, made of, for example, steel or titanium is disposed below the permeable medium 102 and extends across a width (W) of the medium 102. A plurality of transducers 108, such as magnetostrictive, piezoelectric or any other suitable type of transducers, is in operative engagement with the foil 106 such as by being integrated therewith or attached thereto.

Fig. 4 is a detailed view of one of the

transducers 108 attached to a mid-portion 118 of the hydrodynamic foil 106. More particularly, the foil 106 has a rear portion 110 and a front portion 112. The rear portion 110 has a rectangular extension 114 that extends away from a top surface 116 of the foil 106. The mid-portion 118 of the foil 106 has a threaded outside 120 of a connecting member 122 also extending away from the top surface 116 so that a cavity 124 is formed between the extension 114 and the connecting member 122.

10           The front portion 112 has an extension 126 that extends away from the top surface 116 and has a back wall 128 that is perpendicular to a bottom surface 130 of the foil 106 so that a cavity 132 is formed between the back wall 128 and the member 122. The extension 126 has a front wall 134 that  
15           forms an acute angle  $\alpha$  with the top surface 116. The cavities 124 and 132 provide resonance to the ultrasound transmitted by the transducers 108 to reinforce the amplitude of the vibrations of the ultrasound. The front wall 134 forms an acute angle  $\alpha$  with a top surface 116 of the foil 106 to  
20           minimize the pressure pulse when the water layer under the member is split by the front wall 134 so a larger part of the water is going down and only a minor part is going between the top side of the foil 116 and the member 102. When the member 102 is moving over the foil surface 116 a speed dependant  
25           under-pressure is created that will force down the member 102 against the foil surface 116. When the member is leaving the foil 106 there is room to urge the liquid 156 through the

member 102.

In other words, the design of the extension 126 is particularly suitable for paper manufacturing that has slurry of water and fibers. The water layer split at the front wall 134 creates an under-pressure pulse so that the water on top of the moving member flows through the member 102 and into a container there below. The design of the extension 126 may also be designed for other applications than paper making that is only used as an illustrative example.

The transducer 108 has a top cavity 136 with a threaded inside wall 138 for threadedly receiving the member 122. The transducer 108 may be attached to the foil 106 in other ways. For example, adhesion or mechanical fasteners may attach the transducer. The present invention is not limited to the threaded connection described above.

Below the top cavity 136, a second housing cavity 140 is defined therein. The cavity 140 has a central segment 141 to hold a bottom cooling spacer 142, a lower piezoelectric element 144, a middle cooling spacer 146, an upper piezoelectric element 148 and a top cooling spacer 150 that bears against a bottom surface 152 of the connecting member 122. The spacers 142, 146, 150 are used to lead away the frictional heat that is created by the elements 144, 148.

By using three spacers, all the surfaces of the elements 144, 148 may be cooled. As the piezoelectric elements 144, 148 are activated, the thickness of the elements is changed in a pulsating manner and ultrasonic energy is

transmitted to the member 122. For example, by using a power unit with alternating voltage of a level and frequency selected to suit the application at hand, the elements 144, 148 start to vibrate axially. In this way, if the AC frequency is 20 kHz then a sound at the same frequency of 20 kHz is transmitted. It is to be understood that any suitable transducer may be used to generate the ultrasonic energy and the invention is not limited to piezoelectric transducers.

Fig. 5 is an enlarged view of a central segment so that the permeable movable member 102 bears or is pressed against the top surface 116 of the member 122 of the foil 106 so there is not sufficient space therebetween to capture cavitation bubbles. In other words, an important feature of the present invention is that a gap 155 defined between the foil 106 and the member 102 is much less than the critical bubble diameter so that no bubbles of critical size can be captured therebetween. The gap 155 between the member 102 and the foil 106 is defined by the tension in the member 102, the in-going angle between the member 102 and the foil 106, the pressure pulse induced by the water layer split at the front of the foil 106, the geometry of the foil 106, the under-pressure pulse when the member 102 leave the foil 106 and the out-going angle of the member 102. The bubbles 158 have a diameter  $d_1$  that is much longer than the distance  $d_2$  of the gap 155 between the top surface 116 of the foil 106 and the bottom surface 161 of the permeable member 102. In this way and by the fact that the member 102 is moving, the cavitation

bubbles 158 are forced to be created above the permeable member 102 and by imploding disperse the liquid substance 156 that is subject to the ultrasonic treatment and disposed above the member 102. The liquid substance 156 has a top surface 160 so that the bubbles 158 are free to move between the top surface 160 of the substance 156 and a top surface 162 of the member 102. In general, the effect of the ultrasonic energy is reduced by the square of the distance because the liquid absorbs the energy. In this way, there are likely to be more cavitation bubbles formed close to the member 102 compared to the amount of bubbles formed at the surface 160. An important feature is that because the member 102 is moving and there is not enough room between the foil 106 and the member 102, no cavitation bubbles are captured therebetween or along the top surface 162 of the movable member 102.

The second embodiment of a transducer system 173 shown in Fig. 6 is virtually identical to the embodiment shown in Fig. 4 except that the transducer system 173 has a first channel 164 and a second channel 166 defined therein that are in fluid communication with an inlet 168 defined in a foil member 169. The channels 164, 166 extend perpendicularly to a top surface 170 of a connecting member 172. The channels 164, 166 may extend along the foil 169 and may be used to inject water, containing chemicals, therethrough. For example, in papermaking, the chemicals may be bleaching or softening agents. Other substances such as foaming agents, surfactant or any other substance may be used depending upon the

application at hand. The ultrasonic energy may be used to provide a high pressure and temperature that may be required to create a chemical reaction between the chemicals added and the medium. The channels 164, 166 may also be used to add regular water, when the slurry above the moving member is too dry, so as to improve the transmission of the ultrasonic energy into the slurry. The chemicals or other liquids mentioned above may also be added via channels in the front part of the transducer assembly bar 106. If the liquid content of the medium to be treated is very low, the liquid may simply be applied by means of spray nozzles under the web. Also in those cases may the applied liquid be forced into the web by the ultrasonic energy and afterwards be exposed to sufficient ultrasound energy to cause the desired reaction to take place between the chemicals and the medium to be treated.

Fig. 7 is an overall side view showing an endless bendable permeable member 174 that is supported by rollers 176a-e. Below the member 174 is a plurality of transducer systems 178a-e for increased output by adding more ultrasonic energy to the system. By using a plurality of transducers, different chemicals may be added to the slurry 179, as required. The slurry 179 contains fibers or other solids, to be treated with ultrasonic energy, is pumped by a pump 180 in a conduit 181 via a distributor 182 onto the member 174 that moves along an arrow (G). The treated fibers may fall into a container 184.

The transducer system of the present invention is very

flexible because there is no formation of cavitation bubble pillows in the path of the ultrasonic energy. By using a plurality of transducers, it is possible to substantially increase the ultrasonic energy without running into the  
5 problem of excessive cavitation bubbles to block the ultrasound transmission. The plurality of transducers also makes it possible to add chemicals to the reactor in different places along the moving member, as required.

Fig. 8 shows a paper machine dry end paper surface  
10 treatment device 200 that has a bendable paper 202 passing over a roller 204 and a roller 206. The paper 202 is subject to coating process by a coating applicator 208 at the roller 206. The applicator 208 applies a coating 210 onto the paper 202. The applicator 208 has an endless rotatable wire 222  
15 that is guided by rollers 224, 226, 228, 230. An ultrasonic transducer 212 is positioned next to the wire 222 so that the paper 202 passes between the wire 222 and the roller 206. As described above, the transducer 212 is immediately adjacent to the wire 222 so that no undesirable bubbles are formed between  
20 the transducer and the wire 222. A coating distribution tube 232 provides the coating substance through the wire 222 and the transducer 212 enhances the depth of penetration of the coating 210 into the paper 202. The transducer 212 provides pulses and reduces the viscosity of the coating 210 to make  
25 the penetration more effective and the coating adheres better to the paper 202. The applicator 208 is particularly useful for thicker paper and paperboard. The applicator 208 has a

- 14 -

water distribution conduit 240 that may be used to transport the excessive coating to the outer surface of the wire 222 to make it easier for the water showers 243 to remove it from the wire to the outer side of a collector 247. The water shower  
5 245 may shower water on the wire that may be sucked into a suction box 241 together with eventual residual coating color from the wire and water and coating color pouring down the outer surface of the collector 247. The water shower 249 may shower water through the wire and into the suction box 242 to  
10 make sure that no coating color is left in the wire.

The coated paper 202 is subject to a blade device 216 downstream of the coating applicator 208. The device 216 bears against the coated surface of the paper 202. The device 216 has a relatively stiff blade 218 that may have a plurality  
15 of ultrasonic transducers 234 mounted thereon. The blade 218 scrapes off most of the coating 210 from the paper 202. For example, the blade 218 may scrape off about 90% of the coating so that only 10% of the coating remains on the paper 202. A collector 247 may be placed below the roller 206 to collect  
20 scraped off coating. The paper is then passed into a dryer 220 for further processing.

Preferably, the blade 218 is stiff and is made of steel with the tip preferable of a suitable ceramic material. As best shown in Fig. 9, a plurality of ultrasonic transducers  
25 234 may be placed every 70 millimeters or so along the width of the blade 218. The transducers may be glued to the blade 218 adjacent to a blade tip 236 so that the blade tip 236

vibrates according to the double arrows 238. The vibration of the blade tip 236 reduces the viscosity of the coating 210 so that a coating with a higher dryness may be used and less water is involved. This means that a higher speed of the paper 202 and lower energy consumption may be used since there is less water in the coating substance to remove by drying. Other advantages include lower friction and the ultrasonic blade cleaning gives extended blade lifetime.

Fig. 10 shows the device 200 with identical features as shown in Fig. 8 except the blade holder 244 has a double curved blade 246 that is bent at points 248 and 250 and subjected to a pressure by a device 252. The pressure device 252 has ultrasound transducers 254 placed at the same distances from one another along the width of the pressure device 252 as the jackscrews 255. The blades 218, 246 may be as wide as seven meters or more. The blade 246 may be solidly attached or clamped to the blade holder 244 that firmly holds the blade 246 so that all or almost all vibration energy is applied at a blade tip 258 with maximum ultrasonic effect as shown by the double arrows 260. The pressure device 252 is also as wide as the blade 246 and may have grooves 284 defined therein one between every jackscrew to give flexibility and to prevent the spread of the ultrasound sideways along the width of the pressure device. Fig. 11 shows a cross machine side view of a stiff blade 262 in a blade holder 261 with grooves 263 defined therein and transducers 265 positioned at suitable distances from one another along the width of the holder 261.

Fig. 12 shows a detailed side view of a stiff blade 262 that is attached to a holder 261 that has an ultrasonic transducer 265 at suitable distances along the width of the very wide holder to vibrate the blade according to the double arrow 282. The blade 262 is firmly held in the holder 261 so that the waves are transported through the transducer 265 as shown by the amplitude diagram 268 and through the blade holder 261 as illustrated by the amplitude diagram 270 and further through the blade as shown by the amplitude diagram 276 with minimum loss of energy. All three amplitude diagrams are showing the vibration amplitude in the double arrow direction. The blade holder 261 may have fixation pins 272, 274 going through holes in the blade 262 to firmly hold the blade 262 and to transmit the vibrations from the blade holder 261 to the blade. By taking away the play between the pins and the holes in the blade during normal run it is suitable to circulate warm water through the pins and to circulate cold water through the pins when the blade is going to be changed or other service is going to be made to the blade. By taking away the play the transmission of vibration energy will be more efficient. Preferably, the amplitude of the waves 276 of the blade 262 is substantially similar to the waves 268 throughout the whole width of the blade. A pressure applicator 278 to control the cross machine coat weight profile may apply a pressure on the blade 262 at a place 280 where the vibration amplitude of the blade is at a minimum to prevent the formation of undesirable heat.

Fig. 13 shows the pressure device 252 in Fig. 10 as a top view.

Fig. 14 shows the pressure device 252 in Fig. 10 as a side view. The pressure device 252 is made as a sonotrode with connections for ultrasonic transducers 288 in peak points, with maximum vibration amplitude, and jackscrew connections 290 in node points, with minimum vibration amplitude, to prevent the ultrasonic power to reach the jackscrews. Grooves 284 are defined between every transducer/jack screw position in paper machine cross direction.

Fig. 15 shows a sonotrode consisting of ultrasonic transducers 265, blade holder 261 and blade 262 combined with a short dwell time applicator 292 for thin paper grades.

While the present invention has been described in accordance with preferred compositions and embodiments, it is to be understood that certain substitutions and alterations may be made thereto without departing from the spirit and scope of the following claims.

We claim:

1. A method of applying a coating on a paper substance comprising:  
moving a paper over a roller;  
5 applying a coating color to the paper with a coating color applicator;  
vibrating a blade with an ultrasonic transducer in operative engagement with the blade; and  
applying the vibrating blade to the paper to scrape off  
10 excessive coating color from the paper.
2. The method according to claim 1 wherein the method further comprises bending the blade with a pressure applicator that bears against the blade while the paper moves passed the  
15 blade.
3. The method according to claim 1 wherein the method further comprises providing the coating color applicator with an ultrasonic transducer and subjecting the coating color with an  
20 ultrasonic energy from the ultrasonic transducer to lower a the viscosity of the coating color.
4. The method according to claim 1 wherein the method further comprises transferring ultrasonic vibration from the  
25 ultrasonic transducer to a blade tip of the blade.
5. The method according to claim 1 wherein the method further

comprises holding the blade with a holder and providing the holder with grooves to prevent transmission of ultrasonic energy along a width of the holder.

5      6. The method according to claim 1 wherein the method further comprises adhering the ultrasonic transducer directly on the blade.

7. The method according to claim 5 wherein the method further  
10 comprises firmly holding the blade in the holder to prevent loss of ultrasonic energy transferred from the ultrasonic transducer through the holder to the blade and circulating water through pins.

15      8. The method according to claim 1 wherein the method further comprises applying the coating color through an endless wire.

9. The method according to claim 8 wherein the method further  
20 comprises applying the coating color while subjecting the coating color to ultrasonic energy.

10. The method according to claim 2 wherein the method  
further comprises providing the pressure applicator with an  
ultrasonic transducer that vibrates the pressure applicator.

25

## AMENDED CLAIMS

[received by the International Bureau on 17 January 2005 (17.01.2005);  
original claims 1-10 replaced by amended claims 1-6 (2 pages)]

1. A method of scraping off excessive coating from a paper substance comprising:  
moving a paper over a roller;  
applying a coating color to the paper with a coating color applicator;  
longitudinally vibrating a blade (262) with an ultrasonic transducer (265) in operative engagement with the blade, the vibration being in a direction that is parallel to a double arrow (282) along the blade; and  
applying the vibrating blade to the paper to scrape off excessive coating color from the paper.
2. The method according to claim 1 wherein the method further comprises bending the blade with a pressure applicator that bears against the blade while the paper moves passed the blade.
3. The method according to claim 1 wherein the method further comprises transferring ultrasonic vibration from the ultrasonic transducer to a blade tip of the blade.
4. The method according to claim 1 wherein the method further comprises holding the blade with a holder and providing the holder with grooves to prevent transmission of ultrasonic energy along a width of the holder.
5. The method according to claim 1 wherein the method further comprises adhering the ultrasonic transducer directly on the

6. The method according to claim 4 wherein the method further comprises firmly holding the blade in the holder with pins through holes in the blade and circulating hot water through the pins to get firm connection between pins and blade to prevent loss of ultrasonic energy transferred from the ultrasonic transducer through the holder to the blade.



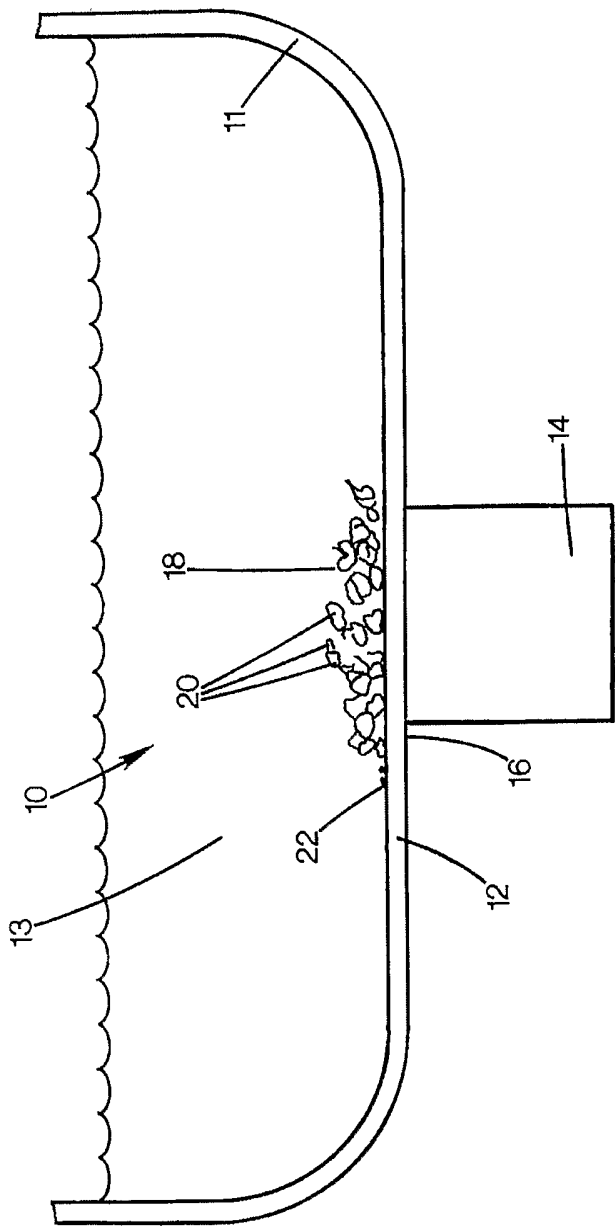


FIG. 1  
PRIOR ART

Effect of increasing acoustic power on a system  
*Iodine yield as a function of intensity (1MHz)*



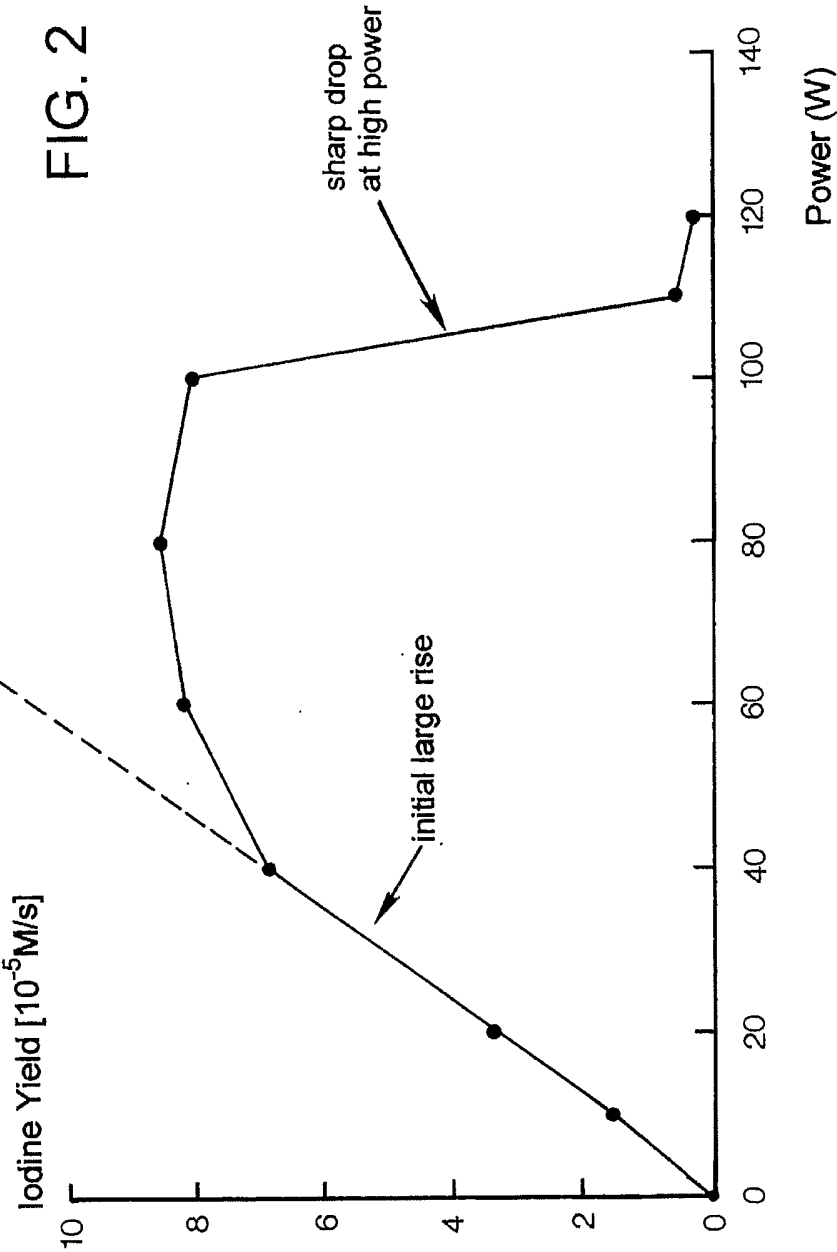

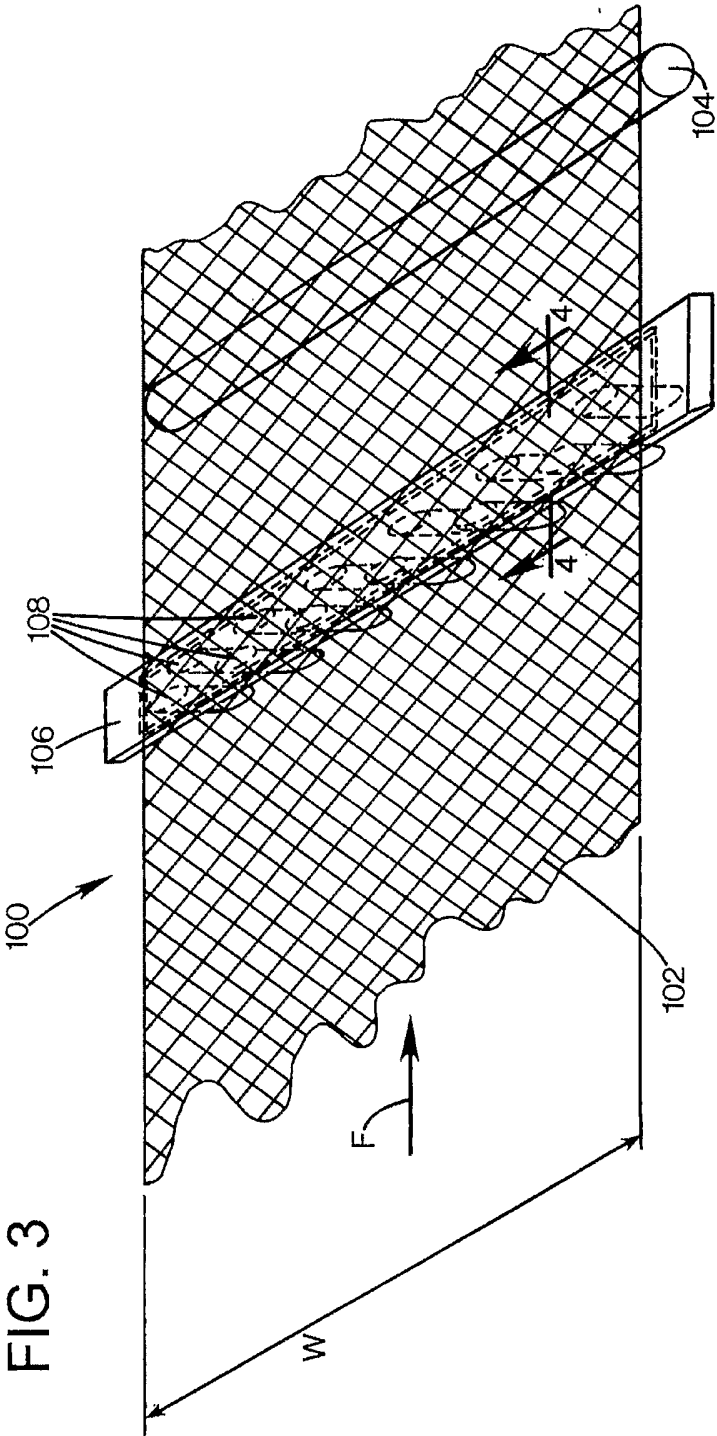

5/13

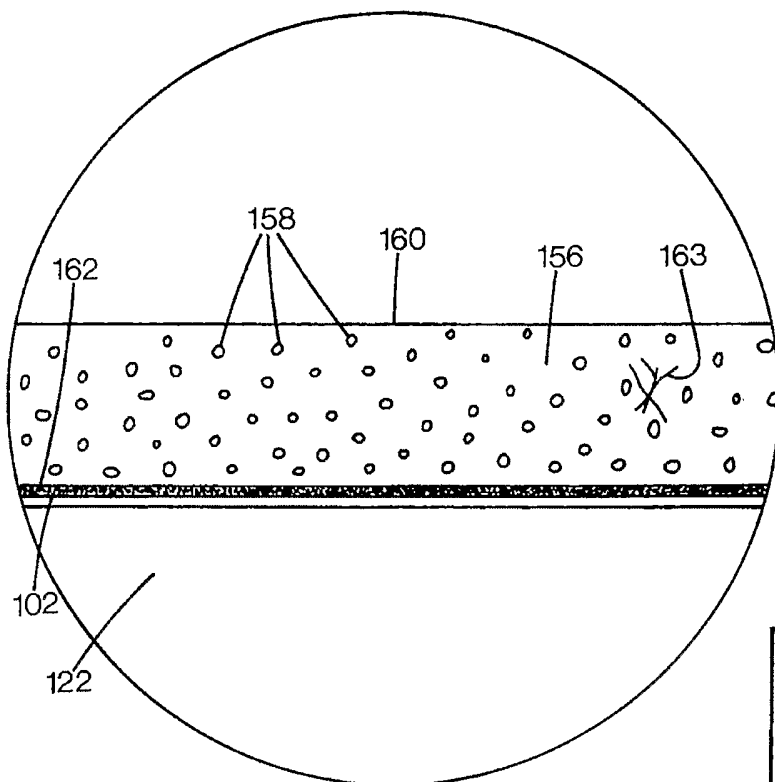


FIG. 5A

FIG. 5B


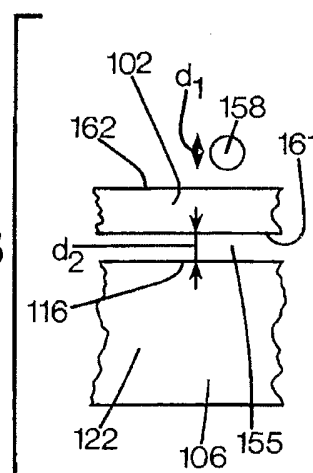


FIG. 5

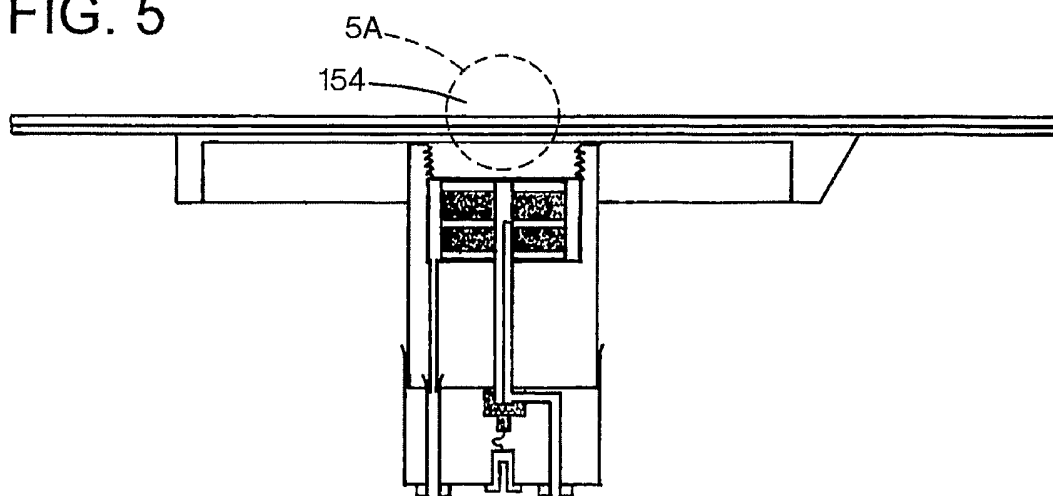

6/13

FIG. 6


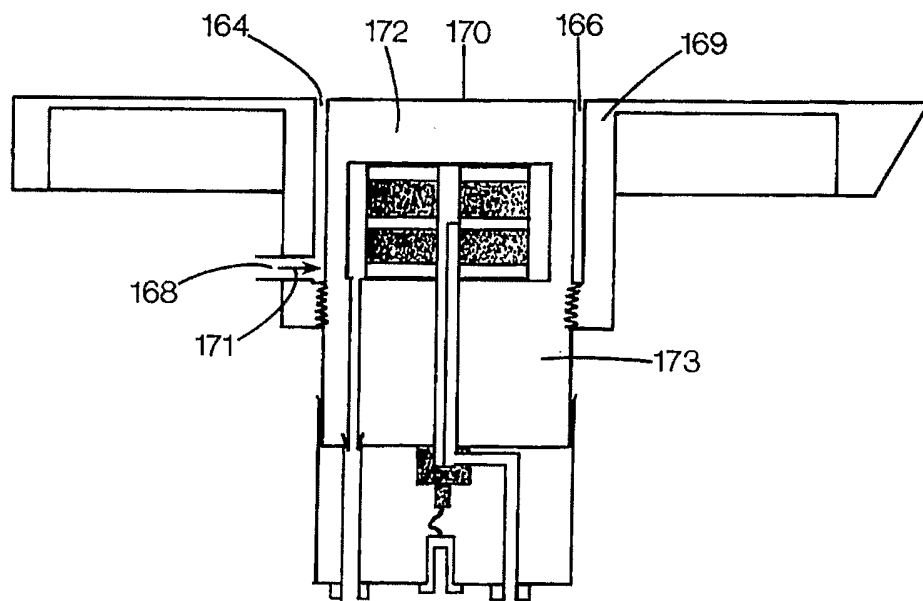


FIG. 7

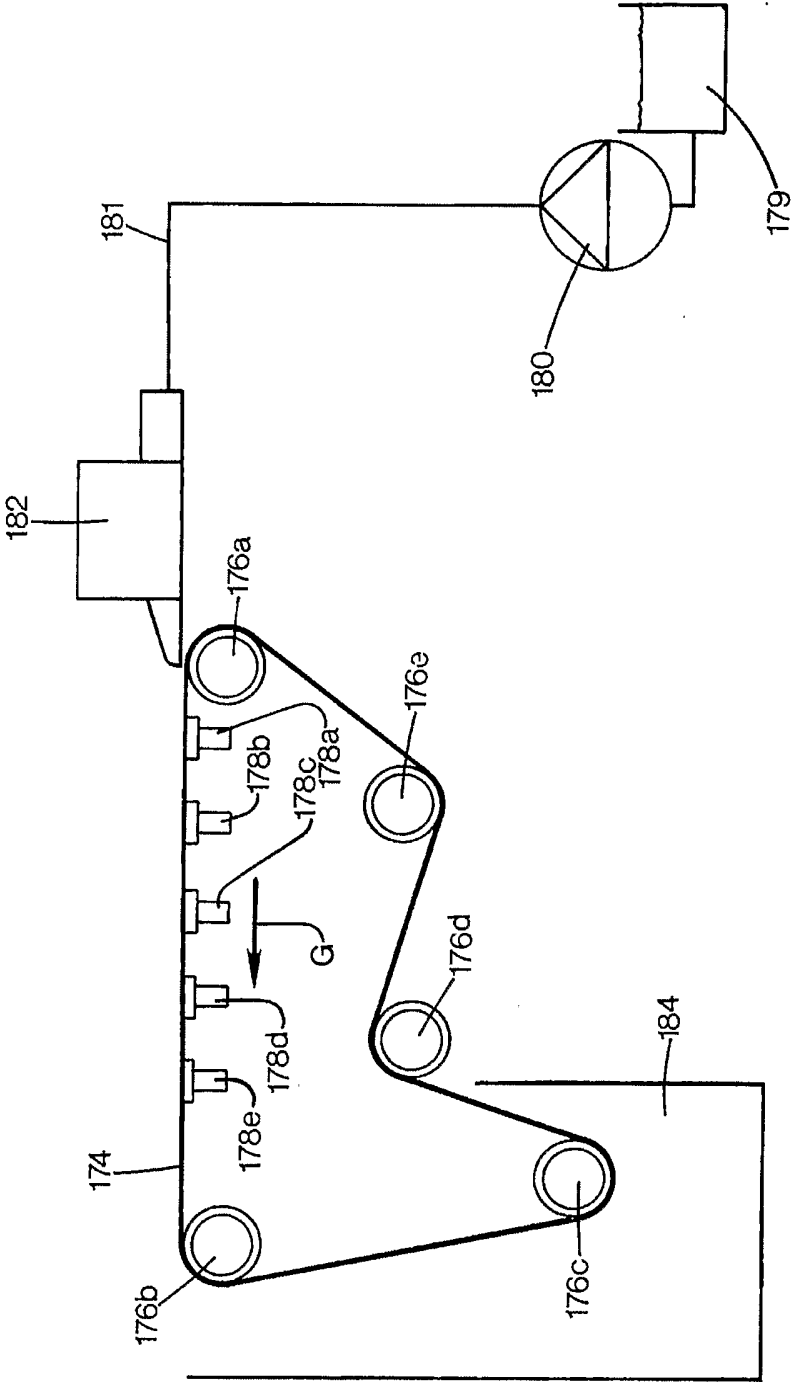

8/13

FIG. 8

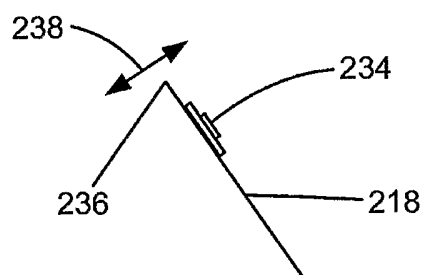
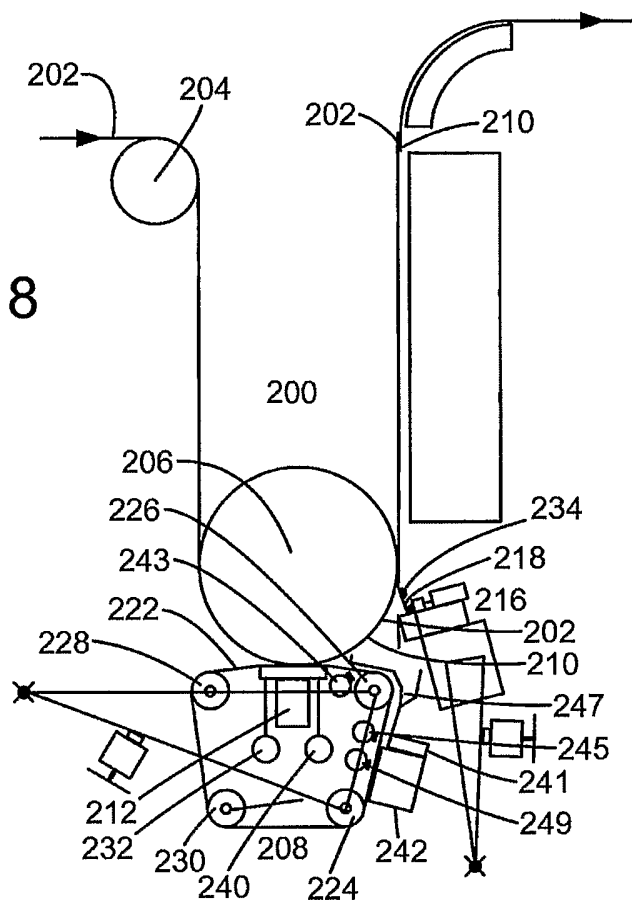


FIG. 9

9/13

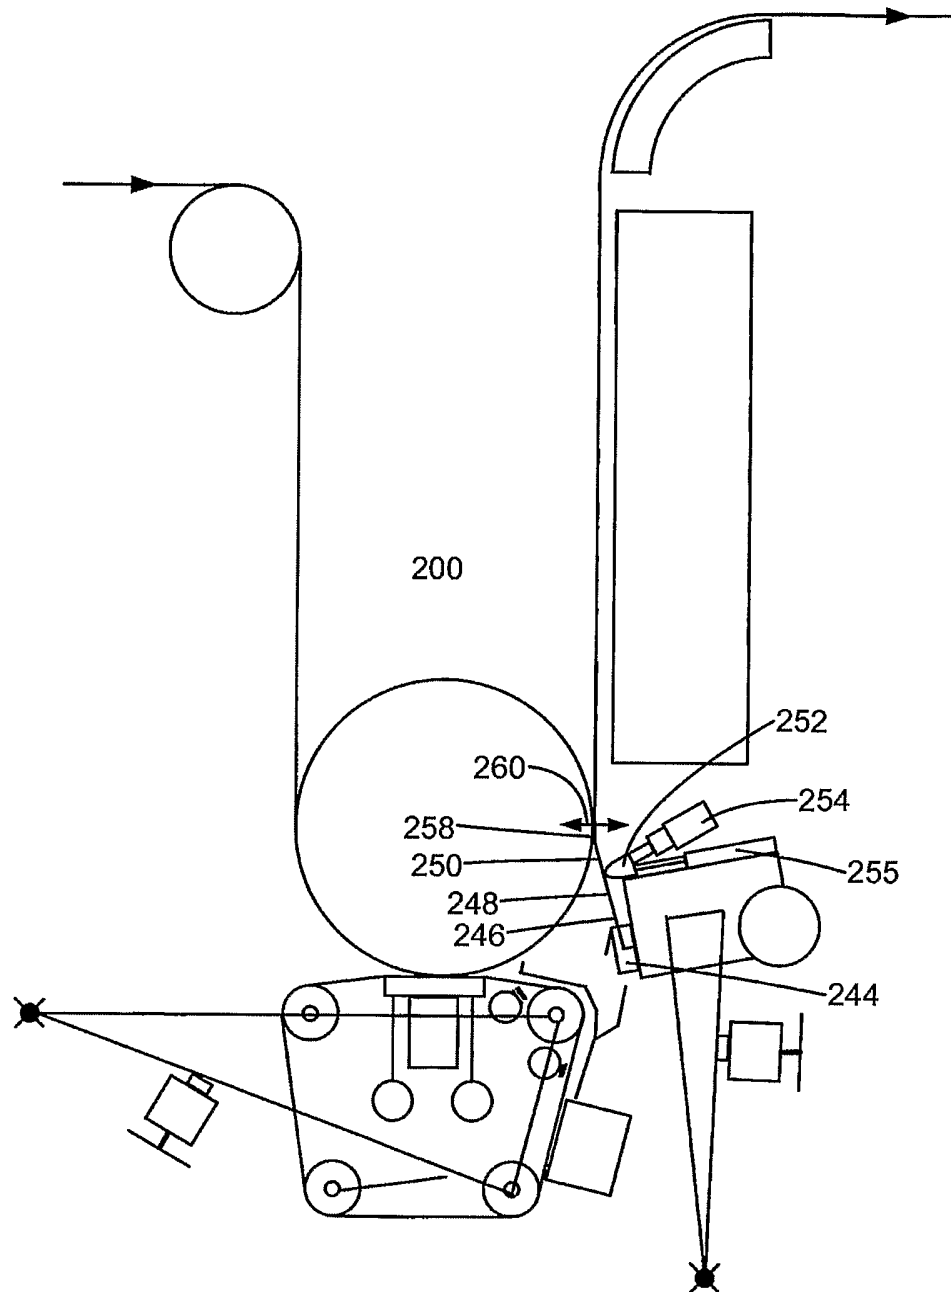


FIG. 10

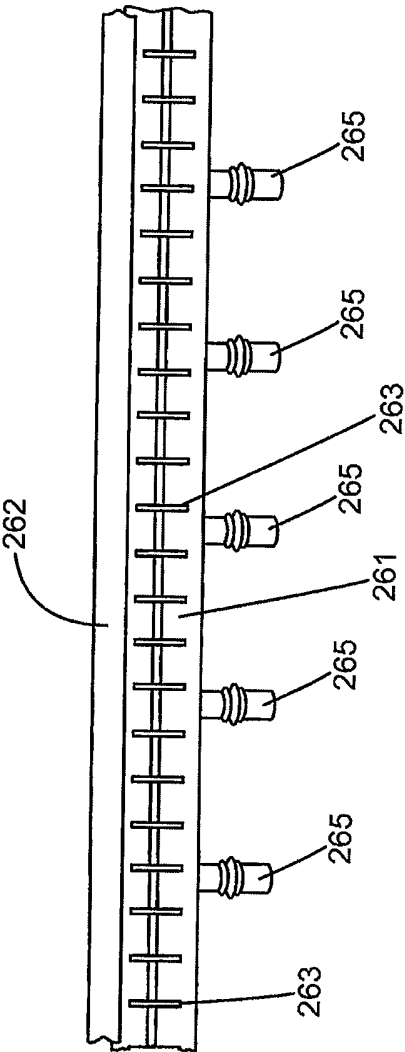


FIG. 11



12/13

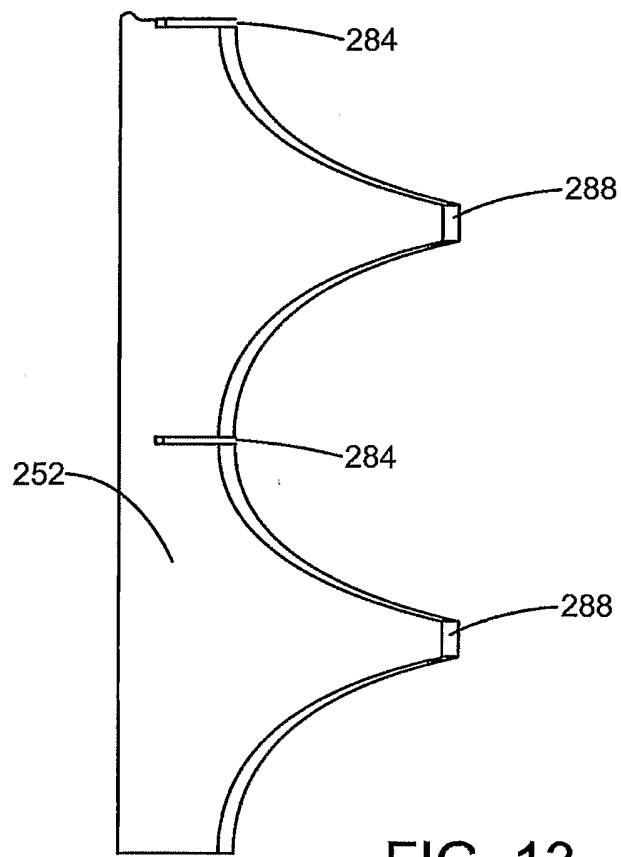


FIG. 13

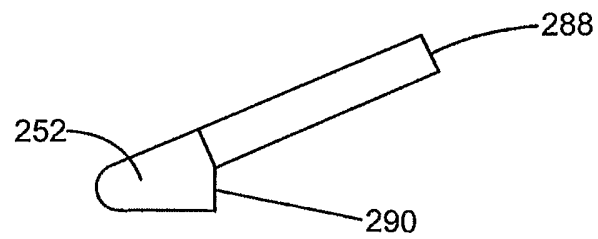


FIG. 14

13/13

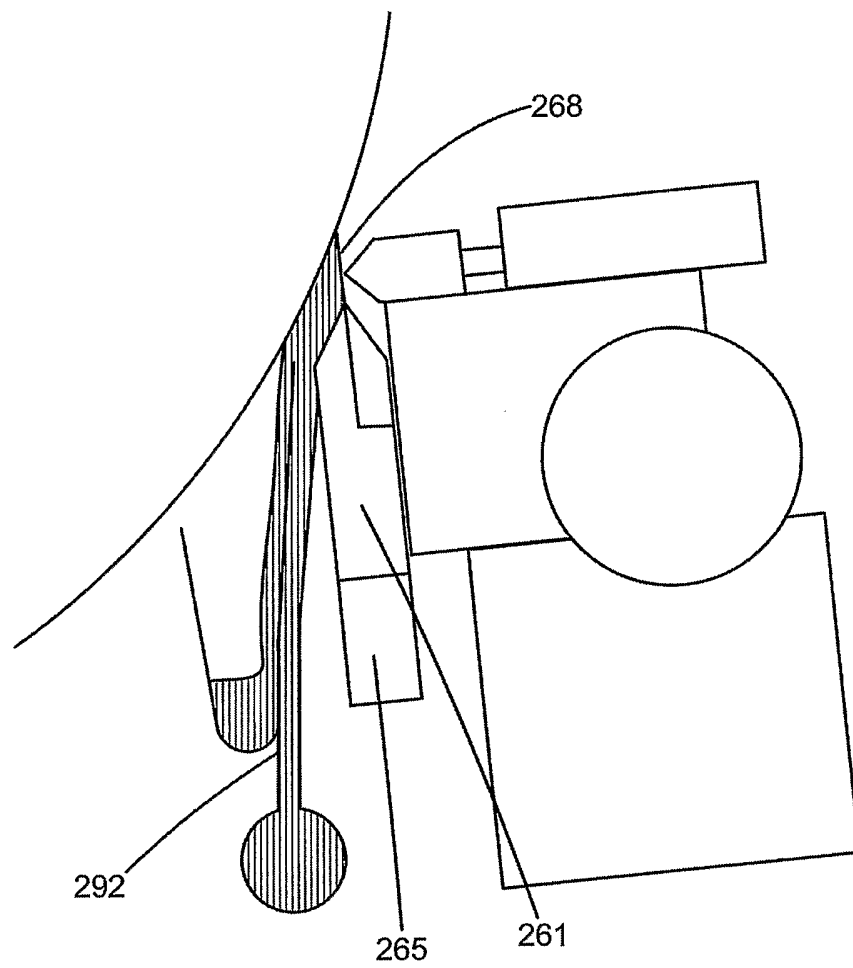


FIG. 15

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2004/001166

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: D21H 25/10, B05C 11/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: D21H, B05C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, EPO-INTERNAL, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 2356737 B (JAGENBERG-WERKE AG), 15 May 1975 (15.05.1975), see whole document  --	1,2,4-7,10
X	PATENT ABSTRACTS OF JAPAN vol. 1996, no. 03 29 March 1996 (1996-03-29) & JP 7299408 A (TOPPAN PRINTING CO LTD) 14 November 1995 (1995-11-14) abstract, figure 2 in document  --	1,4,6

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

4 November 2004

Date of mailing of the international search report

22-12-2004

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Kerstin Waczinska/MN  
Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2004/001166

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 9307969 A1 (MANUFACTURING COMPANY), 29 April 1994 (29.04.1994), page 14, line 7 - line 21; page 1, line 17 - line 28, figures 5a,5b	1
A	--	2,4-7,10
A	US 5601868 A (NORBERT GERHARDT), 11 February 1997 (11.02.1997), column 1, line 49 - column 2, line 20	1,2,4-7,10
A	US 6432201 B1 (ERNST KLAS ET AL), 13 August 2002 (13.08.2002), figure 3	1,2,4-7,10
	-----	

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2004/001166

## Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

I: Claims 1, 2, 4-7, 10 are directed to a method for scraping off excessive coating colour from a paper.

II: Claims 3, 8, 9 are directed to a method for applying a coating colour to a paper with a coating colour applicator.

.../...

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.: 1, 2, 4-7, 10.

### Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

## INTERNATIONAL SEARCH REPORT

international application No.

PCT/SE 2004/001166

### Continuation of Box III

The present application has been considered to contain 2 inventions which are not linked such that they form a single general inventive concept, as required by Rule 13 PCT for the following reasons:

The single general concept of the present application is the teaching that a coating colour is applied to a paper with a coating colour applicator and excessive coating colour is scraped off from the paper by using a vibrating blade with an ultrasonic transducer in operative engagement with the blade (features of claim 1).

Document DE 2356737 A discloses the single general concept and all the features of claim 1.

Thus, the single general concept is known and cannot be considered as a single general inventive concept in the sense of Rule 13.1 PCT.

No other features can be distinguished which can be considered as same or corresponding special technical features in the sense of Rule 13.2 PCT.

Thus, the application lacks unity of invention.

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2004/001166

DE	2356737	B	15/05/1975	NONE		
WO	9307969	A1	29/04/1994	AU	663116 B	28/09/1995
				AU	2642592 A	21/05/1993
				BR	9206633 A	07/11/1995
				CA	2116962 A	29/04/1993
				CZ	9400670 A	13/07/1994
				DE	69212329 D,T	06/03/1997
				EP	0608265 A,B	03/08/1994
				HU	68044 A	29/05/1995
				HU	9401022 D	00/00/0000
				JP	3302016 B	15/07/2002
				JP	7500051 T	05/01/1995
				KR	215322 B	16/08/1999
				MX	9205742 A	01/04/1993
				US	5262193 A	16/11/1993
				US	5376402 A	27/12/1994
				ZA	9207084 A	31/03/1993
US	5601868	A	11/02/1997	DE	4433048 A	21/03/1996
				EP	0702109 A	20/03/1996
				FI	954317 A	17/03/1996
				JP	8108124 A	30/04/1996
				US	5746833 A	05/05/1998
US	6432201	B1	13/08/2002	AT	242357 T	15/06/2003
				CA	2326527 A,C	07/10/1999
				DE	19814212 C	02/09/1999
				DE	19825156 C	07/10/1999
				DE	59905852 D	00/00/0000
				EP	1084298 A,B	21/03/2001
				ES	2201706 T	16/03/2004
				PT	1084298 T	31/10/2003
				WO	9950501 A	07/10/1999