




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : A21C 11/00	A1	(11) International Publication Number: WO 00/42857 (43) International Publication Date: 27 July 2000 (27.07.00)
(21) International Application Number: PCT/IB00/00023 (22) International Filing Date: 6 January 2000 (06.01.00) (30) Priority Data: TO99A000041 22 January 1999 (22.01.99) IT (71)(72) Applicant and Inventor: TOMATIS, Stefano [IT/IT]; Via Provinciale, 141, I-12010 Peveragno (IT). (74) Agent: SPANDONARI, Carlo; Spandonari & Modiano s.r.l., Corso Duca degli Abruzzi, 16, I-10129 Torino (IT).	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>	

(54) Title: APPARATUS FOR THE MECHANIZED PREPARATION OF PIZZAS

(57) Abstract

The apparatus comprises a horizontal, extensible shovel (22), which is driven step by step through a predetermined path by motorized means (12-30), a distributor (56) of dough loaves arranged for dropping loaves at a first stop in the shovel path, a pizza moulder (58) arranged at a second stop in the shovel path, for pressing and spreading the loaf, several distributors (60) of a dressing, placed at least a third stop in the shovel path, for dropping metered portions of dressing on the pizza carried by the shovel, and an oven (62) placed at a fourth stop in the shovel path, for receiving the pizza from the shovel.

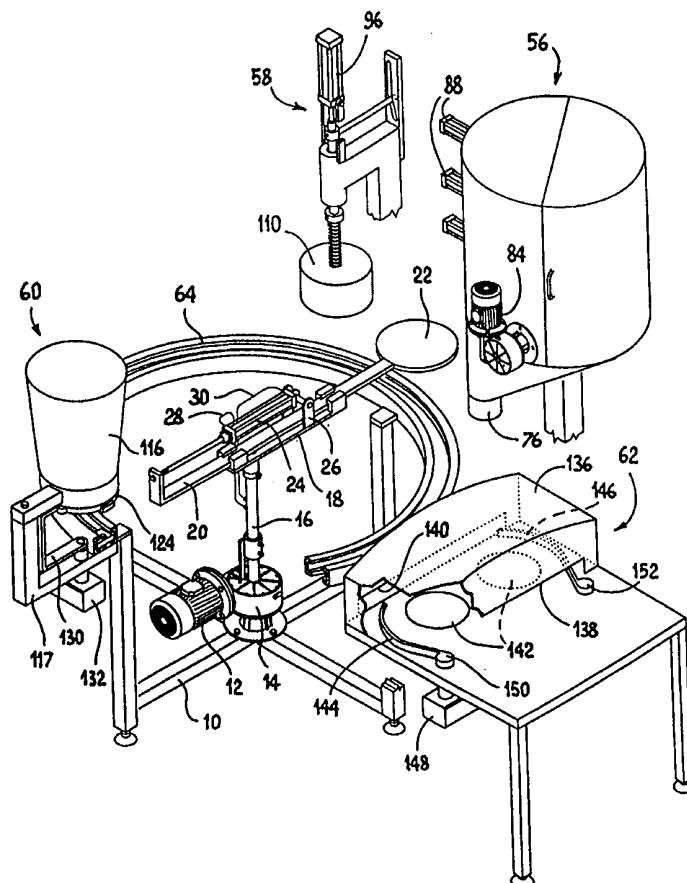

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

"Apparatus for the mechanized preparation of pizzas"

Disclosure

5 This invention is concerned with an apparatus for the mechanized and customized preparation of pizzas, particularly for use in self-service restaurants and pizzerias.

Today, pizzas are prepared to order in pizzerias by a pizza-baker who generally, for each pizza, picks up a premixed and leavened portion of dough, spreads it out, and
10 lays it on a baker's shovel. He then sprinkles the pizza with prepared dressings, such as hashed mozzarella, tomato, anchovies, minced ham and/or other dressings, and finally puts the pizza so prepared into the oven. It can be seen that the preparation of the pizza, though quick, is work-intensive, and compels the pizza-baker to a hard and continuous work over the full opening hours of the restaurant.

15

In order to reduce the cost of pizza preparation by reducing the requirements for specialized staff, attempts have been made for mechanizing the preparation of pizzas by means of machinery where the dough loaf is carried on a conveyor belt through a number of processing stations, to be finally delivered to a baking oven. However, in
20 this kind of machinery, the belt must continually go through the oven, and must therefore be made, for instance, as a chain of metal links, so that it can stand the baking heat without harm. Cleaning such a belt is difficult, and probably even unfeasible in a drastic way, i.e. in a way that will comply with modern sanitary standards. Moreover, with a conveyor belt system the progression rate of the pizza under preparation must
25 conform to the longest time in the entire handling path, i.e. usually the time of dwelling in the oven.

The main object of the invention is therefore to provide an apparatus for the mechanized preparation of pizzas, by which the pizzas are prepared and baked on
30 order, without appreciable human help, so that the pizza-baker is replaced by means that are simpler, cheaper and more efficient than known means.

Another important aim of the invention is to provide an apparatus for the mechanized preparation of pizzas, which can be cleaned more easily than known means, and which, in general, is more satisfactory from the sanitary viewpoint.

- 5 The invention achieves the above and other objects and advantages, such as will appear from the following disclosure, with an apparatus for the mechanized and customized preparation of pizzas having the features recited in claim 1.

The invention will be further described with reference to a few preferred embodi-
10 ments which are disclosed in the following disclosure and are shown, by way of nonlimiting example, in the attached drawings, wherein:

Fig. 1 is a perspective view of an apparatus for the preparation of pizzas according to the preferred embodiment of the invention;

15

Fig. 2 is a diagrammatical plan view of the apparatus of Fig. 1;

Fig. 3 is a enlarged view in axial cross-section of a detail of the apparatus of Fig. 1;

- 20 Fig. 4 is a perspective view, partly broken away, on an enlarged scale, of a loaf distributor belonging to the apparatus of Fig. 1;

Fig. 5 is a perspective view, partly broken away, on an enlarged scale, of a spreader device belonging to the apparatus of Fig. 1;

25

Fig. 6 is an exploded, perspective view of a dressing distributor belonging to the apparatus of Fig. 1;

Fig. 7 is a diagrammatical, plan view of a modification of the apparatus of Fig. 1; and

30

Fig. 8 is a view, similar to Fig. 1, showing a version of the apparatus according to the invention.

With particular reference to Figs. 1 and 2, a bedplate 10 supports a motor 12 with associated reduction gear 14, having a vertical output shaft 16. A bracket 18 is supported at the top of shaft 16 and carries a movable slide 20 having a horizontal shovel 22 at one end. A double-action air cylinder 24, connected between slide 20 and a lug 26 integral with bracket 18, is adapted to drive slide 20 in both directions. Cylinder 24 is driven through two air lines 28 and 30, which are supplied through a rotating joint, shown in more detail on Fig. 3.

With reference to Fig. 3, the rotating joint comprises a sleeve 32 surrounding shaft 16 and kept in position by a bracket 34. Sleeve 32 has two connectors 36, 38, which can be supplied alternatively with compressed air from a system not shown through an electrovalve 40. The connectors open to respective internal peripheral grooves 42, 44, provided with adjacent sealing gaskets 46. Grooves 42, 44 communicate with respective ducts 48, 50, which are machined within shaft 16 and terminate at respective fittings 52, 54, with which air lines 28 and 30 are connected.

With further reference to Fig. 1 and 2, the apparatus according to the invention also comprises a loaf distributor 56, a pizza moulder 58, several dressing distributors 60 (only one being shown in Fig. 1 for simplicity), and finally a baking oven 62, all of which are arranged around central shaft 16, at substantially similar radial distances, as will be explained below in more detail. A circular raceway 64, coaxial with shaft 16, is placed beneath the delivery outlets of devices 56 to 60, to act as a collector for any material that might drop from shovel 22, as better disclosed below.

Turning now to Fig. 4, the loaf distributor 56 comprises a cylindrical casing 70, which is supported on a pedestal 72 and which terminates below with a funnel 74 having a vertical delivery outlet 76 opening downwards at a small distance from the level of shovel 22. Within casing 70, a magazine of dough loaves comprises a frame having three annular shelves 78, which are intended for storing a number of globular dough loaves such as 80 and are rotatably supported on three rubber-coated rollers 82, one of which is driven by a motor 84 with reduction gear. At each shelf 78 a respective pusher paddle such as 86 is arranged, which can be driven by a respective

hydraulic cylinder 88 for radially sweeping across the associated shelf and pushing a dough loaf 80 toward the shelf axis, and consequently dropping the loaf into inclined funnel 74 and toward outlet 76. Near paddle 86, a proximity sensor 90 is preferably arranged, which will detect the presence or absence of a loaf and will either enable
5 the operation of the associated paddle, if a loaf is present, or step shelves 78 forward, if a loaf is absent, according to a program that is implemented in control circuits not shown, because they are obvious for a person skilled in the field and are outside the scope of the invention.

10 In operation, motor 12 steps shaft 16 around, together with shovel 22. The shovel stops beneath outlet 76, and, at the same time, one of actuator cylinders 88 to drop a loaf into funnel 74 and from there on the shovel.

Turning now to Fig. 5, pizza moulder 58 of Fig. 1 comprises a post 92 on which a
15 vertical rod 94, driven by an air cylinder 96, is slidably supported. Rod 94 has a horizontal spreader disk 98 at its lower end, the disk having a flat lower surface, preferably provided with a peripheral groove 100. Rod 94 is also bored axially, so that a duct 102 is formed from a fitting 104 to the center of spreader disk 98, for connection of a source of compressed air to perform an ejector function, as further
20 explained below.

Moreover, the upper end of rod 94 is integral with a transverse arm 106, having one end guided in a slot 108 having an upper, vertical leg joining a lower, inclined leg, so that, as rod 94 is lowered, it is also rotated around its vertical axis.

25

Above spreader disk 98, a restraining cup 110 is also arranged slidably on rod 94. Cup 110 has a rim surrounding disk 98 and is biased toward the disk by a wound compression spring 114.

30 When shovel 22, carrying a globular loaf received from loaf distributor 56, stops beneath spreader 58, the air cylinder is operated to push disk 98 downwardly against the loaf, the latter being squeezed between the disk and the shovel. Cup 110 also

follows the disk, and its rim 112 is stopped by abutment against shovel 22, thus acting as a restraining enclosure for the dough of the loaf and giving each pizza a uniform size. Peripheral groove 100 in the spreader disk allows a thick peripheral bead to grow in the pizza. The rotation of the disk around its axis, caused by
5 engagement of arm 106 in slot 108, helps the dough to spread smoothly.

With reference to Figs. 1 and 6, a dressing distributor will now be described by way of example. The dressing distributor comprises a vessel 116, supported on a bracket 117, and having a flat bottom with two symmetrically eccentric apertures 118. An
10 axial shaft 120 supports a stirring paddle 122 within the vessel and a thick metering disk 124 having two symmetrically eccentric apertures 126 which can be aligned with apertures 118. Metering disk 124 is retained against the vessel bottom by a strap 128 made as a diametrically arranged plate, having a width equal or larger than the diameter of apertures 126, and attached to the vessel with screws 128. Metering disk
15 124 is engaged by an arm 130, driven by an actuator 132.

When at rest, metering disk 124 of dressing distributor 60 is maintained by arm 130 in a position where its apertures 126 are aligned with apertures 118 in the bottom of vessel 116, and therefore closed by strap 128. The dressing contained in the vessel
20 (such as hashed mozzarella, tomato, or other minced or creamy food) flow down to fill apertures 124, but are stopped by closure strap 128. When shovel 22 has been stepped forward to a point beneath dressing distributor 60 and actuator 132 is operated, arm 130 turns metering disk 124 by an angle, such as 45°, apertures 126 are freed from strap 128 and discharge their contents on the underlying pizza, while the upper
25 surface of the disk stops apertures 118 in the vessel bottom. A portion of dressing is therefore delivered that is equal to the overall volume of both apertures. Preferably, arm 130, after it has moved back to its rest position, performs a similar rotation in the opposite direction, again discharging portions of dressing, so that the dressing is distributed with a reasonable degree of uniformity on the underlying pizza. At each
30 rotation, stirring paddle 122 stirs the contents of the vessel.

The dressing distributor described above can be easily adapted to different kinds and quantities of minced dressings, by changing the gauge of apertures 126 and the thickness of disk 124. Although only one dressing distributor 60 is shown on Fig. 1 for clarity and simplicity, the apparatus of the invention, as shown on Fig. 2, comprises a number of distributors, seven in the embodiment shown, all arranged at preferably equal distances from the central shaft.

With further reference to Fig. 1, oven 62 comprises a table 134 covered by a housing 136, having passages 138, 140 on the front and the back, and internally provided with known heater means (not shown), e.g. electric resistance means. The inner room of the oven can house, for instance, two pizzas at a time, as shown in 142. Within housing 136, two curved paddles 144, 146 are also provided, which can be turned by actuator means such as 148, to rotate the paddles around axes 150, 152, respectively.

In operation, as explained above, shaft 16 rotates by steps, stopping shovel 22 first beneath loaf distributor 56, then beneath moulder 58, then, in sequence, under the dressing distributors 60. At each stop, the associated device performs its appointed task, so that, finally, shovel 22 will carry a spread pizza, sprinkled with the desired dressings.

20

Preferably, rotation of shovel 22 and the operation of the several devices take place under control of an electronic control system not shown, as obvious for a person skilled in the art, preferably including a keypad for selection of various parameters such as kinds and quantities of dressing, possibly under direct command of the consumer.

25

When shovel 22, after moving through the entire path, stops in front of oven 62, air cylinder 24 is operated (also under program control) to move slide 20 forward at a first speed and insert shovel 22 into passage 140 leading into the oven, at one of both pizza positions shown. The cylinder is then operated in the opposite direction, at a second, high speed, so that shovel 22 will withdraw sharply from the oven, thus unloading the pizza by inertia.

30

While shovel 22 starts a fresh operating cycle, the pizza left in the oven will be baked. At the end of a predetermined time, as set in the program, actuator 148 (or the other similar actuator not shown) is operated, in order to turn paddle 144 or 146 and to push the pizza out of the oven, where the waiting customer can pick it up.

5

Fig. 7 shows a modification of the preferred embodiment of the apparatus according to the invention, which is similar to the embodiment of Figs. 1 and 2, and which differs from it essentially in that shovel 22 follows an oval, rather than a circular path, due to a translating mechanism 160 for support shaft 16, driven by a motor 162. In this embodiment, the apparatus can be provided with a larger number of dressing distributors 60, for a wider range of the kinds of pizza. Moreover, the apparatus can be provided with two ovens 62', 62", for a higher production rate.

Fig. 8 shows a particular embodiment of the apparatus according to the invention, which is identical to the embodiment of Fig. 1 in its mechanical structure, but is provided with a tridimensional puppet 164, representing a cook, integral with bracket 18. The embodiment including a puppet contributes to make the apparatus more agreeable to the public, also in consideration of the fact that the puppet turns around in step with the shovel, giving the illusion that the puppet's arm actually pushes and withdraws the shovel in and out of the oven.

It is evident that the preferred embodiments of the apparatus as described and shown in the Figures above are liable to numerous other variations, by means of alternative but equivalent mechanical solutions. Merely by way of example, the rotation of the shaft carrying shovel 22 might be obtained by a stepping motor instead of a motor with reduction gear; the distributor of dough loaves 56 might be a metering device operating on bulk dough; the spreading member 58 might be provided with one or more spreading rolls; and the dressing distributors 60 might be at least partially replaced with other kinds of known distributors or metering devices, depending on the kind of dressing. These and other modifications, which may be known or obvious for the person skilled in the art, are to be regarded as falling within the scope of the invention.

CLAIMS

1. Apparatus for the mechanized preparation of pizzas, characterized in that it comprises:

- 5 - a horizontal shovel which is drivable step by step through a predetermined path by motorized means;
- a distributor of dough loaves arranged for dropping loaves at a first stop in the shovel path;
- a pizza moulder arranged at a second stop in the shovel path, for pressing and
- 10 spreading the loaf;
- at least a distributor of a dressing placed at at least a third stop in the shovel path, for dropping metered portions of dressing on the pizza carried by the shovel; and
- an oven placed at a fourth stop in the shovel path, for receiving the pizza from the shovel.

15

2. Apparatus for the mechanized preparation of pizzas according to claim 1, characterized in that it comprises a number of distributors arranged at further stops in the shovel path.

- 20 3. Apparatus for the mechanized preparation of pizzas according to claim 1 or 2, characterized in that the shovel driving means comprise a vertical shaft which is driven by an electric motor.

4. Apparatus for the mechanized preparation of pizzas according to one of claims 1 to

25 3, characterized in that the shovel is supported on a slide which is movable transversely to the path of the shovel driving means, at different speeds in one and the other direction of motion, so that the shovel, when it is dwelling before the oven, is operable to enter the oven slowly while carrying a pizza, and to quickly withdraw from the oven in order to unload the pizza.

30

5. Apparatus for the mechanized preparation of pizzas according to one of claims 1 to 4, characterized in that the distributor of dough loaves comprises at least one loaf

resting shelf and at least one pushing member for dropping a loaf from the shelf onto a delivery chute that is alignable with the shovel.

5 6. Apparatus for the mechanized preparation of pizzas according to one of claims 1 to 5, characterized in that the pizza moulder comprises a disk carried by an actuator for pushing the disk vertically toward the shovel in order to spread the loaf on the shovel.

10 7. Apparatus for the mechanized preparation of pizzas according to claim 6, characterized in that a cup is arranged coaxially with the disk and has a rim surrounding the disk for defining the boundary of the pizza while it is spread.

15 8. Apparatus for the mechanized preparation of pizzas according to claim 6 or 7, characterized in that the disk actuator imparts the disk a rotation around its axis during the descent.

9. Apparatus for the mechanized preparation of pizzas according to one of claims 6 to 8, characterized in that a port for compressed air opens in the center of the disk, for separating the flattened pizza from the spreader disk.


20 10. Apparatus for the mechanized preparation of pizzas according to one of claims 1 to 9, characterized in that at least one of the distributors of dressing comprises a vessel with a flat bottom and at least one eccentric opening, and a rotatable disk placed under the vessel bottom and having an aperture which is alignable with the opening in the vessel bottom by rotation.

25 11. Apparatus for the mechanized preparation of pizzas according to one of claims 1 to 10, characterized in that the oven comprises at least one pusher paddle which is operable to deliver the pizza out of the oven at the end of baking.

30 12. Apparatus for the mechanized preparation of pizzas according to claim 10, characterized in that the pusher paddle is curved and is rotatable around one of its ends by the action of an actuator.

1/6

Fig. 1

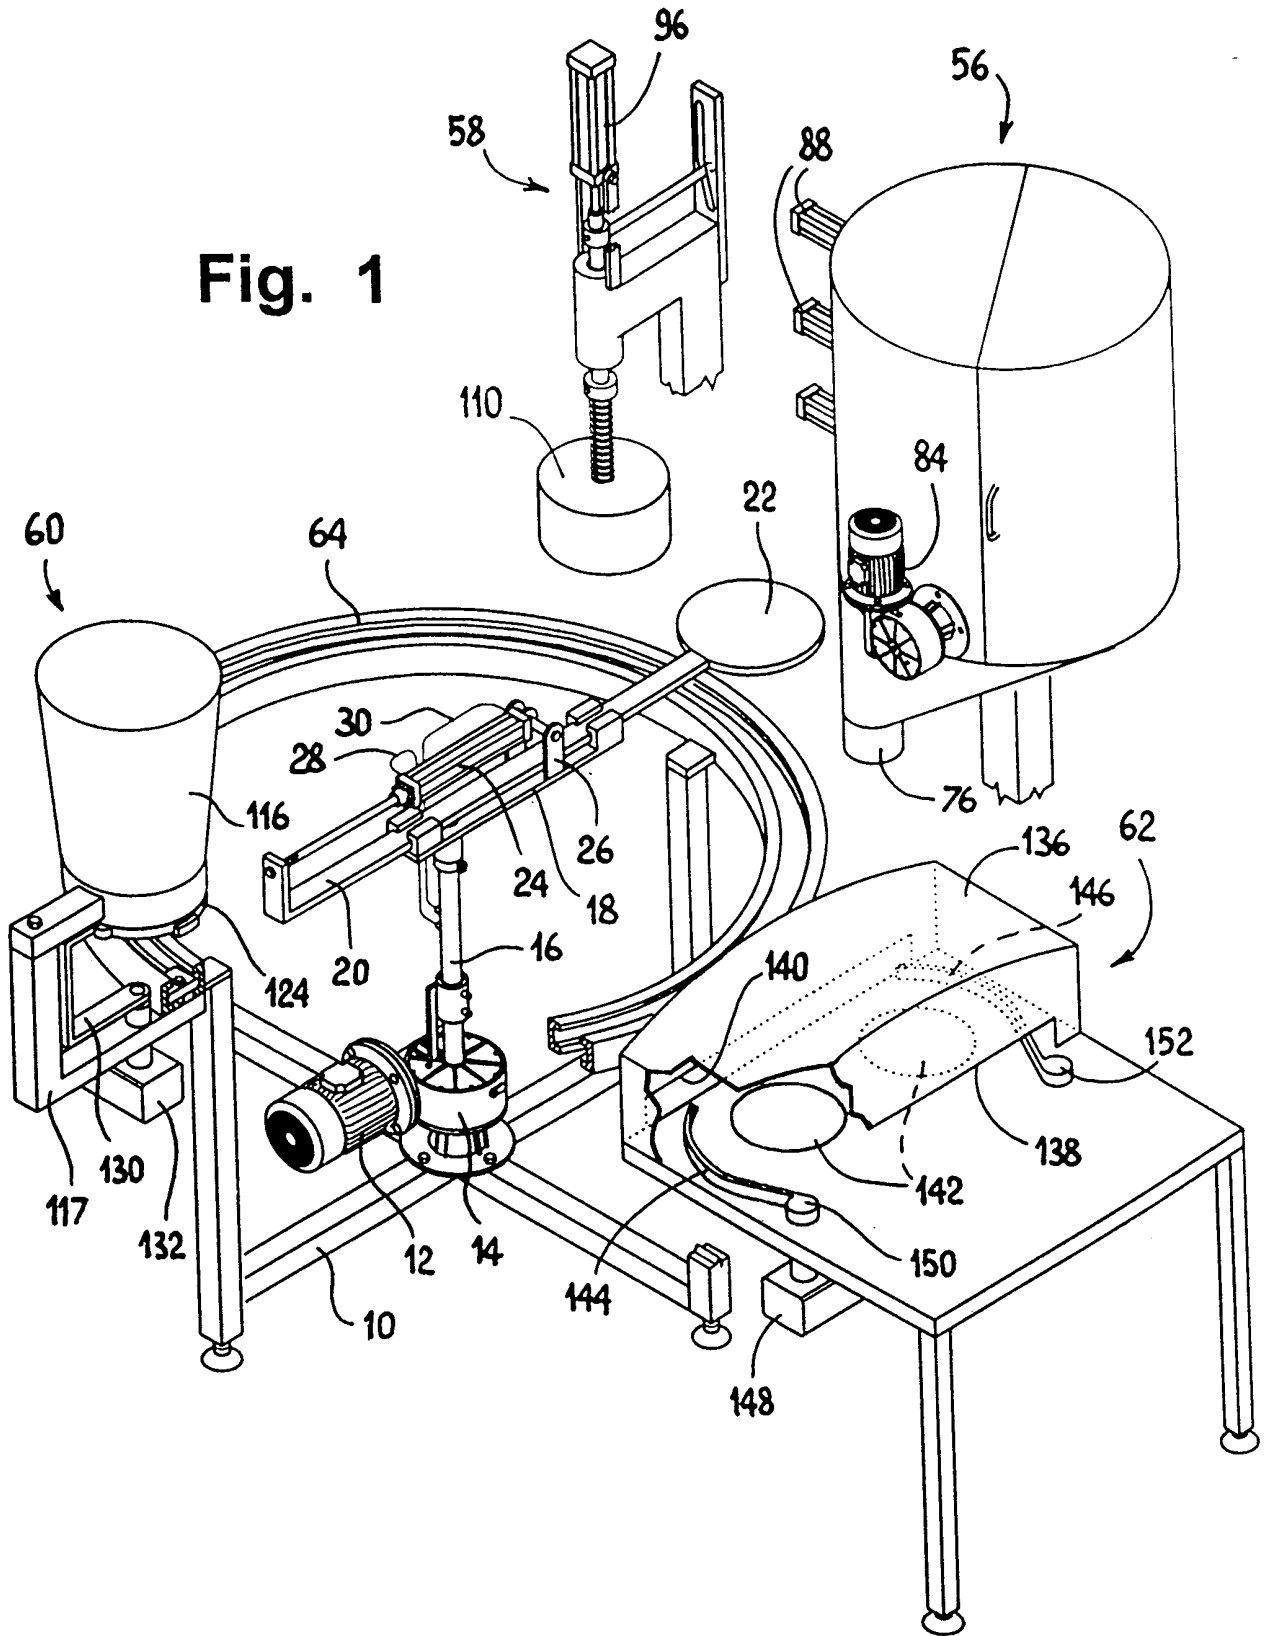

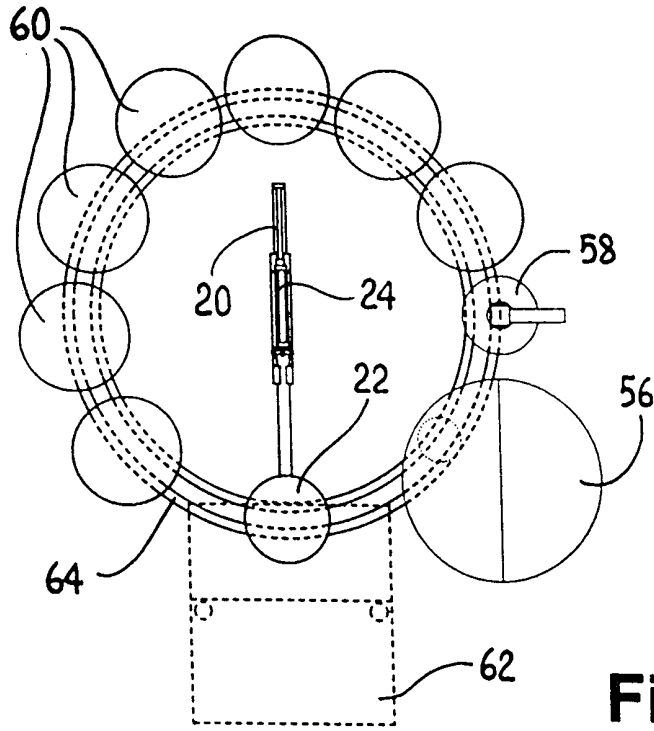


Fig. 2

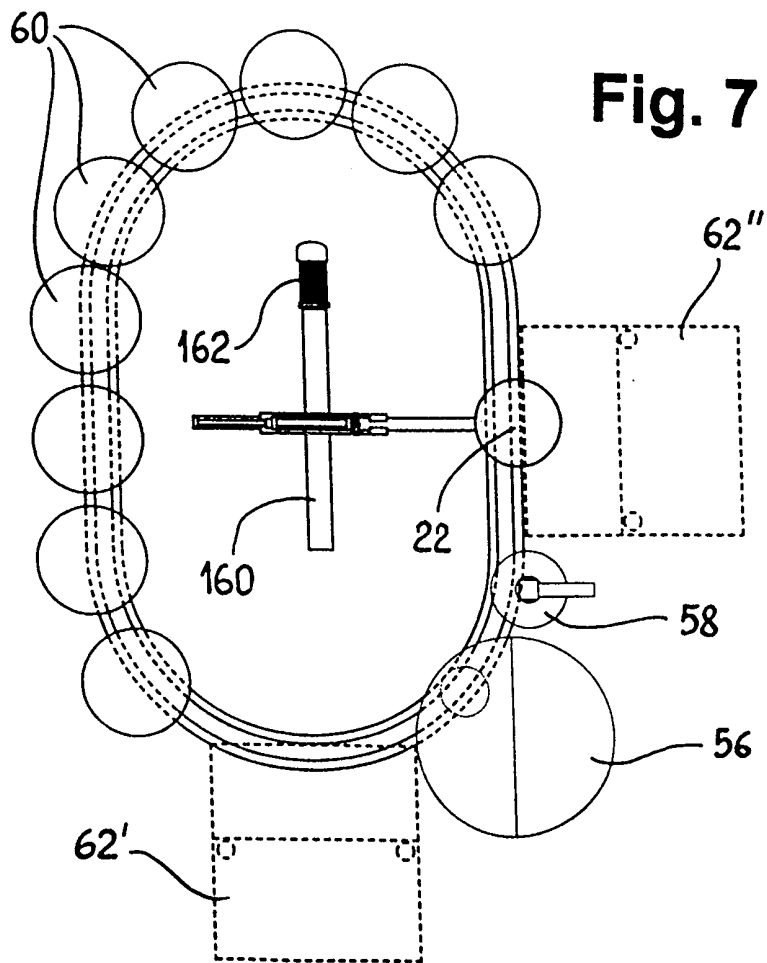


Fig. 7

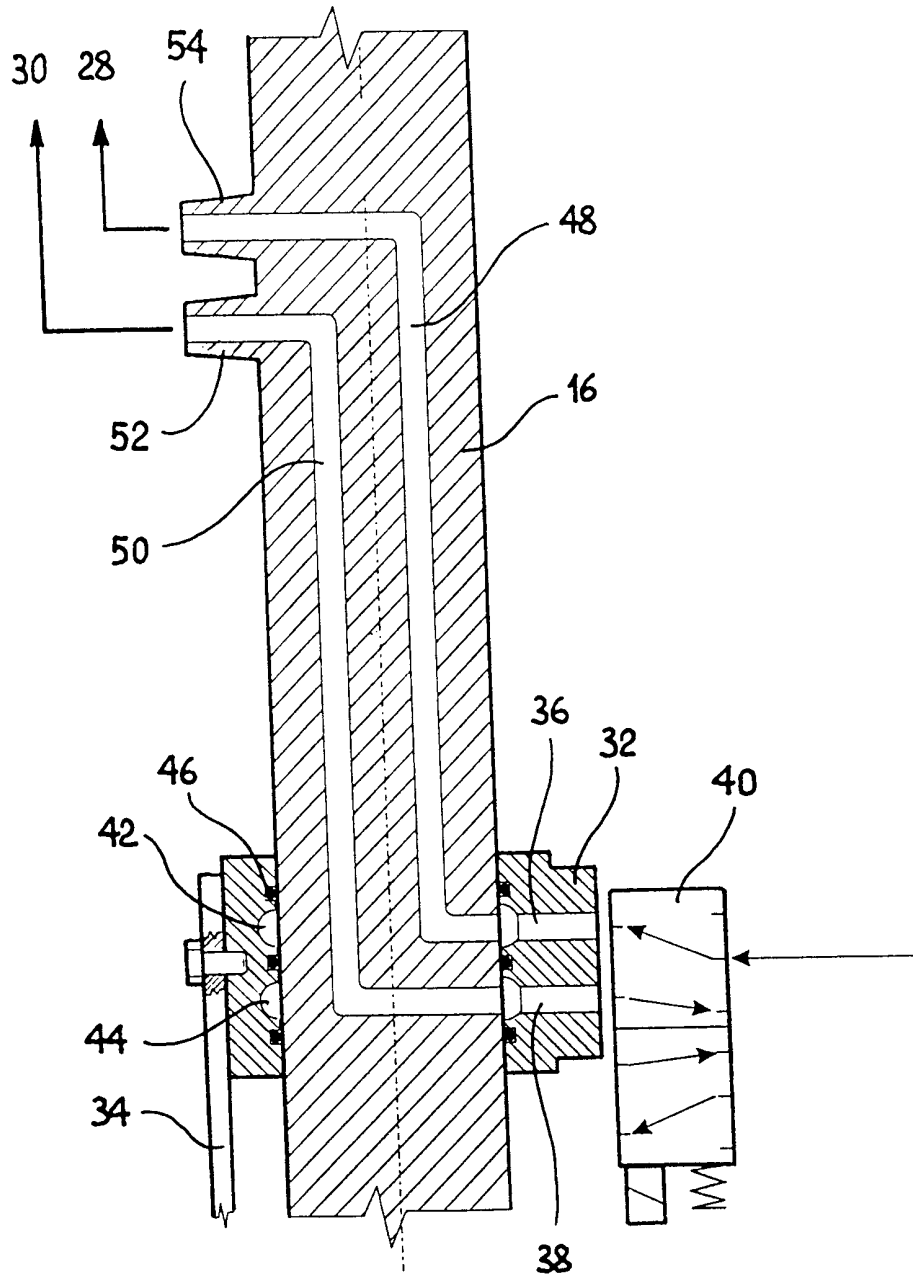


Fig. 3

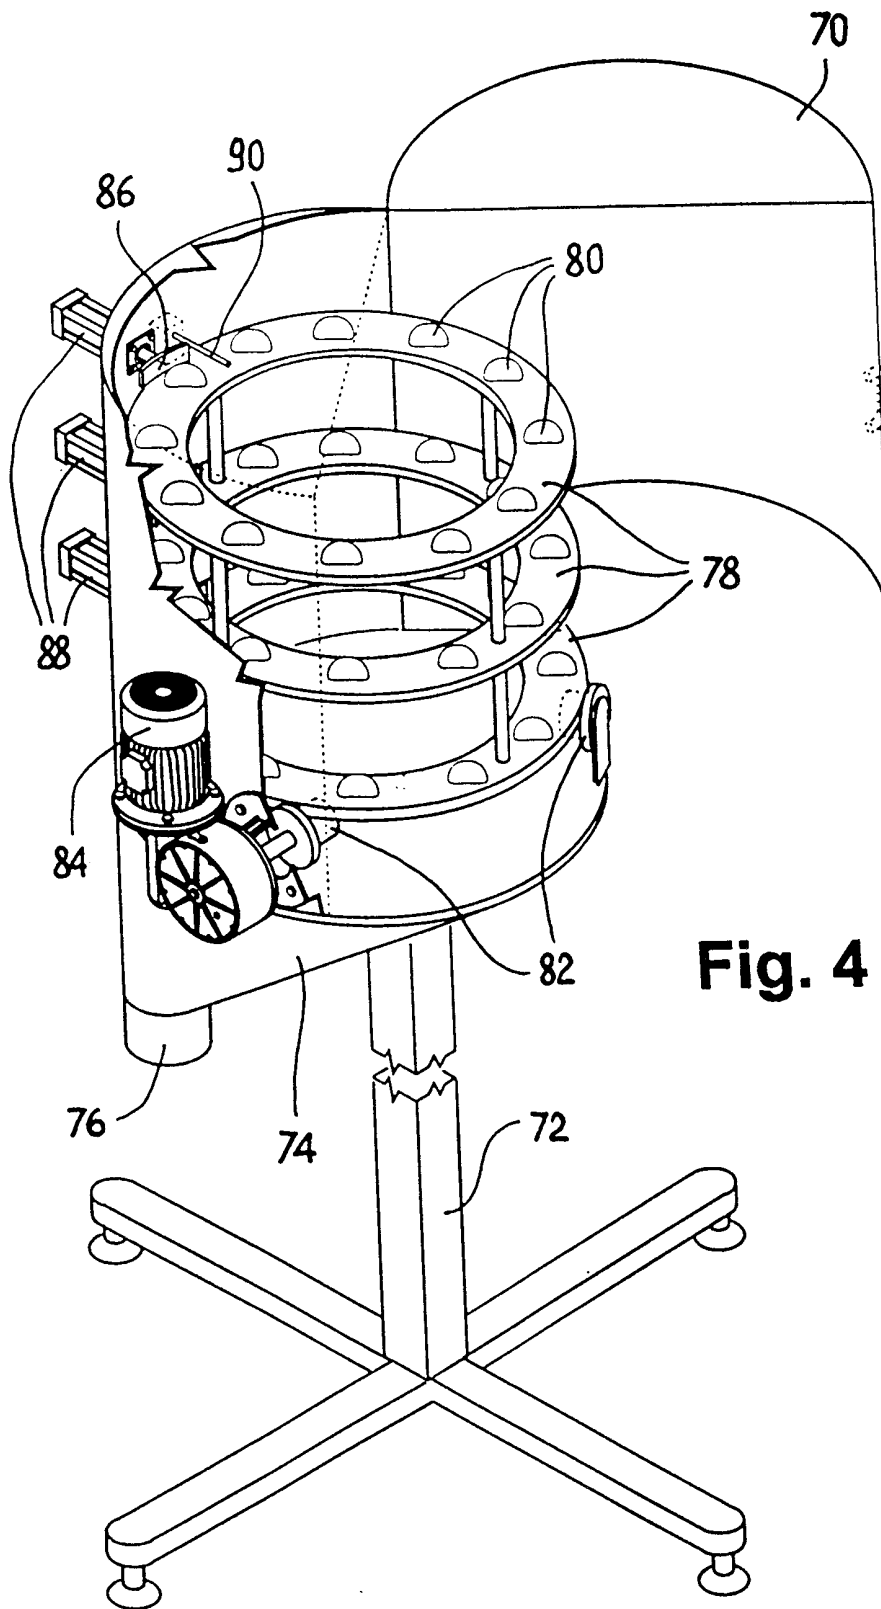


Fig. 4

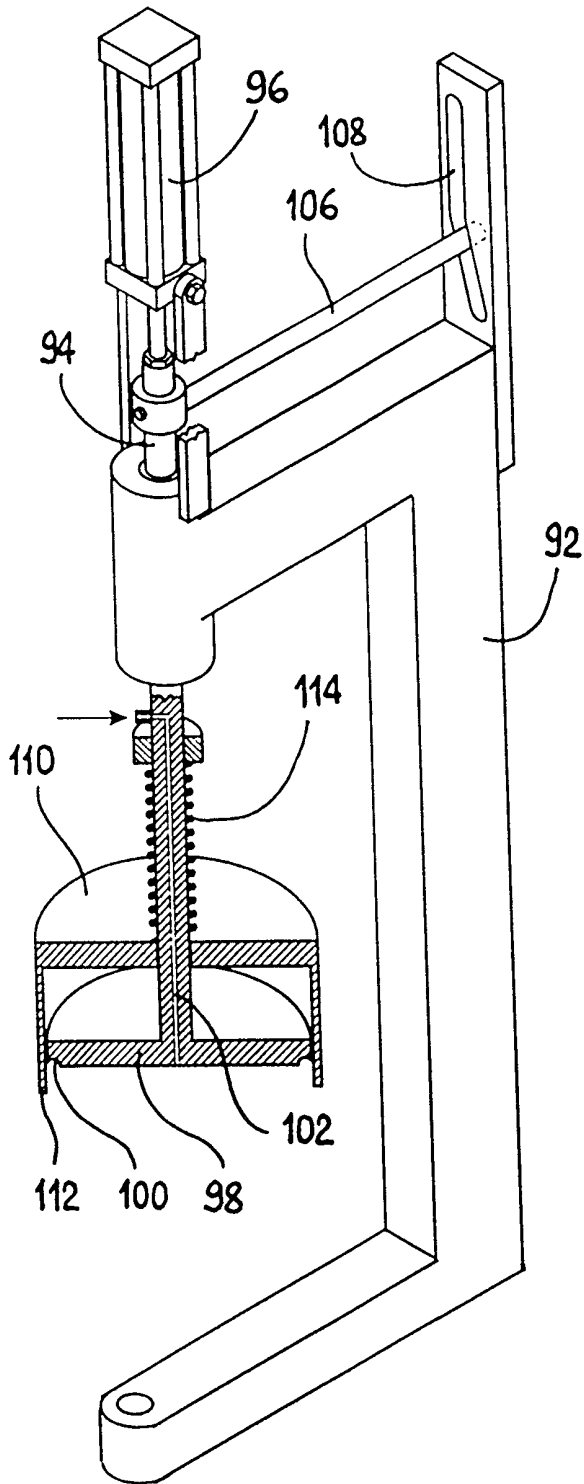


Fig. 5

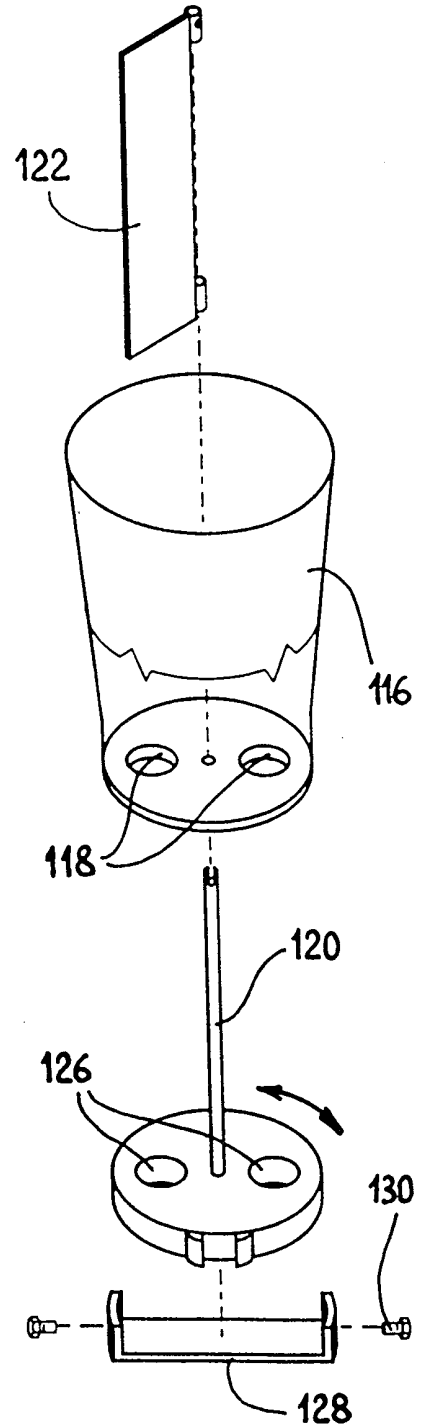


Fig. 6

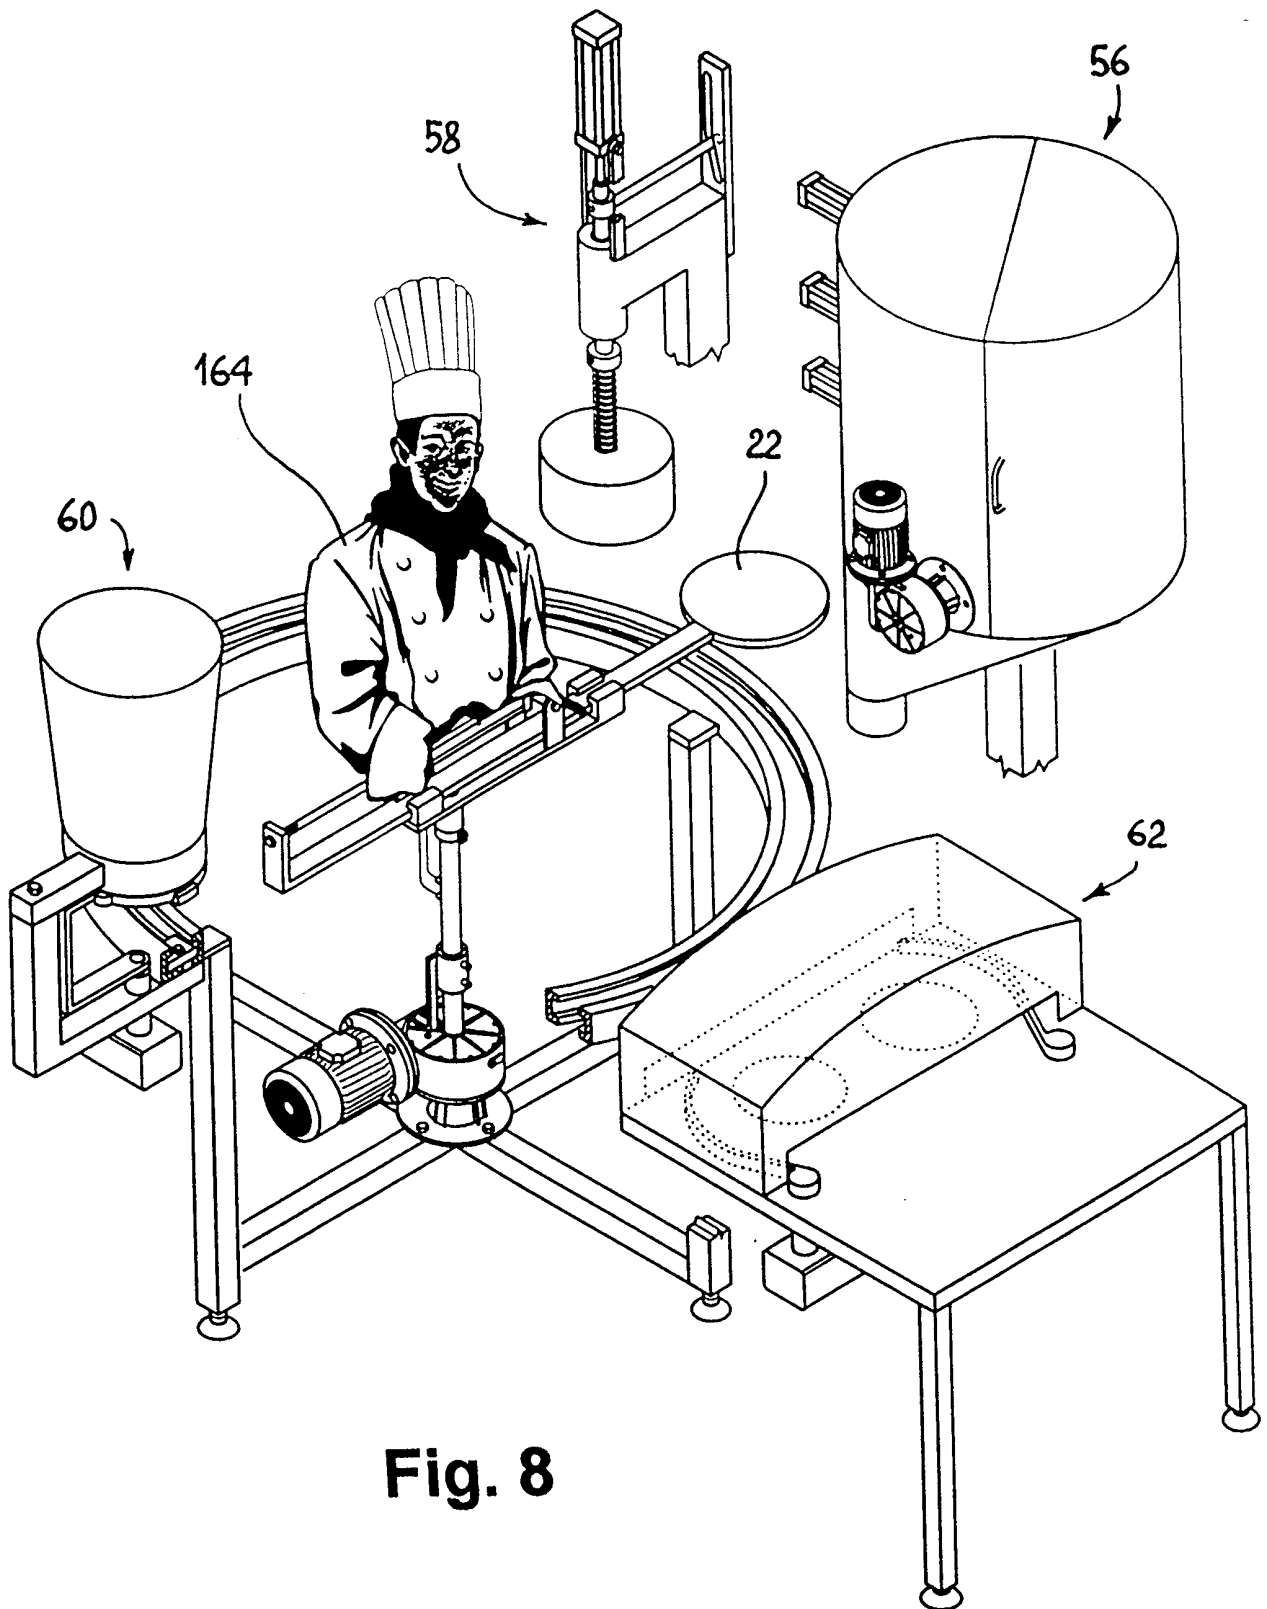


Fig. 8

INTERNATIONAL SEARCH REPORT

Int'l Application No
PCT/IB 00/00023

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A21C11/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 A21C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2 190 483 A (PACILIO) 13 February 1940 (1940-02-13) the whole document	1-3,6,7, 11
Y	WO 98 04137 A (BRINI BERNARDO ;KOUJOUNDIJIAN KRIKOR (CA); KHATCHADOURIAN PUZANT () 5 February 1998 (1998-02-05) the whole document	1-3,6,7, 11
A		4
P,A	WO 99 08537 A (PILATI MARCO ;MALFATTI PIERLUIGI (IT); TORGHELE CLAUDIO (IT); WALT) 25 February 1999 (1999-02-25) the whole document	1,2,6,7, 11
A	US 5 630 358 A (PATEL CHANDULAL) 20 May 1997 (1997-05-20) the whole document	1,3,6
	-/--	

Further documents are listed in the continuation of box C. Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the International filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the International filing date but later than the priority date claimed

"T" later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the International search	Date of mailing of the International search report
27 March 2000	04/04/2000

Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer Silvis, H
--	-------------------------------------

INTERNATIONAL SEARCH REPORT

Int'l Application No

PCT/IB 00/00023

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 358 618 A (VETTA) 19 December 1967 (1967-12-19) the whole document ---	1,2,10
A	US 3 949 660 A (KUHLMAN HARVEY G) 13 April 1976 (1976-04-13) the whole document ---	5
A	US 4 116 119 A (KUHLMAN HARVEY G) 26 September 1978 (1978-09-26) the whole document ---	5
A	US 5 417 989 A (ATWOOD HAROLD ET AL) 23 May 1995 (1995-05-23) the whole document ---	6,7,9
A	US 2 365 699 A (HARRISS ET AL) 26 December 1944 (1944-12-26) the whole document ---	10
A	US 4 771 726 A (FITCH JR CLIFFORD E) 20 September 1988 (1988-09-20) ---	
A	US 3 735 692 A (MARCHIGNONI A) 29 May 1973 (1973-05-29) ---	
A	WO 90 13229 A (EDIBLE TECHNOLOGY INC) 15 November 1990 (1990-11-15) ---	
A	GB 385 035 A (HARBER ET AL) 12 January 1933 (1933-01-12) -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int: ional Application No

PCT/IB 00/00023

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2190483	A	13-02-1940	NONE	
WO 9804137	A	05-02-1998	AU 3982597 A EP 0914045 A US 5921170 A	20-02-1998 12-05-1999 13-07-1999
WO 9908537	A	25-02-1999	IT BZ970044 A AU 9260498 A EP 0938263 A PL 332830 A	19-02-1999 08-03-1999 01-09-1999 11-10-1999
US 5630358	A	20-05-1997	NONE	
US 3358618	A	19-12-1967	NONE	
US 3949660	A	13-04-1976	NONE	
US 4116119	A	26-09-1978	NONE	
US 5417989	A	23-05-1995	NONE	
US 2365699	A	26-12-1944	NONE	
US 4771726	A	20-09-1988	NONE	
US 3735692	A	29-05-1973	BE 765996 A CH 522362 A DE 2117972 A FR 2090625 A GB 1294424 A SU 406326 A	16-09-1971 15-05-1972 25-11-1971 14-01-1972 25-10-1972 05-11-1973
WO 9013229	A	15-11-1990	US 5121677 A AU 5662090 A JP 3027273 A	16-06-1992 29-11-1990 05-02-1991
GB 385035	A		NONE	