

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 387 052 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
27.07.2005 Bulletin 2005/30

(51) Int Cl.7: **F01N 7/10, F01N 7/08**

(21) Application number: **03017203.5**

(22) Date of filing: **29.07.2003**

(54) **Engine exhaust apparatus**

Abgasanlage für Brennkraftmaschinen

Système d'échappement pour moteurs à combustion interne

(84) Designated Contracting States:
DE FR GB

(30) Priority: **30.07.2002 JP 2002221168**

(43) Date of publication of application:
04.02.2004 Bulletin 2004/06

(73) Proprietor: **NISSAN MOTOR COMPANY, LIMITED**
Yokohama-shi, Kanagawa 221-0023 (JP)

(72) Inventors:

- **Ashida, Masaaki**
Yokohama-shi, Kanagawa 245-0002 (JP)
- **Nishizawa, Kimiyoshi**
Yokohama-shi, Kanagawa 246-0006 (JP)
- **Shibata, Katsuhiro**
Machida-shi, Tokyo 194-0044 (JP)

(74) Representative: **Grünecker, Kinkeldey,**
Stockmair & Schwanhäusser Anwaltssozietät
Maximilianstrasse 58
80538 München (DE)

(56) References cited:

EP-A- 0 313 922	EP-A- 0 818 616
DE-A- 4 127 633	DE-A- 19 938 689
FR-A- 2 663 986	US-A- 4 151 715
US-A- 4 420 933	US-A- 5 787 709
US-A- 6 082 103	

- **PATENT ABSTRACTS OF JAPAN vol. 1997, no.**
09, 30 September 1997 (1997-09-30) & JP 09
125947 A (SANKEI GIKEN KOGYO KK;CHUBU
ENG KK), 13 May 1997 (1997-05-13)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 387 052 B1

Description

[0001] The present invention relates to an exhaust apparatus according to the preamble portion of claim 1 and more specifically to the structure of such an exhaust manifold.

[0002] A Published Japanese Patent Application Publication No. H08(1996)-68316 shows an exhaust purifying catalyst unit disposed just below an exhaust manifold to promote the activation of the catalyst after a start of the engine.

[0003] Recently, in order to further hasten the activation of the catalyst, and to improve the exhaust purifying performance, attempts are made to decrease the heat capacity of catalyst carrier and thereby to improve the warming speed with honeycomb catalyst carriers of thinner walls. However, the decrease of the carrier wall thickness could cause erosion by granulated foreign objects contained in exhaust gases (such as welding spatters), and cracks due to localized temperature difference caused by nonuniformity in exhaust gas streams.

[0004] When a confluence angle between two exhaust manifold branches is large and an expanding flare section is connected directly to the confluence as in the exhaust system of the above-mentioned document, the exhaust stream is introduced into the catalyst in an oblique direction forming a larger angle (greater than 30°) with a center axis of the catalyst unit. Therefore, particles contained in the exhaust stream could cause erosion by colliding against cell walls of catalyst carriers at the entrance, and particles lingering at the entrance could scrape the cell walls and cause erosion by moving minutely with incoming exhaust stream.

[0005] When exhaust gas streams are introduced into the catalyst through an expanding flare section immediately after the confluence, the flow velocity distribution could be uneven in the entrance of the catalyst and the temperature distribution could be too irregular in carriers to cause cracks for example in the case of transition from a medium and high load operation near the maximum speed, to a decelerating operation with fuel cutoff.

[0006] From US 4,151,715 there is known an exhaust gas purification system for use in an internal combustion engine, wherein the exhaust branches of cylinders #1 and #4 merge into a first combined branch and wherein the exhaust branches of cylinders #2 and #3 merge into a second combined branch. Said first and second combined branches merge into a straight pipe, said straight pipe leading to an exhaust purifying catalyst unit. Ignition in the four-cylinder engine of document D1 takes place in the order of the cylinders #1, #3, #4 and #2.

[0007] Moreover, DE 41 27 633 A1 discloses an exhaust gas system of an internal combustion engine, wherein the exhaust branches of cylinders #1 and #4 merge into a first combined branch and wherein the exhaust branches of cylinders #2 and #3 merge into a second combined branch. Therein, the second combined branch is arranged coaxially with and is accommodated

within the first combined branch. The first and second combined branches are opening into a narrowing funnel, which leads to a straight pipe section. Between said straight pipe section and the exhaust gas catalyst unit a flare section (diffusing section) is arranged.

[0008] Additionally, EP 0 313 922 A1 discloses an exhaust gas system of an internal combustion engine, wherein the exhaust branches of cylinders #1 and #4 merge into a first combined branch and wherein the exhaust gases of cylinders #2 and #3 merge into a second combined branch. Same first and second combined branches merge into a straight pipe portion. Between said straight pipe portion and the exhaust gas catalyst unit a diffuser section is provided.

[0009] From FR 2 663 986 there is known an exhaust manifold, wherein the exhaust branches of cylinders #1 and #2 merge into a first combined branch and wherein the exhaust branches of cylinders #3 and #4 merge into a second combined branch. These combined branches are partially arranged side-by-side and parallel to each other. Between said side-by-side and parallel part of the first and second combined branches and an exhaust gas catalyst unit a diffuser section is arranged.

[0010] In addition, EP 0 818 616 A1 discloses an exhaust manifold, wherein the exhaust branches of all cylinders #1 ~ #4 of the internal combustion engine are commonly merging into a chamber part, which is connected to a catalytic converter.

[0011] It is an objective of the present invention to provide an improved engine exhaust apparatus as indicated above adequate for preventing erosion and heat deterioration and improving emission control performance and durability.

[0012] This objective is solved by an engine exhaust apparatus having the features of claim 1.

[0013] Further embodiments are laid down in the dependent claims.

[0014] In the following, the present invention is explained in further detail with respect to several embodiments thereof in conjunction with the accompanying drawings, wherein:

FIG. 1 is a schematic perspective view showing an engine exhaust apparatus according to one embodiment.

FIG. 2 is a front view of an exhaust manifold shown in FIG. 1.

FIG. 3 is a plan view of the exhaust manifold.

FIG. 4 is a side view of the exhaust manifold.

FIG. 5 is a bottom view of the exhaust manifold.

FIG. 6A is a graph showing a relationship between a total length of exhaust manifold piping and an exhaust temperature. FIGS. 6B and 6C are schematic views illustrating the total exhaust piping lengths in two different exhaust manifold piping systems.

FIG. 7 is a graphs showing a relationship between an exhaust gas temperature and an HC emission quantity.

FIG. 8 is a graph showing influence on an exhaust gas pulsation pressure by a confluence angle of exhaust manifold branches.

FIG. 9 is a graph showing a relationship between the confluence angle and an intake volumetric efficiency.

FIG. 10 is a schematic view showing behavior of a particle flowing into a catalyst.

FIG. 11 is a graph showing a relationship between an inclination angle and an erosion volume.

FIGS. 12A and 12B are views showing flow velocity distribution at the inlet end of the catalyst in the embodiment in comparison with a comparative example.

FIG. 13 is a graph showing the degree of nonuniformity in the flow velocity distribution in the embodiment in comparison with the comparative example.

FIG. 14 is a graph showing a relationship between an expanding angle and a maximum temperature difference.

FIG. 15 is a graph showing an effect due to retardation of an exhaust valve opening timing.

FIG. 16 is a block diagram schematically showing a valve timing adjusting system which can be employed in the embodiment.

[0015] FIG. 1 shows an engine exhaust system according to one embodiment. An engine 1 of this example is a four cylinder engine. The firing order is: #1 → #3 → #4 → #2.

[0016] An exhaust manifold 2 is fixed to one side of a cylinder head of engine 1, and connected with exhaust ports of the cylinders of engine 1. An exhaust purifying catalyst (or manifold catalyst unit) 3 is connected with an outlet (or downstream end) of exhaust manifold 2.

[0017] FIGS. 2~5 show exhaust manifold 2 more in detail. Fig. 2 is a front view of exhaust manifold 2; FIG. 3 a plan view; FIG. 4 a side view; and FIG. 5 a bottom view. Exhaust manifold 2 of the illustrated example includes four exhaust branches (exhaust manifold branches) B1~B4, first and second combined (or confluence) branches W1 and W2, a straight pipe section (collecting section) SP, and a flare section (or diffuser section) DF. Four exhaust branches B1~B4 are connected with the outlets of the exhaust ports through flanges 21. First combined branch W1 is connected with first and fourth exhaust branches B1 and B4, and arranged to form a confluence of exhaust streams of branches B1 and B4 from #1 cylinder and #4 cylinder which are not consecutive in the firing order, and which are outer cylinders in the cylinder row. Second combined branch W2 is connected with second and third exhaust branches B2 and B3, and arranged to form a confluence of exhaust streams of branches B2 and B3 from #2 cylinder and #3 cylinder which are not consecutive in the firing order, and which are inner cylinders in the cylinder row. In the cylinder row, #2 cylinder and #3 cylinder are located between #1 cylinder and #4 cylinders. Straight

pipe section SP is connected with first and second combined branches W1 and W2 to form a confluence of the two combined branches. From the junction at which the exhaust streams of two combined branches W1 and W2 merge, straight pipe section SP extends straight to the inlet (or upstream end) of flare section DF. Flare (diffuser) section DF is conical in this example, and expands outwards so that the diameter of flare section DF increases gradually from the inlet to the outlet (or downstream end). Manifold catalyst 3 is fixed to the outlet of flare section DF through a flange 22.

[0018] First and fourth exhaust branches B1 and B4 extend, respectively, from the exhaust ports of #1 cylinder and #4 cylinders, obliquely and downwardly toward the confluence point located below the middle between the outlets of the exhaust ports of #1 cylinder and #4 cylinders, and meets together at a confluence angle (or convergence angle) θ_1 equal to or smaller than 20° . Confluence angle θ_1 is defined as an angle formed between a center line of first exhaust branch B1 and a center line of fourth exhaust branch B4 at an intersection.

[0019] From the outlets of the exhaust ports of #2 and #3 cylinders located between #1 and #4 cylinders, respectively, second and third exhaust branches B2 and B3 project forward, extends laterally toward each other, and meets together at a shorter distance. A partition wall 23 is formed at the confluence between second and third exhaust branches B2 and B3, and arranged to define a confluence angle (or convergence angle) θ_2 between second and third branches B2 and B3, smaller than or equal to 20° .

[0020] First combined branch W1 connected with outer branches B1 and B4 extends downwards between second combined branch W2 and engine 1, as shown in FIG. 4. First and second combined branches W1 and W2 extend downwards, side by side, approximately in parallel to each other. The confluence point between second and third branches B2 and B3 is located at a higher position. Accordingly, second combined branch W2 includes a long straight section extending downwards. First combined branch W1 also includes a straight section, but the straight section of first combined branch W1 is shorter than that of second combined branch W2.

[0021] A confluence angle (or convergence angle) θ_3 between first and second combined branches W1 and W2 is set smaller than or equal to 20° . In the illustrated example, first and second combined branches W1 and W2 extend straight side by side in the downward direction, and open straight into straight pipe section SP, so that the confluence angle between the two combined branches is equal to 0° . In this example, therefore, all the three confluences are so arranged that the tributaries meet together at a sharp confluence angle smaller than or equal to 20° .

[0022] An inclination angle α formed by a center line L of straight pipe section SP and a center line C of manifold catalyst 3 is smaller than or equal to 30° , as shown

in FIG. 2. Both center lines L and C may be aligned in a line, and hence the inclination angle α may be equal to zero. Therefore, center line L of straight pipe section SP forms an angle in the range of $90^\circ \pm 30^\circ$, with a flat joint surface of flange 22 at the outlet of exhaust manifold 2, or a flat joint surface of exhaust catalyst 3 on the inlet side.

[0023] Straight pipe section SP is formed with a hole 24 for mounting an air-fuel ratio sensor (or O_2 sensor). This mounting hole 24 is opened at an intermediate position in an outside wall of straight pipe section 2. A hole 25 shown in FIG. 1 is for mounting an air-fuel ratio sensor (or O_2 sensor) on the downstream side of catalyst 3.

[0024] Flare section DF of this example is conical and flaring toward the downstream end 22 of exhaust manifold 2. An expanding angle β as shown in FIG. 2 is set smaller than or equal to 60° .

[0025] Manifold catalyst 3 includes a catalyst carrying ceramic carrier of a honeycomb structure having thin walls or honeycomb walls of a wall thickness less than or equal to 3 mil ($=3 \times 25.4/1000 = 0.076$ mm). In this example, the wall thickness of the honeycomb partition wall is equal to about 2 mil ($=2 \times 25.4/1000 = 0.051$ mm). The number of cells per 1 inch² is 900.

[0026] The thus-constructed exhaust apparatus according to this embodiment is operated as follows: This system combines earlier the exhaust streams from two cylinders which are not adjacent to each other in the firing order, and hence this system is less susceptible to undesired influence of exhaust interference. Therefore, this system can decrease the total length of the exhaust pipes without causing a torque decrease in the low and medium speed region.

[0027] For #2 and #3 cylinders, branches B2 and B3 are so arranged that branches B2 and B3 project laterally toward each other and meets at the shortest distance at the confluence point. After the confluence point, the second combined branch W2 is in the form of a straight long pipe. This arrangement can help decrease the total length of exhaust piping, and thereby improve the ability to increase the temperature of manifold catalyst 3 after a start of engine 1.

[0028] FIG. 6A shows a relationship between the total exhaust manifold pipe length and the exhaust temperature (specifically, the exhaust temperature just before manifold catalyst 3 at 15 seconds after an engine start). It is possible to increase the exhaust temperature just before manifold catalyst 3 from 270°C to about 320°C if the total exhaust pipe length can be decreased from 1200 mm to 900 mm. The total exhaust pipe length is a total of lengths of exhaust branches and lengths of combined branches. In the case of FIG. 6B, the total exhaust pipe length is equal to $a + b + c + d + e$. In the case of FIG. 6C, the total exhaust pipe length is equal to $a + b + c + d + e + f + g$. FIG. 7 shows a relationship between the exhaust temperature at a position just before manifold catalyst 3 after 15 seconds after an engine start, and an HC emission (or discharge) quantity at the outlet

of the catalyst during that time duration. By increasing the exhaust temperature from 270° to 320° , this exhaust system according to the embodiment can promote the activation of manifold catalyst, and thereby reduce the HC emission.

[0029] The arrangement of sharp confluence angle smaller than or equal to 20° between two branches is effective for reducing the exhaust interference by preventing exhaust pulsation from propagating around a sharp turn. If a confluence angle is larger, a blow down wave can readily propagate from #1 cylinder around the blunt confluence. Therefore, the blow down wave can cause exhaust interference on another cylinder by facilitating the propagation of blow down wave, and cause exhaust interference on its own #1 cylinder by reflection from a closed exhaust valve of another cylinder. FIG. 8 shows the results of measurement of exhaust pulsation pressure at the outlet of the exhaust port of #1 cylinder in arrangements of confluence angles of 60° , 30° and 0° . As shown in FIG. 8, by decreasing the confluence angle, it is possible to decrease the exhaust pulsation pressure in the vicinity of a valve overlap from the intake valve opening timing to the exhaust valve closing timing, and thereby to reduce the exhaust interference. When the confluence angle is smaller than or equal to 30° , the exhaust interference is as low as the level of the arrangement having a confluence angle of 0° .

[0030] FIG. 9 shows a relationship between the confluence angle and intake volumetric efficiency (η_v). As shown in FIG. 9, in the range of the confluence angle from 30° to 60° , the sensitivity is $-0.17\%/10^\circ$ (the volumetric efficiency decreases by 0.17% each time the confluence angle is increased by 10°). In the confluence angle range of $0^\circ \sim 20^\circ$, the sensitivity is $-0.05\%/10^\circ$ (the volumetric efficiency decreases by 0.05% each time the confluence angle is increased by 10°). Namely, an increase in the confluence angle in the range of $0^\circ \sim 20^\circ$ exerts little influence on a decrease in the intake volumetric efficiency. In the confluence angle range beyond 20° , the volumetric efficiency decreases sharply with an increase in the confluence angle especially when the confluence angle exceeds 30° . Therefore, the system according to the illustrated embodiment can decrease the exhaust interference securely by setting the confluence angle lower than or equal to 20° .

[0031] In the illustrated embodiment of the present invention, straight pipe section SP is interposed between the confluence of the first and second combined branches W1 and W2 and the exhaust purifying catalyst 3. This straight pipe section SP functions to determine the direction of the combined exhaust stream after the confluence and to introduce the combined exhaust stream in a direction approximately along the center line C of exhaust purifying catalyst 3 (or the longitudinal direction of exhaust catalyst 3), into manifold catalyst 3. Foreign objects even if included in the exhaust could pass through cell chambers without colliding against cell walls of the catalyst carrying carrier. Therefore, this ar-

rangement can restrain erosion. As shown in FIG. 10, a foreign object could collide against a cell wall when the object flows obliquely into manifold catalyst 3, as shown by a broken line. In the case of the flow direction shown by a solid line in FIG. 10, the foreign object is introduced into exhaust purifying catalyst 3 along the cell walls, so that the probability of the particle passing through a cell chamber becomes higher. Therefore, the arrangement of straight pipe section SP can prevent erosion due to collision of foreign objects against carrier cell walls, and damage of cell wall ends due to violent action of foreign objects remaining at the inlet of the catalyst carrier.

[0032] FIG. 11 shows the results of an endurance test corresponding to a travel of 150,000 kilometer. In this test, erosion volume (cc) was measured for various values of the inclination angle α between the center line of straight pipe section SP and the center line of exhaust purifying catalyst 3. The inclination angle should be set smaller than or equal to 30° when an allowable erosion volume is 3 cc.

[0033] Nonuniformity in the exhaust gas velocity distribution in the end surface of the manifold catalyst could cause one-sided stream, and excessive local temperature difference in the catalyst carrier under some engine operating conditions, resulting in cracks. However, the straight pipe section SP can serve as a runway for mixing the exhaust gas streams, and uniformize the flow velocity distribution in the catalyst.

[0034] With flare section DF having an expanding angle equal to or smaller than 60° , the exhaust passage is expanded smoothly to the inlet of manifold catalyst 3. Flare section DF contributes to the uniformization of the flow velocity distribution.

[0035] Exhaust branches B2 and B3 for #2 and #3 cylinders are arranged to meet at a shorter distance, and these branches B2 and B3 are shorter than exhaust branches B1 and B4. Therefore, the second combined branch W2 can serve as a long runway and contribute to the uniformization of exhaust gas flow velocity distribution of the exhaust gas flow flowing into the catalyst.

[0036] FIG. 12A shows flow velocity distribution in the inlet of the manifold catalyst measured at a timing of exhaust gas stream flowing into the catalyst from each of the four cylinders #1 ~ #4 in the engine system according to the illustrate embodiment. FIG. 12B shows the results of a comparative example in which the confluence angle between branches is greater, there is no straight pipe section and the expanding angle of a diffuser section is greater. The nonuniformity is lower in the case of FIG. 12A as compared to the comparative example of FIG. 12B. The degree of nonuniformity or irregularity in the flow rate distribution can be expressed numerically as:

$$\gamma = 1 - \Sigma(|V_i - V_{ave}|/V_{ave})$$

In this equation, V_i is a flow velocity in each of various

portions in the inlet end, and V_{ave} is an average of the flow velocities in the various portions. The irregularity is greater when this quantity γ is smaller. The uniformity is greater as γ increases.

[0037] FIG. 13 shows the degree γ of nonuniformity calculated for the totality of all the cylinders and each cylinder in the illustrated example according to the embodiment and the comparative example. As shown in FIG. 13, the irregularity is lower and the uniformity is higher in the case of the illustrated example as compared to the comparative example.

[0038] FIG. 14 shows the result of measurement of a greatest temperature difference in the inlet end of the manifold catalyst when the expanding angle β of the flare section DF was varied. As evident from FIG. 14, the expanding angle β should be set smaller than or equal to 60° if an allowable greatest temperature difference is 130° .

[0039] FIG. 15 shows reduction of exhaust interference by retardation of the exhaust valve opening timing of the engine. In general, the exhaust valve opens about 45° before bottom dead center (BDC). However, in this example of the embodiment, the exhaust valve opening timing is set after 30° before bottom dead center, and set in the range from 30° before bottom dead center, to the bottom dead center. This example according to the embodiment can retard the timing of blow down as shown by broken lines in FIG. 15, as compared to an ordinary example shown by solid lines of earlier technology. By so doing, the engine system of this example can improve the exhaust interference during a valve overlap (O/L) by preventing a reflected wave from reaching a cylinder during its valve overlap, and thereby improve the torque in the low and medium speed region. Adjustment of the exhaust valve opening timing can be achieved by a valve timing adjusting mechanism 50 shown in FIG. 16. For example, the adjustment of the exhaust valve opening timing can be achieved by decreasing an operating angle of an exhaust valve driving cam, varying an operating angle of an exhaust valve with a variable valve timing mechanism, varying an exhaust valve operating angle and a valve lift, and shifting a center position of an exhaust valve operation. Valve timing adjusting mechanism 50 may include a variable valve timing mechanism. When the exhaust valve operating angle is decreased, the torque could be decreased in return in the high speed region. However, this is surmountable with improvement in flow resistance in the exhaust manifold by setting the expanding angle β of the flare section smaller than or equal to 60° , and/or by setting a ratio of a bending radius to a pipe diameter of an exhaust manifold branch equal to or greater than 1.5. When a variable valve timing system is employed, the retardation of the exhaust valve opening timing may be performed limitedly only in a low and medium speed region (lower than or equal to 4000 rpm, for example).

[0040] The position of an air fuel ratio sensor can be determined in the following manner. In the illustrated ex-

ample, the air fuel ratio sensor is mounted in straight pipe section SP. This arrangement is advantageous for narrowing down various factors to be tuned to determine an optimum sensor position for the sensitivity of the air fuel ratio sensor for each cylinder, and for facilitating the determination of the optimum sensor position. In this example, the position of mounting hole 24 for the air fuel ratio sensor is determined by adjusting the sensor in the left and right direction in FIG. 4 to examine the sensitivity for #1 and #4 cylinders and the sensitivity for #2 and #3 cylinders, and finding the optimum position for both groups of cylinders.

[0041] In this embodiment, the inclination angle is smaller than or equal to 30° between the center line of straight pipe section SP and the center line of the manifold catalyst. This arrangement can improve the erosion resistance of the manifold catalyst. Moreover, the flare section DF having an expanding angle smaller than or equal to 60° is effective for uniformizing the flow velocity distribution and temperature distribution in the catalyst, and improving the heat resistance.

[0042] When combined with a catalyst of thin wall catalyst carriers having wall thickness equal to or smaller than 3 mil, the exhaust system according to this embodiment can reduce the time for activating the catalyst by decreasing the heat capacity while preventing erosion.

[0043] The exhaust streams from two cylinders that are not consecutive in the firing order are combined into a combined branch at a sharp confluence angle smaller than or equal to 20° , and the combined branches are combined into a common collecting section. This arrangement can reduce the exhaust interference significantly, prevent a decrease in torque in the low and medium speed region, reduce the total length of the exhaust piping by minimizing the length of an independent section of the piping, and raise the temperature of the catalyst quickly after a start of the engine.

[0044] Moreover, the combined branches are combined at a confluence angle smaller than or equal to 20° . Therefore, this system can further prevent the exhaust interference, and prevent a decrease in torque in the low and medium speed region. The exhaust branches for inner cylinders such as #2 and #3 cylinders are combined earlier on the upstream side. This arrangement helps reduce the exhaust interference, decrease the total length of exhaust piping, and increase the temperature of the manifold catalyst. The exhaust branches for inner cylinders project and extend laterally to meet at the nearest position. This arrangement helps decrease the total length of exhaust piping and reduce the time for activating the catalyst.

[0045] The combined branch (such as W2) for inner cylinders includes a long straight section. This arrangement helps decrease the total length of exhaust piping and reduce the time for activating the catalyst. In the illustrated example, the exhaust valve is set to open at a timing later than 30° before BTD. This retardation of the exhaust valve opening timing retards the timing of

blow down, reduce the exhaust interference during valve overlap and improve the torque in the low and medium speed region.

[0046] In the illustrated embodiment, the straight pipe section SP extends straight, and the cross sectional area of the straight pipe section SP is uniform from the upstream end to the downstream end of straight pipe section SP. Exhaust branches B1~B4 serve as means for conveying exhaust, from the exhaust ports of the engine, toward a confluence portion. Straight pipe section SP can serve as means for collecting exhaust streams from the exhaust ports at the confluence portion, and directing a combined exhaust stream continuously in a longitudinal direction of the exhaust purifying catalyst.

[0047] The teaching of the present invention is applicable to engines of various types. For example, the present invention is applicable to an eight cylinder engine such as V-type eight cylinder engine.

Claims

1. An engine exhaust apparatus comprising:

an exhaust manifold (2) which comprises:

a plurality of exhaust branches (B1~B4) extending from respective upstream ends (21) to be connected with cylinders of an engine;

a first combined branch (W1) into which two of the exhaust branches (B1,B4) merge together,

a second combined branch (W2) into which other two of the exhaust branches (B2, B3) merge together; and

a straight pipe section (SP) into which the first and second combined branches (W1,W2) merge together;

characterized in that an upstream end of the second combined branch (W2) at which two of the exhaust branches (B2,B3) meet is located on an upstream side of an upstream end of the first combined branch (W1) at which other two of the exhaust branches (B1,B4) meet.

2. Engine exhaust apparatus according to claim 1, **characterized in that** the exhaust manifold (2) further comprises a flare section (DF) expanding from the straight pipe section to a downstream end (22) of the exhaust manifold.

3. Engine exhaust apparatus according to claim 2, **characterized in that** the expanding angle of the flare section (DF) is smaller than or equal to 60° .

4. Engine exhaust apparatus according to one of the

claims 1 to 3, **characterized in that** the exhaust branches (B1, B4) connected to the first combined branch (W1) are branches to be connected with two of the cylinders of the engine which are not consecutive in a firing order of the engine, and the exhaust branches (B2, B3) connected to the second combined branch (W2) are branches to be connected with two of the cylinders of the engine which are not consecutive in the firing order of the engine.

5. Engine exhaust apparatus according to one of the claims 1 to 4, **characterized in that** in each of the first and second combined branches (W1, W2), the two exhaust branches (B1~B4) meet at a confluence angle (θ_1 , θ_2) smaller than or equal to 20° .

6. Engine exhaust apparatus according to one of the claims 1 to 5, **characterized in that** the first and second combined branches (W1, W2) meet at a confluence angle smaller than or equal to 20° .

7. Engine exhaust apparatus according to one of the claims 1 to 6, **characterized in that** the exhaust branches (B2, B3) connected to the second combined branch (W2) extend laterally toward each other.

8. Engine exhaust apparatus according to one of the claims 1 to 7, **characterized in that** the first and fourth branches (B1, B4) are connected to the first combined branch (W1), and the second and third branches (B2, B3) are connected to the second combined branch (W2), wherein the first, second, third and fourth branches (B1~B4) are the exhaust branches for the first, second, third and fourth cylinders of the engine, which are arranged in a row so that the second and third cylinders are located between the first and fourth cylinders in the row of the cylinder.

9. Engine exhaust apparatus according to one of the claims 1 to 8, **characterized in that** the second combined branch (W2) comprises a straight section.

10. Engine exhaust apparatus according to claim 9, **characterized in that** the first combined branch (W1) comprises a straight section shorter than the straight section of the second combined branch (W2).

11. Engine exhaust apparatus according to claim 10, **characterized in that** the straight sections of the first and second combined branches (W1, W2) extend side by side to the straight pipe section (SP); and **in that** the first combined branch (W1) is located between the second combined branch (W2) and the upstream ends (21) of the exhaust manifold.

12. Engine exhaust apparatus according to claim 10 or 11, **characterized in that** the straight pipe section (SP) extends straight in a downward direction toward a position of an exhaust purifying catalyst (3) to be disposed just below the exhaust manifold (2), the straight section of the first combined branch (W1) extends in the downward direction into the straight pipe section (SP), and the straight section of the second combined branch (W2) extends in the downward direction into the straight pipe section (SP).

13. Engine exhaust apparatus according to claim 12, **characterized in that** the engine exhaust apparatus further comprises the exhaust purifying catalyst including a catalyst carrying carrier having thin walls extending in a longitudinal direction of the exhaust purifying catalyst, and the straight pipe section (SP) extends in such a direction as to cause exhaust gas stream to flow into the exhaust purifying catalyst in the longitudinal direction.

14. Engine exhaust apparatus according to one of the claims 1 to 13, **characterized in that** a downstream end (22) of the exhaust manifold is adapted to be connected with the exhaust purifying catalyst (3) in such a manner that an angle (α) between a center line (L) of the straight pipe section (SP) and a center line (C) of the exhaust purifying catalyst (3) is smaller than or equal to 30° .

15. Engine exhaust apparatus according to one of the claims 1 to 14, **characterized in that** the engine exhaust apparatus further comprises the exhaust purifying catalyst (3) including a thin-wall catalyst carrier of ceramic having a wall thickness smaller than or equal to 3 mil (0,076 mm).

16. Engine exhaust apparatus according to one of the claims 1 to 15, **characterized in that** an exhaust valve opening timing is set in a range from 30° before a bottom dead center to the bottom dead center of the engine.

Patentansprüche

1. Motorabgasvorrichtung, die aufweist:

einen Auslassverteiler (2), der aufweist:

eine Mehrzahl von Auslassverzweigungen (B1 - B4), die sich von jeweiligen stromaufwärtigen Enden (21) erstrecken, zum Verbinden mit Zylindern eines Motors;
eine erste kombinierte Verzweigung (W1), in die zwei der Auslassverzweigungen (B1 - B4) zusammengeführt werden;

eine zweite kombinierte Verzweigung (W2), in die die anderen zwei Auslassverzweigungen (B2, B3) zusammengeführt werden; und

einen geraden Rohrabschnitt (SP), in dem die ersten und zweiten kombinierten Verzweigungen (W1, W2) zusammengeführt werden;

dadurch gekennzeichnet, dass ein stromaufwärtiges Ende der zweiten kombinierten Verzweigung (W2), an der sich zwei der Auslassverzweigungen (B2, B3) treffen, auf einer stromaufwärtigen Seite eines stromaufwärtigen Endes der ersten kombinierten Verzweigung (W1) angeordnet ist, an der sich zwei andere der Auslassverzweigungen (B1, B4) treffen.

2. Motorabgasvorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** der Auslassverteiler (2) außerdem einen Aufweitungsabschnitt (DF) aufweist, der sich von dem geraden Rohrabschnitt zu einem stromabwärtigen Ende (22) des Auslassverteilers erweitert.

3. Motorabgasvorrichtung nach Anspruch 2, **dadurch gekennzeichnet, dass** der Ausdehnungswinkel des Aufweitungsabschnittes (DF) kleiner als oder gleich zu 60° ist.

4. Motorabgasvorrichtung nach einem der Ansprüche 1 bis 3, **dadurch gekennzeichnet, dass** die Auslassverzweigungen (B1, B4), verbunden mit der ersten kombinierten Verzweigung (W1), Verzweigungen sind, zur Verbindung mit zwei der Zylinder des Motors, die nicht aufeinanderfolgend in einer Zündfolge des Motors sind, und die Auslassverzweigungen (B2, B3), verbunden mit der zweiten kombinierten Verzweigung (W2) Verzweigungen sind, zur Verbindung mit zwei der Zylinder des Motors, die nicht aufeinanderfolgend in einer Zündfolge des Motors sind.

5. Motorabgasvorrichtung nach einem der Ansprüche 1 bis 4, **dadurch gekennzeichnet, dass** in jede der ersten und zweiten kombinierten Verzweigungen (W1, W2), die zwei Auslassverzweigungen (B1 - B4) unter einem Zusammenführungswinkel (θ_1 , θ_2) kleiner als oder gleich zu 20° treffen.

6. Motorabgasvorrichtung nach einem der Ansprüche 1 bis 5, **dadurch gekennzeichnet, dass** sich die ersten und zweiten kombinierten Verzweigungen (W1, W2) unter einem Zusammenführungswinkel kleiner als oder gleich zu 20° treffen.

7. Motorabgasvorrichtung nach einem der Ansprüche 1 bis 6, **dadurch gekennzeichnet, dass** sich die

Auslassverzweigungen (82, B3), verbunden mit der zweiten kombinierten Verzweigung (W2) seitlich in die Richtung aufeinander zu erstrecken.

5 8. Motorabgasvorrichtung nach einem der Ansprüche 1 bis 7, **dadurch gekennzeichnet, dass** die ersten und vierten Verzweigungen (B1, B4) mit der ersten kombinierten Verzweigung (W1) verbunden sind und die zweiten und dritten Verzweigungen (B2, B3) mit der zweiten kombinierten Verzweigung (W2) verbunden sind, wobei die erste, zweite, dritte und vierte Verzweigung (B1 - B4) die Auslassverzweigungen für den ersten, zweiten, dritten und vierten Zylinder des Motors sind, die in einer Reihe so angeordnet sind, dass die zweiten und dritten Zylinder zwischen den ersten und vierten Zylindern in der Reihe der Zylinder angeordnet sind.

9. Motorabgasvorrichtung nach einem der Ansprüche 1 bis 8, **dadurch gekennzeichnet, dass** die zweite kombinierte Verzweigung (W2) einen geraden Abschnitt aufweist.

10. Motorabgasvorrichtung nach Anspruch 9, **dadurch gekennzeichnet, dass** die erste kombinierte Verzweigung (W1) einen geraden Abschnitt, kürzer als der gerade Abschnitt der zweiten kombinierten Verzweigung (W2), aufweist.

11. Motorabgasvorrichtung nach Anspruch 10, **dadurch gekennzeichnet, dass** die geraden Abschnitte der ersten und zweiten kombinierten Verzweigungen (W1, W2) sich nebeneinander zu dem geraden Rohrabschnitt (SP) erstrecken; und **dadurch, dass** die erste kombinierte Verzweigung (W1) zwischen der zweiten kombinierten Verzweigung (W2) und den stromaufwärtigen Enden (21) des Auslassverteilers angeordnet ist.

12. Motorabgasvorrichtung nach Anspruch 10 oder 11, **dadurch gekennzeichnet, dass** sich der gerade Rohrabschnitt (SP) sich gerade in einer stromabwärtigen Richtung zu einer Position des Abgasreinigungskatalysators (3) erstreckt, um unmittelbar unter dem Auslassverteiler (2) angeordnet zu sein, sich der gerade Abschnitt der ersten kombinierten Verzweigung (W1) in die stromabwärtige Richtung in den geraden Rohrabschnitt (SP) erstreckt und sich der gerade Abschnitt der zweiten kombinierten Verzweigung (W2) in der stromabwärtigen Richtung in den geraden Rohrabschnitt (SP) erstreckt.

13. Motorabgasvorrichtung nach Anspruch 12, **dadurch gekennzeichnet, dass** die Motorabgasvorrichtung außerdem den Abgasreinigungskatalysator aufweist, der einen Katalysator tragenden Träger enthält, der dünne Wände hat, die sich in einer Längsrichtung des Abgasreinigungskatalysators

erstrecken, und sich der gerade Rohrabchnitt (SP) in solch einer Richtung erstreckt, um den Abgasstrom zu veranlassen, in den Abgasreinigungskatalysator in der Längsrichtung zu strömen.

14. Motorabgasvorrichtung nach einem der Ansprüche 1 bis 13, **dadurch gekennzeichnet, dass** ein stromabwärtiges Ende (22) des Auslassverteilers vorgesehen ist, mit dem Abgasreinigungskatalysator (3) in solch einer Weise verbunden zu werden, dass ein Winkel (α) zwischen einer Mittellinie (L) des geraden Rohrabchnittes (SP) und einer Mittellinie (C) des Abgasreinigungskatalysators (3) kleiner als oder gleich zu 30° ist.

15. Motorabgasvorrichtung nach einem der Ansprüche 1 bis 14, **dadurch gekennzeichnet, dass** die Motorabgasvorrichtung außerdem den Abgasreinigungskatalysator (3) aufweist, der einen dünnwandigen Katalysatorträger aus Keramik aufweist, der eine Wanddicke kleiner als oder gleich zu 3 mit (0,076 mm) hat.

16. Motorabgasvorrichtung nach einem der Ansprüche 1 bis 15, **dadurch gekennzeichnet, dass** ein Auslassventil- Öffnungszeitpunkt in einem Bereich von 30° vor dem unteren Totpunkt bis zum unteren Totpunkt des Motors festgelegt wird.

Revendications

1. Un système d'échappement pour moteurs à combustion interne, comprenant:

un collecteur d'échappement (2) qui comprend:

une pluralité d'embranchements d'échappement (B1-B4) s'étendant depuis des extrémités amont (21) pour être reliées aux cylindres d'un moteur;

un premier embranchement combiné (W1) dans lequel fusionnent deux des embranchements d'échappement (B1, B4);

un second embranchement combiné (W2) dans lequel fusionnent deux autres des embranchements d'échappement (B2, B3); et

une partie de conduit rectiligne (SP) dans laquelle fusionnent les premier et second embranchements combinés (W1, W2);

caractérisé en ce qu'une extrémité amont du second embranchement combiné (W2) au niveau de laquelle se rencontrent deux des embranchements d'échappement (B2, B3) est située sur un côté amont d'une extrémité amont du premier embranchement combiné (W1) au niveau de laquelle se

rencontrent deux des autres embranchements d'échappement (B1, B4).

2. Système d'échappement pour moteurs à combustion interne selon la revendication 1, **caractérisé en ce que** le collecteur d'échappement (2) comprend en outre une partie évasée (DF) s'élargissant depuis la partie de conduit rectiligne jusqu'à une extrémité aval (22) du collecteur d'échappement.

3. Système d'échappement pour moteurs à combustion interne selon la revendication 2, **caractérisé en ce que** l'angle d'élargissement de la partie évasée (DF) est inférieur ou égal à 60° .

4. Système d'échappement pour moteurs à combustion interne selon l'une des revendications 1 à 3, **caractérisé en ce que** les embranchements d'échappement (B1, B4) reliés au premier embranchement combiné (W1) sont des embranchements devant être reliés à deux des cylindres du moteur qui ne sont pas consécutifs dans un ordre d'allumage du moteur, les embranchements d'échappement (B2, B3) reliés au second embranchement combiné (W2) étant des embranchements devant être reliés à deux des cylindres du moteur qui ne sont pas consécutifs dans l'ordre d'allumage du moteur.

5. Système d'échappement pour moteurs à combustion interne selon l'une des revendications 1 à 4, **caractérisé en ce que** dans chacun des premier et second embranchements combinés (W1, W2), les deux embranchements (B1-B4) se rencontrent au niveau d'un angle de confluence (θ_1, θ_2) inférieur ou égal à 20° .

6. Système d'échappement pour moteurs à combustion selon l'une des revendications 1 à 5, **caractérisé en ce que** les premier et second embranchements combinés (W1, W2) se rencontrent au niveau d'un angle de confluence inférieur ou égal à 20° .

7. Système d'échappement pour moteurs à combustion interne selon l'une des revendications 1 à 6, **caractérisé en ce que** les embranchements d'échappement (B2, B3) reliés au second embranchement combiné (W2) s'étendent latéralement l'un vers l'autre.

8. Système d'échappement pour moteurs à combustion interne selon l'une des revendications 1 à 7, **caractérisé en ce que** les premier et quatrième embranchements (B1, B4) sont reliés au premier embranchement combiné (W1), et les second et troisième embranchements (B2, B3) sont reliés au second embranchement combiné (W2), où les premier, second, troisième et quatrième embranchements (B1-B4) sont les embranchements d'échap-

pement pour les premier, second, troisième et quatrième cylindres du moteur, lesquels sont disposés dans une rangée de sorte que les second et troisième cylindres sont situés entre les premier et quatrième cylindres dans la rangée du cylindre.

5

9. Système d'échappement pour moteurs à combustion interne selon l'une des revendications 1 à 8, **caractérisé en ce que** le second embranchement combiné (W2) comprend une partie rectiligne. 10
10. Système d'échappement pour moteurs à combustion interne selon la revendication 9, **caractérisé en ce que** le premier embranchement combiné (W1) comprend une partie rectiligne plus courte que la partie rectiligne du second embranchement combinés (W2). 15
11. Système d'échappement pour moteurs à combustion interne selon la revendication 10, **caractérisé en ce que** les parties rectilignes des premier et second embranchement combinés (W1, W2) s'étendent côte à côte jusqu'à la partie de conduit rectiligne (SP); et ce que le premier embranchement combiné (W1) est situé entre le second embranchement combiné (W2) et l'extrémité amont (21) du collecteur d'échappement. 20 25
12. Système d'échappement pour moteurs à combustion interne selon la revendication 10 ou 11, **caractérisé en ce que** la partie de conduit rectiligne (SP) s'étend de manière rectiligne vers le bas en direction d'une position d'un catalyseur de purification d'échappement (3) devant être disposé juste en dessous du collecteur d'échappement (2), la partie rectiligne du premier embranchement combinée (W1) s'étend vers le bas dans la partie de conduit rectiligne (SP), et la partie rectiligne du second embranchement (W2) s'étend vers le bas dans la partie de conduit rectiligne (SP). 30 35 40
13. Système d'échappement pour moteurs à combustion interne selon la revendication 12, **caractérisé en ce que** le système d'échappement pour moteurs à combustion interne comprend en outre le fait que le catalyseur de purification d'échappement inclut un support de catalyseur à parois minces s'étendant dans une direction longitudinale du catalyseur de purification d'échappement, la partie de conduit rectiligne (SP) s'étendant dans une direction telle à amener le courant des gaz d'échappement à passer dans le catalyseur de purification d'échappement dans la direction longitudinale. 45 50
14. Système d'échappement pour moteurs à combustion interne selon l'une des revendications 1 à 13, **caractérisé en ce qu'une** extrémité aval (22) du collecteur d'échappement est adaptée à être reliée 55

au catalyseur de purification d'échappement (3) de telle manière qu'un angle (α) entre un axe (L) de la partie de conduit rectiligne (SP) et un axe (C) du catalyseur de purification d'échappement soit inférieure ou égale à 30°.

15. Système d'échappement pour moteurs à combustion interne selon l'une des revendications 1 à 14, **caractérisé en ce que** le système d'échappement pour moteurs à combustion interne comprend en outre le fait que le catalyseur de purification d'échappement (3) inclut un support de catalyseur à parois mince de céramique ayant une épaisseur de paroi inférieure ou égale à 3 mil (0,076 mm).
16. Système d'échappement pour moteurs à combustion interne selon l'une des revendications 1 à 15, **caractérisé en ce qu'un** calage d'ouverture de la soupape d'échappement est réglé dans une gamme de 30° avant un point mort inférieur au point mort inférieur du moteur.

FIG.1

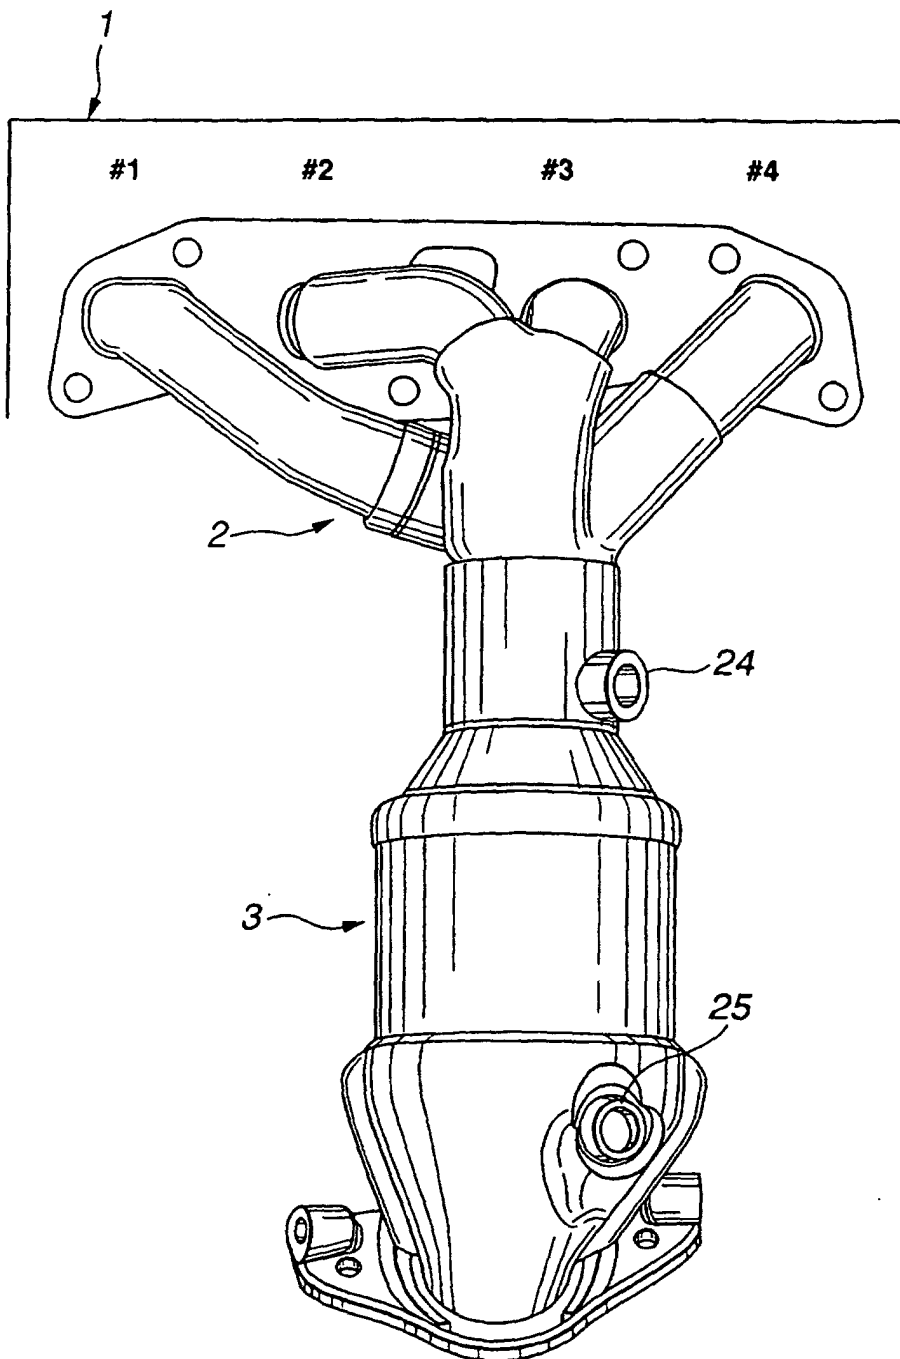


FIG.2

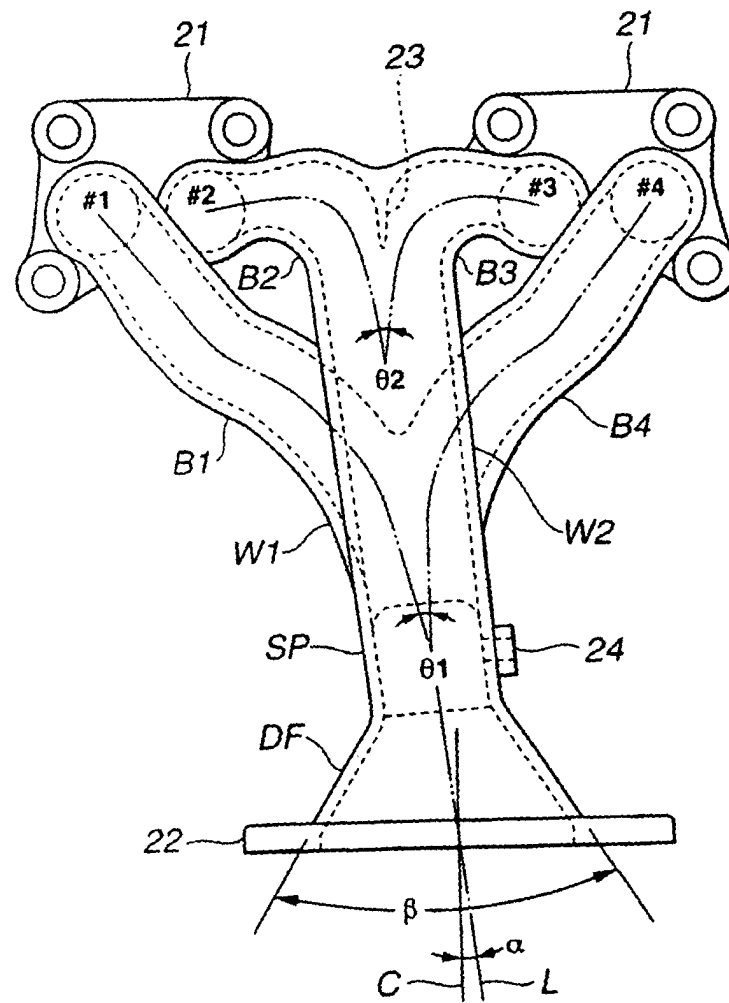


FIG.3

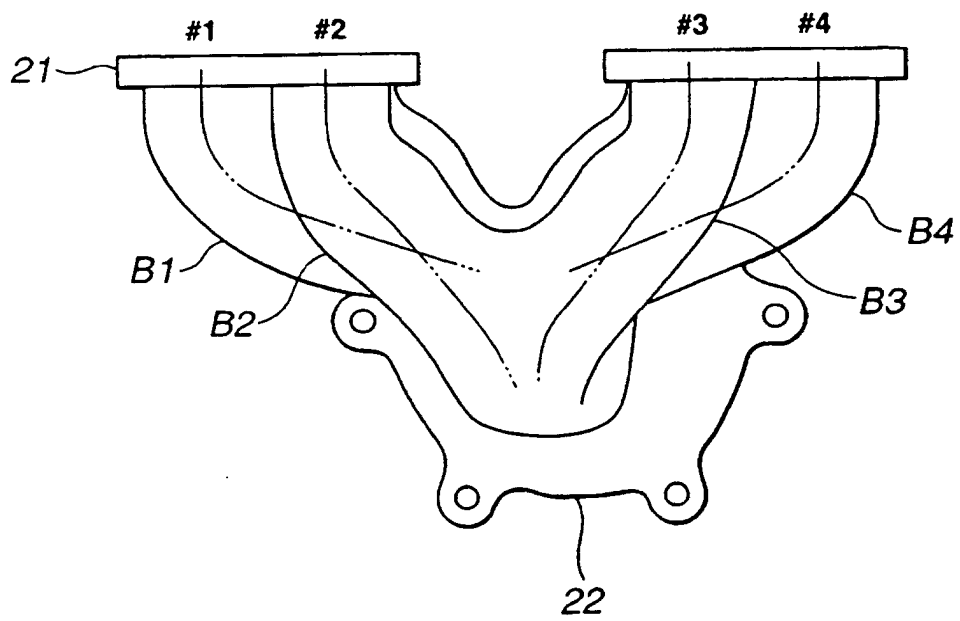


FIG.4

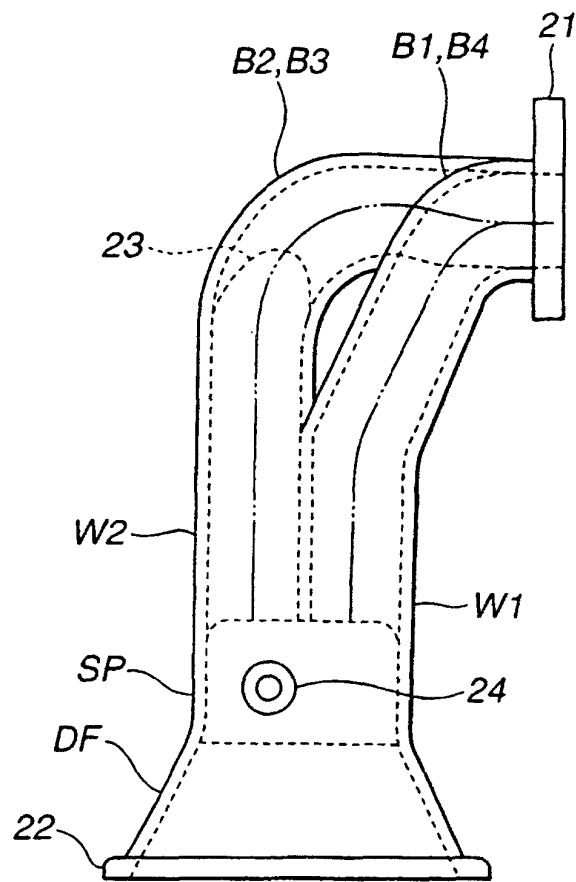


FIG.5

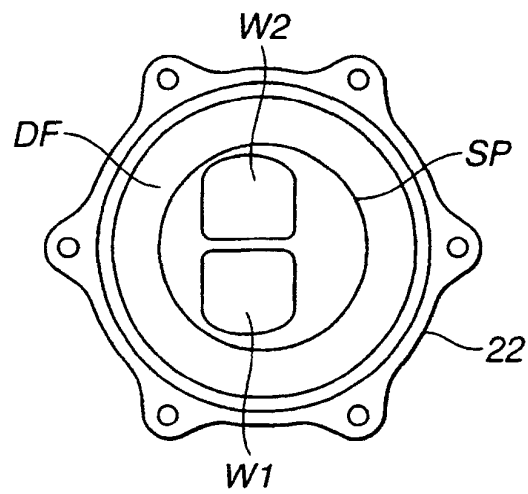


FIG.6A

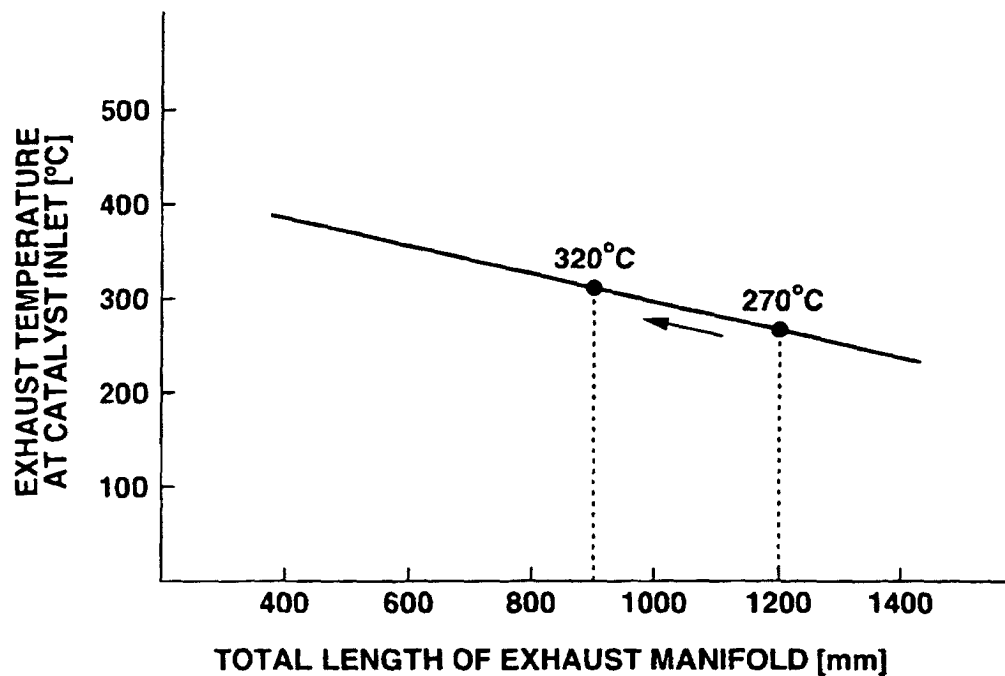


FIG.6B




FIG.6C




FIG.7

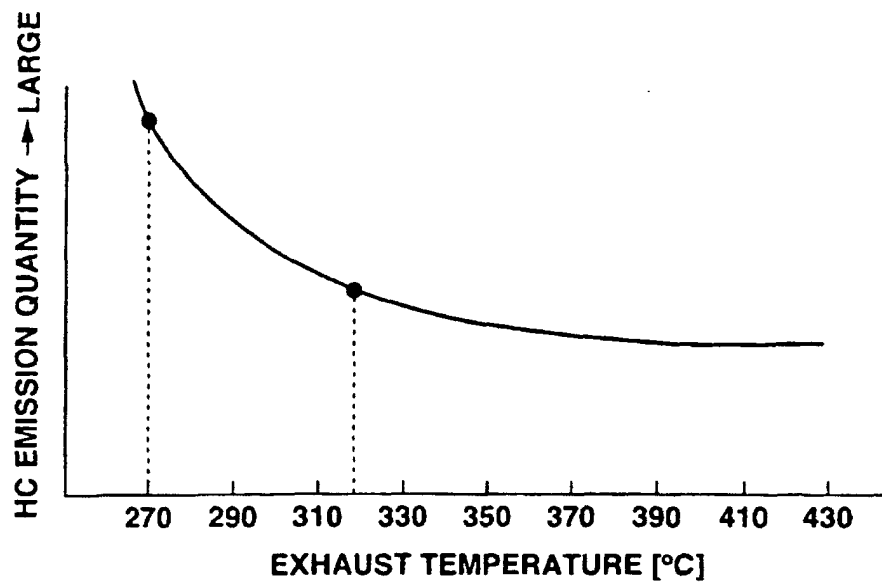


FIG.8

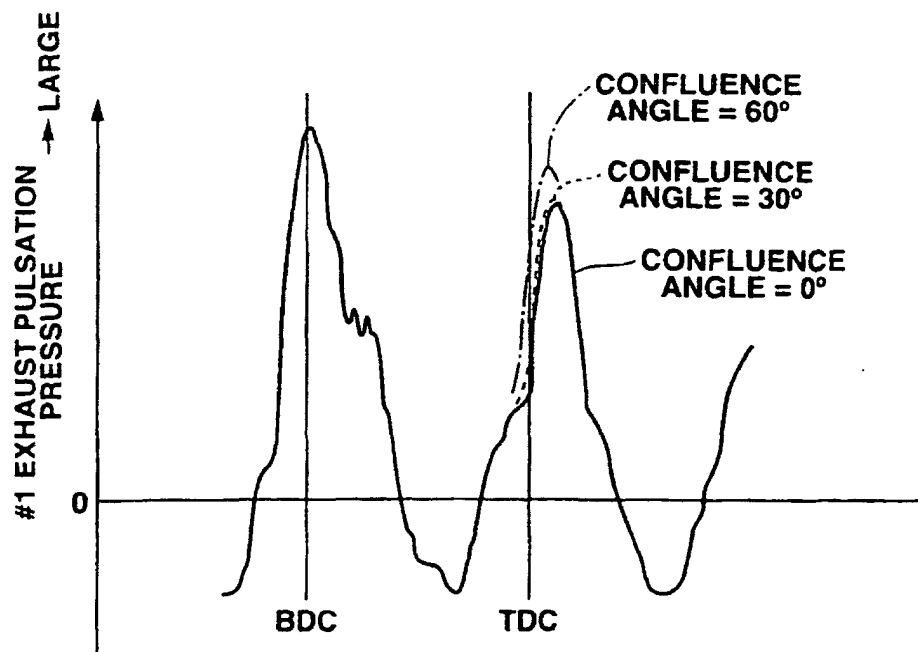


FIG.9

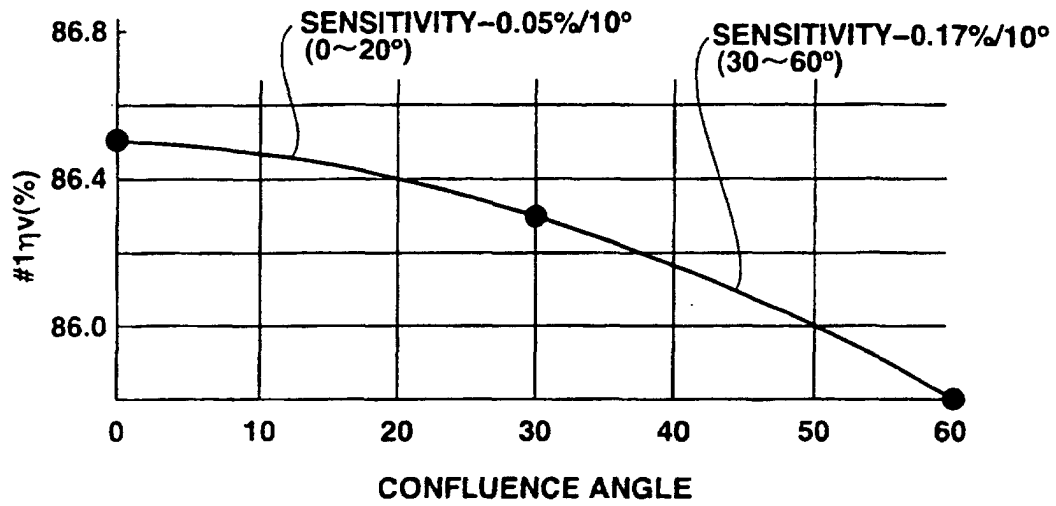


FIG.10

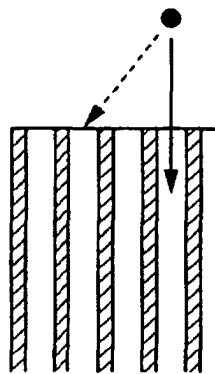


FIG.11

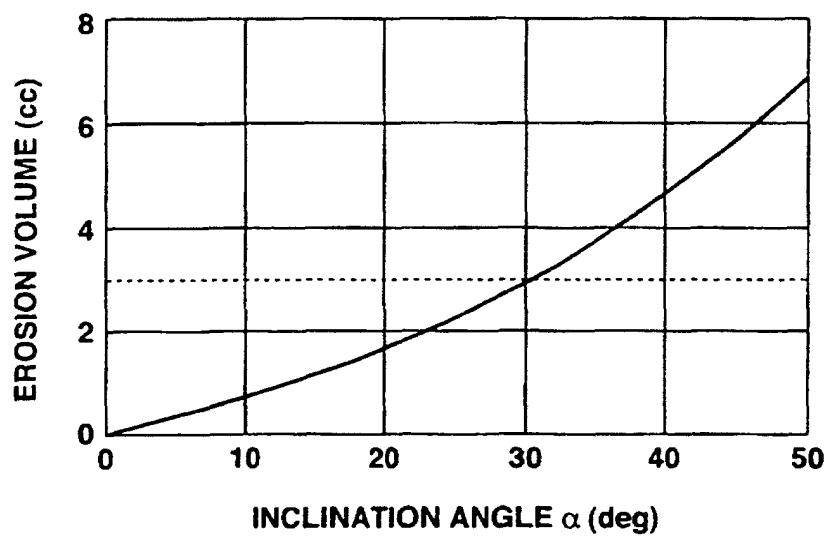


FIG.12A

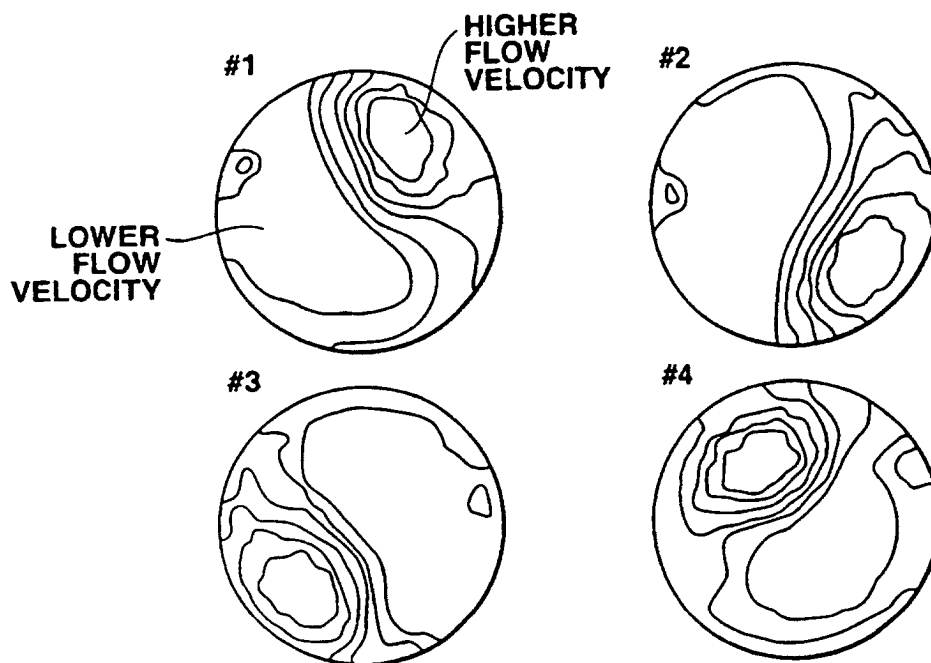


FIG.12B

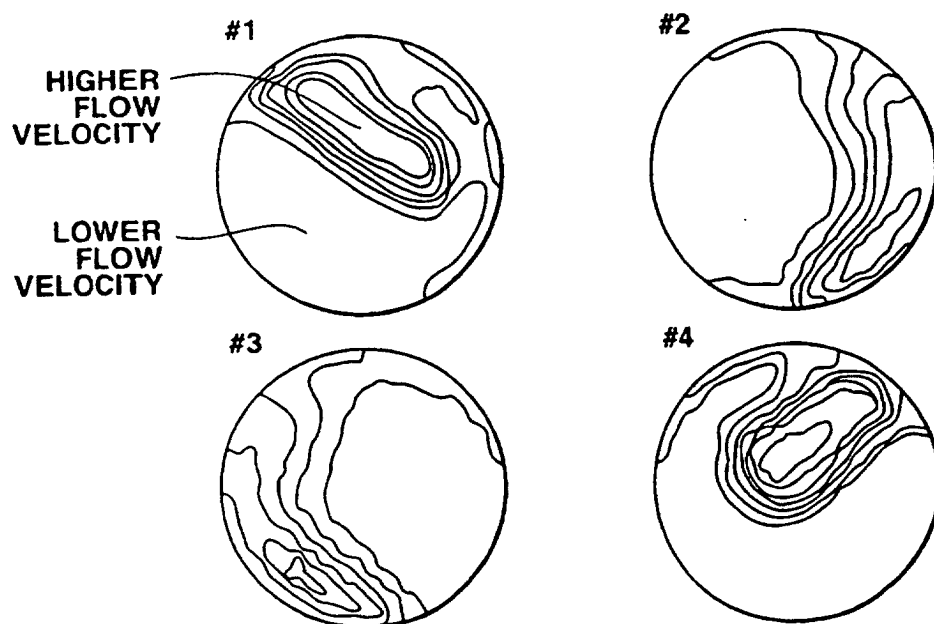


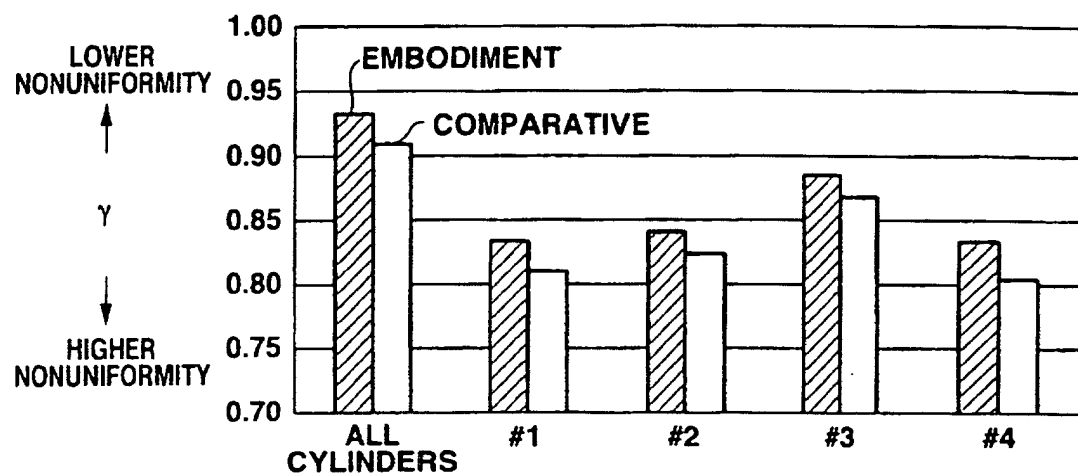
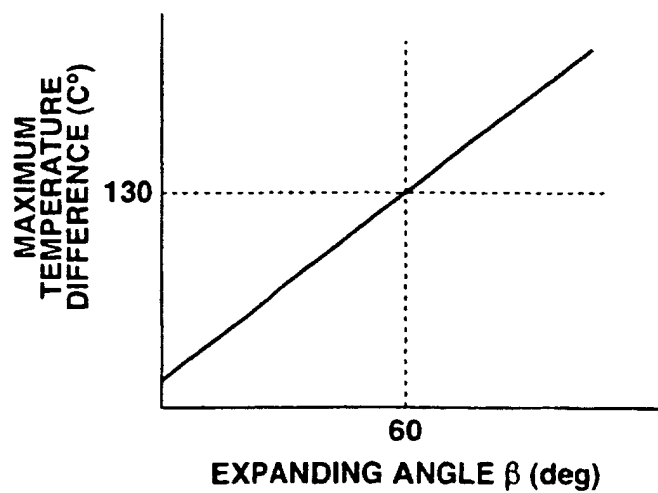
FIG.13**FIG.14**

FIG.15

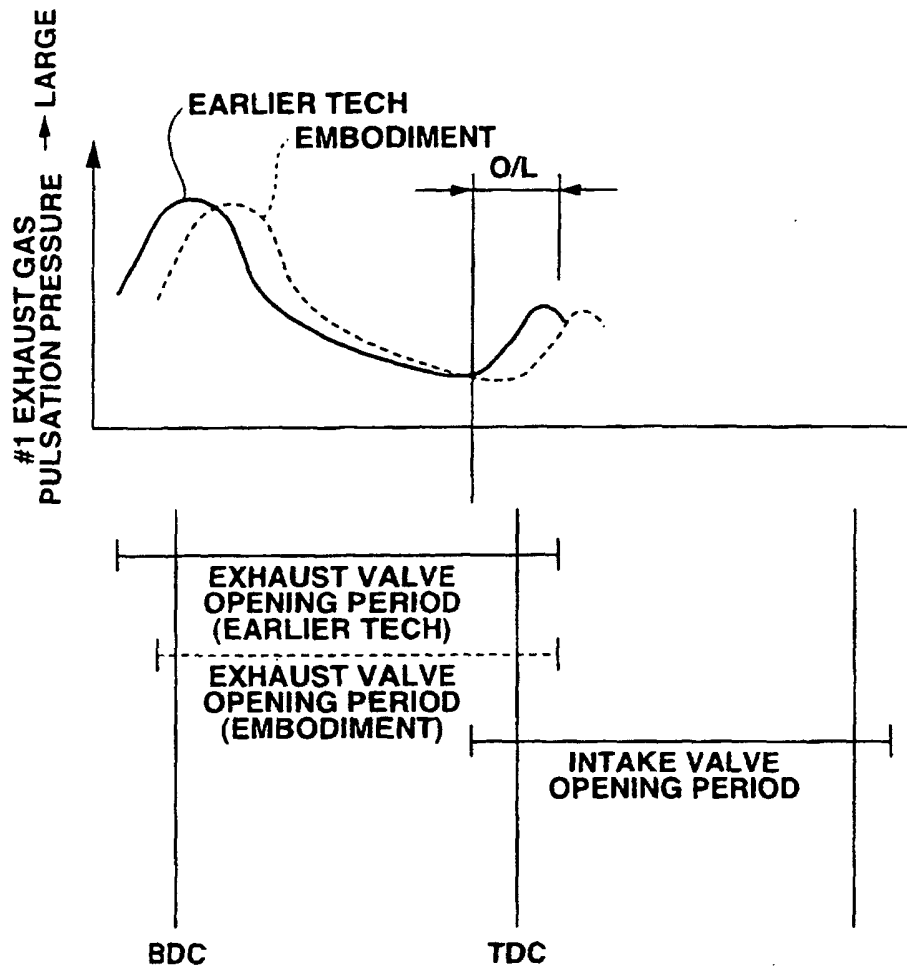


FIG.16

