



(51) International Patent Classification:

G06F 13/14 (2006.01) **G06F 1/00** (2006.01)
G06F 1/26 (2006.01) **G06F 9/22** (2006.01)
G06F 1/32 (2006.01)

(21) International Application Number:

PCT/US2009/033541

(22) International Filing Date:

9 February 2009 (09.02.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant (for all designated States except US):

HEWLETT-PACKARD DEVELOPMENT COMPANY, L.P. [US/US]; 11445 Compaq Center Drive W., Houston, Texas 77070 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SO, Chi, W.**

[US/US]; 11445 Compaq Center Dr. W., Houston, Texas 77070 (US). **TRUONG, Binh, T.** [US/US]; 11445 Compaq Center Dr. W., Houston, Texas 77070 (US). **MULCAHY, Luke** [US/US]; 11445 Compaq Center Dr. W., Houston, Texas 77070 (US).

(74) Agents: **CZARNECKI, Michael** et al.; Hewlett-Packard

Company, Intellectual Property Administration, Mail Stop 35, P.O. Box 272400, Fort Collins, Colorado 80527-2400 (US).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: BIOS CONTROLLED PERIPHERAL DEVICE PORT POWER

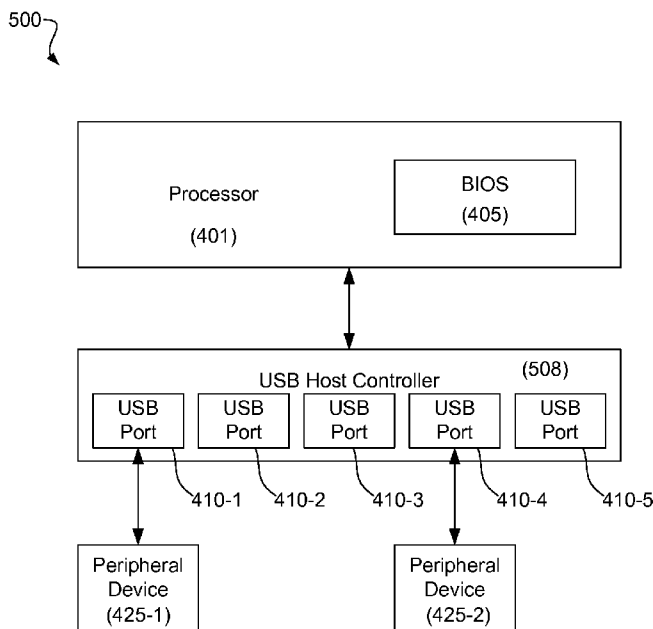


Fig. 5

(57) Abstract: A computing device (101, 400, 500) has a processor (401) and at least one peripheral device port (106, 107, 108, 109, 410-1 to 410-5). The processor (401) is configured to selectively power the at least one peripheral device port (106, 107, 108, 109, 410-1 to 410-5) when the processor (401) is in a sleep state (302, 303, 304, 305, 306) according to at least one setting stored by firmware (405) of the processor (401).

**Declarations under Rule 4.17:**

- *as to the identity of the inventor (Rule 4.17(i))*
- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

- *with international search report (Art. 21(3))*

BIOS CONTROLLED PERIPHERAL DEVICE PORT POWER

5

BACKGROUND

10 **[0001]** Many computer systems have peripheral ports configured to connect to and interface with peripheral devices. A large portion of such ports implement the Universal Serial Bus (USB) standard. The physical interface specifications of the USB standard allow for a variety of peripheral devices to be connected to a computer using a simple, standardized socket. Hardware
15 peripheral devices that typically use USB or similar peripheral ports include, but are not limited to, external hard drives, keyboards, mice, wireless network adapters, scanners, printers, and the like. USB peripheral ports are typically managed by a host controller, a hardware device that serves as an interface between a computing device and the peripheral devices connected to the USB
20 ports of the computing device. In addition to managing the flow of data between the host computing device and the peripheral devices, the host controller also provides electrical power from the computing device's power supply to the peripheral devices via the USB ports.

[0002] One particular advantage of the USB standardization is that it
25 provides for some devices to be powered directly from a USB port. With the increasing ubiquity of the USB standard in modern computing devices, it has become increasingly common for peripheral devices, particularly small battery-powered peripheral devices, to rely on a peripheral device port, such as a USB port, in a host computing device as a principle source of electrical power
30 instead of or in addition to a separate power supply.

BRIEF DESCRIPTION OF THE DRAWINGS

[0003] The accompanying drawings illustrate various embodiments of the principles described herein and are a part of the specification. The
5 illustrated embodiments are merely examples and do not limit the scope of the claims.

[0004] Fig. 1 is a diagram of an illustrative computing system in which peripheral devices interface with a computing device through peripheral device ports, according to one exemplary embodiment of the principles described
10 herein.

[0005] Fig. 2 is a flow diagram of an illustrative method of setting a user-alterable peripheral device port power setting in a system BIOS menu, according to one exemplary embodiment of the principles described herein.

[0006] Fig. 3 is a diagram of various illustrative sleep states of a
15 computing device, according to one exemplary embodiment of the principles described herein.

[0007] Fig. 4 is a block diagram of an illustrative system of peripheral port power control in a computing device, according to one exemplary embodiment of the principles described herein.

[0008] Fig. 5 is a block diagram of an illustrative system of peripheral
20 port power control in a computing device, according to one exemplary embodiment of the principles described herein.

[0009] Fig. 6 is a flow diagram of an illustrative method of selectively powering peripheral device ports while a processor is in a sleep state, according
25 to one exemplary embodiment of the principles described herein.

[0010] Fig. 7 is a flow diagram of an illustrative method of selectively powering peripheral device ports while a processor is in a sleep state, according to one exemplary embodiment of the principles described herein.

[0011] Throughout the drawings, identical reference numbers
30 designate similar, but not necessarily identical, elements.

DETAILED DESCRIPTION

[0012] As described above, some peripheral devices draw power from a host computing device's power supply directly through a peripheral USB port, thereby negating the need for a separate, individual power supply for each peripheral device. However, in certain scenarios it may be desirable to provide power to such a peripheral device through the USB port even when the computing device itself is powered down in a sleep state.

[0013] To accomplish the above and other goals, the present specification discloses systems and methods for selectively powering peripheral devices through peripheral device ports of a processor when the processor is in a sleep state. This is accomplished by the processor being configured to selectively power at least one peripheral device port when in the sleep state in accordance with at least one setting stored by the firmware of the processor.

For example, the setting may be stored in the Basic Input Output System firmware for the processor. A user may alter the setting stored by the firmware of the processor to enable or disable powering of one or more elements of the peripheral device port subsystem while the processor is in a sleep state. By choosing to enable powering to one or more elements in the peripheral device port subsystem during sleep states of the processor, peripheral devices powered through the peripheral device ports of the processor may continue to operate in spite of the sleep state of the processor, thereby allowing the processor to reduce its power consumption when idle. Furthermore, by choosing to disable power to the peripheral device port subsystem entirely during the processor sleep states, important energy resources may be conserved.

[0014] In the following description, for purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of the present systems and methods. It will be apparent, however, to one skilled in the art that the present apparatus, systems and methods may be practiced without these specific details. Reference in the specification to "an embodiment," "an example" or similar language means that

a particular feature, structure, or characteristic described in connection with the embodiment or example is included in at least that one embodiment, but not necessarily in other embodiments. The various instances of the phrase “in one embodiment” or similar phrases in various places in the specification are not
5 necessarily all referring to the same embodiment.

[0015] Fig. 1 is a diagram of an illustrative computing system (100) having a computing device (101) that interfaces with several external peripheral devices (102, 103, 104, 105) through peripheral device ports (106, 107, 108, 109) such as USB ports. The peripheral devices (102, 103, 104, 105) of the
10 present example include a wireless network adapter (102), an external hard drive (103), a cell phone (104), and a printing device (105). Each of these peripheral devices (102, 103, 104, 105) may utilize the peripheral device ports (106, 107) of the computing device (101) to transmit data to and receive data from the computing device (101). Certain of the peripheral devices (102, 103,
15 104, 105) may be powered by their own external power supplies while other peripheral devices (102, 103, 104, 105) may rely on the peripheral device ports (106, 107, 108, 109) of the computing device (101) to supply power. Typically smaller peripheral devices (102, 103, 104, 105) such as flash storage devices, mobile phones, PDAs, media players, and the like rely on the peripheral device
20 ports (106, 107, 108, 109) to which they are connected for electrical power.

[0016] It will be readily apparent to one of ordinary skill in the art that the external peripheral devices (102, 103, 104, 105) shown in Fig. 1 are merely exemplary of the types of peripheral devices that may interface with a computing device (101) and are in no way to be construed as limiting the scope
25 of the present specification. Any other peripheral device that may suit a particular application of the principles described herein may be used in addition to or in substitution for any one or more of the external peripheral devices (102, 103, 104, 105) shown.

[0017] Many times it is necessary to have peripheral devices (102, 103, 104, 105) powered even when a processor of the computing device (101) is in a sleep state. The present specification discloses solutions implemented on the firmware level for powering peripheral device ports (106, 107, 108, 109)
30

such as USB ports during a processor sleep state so that peripheral devices (102, 103, 104, 105) may continue to draw power from the ports (106, 107, 108, 109).

[0018] When a processor in a computing device (101) boots up, most systems allow a user to press a key or combination of keys that will allow the user to enter a setup menu for the BIOS (Basic Input Output System) firmware of the system. The BIOS firmware is a basic operating system that initializes important hardware devices such as the hard drive, video display adapter, and other devices when the computer is first powered on. Among other purposes, the BIOS firmware prepares the processor to allow more comprehensive, higher level, operating systems such as Windows or Linux to be loaded, executed, and given control of the processor and computing device (101) as a whole. Thus, a menu option system in the BIOS setup menu may be provided to allow the user to either enable or disable power to one or more peripheral device ports (106, 107, 108, 109) when the processor (101) of the computing device enters a sleep state.

[0019] Referring now to Fig. 2, a flow diagram of an illustrative method (200) of selectively altering a peripheral device port power setting in a system BIOS menu is shown. A user must typically boot (step 201) the computing device and then press (step 205) a predetermined key or combination of keys within a given time window to enter the BIOS setup menu directly or a preliminary menu through which the BIOS setup screen may be accessed. In many current personal computing devices, the predetermined key to enter the BIOS setup menu is F10, however the actual key used may vary across different platforms and systems and is immaterial to the present method (200).

[0020] The BIOS setup menu may include a number of settings within different categories that the user may selectively alter. One of these options may include one or more settings relating to the powering of peripheral device ports when the processor of the computing device is in a sleep state. The user may then alter (step 210) the desired power setting for peripheral device ports during the sleep state by inputting a desired setting to the computing device

using the BIOS menu. After the BIOS settings have been saved and the user exits the BIOS menu (step 215), the computing device may reboot (220) with the new settings defined by the user in place.

[0021] Additionally or alternatively, the power setting for peripheral device ports during the sleep state may be altered through a higher level operating system such as Windows or Linux. These operating systems typically have means for allowing users to access and alter various hardware settings. In a possible embodiment, the user could make these changes without having to go through an initial BIOS menu. Thus, in certain embodiments a user may be able to access and alter the powered peripheral device BIOS settings through a control panel in a WINDOWS, MACINTOSH, or UNIX operating system.

[0022] The exact means of altering the power setting(s) for the peripheral device ports during the sleep state is not material to the present disclosure, and any method that suits a particular application of the principles described herein may therefore be used.

[0023] Additionally, many host computing devices include a plurality of powered peripheral device ports. For example, a computer may include two or more USB ports. Therefore, in certain embodiments, the user-alterable BIOS setting(s) for peripheral device port powering may allow a user to specify which (if any) of all the plurality of powered peripheral device ports he or she desires to remain powered while the processor of the computing device is in a sleep state. Such options may give the user greater flexibility in power management. These additional options may also be set in a system BIOS menu at startup and/or in a higher level operating system.

[0024] Referring now to Fig. 3, a diagram is shown of the standard power management states for the processor of a computing device as defined by the Advanced Configuration and Power Interface (ACPI) standard. The G0 category includes only one state, S0 (301), in which the processor is in its standard working mode wherein no sleep state is initiated. Category G1 includes sleep states S1 (302) through S4 (305). When a processor is in sleep state S1 (302), all processor caches are flushed and the CPU(s) stop executing

instructions. The CPU(s) in the processor remains powered in an S1 sleep state (302), but other devices that are idle may be powered down. In sleep state S2 (303), the CPU is powered down. Sleep state S3 (304) is commonly referred to as standby or sleep, where most devices in the system along with the processor have been powered down, but the RAM remains powered. Sleep state S4 (305) is commonly referred to as hibernation. During hibernation, all content from the main memory or RAM is saved to non-volatile memory, such as on a hard drive. The RAM may then be powered down. When the computer awakens from the S4 state (305), the RAM contents that were saved on the hard drive are restored to the RAM. During category G2, which includes sleep state S5 (306), almost all devices in the system along with the processor are turned off. However, the processor may be awakened by certain detected peripheral inputs, such as a touch of the keyboard, mouse, or any other peripheral device that can be set to wake the computer. The final category G3 includes an "Off" state (307), also referred to as mechanical off. Typically, the only component of a system that remains powered in the "Off" state (307) is a real-time clock which is powered by its own small battery.

[0025] The act of a processor transitioning downward through these states (301, 302, 303, 304, 305, 306, 307), it is typically referred to as going into a deeper sleep. Therefore, throughout this document, the phrase "going into a deeper sleep" or any discussion regarding the depth of a sleep state refers to a progression through the "S" states described in reference to Fig. 3.

[0026] In certain embodiments, if a user has chosen to enable power to the peripheral device ports during a processor sleep state (302, 303, 304, 305, 306), an additional user-alterable BIOS setting may permit the user to specify for which sleep states (302, 303, 304, 305, 306) the peripheral device ports are to remain powered. For example, the user could select to only power the peripheral device ports for sleep states S1-S4 (302 – 305). In such a case, if the processor were in sleep state S4 (305), the peripheral device ports would remain powered. However, if the processor were to then transition to sleep state S5 (306), power to the peripheral device ports would be cut off.

Alternatively, the user may elect to allow power to the peripheral device ports in

all sleep mode states (S1 – S5) (302, 303, 304, 305, 306). The BIOS setting specifying the maximum sleep state for which power will be supplied to each of the peripheral device ports may be set by the user through the system BIOS menu and/or the main operating system.

5 **[0027]** In some embodiments, a user may also specify a different maximum sleep state for one or more individual peripheral device port. For example, the user may desire that a first peripheral device port be powered in a maximum sleep state of S4 (305), while the remaining ports are to remain powered in state S5 (306).

10 **[0028]** Fig. 4 is a block diagram of an illustrative computing device (400) configured to manage peripheral port power control. In the computing device (400), a processor (401) is configured to execute firmware BIOS (405) that stores one or more user-alterable settings for selectively enabling power to a plurality of peripheral device ports (410-1, 410-2), consistent with the
15 principles described above. In the present example, the peripheral device ports (410-1, 410-2) are USB ports; however, any other suitable powered peripheral device port may be used in accordance with the principles described herein.

[0029] The processor (401) includes a plurality of general purpose input/output (GPIO) ports (412) that may be communicatively coupled to the
20 control nodes of hardware switches (415-1, 415-2). As such, each of the hardware switches (415-1, 415-2) may be configured to open or close dependent on a digital signal received from a GPIO port (412) in the processor (401). Each of the hardware switches (415-1, 415-2) may be disposed between a corresponding peripheral device port (410-1, 410-2) and its power supply.
25 The power supply may be from a USB host controller (not shown) that interfaces with the processor (401) and has a default setting of always providing power to the peripheral device ports (410-1, 410-2). Thus, depending on the signal from the associated GPIO ports (412) of the processor (401), power may be selectively enabled or disabled to the peripheral device ports (410-1, 410-2).
30 The signals provided by the GPIO ports (412) to the hardware switches (415-1, 415-2) may be determined by the aforementioned user-alterable setting(s) stored by the BIOS (405) of the processor (401). Digitally controlled hardware

switches are well-known in the art, and any such switch may be used that best suits a particular application.

5 **[0030]** In certain embodiments, the GPIO ports (412) may continue to provide a digital signal to the switches (415-1, 415-2) when the processor (401) has entered a sleep state. Additionally or alternatively, the switches (415-1, 415-2) may be configured to retain a state (i.e., open or closed) set by the GPIO (412) ports and only require another signal from the GPIO ports (412) when being toggled to another state.

10 **[0031]** Referring now to Fig. 5, a block diagram is shown of another embodiment of an illustrative computing device (500) incorporating peripheral port power control. The illustrative computing device (500) includes a processor (401) configured to execute firmware BIOS (405) that stores one or more user-alterable settings for selectively enabling power to a plurality of peripheral device ports (410-1 to 410-5), consistent with the principles described above.

15 **[0032]** The processor (401) is communicatively coupled to a host controller (408) which controls the peripheral device ports (410-1 to 410-5) and serves as a physical and software or logical bridge between the processor (401) and the peripheral device ports (410-1 to 410-5). In the present computing device (500), when the processor (401) is entering a sleep state, the BIOS (405) may wake the host controller (508) after an operating system has been unloaded from the processor (401). The BIOS (405) may then set a port power bit in the host controller (508) for each peripheral device port (410-1 to 410-5) that needs to be powered during the sleep state according to the
20 aforementioned user-alterable settings stored by the BIOS (405).

25 **[0033]** Referring now to Fig. 6, a flow diagram is shown of an illustrative method (600) of selectively powering peripheral device ports when a processor has entered a sleep state. The method (600) may be performed, for example, by the computing device (500, Fig. 5) described with respect to Fig. 5.

30 **[0034]** In certain embodiments, once a processor (401, Fig. 5) is entering a sleep state, the processor (401, Fig. 5) may unload the current operating system from system memory such that the processor (401, Fig. 5) is only executing its BIOS firmware (405, Fig. 5). In the present method (600), as

the processor (401, Fig. 5) prepares (step 601) to enter a sleep mode and after the BIOS (405, Fig. 5) has unloaded the operating system from the processor (401, Fig. 5), the BIOS (405, Fig. 5) may wake up (step 605) and initialize the peripheral device host controller (508, Fig. 5).

5 **[0035]** The host controller (508, Fig. 5) may maintain one or more data registers configured to store bits corresponding to each peripheral device port (410-1 to 410-5, Fig. 5), wherein the stored value of each bit is determinative of whether its associated peripheral device port (410-1 to 410-5, Fig. 5) will remain powered by the host controller (508, Fig. 5). Accordingly, in
10 the present method (600), the BIOS of the processor (401, Fig. 5) may set (step 610) the power bit in the host controller (508, Fig. 5) for each peripheral device port (410-1 to 410-5) specified to remain powered in a user-alterable BIOS setting, as described above.

[0036] In certain embodiments, the user-alterable BIOS setting may
15 simply specify whether all of the peripheral device ports (410-1 to 410-5, Fig. 5) are to remain powered during the sleep state of the processor (401, Fig. 5). Alternatively, the user-alterable BIOS setting may specify whether individual peripheral device ports (410-1 to 410-5, Fig. 5) are to remain powered during the sleep state. Once the appropriate power bits have been set in the host
20 controller, the processor may enter (step 615) a sleep mode while some, all, or none of the peripheral device ports (410-1 to 410-5, Fig. 5) remain powered according to the user-alterable BIOS setting.

[0037] Referring now to Fig. 7, a flow diagram is shown of another illustrative method (700) of selectively powering peripheral device ports when a
25 processor has entered a sleep state. The present method (700) may be performed by, for example, the illustrative computing device (500, Fig. 5) shown in Fig. 5. The present method (700) may be particularly useful in systems where the user-alterable BIOS setting allows for powering of peripheral device ports (410-1 to 410-5) while the processor (401, Fig. 5) is in a sleep state, but
30 does not specify which of the peripheral device ports (410-1 to 410-5, Fig. 5) are to remain powered and/or if any of the peripheral device ports (410-1 to

410-5, Fig. 5) should not be powered during the sleep state of the processor (401, Fig. 5).

5 **[0038]** In the method (700), as the processor (401, Fig. 5) prepares (step 701) to enter a sleep state, all the peripheral device ports are powered (step 705) so that the peripheral device host controller (508, Fig. 5) may determine (step 710) which of the peripheral device ports (410-1 to 410-5, Fig. 5) are to be powered during the sleep state.

10 **[0039]** The host controller (508, Fig. 5) may make this determination by progressively or concurrently selecting each peripheral device port (410-1 to 410-5, Fig. 5) and determining (decision 715) if the selected peripheral device port (410-1 to 410-5) is currently drawing power. If so, it may be assumed that a peripheral device (425-1, 425-2, Fig. 5) that requires power is connected to the selected peripheral device port (410-1 to 410-5), and a power bit corresponding to the selected peripheral device port (410-1 to 410-5) may be set (step 720) within the host controller (508, Fig. 5) to ensure that the selected peripheral device port (410-1 to 410-5) remains powered when the processor (401, Fig. 5) enters the sleep state. Once no additional ports remain (decision 725) for selection, the processor (401, Fig. 5) may enter a sleep state (step 730).

20 **[0040]** In summary, the systems and methods described in the present specification advantageously allow certain peripheral devices which draw power from a host computer system to maintain their power supply while a processor in the host computing device is in a sleep state. By allowing an idle processor to enter the sleep state, power is conserved. Thus, the systems and methods described herein allow for the advantageous selective powering of peripheral devices without requiring that a processor be actively running a resource heavy operating system. This selective powering is controlled by a setting stored in the firmware of the processor which can be selectively altered by a user. As mentioned previously, the systems and methods of the present specification provide especially distinct advantages in computer systems which are portable and run off of battery power such as laptops or notebook computers.

[0041] The preceding description has been presented only to illustrate and describe embodiments and examples of the principles described. This description is not intended to be exhaustive or to limit these principles to any precise form disclosed. Many modifications and variations are possible in light
5 of the above teaching.

CLAIMS

WHAT IS CLAIMED IS:

- 5 1. A computing device (101, 400, 500) comprising a processor (401) and at least one peripheral device port (106, 107, 108, 109, 410-1 to 410-5); wherein said processor (401) is configured to selectively power said at least one peripheral device port (106, 107, 108, 109, 410-1 to 410-5) when said processor (401) is in a sleep state (302, 303, 304, 305, 306) according to at
10 least one setting stored by firmware (405) of said processor (401).
2. The computing device (101, 400, 500) of claim 1, wherein said firmware (405) comprises a system BIOS for said processor (401).
- 15 3. The computing device (101, 400, 500) of claim 1, wherein said processor (401) is configured to alter said at least one setting according to input received from a user in a BIOS setup menu.
4. The computing device (101, 400, 500) of claim 1, wherein each
20 said at least one peripheral device port (106, 107, 108, 109, 410-1 to 410-5) comprises a hardware switch (415-1, 415-2) configured to selectively connect said peripheral device port (106, 107, 108, 109, 410-1 to 410-5) to a power supply according to said at least one setting.
- 25 5. The computing device (101, 400, 500) of claim 1, further comprising a host controller (508) communicatively coupled to a plurality of said peripheral device ports (106, 107, 108, 109, 410-1 to 410-5), wherein said firmware (405) is configured to:
 power up said host controller (508) after an operating system has been
30 unloaded from said processor (401) in preparation for said processor (401) to enter said sleep state (302, 303, 304, 305, 306); and

specify to said host controller (508) which of said peripheral device ports (106, 107, 108, 109, 410-1 to 410-5) are to remain powered during said sleep state (302, 303, 304, 305, 306).

5 6. The computing device (101, 400, 500) of claim 5, wherein said firmware (405) is further configured to:

enable power to each of said peripheral device ports (106, 107, 108, 109, 410-1 to 410-5) after said operating system has been unloaded from said processor (401);

10 determine which of said peripheral device ports (106, 107, 108, 109, 410-1 to 410-5) are communicatively coupled to an active peripheral device (102, 103, 104, 105, 425-1, 425-2); and

cause said host controller (508) to provide power while said processor (401) is in said sleep state (302, 303, 304, 305, 306) only to said peripheral device ports (106, 107, 108, 109, 410-1 to 410-5) that are determined to be communicatively coupled to an active peripheral device (102, 103, 104, 105, 425-1, 425-2).

20 7. The computing device (101, 400, 500) of claim 1, wherein said processor (401) comprises a plurality of sleep state levels (302, 303, 304, 305, 306) and said at least one setting stored by said firmware (405) specifies at least one of the following parameters: a maximum sleep state level (302, 303, 304, 305, 306) at which power will be provided to said at least one peripheral device port (410-1 to 410-5), an identification of which of a plurality of said peripheral device ports (410-1 to 410-5) are to receive power at one or more sleep state levels (302, 303, 304, 305, 306), and combinations thereof.

25 8. A method of powering at least one peripheral device (102, 103, 104, 105, 425-1, 425-2) coupled to a processor (401), comprising storing a user-alterable setting in firmware (405) for said processor (401) and selectively providing power to said at least one peripheral device (102, 103, 104, 105, 425-

1, 425-2) when said processor (401) is in a sleep state (302, 303, 304, 305, 306) according to said user-alterable setting.

9. The method of claim 8, wherein said selectively providing power to
5 said at least one peripheral device (102, 103, 104, 105, 425-1, 425-2)
comprises closing a hardware switch (415-1, 415-2) communicatively coupled
to said at least one peripheral device (102, 103, 104, 105, 425-1, 425-2) and a
power supply.

10. The method of claim 8, further comprising:
powering up a host controller (508) communicatively coupled to a
plurality of said peripheral device ports (106, 107, 108, 109, 410-1 to 410-5)
after an operating system has been unloaded from said processor (401) in
preparation for said processor (401) to enter said sleep state (302, 303, 304,
15 305, 306); and
specify to said host controller (508) which of said peripheral device ports
(106, 107, 108, 109, 410-1 to 410-5) are to remain powered during said sleep
state (302, 303, 304, 305, 306).

20 11. The method of claim 10, further comprising:
enabling power to each of said peripheral device ports (106, 107, 108,
109, 410-1 to 410-5) after said operating system has been unloaded from said
processor (401);

determining which of said peripheral device ports (106, 107, 108, 109,
25 410-1 to 410-5) are communicatively coupled to an active peripheral device
(102, 103, 104, 105, 425-1, 425-2); and

causing said host controller (508) to provide power while said processor
(401) is in said sleep state (302, 303, 304, 305, 306) only to said peripheral
device ports (106, 107, 108, 109, 410-1 to 410-5) that are determined to be
30 communicatively coupled to an active peripheral device (102, 103, 104, 105,
425-1, 425-2).

12. The method of claim 8, wherein said processor (401) comprises a plurality of sleep state levels (302, 303, 304, 305, 306) and said at least one setting specifies at least one of the following parameters: a maximum sleep state level (302, 303, 304, 305, 306) at which power will be provided to said at least one peripheral device port (106, 107, 108, 109, 410-1 to 410-5), an identification of which of a plurality of said peripheral device ports (106, 107, 108, 109, 410-1 to 410-5) are to receive power at one or more sleep state levels (302, 303, 304, 305, 306), and combinations thereof.

13. A computer program product (405) for powering at least one peripheral device (102, 103, 104, 105, 425-1, 425-2) coupled to a processor (401), said computer program product comprising:

a computer usable medium having computer usable program code embodied therewith, the computer usable program code comprising:

computer usable program code configured to store a user-alterable setting; and

computer usable program code configured to selectively provide power to said at least one peripheral device (102, 103, 104, 105, 425-1, 425-2) when said processor (401) is in a sleep state (302, 303, 304, 305, 306) according to said user-alterable setting.

14. The computer program product (405) of claim 13, wherein said computer usable program code further comprises:

computer usable program code configured to power up a host controller (508) communicatively coupled to a plurality of said peripheral device ports (106, 107, 108, 109, 410-1 to 410-5) after an operating system has been unloaded from said processor (401) in preparation for said processor (401) to enter said sleep state (302, 303, 304, 305, 306); and

computer usable program code configured to specify to said host controller (508) which of said peripheral device ports (106, 107, 108, 109, 410-1 to 410-5) are to remain powered during said sleep state (302, 303, 304, 305, 306).

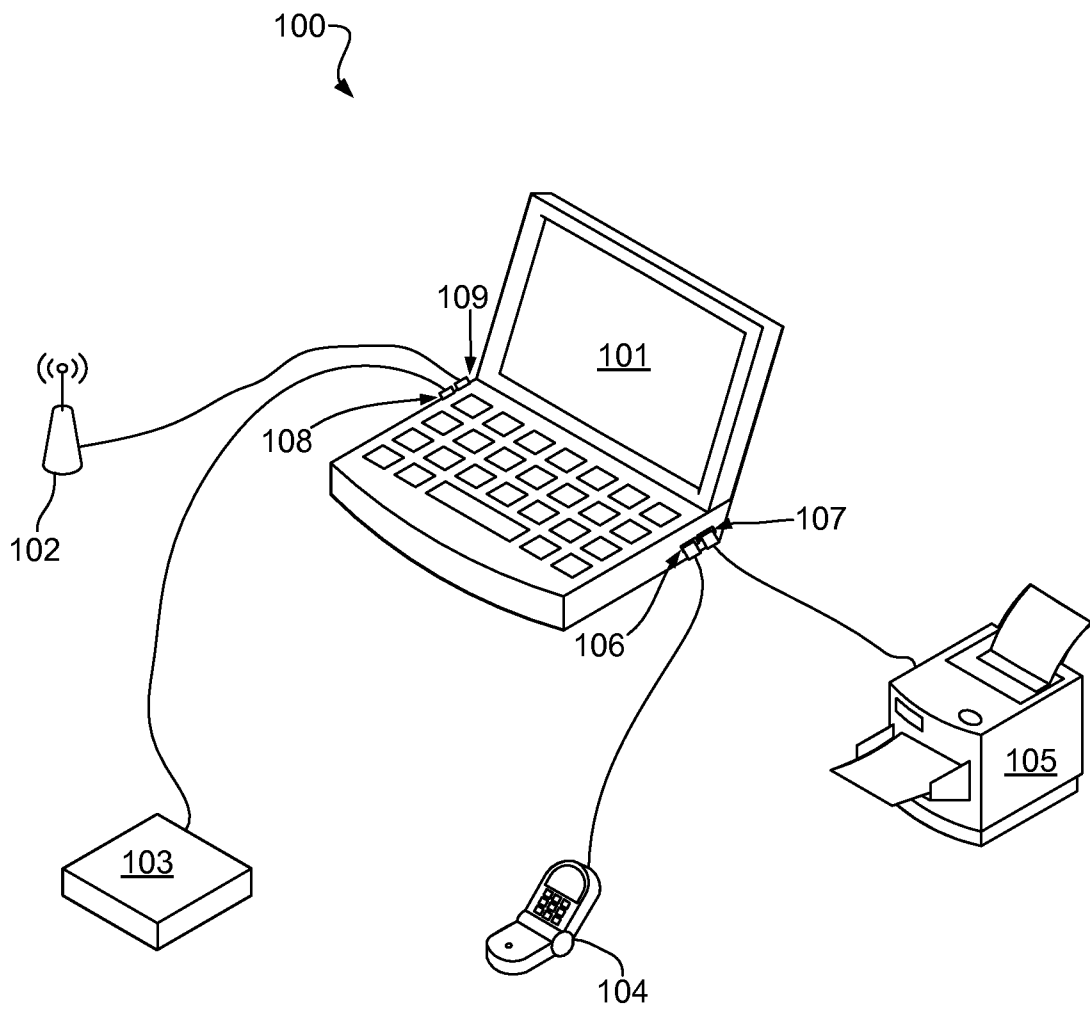
15. The computer program product (405) of claim 14, wherein said computer usable program code further comprises:

5 computer usable program code configured to enable power to each of said peripheral device ports (106, 107, 108, 109, 410-1 to 410-5) after said operating system has been unloaded from said processor (401);

computer usable program code configured to determine which of said peripheral device ports (106, 107, 108, 109, 410-1 to 410-5) are communicatively coupled to an active peripheral device (102, 103, 104, 105, 425-1, 425-2); and
10

computer usable program code configured to cause said host controller (508) to provide power while said processor (401) is in said sleep state (302, 303, 304, 305, 306) only to said peripheral device ports (106, 107, 108, 109, 410-1 to 410-5) that are determined to be communicatively coupled to an active
15 peripheral device (102, 103, 104, 105, 425-1, 425-2).

1/7

**Fig. 1**

2/7

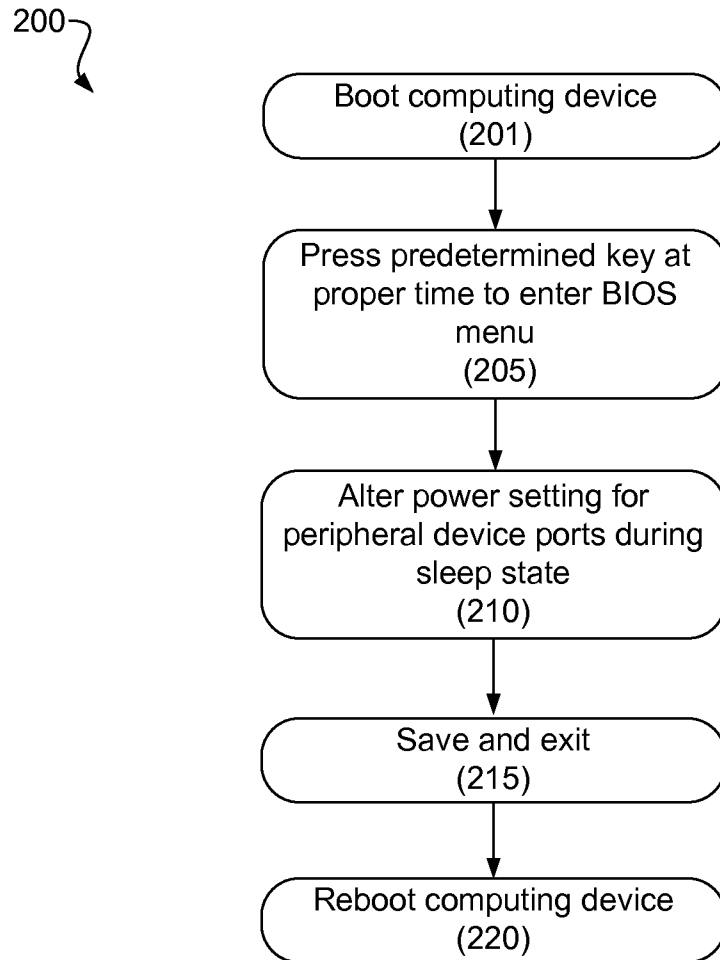
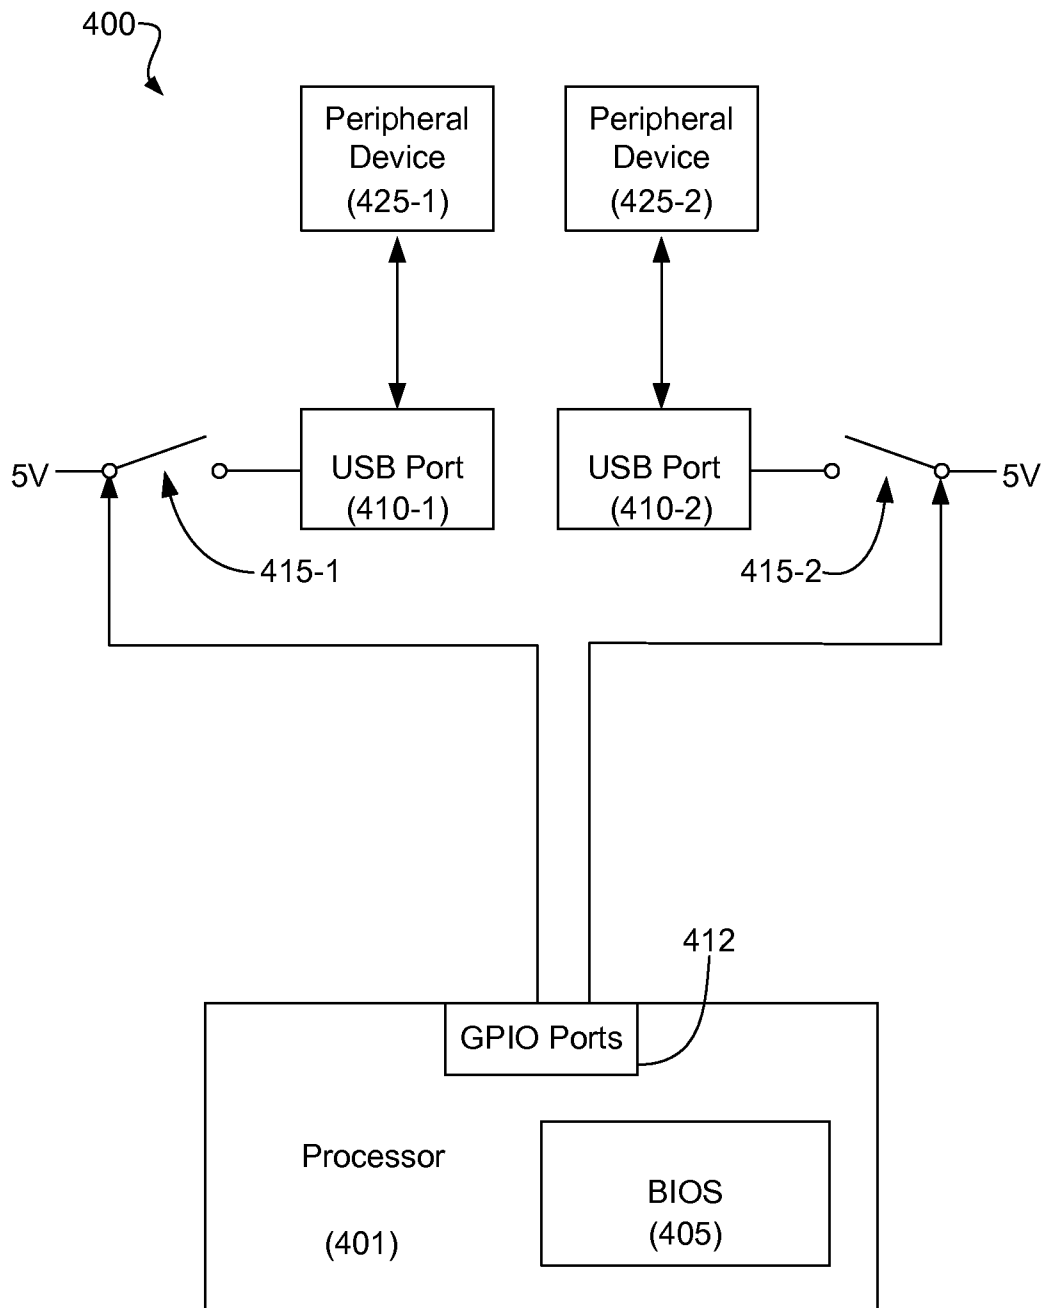
**Fig. 2**

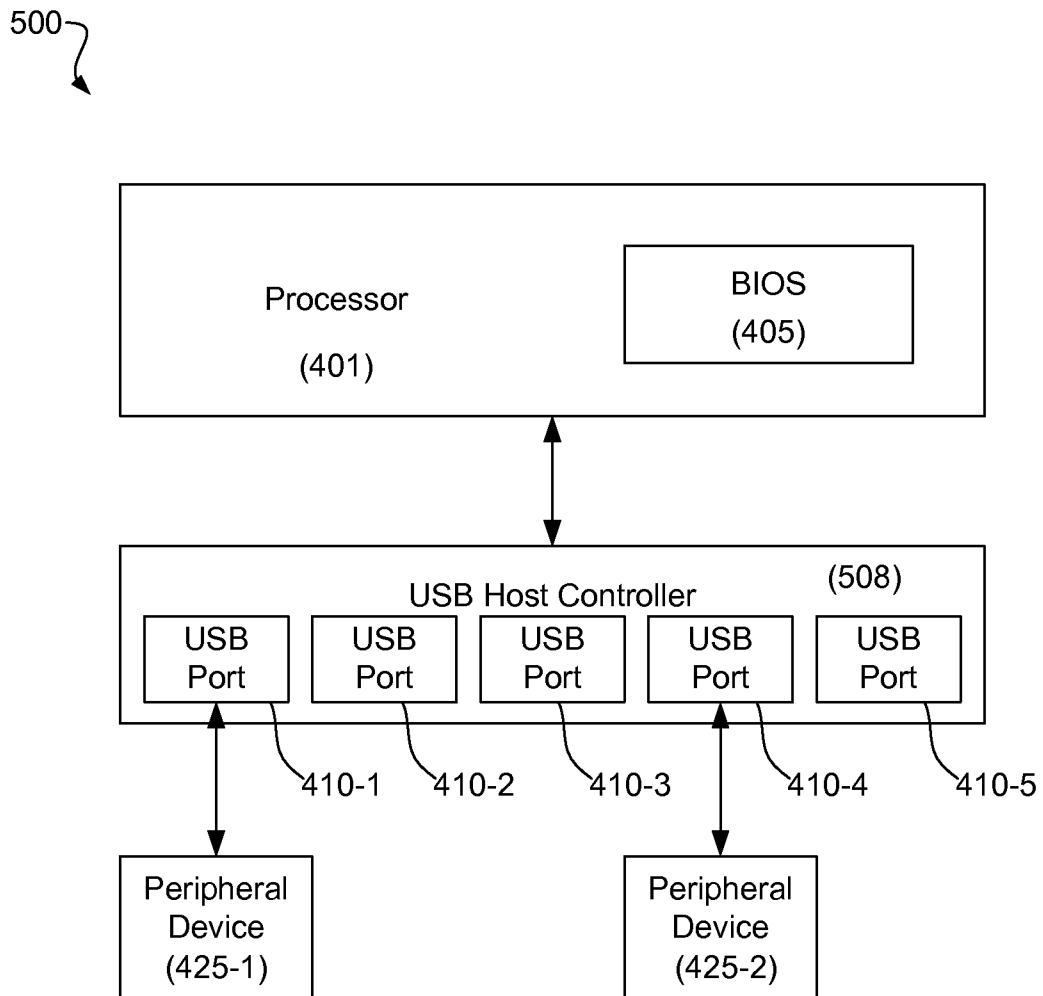


Fig. 3

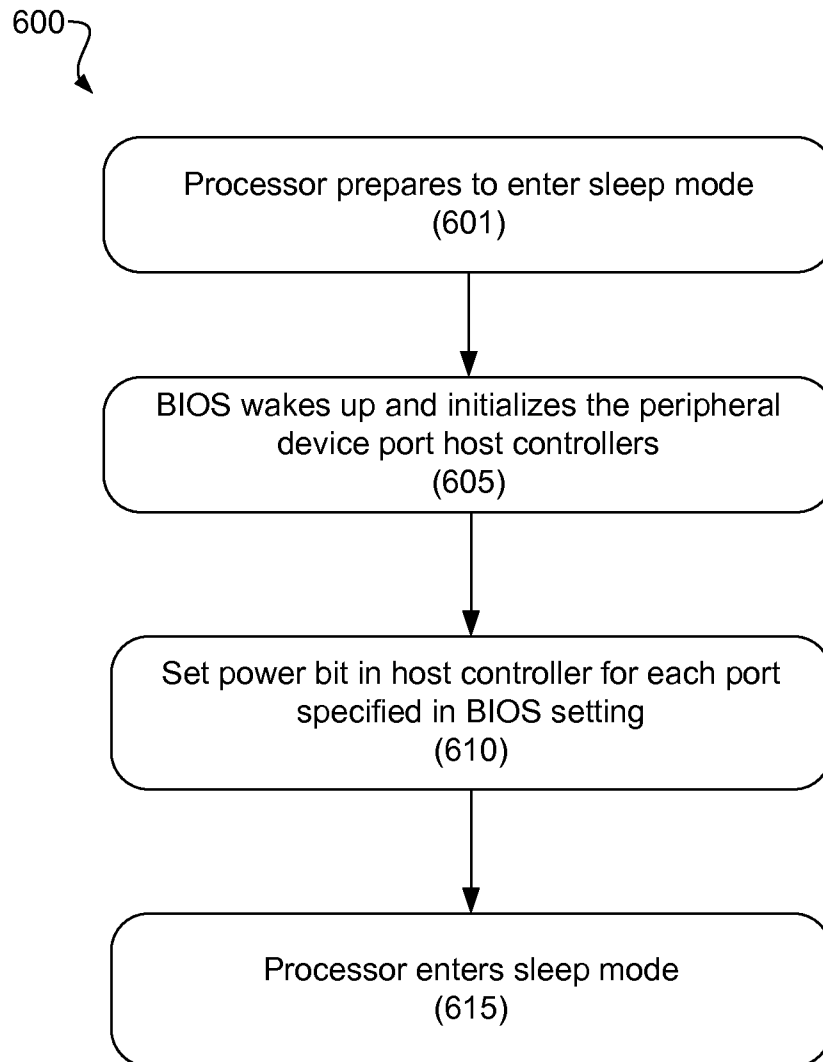
4/7

**Fig. 4**

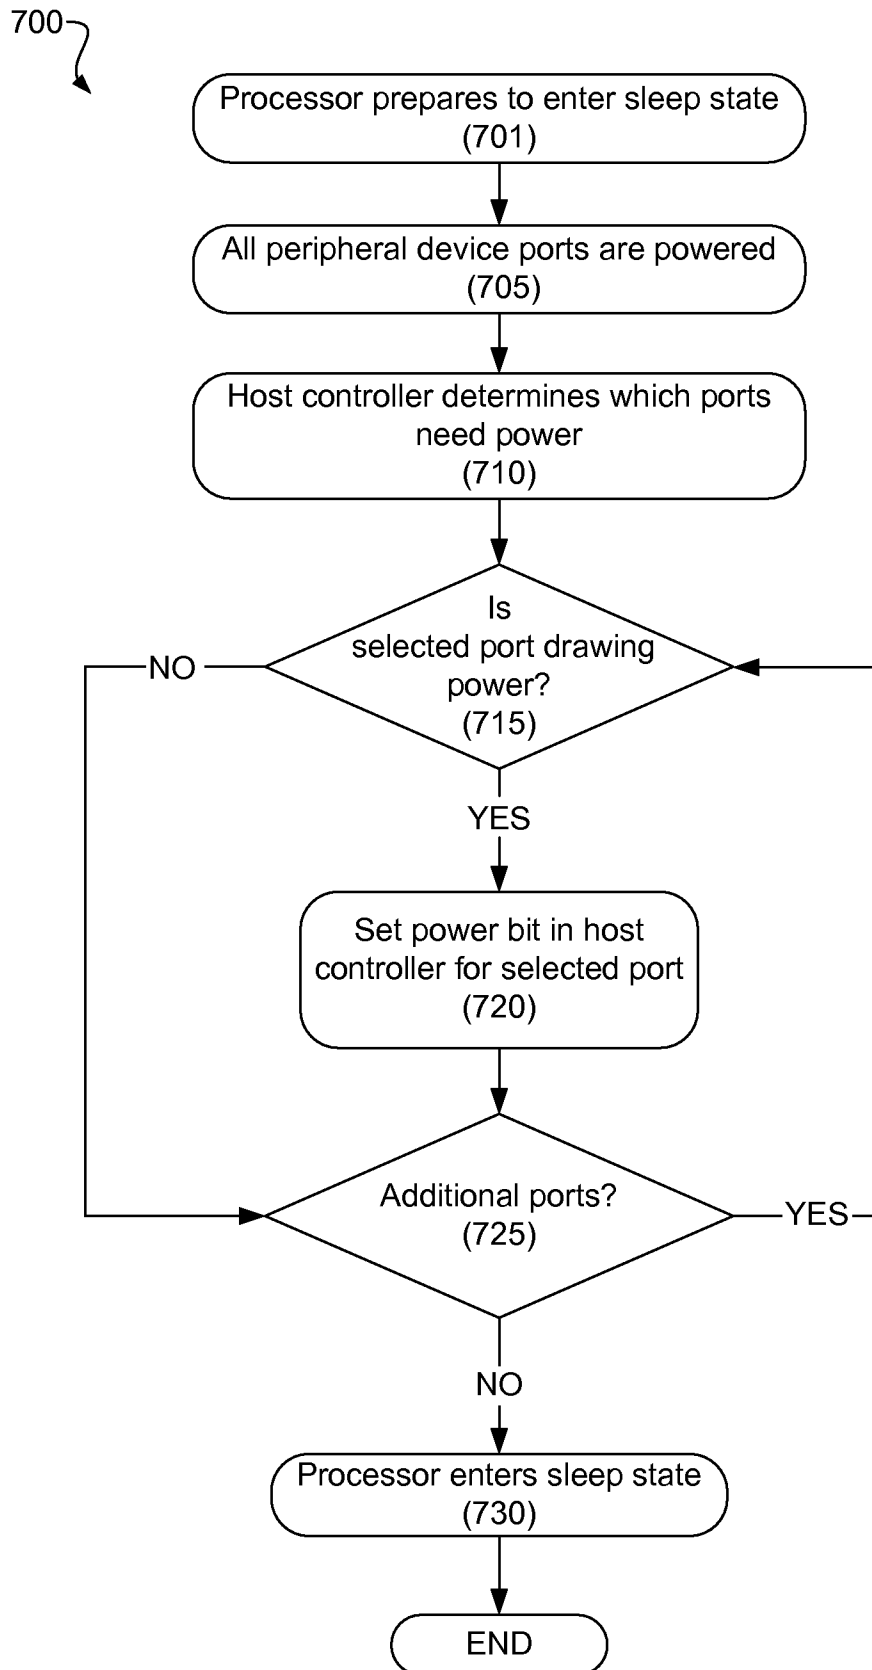
5/7

**Fig. 5**

6/7

**Fig. 6**

7/7

**Fig. 7**

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2009/033541**A. CLASSIFICATION OF SUBJECT MATTER****G06F 13/14(2006.01)i, G06F 1/26(2006.01)i, G06F 1/32(2006.01)i, G06F 1/00(2006.01)i, G06F 9/22(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC8: G06F01, G06F13

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean Utility Models and applications for Utility Models since 1975

Japanese Utility Models and application for Utility Models since 1975

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) "computer, sleep, state, idle, peripheral, device, power, usb, bios"

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 2007-0220290 A1 (PING-YEN TSAI et al.) 20 September 2007. See paragraphs [0005] - [0006], [0024] - [0033]; figures 2-5. See the whole document.	1-4, 7-9, 12-13 5-6, 10-11, 14-15
X A	US 2007-0067659 A1 (AVADIS TEVANIAN JR.) 22 March 2007. See paragraphs [0015] - [0023]; figures 1-3. See the whole document.	1-4, 7-9, 12-13 5-6, 10-11, 14-15
A	KR 10-2008-0060045 A (LG ELECTRONICS INC.) 01 July 2008. See the whole document.	1-15
A	JP 2006-053748 A (TOSHIBA CORP.) 23 February 2006. See the whole document.	1-15

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

23 OCTOBER 2009 (23.10.2009)

Date of mailing of the international search report

23 OCTOBER 2009 (23.10.2009)

Name and mailing address of the ISA/KR


Korean Intellectual Property Office
Government Complex-Daejeon, 139 Seonsa-ro, Seo-
gu, Daejeon 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

KIM Jong Kee

Telephone No. 82-42-481-8301



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2009/033541

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2007-0220290 A1	20.09.2007	None	
US 2007-0067659 A1	22.03.2007	CN 101243374 A EP 1920309 A1 JP 2009-504121 A KR 10-2008-0050400 A US 07430679 B2 WO 2007-027336 A1	13.08.2008 14.05.2008 29.01.2009 05.06.2008 30.09.2008 08.03.2007
KR 10-2008-0060045 A	01.07.2008	None	
JP 2006-053748 A	23.02.2006	US 07489974 B2 US 2006-0035527 A1 US 2008-0313477 A1	10.02.2009 16.02.2006 18.12.2008