


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁷ : B65D 81/34</p>	<p>A1</p>	<p>(11) International Publication Number: WO 00/47491</p> <p>(43) International Publication Date: 17 August 2000 (17.08.00)</p>
<p>(21) International Application Number: PCT/US00/02020</p> <p>(22) International Filing Date: 31 January 2000 (31.01.00)</p> <p>(30) Priority Data: 09/248,870 11 February 1999 (11.02.99) US</p> <p>(71) Applicant (for all designated States except US): GENERAL MILLS, INC. [US/US]; Number One General Mills Boulevard, P.O. Box 1113, Minneapolis, MN 55440 (US).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): JI, Hong [US/US]; 9613 Hillingdon Road, Woodbury, MN 55125 (US). MONFORTON, Randal, J. [US/US]; 8901 Belvedere Drive, Eden Prairie, MN 55347 (US).</p> <p>(74) Agents: TAYLOR, Douglas, J. et al.; General Mills, Number One General Mills Blvd, P.O. Box 1113, Minneapolis, MN 55440-1113 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>

(54) Title: BAG FOR MICROWAVE HEATING

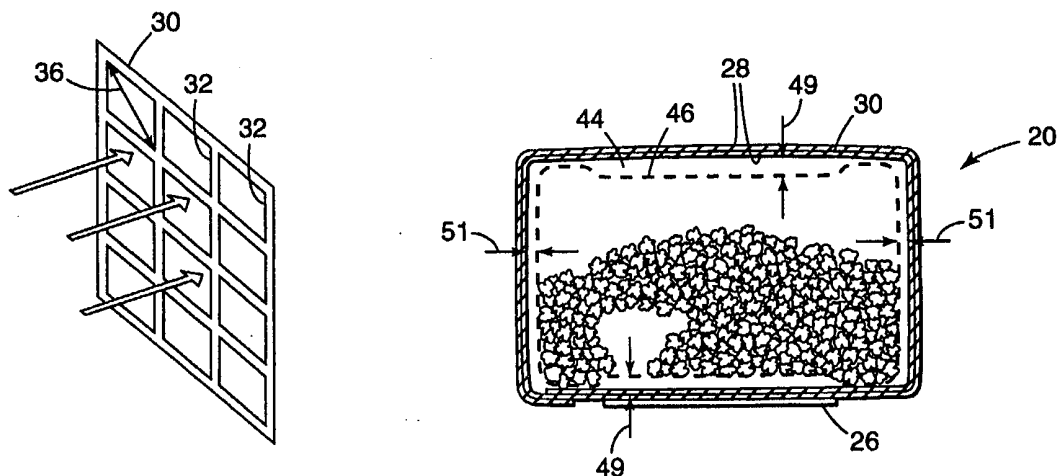

(57) Abstract

Apparatus for and method of controlling heating of a foodstuff using microwave energy having a food package with a microwave shielding layer (30) containing a plurality of apertures (32) therein sized to permit penetration of evanescent microwave energy into the interior of the package with the microwave shielding layer being moved outward as the package expands due to generation of water vapor such that an interior volume of the package is subsequently protected against substantial microwave irradiation of the foodstuff (22) upon and beyond completion of the microwave heating cycle.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

BAG FOR MICROWAVE HEATING

Field of the Invention

This invention relates to the field of microwave heating of foodstuffs, in particular to packaging designed for influencing the heating of the foodstuff as it is irradiated with microwave energy.

Background of the Invention

With respect to microwave foods, it is often desirable that the microwave heating be controlled in order to prevent overheating of the food. One example is microwave heating and popping of popcorn. If popped kernels are subjected to prolonged microwave heating, scorching occurs. Currently, microwave popcorn is packaged in flexible paper bags. Embedded in the popcorn bag is a susceptor used to absorb microwave energy and aid popcorn heating and popping. Typically in packaging microwave popcorn, a slurry including popcorn kernels are located on top of the susceptor, the bag is folded over itself to a compact size. When the bag is placed in the microwave oven, instructions typically call for at least partial unfolding of the bag and placing the bag on a microwave transparent shelf or floor of the oven with the susceptor below the popcorn. When the popcorn bag is heated in the microwave oven, steam or water vapor from the popping popcorn causes the bag to further unfold and inflate. With the current bag designs, popped kernels are unprotected from microwave irradiation after popping. When heated above about 210° C, popped kernels begin to scorch. The present

invention overcomes this shortcoming of prior art popcorn bags (and other microwave-related food packages) by providing a bag or package that initially exposes the unpopped popcorn (or other food load) to microwave irradiation to pop the kernels or otherwise heat the food load and thereafter protects the bulk of the popped kernels (or other heated food load) from microwave energy, thus reducing or eliminating the scorching (and other undesirable results of overheating) that would otherwise occur.

Brief Description of the Drawings

Figure 1 is a perspective view of a popcorn bag useful in the practice of the present invention shown in a first state prior to popping under the influence of microwave irradiation.

Figure 2 is the popcorn bag of Figure 1 shown in a second state with a substantial amount of popcorn popped.

Figure 3 is a simplified perspective view of a conducting sheet with apertures useful in the practice of the present invention.

Figure 4 is a side view of the perforated conducting sheet of Figure 3, along with a simplified graph of evanescent microwave propagation power decay after microwave energy transits the sheet.

Figure 5 is a schematic or simplified pictorial view of a generic version of the bag of Figure 1 corresponding to the first state to illustrate certain features of the present invention.

Figure 6 is a schematic or simplified pictorial view of a generic version of the bag of Figure 2 corresponding to the second state to illustrate certain aspects of the present invention

Figure 7 is a perspective view of an alternative embodiment of a package useful in the practice of the present invention and shown in an expanded condition.

Figure 8 is a top plan view of the package of Figure 7 illustrating a microwave shielding layer with apertures therein in an unfilled, flat condition, with portions broken away.

Figure 9 shows a cross sectional view of the package of Figure 7 according to section line 9-9 of Figure 7, with the popped popcorn removed and the microwave shielding layer with apertures therein shown for illustration.

Figure 10 shows a side view of the package of Figure 7 in an opened condition.

Figure 11 is a view similar to Figure 1, except that the popcorn bag is generally enclosed by a microwave shielding layer with apertures only in a limited region thereof and with the unpopped popcorn load omitted for clarity.

Figure 12 is a view according to Figure 1, except showing the popcorn bag in the second state and with the popped popcorn load omitted for clarity.

Figure 13 is a bottom plan view of the bag of Figure 12 in the second state.

Figure 14 is a plan view of an alternative lattice arrangement for an aperture pattern useful in the practice of the present invention.

Figure 15 is a perspective view of the popcorn bag of the embodiment of Figure 1 shown in an a completely folded state.

Figure 16 is a perspective view of the popcorn bag of Figure 15 shown in a partially unfolded state.

Detailed Description of the Invention

Referring now to the Figures, and most particularly, to Figures 1, 2, 11, 12, 15 and 16, a food package 20 useful in the practice of the present

invention may be seen. Food package 20 is in the form of a modified conventional microwave popcorn bag having wings 21, 23 in which the unpopped popcorn 22 is vended or sold for consumers to place in a microwave oven and pop the popcorn. It is to be understood that the unpopped popcorn load 22 typically will include fat, oil, salt, colorings, flavorings or the like in addition to the popcorn kernels, forming a mass or slurry 24, typically positioned on a microwave susceptor 26. Susceptor 26 may be a conventional susceptor as is well known to use for microwave heating, especially for popping popcorn.

Referring now also to Figures 5 and 6, as well as the Figures already referred to, in this embodiment, the package 20 is preferably a flexible, inflatable bag. Bag or package 20 can be made from any desired material but is preferably formed of paper, one or more polymers, or a combination thereof, including but not limited to base coated paper or similar polymer structures or the like. It is to be understood that Figures 5 and 6 show an "idealized" package to illustrate certain aspects of the invention.

The package 20 preferably includes one or more septic layers 28 such as paper or plastic to provide a clean or sanitary environment and a suitable external appearance for the foodstuff during vending and handling. In addition, as part of the septic layer, (or as a separate layer) package 20 also has a water vapor barrier layer (e.g., interior layer 28) for reasons which will become apparent. It is to be understood that the water vapor barrier layer is desirably similar or identical to that used in conventional popcorn packaging intended for use heating in microwave ovens. It is to be further understood that this layer is sealed sufficiently to cause or allow the bag to inflate as is conventional in the microwave popping of popcorn, for reasons to be explained *infra*.

Unlike conventional packages for microwave popcorn, the package 20 of the present invention further includes a microwave shielding layer 30 which may be formed of metal. Referring now also to Figures 3 and

4, the microwave shielding layer 30 has a plurality of apertures 32 therein, with each aperture sized to permit substantially only evanescent or non-propagating microwave energy to enter the package. In the preferred embodiment, layer 30 is desirably thick enough to prevent the transmission of microwave energy therethrough [and is desirably thick enough to avoid layer 30 functioning (generally) as a susceptor]. It is believed that conventional susceptors are in the range of tens to hundreds of Angstroms in thickness. For conventional metals such as copper and aluminum (not acting as susceptors, but instead providing microwave shielding) the penetration depth is about a few microns.

The shape and size and pattern or lattice of the apertures are preferably chosen to limit transmission of microwave energy to substantially only an evanescent mode when the microwaves transit the layer 30. This is achieved primarily by maintaining the maximum dimension 36 of each aperture 32 to be sufficiently small to prevent transmission of propagating modes of microwave energy through layer 30. In comparison, and as a figure of merit, for a long waveguide with square cross section, the microwave energy is limited to an evanescent mode when:

$$a < \lambda / 2$$

(1)

where "a" is the linear dimension of the waveguide cross section, and λ is the free space wavelength.

In general in the prior art, "evanescent mode" has been used to refer to operation below cutoff, i.e., $\lambda > \lambda_c$, where λ_c is the cutoff wavelength, and the guide wavelength λ_g is given by Equation (2):

$$\lambda_g = \lambda_0 / (1 - \lambda_0^2 / \lambda_c^2)^{1/2} \quad (2)$$

where λ_0 is the normalized wavelength, given by Equation (3) as the ratio of the wavelength of interest, λ , to the cutoff wavelength:

$$= \lambda / c \quad (3)$$

The free space wavelength is about 12.24 cm for 2450 MHz. As used herein, the term “evanescent” is believed to be consistent with, but an extension of, the use of that term in the prior art. Typically, in a microwave oven, the cavity is “overmoded,” unlike conventional waveguide operation. Since the food package of the present invention is exposed to the overmoded field in order to carry out the present invention, the term “evanescent” here is used by analogy or extension to prior art use and refers to decaying, as opposed to propagating microwave energy passing through the grid or aperture pattern of the microwave shielding layer 30.

Returning again to conventional prior art systems, below cutoff, the microwave energy decays generally exponentially with a depth of penetration 49 given by Equation (4):

$$D_p = (a/2) [1 - (2a/\lambda)^2]^{-1/2} \quad (4)$$

As is illustrated generally in Figure 4, the microwave power transiting sheet or layer 30 having apertures 32 therein is evanescent when the maximum dimension of the apertures 32 is below a length permitting propagating power to pass through such apertures. For square or rectangular apertures, the maximum dimension is a diagonal 36. For apertures of other geometries, the maximum dimension is characteristically the longest “free” dimension of the aperture, e.g., for an ellipse, the chord through the two vertices (along the major axis) is the maximum dimension. Curve 38 is an illustration of the power decay of evanescent microwave energy plotted with energy on the ordinate axis 40 and distance from the layer 30 along the abscissa 42. It is to be generally understood, that the smaller the maximum dimension of the apertures, the more rapid the power decay, provided that

other design parameters are held constant. The evanescent mode of microwave energy transiting the apertured layer 30 will form a spatially limited zone of microwave energy beyond the outer surface of layer 30. The depth of the zone beyond the layer 30 can be adjusted by varying the dimensions (especially the maximum dimension) of the apertures in the layer, or by adjusting the shape or pattern of the apertures. In the practice of the present invention, apertures 32 in layer 30 create a spatially controlled "penetration zone" 44 (see Figures 5 and 6) for microwave heating within package 20.

In Figure 5 it will be noted that when the package or bag 20 is collapsed in its initial configuration, the penetration zone may extend substantially across the entire interior of the package, thus permitting microwave irradiation both from above and below, in effect providing an "overlap" of the penetration zone extending down from the top layer with the penetration zone extending up from the bottom layer. In the alternative, the upper and lower penetration zones may abut each other, or it may be desirable (for other reasons) to have the penetration zones not overlap, e.g., in the event the food load is desirably or necessarily thicker than the sum of the depths or thicknesses the desired penetration zones.

In Figure 6, with the bag expanded or inflated, the penetration zone 44 extends only a predetermined, limited distance within layer 30, with the boundary of the penetration zone 44 indicated by dashed line 46. In the idealized images shown in Figures 5 and 6, it is to be understood that apertures 32 extend across substantially all of the surface of layer 30 of package 20.

While the pattern of apertures 32 may extend across the entire package (as is illustrated in an alternative embodiment in Figures 8 and 9), alternatively, the microwave shielding layer 30 may extend across substantially all of the surface 62 of the food package 20, with one or more patterns of apertures 32 extending across only one or more predetermined, limited regions, for example, a region made up of sub-regions 34, 48 of the

food package 20, as is shown in Figures 11 and 12. As a still further embodiment, various regions may have different sized or shaped or spaced apertures to selectively control the microwave energy passing through layer 30 and into the interior of package 20. To that end, it has been found that altering the spacing between apertures can be used for such microwave energy control. Furthermore, it has been found that using a regular lattice i.e., one having constant spacing between apertures and between the rows and columns of apertures, is the most restrictive to the passage of microwave energy through the grid of layer 30. As used herein, it is to be understood that "lattice" refers to the geometrical arrangement of apertures, particularly the spacing between adjacent rows or columns (or both) of the apertures 32 in layer 30.

It is to be understood that it is within the scope of the present invention to use offset lattices in the practice of the present invention. Such offset lattices can be periodic or non-periodic, and different regions of the microwave shielding layer can have different lattice arrangements in addition, or as an alternative, to changing the shape and size of individual apertures. In Figure 14, a triangular lattice 64 is formed by the pattern of individual apertures 32, and is illustrative of an alternative to the regular lattice or pattern of apertures shown with respect to the earlier Figures. It is also within the scope of the present invention to use other aperture shapes in such alternative lattice arrangements, as well.

Turning now to the embodiment shown in Figures 11, 12 and 13 (which correspond to the embodiment of Figures 1 and 2), the evanescent mode microwave energy penetrates layer 30 in an upper surface only in a region 48 corresponding to the food load 22. At the same time, microwave energy is continuously applied through region 34 of a lower surface to heat the food load 22. In this embodiment, package 20 thus includes a predetermined region containing the plurality of apertures that includes both isolated sub-regions 48 and 34 on more than one surface of the food package or bag 20. Initially, in this embodiment, the predetermined region is preferably generally

congruent to the food load 24 as it exists prior to being heated. As the food load 24 is heated, the bag 20 inflates due to the steam or water vapor generated by the popcorn popping, moving region 48 away from the food load 22, thus limiting penetration of microwave energy through apertures 32 to a penetration zone adjacent the interior of region 48. In this embodiment, the popped popcorn will be shielded by layer 30 from further exposure to microwave energy while the food load 22 will be continuously exposed through sub-region 34 to the microwave energy to complete popping. Furthermore, gravity will move the popped kernels away from the sub-region 48, even though continued popping will jostle the popped kernels. Referring now again to Figure 6, the depth 49 of the penetration zone 44 can be controlled and varied from place to place along the bag or package 20 (or 50) by using different sizes or shapes or numbers or spacing of apertures 32 in different sub-regions of layer 30 around the bag 20. For example, and not by way of limitation, penetration zone 44 can have a depth of penetration or thickness of 1/4 inch adjacent sub-regions 48 and 34, and a lesser depth of penetration 51 of 1/8 inch in the remainder of the interior of the food package 20. Referring now again to Figure 4, the example numerical values for the depths of penetration 49, 51 are relative figures of merit, for example, and not by way of limitation, the half-power points corresponding to distance 55 away from ordinate axis 40 (representing the outer surface of layer 30) where level 53 is one half the peak power 57 of curve 38.

Referring now most particularly to Figures 15 and 16, the embodiment of Figures 1 and 2 is shown in fully folded and partially folded configurations. Figure 15 shows bag or package 20 with first and second wings 21, 23 in a fully folded configuration. Figure 16 shows bag 20 in a partially folded configuration with wing 21 folded and wing 23 unfolded. It is to be understood that bag 20 is preferably fully folded when packed for shipment and sale. In the practice of the present invention, bag 20 may be placed in a microwave oven fully or partially folded, or fully unfolded (as

illustrated in Figures 1 and 11) prior to exposure to microwave irradiation. However, it is preferred that the bag 20 be fully unfolded as shown in Figure 1 prior to microwave irradiation. As with conventional bags, if a susceptor 26 is used, bag 20 is preferably oriented with the surface containing the susceptor located on the bottom.

The present invention, in the embodiments shown, provides a bag for reducing scorching while still enabling popping of popcorn, or popping, puffing, or otherwise heating other foodstuffs, by allowing significant penetration of microwave energy into the bag, delivering sufficient energy to pop the popcorn while the bag is in a collapsed or folded condition. After popping has inflated the bag, the majority of the food package interior (i.e., the region beyond, or interior of, the penetration zone) is protected from further entry of significant microwave energy. This is accomplished by selecting one or more sizes of apertures 32 to permit passage of substantially only evanescent (i.e., non-propagating) microwave energy modes into the interior of the bag. In the practice of the present invention wherein the susceptor 26 is interior of layer 30, there is preferably a region 34 in layer 30 on the bottom surface of the package 20 at least substantially congruent to the susceptor 26 to permit microwave energy to reach and heat the susceptor 26 as the energy enters from the bottom of the package. If susceptor 26 is located exterior of layer 30, it may still be preferable to have a grid or perforated region 34 on the bottom of the package to enable microwave energy to pass through susceptor 26 and heat the food load located inside the package. In either event, the lattice or grid of region 34 is desirably arranged to prevent entry of microwave energy other than evanescent mode energy into the interior of package 20. This may be accomplished by providing a pattern of apertures 32 adjacent to the susceptor 26. It is to be understood that the susceptor 26 may be located interior or exterior of the microwave shielding layer 30, (or even may be omitted) as desired.

Referring now to Figures 7 through 10, an alternative embodiment of the present invention may be seen. In Figure 7, the package 50 of this embodiment is shown in an expanded condition. The package or bag 50 is generally circular in plan as may be seen most clearly in Figure 8. As with the previously described embodiment, bag 50 is preferably formed of a flexible, but non-extendable material such as paper or similar cellulose material 52, with a microwave shielding or reflective layer 54 laminated thereto. The various panels or walls making up bag 50 are preferably sealed to trap the water vapor created within the bag 50 during microwave heating thereof, while at the same time allowing selective rupture when desired to permit access to the interior of the bag when the food is to be consumed. It is preferred to provide an annular adhesive strip 56 to secure the walls of bag 50 together, using heat and or pressure.

It is to be understood that it is preferable to form bag 50 as a generally planar assembly when collapsed. Figures 8 and 9 illustrate that the microwave shielding layer 54 is perforated with apertures 32 across substantially all of the surface thereof, with the possible exception of the adhesively secured seams 58 and 59. As in the first embodiment, it is to be understood that the microwave shielding layer may be invisible to a consumer user, being laminated between other layers forming a sanitary or septic food package. In Figure 9 a susceptor 60 is shown, preferably secured to bag 50. As with the first embodiment, susceptor 60 can be exposed to the full effect of microwave irradiation by being located exterior of the microwave shielding layer 54, or it may be attached interior of the apertured microwave shielding layer 54. Bag 50 is preferably loaded with a charge of unpopped popcorn, and fat or oil, with flavorings and colorants optionally included. Bag 50 is preferably folded into a generally rectangular configuration for shipping and vending, and, in its folded configuration, may be of a size and shape similar to the first embodiment or other conventional microwave oven ready popcorn packages.

Bag 50 also preferably has a removable cover 92 overlapping an opening 94 in the upper surface thereof. Cover 92 preferably has an adhesive seam 59 which is openable by a consumer once the popcorn is popped, as is illustrated in Figure 10. A non-adhered flap 96 preferably is formed integrally with cover 92 to assist in opening the bag 50. It is to be understood that cover 92 may have an aesthetically pleasing outer layer 52 formed, for example of a heat stable polymer or paper and an inner microwave shielding layer 54, with apertures therein, as is illustrated in Figures 8 and 9.

It is to be understood that the contents of the food package of the present invention may be popcorn kernels or any suitable grain such as rice, maize, barley, sorghum, or the like for being popped or puffed when heated or reheated in a microwave oven.

When subjected to microwave heating, the susceptor will convert microwave energy to heat, and the food load will be subjected to direct heating until sufficient water vapor is released to expand the bag sufficiently to move the upper apertured microwave layer away from the food load by a distance greater than the depth of penetration of the evanescent microwave energy. As popping or puffing continues, the food package will inflate or expand further, enlarging the volume protected from substantial microwave irradiation interior of the penetration zone. It is to be understood that the penetration zone extends substantially across the entire interior surface of package 50. Nevertheless, the protected volume will eliminate scorching of the popped popcorn therein, and the jostling of the popped popcorn will constantly move peripheral popped kernels into and out of the penetration zone, further reducing the chance of scorching.

The grid pattern for square apertures in the practice of the present invention is preferably in the range of $\frac{1}{2}$ to $1\frac{1}{2}$ inches in linear dimension (the length of each side of an aperture). In order to create evanescent microwave energy interior of the microwave shielding layer, the thickness and width of the grid pattern forming the apertures must be greater

than the penetration depth of the conducting material. For a material of conductivity σ , the penetration depth is given by Equation (6):

$$\delta = c / (2 \pi \sigma \mu)^{1/2} \quad (6)$$

where c is the speed of light, and ω is the microwave (radian) frequency. The width of the grid between apertures should not be so great as to prevent formation of significant evanescent waves interior of the microwave shielding layer to heat the food.

For this reason, the width of the grid is desirably greater than the penetration depth (a few microns, depending on material) and less than 3/8 inches. It is to be emphasized that the shape of the apertures can be regular or irregular, and can include, but is not limited to square, triangular, round, elliptic and even irregular or amorphous (if limited in its maximum dimension to achieve the evanescent microwave mode). The grid or aperture pattern can be regular across the surface of the package or it can be interrupted or irregular, as desired to achieve the proper heating effect for the particular food load carried by the package. The microwave shielding layer can be formed of any material capable of reflecting microwave energy, including, but not limited to, most metals and alloys, such as aluminum, nickel, copper, silver, iron, stainless steel, and the like.

The amount of microwave energy entering the food package can be controlled by varying the parameters of the apertures 32, the grid bridge 72, the thickness 82 of sheet 70 making up microwave shielding layer 30 in food package 20, and the pattern (or lattice type) of the apertures 32. It is to be understood to be within the scope of the present invention to vary (or hold constant) one, some or all of these parameters across the surfaces of the food package to obtain desired results by controlling the evanescent microwave energy entering the food package. This is true notwithstanding whether or not

additional, non-evanescent microwave energy also enters the food package, provided that the food load is primarily influenced by the evanescent microwave energy at least in the regions where the present invention is being practiced.

It is to be further understood that the present invention is suitable for selective heating of foods other than popcorn and other puffed foodstuffs. For example, and not by way of limitation, a filled pastry that gives off water vapor when heated, may be heated and a topping such as frosting may be melted using a food package according to the teachings of the present invention. In such an application, the filling may be prevented from being overheated (to avoid scalding a consumer) while the outer surface of the foodstuff can be heated and even browned, if desired, using the penetration zone of the present invention to selectively heat the foodstuff, and prevent overheating by inflation of the package during microwave irradiation.

As another example, and not by way of limitation, the present invention may be used to selectively and controllably heat or cook a pizza using microwave irradiation, where the food package for the pizza may have relatively small apertures in a lower surface to admit evanescent energy only (or primarily) to the pizza crust below the toppings while the upper grid or region above the pizza food load may have apertures suitable for sufficient, but not excessive, heating or cooking of the toppings, followed by a movement of the upper grid away from the pizza (as a result of the water vapor generated) to prevent overheating of the toppings. This approach may be utilized with or without a susceptor to achieve desired browning of the crust, and to simultaneously achieve desired cooking of the toppings, without overcooking.

The invention is not to be taken as limited to all of the details thereof as modifications and variations thereof may be made without departing from the spirit or scope of the invention.

What is Claimed Is:

1. Apparatus for controlling heating of a foodstuff with microwave energy comprising:

- a. a food package having a microwave shielding layer with a plurality of apertures therein, with the apertures sized to permit substantially only evanescent penetration of microwave energy into the interior of the package;
- b. a foodstuff contained in the food package with the foodstuff initially located in close proximity to the microwave shielding layer;
- c. means for moving the microwave shielding layer away from close proximity to at least a majority of the foodstuff after the package and the foodstuff is irradiated with at least a predetermined amount of microwave energy

such that the evanescent penetration of the microwave energy is insufficient to over heat the foodstuff when the microwave shielding layer is moved out of close proximity to the foodstuff.

2. The apparatus of claim 1 wherein water vapor is generated by the microwave energy and the means for moving the microwave shielding layer away from close proximity to at least a majority of the foodstuff is a water vapor barrier layer sufficiently impermeable to water vapor and operative to inflate the package in response to the generation of water vapor.

3. The apparatus of claim 2 wherein the foodstuff is popcorn.

4. The apparatus of claim 1 wherein the food package further comprises a microwave susceptor located interior of the microwave shielding layer.

5. The apparatus of claim 1 wherein the food package further comprises a microwave susceptor located exterior of the microwave shielding layer.

6. The apparatus of claim 1 wherein the food package further comprises a septic layer located adjacent the microwave shielding layer.
7. The apparatus of claim 1 wherein the plurality of apertures extend substantially across the entire food package.
8. The apparatus of claim 1 wherein the plurality of apertures extend across a predetermined, limited region of the food package.
9. The apparatus of claim 8 wherein the limited region is generally at least congruent to the foodstuff as it exists prior to heating.
10. A method of controlling heating of a foodstuff with microwave energy comprising the steps of:
 - a. providing a food package having a microwave shielding layer with a plurality of apertures therein, where the apertures are sized to permit substantially only evanescent penetration of microwave energy into the interior of the package;
 - b. initially locating a foodstuff within the food package in close proximity to the microwave shielding layer;
 - c. irradiating the package and foodstuff with microwave energy; and
 - d. moving the microwave shielding layer away from close proximity to at least a majority of the foodstuff after the package and the foodstuff is irradiated with at least a predetermined amount of microwave energysuch that the evanescent penetration of the microwave energy is insufficient to over heat the foodstuff when the microwave shielding layer is moved out of close proximity to the foodstuff.

11. The method of claim 10 wherein water vapor is generated by the microwave irradiation.
12. The method of claim 11 wherein the water vapor expands the package to move the microwave shielding layer away from close proximity to at least a majority of the foodstuff after the package and the foodstuff is irradiated with at least a predetermined amount of microwave energy.
13. The method of claim 12 wherein the foodstuff is popcorn.
14. The method of claim 10 wherein the step of providing a plurality of apertures in the microwave shielding layer further comprises locating the plurality of apertures to at least a predetermined, limited region of the food package.
15. The method of claim 14 wherein the step of providing a plurality of apertures in the microwave shielding layer further comprises locating the plurality of apertures generally at least congruent to the foodstuff as it exists prior to heating.
16. The method of claim 10 wherein step a further comprises providing the plurality of apertures across substantially all of the food package
17. The method of claim 10 further comprises providing a susceptor in the food package, wherein the microwave shielding layer has apertures adjacent the susceptor.

18. The method of claim 10 wherein step a further comprises providing the food package with a water vapor barrier layer substantially impermeable to water vapor.

19. The method of claim 10 wherein step a further comprises providing the food package with a septic layer sufficient to maintain a sanitary environment for the interior of the food package.

20. A microwave popcorn package for popping popcorn in a microwave oven comprising:

- a. a bag having:
 - i. a microwave shielding layer with a plurality of apertures therein with the apertures sized to permit substantially only evanescent microwave energy to enter the interior of the bag, and
 - ii. a water vapor barrier layer generally impermeable to water vapor; and
- b. a mass of popcorn in the bag with the popcorn located adjacent the apertures in the microwave shielding layer prior to popping the popcorn;

wherein the bag is initially in a deflated condition, permitting evanescent penetration of the microwave energy sufficient to cause the popcorn to pop, and

wherein the bag is subsequently inflated by the water vapor resulting from the popcorn popping, creating a microwave shielded volume interior of the bag to prevent scorching of the popped popcorn in the shielded volume.

21. The apparatus of claim 20 wherein the bag further includes:

- iii. a susceptor located adjacent the mass of popcorn and exposed to microwave irradiation when the bag is placed in an operating microwave oven.
22. The apparatus of claim 21 wherein the bag further includes:
- iv. a septic layer to provide a sanitary environment interior of the bag.
23. A food package apparatus for controlling the entry of evanescent microwave energy to the interior of the package comprising:
- a. a microwave shielding layer extending over at least a portion of the food package with a plurality of apertures in a predetermined region thereof, with the apertures sized to control at least evanescent penetration of microwave energy into the interior of the package;
 - b. a foodstuff contained in the food package with the predetermined region of the microwave shielding layer initially located in close proximity to at least a portion of the foodstuff;
 - c. means for moving the predetermined region of the microwave shielding layer away from close proximity to the portion of the foodstuff after the package and the foodstuff is irradiated with at least a predetermined amount of microwave energy
- such that the evanescent penetration of the microwave energy through the predetermined region of the microwave shielding layer is insufficient to over heat the foodstuff after the microwave shielding layer is moved out of close proximity to the portion of the foodstuff.
24. The food package apparatus of claim 23 wherein water vapor is generated by the microwave energy and the means for moving at least the predetermined region of the microwave shielding layer away from close proximity to at least a portion of the foodstuff is a water vapor barrier layer

sufficiently impermeable to water vapor and operative to provide relative movement to increase the spacing between the foodstuff and at least a part of the predetermined region of the microwave shielding layer.

25. The food package apparatus of claim 24 wherein the foodstuff is popcorn.
26. The food package apparatus of claim 23 wherein the food package apparatus further comprises a microwave susceptor.
27. The food package apparatus of claim 23 further comprising a septic layer located adjacent the microwave shielding layer.
28. The food package apparatus of claim 23 wherein the predetermined region containing the plurality of apertures extends substantially across the entire food package.
29. The food package apparatus of claim 23 wherein the predetermined region containing the plurality of apertures includes isolated sub-regions on more than one surface of the food package.
30. The food package apparatus of claim 23 wherein the predetermined region is generally at least congruent to the foodstuff as it exists prior to heating.

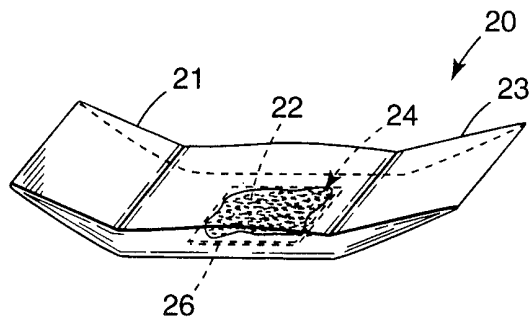


Fig. 1

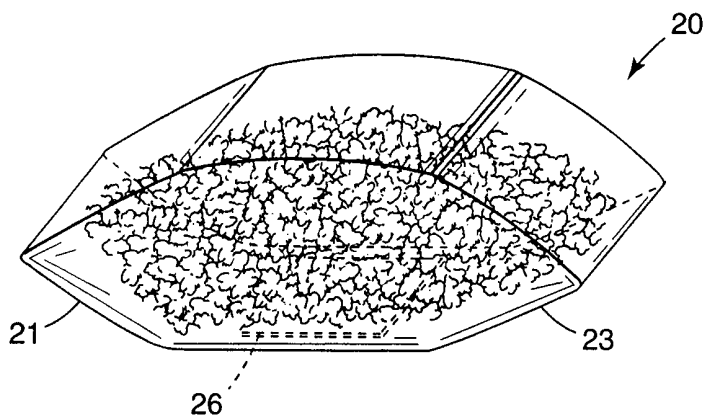
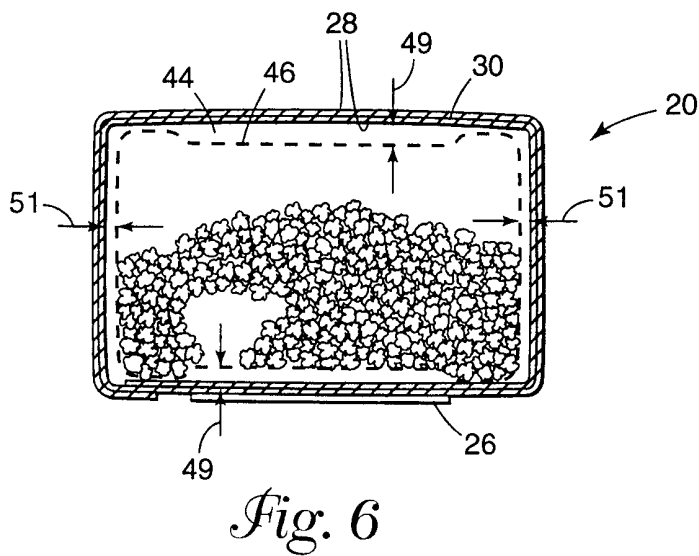
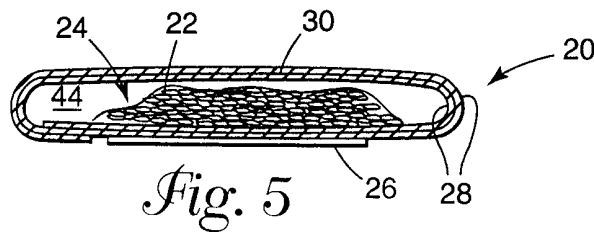
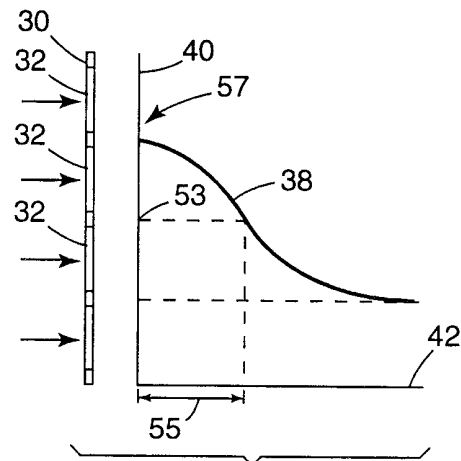
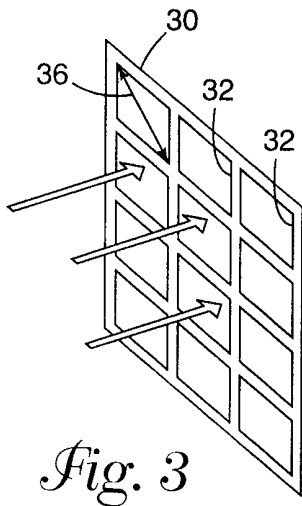


Fig. 2



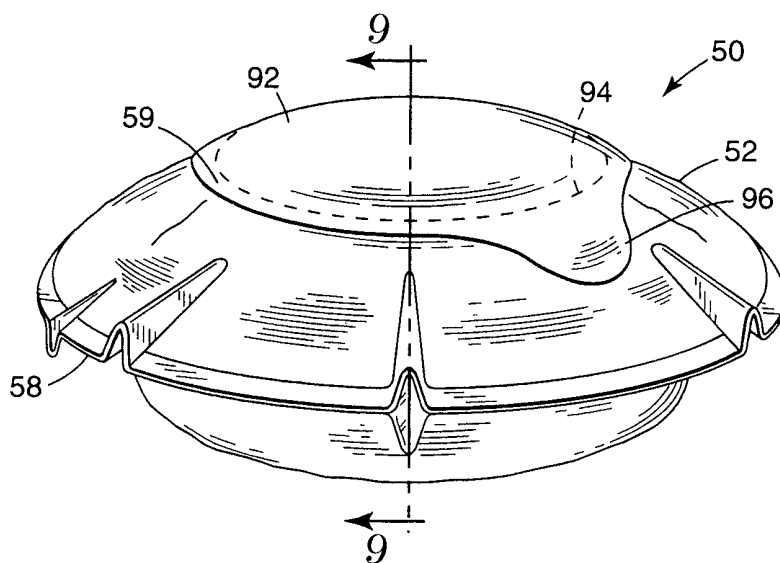


Fig. 7

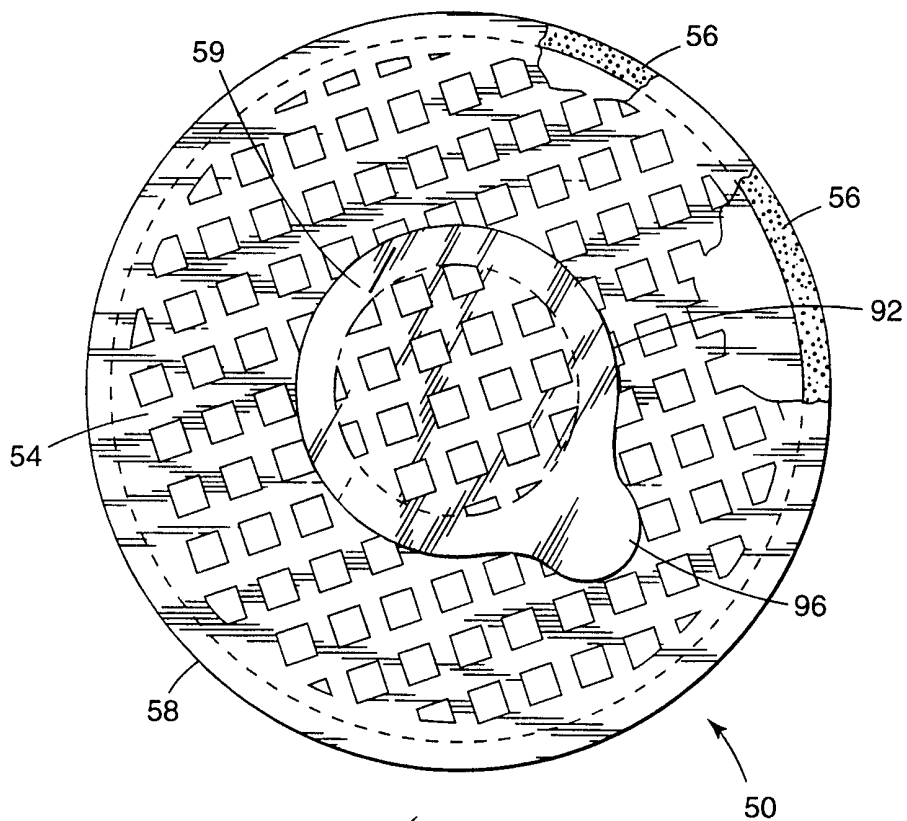


Fig. 8

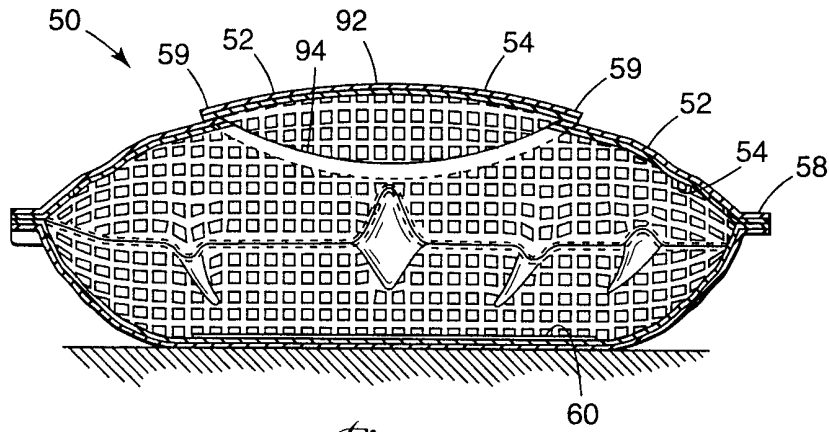


Fig. 9

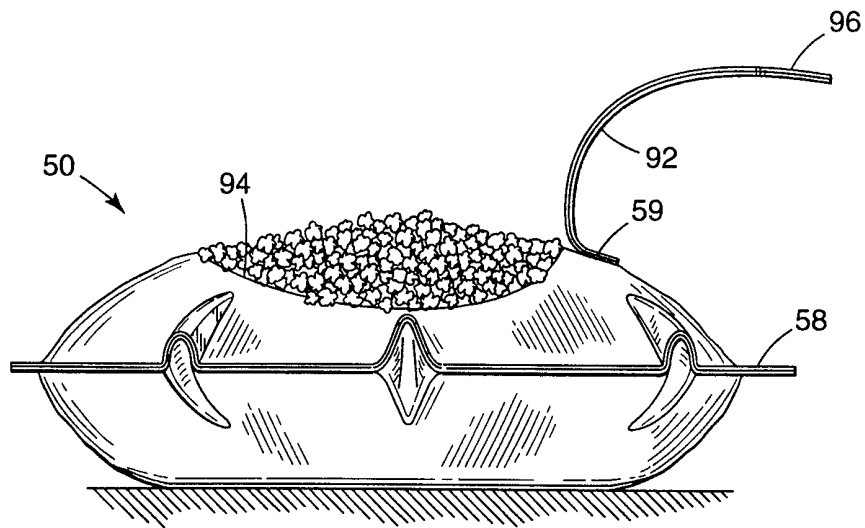


Fig. 10

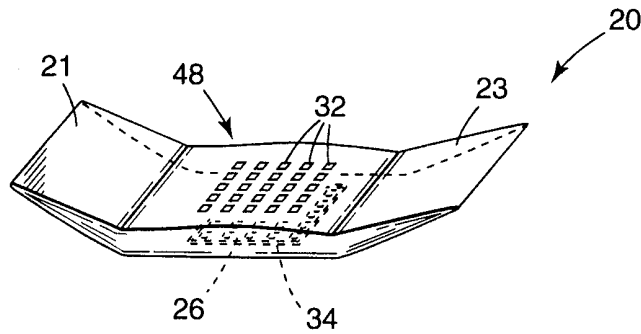


Fig. 11

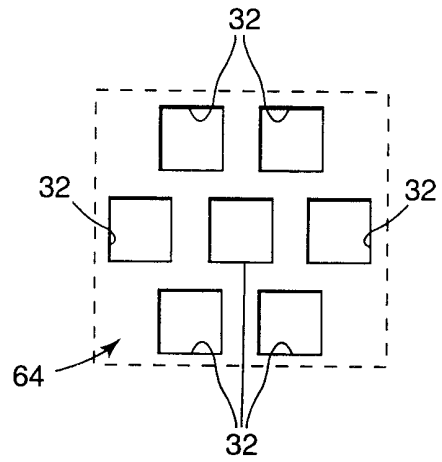


Fig. 14

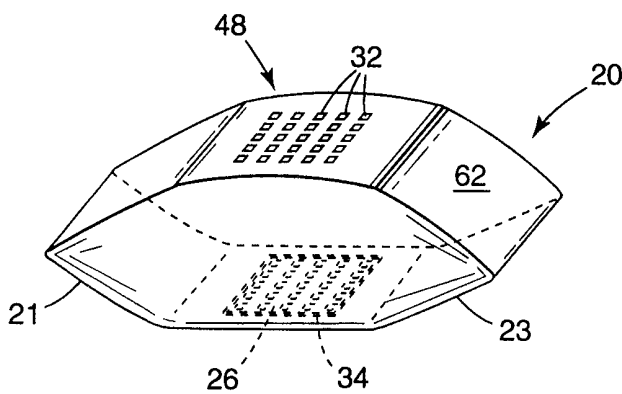


Fig. 12

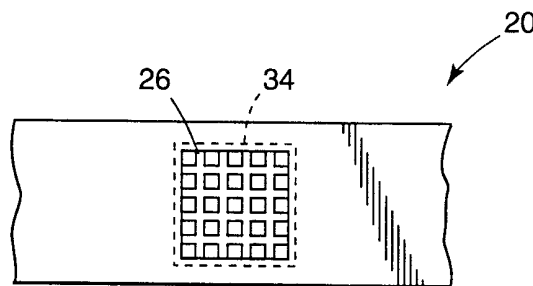


Fig. 13




Fig. 15

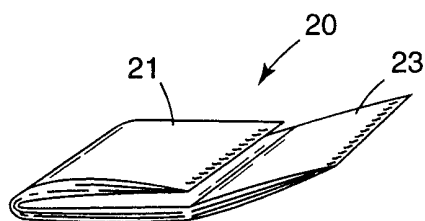


Fig. 16

INTERNATIONAL SEARCH REPORT

Internal I Application No
PCT/US 00/02020

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 B65D81/34				
According to International Patent Classification (IPC) or to both national classification and IPC				
B. FIELDS SEARCHED				
Minimum documentation searched (classification system followed by classification symbols) IPC 7 B65D				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
Y	US 4 973 810 A (BRAUNER ARNE H) 27 November 1990 (1990-11-27) the whole document ---	1-30		
Y	US 4 268 738 A (MAGUIRE JR EDWARD J ET AL) 19 May 1981 (1981-05-19) column 7, line 35 -column 10, line 32; figures 1-5 column 11, line 1 - line 28; figures 7-16 ---	1-30		
Y	US 5 221 419 A (BECKETT D GREGORY) 22 June 1993 (1993-06-22) the whole document ---	4,17		
A	US 5 413 757 A (KUTNER BARRY S ET AL) 9 May 1995 (1995-05-09) column 11, line 60 -column 12, line 36; figure 19 ---	1-30		
-/--				
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C.				
<input checked="" type="checkbox"/> Patent family members are listed in annex.				
° Special categories of cited documents :				
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; vertical-align: top; padding: 5px;"> "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed </td> <td style="width: 50%; vertical-align: top; padding: 5px;"> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family </td> </tr> </table>			"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family			
Date of the actual completion of the international search <div style="text-align: center; font-weight: bold;">16 June 2000</div>		Date of mailing of the international search report <div style="text-align: center; font-weight: bold;">30/06/2000</div>		
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer <div style="text-align: center; font-weight: bold;">Pernice, C</div>		

INTERNATIONAL SEARCH REPORT

Internat	Application No
PCT/US 00/02020	

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 473 142 A (MASS LAWRENCE) 5 December 1995 (1995-12-05) column 5, line 39 - line 60; figure 1A ---	1-30
A	EP 0 839 737 A (MAST ROY LEE) 6 May 1998 (1998-05-06) the whole document -----	1-30

INTERNATIONAL SEARCH REPORT

Information on patent family members

Internat | Application No

PCT/US 00/02020

Patent document cited in search report	A	Publication date	Patent family member(s)	Publication date
US 4973810	A	27-11-1990	NONE	
<hr/>				
US 4268738	A	19-05-1981	AU 3861378 A	07-02-1980
			BR 7805017 A	02-05-1979
			EP 0000797 A	21-02-1979
			ES 472317 A	16-10-1979
			ES 480290 A	16-12-1979
			JP 54128848 A	05-10-1979
<hr/>				
US 5221419	A	22-06-1993	US 5213902 A	25-05-1993
			CA 2041065 A	20-08-1992
<hr/>				
US 5413757	A	09-05-1995	US 5039495 A	13-08-1991
			US 5019344 A	28-05-1991
			US 5387404 A	07-02-1995
			US 5516495 A	14-05-1996
			US 5248478 A	28-09-1993
			US 5871702 A	16-02-1999
			AU 4753390 A	12-06-1990
			AU 5256293 A	19-05-1994
			CA 2003598 A	22-05-1990
			EP 0407516 A	16-01-1991
			JP 3503732 T	22-08-1991
			WO 9005545 A	31-05-1990
			US 5019359 A	28-05-1991
<hr/>				
US 5473142	A	05-12-1995	US 5294764 A	15-03-1994
<hr/>				
EP 0839737	A	06-05-1998	US 6054698 A	25-04-2000
<hr/>				