

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
3 August 2006 (03.08.2006)

PCT

(10) International Publication Number  
**WO 2006/081141 A1**

(51) International Patent Classification:  
**H01R 9/05** (2006.01)

(21) International Application Number:

PCT/US2006/002042

(22) International Filing Date: 20 January 2006 (20.01.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

11/043,844 25 January 2005 (25.01.2005) US

(71) Applicants (for all designated States except US): **CORNING GILBERT INC.** [US/US]; 5310 Camelback Road, Glendale, AZ 85301 (US). **BURRIS, Donald, A** [US/US]; 6826 West Sierra Street, Peoria, AZ 85345 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KISLING, Brian, L** [US/US]; 1702 West Cheryl Drive, Phoenix, AZ 85021 (US). **LUTZ, William, B** [US/US]; 5337 West Piute Avenue, Glendale, AZ 85308 (US). **MILLER, Thomas, D** [US/US]; 6822 West Rowel Road, Peoria, AZ 85383 (US). **BENCE, Bruce, D** [US/US]; 18227 North 75th Avenue, Glendale, AZ 85308 (US). **KOOIMAN, John, A** [US/US]; 3807 E. Contessa Street, Mesa, AZ 85205-6924 (US). **MCDADE, William, F** [US/US]; 5868 West Cielo Grande,

Glendale, AZ 85310 (US). **CHUAN, Lee Yung** [CN/CN]; 6f, No. 7, Lane 35, Zhiyou Street, Sanchong City, Taipei Country, 241 (TW).


(74) Agent: **HOMA, Joseph, M;** CORNING INCORPORATED, Patent Department, Sp-ti-3-1, Corning, NY 14831 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: ELECTRICAL CONNECTOR WITH GROUNDING MEMBER

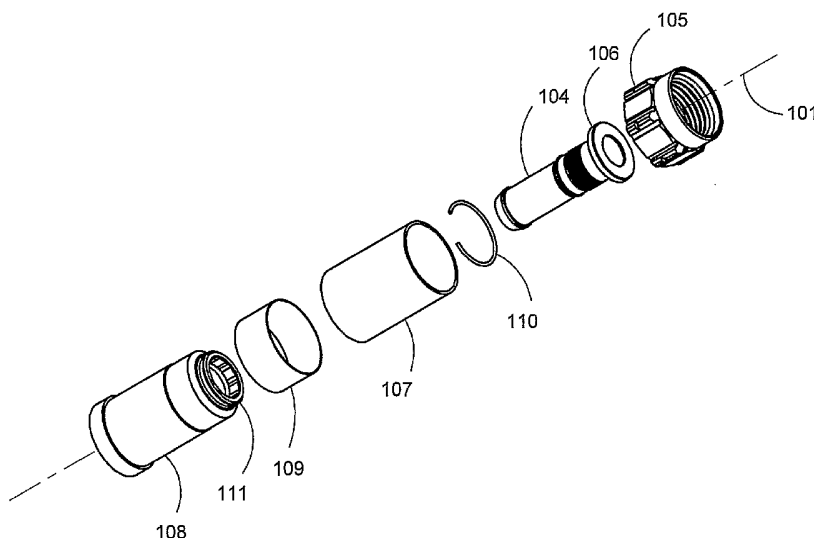

(57) Abstract: A coaxial cable connector (100) includes tubular post (104), a coupler (105) secured over an end (106) of the tubular post for securing the connector to an appliance, and an outer body (108) secured to the tubular post. An electrical grounding path is maintained between the coupler and the tubular post whether or not the coupler is tightly fastened to the appliance. The electrical grounding path is provided by a resilient, electrically conductive grounding member (110) disposed between the tubular post and the coupler. Alternatively, the connector includes conductive grease at a point where mating portions of the tubular post and coupler have closely matching dimensions .



**Published:**

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## **ELECTRICAL CONNECTOR WITH GROUNDING MEMBER**

### **CROSS-REFERENCE TO RELATED APPLICATIONS**

This application claims the benefit of priority under 35 U.S.C. § 119(e) of U.S. Application Serial No. 11/043,844 filed on January 25, 2005.

### **BACKGROUND OF THE INVENTION**

#### **1. Field of the Invention**

This invention relates generally to electrical connectors, and more particularly to coaxial cable connectors capable of being connected to a terminal.

#### **2. Description of the Related Art**

Coaxial cable connectors, such as type F connectors, are used to attach coaxial cable to another object or appliance, e.g., a television set or VCR having a terminal adapted to engage the connector. The terminal of the appliance includes an inner conductor and a surrounding outer conductor.

Coaxial cable includes a center conductor for transmitting a signal. The center conductor is surrounded by a dielectric material, and the dielectric material is surrounded by an outer conductor; this outer conductor may be in the form of a conductive foil and/or braided sheath. The outer conductor is typically maintained at ground potential to shield the signal transmitted by the center conductor from stray noise, and to maintain a continuous desired impedance over the signal path. The outer conductor is usually surrounded by a plastic cable jacket that electrically insulates, and mechanically protects, the outer conductor. Prior to installing a coaxial connector onto an end of the coaxial cable, the end of the coaxial cable is typically prepared by stripping off the end portion of the jacket to bare the end portion of the outer conductor. Similarly, it is common to strip off a portion of the dielectric to expose the end portion of the center conductor.

Coaxial cable connectors of the type known in the trade as "F connectors" often include a tubular post designed to slide over the dielectric material, and under the outer conductor of the coaxial cable, at the prepared end of the coaxial cable. If the outer conductor of the cable includes a braided sheath, then the exposed braided sheath is usually folded back over the cable jacket. The cable jacket and folded-back outer conductor extend generally around the outside of the tubular post and are typically received in an outer body of

the connector; this outer body of the connector is usually fixedly secured to the tubular post. A coupler is rotatably secured around the tubular post and includes an internally-threaded region for engaging external threads formed on the outer conductor of the appliance terminal.

When connecting the end of a coaxial cable to a terminal of a television set, equipment box, or other appliance, it is important to achieve a reliable electrical connection between the outer conductor of the coaxial cable and the outer conductor of the appliance terminal. This goal is usually achieved by ensuring that the coupler of the connector is fully tightened over the connection port of the appliance. When fully tightened, the head of the tubular post of the connector directly engages the edge of the outer conductor of the appliance port, thereby making a direct electrical ground connection between the outer conductor of the appliance port and the tubular post; in turn, the tubular post is engaged with the outer conductor of the coaxial cable.

However, in many cases, it is difficult for an installer to reach the connection ports of the appliance with a wrench, and in some instances, it is even difficult for the installer to reach such connection ports with his or her fingers. As a result, it can often happen that type F connectors are not fully tightened to the appliance port. In such a loose connection system, wherein the coupler of the coaxial connector is not drawn tightly to the appliance port connector, a gap exists between the outer conductor of the appliance port and the tubular post of the connector. Unless an alternate ground path exists, poor signal quality, and RFI leakage, will result.

As mentioned above, the coupler is rotatably secured about the head of the tubular post. The head of the tubular post usually includes an enlarged shoulder, and the coupler typically includes an inwardly-directed flange for extending over and around the shoulder of the tubular post. In order not to interfere with free rotation of the coupler, manufacturers of such F-style connectors routinely make the outer diameter of the shoulder (at the head of the tubular post) of smaller dimension than the inner diameter of the central bore of the coupler. Likewise, manufacturers routinely make the inner diameter of the inwardly-directed flange of the coupler of larger dimension than the outer diameter of the non-shoulder portion of the tubular post, again to avoid interference with rotation of the coupler relative to the tubular post. In a loose connection system, wherein the coupler of the coaxial connector is not drawn tightly to the appliance port connector, an alternate ground path may fortuitously result from contact between the coupler and the tubular post, particularly if the coupler is not centered over, and axially aligned with, the tubular post. However, this alternate ground path is not

stable, and can be disrupted as a result of vibrations, movement of the appliance, movement of the cable, or the like.

Alternatively, there are some cases in which such an alternate ground path is provided by fortuitous contact between the coupler and the outer body of the coaxial connector, provided that the outer body is formed from conductive material. This alternate ground path is similarly unstable, and may be interrupted by relative movement between the appliance and the cable, or by vibrations. Moreover, this alternate ground path does not exist at all if the outer body of the coaxial connector is constructed of non-conductive material. Such unstable ground paths can give rise to intermittent failures that are costly and time-consuming to diagnose.

## OBJECTS OF THE INVENTION

It is therefore an object of the present invention to provide a coaxial cable connector for connecting a coaxial cable to a connection port of an appliance, the coaxial cable connector being of the type that includes a tubular post and a coupler, such as a rotatable coupler, which ensures a reliable ground connection between the tubular post of the connector and an outer conductor of the appliance port, even if the coupler is not fully tightened onto the appliance port.

It is another object of the present invention to provide such a coaxial cable connector which maintains a reliable ground path between the coupler and the tubular post, at least following installation of such connector onto the end of a coaxial cable.

It is still another object of the present invention to provide such a coaxial connector that can be manufactured economically.

These and other objects of the present invention will become more apparent to those skilled in the art as the description thereof proceeds.

## SUMMARY OF THE INVENTION

Briefly described, the present invention relates to a coaxial cable connector comprising a tubular post, a coupler and a grounding means for providing an electrically conductive path between the post and the coupler. In accordance with a preferred embodiment thereof, the present invention relates to a coaxial cable connector for coupling a prepared end of a coaxial cable to a threaded female equipment port, and including a tubular post having a first end adapted to be inserted into the prepared end of the coaxial cable

between the dielectric material and the outer conductor thereof. A coupler is rotatably secured over the second end of the tubular post, and includes a central bore, at least a portion of which is threaded for engaging the female equipment port. An outer body is secured to the tubular post and extends about the first end of the tubular post for receiving the outer conductor, and preferably the cable jacket, of the coaxial cable.

In a preferred embodiment of the present invention, a resilient, electrically-conductive grounding member is disposed between the tubular post and the coupler. This grounding member engages both the tubular post and the coupler for providing an electrically-conductive path therebetween, but without restricting rotation of the coupler relative to the tubular post.

For some preferred embodiments, the grounding member is generally arcuately shaped to extend around the tubular post over an arc of at least  $225^\circ$ , and may extend for a full  $360^\circ$ . This arcuately shaped grounding member may be in the form of a generally circular broken ring, or C-shaped member, as by bending a strip of metal wire into an arc. Preferably, the grounding member has a shape that is out-of-round, and more preferably oblong, rather than circular, in order to ensure reliable electrical contact with both the coupler and the tubular post. In order to retain the grounding member inside the coupler, the inner bore of the coupler may include an annular recess proximate to the end of the coupler that encircles the tubular post; at least portions of the grounding member are engaged with the annular recess to prevent the grounding member from being axially displaced within the coupler.

As mentioned above, the tubular post may include an enlarged shoulder at the head thereof. In one preferred embodiment of the present invention, the grounding member surrounds the enlarged shoulder of the tubular post, at least when the coaxial cable connector is assembled onto the prepared end of a coaxial cable, whereby at least portions of the grounding member engage the outer surface of such enlarged shoulder.

In one embodiment of the present invention, the grounding member is generally circular and includes a plurality of projections extending outwardly therefrom for engaging the coupler. In another embodiment of the present invention, the grounding member is generally circular and includes a plurality of projections extending inwardly therefrom for engaging the tubular post.

In yet another embodiment of the present invention, the tubular post includes an enlarged shoulder extending inside the coupler, and including a first radial face that faces the opposite end of the tubular post. The coupler includes a flange directed inwardly toward the

tubular post; this inwardly directed flange including a second radial face that faces toward the connection port of the appliance to which the coaxial cable is to be connected. The grounding member is disposed between the first radial face and the second radial face. In this embodiment, the grounding member is resilient relative to the longitudinal axis of the connector, and is compressed between the first radial face and the second radial face to maintain sliding electrical contact between the shoulder of the tubular post (via its first radial face) and the flange of the coupler (via its second radial face).

The coaxial connector of the present invention may also include a sealing ring seated within the coupler for rotatably engaging the body member to form a seal therebetween.

In an alternate embodiment of the present invention, conductive grease is substituted for a discrete grounding member. In this embodiment, an outer dimension of a portion of the tubular post is caused to be commensurate with an inner dimension of an adjacent portion of the coupler. While the gap between such adjacent portions, coupled with the lubrication provided by the conductive grease, is sufficient to permit rotation of the coupler relative to the tubular post, the conductive grease nonetheless functions to maintain reliable electrical coupling across such gap.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be described with greater specificity and clarity with reference to the following drawings, in which:

FIG. 1 is a perspective view of an F connector in accordance with the preferred embodiment of the invention, including a body and a coupling nut;

FIG. 2 is an exploded view of the F connector of FIG. 1, including a preferred embodiment of a grounding member;

FIG. 2A is an enlarged plan view of the preferred embodiment of the grounding member of FIG. 2;

FIG. 3 is a cross-sectional view of the F connector of FIG. 1 through cut-line 3-3, and a side view of a prepared coaxial cable ready to be inserted into a back end of the F connector;

FIG. 3A is a cross-sectional view of the body of the F connector of FIG. 1 through cut-line 3-3;

FIG. 3B is a cross-sectional view of a tubular post of the F connector of FIG. 1, through cut-line 3-3;

FIG. 3C is a cross-sectional view of the coupling nut of the F connector of FIG. 1 through cut-line 3-3;

FIG. 4 is a cross-sectional view of the F connector of FIG. 1 through cut-line 3-3, and cross-sectional view of the prepared coaxial cable fully inserted into the back end thereof, prior to axial compression of the F connector;

FIG. 4A is an enlargement of a portion of FIG. 4;

FIG. 5 is a cross-sectional view of the F connector of FIG. 1 through cut-line 3-3, and a cross-sectional view of the prepared coaxial cable fully inserted into the back end thereof, subsequent to axial compression of the F connector;

FIG. 5A is an enlargement of a portion of FIG. 5;

FIG. 6 is a partial cross-sectional view of a first alternate embodiment of an F connector having a first alternate grounding member;

FIG. 6A is an enlargement of a portion of FIG. 6;

FIG. 6B is a slightly enlarged side view of the first alternate grounding member of FIG. 6;

FIG. 6C is a slightly enlarged plan view of the first alternate grounding member of FIG. 6;

FIG. 7 is a partial cross-sectional view of a second alternate embodiment of an F connector having a second alternate grounding member;

FIG. 7A is an enlargement of a portion of FIG. 7;

FIG. 7B is a slightly enlarged side view of the second alternate grounding member of FIG. 7;

FIG. 7C is a slightly enlarged plan view of the second alternate grounding member of FIG. 7;

FIG. 8 is a partial cross-sectional view of a third alternate embodiment of an F connector having a third alternate grounding member;

FIG. 8A is a slightly enlarged side view of the third alternate grounding member of FIG. 8;

FIGS. 8B-8E are slightly enlarged plan views of four styles of the third alternate grounding member of FIG. 8;

FIG. 9 is a partial cross-sectional view of a fourth alternate embodiment of an F connector having one of a fourth alternate grounding member and a fifth alternate grounding member;

FIG. 9A is a slightly enlarged side view of the fourth alternate grounding member of FIG. 9;

FIG. 9B is a slightly enlarged plan view of the fourth alternate grounding member of FIG. 9;

FIG. 9C is a slightly enlarged side view of the fifth alternate grounding member of FIG. 9;

FIG. 9D is a slightly enlarged plan view of the fifth alternate grounding member of FIG. 9;

FIG. 10 is a partial cross-sectional view of a fifth alternate embodiment of an F connector having conductive grease that acts as a grounding member;

FIG. 11 is a partial cross-sectional view of a front end of a sixth alternate embodiment of an F connector having a sixth alternate grounding member;

FIG. 11A is an enlargement of a portion of FIG. 11;

FIG. 11B is a side view of the sixth alternate grounding member of FIG. 11;

FIG. 11C is a plan view of the sixth alternate grounding member of FIG. 11; and

FIG. 11D is a perspective view of the sixth alternate grounding member of FIG. 11.

For simplicity and clarity of illustration, the drawing figures illustrate the general manner of construction, and descriptions and details of well-known features and techniques are omitted to avoid unnecessarily obscuring the invention. Furthermore, elements in the drawing figures are not necessarily drawn to scale.

## DESCRIPTION OF THE PREFERRED EMBODIMENT

FIG. 1 is a perspective view of an F connector **100** in accordance with the preferred embodiment of the invention. The F connector **100** (hereinafter, "connector") has a longitudinal axis **101**. The connector has a front end **102** and a back end **103**.

FIG. 2 is an exploded view of the connector **100**. The connector **100** includes tubular post **104**, a coupling nut **105** rotatably secured over an end **106** of the tubular post for securing the connector to an appliance (not shown), and a body **108** secured to the tubular post. A shell **107** and a label **109** are secured to the body **108**. Preferably, the body **108** is made entirely of acetal plastic. Alternatively, the body **108** is made of brass, plated with nickel. The shell **107** adds strength to the plastic body **108** and protects the plastic body from ultraviolet light. The tubular post **104** is preferably metallic, and more preferably, made of brass, with a tin plating; as tin is more conductive than nickel. The coupling nut **105** is

preferably metallic, and more preferably, formed from brass, plated with nickel or with another non-corrosive material.

In the embodiment shown in the drawings, the coupling nut **105** is rotatably secured over an end **106** of the tubular post **104** via a neck **111** of the body **108**. Advantageously, an electrical grounding path is constantly maintained between the coupling nut **105** and the tubular post **104**, including, in particular, when the coupling nut **105** of the connector **100** is not tightly fastened to the appliance. The electrical grounding path is provided by a resilient, electrically-conductive grounding member **110** disposed between the tubular post **104** and the coupling nut **105**.

FIG. 2A is an enlarged plan view of the preferred embodiment of the grounding member **110**. In the preferred embodiment of the present invention, the electrically-conductive grounding member **110** is disposed between the tubular post **104** and the coupling nut **105**. The grounding member **110** contacts both the tubular post **104** and the coupling nut **105** for providing an electrically-conductive path therebetween, but without restricting rotation of the coupling nut relative to the tubular post. A preferred embodiment of the grounding member **110** shown in FIG. 2A is a spring member, or circlip, disposed between the coupling nut **105** and the tubular post **104**, which establishes a stable ground path between the coupling nut and the post, and which is preferably constructed of a wire-type material. The grounding member **110** is retained in the coupling nut **105** by an annular recess **343** (see FIG. 3C) in the coupling nut. The spring action of the grounding member **110** serves to form a ground path from the coupling nut **105** to the tubular post **104** while allowing the coupling nut **105** to rotate. The grounding member **110** is resilient and is generally arcuately shaped. The grounding member **110** extends around the tubular post **104** over an arc of at least 225°, and may extend for a full 360°. The arcuately shaped grounding member **110** may be in the form of a generally circular broken ring, or C-shaped member, as by bending a strip of metal wire into an arc. Preferably, the grounding member **110** is a C-shaped metal clip that has an arcuate curvature that is non-circular. The grounding member **110** has a minimum diameter **201** and a maximum diameter **203**. Preferably, the grounding member **110** is made of stainless steel wire that has a wire diameter of between 0.010-inch and 0.020-inch; in a preferred embodiment, the wire diameter is about 0.016-inch. Stainless steel is a preferred metal for the grounding member **110** because it need not be plated for corrosion resistance.

FIG. 3 is a cross-sectional view of the connector **100** through cut-line 3-3 of FIG. 1, and a side view of a prepared coaxial cable **301** ready to be inserted into a back end **103** of

the connector. The center conductor **302** of the coaxial cable **301** is surrounded by a dielectric material **303**, and the dielectric material is surrounded by an outer conductor **304** that may be in the form of a conductive foil and/or braided sheath. The outer conductor **304** is usually surrounded by a plastic cable jacket **305** that electrically insulates, and mechanically protects, the outer conductor.

FIG. 3A is a cross-sectional view of the body **108** of FIG. 1 through cut-line 3-3. FIG. 3B is a cross-sectional view of the tubular post **104** of FIG. 1 through cut-line 3-3. FIG. 3C is a cross-sectional view of the coupling nut **105** of FIG. 1 through cut-line 3-3. Referring now to FIGS. 3, 3A, 3B and 3C, the body **108** has a lip **310** at a front end of the body. The lip **310** has an outer diameter **311** and an inner diameter **312**. The coupling nut **105** is rotatably secured about a head **330** at the front end of the tubular post **104**. The head **330** of the tubular post **104** usually includes an enlarged shoulder **332**. The coupling nut **105** typically includes an inwardly-directed flange **340** that extends over and around the shoulder **332** of the tubular post **104**. In order to retain the grounding member **110** inside the coupling nut **105**, the inner, or central, bore **342** of the coupling nut **105** may include an annular recess **343** that is proximate to the end of the coupling nut that encircles the tubular post **104**. At least portions of the grounding member **110** are engaged with the annular recess **343** to prevent the grounding member from being axially displaced within the coupling nut **105**. The tubular post **104** may include an enlarged shoulder **332** at the head **330** thereof. The shoulder **332** has a first radial face **333** that faces the back end of the tubular post **104**. In one preferred embodiment of the present invention, the grounding member **110** surrounds the enlarged shoulder **332** of the tubular post **104**, at least when the connector **100** is assembled onto the prepared end of a coaxial cable **301**. At least portions of the grounding member **110** contact the outer surface **334** of such enlarged shoulder **332**.

The coupling nut **105** has an inwardly-directed flange near the back end of the coupling nut. The coupling nut **105** has an inner diameter **341** at a back end of the coupling nut. In order to retain the back end of the coupling nut **105** on the front end of the body **108**, the inner diameter **341** of the coupling nut has a dimension less than the outer diameter of the lip **310** of the body **108**. In order not to interfere with free rotation of the coupling nut **105**, the outer diameter **336** of the shoulder **332** (at the head **330** of the tubular post **104**) is of smaller dimension than the inner diameter **344** of the central bore of the coupling nut **105**. Likewise, the inner diameter **341** of the inwardly-directed flange **340** of the coupling nut **105** is of larger dimension than the outer diameter **337** of the non-shoulder portion **338** of the

tubular post **104**, again to avoid interference with rotation of the coupling nut **105** relative to the tubular post.

FIG. 4 is a cross-sectional view of the connector **100** through cut-line 3-3, and cross-sectional view of the prepared coaxial cable **301** fully inserted into the back end **103** thereof, prior to axial compression of the connector. FIG. 4A is an enlargement of a portion of FIG. 4. Referring now to FIGS. 4 and 4A, the resilient, electrically-conductive grounding member **110** is shown disposed between the tubular post **104** and the coupling nut **105**. The grounding member **110** is disposed in the annular recess **343** that encircles the tubular post **104**.

FIG. 5 is a cross-sectional view of the connector **100** through cut-line 3-3, and a cross-sectional view of the prepared coaxial cable **301** fully inserted into the back end **103** thereof, subsequent to axial compression of the connector. FIG. 5A is an enlargement of a portion of FIG. 5. Referring now to FIGS. 5 and 5A, as a result of axial compression by a standard compression tool (not shown), the tubular post **104** slides (to the right in the drawings) relative to the other components of the connector **100** and relative to the cable **301**, such that the shoulder **332** of the tubular post is radially inward of the grounding member **110**. At least a portion of the grounding member **110** engages the coupling nut **105** at the annular recess **343** of the coupling nut, and at least another portion of the grounding member engages tubular post **104** at the shoulder **332** of the tubular post. The tubular post **104** is in electrical contact with the outer conductor **304** of the cable **301** along the back portion of the tubular post, and the coupling nut **105** may engage the outer conductor of an appliance port (not shown). Therefore, when the connector **100** is fastened to an appliance port, there is maintained an electrical grounding path between the outer conductor **304** of the cable **301** and the outer conductor of the appliance port, whether or not the coupling nut **105** of the connector is tightly fastened to the appliance port.

FIG. 6 is a partial cross-sectional view of a first alternate embodiment of a connector **600** having a first alternate grounding member **601** (see FIGS. 6A-6C), shown subsequent to axial compression. FIG. 6A is an enlargement of a portion of the first alternate embodiment of the connector **600** showing a portion of the first alternate grounding member **601**. FIG. 6B is a slightly enlarged side view of the first alternate grounding member **601**. FIG. 6C is a slightly enlarged plan view of the first alternate grounding member **601**. Referring now to FIGS. 6, 6A, 6B and 6C, the first alternate grounding member **601** is a spring finger grounding member retained between the coupling nut **105** and the tubular post **104**. The first

alternate grounding member **601** is constructed of a thin cross section of material such as beryllium copper. The first alternate grounding member **601** comprises a ring portion **602** and a plurality of fingers **603** that project at approximately a 30° angle from the plane of the ring. The spring action of the fingers **603** extend to, and make contact with, a radial surface **604** near the back end of the coupling nut **105** that faces the front end of the coupling nut, which serve to connect a ground path from the coupling nut to the tubular post while allowing the coupling nut to rotate. The first alternate grounding member **601** has optional internal lugs **605** that contact the outer diameter **337** of the non-shoulder portion of the tubular post.

FIG. 7 is a partial cross-sectional view of a second alternate embodiment of a connector **700** having a second alternate grounding member **701** (see FIGS. 7A-7C). FIG. 7A is an enlargement of a portion of the second alternate embodiment of the connector **700**, showing a portion of the second alternate grounding member **701**. FIG. 7B is a slightly enlarged side view of the second alternate grounding member **701**. FIG. 7C is a slightly enlarged plan view of the second alternate grounding member **701**. Referring now to FIGS. 7, 7A, 7B and 7C, the second alternate grounding member **701** is a radial grounding member retained between the coupling nut **105** and the tubular post **104**. The second alternate grounding member **701** is constructed of a thin cross section of metallic material such as beryllium copper. The second alternate grounding member **701** comprises a ring portion **702** and a plurality of fingers **703** extending radially from the ring portion at about a 45° angle from the plane of the ring portion. The spring action of the fingers **703** extend to inner-diameter surfaces **705** of the coupling nut **105** and serve to connect a ground path from the coupling nut to the tubular post **104** while allowing the coupling nut to rotate.

FIG. 8 is a partial cross-sectional view of a third alternate embodiment of a connector **800** having a third alternate grounding member **801** (see FIGS. 8A-8E). FIG. 8A is a slightly enlarged side view of the third alternate grounding member **801**. FIGS. 8B-8E are slightly enlarged plan views of four styles of the third alternate grounding member **801**. Referring now to FIG. 8 and FIGS. 8A-8E, the third alternate grounding member **801** is a conductive member retained between the coupling nut **105** and the tubular post **104**. The third alternate grounding member **801** is constructed of a thin cross section of metallic material such as brass or beryllium copper. The third alternate grounding member **801** comprises a ring **802** with multiple points of contact, or internal lugs, **803** around the inner perimeter of the ring and with multiple external lugs **804** around the outer perimeter of the ring. The lugs **803** and **804** serve to connect a ground path from the coupling nut **105** to the tubular post **104** while

allowing the coupling nut to rotate. FIGS. 8B-8E show four styles with regard to the shape of the lugs **803** and **804** and the position of the lugs on the ring **802**. FIG. 8 also exhibits an alternate embodiment comprising a sealing ring **805** for forming a moisture seal between the coupling nut **105** and the body **108** of the connector **801**. The sealing ring **805** is disposed between the back end of the coupling nut **105** and the body **108** for forming a seal therebetween. Preferably, the sealing ring **805** is made from ethylene propylene. Use of the sealing ring **805** is not limited to use in connectors having the third alternate grounding member **801**. The third alternate grounding member **801** may also be used in connectors without the sealing ring **805**.

FIG. 9 is a partial cross-sectional view of a fourth alternate embodiment of a connector **900** having one of a fourth alternate grounding member **901** and a fifth alternate grounding member **911** (see FIGS. 9A-9D). FIG. 9A is a slightly enlarged side view of the fourth alternate grounding member **901**. FIG. 9B is a slightly enlarged plan view of the fourth alternate grounding member **901**. FIG. 9C is a slightly enlarged side view of the fifth alternate grounding member **902**. FIG. 9D is a slightly enlarged plan view of the fifth alternate grounding member **911**. The fourth and fifth alternate embodiments of the grounding member **901** and **911**, respectively, comprise a C-shaped ring between the coupling nut **105** and the tubular post **104**. The C-shaped ring is constructed of a thin cross section of metallic material such as beryllium copper or stainless steel. It is retained by a groove in the coupling nut. The spring action of the C-shaped ring serves to connect a ground path from the coupling nut **105** to the tubular post **104** while allowing the coupling nut to rotate. The fourth alternate grounding member **901** includes a circumferential metallic band **902**, which has a general circular shape and approximates a section of a hollow cylinder, that extends between first **903** and second **904** opposing ends. The band **902** has first **906** and second **907** opposing side edges extending along its length. The fourth alternate grounding member **901** includes a first generally radial wall **908** extending from the first side edge **906** of the band in a first radial direction, and a second generally radial wall **909** extending from the second side edge **907** of the band generally in said first radial direction. The band **902** contacts a first one of the group of members that includes the coupling nut **105** and the tubular post **104**. The first **908** and second **909** radial walls contact the second of the group of members that includes the coupling nut **105** and the tubular post **104**. The fifth alternate grounding member **911** includes a metallic band **912** extending along its length between first **913** and second **914** opposing ends, and extending along its width between first

**916** and second **917** side edges. The band **912** is formed along its length into a generally circular shape. The band **912** is formed along its width into a generally concave shape with the side edges **916** and **917** projecting generally in a first radial direction. The fifth alternate grounding member **911** includes a plurality of projections **918** extending from the band **912** in a second radial direction opposite to the first radial direction. The first **916** and second **917** side edges of the band **912** contact a first one of the group of members that includes the coupling nut and the tubular post. The plurality of projections **918** contact the second of the group of members that includes the coupling nut **105** and the tubular post **104**.

FIG. 10 is a partial cross-sectional view of a fifth alternate embodiment of a connector **1000** having conductive grease (not shown) that acts as a grounding member. The ground path is established by means of a close fit between the coupling nut **105** and the tubular post **104**. The conductive grease is disposed at a grease annular ring **1001** where mating portions of the tubular post **104** and coupling nut **105** have closely matching dimensions. Preferably, the conductive grease is a silver-loaded silicon lubricating material. The conductive grease serves to connect a ground path from the coupling nut **105** to the tubular post **104** while allowing the coupling nut to rotate.

FIG. 11 is a partial cross-sectional view of a front end of a sixth alternate embodiment of an F connector **1100** that includes a body **1108**, and which has a sixth alternate grounding member **1101**. FIG. 11A is an enlargement of a portion of FIG. 11. FIG. 11B is a side view of the sixth alternate grounding member **1101**. FIG. 11C is a plan view of the sixth alternate grounding member **1101**. FIG. 11D is a perspective view of the sixth alternate grounding member **1101**. Referring now to FIG. 11 and FIGS. 11A-11D, the sixth alternate grounding member **1101** includes a circumferential metallic band **1112** extending between first **1113** and second **1114** opposing ends. The band **1112** has a generally circular shape that approximates a section of a hollow cylinder. The first **1113** and second **1114** ends of the band **1112** are disposed generally proximate to each other and are directed generally toward one another. The band **1112** has first and second opposing side edges **1115** and **1116**, respectively, extending along its length. The band generally defines a section of a cylindrical surface. The sixth alternate grounding member **1101** includes a plurality of projections **1101** extending from at least one of the first and second side edges **1115** and **1116** of the band **1112**. The plurality of projections **1117** extend away from the cylindrical surface defined by the band **1112**. The band **1112** contacts a first one of the group of members that includes the coupling nut **1105** and the tubular post **1104**. The plurality of projections **1117** contact the

second of the group of members that includes the coupling nut **1105** and the tubular post **1104**.

In preferred embodiments, the present invention provides a coaxial cable connector that ensures a reliable grounding path without creating undue interference with free rotation of the coupler relative to the remaining components of the connector; however, the present invention can also provide a reliable grounding path between a post and a coupler that does not rotate. Advantageously, a connector in accordance with the invention works with standard installation tools and with standard compression tools. The present invention can be used with both axially-compressible connectors as well as with older-style crimp-ring connectors. In some embodiments, the present invention is compatible with the use of a sealing ring for forming a moisture seal between the coupler and the outer body of the connector.

While the present invention has been described with respect to preferred embodiments thereof, such description is for illustrative purposes only, and is not to be construed as limiting the scope of the invention. Various modifications and changes may be made to the described embodiments by those skilled in the art without departing from the true spirit and scope of the invention as defined by the appended claims. For example, the grounding member can have a shape other than generally circular, such as square, hexagonal, octagonal, oval, etc.

**LIST OF REFERENCE NUMERALS**

100	F connector ("connector")
101	Longitudinal axis
102	Front end
103	Back end
104	Tubular post
105	Coupling nut
106	End of tubular post
107	Shell
108	Body
109	Label
110	Grounding member
111	Neck
201	Minimum diameter
203	Maximum diameter
301	Coaxial cable
302	Center conductor
303	Dielectric material
304	Outer conductor
305	Jacket
310	Lip of body
311	Outer diameter of lip body
312	Inner diameter of lip of body
330	Head of tubular post
332	Shoulder of tubular post
333	First radial face of shoulder of tubular post
334	Outer surface of shoulder
336	Outer diameter of shoulder
337	Outer diameter of non-shoulder portion of post
338	Non-shoulder portion of post
340	Inwardly-directed flange of coupling nut
341	Inner diameter of inwardly-directed flange
342	Bore of coupling nut
343	Annular recess of coupling nut
344	Inner diameter of bore of coupling nut
600	First alternate connector
601	First alternate grounding member
602	Ring portion of first alternate grounding member
603	Fingers of first alternate grounding member
604	Radial surface of coupling nut
605	Internal lugs of first alternate grounding member
700	Second alternate connector
701	Second alternate grounding member
702	Ring portion of second alternate grounding member
703	Fingers of second alternate grounding member
800	Third alternate connector
801	Third alternate grounding member

802	Ring portion of third alternate grounding member
803	Internal lugs of third alternate grounding member
804	External lugs of third alternate grounding member
805	Sealing ring
900	Fourth alternate connector
901	Fourth alternate grounding member
902	Band of fourth alternate grounding member
903	First end of band
904	Second end of band
906	First side edge of band
907	Second side edge of band
908	First radial wall of band
909	Second radial wall of band
911	Fifth alternate grounding member
1000	Fifth alternate connector
1001	Grease annular ring
1100	Sixth alternate connector
1101	Sixth alternate grounding member
1104	Tubular post of sixth alternate connector
1105	Coupling nut of sixth alternate connector
1108	Body of sixth alternate connector
1112	Band of sixth alternate grounding member
1113	First end of band
1114	Second end of band
1115	First side edge of band
1116	Second side edge of band
1117	Projections on band

## CLAIMS

We claim:

1. A coaxial cable connector for coupling a coaxial cable to an equipment port, the coaxial cable including a center conductor surrounded by a dielectric material, the dielectric material being surrounded by an outer conductor, the coaxial cable connector comprising:
  - a. a tubular post having a first end adapted to be inserted into the prepared end of the coaxial cable between the dielectric material and the outer conductor, and having a second end opposite the first end thereof;
  - b. a coupler having a first end rotatably secured over the second end of the tubular post, and having an opposing second end, the coupler including a central bore extending therethrough, a portion of the central bore proximate the second end of the coupler being adapted for engaging the equipment port;
  - c. a body member secured to the tubular post and extending about the first end of the tubular post for receiving the outer conductor of the coaxial cable; and
  - d. a resilient, electrically-conductive grounding member disposed between the tubular post and the coupler, the grounding member contacting both the tubular post and the coupler for providing an electrically-conductive path therebetween.
2. The coaxial cable connector recited by claim 1 wherein said grounding member is arcuately shaped to extend around the tubular post over at least 225°.
3. The coaxial cable connector recited by claim 2 wherein said grounding member is configured to form a broken ring.
4. The coaxial cable connector recited by claim 2 wherein said grounding member is formed from metal wire.
5. The coaxial cable connector recited by claim 2 wherein the central bore of the coupler includes an annular recess proximate to the first end of the coupler, and wherein at least portions of said grounding member are disposed within the annular recess.

6. The coaxial cable connector recited by claim 5 wherein the tubular post includes an enlarged shoulder at the second end thereof extending inside the coupler, and wherein the annular recess and said grounding member surround the enlarged shoulder of the tubular post when the coaxial cable connector is assembled onto the prepared end of the coaxial cable.
7. The coaxial cable connector recited by claim 1 wherein said grounding member is generally circular.
8. The coaxial cable connector recited by claim 7 wherein said grounding member has a plurality of projections extending radially outwardly therefrom for engaging the coupler.
9. The coaxial cable connector recited by claim 7 wherein said grounding member has a plurality of projections extending radially inwardly therefrom for engaging the tubular post.
10. The coaxial cable connector recited by claim 1 wherein the tubular post includes an enlarged shoulder at the second end thereof extending inside the coupler, the enlarged shoulder including a first radial face that faces the first end of the tubular post, the coupler including a radially inwardly directed flange proximate the first end thereof directed inwardly toward the tubular post, the inwardly directed flange including a second radial face that faces the second end of the coupler, said grounding member being disposed between the first radial face and the second radial face for electrically coupling the tubular post to the coupler.
11. The coaxial cable connector recited by claim 10 wherein the grounding member includes a central, generally circular body member disposed generally within a plane, the grounding member including a plurality of resilient spring fingers extending out of said plane and being compressed between the first radial face of the tubular post and the second radial face of the coupler.
12. The coaxial cable connector recited by claim 11 wherein said plurality of spring fingers includes at least a first spring finger and a second spring finger, and wherein said first and second spring fingers extend out of said plane in opposing directions.

13. The coaxial cable connector recited by claim 1 wherein the grounding member includes:

a. a circumferential metallic band extending between first and second opposing ends, the band having a generally circular shape, and approximating a section of a hollow cylinder, the first and second ends of the band being disposed generally proximate to each other and being directed generally toward one another, the band having first and second opposing side edges extending along its length;

b. a first generally radial wall extending from the first side edge of the band in a first radial direction; and

c. a second generally radial wall extending from the second side edge of the band generally in said first radial direction;

wherein the band contacts a first one of the group of members that consists of the coupler and the tubular post, and wherein the first and second radial walls contact the second of the group of members that consists of the coupler and the tubular post.

14. The coaxial cable connector recited by claim 13 wherein the band has a plurality of apertures formed therein.

15. The coaxial cable connector recited by claim 13 wherein the band has dimples formed therein, the dimples extending away from the band in a second radial direction opposite to said first radial direction.

16. The coaxial cable connector recited by claim 1 wherein the grounding member includes:

a. a metallic band extending along its length between first and second opposing ends, and extending along its width between first and second side edges, the band being formed along its length into a generally circular shape, the band being formed along its width into a generally concave shape with the side edges projecting generally in a first radial direction, the first and second ends of the band being disposed generally proximate to each other and being directed generally toward one another; and

b. a plurality of projections extending from the band in a second radial direction opposite to the first radial direction;

wherein the first and second side edges of the band contact a first one of the group of members that includes the coupler and the tubular post, and wherein the plurality of projections contact the second of the group of members that includes the coupler and the tubular post.

17. The coaxial cable connector recited by claim 16 wherein the band has a plurality of apertures formed therein to create the plurality of projections.

18. The coaxial cable connector recited by claim 16 wherein the plurality of projections is dimples.

19. The coaxial cable connector recited by claim 1 wherein the grounding member includes:

a. a circumferential metallic band extending between first and second opposing ends, the band having a generally circular shape, and approximating a section of a hollow cylinder, the first and second ends of the band being disposed generally proximate to each other and being directed generally toward one another, the band having first and second opposing side edges extending along its length, the band generally defining a section of a cylindrical surface; and

b. a plurality of projections extending from at least one of the first and second side edges of the band, the plurality of projections extending away from the cylindrical surface defined by the band;

wherein the band contacts a first one of the group of members that includes the coupler and the tubular post, and wherein the plurality of projections contact the second of the group of members that includes the coupler and the tubular post.

20. The coaxial cable connector recited by claim 19 wherein the plurality of projections are formed by cutting slots into the band from one of the first and second side edges of the band, and by displacing portions of the band lying between adjacent slots.

21. The coaxial cable connector recited by claim 2 further including a sealing ring disposed between the first end of the coupler and the body member for forming a seal therebetween.

22. The coaxial cable connector recited by claim 2 wherein said grounding member is a C-shaped metal clip.

23. The coaxial cable connector recited by claim 22 wherein said C-shaped metal clip has an arcuate curvature that is non-circular to maximize contact with both the coupler and the tubular post.

24. The coaxial cable connector recited by claim 22 wherein said C-shaped metal clip is made of wire.


25. A coaxial cable connector for coupling a coaxial cable to an equipment port, the coaxial cable including a center conductor surrounded by a dielectric material, the dielectric material being surrounded by an outer conductor, the coaxial cable connector comprising:

- a. a tubular post having a first end adapted to be inserted into the prepared end of the coaxial cable between the dielectric material and the outer conductor, and having a second end opposite the first end thereof, the tubular post including a grounding path portion having an outer surface of a predetermined outer diameter;

- b. a coupler having a first end rotatably secured over the second end of the tubular post, and having an opposing second end, the coupler including a central bore extending therethrough, a portion of the central bore proximate the second end of the coupler being adapted for engaging the equipment port, the coupler including a grounding path portion having an inner surface of a predetermined inner diameter, the grounding path portion of the coupler being disposed adjacent to the grounding path portion of the tubular post when the coaxial cable connector is installed onto the coaxial cable, and wherein the predetermined inner diameter closely approximates the predetermined outer diameter while permitting rotation of the coupler relative to the tubular post;

- c. a body member secured to the tubular post and extending about the first end of the tubular post for receiving the outer conductor of the coaxial cable; and

- d. conductive grease disposed proximate to the respective grounding path portions of the tubular post and coupler for electrically coupling such grounding path portions.

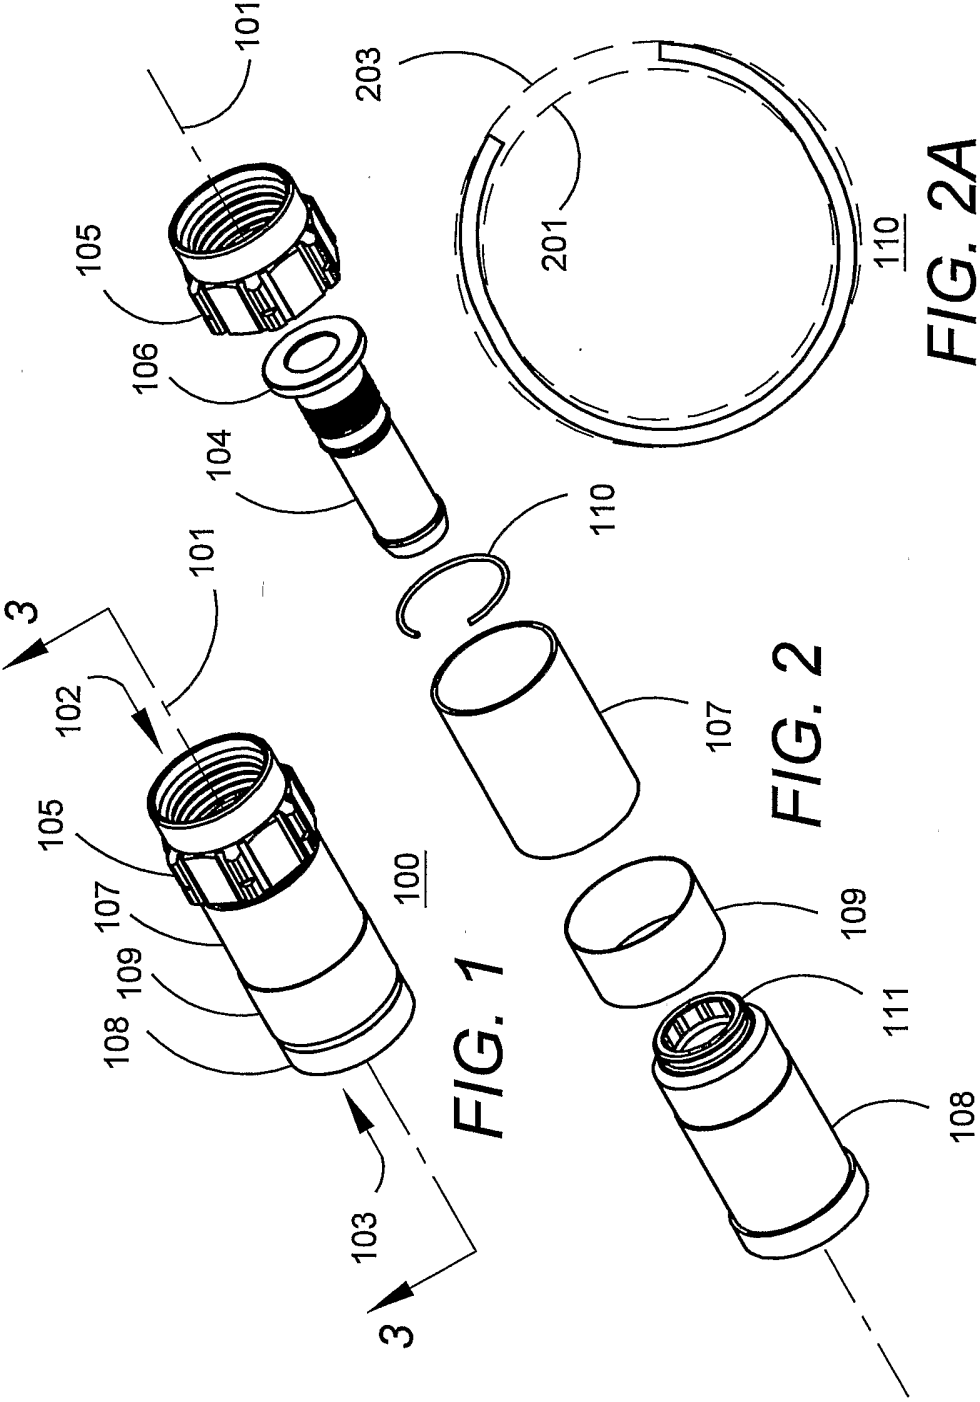

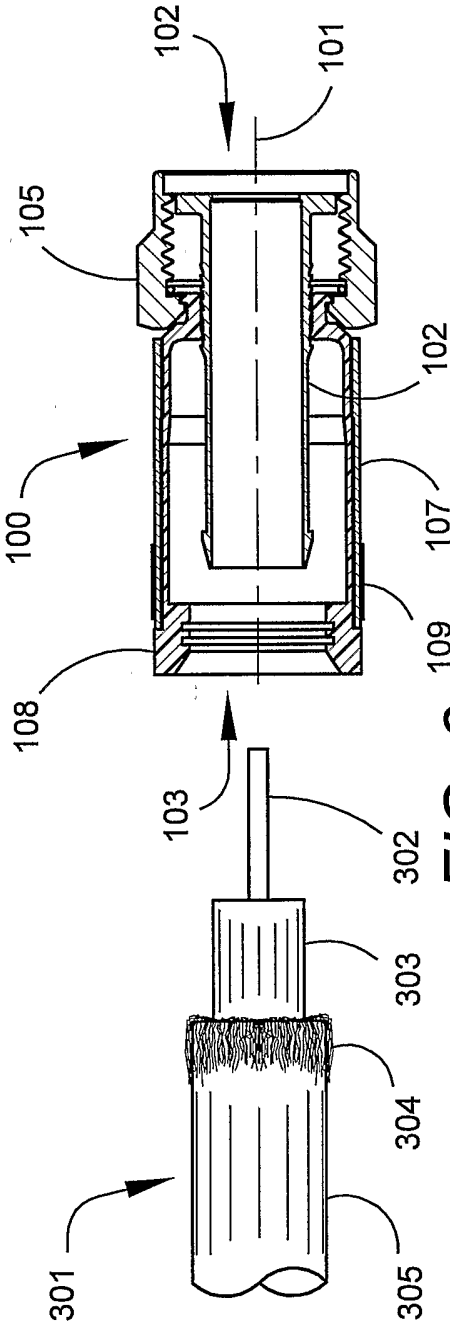


FIG. 3

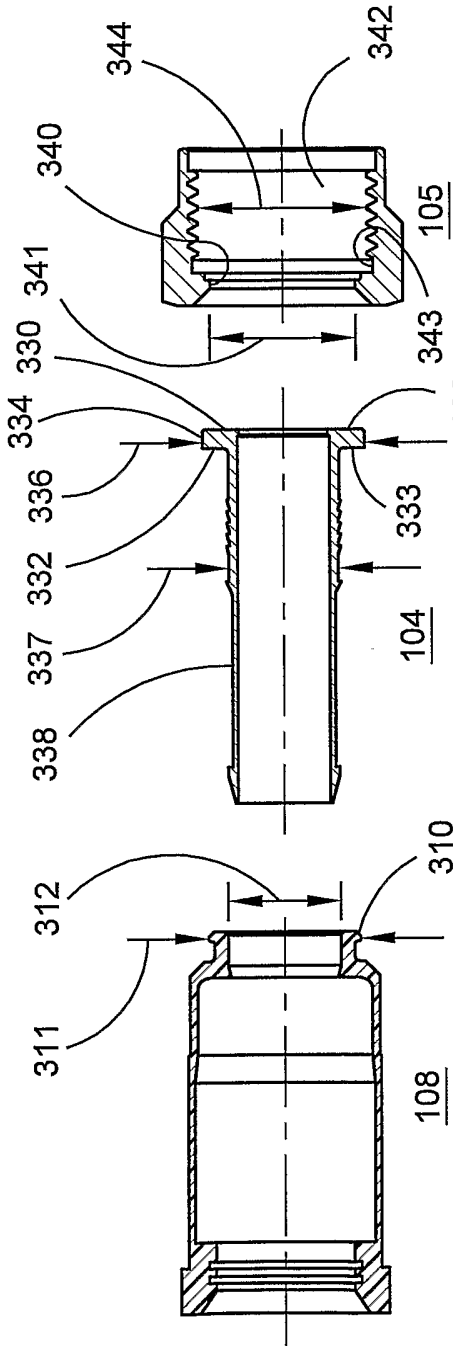


FIG. 3A

FIG. 3B

FIG. 3C

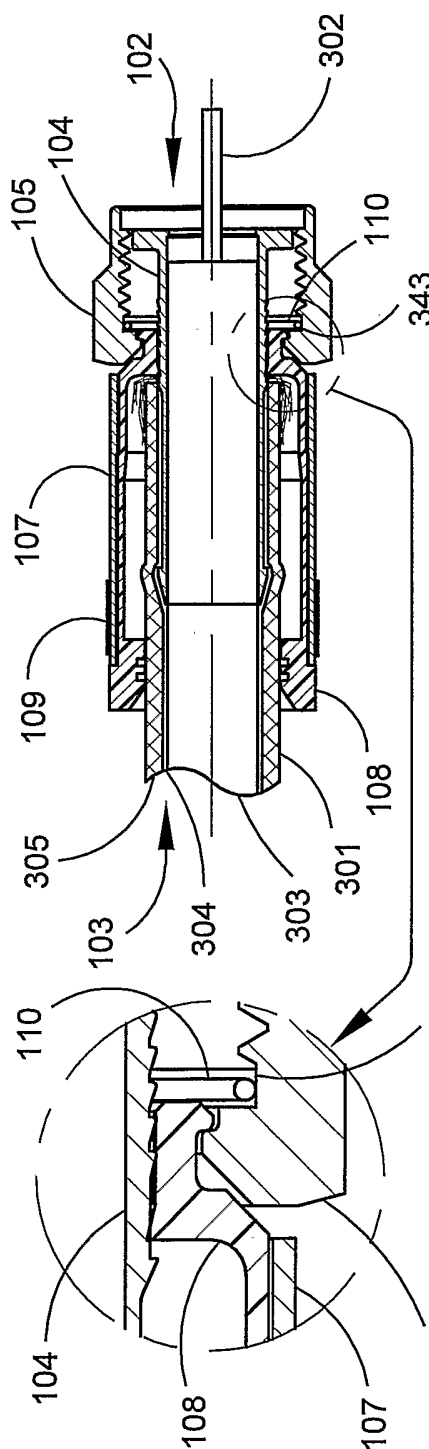


FIG. 4

FIG. 4A



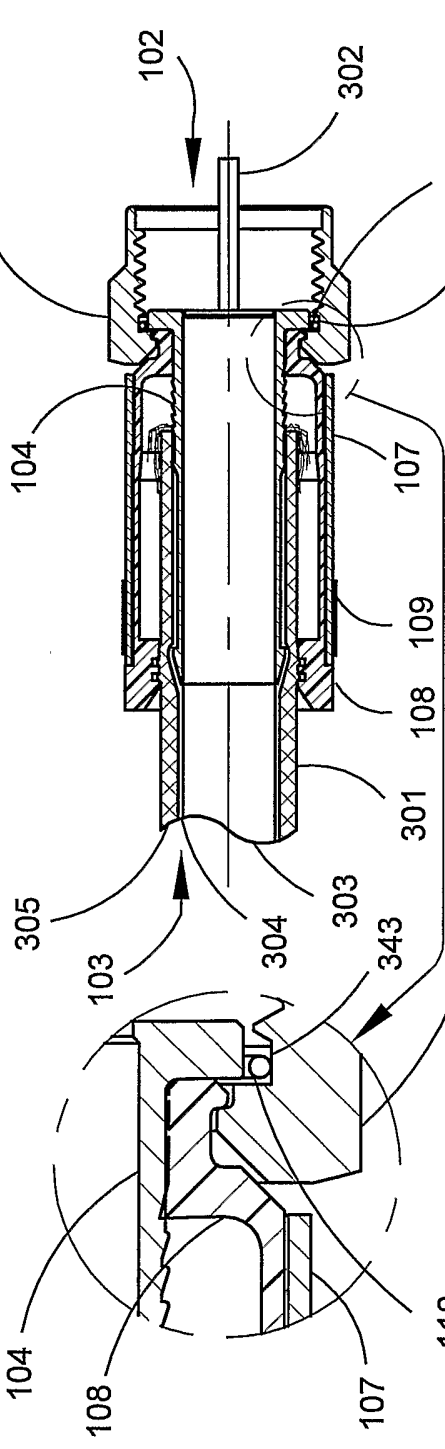


FIG. 5

FIG. 5A

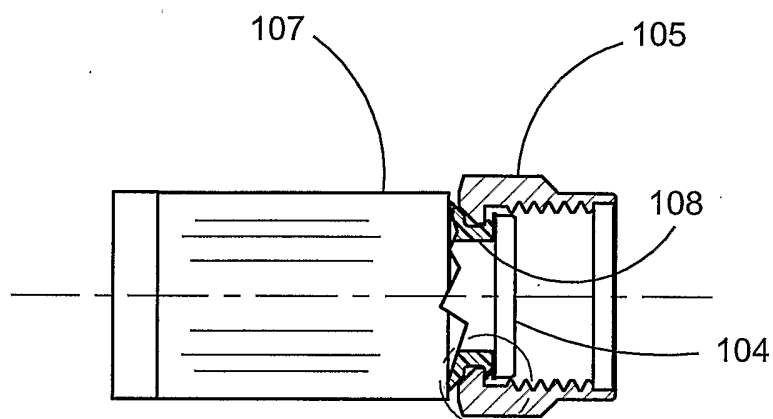



600  
**FIG. 6**






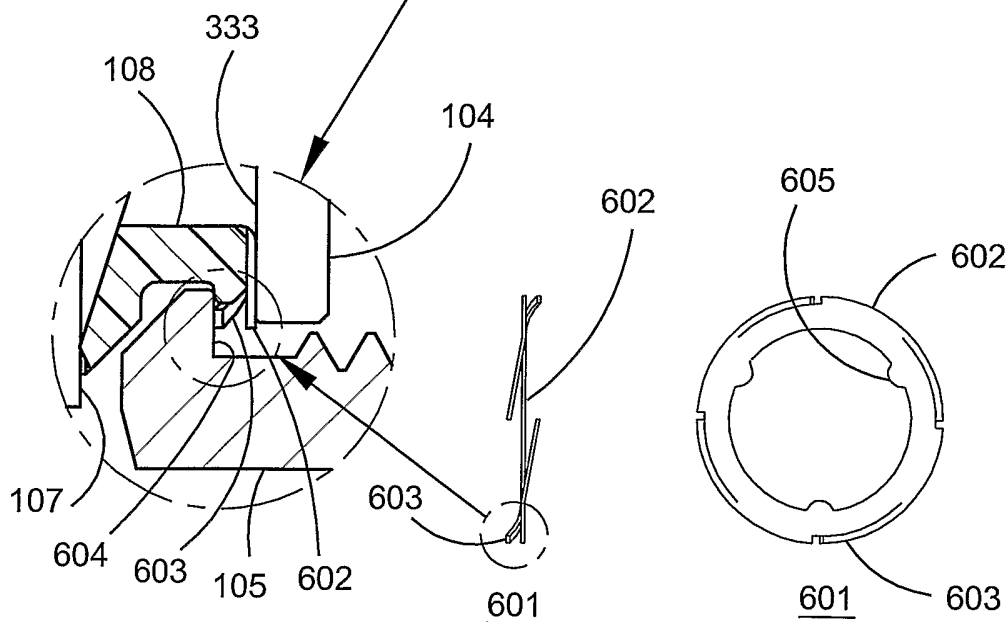



**FIG. 6A**

**FIG. 6B**

**FIG. 6C**

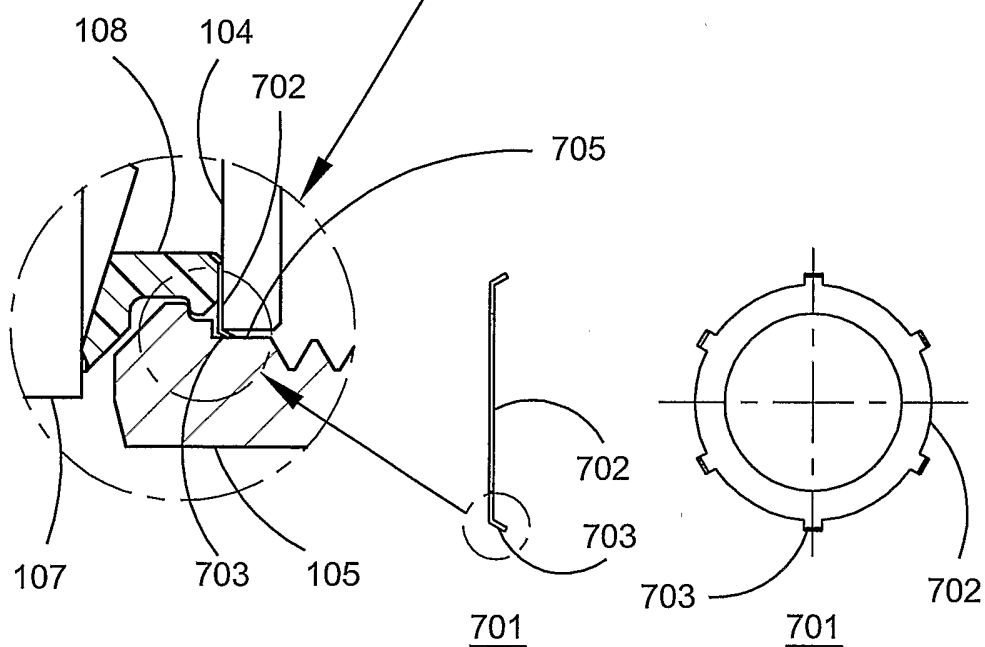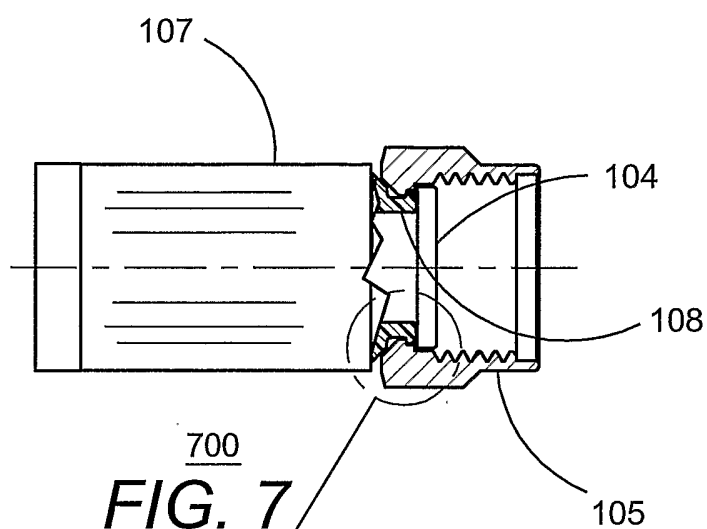


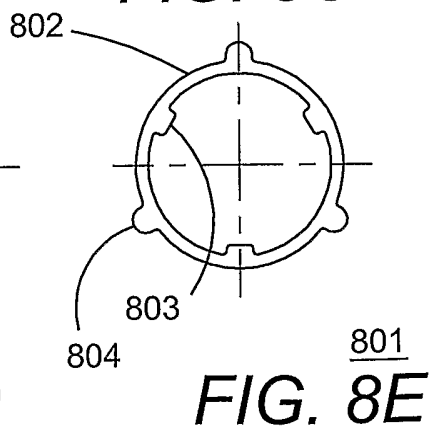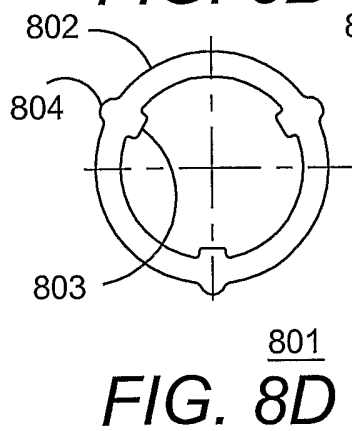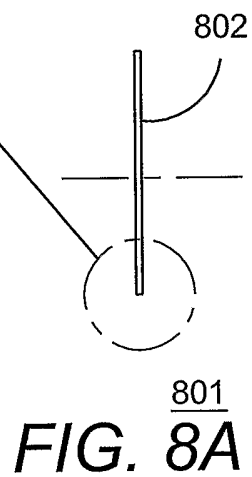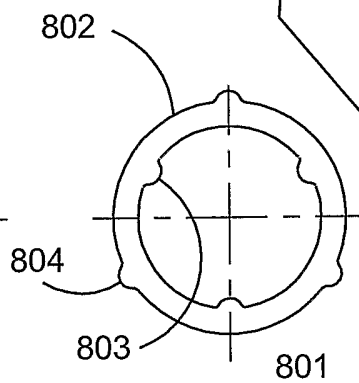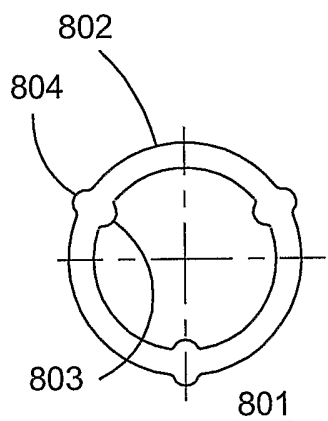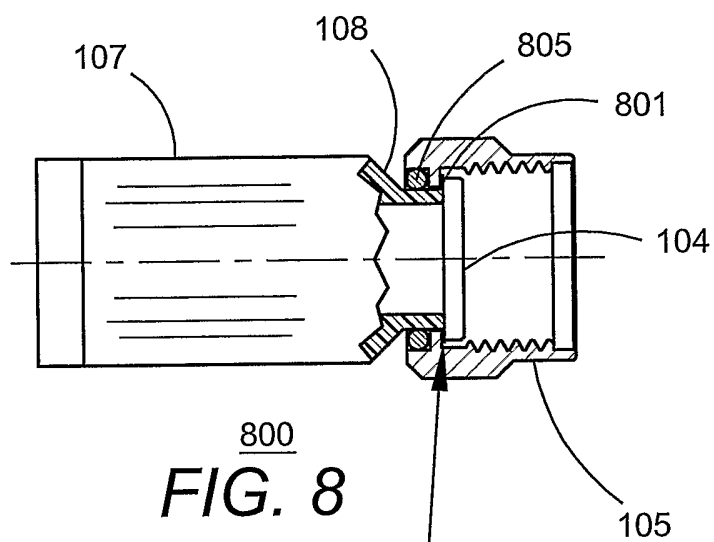

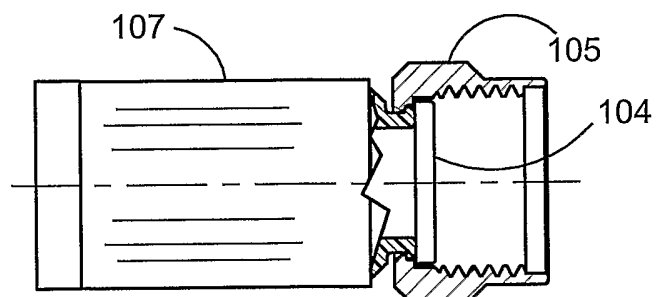


900


**FIG. 9**

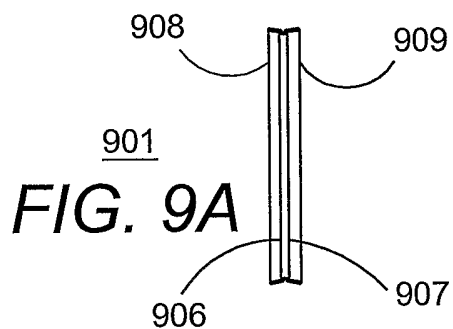


**FIG. 9A**

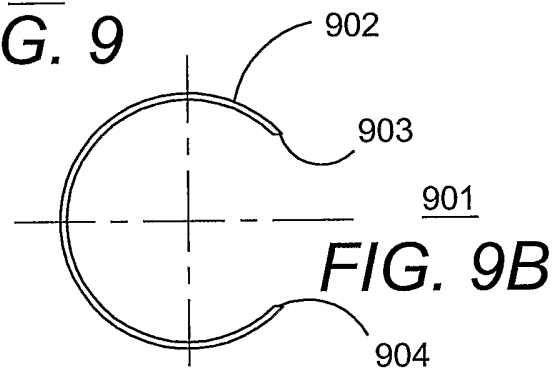


**FIG. 9B**

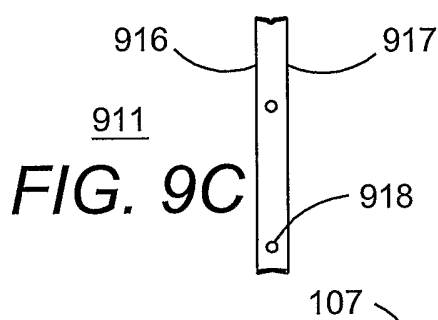

**FIG. 9C**

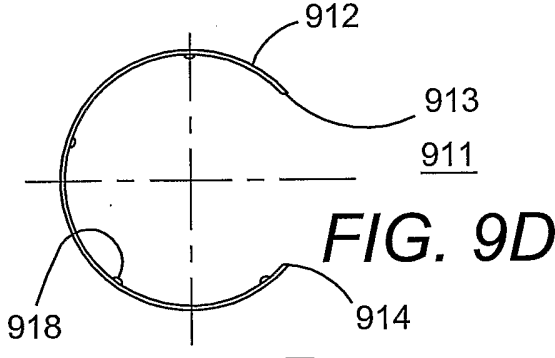


**FIG. 9D**

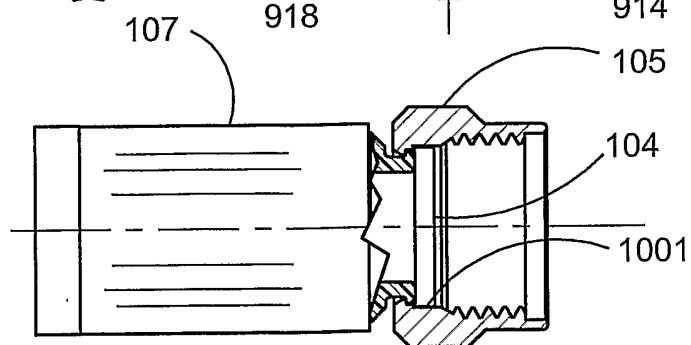


1000


**FIG. 10**

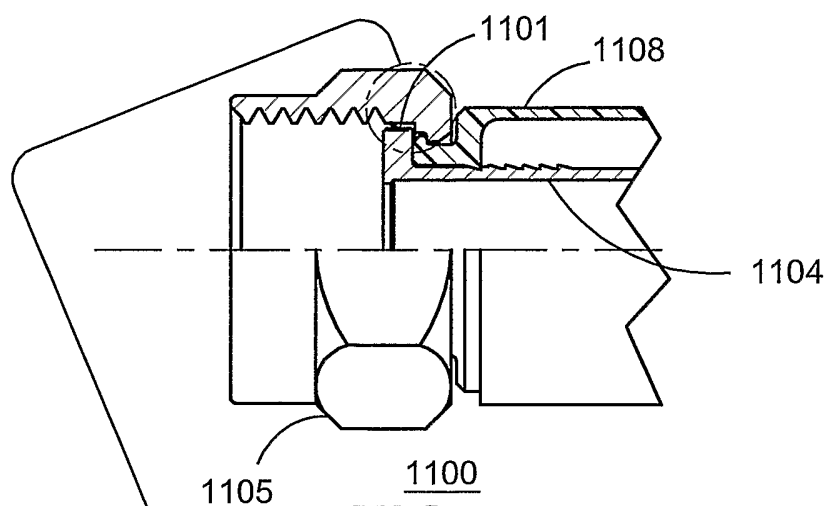


**FIG. 11**

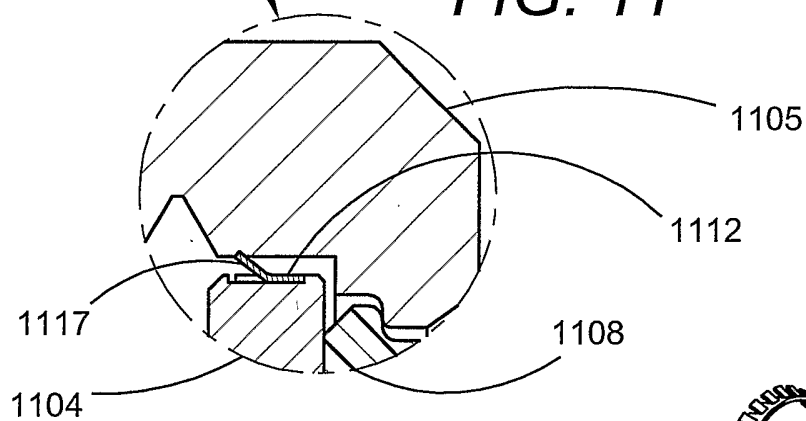


**FIG. 11A**

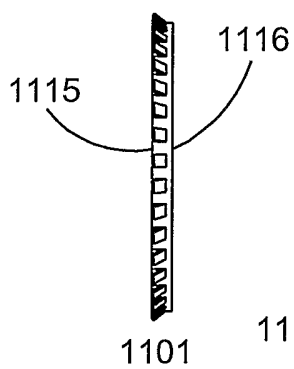

**FIG. 11B**

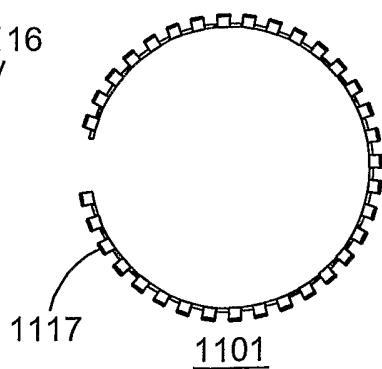

**FIG. 11C**

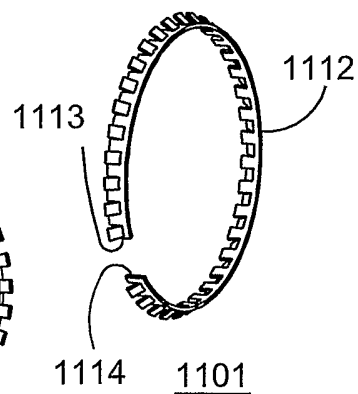

**FIG. 11D**

## INTERNATIONAL SEARCH REPORT

International application No

PCT/US2006/002042

A. CLASSIFICATION OF SUBJECT MATTER  
INV. H01R9/05

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
H01R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 712 631 B1 (YOUTSEY TIMOTHY L) 30 March 2004 (2004-03-30) column 3, line 35 column 4, line 13 - line 65; figures 1-4	1-3, 5-9, 22
Y		10, 19-21, 24
X	US 6 716 062 B1 (PALINKAS RAYMOND ET AL) 6 April 2004 (2004-04-06) figures 4-7	1, 4
Y	US 5 975 951 A (BURRIS ET AL) 2 November 1999 (1999-11-02) figures 3, 4	10, 11
Y	GB 1 401 373 A (RADIAL) 30 July 1975 (1975-07-30) figures 1, 8	11
	----- -/-	

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

2 May 2006

Date of mailing of the international search report

09/05/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Garcia Congosto, M

## INTERNATIONAL SEARCH REPORT

International application No

PCT/US2006/002042

## C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 3 678 445 A (SALVATORE T. BRANCALEONE) 18 July 1972 (1972-07-18) figures 1-4	19-21
A	-----	13
A	US 4 106 839 A (COOPER ET AL) 15 August 1978 (1978-08-15) figures 12-16	13
Y	-----	21
Y	US 4 902 246 A (SAMCHISEN ET AL) 20 February 1990 (1990-02-20) column 6, line 38 - line 59	21
A	-----	25
A	US 4 634 213 A (LARSSON ET AL) 6 January 1987 (1987-01-06) column 1, line 32 - line 35	25
Y	-----	24
Y	US 4 580 865 A (FRYBERGER ET AL) 8 April 1986 (1986-04-08) column 3, line 3 - line 11	24
	-----	

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2006/002042

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6712631	B1	30-03-2004	NONE
US 6716062	B1	06-04-2004	US 2004077215 A1 22-04-2004
US 5975951	A	02-11-1999	BR 9910983 A 02-05-2001 CA 2296469 A1 16-12-1999 WO 9965117 A1 16-12-1999
GB 1401373	A	16-07-1975	CH 570051 A5 28-11-1975 DE 2306639 A1 30-08-1973 FR 2172534 A5 28-09-1973
US 3678445	A	18-07-1972	GB 1340378 A 12-12-1973 JP 51040632 B 05-11-1976
US 4106839	A	15-08-1978	AU 515442 B2 02-04-1981 AU 2734077 A 01-02-1979 BE 857116 A1 14-11-1977 CA 1070792 A1 29-01-1980 DE 2733510 A1 02-02-1978 FR 2360191 A1 24-02-1978 GB 1595967 A 19-08-1981 IT 1116776 B 10-02-1986 JP 1297106 C 20-01-1986 JP 53015583 A 13-02-1978 JP 60019112 B 14-05-1985 SE 428617 B 11-07-1983 SE 7708532 A 27-01-1978 US 4123842 A 07-11-1978
US 4902246	A	20-02-1990	NONE
US 4634213	A	06-01-1987	NONE
US 4580865	A	08-04-1986	AU 564087 B2 30-07-1987 AU 4177185 A 21-11-1985 CA 1230940 A1 29-12-1987 EP 0161910 A2 21-11-1985