




(86) Date de dépôt PCT/PCT Filing Date: 2003/04/30  
(87) Date publication PCT/PCT Publication Date: 2003/11/13  
(45) Date de délivrance/Issue Date: 2018/08/14  
(85) Entrée phase nationale/National Entry: 2004/11/01  
(86) N° demande PCT/PCT Application No.: US 2003/013427  
(87) N° publication PCT/PCT Publication No.: 2003/094550  
(30) Priorité/Priority: 2002/05/01 (US60/377,037)

(51) Cl.Int./Int.Cl. *H04W 4/06* (2009.01),  
*H04H 20/57* (2008.01), *H04H 20/71* (2008.01),  
*H04H 60/91* (2008.01)  
(72) Inventeur/Inventor:  
TERRY, STEPHEN E., US  
(73) Propriétaire/Owner:  
INTERDIGITAL TECHNOLOGY CORPORATION, US  
(74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : SERVICES POINT-MULTI-POINT FAISANT APPEL A DES CANAUX PARTAGES DANS DES SYSTEMES DE COMMUNICATION SANS FIL  
(54) Title: POINT TO MULTI-POINT SERVICES USING SHARED CHANNELS IN WIRELESS COMMUNICATION SYSTEMS

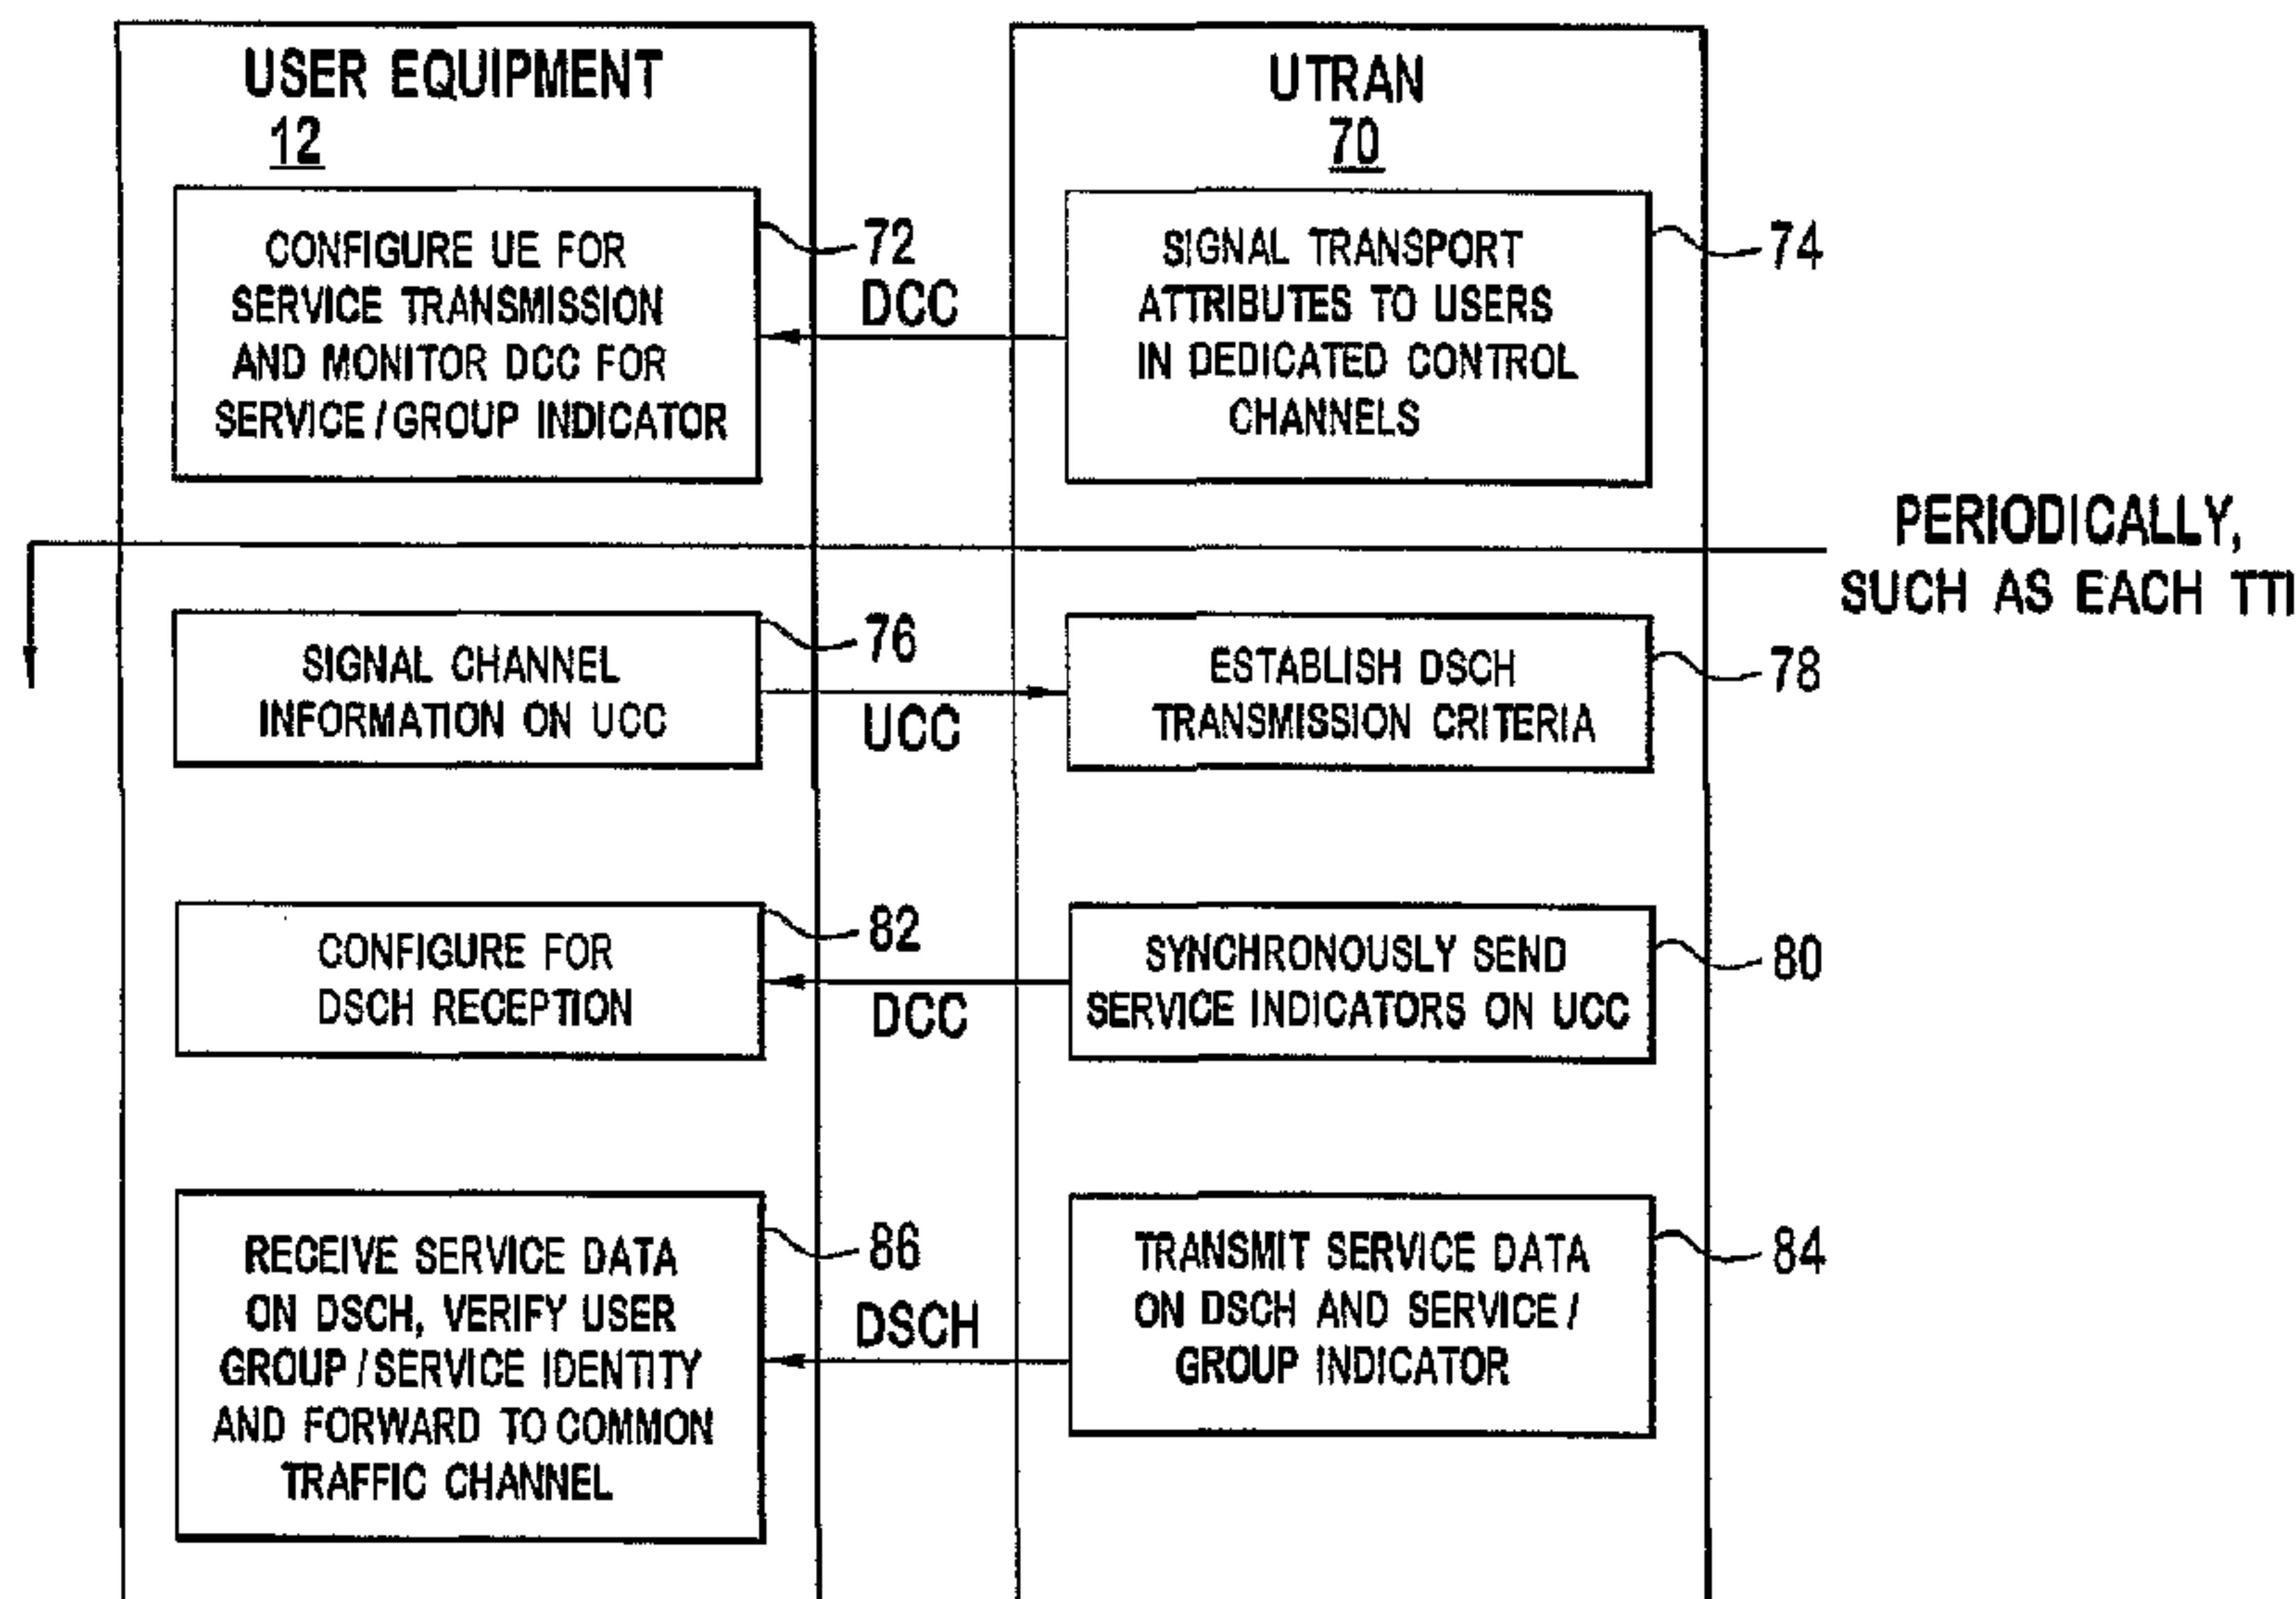

(57) Abrégé/Abstract:

Service data is transferred in a wireless communication system. A first service identification is synchronously transmitted for reception by a group of users of a cell in the system (80). The group of users does not include all the users of the cell. Each of the group of users receives the service identification. Each of the group of users monitors for a second service identification being transmitted over a downlink shared channel (82). The service data is transmitted over the downlink shared channel with the second service identification (84). Each of the group of users detects the second service identification and receives the service data of the downlink shared channel (86).

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
13 November 2003 (13.11.2003)

PCT

(10) International Publication Number  
WO 03/094550 A1(51) International Patent Classification<sup>7</sup>:

H04Q 7/20

(21) International Application Number:

PCT/US03/13427

(22) International Filing Date:

30 April 2003 (30.04.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/377,037

1 May 2002 (01.05.2002) US

(71) Applicant: INTERDIGITAL TECHNOLOGY CORPORATION [US/US]; 300 Delaware Avenue, Suite 527, Wilmington, DE 19801 (US).

(72) Inventor: TERRY, Stephen, E.; 15 Summit Avenue, Northport, NY 11768 (US).

(74) Agents: VOLPE, Anthony, S. et al.; Volpe and Koenig, P.C., United Plaza, Suite 1600, 30 South 17th Street, Philadelphia, PA 19103 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: POINT TO MULTI-POINT SERVICES USING SHARED CHANNELS IN WIRELESS COMMUNICATION SYSTEMS

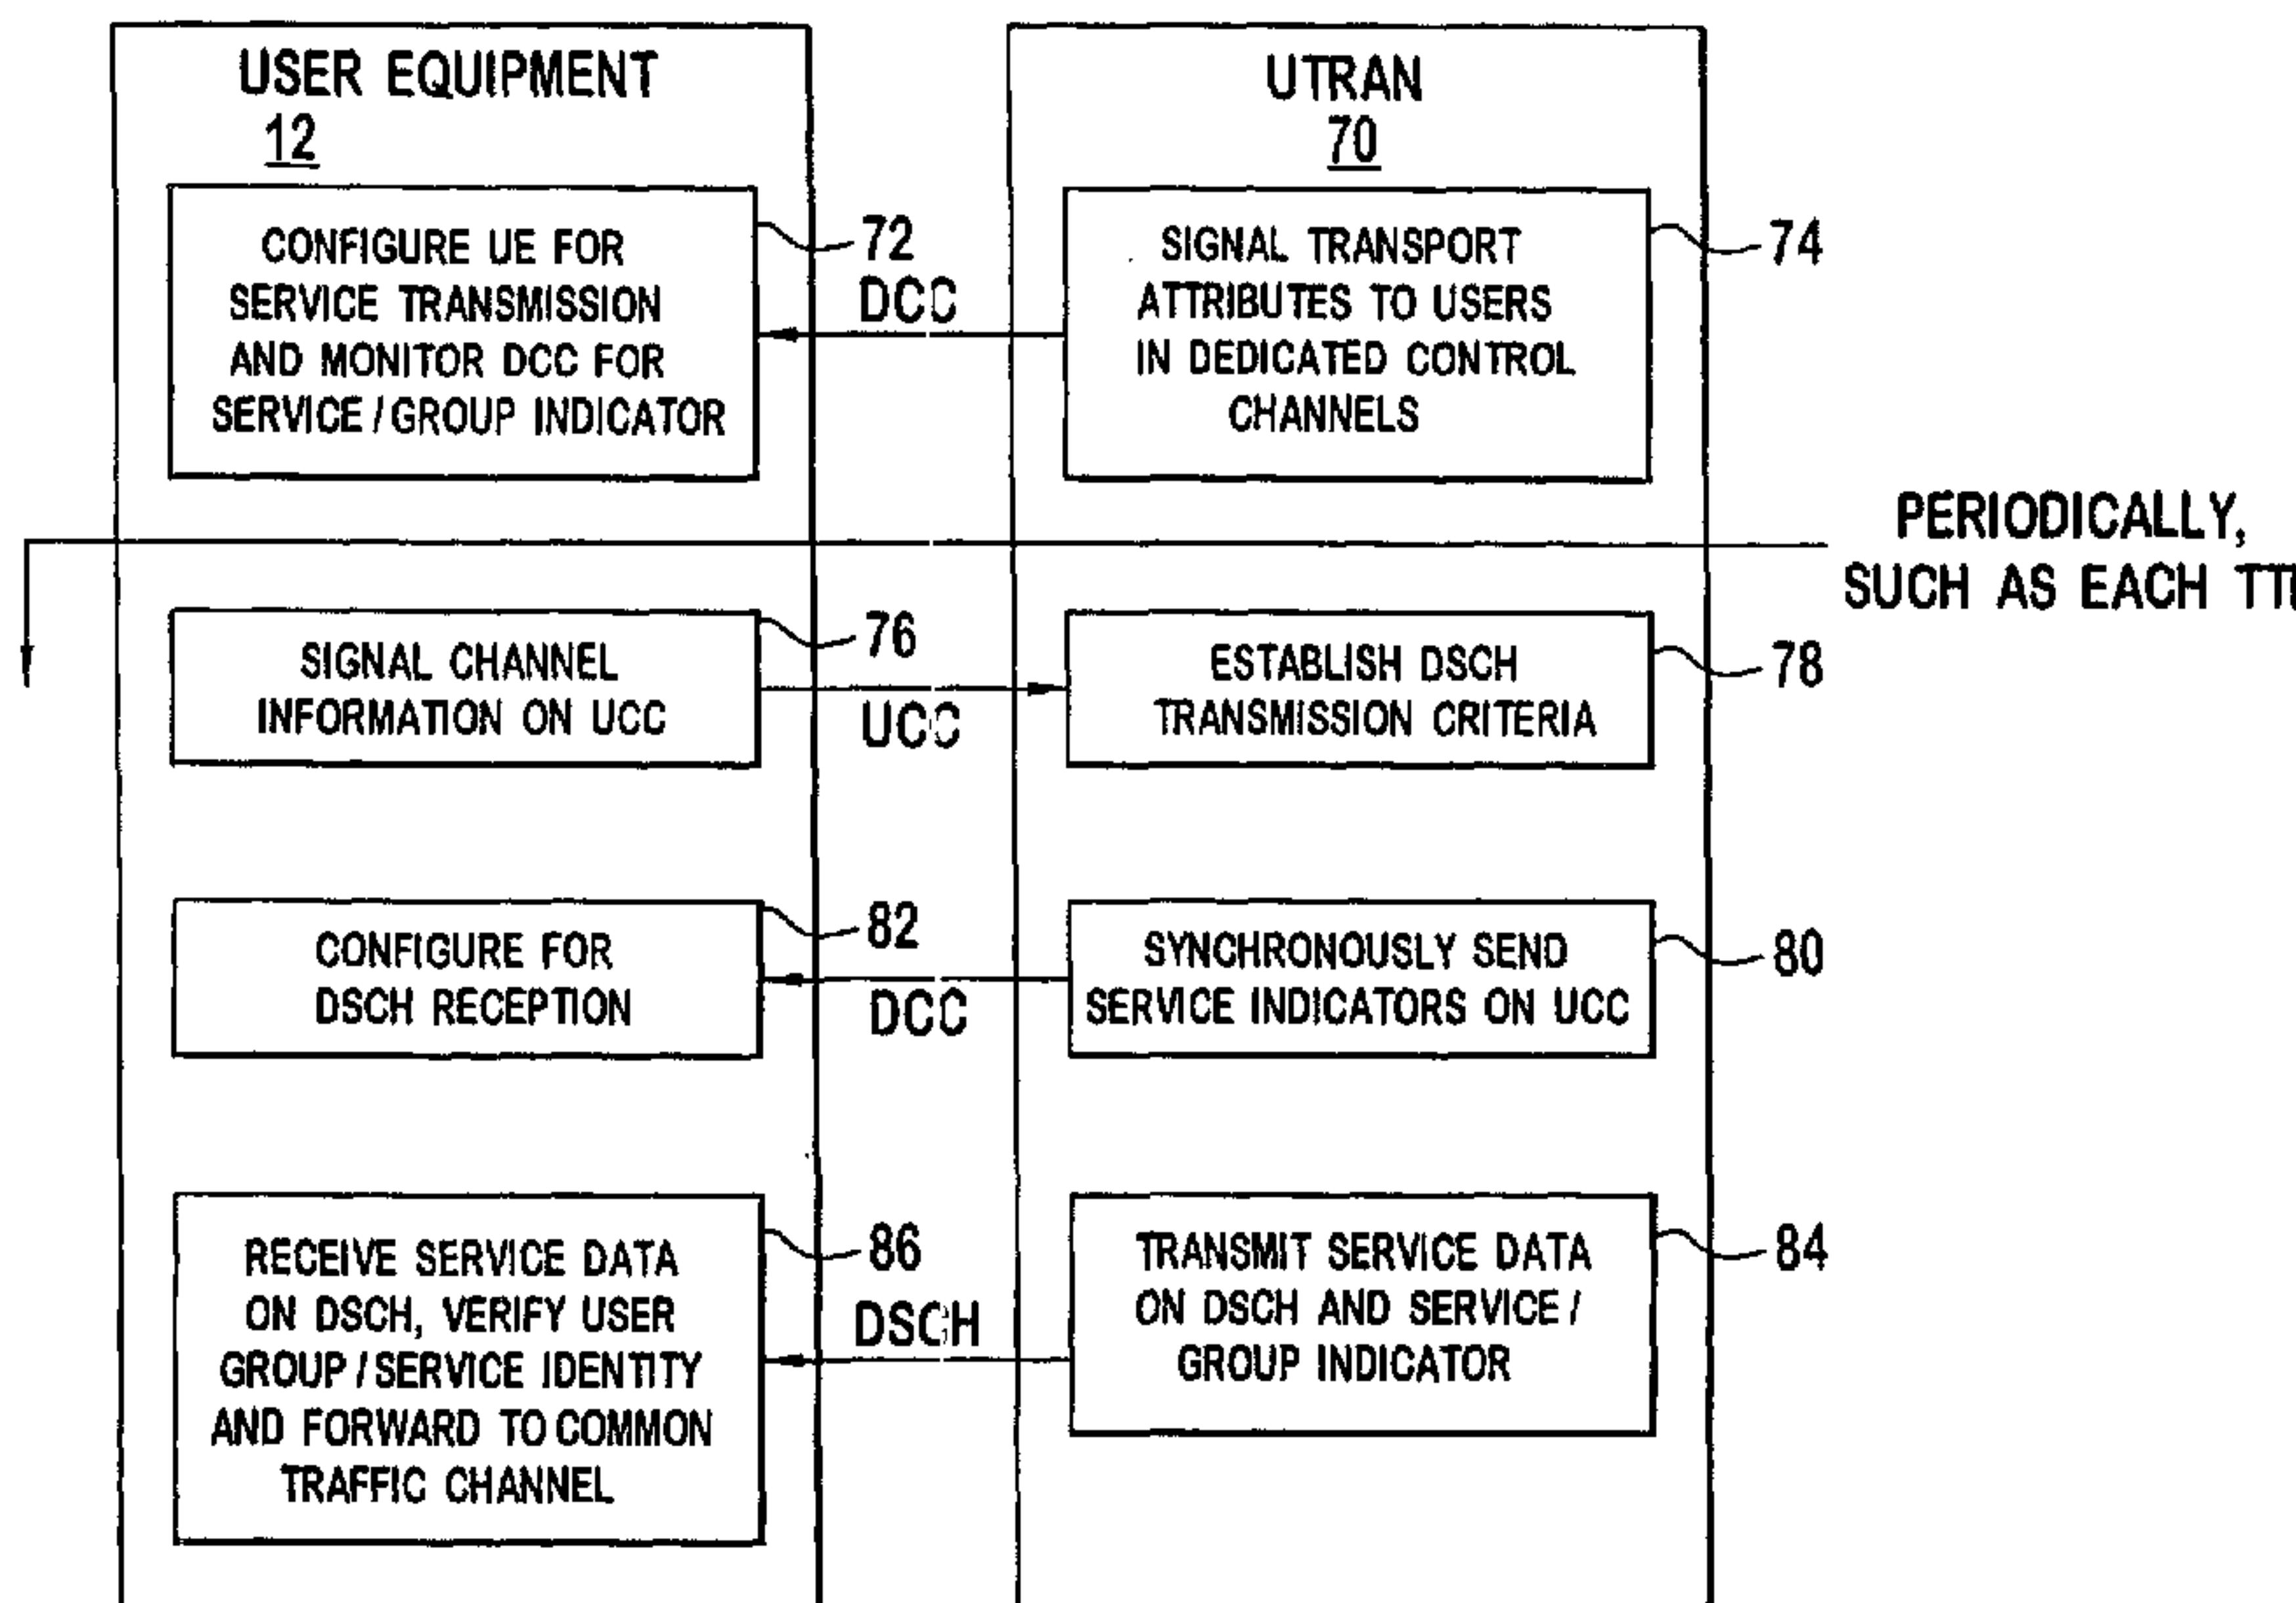

(57) **Abstract:** Service data is transferred in a wireless communication system. A first service identification is synchronously transmitted for reception by a group of users of a cell in the system (80). The group of users does not include all the users of the cell. Each of the group of users receives the service identification. Each of the group of users monitors for a second service identification being transmitted over a downlink shared channel (82). The service data is transmitted over the downlink shared channel with the second service identification (84). Each of the group of users detects the second service identification and receives the service data of the downlink shared channel (86).

WO 03/094550 A1

[0001] POINT TO MULTI-POINT SERVICES USING SHARED CHANNELS  
IN WIRELESS COMMUNICATION SYSTEMS

[0002] FIELD OF INVENTION

[0003] The invention generally relates to wireless communication systems. In particular, the invention relates to point to multi-point services in such systems.

[0004] BACKGROUND

[0005] There is a growing desire to use point to multi-point services in wireless communication systems. As shown in Figure 1 in point to multi-point (PtM), one service is sent from a single point, such as a base station 10, to multiple points, such as multiple user equipments 12<sub>1</sub>-12<sub>3</sub>. Examples of point to multi-point services are multimedia broadcasts and multicast services.

[0006] In the third generation partnership program (3GPP) proposed system, one proposed channel that could be used for such services is the forward access channel (FACH). The FACH is a downlink common transport channel (TrCH) that can be received by all users. The FACH TrCH is broadcast by applying it to the secondary common control physical channel (S-CCPCH). The S-CCPCH is transmitted to all the cell users.

[0007] To limit the radio resources utilized by the S-CCPCH, the S-CCPCH data rate is limited. To illustrate, if a high data rate service was transmitted over the S-CCPCH, it would need to be transmitted using a low data redundancy to achieve that high data rate. Since the S-CCPCH is transmitted to the entire cell, it is transmitted at a power level sufficient for reception by a user at the periphery of the cell at a certain quality of service (QOS). Broadcasting a high data rate service at this power level would increase interference to other users reducing the capacity of system, which is extremely undesirable, due to the inefficient use of cell resources.

[0008] Additionally, due to the broadcast nature of the S-CCPCH and FACH, the radio resources required for the S-CCPCH and FACH are rather

static, due to channel allocation and messaging on these channels being provided at a relatively slow rate by layer 3 signaling techniques. The modulation and coding set (MCS) and transmission power level used by the S-CCPCH needs to be sufficient to maintain a certain QOS at the periphery of the cell. The static nature of the S-CCPCH configuration does not allow dynamic adjustment of these parameters to make efficient use of radio resources. Additionally, scheduling of transmissions also occur at this slow rate, which does not allow for efficient use of this radio resource and does not allow for efficient multiplexing of data streams to each user.

[0009] Another channel that can be used for point to point (PtP) services is the downlink shared channels (DSCHs). The DSCHs are shared by multiple users. Transmissions to different users (user equipments) over the DSCH are separated by time. As a result, the DSCHs are time shared channels.

[0010] Each user using the DSCH has an uplink and a downlink dedicated control channel. These control channels allow a more efficient radio resource utilization of the DSCHs. These control channels allow for power control for each user's transmission over the DSCH and also allow for beam forming to better separate user transmissions. The DSCH's use of power control and beam forming allows for better resource utilization than provided by FACH channels.

[0011] To receive information over the DSCH, a user first monitors its dedicated downlink control channel. A burst in the downlink control channel may have both a first portion and a second portion of a transport format combination indicator (TFCI). The first portion indicates the transport format of the downlink dedicated channel. The second portion indicates existence and the transport format of a subsequent DSCH transmission. If a DSCH transmission to the user is going to be sent to the user, the downlink control channel has the second portion of the TFCI set. The transmission will occur in a subsequent transmission time interval (TTI), after a specified time period. The user then monitors the DSCH for its transmission. To verify that the user is the correct recipient of the DSCH transmission, it checks the transmission for its user

identifier. If a transmission is not going to be sent, the second portion of the TFCI is not present on the downlink dedicated control channel.

[0012] Although the DSCHs allows for a more efficient utilization of radio resources, only point to point services can be handled. To handle multiple reception points, multiple transmissions are made over the DSCH. Accordingly, transmission to many users requires many transmissions over the DSCH, using valuable radio resources.

[0013] Accordingly, it is desirable to have added flexibility in providing wireless point to multi-point services.

[0014] **SUMMARY**

[0015] Service data is transferred in a wireless communication system. An indicator is synchronously transmitted for reception by a group of users of a cell in the system. The group of users does not include all of the users of the cell. Each of the group of users receives the service indicator. Each of the group of users monitors for a service identification being transmitted over a downlink shared channel. The service data is transmitted over the downlink shared channel with the service identification. Each of the group of users detects the service identification and receives the service data of the downlink shared channel.

[0015.1] In accordance with an aspect of the present disclosure, there is provided a method for use in wireless communications. The method comprises: synchronously transmitting over a control channel a unique point-to-multipoint transmission indicator to at least one of a plurality of user groups of a cell, each of the plurality of user groups including at least two users from among all users and not including all the users; wherein the point-to-multipoint transmission indicator indicates a downlink shared channel over which a corresponding point-to-multipoint transmission will be sent to at least one of the plurality of user groups; and transmitting to the at least one plurality of user groups over the indicated downlink shared channel the point-to-multipoint transmission with a

point-to-multipoint identification.

[0015.2] In accordance with another aspect of the present disclosure, there is provided a base station for use in a wireless communication network. The base station comprises: a transmitter configured to synchronously transmit over a control channel a unique point-to-multipoint transmission indicator to at least one of a plurality of user groups of a cell, each of the plurality of user groups including at least two users from among all users and not including all the users, wherein the point-to-multipoint transmission indicator indicates a downlink shared channel over which a corresponding point-to-multipoint transmission will be sent to the at least one of the plurality of user groups, and to transmit to the at least one of the plurality of user groups over the indicated downlink shared channel the point-to-multipoint transmission with a point-to-multipoint identification.

[0015.3] In accordance with another aspect of the present disclosure, there is provided a method for transferring service data in wireless communications. The method comprises: receiving service data for transmission; and transmitting over a channel, a service identifier for reception by a plurality of users, wherein each user is a member of at least one of a plurality of groups in a cell, and the plurality of users does not include all users of the cell.

[0016] **BRIEF DESCRIPTION OF THE DRAWING(S)**

[0017] Figure 1 is an illustration of a point to multi-point service.

[0018] Figure 2 is an illustration of a preferred shared channel.

[0019] Figure 3 is simplified diagram of a preferred radio network controller/Node-B and user equipment.

[0020] Figure 4 is a simplified diagram of a preferred radio network controller with a scheduling mechanism for the preferred shared channel.

[0021] Figure 5A, 5B, 5C, 5D and 5E are illustrations of preferred scheduling of signals for the shared channel.

[0022] Figure 6 is an illustration of preferred signals for establishment and transmission of a point to multi-point service over a downlink shared channel.

[0023] Figure 7 is a simplified diagram of a preferred Node-B and user equipment using transmission power control and beam steering for a shared channel.

[0024] DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT(S)

[0025] Although the preferred embodiments are described in conjunction with a preferred 3GPP proposed system, they can be utilized with other wireless systems using point to multi-point transmissions.

[0026] Figure 2 is an illustration of a preferred shared channel 16 and its associated downlink and uplink dedicated control channels 14<sub>1</sub>-14<sub>N</sub>. Although the preferred embodiment uses downlink and uplink dedicated control channels, the information sent over these channels may, in alternate embodiments, be sent by other means, such as by common physical control channels or layer 2/3 signals. A group of users, UE 1 12<sub>1</sub>, ..., UE J 12<sub>J</sub>, ..., UE N 12<sub>N</sub>, are to receive a shared service 16. A downlink dedicated control channel 14<sub>1</sub>-14<sub>N</sub> for each user is utilized to establish the shared channel and for other control purposes. The shared channel 16 is sent by a base station 10 and is received by the group of UEs 12<sub>1</sub>-12<sub>N</sub>. UEs, such as UE X 12<sub>X</sub>, do not receive the shared channel allocation indication in their dedicated control channels 14<sub>X</sub> and do not receive data of the shared channel 16.

[0027] Figure 3 is a simplified diagram of a RNC 20/Node-B 18 and one of the UEs, UE J 12<sub>J</sub>, for use in transferring data over the shared channel. At the RNC 20/Node-B 18, each downlink dedicated control channel (DDCC) generator 24<sub>1</sub>-24<sub>N</sub> produces a control channel signal for each UE 12<sub>1</sub>-12<sub>N</sub>. A multi-point synchronization device 25 is used to synchronize DSCH allocations to user groups subscribing to a common PtM service on the users' DDCCs. For a UE J 12<sub>J</sub>, after its dedicated control channel is radiated by an antenna 32 or antenna array through the wireless radio interface 22, it is received by an antenna 34 or

an antenna array of the UE J 12<sub>J</sub> and processed by a control channel receiver 36 to recover control information of the channel.

[0028] A downlink shared channel generator 26 produces the shared channel signal for transfer through the wireless interface 22. The shared channel signal is received by the UE J 12<sub>J</sub> using its antenna 34 or antenna array. Information of the shared channel is recovered using the dedicated control channel information by a downlink shared channel receiver 38. A shared channel measuring device 40 takes channel quality measurements/information of the downlink dedicated channel and/or shared channel, for example, received signal code power, relative interference, and block error rate. The measurements/information is sent to the RNC 20/Node-B 18. Typically, this channel quality measurements/information is transmit power commands (TPC), phase shift and amplitude information for use in beam forming, and measured values of received power and interference.

[0029] A measurement receiver 30, at the RNC 20/Node-B 18, recovers the channel measurements from all the users of the shared channel. A power control device 28 uses the channel measurements/information to set the power level for the shared channel. Additionally, a transmit diversity device 29 may use the phase shift and amplitude information to set beam forming for the shared channel. Preferably, the power level and beam forming is updated every transmission time interval (TTI), although a longer time period can be used.

[0030] The dedicated channels are continuously maintained. The received BLER is used to determine a signal to interference ratio (SIR) target. Based on the received estimated SIR, TPC commands are generated. When the DSCH is activated, the power required is derived from the dedicated channel. However, it is typically not exactly the same, since the BLER requirement and physical configuration differ between them. For a PtM transmission, the transmission power level is set to achieve the desired QOS to the user with the worst reception quality for the PtM transmission. It is also possible to omit users within the PtM user group for which their QoS requirements can not be achieved due to physical limitations in this transmission.

[0031] For services having multiple sub-streams of data, the transmission characteristics of the various sub-streams may be handled separately. To illustrate, a multimedia service may have an audio, video and text sub-streams. The QOS of each sub-stream may differ allowing different transmission attributes to be used by each sub-stream. This approach allows for better resource efficiency. Instead of transmitting each sub-stream to meet the highest QOS sub-stream requirements, they can be handled separately on individual DSCH transmissions.

[0032] Figure 4 is a simplified block diagram of a preferred radio network controller (RNC) 42. The preferred RNC 42 has a scheduling mechanism 46. The scheduling mechanism 46 is preferably used to schedule data every TTI, although a longer scheduling period may be used. The scheduling mechanism 46 receives data to be transmitted over shared channel resources. The received data includes data for PtP and PtM services. The scheduling mechanism schedules the data for transmission in the PtP and PtM transmissions. To schedule the information, the scheduling mechanism 46 considers the QOS required by each transmission including its required data latency and throughput, as well as physical propagation requirements including the total power requirements of the cell and each channel and beam steering information. For each TTI, the scheduling mechanism makes a best use of the cell resources in it's decision to schedule the data transmissions. To illustrate, in a particular TTI the total cell power requirement may be almost reached. If the PtM service can be delayed, the PtM service transmission may be delayed one or two TTIs, until the total cell power requirement drops. If this TTI by TTI flexibility is not available, a resource decision is made and can not be changed over a specified time period, such as 100ms. or 1s. In these situations, resources are allocated and not changed in that time period. As a result, certain transmissions that could have been transmitted may not be due to idle allocated resources. The RNC 42 signals to the UEs 12<sub>1</sub>-12<sub>N</sub> the channels and the timing of the PtP and PtM transmissions. Scheduling on a TTI basis offers a greater ability to achieve the QOS and data latency requirements while maintaining high utilization of DSCH cell resources. Cell

physical channel and PtP/PtM data transmission requirements change dynamically, therefore a scheduling mechanism 46 which can react quickly to these changes offers improved ability to achieve QoS requirements while making the most efficient use of the cells physical resources.

[0033] The scheduler 46 may also take into account physical transmission requirements. For example, one user or user group may require a more robust MCS than another. During the next TTI resources may only be available for a less robust MCS. The scheduler 46 may then schedule transmissions for PtP users or PtM user groups that maximize the use of available resources. Since data available for transmission with specific QOS requirements, available physical resources and channel quality measurements change on a TTI basis, the ability to schedule within this interval improves the number of satisfied users and the overall utilization and efficient use of physical resources.

[0034] The preferred scheduling for each TTI reduces resource conflicts between services, by reducing the occurrences of idle radio resources. Additionally, the TTI scheduling granularity allows for the changing of PtM transmissions to PtP transmissions and vice versa on the fly. To illustrate, a multimedia service is sent by a PtM transmission to multiple users. For a particular TTI, only one user requires the transmission and the scheduling mechanism 46 schedules that TTIs service transmission as PtP. In the next TTI, multiple users require the service transmission and a PtM transmission is scheduled. Using the preferred scheduling mechanism 46, the PtP and PtM services can be segmented and reassembled over multiple non-contiguous TTI allocations. This scheduling mechanism 46 further increases flexibility of radio resource assignment and results in greater radio resource efficiency.

[0035] Figures 5A, 5B, 5C, 5D and 5E are illustrations of a potential allocation of the shared channel for a PtM service. In dedicated control channels  $14_1-14_N$  for each user of a PtM user group, user 1 to user N, receiving the service as shown in Figure 5A, control information is sent. As shown in Figure 5B for a 3GPP FDD system, there is a chip offset "DOFF" used to stagger start of user TTIs. For each user within the PtM service user group as shown in Figure 5A

and 5B, a service transmission indicator (STI) 50 is sent along with the dedicated control information. The service transmission indicator 50 indicates that service data will be sent over the shared channel 16. The preferred service transmission indicator is the presence of the second portion of the TFCI in the dedicated downlink control channel burst, although different indicators, such as a bit or word, may be used. After a set time period, the service data is transmitted over the shared channel 16. The transmitted service data, preferably, has an ID 52 associated with the service. This service ID (SID) 52 is used to verify that the correct group of recipients is receiving the transmission.

[0036] Figure 5C illustrates the allocation of multiple PtM services. Users 1 and 2 are in group A and receive one PtM service. Users 2 and 3 are in group B and receive another PtM service. A particular user can receive multiple PtM and PtP services. As shown in Figure 5C, user 2 receives both PtM services. In the DDCCs  $14_1$  to  $14_3$  for each user, a service indicator  $50_1$ ,  $50_2$  is sent to indicate that a corresponding service transmission is being sent over its DSCH. The multiple services may be sent over the same DSCH or multiple DSCHs  $16_1$ ,  $16_2$ . Each service transmission has its service ID  $52_1$  and  $52_2$ . In Figure 5D, the STIs  $50_1$  and  $50_2$  and the DDCCs are staggered in time. However, the transmission over the different shared channels  $16_1$ ,  $16_2$  may be simultaneous.

[0037] In Figure 5E for a differing signaling approach, multiple user groups 1-G may be receiving a service. Each user has a DDCC  $14_{11}$  to  $14_{GN}$  and receives an STI to indicate the PtM transmission. UE groups 1-G are to receive the service. The data transmitted in the shared channel comprises a group ID (GID)  $54_1$ - $54_G$  for each of the recipient groups.

[0038] Figure 6 is an illustration of preferred signals for establishment and transmissions of a point to multi-point service over DSCHs. The UMTS terrestrial radio access network (UTRAN) 70 signals to each user, user equipment 12, to receive the service the transport attributes of the transmission, 74. Data to be sent for the point to multi-point service is received from the core network by the UTRAN 70. Each user of the PtM service may not be activated/configured to receive the service at the same time. Users may

register for the service at any time, even when the service is ongoing or the user may register when entering specific PtM service areas. Each user configures itself for reception of the transmission, 72, and monitors its dedicated control channel for DSCH allocations 82.

[0039] Each user maintains uplink and downlink dedicated channels and sends channel information, such as received interference, received power, calculated pathloss and location information, to the UTRAN 70, 76. The received interference and pathloss can also be indicated by use of TPC and location information can be signaled by phase shift indications. Using the channel information for all the users within each PtM user group, the RAN 70 establishes criteria for allocation of the DSCH transmissions, such as transmission power levels and beam forming requirements, 78. To illustrate, if beam forming is not used, the RAN 70 would typically set the transmission power level at a level for reception by the user having the worst reception quality, such as the user having the largest pathloss. If beam forming is used, the power level for each beam is based on the users within the beam having the worst quality. For beam forming, the location information is used to group the users based on their location to establish the number, size and shape of the beams needed to service the group. To optimize the usage of radio resources, these parameters are preferably updated every time transmission interval (TTI), preferably, on each user's uplink dedicated control channel, although a longer time period between updates may be used by transferring equivalent information with layer 3 signaling procedures.

[0040] The UTRAN 70 sends the service indicator to the user group(s) on each user's dedicated control channel in a synchronized manner, 80. Each user in the group(s) configures itself to receive the PtM transmission, 82.

[0041] Since the indication of the shared channel transmission is typically not completely fault tolerant, preferably, an identifier is sent in the DSCH. However, in alternate embodiments, the DSCH identifier may not be used. For PtP services, a specific user identifier is signaled with the DSCH transmission. For the preferred embodiment, a PtM service identifier common to all users within the PtM user group is signaled with DSCH, 84. Each user verifies that

either its PtP user specific identifier or the PtM service identifier is sent with the service transmission. The received service data is forwarded to the common traffic channel at the UE  $12_1$ - $12_N$ , 86.

[0042] Figure 7 is a simplified illustration of a Node-B 18 and UE  $12_J$  utilizing adaptive power control and beam steering for the DSCH. The UE  $12_J$  receives the DSCH over the wireless radio interface 64 using its antenna 72. The DSCH data is recovered by a user DSCH receiver 66. A user feedback transmitter 68 sends channel information, such as TPC and/or phase shift information back to the Node-B 18. The Node-B 18 recovers the channel information from all the users associated with each PtM user group using a user feed back receiver 62.

[0043] Data to be sent over the DSCH for each PtM user group is produced by a DSCH generator 56. A power control device 58 establishes the transmission power level of the DSCH or each DSCH beam using the received feedback information. Beams for the DSCH are determined by a beam steering controller 60, which provides appropriate magnitude and weight values to each antenna  $70_1$  to  $70_N$  of the Node-B's antenna array.

\* \* \*

CLAIMS:

1. A user equipment, comprising:

    circuitry configured to monitor at least one downlink control channel for information derived from an identification for a group of user equipments,

    wherein the circuitry is further configured to receive data over a downlink shared channel in response to receiving the information derived from the group identification, wherein the received data associated with the group of user equipments is point to multipoint data;

    wherein the circuitry is further configured to monitor at least one downlink control channel for information derived from an identification for a single user equipment; and

    wherein the circuitry is further configured to receive data over a downlink shared channel in response to receiving the information derived from the single user identification, wherein the received data associated with the single user equipment is point to point data.

2. The user equipment of claim 1, wherein the received data associated with the group of user equipments is received in a first transmission time interval (TTI) and the received data associated with the single user equipment is received in a second TTI.

3. The user equipment of claim 1, wherein the circuitry is further configured to transmit channel quality information and antenna weight information.

4. The user equipment of claim 3, wherein the circuitry is further configured to receive modulation code scheme (MCS) information for the received data associated with the single user identification in response to the transmitted channel quality information and antenna weight information.

5. The user equipment of claim 4, wherein the circuitry is further configured to receive the data associated with the single user identification processed using the antenna weight information in response to the transmitted channel quality information and antenna weight information.

6. The user equipment of claim 3, wherein the channel quality information and antenna weight information is transmitted over a control channel.

7. A base station, comprising:

    circuitry configured to transmit at least one downlink control channel having information derived from an identification for a group of user equipments and to transmit data over a downlink shared channel for reception by the group of user equipments, wherein the transmitted data associated with the group of user equipments is point to multipoint data;

    wherein the circuitry is further configured to transmit at least one downlink control channel having information derived from an identification for a single user equipment and to transmit data over a downlink shared channel for reception by a single user equipment, wherein the transmitted data associated with the single user equipment is point to point data.

8. The base station of claim 7, wherein the transmitted data associated with the group of user equipments is transmitted in a first transmission time interval (TTI) and the transmitted data associated with the single user equipment is transmitted in a second transmission time interval (TTI).

9. The base station of claim 7, wherein the circuitry is further configured to receive channel quality information and antenna weight information.

10. The base station of claim 9, wherein the circuitry is further configured to transmit MCS information for the data associated with the single user identification in response to the received channel quality information and antenna weight information.

11. The base station of claim 10, wherein the circuitry is further configured to transmit the data associated with the single user identification processed using the antenna weight information in response to the received channel quality information and antenna weight information.

12. The base station of claim 10, wherein the channel quality information and antenna weight information is received over a control channel.

13. A user equipment, comprising:  
circuitry configured to receive point to point data in a first plurality of transmission time intervals (TTIs) over a downlink shared channel;  
wherein the circuitry is further configured to receive point to multipoint data in a second plurality of TTIs over a downlink shared channel;  
and  
wherein the circuitry is further configured to transmit channel quality information and antenna weight information.

14. The user equipment of claim 13, wherein the circuitry is further configured to receive MCS information associated with the point to point data on a downlink control channel.

15. The user equipment of claim 13, wherein the transmitted channel quality information and the antenna weight information is transmitted over an uplink control channel.

16. The user equipment of claim 15, wherein the circuitry is further configured to receive the point to point data processed using the antenna weight information in response to the transmitted channel quality information and antenna weight information.

17. A network device, comprising:

circuity configured to transmit point to point data in a first plurality of transmission time intervals (TTIs) over a downlink shared channel;

wherein the circuitry is further configured to transmit point to multipoint data in a second plurality of transmission time intervals (TTIs) over a downlink shared channel;

wherein the circuitry is further configured to receive channel quality information and antenna weight information from a plurality of user equipment; and

wherein the circuitry is further configured to schedule at least point to point data transmission in response to the channel quality information and weight antennas of an antenna array in response to the antenna weight information.

18. The network device of claim 17, wherein the circuitry is further configured to transmit MCS information associated with the point to point data transmissions on at least one downlink control channel.

19. The network device of claim 17, wherein the received channel quality information and the antenna weight information is received over uplink control channels.

20. The network device of claim 17, wherein the circuitry is further configured for each point to point data transmission to transmit information processed using an identification associated with a user equipment of the point to point data transmission.

1 / 7

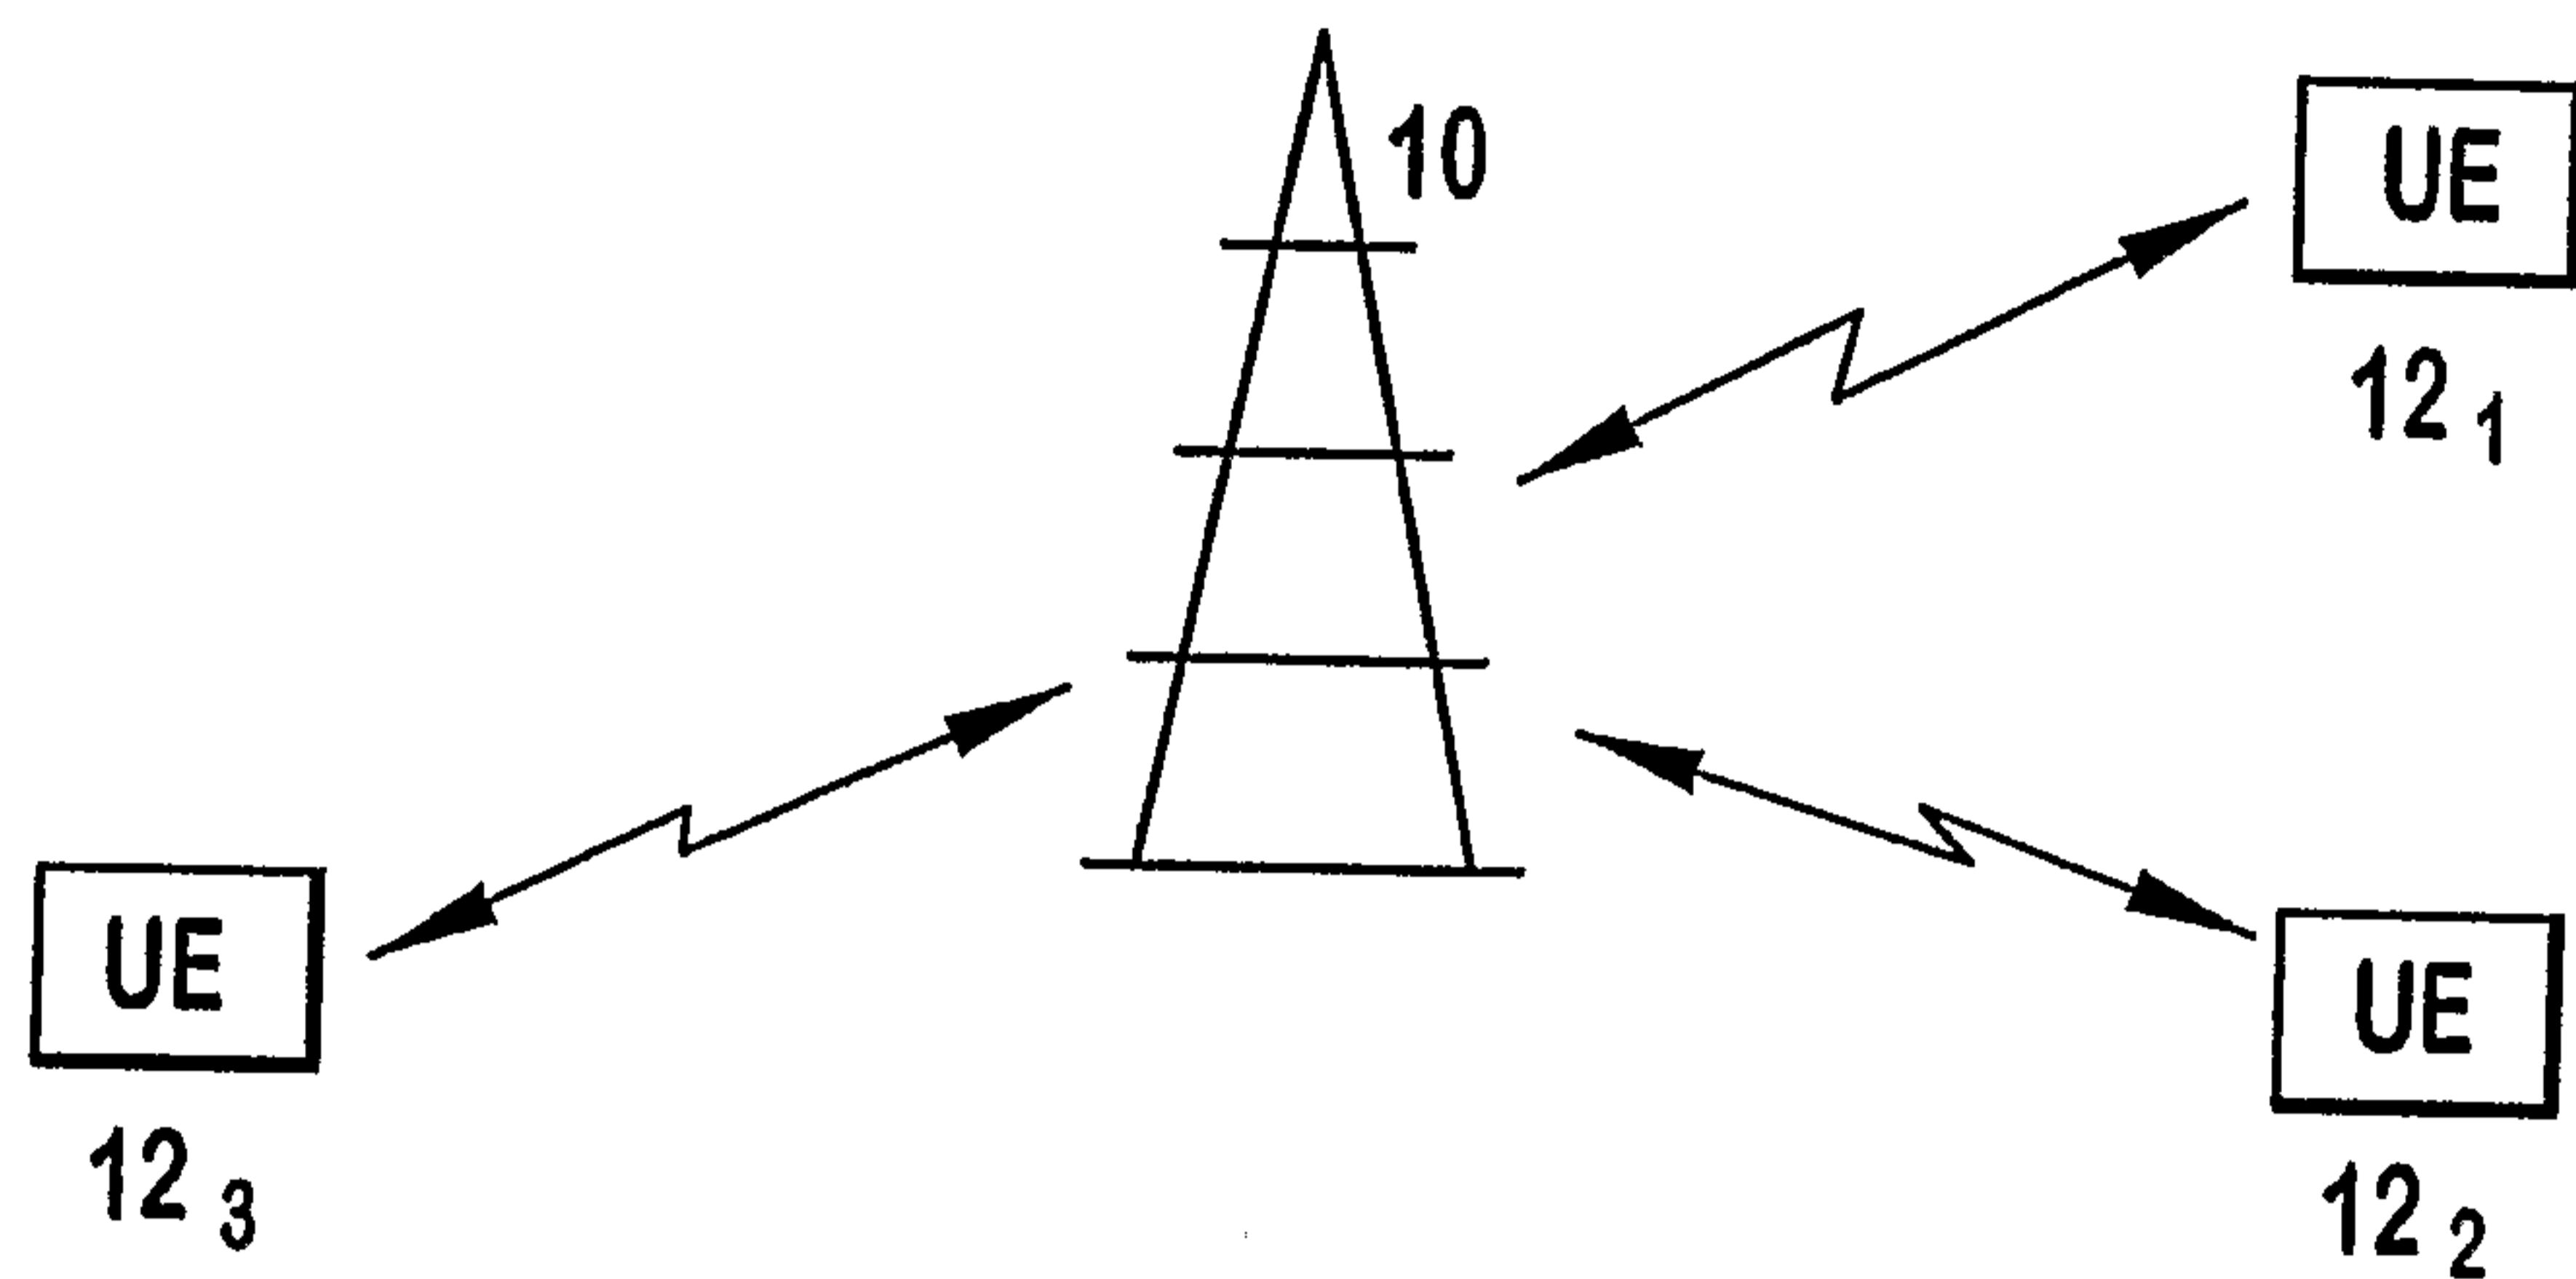


FIG. 1

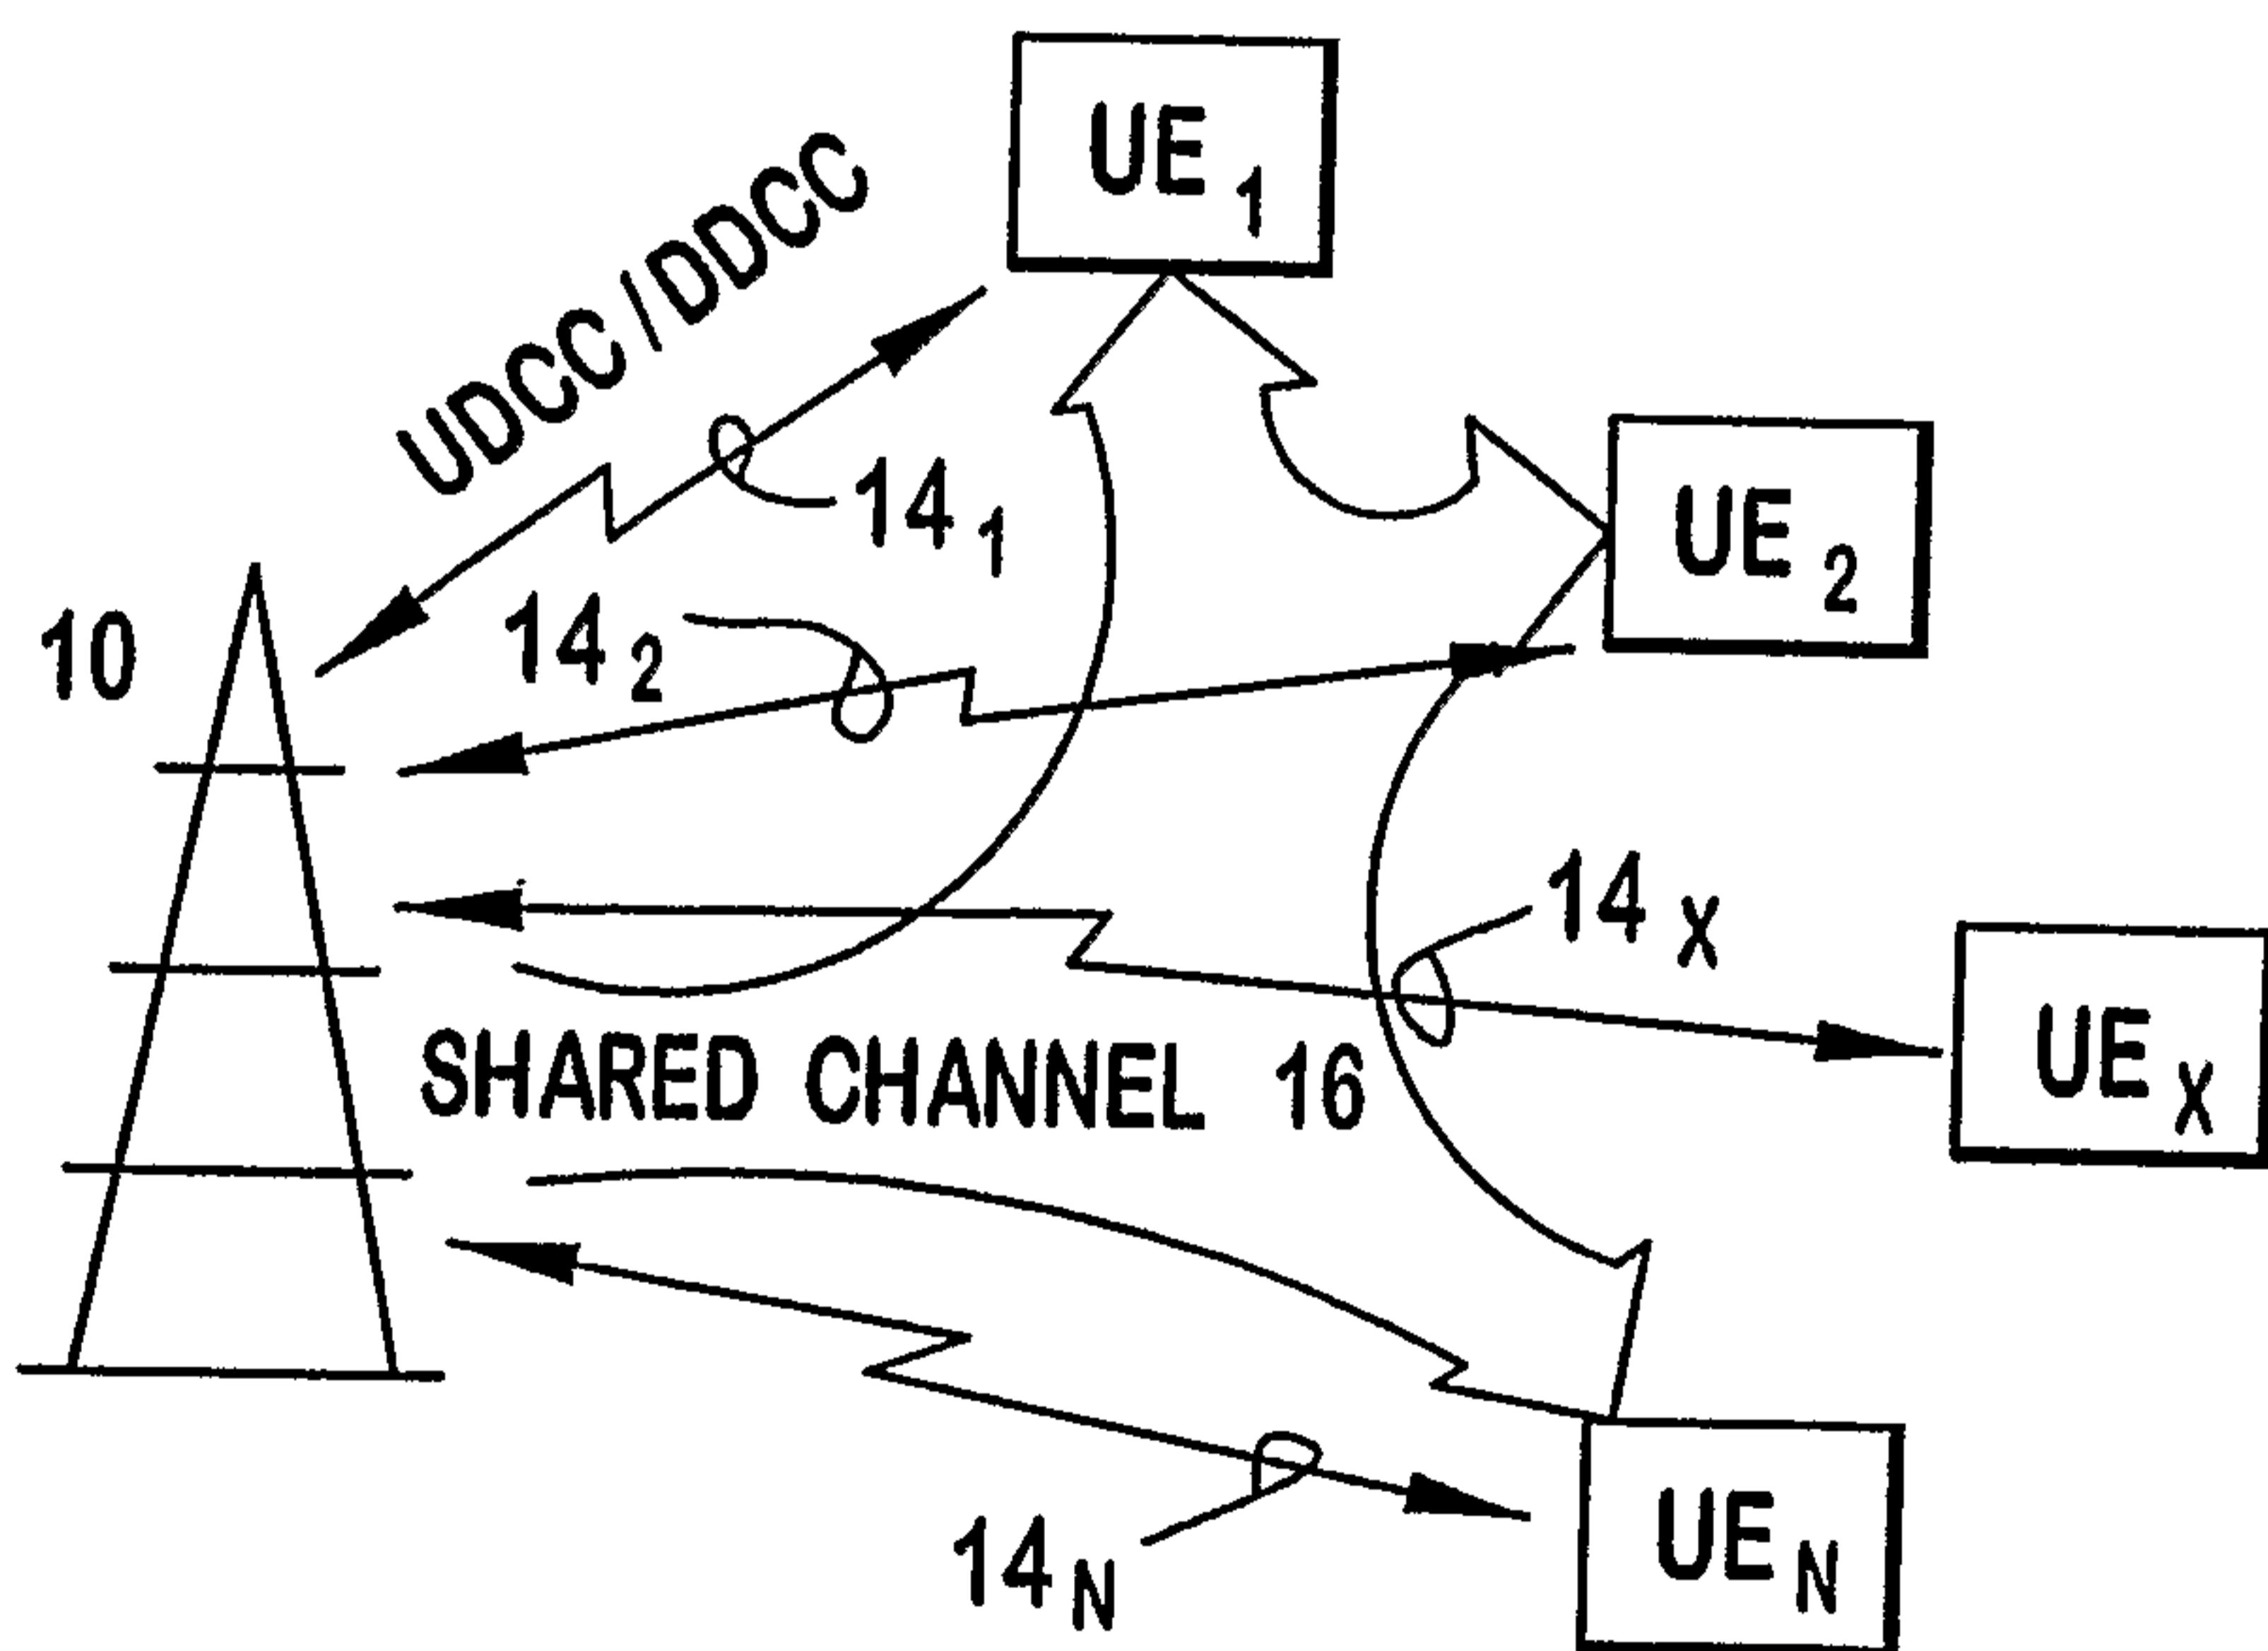


FIG. 2

217

## RNC 20 / NODE - B18

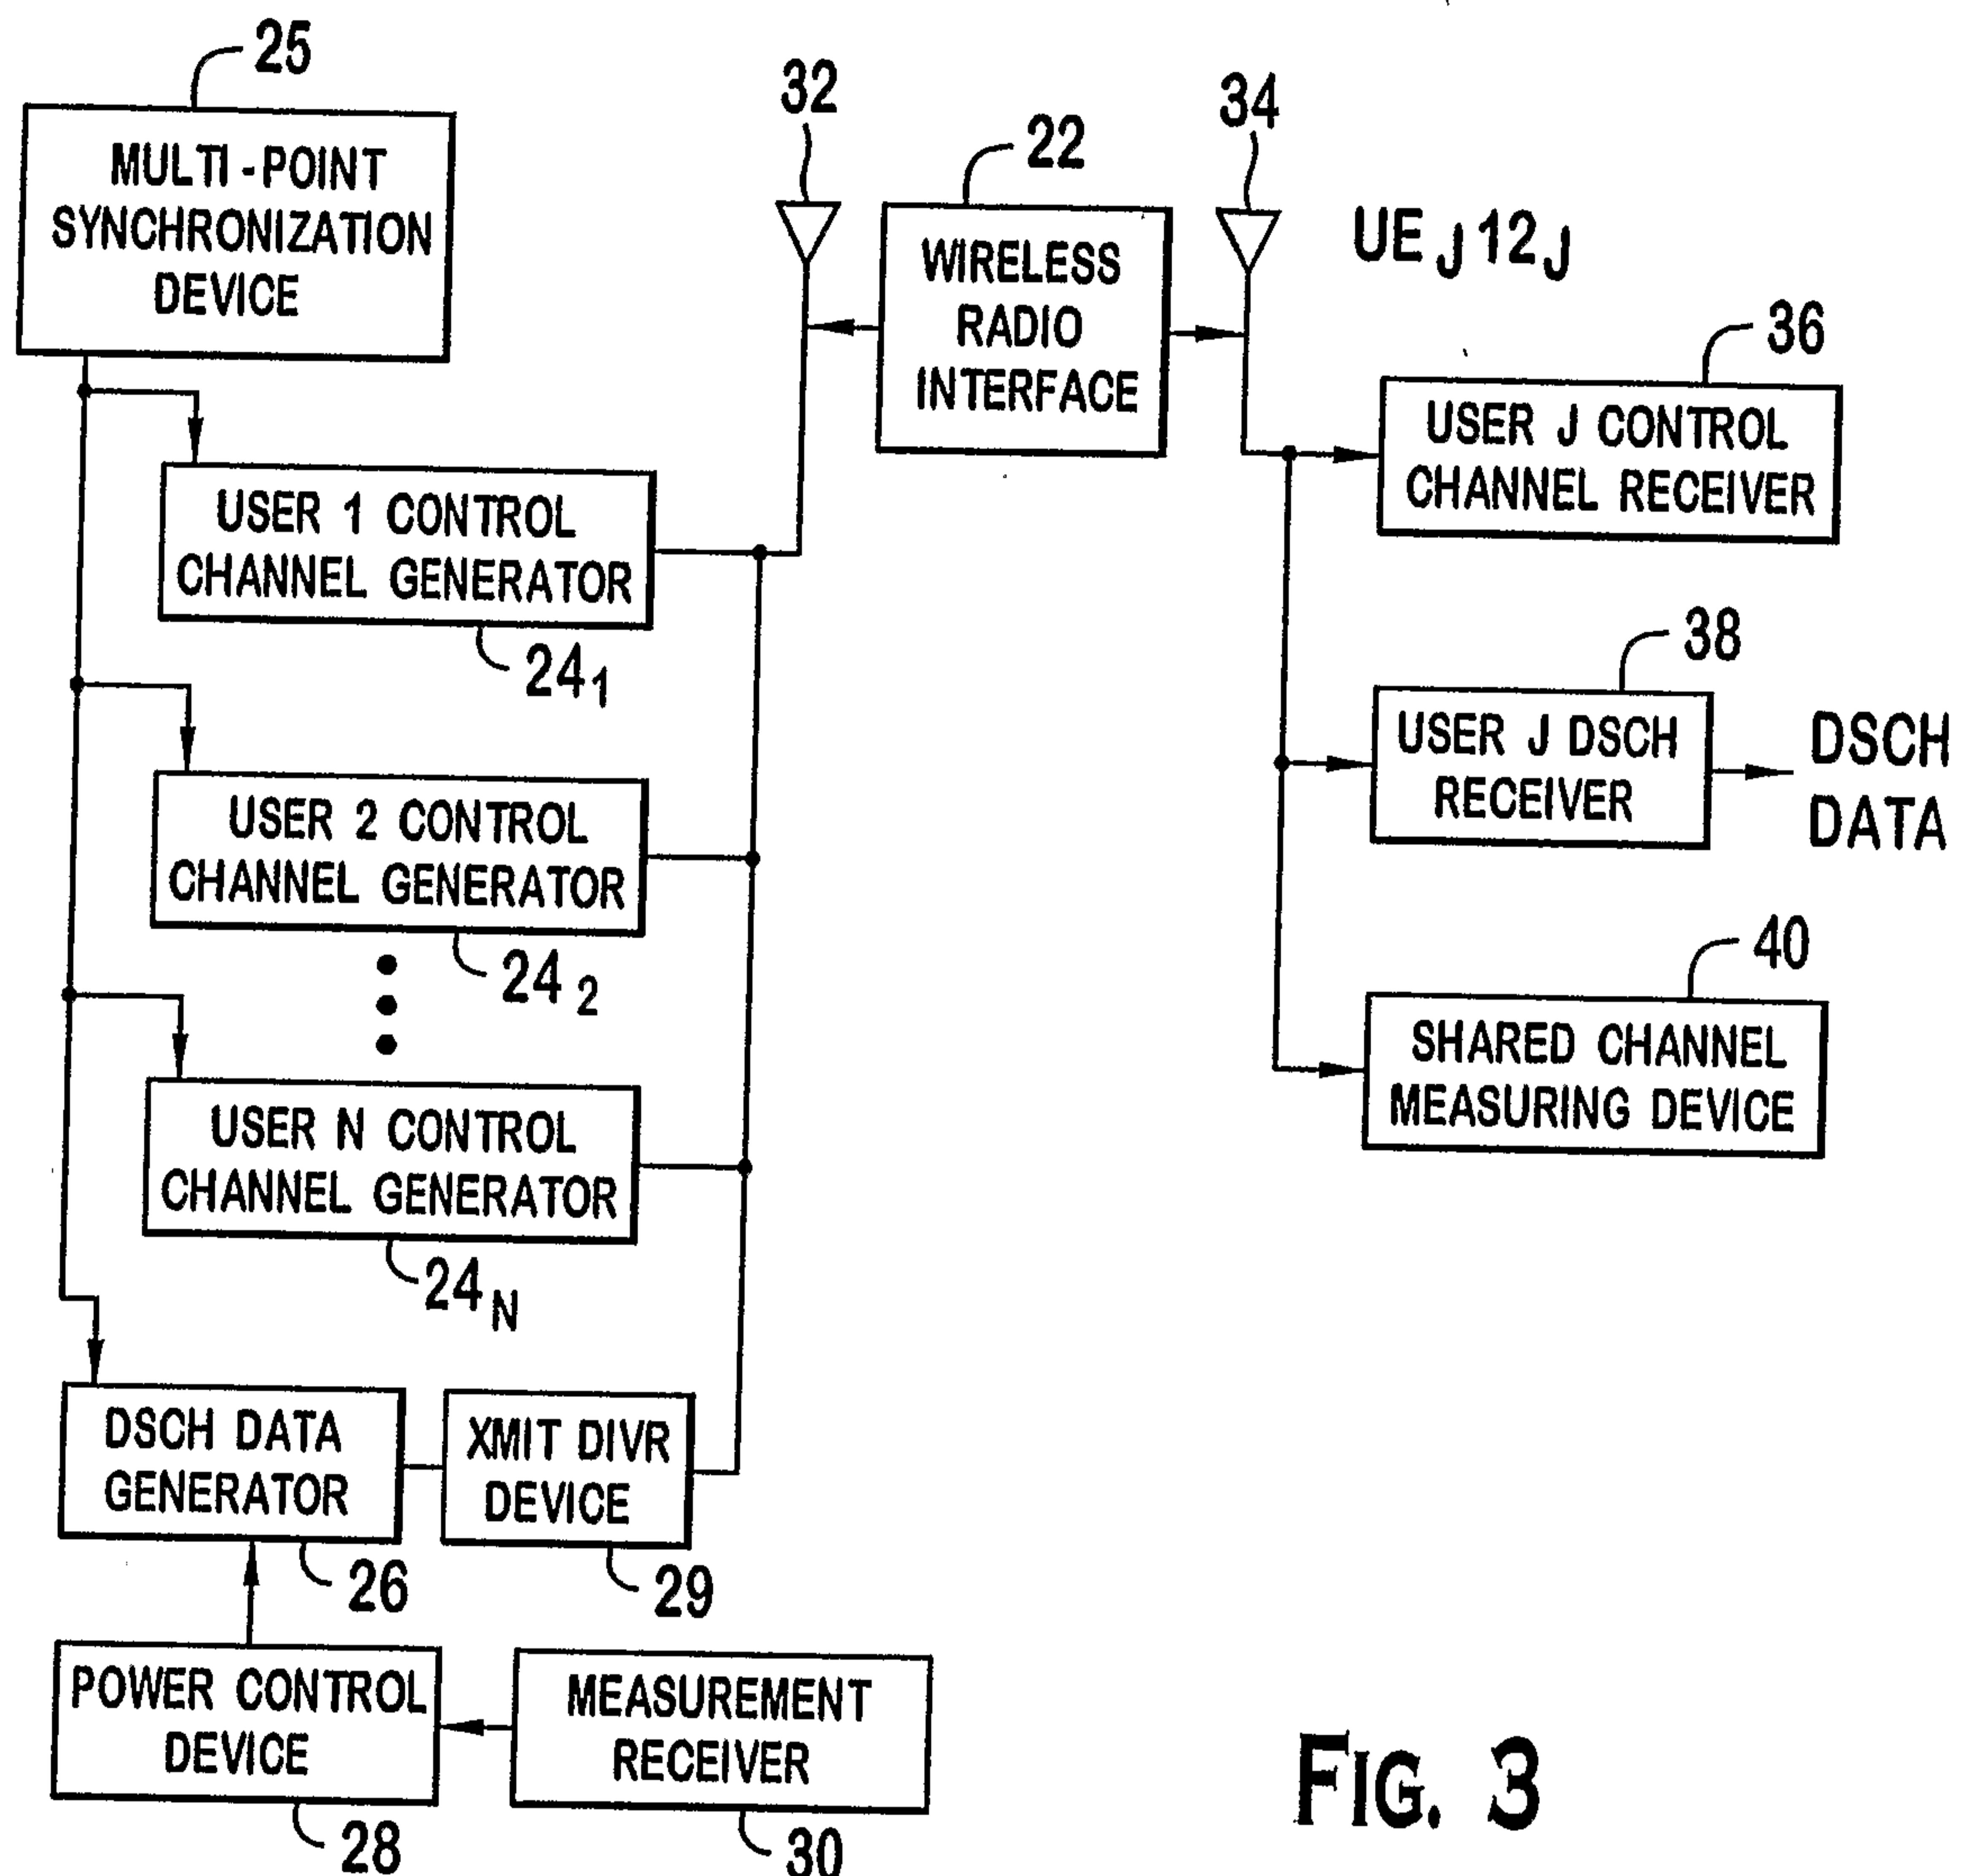


FIG. 3

## RNC 42

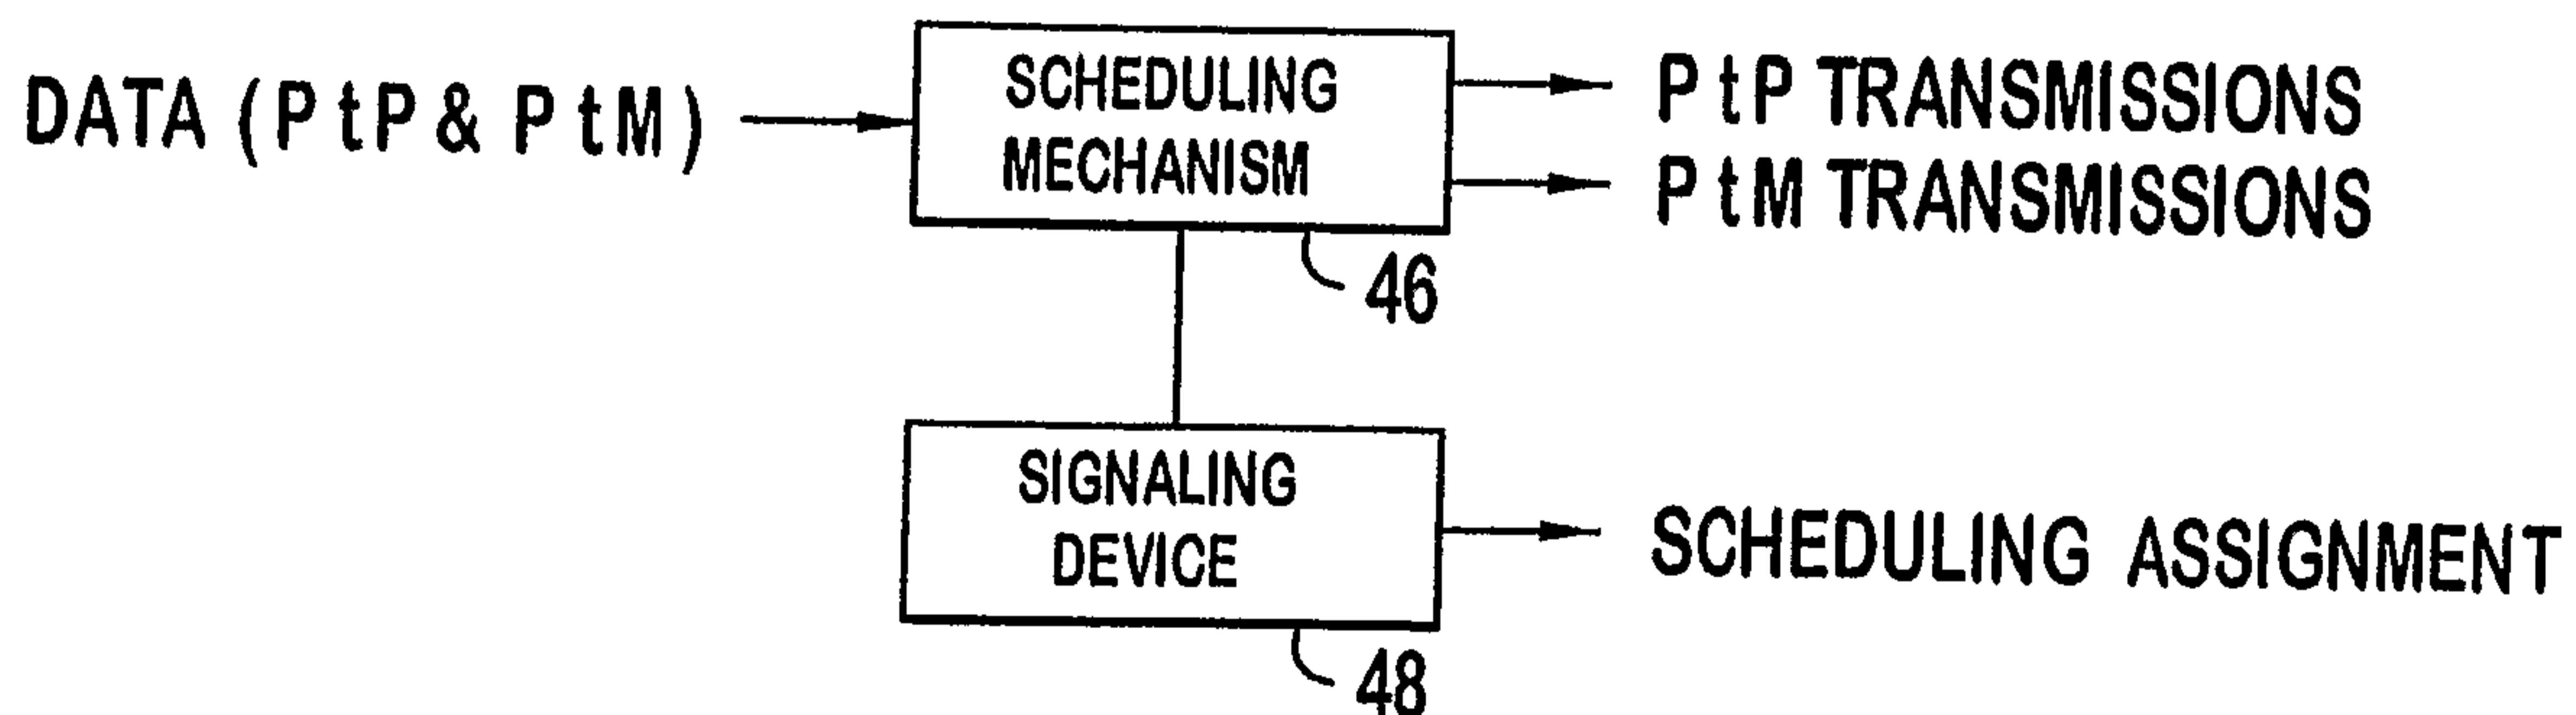


FIG. 4

3 / 7

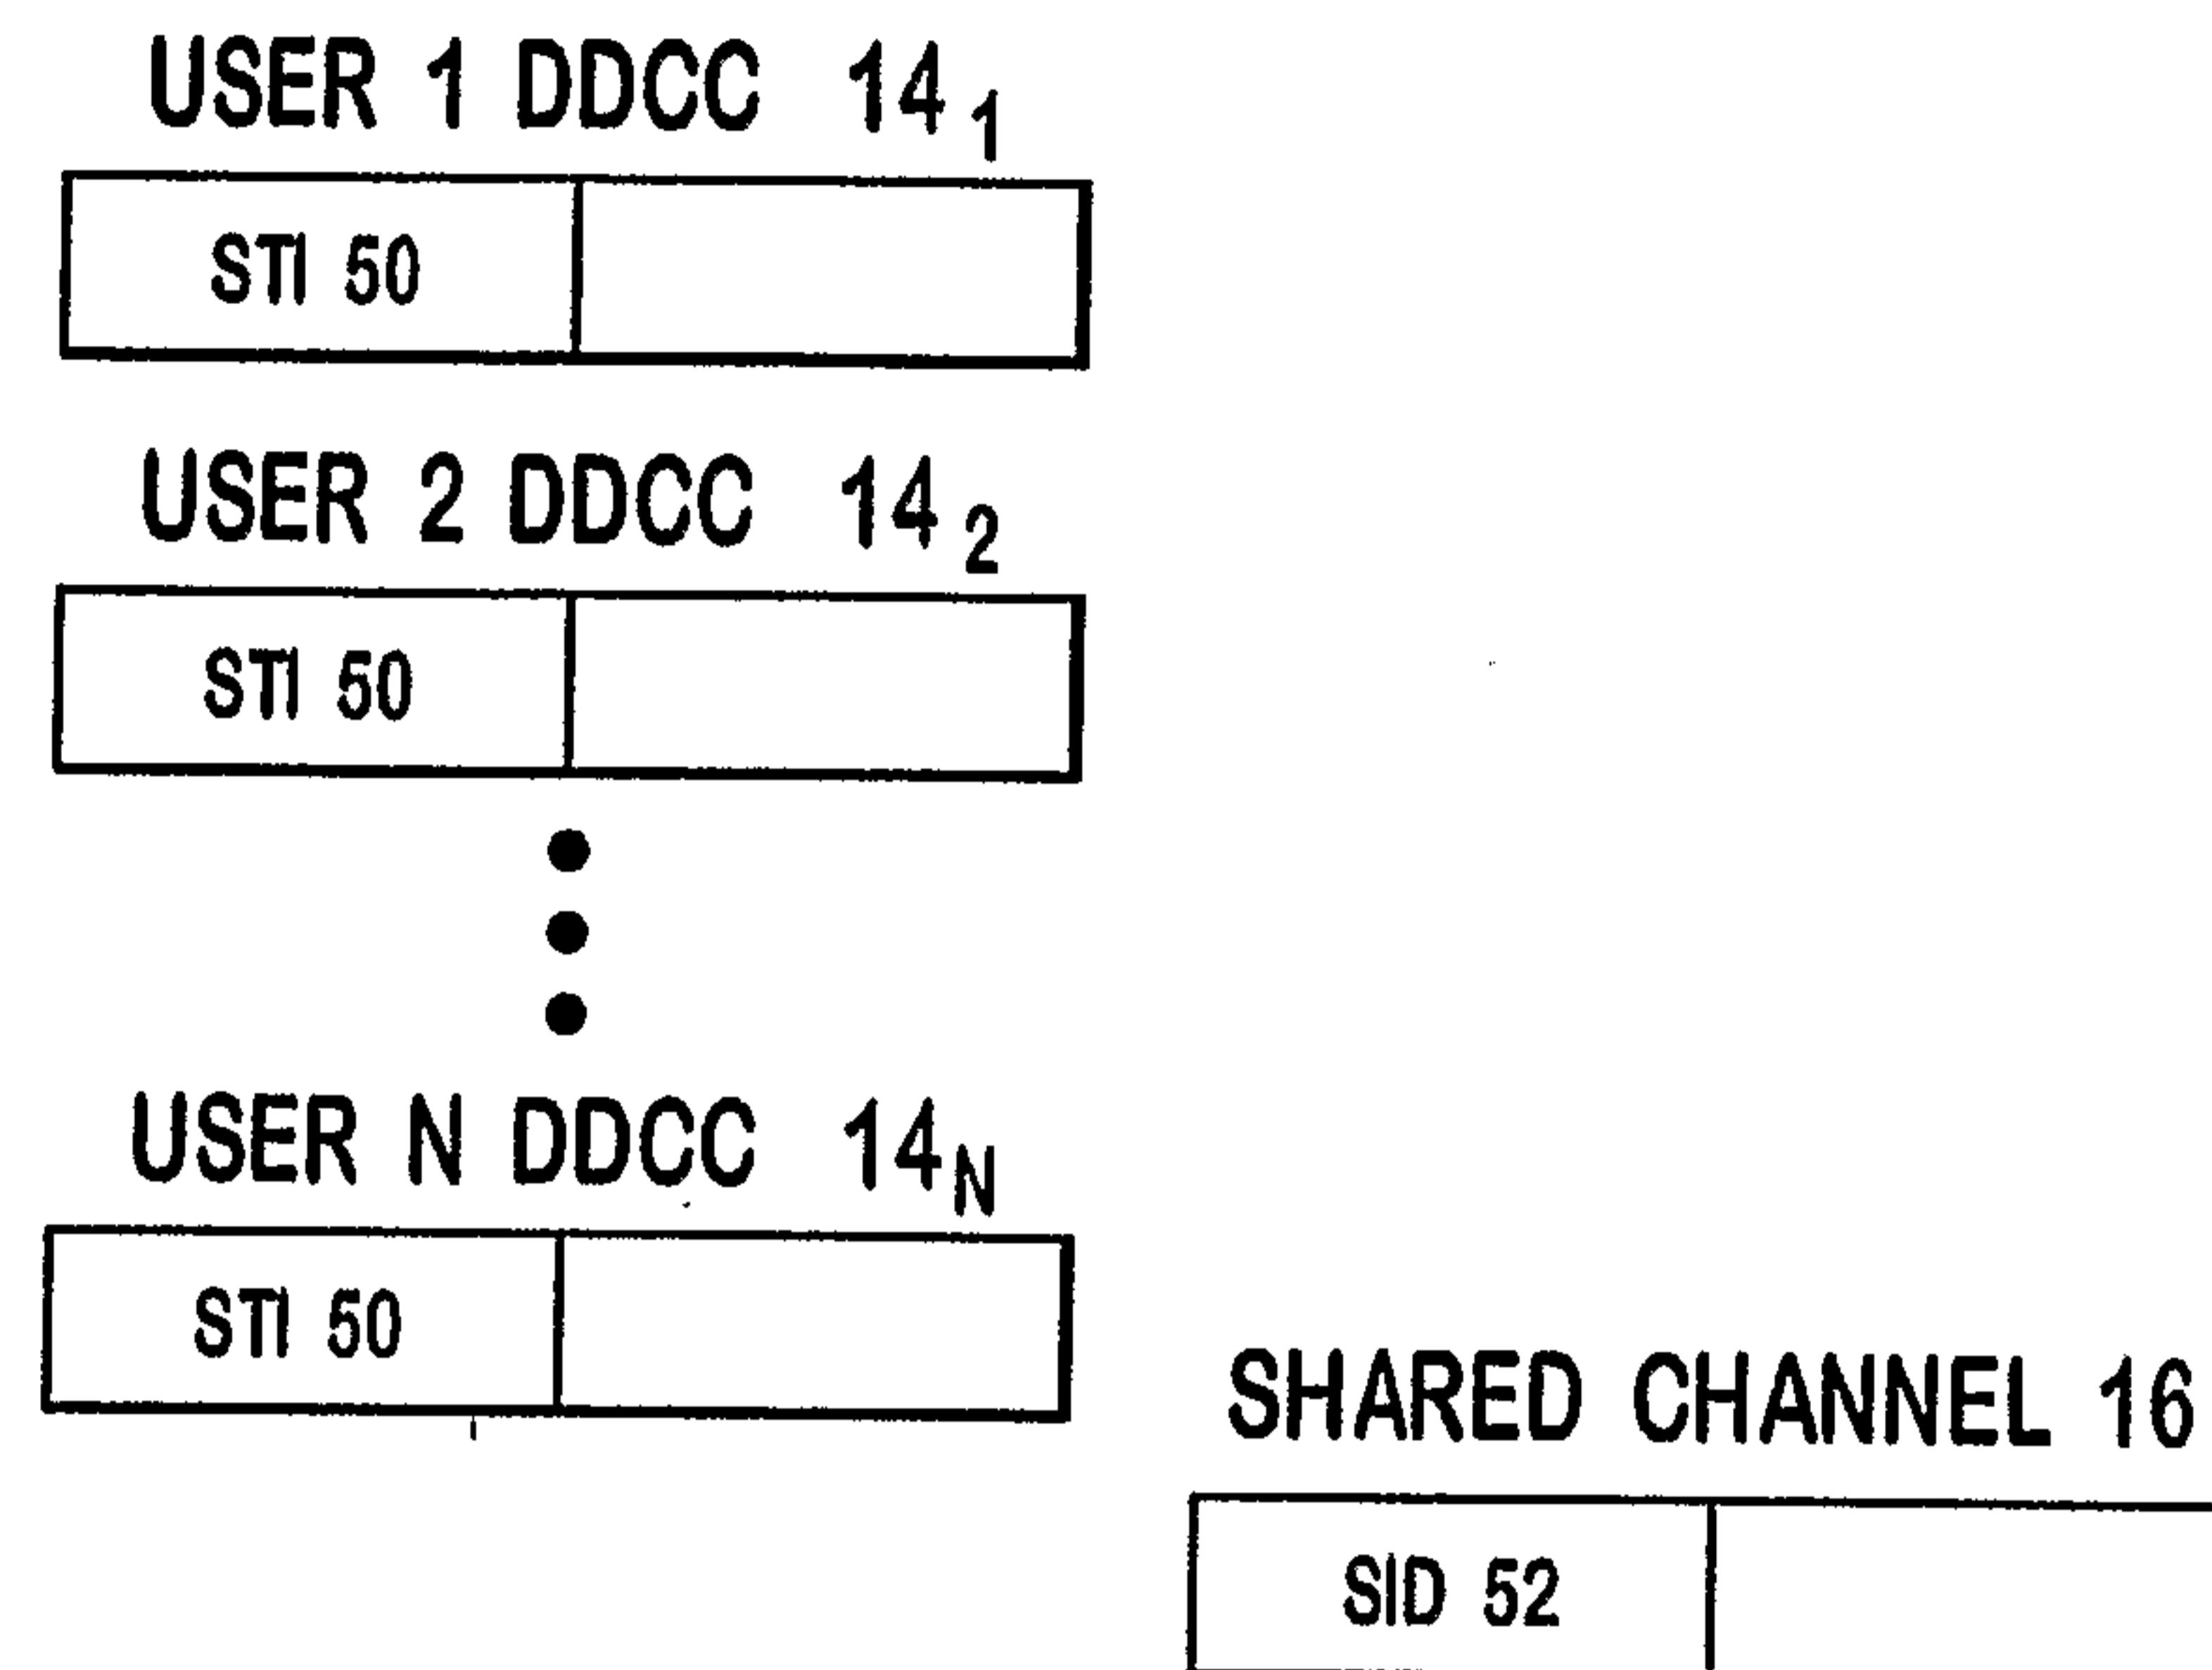


FIG. 5A

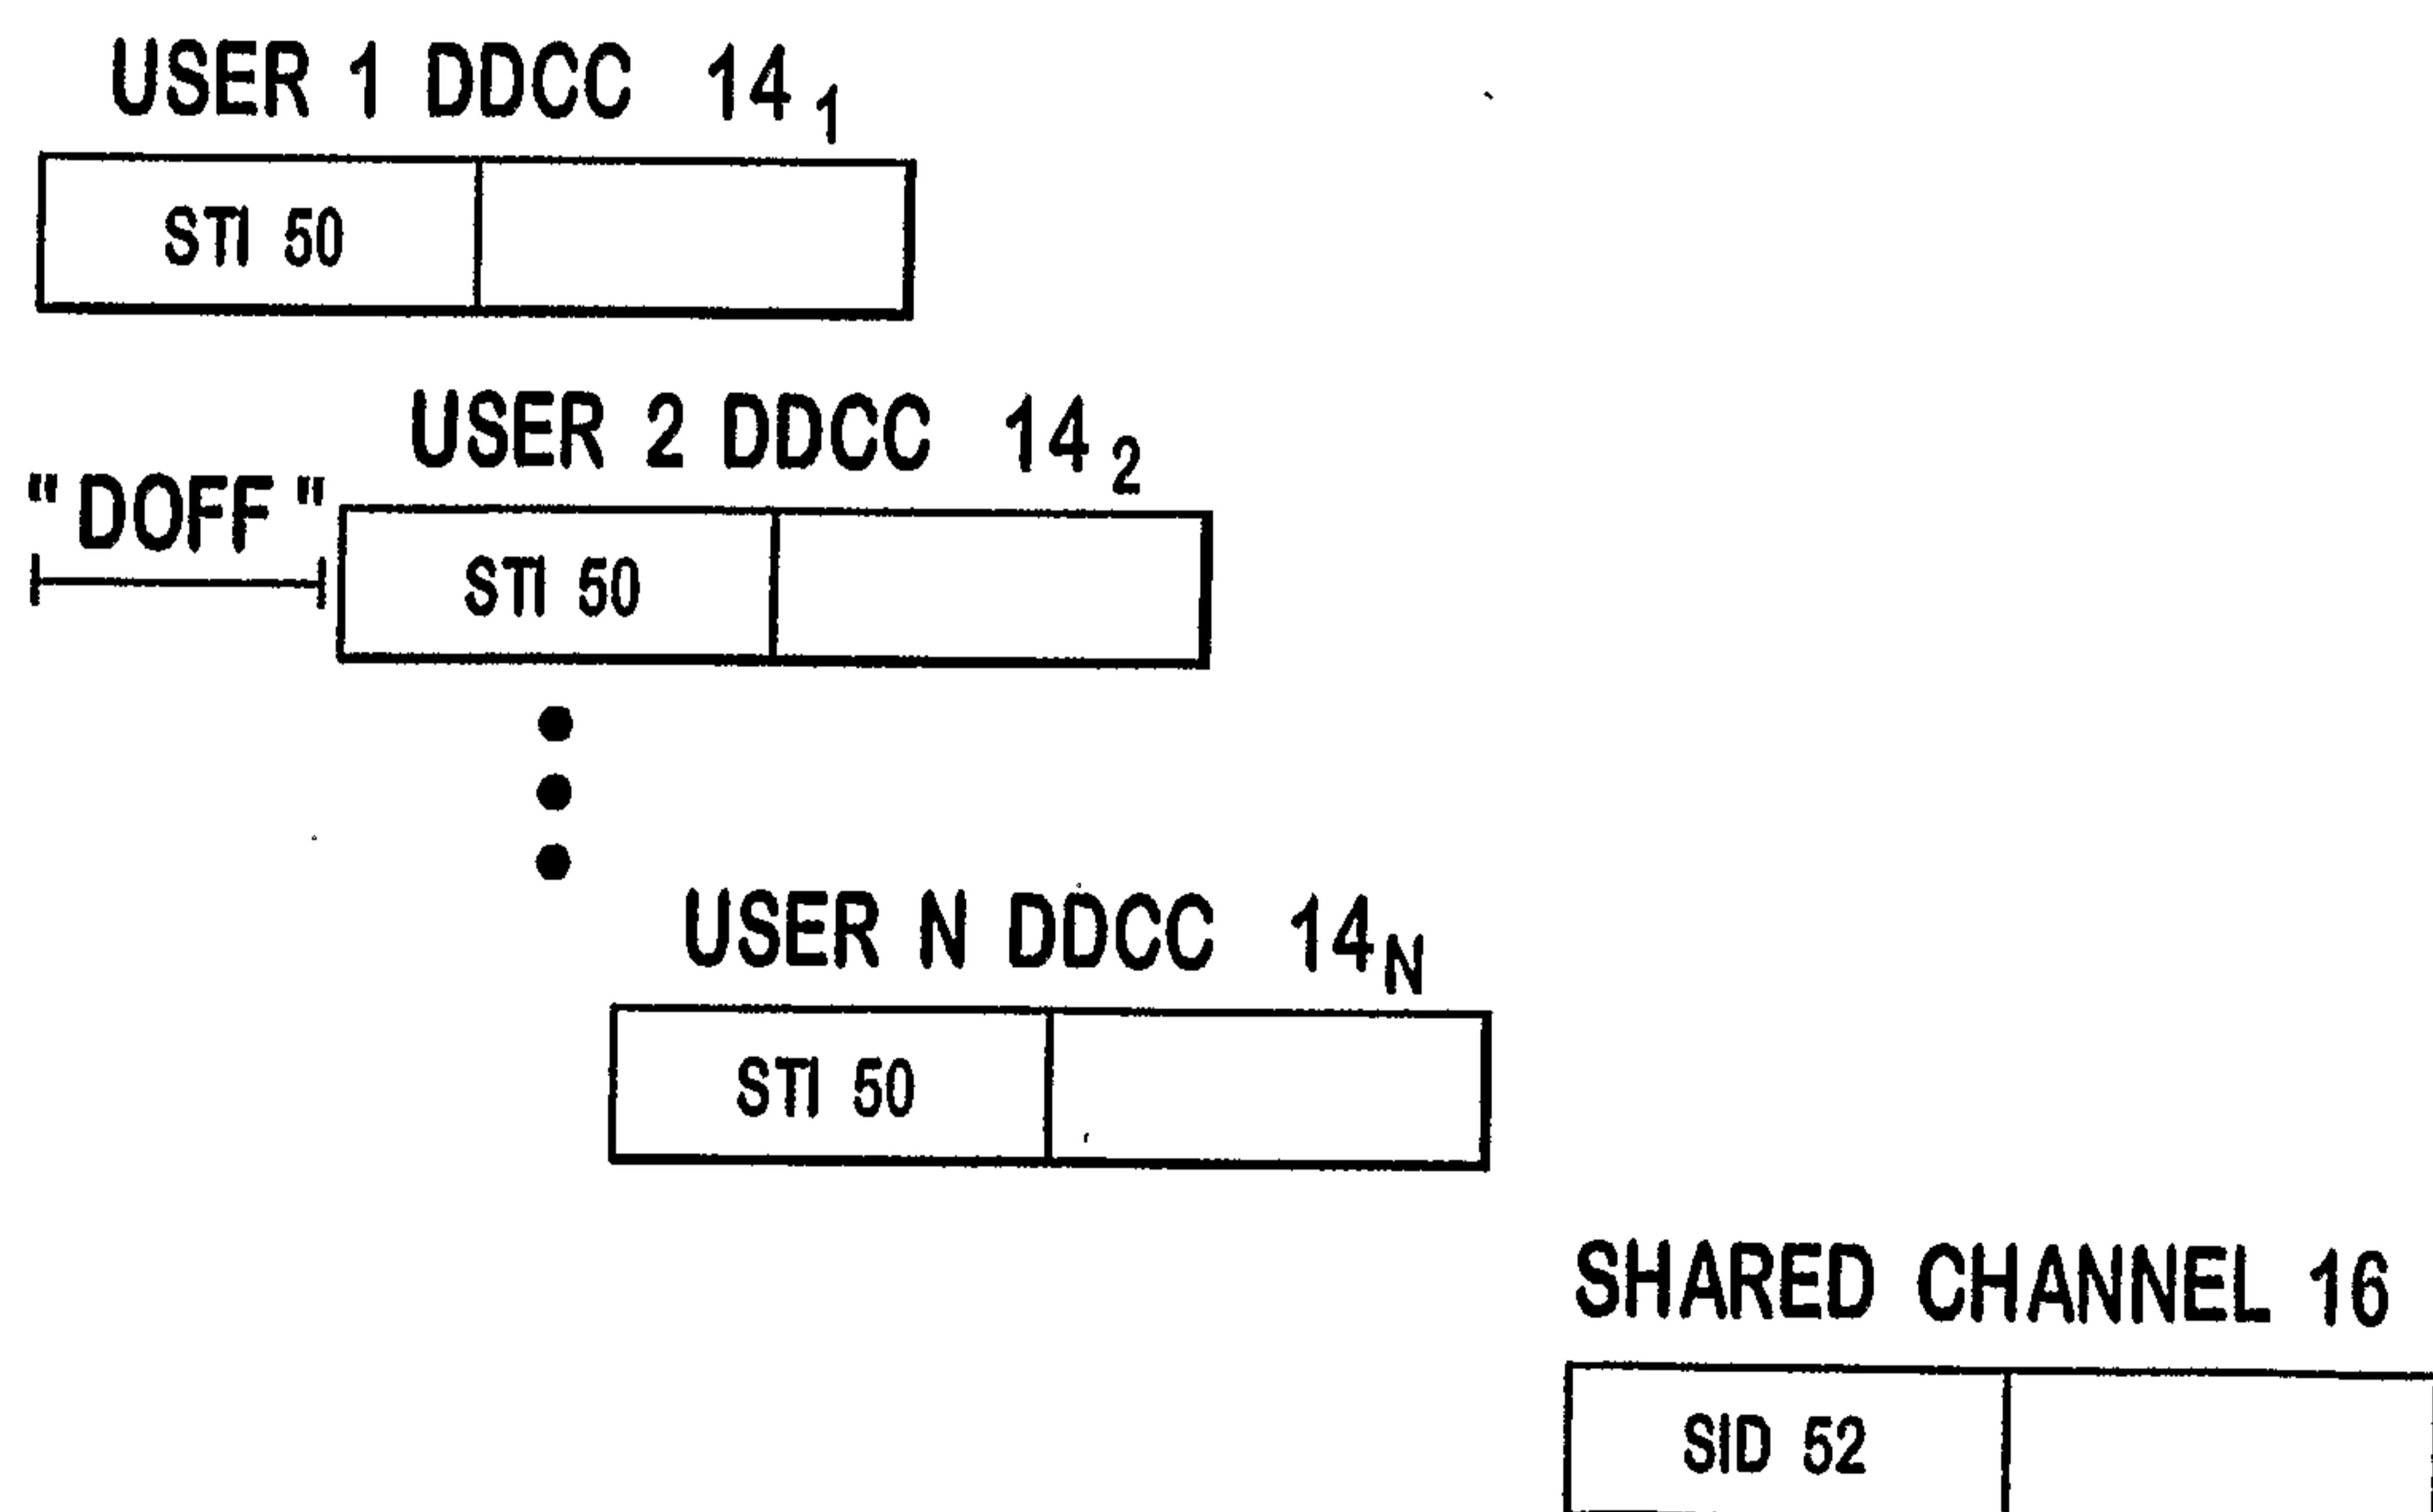


FIG. 5B

4/7

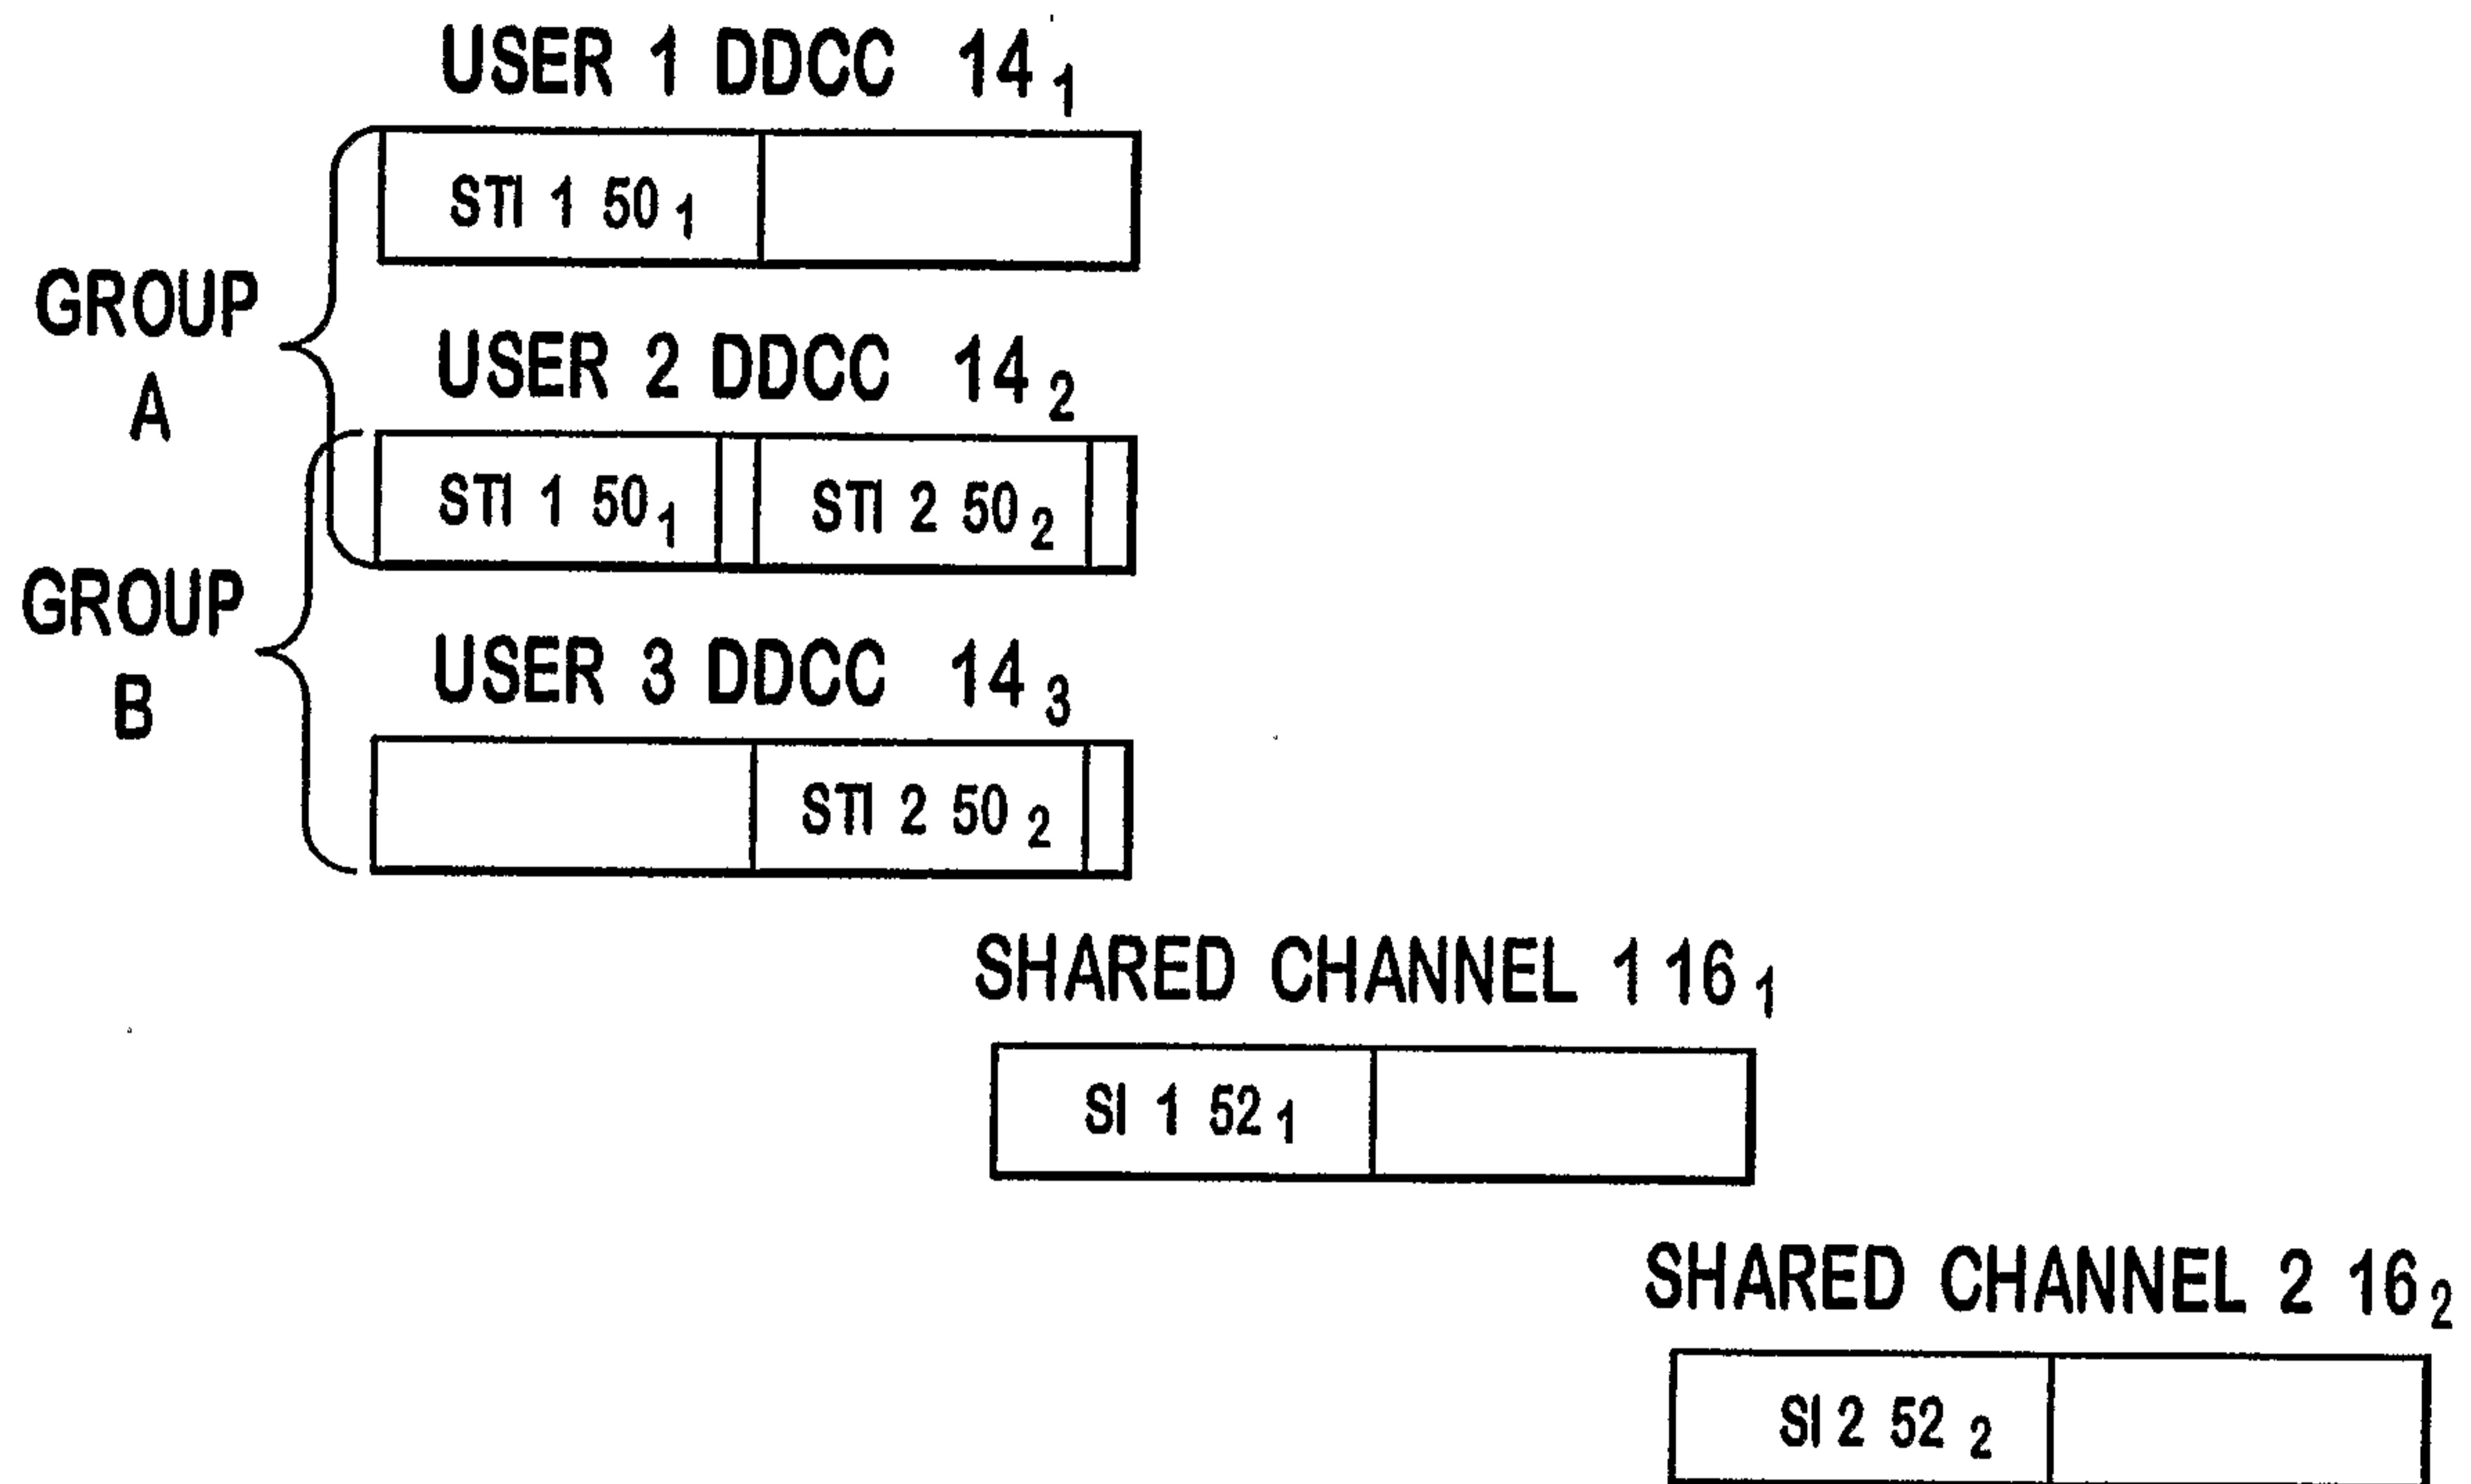


FIG. 5C

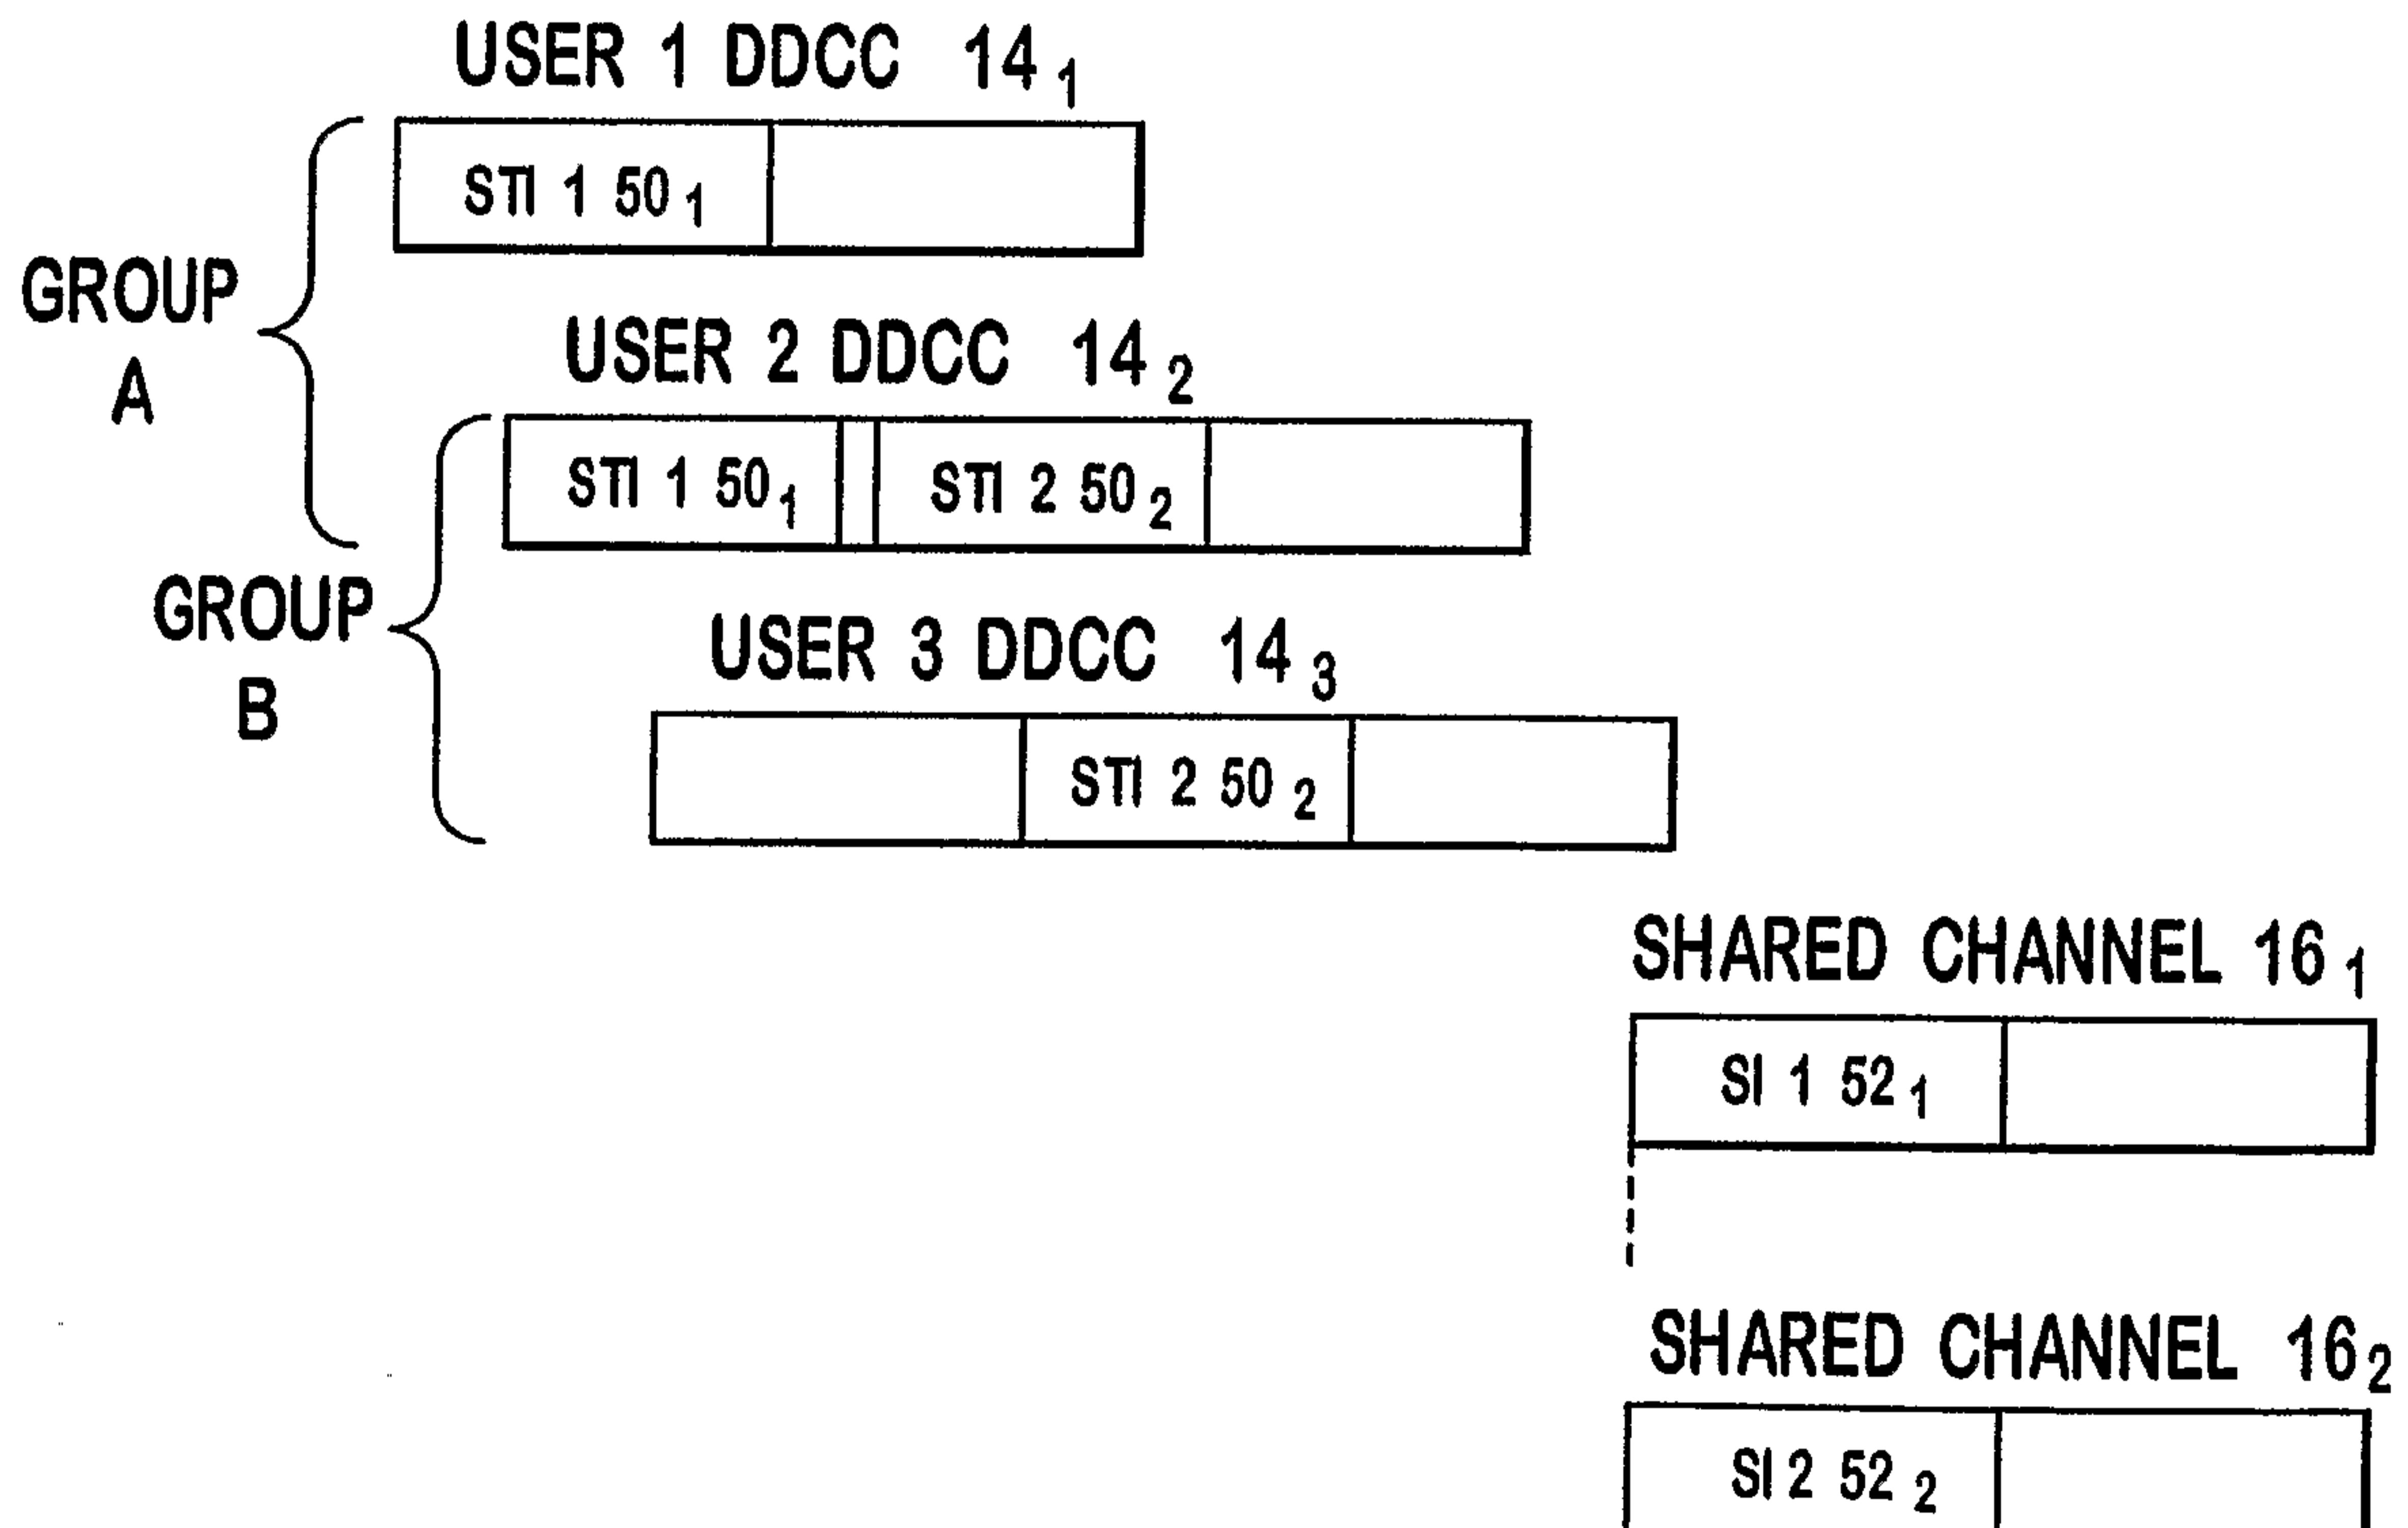


FIG. 5D

5 / 7

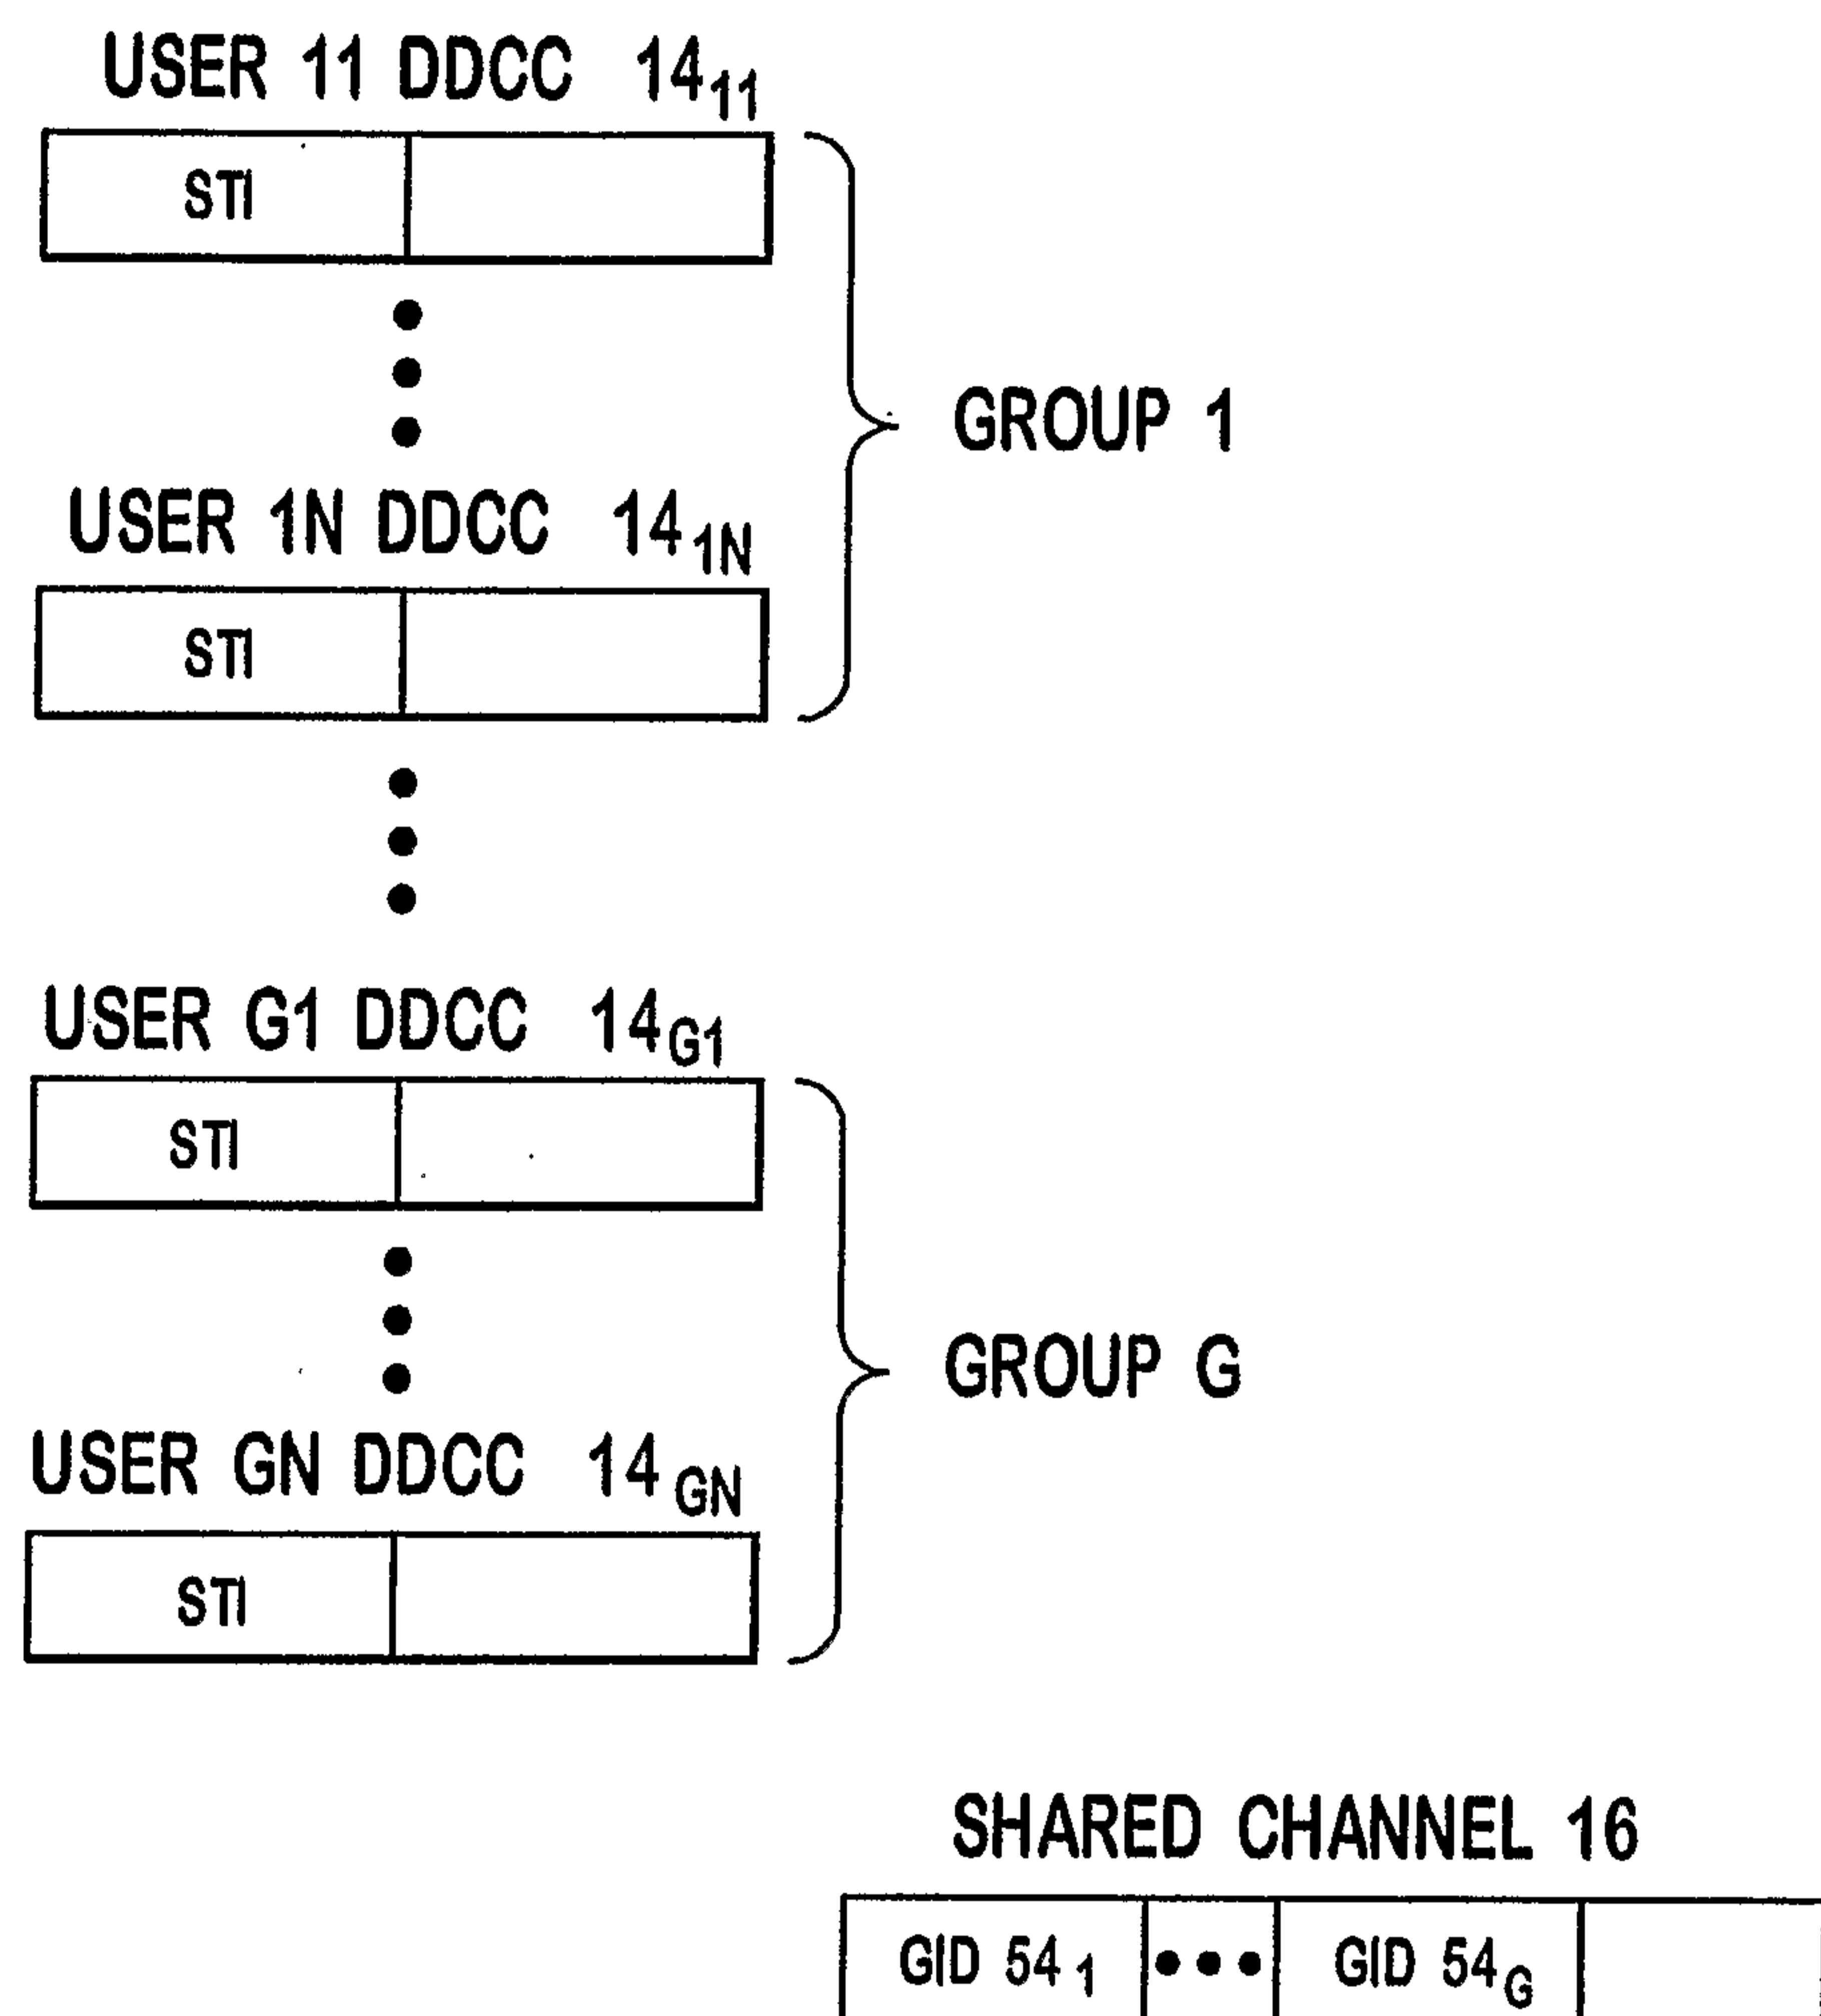


FIG. 5E

6/7

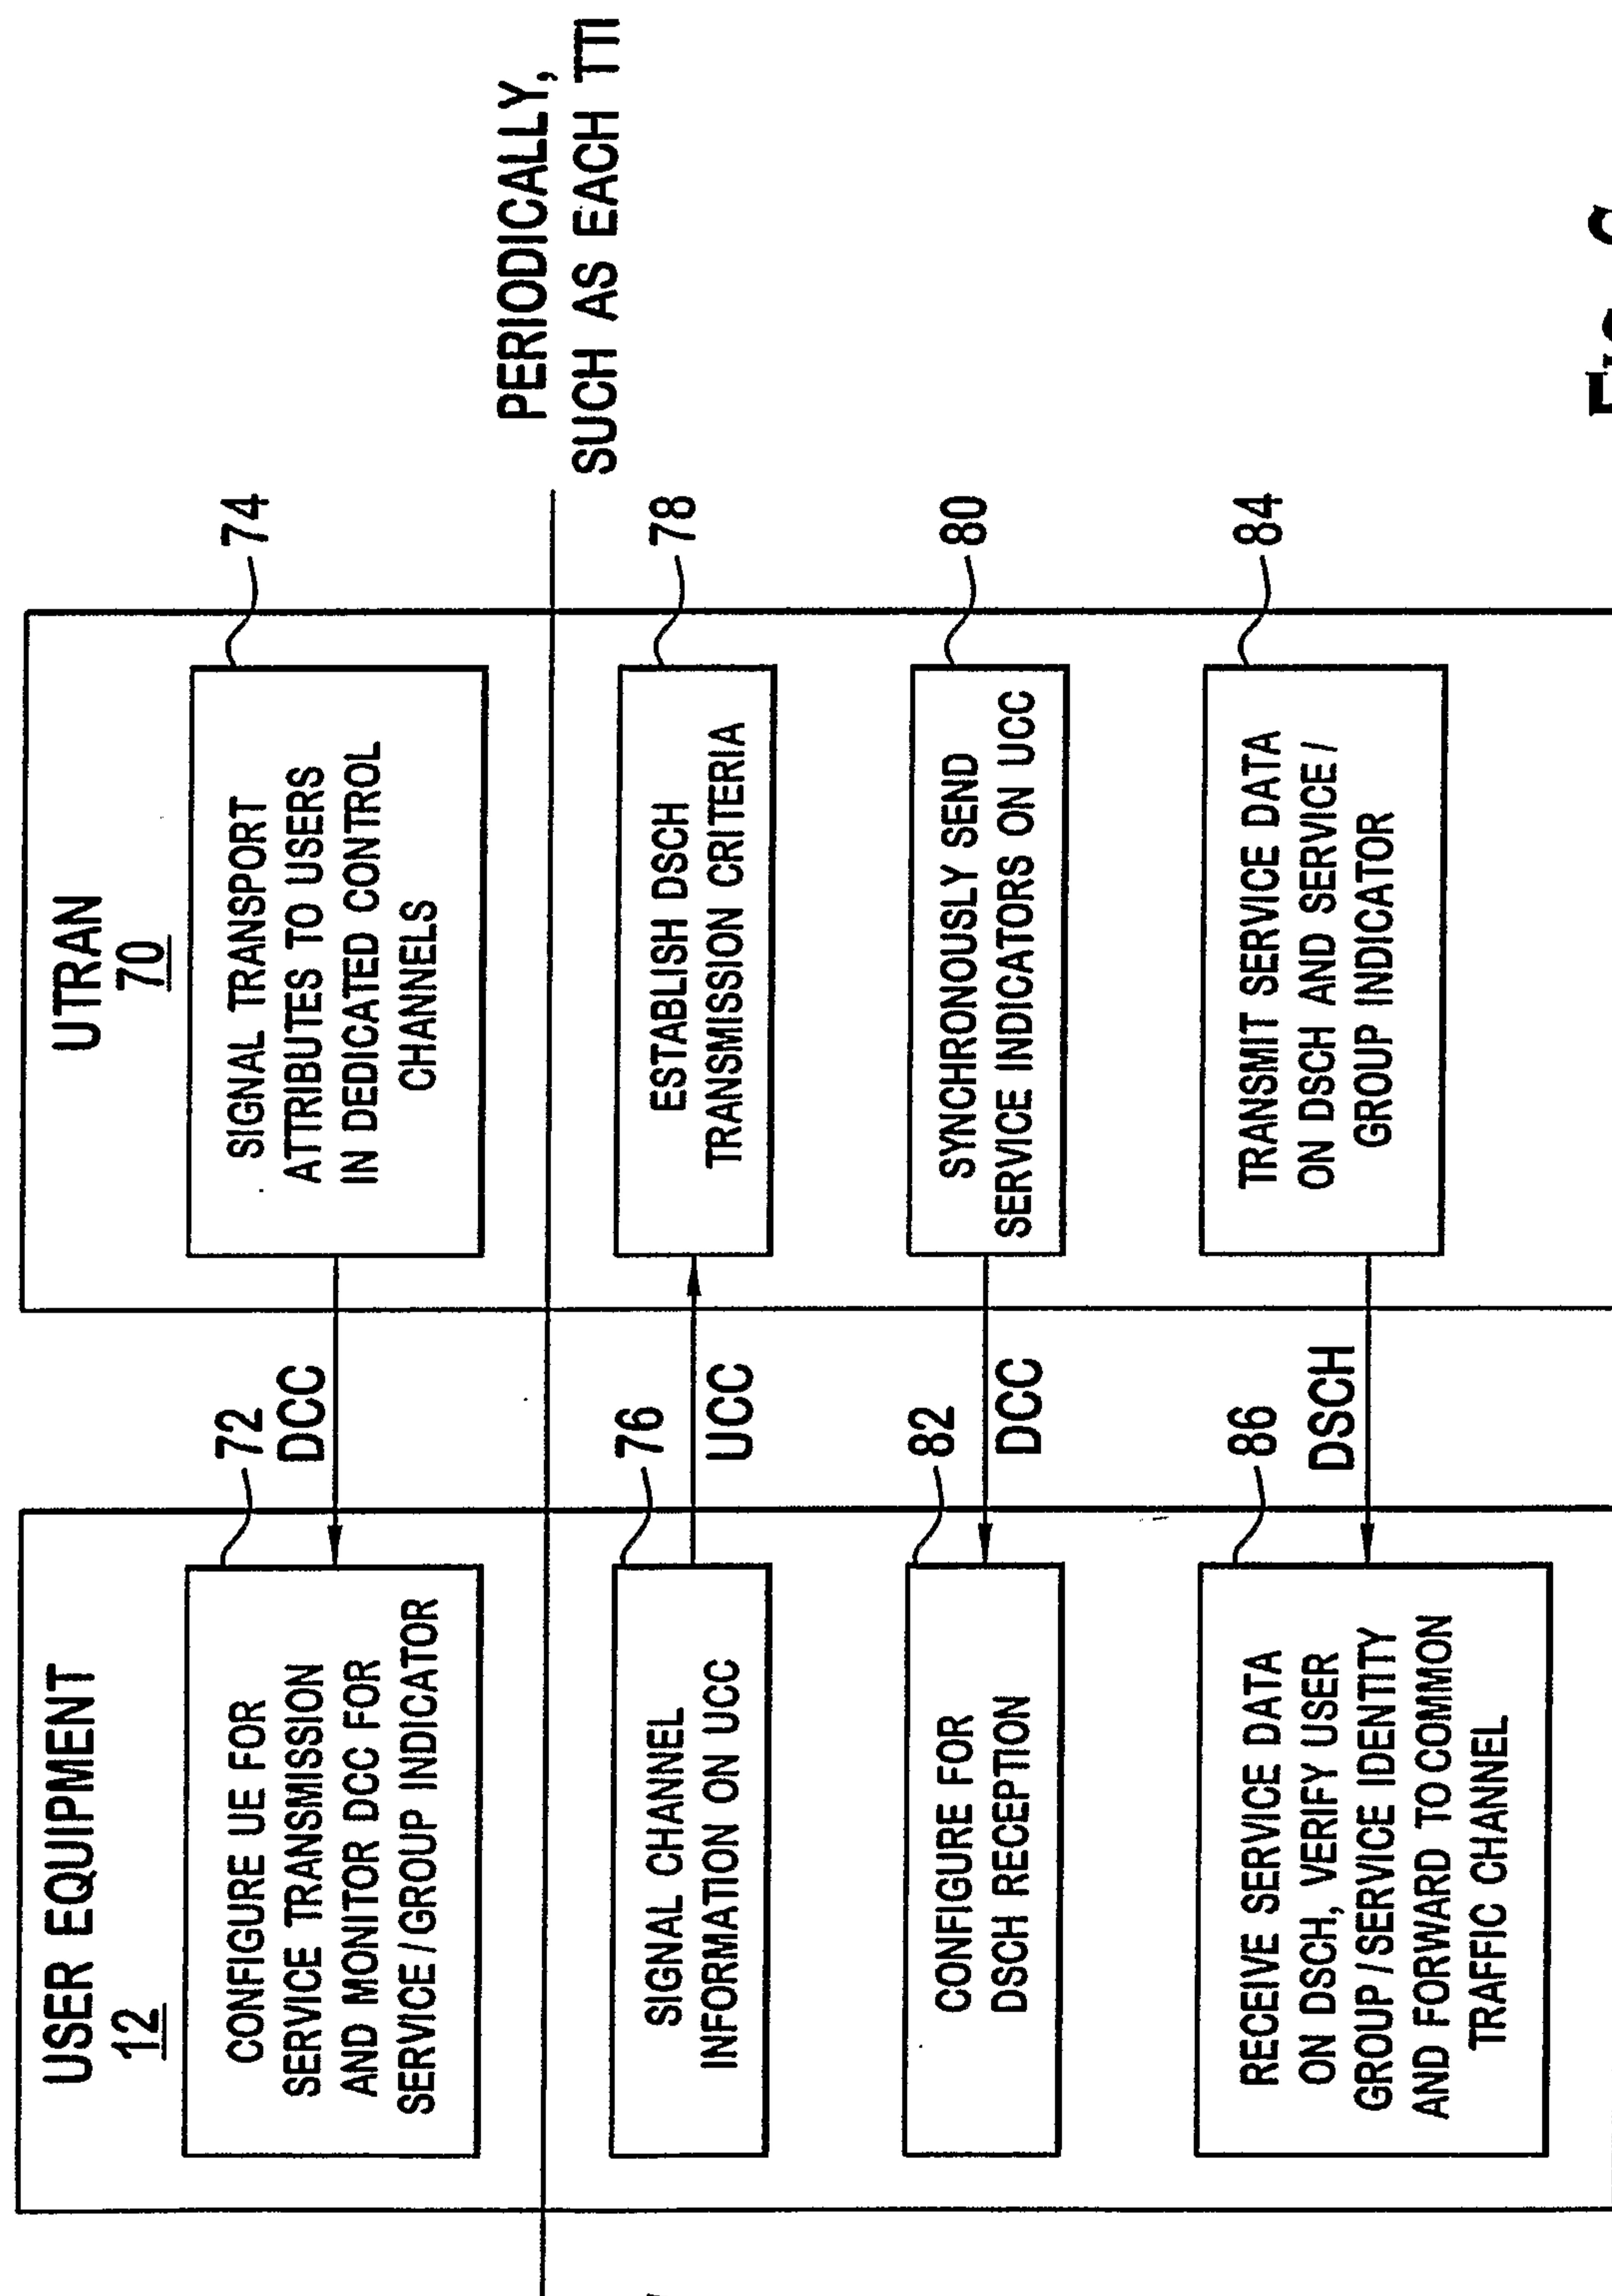


FIG. 6

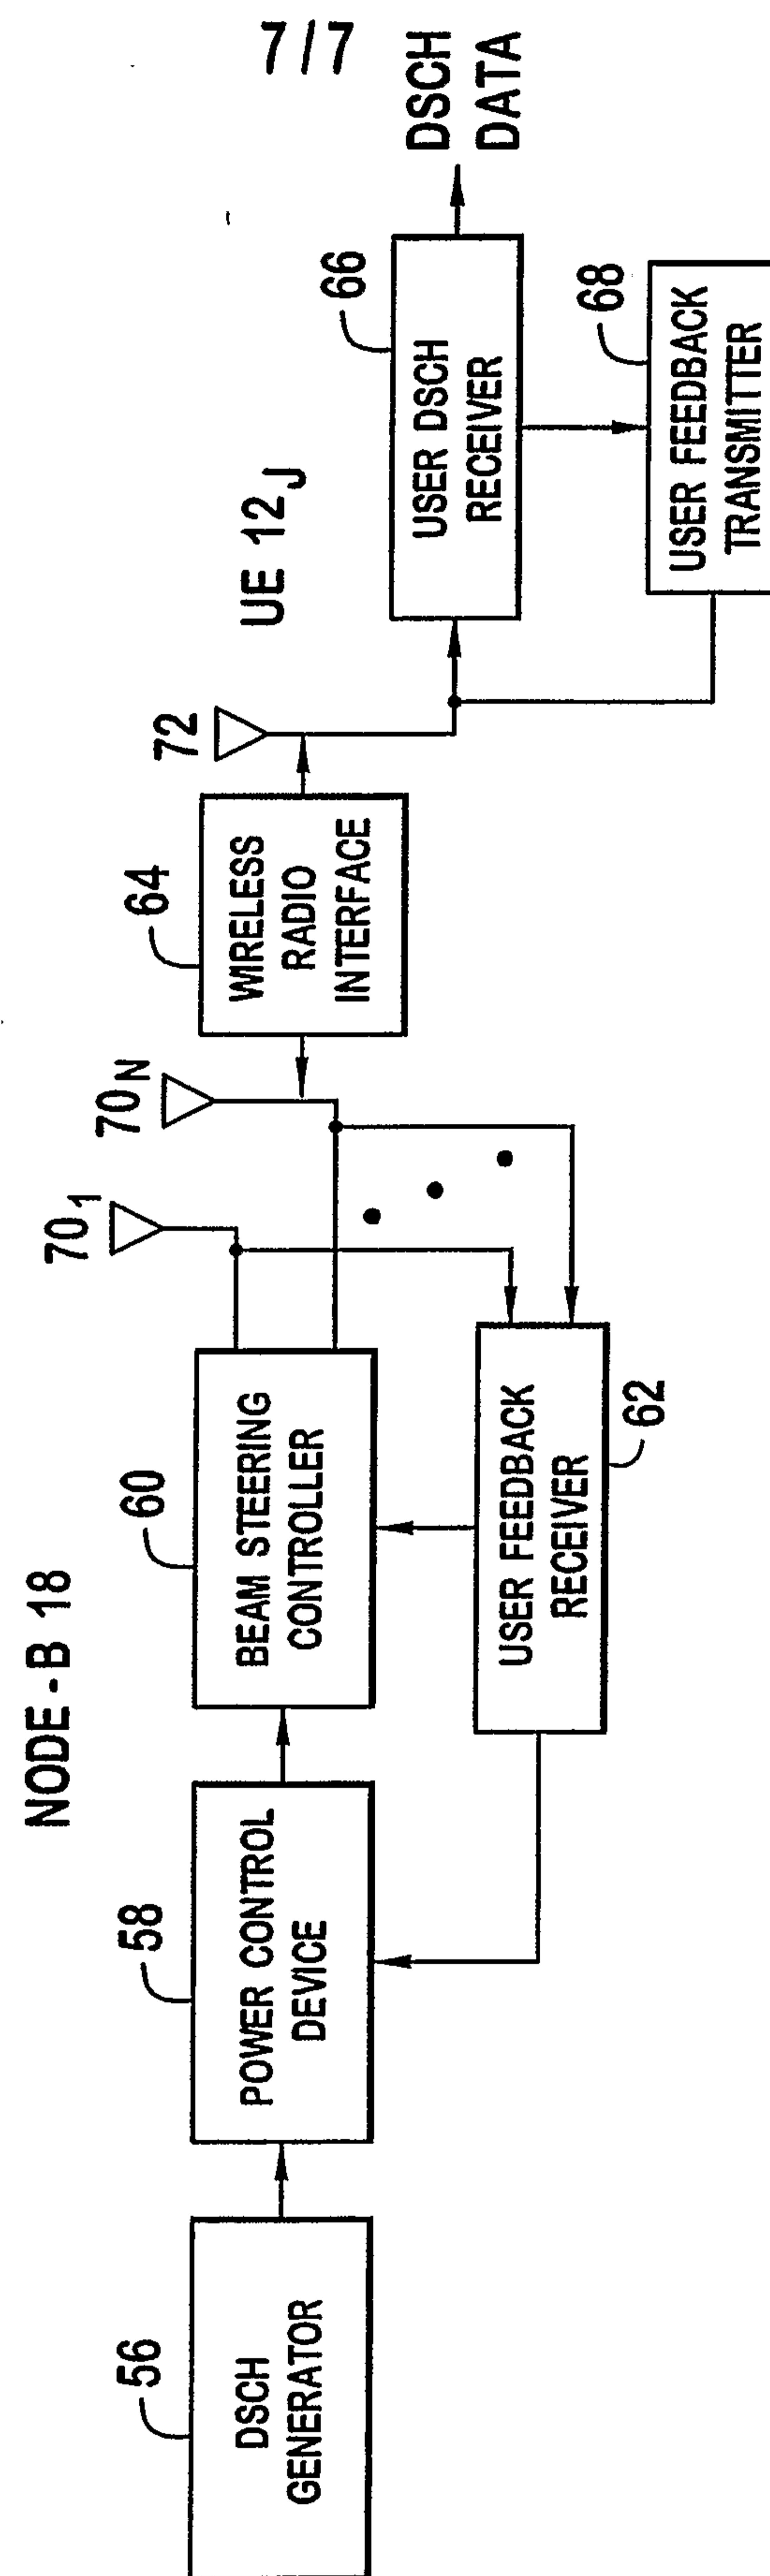


FIG. 7

