

L. HAVASY.
Children's Carriages.

No. 143,624.

Patented Oct. 14, 1873.

Fig. 2


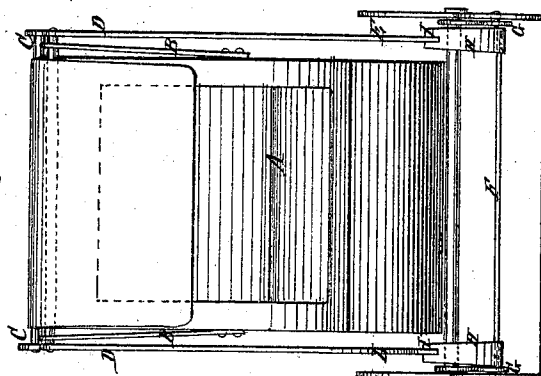


Fig. 1

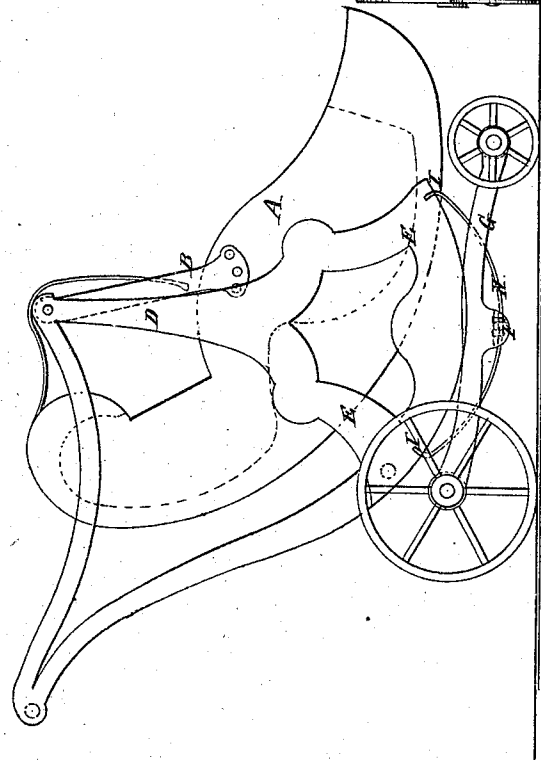

Witnesses:

A. M. Almqvist
Alex F. Roberts

Inventor:

L. Havasy
Per *Wm. L. Roberts*
Attorneys.

UNITED STATES PATENT OFFICE.

LUCINIUS HAVASY, OF HOBOKEN, NEW JERSEY.

IMPROVEMENT IN CHILDREN'S CARRIAGES.

Specification forming part of Letters Patent No. **143,624**, dated October 14, 1873; application filed May 24, 1873.

To all whom it may concern:

Be it known that I, LUCINIUS HAVASY, of Hoboken, in the county of Hudson and State of New Jersey, have invented a new and Improved Child's Carriage, of which the following is a specification:

The invention consists in a novel mode of constructing and combining the parts of a child's carriage, as hereinafter described and claimed.

Figure 1 is a side elevation of my improved child's carriage, and Fig. 2 is a front elevation of it.

Similar letters of reference indicate corresponding parts.

The box or body A, which is constructed mainly in the form of a covered chair with inclosed sides, is suspended by the arms B from the rod C, which is mounted at the top of the standards D, extending up from the lower portion of the frame E about as high as the top of the body, so that it can be swung forward and back whenever it may be desired to do so to quiet the child. For this purpose the

wheels are made small and arranged wide apart, to suspend the body as low as possible, and afford a substantial support for the body when swinging. I propose to mount the frame E on the middle cross-bar F of the wheel-frame G by the light, flat, semi-elliptical springs H, bolted or clipped to said bar at the middle, and connected at the ends to the side pieces of the frame E by their turned-up flanges I, which are notched, and fitted in notches in the frame E, also, in a way to make a very simple and cheap construction.

Having thus described my invention, what I claim as new, and desire to secure by Letters Patent, is—

The combination, with body A, of the arms B, rod C, standards D, frame F G, springs H, and frame E, all constructed and arranged substantially as and for the purpose described.

LUCINIUS HAVASY.

Witnesses:

T. B. MOSHER,
ALEX. F. ROBERTS.