



(12) **DEMANDE DE BREVET CANADIEN**
CANADIAN PATENT APPLICATION

(13) **A1**

(22) Date de dépôt/Filing Date: 2023/03/10

(41) Mise à la disp. pub./Open to Public Insp.: 2024/03/30

(30) Priorités/Priorities: 2022/09/30 (CA3178011);
2023/03/10 (US63319108)

(51) Cl.Int./Int.Cl. *B62D 13/04* (2006.01),
B60G 5/01 (2006.01), *B60W 10/16* (2012.01),
B60W 10/20 (2006.01), *B62D 7/14* (2006.01)


(71) Demandeur/Applicant:
GN TECHNOLOGIES INC., CA

(72) Inventeurs/Inventors:
NOEL, GERALD, CA;
NOEL, ALEXANDRE, CA

(74) Agent: BENOIT & COTE INC.

(54) Titre : SYSTEME DE VOLANTS POUR VEHICULE

(54) Title: VEHICLE STEERING WHEELS SYSTEM

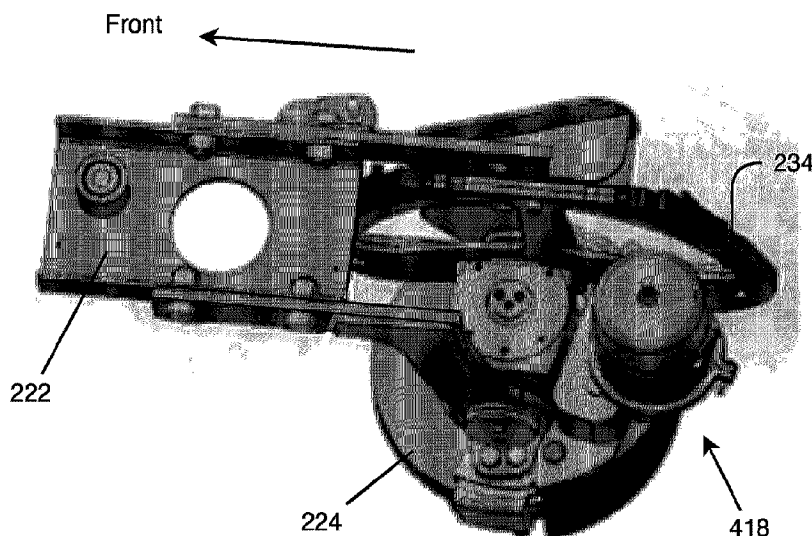

(57) **Abrégé/Abstract:**

A steering wheel system for a semi-trailer is described. The system uses a retractable encoded system releasably connected to a kingpin, a mechanical steer driving system translating the rotation of the kingpin to a hydraulic system, and a non-circular cogged system driven by the hydraulic system adapted to steer the wheels. A hydraulic generator system powered by the rotation of the wheels is used to decrease the electric energy required by the hydraulic system. Other improvements are also present to increase security, decrease weight and improve time expectancy of the components.

ABSTRACT

A steering wheel system for a semi-trailer is described. The system uses a retractable encoded system releasably connected to a kingpin, a mechanical steer driving system translating the rotation of the kingpin to a hydraulic system, and a non-circular clogged system driven by the hydraulic system adapted to steer the wheels. A hydraulic generator system powered by the rotation of the wheels is used to decrease the electric energy required by the hydraulic system. Other improvements are also present to increase security, decrease weight and improve time expectancy of the components.

VEHICLE STEERING WHEELS SYSTEM

BACKGROUND

(a) Field

[0001] The present invention generally relates to steering systems, and more particularly, to a steering system for a trailer in a tractor/trailer combination. More particularly, it relates generally to the field of trailer having steering axle(s) to enhance the turning radius and overall maneuverability of the trailer.

(b) Related Prior Art

[0002] Semi-trailers and trailers are in widespread use throughout the world to transport goods, vehicles, and other cargo. Due to industry demands, trailer length and payload capacities have increased to meet such demands. While increased trailer length and payload capacity allows a greater amount of cargo and heavier payloads to be transported, longer length and heavier trailers are more difficult to maneuver, particularly in congested urban areas.

[0003] To handle the weight distribution associated with long length trailers and/or heavy payloads, trailers can be equipped with additional axles and/or spaced axles. While spaced axles, configured as individual axles or tandem groups of axles, enhance ride quality, they disadvantageously decrease the turning radius of the trailer. Poor maneuverability and decreased turning radius can lead to wear-and-tear on the trailer components, increasing costs and requiring more frequent service and replacement of worn and damaged components. In addition, trailer maneuverability difficulties can, for instance, create road hazards, increase the likelihood of property damage, and add to congestion in urban areas.

[0004] Examples of trailers with steerable axles comprise US patent 2,662,782 from Wilson, US 3,533,644 from Humes, and US 4,955,630 from Hogren. These systems, through their conception, have a gross level of control of the steering angle, without distinction of steering angle between the left wheel(s) and the right wheel(s). Examples also comprises US 4,740,006, US 5,026,085,

US5,071,152, and US 5,392,872 from Ducote that feature a remote-control system that also features no distinction in the wheel steering based on side of the wheel(s). Same applies to the systems described in US 5,289,892 from Notsu, US 7,694,993 and US 8,260,457 from Timmons Jr., and CA 2,399,992 from Guerard.

[0005] In comparison, CA 2,758,217 from Noel teaches to interconnect the steering systems of the wheels from neighbor axles of a trailer located on the same side of the trailer to improve cooperation of the front and the rear axles.

[0006] US 5,308,095 from Fabris involves a gearing system involving angular cog teeth that present technical difficulties of production, that increases production costs, and that increases risks of failures.

[0007] US 6,409,199 from Boyd involves a combination of hydraulic components controlling independently the steering of the left wheel(s) and of the right wheel(s), which improves the risks of the wheels steering at incompatible angles upon occurrence of failures.

[0008] US 7,686,320 from McGhie features connection between neighbor wheels of the same side of the trailer to steer them that is difficult to optimize for different steering angles. It is further sensible to high steering angles risking having the arm connecting two wheels to touch one of the wheels.

[0009] US 8,955,853 from Perkins and US 2011/0202238 from Cebon feature components that are electrically controlled, and sensible to failures of the sensors and of the signal encoding, decoding and transmission.

[0010] US 9,266,557 from Matayoshi involves the control of the steering of the trailer wheels via a steering wheel operated by a user, and thus requiring additional attention and work from the user than what is required with non-steerable wheels trailers. Furthermore, Matayoshi, through its conception of independent controls of the left side and the right side wheels, renders the trailer inoperable as soon as a failure occurs.

[0011] US 9,598,103 and US 10,449,954 From Langenfeld, and US 10,766,521 from Ruebusch, like Matayoshi, involve the control of the steering of the trailer wheels via a steering wheel operated by a user, thus featuring the same disadvantages.

[0012] US 2019/0263448 from Lukka features a complex system involving control arms configured to control the steering angles of the wheels. As the number of steerable axles increases, the system of Lukka becomes complex, and thus expensive for maintenance and replacement.

[0013] It is worth observing that solutions discussed before are configured for single steering axles or more steerable axles. However, most of them do not provide a common solution for both single axle trailers and multi-axle trailers that remain coherent and with the same robustness for all axles.

[0014] It is further worth observing that none of the solutions discussed before feature a failure safe solution that result, in case of a failure of a component, in the trailer remaining operable.

[0015] There is therefore a need for innovative solutions that overcome at least some of the discussed drawback of known trailer steering systems.

SUMMARY

[0016] According to embodiments, there is provided a steering system for steering wheels of a trailer based on a read angle apparatus between a tractor and a trailer.

[0017] According to embodiments, there is provided a steering system for steering wheels of a trailer that directs wheels of the trailer in a path similar to the path of the tractor vehicle. This is also applicable to a series of trailers.

[0018] A solution for reading angle between a tractor and a trailer is also provided.

[0019] A solution for mechanically transmitting a read angle occurring between a tractor and a trailer to a hydraulic system as a linear motion is also provided.

[0020] A solution for exerting specific steering angles to opposed wheels on an axle in a common and synchronous manner preventing ripping for both wheels is also provided.

[0021] A hydraulic power accumulator powered by the rotation of the wheels of a trailer is also provided.

[0022] A solution for decreasing wear of air springs is also provided.

[0023] In some aspects, the techniques described herein relate to a steering system for steering steerable wheels based on an angle registered at a steering direction interface, wherein the registered angle results from hauling the steerable wheels, the steering system including: a steer driving assembly operating at the steering direction interface, the steer driving assembly being adapted to translate a registered angle at the steering direction interface into a longitudinal displacement of an arm member; and a steering axle including: an axle structure; a rotatable central piece mounted to the axle structure, the central piece being rotatable about a central axis and connected to the arm member; and a first rotatable side piece mounted to the axle structure, the first side piece being rotatable about a first side axis, a second rotatable side piece mounted to the axle structure, the second side piece being rotatable about a second side axis, wherein a steerable wheel is rigidly connected to each one of the first and the second rotatable side pieces; wherein each of the first and the second rotatable side pieces are driven by the rotatable central piece, wherein the rotatable central piece is interfacing with the first rotatable side piece and with the second side piece along a non-circular interface relative to the central axis, and wherein the steering system exerts a specific steering direction to each of the steerable wheel rigidly connected to first and the second rotatable side piece in response to a registered angle.

[0024] In some aspects, the techniques described herein relate to an angular encoder system for registering an angle at a steering direction interface about a hauling attachment between a hauling saddle and a kingpin, the angular encoder system including: a releasable clinging assembly including a clinging component adapted to releasably cling to the kingpin, and a releasing means adapted, when undergoing an external force, to pull away the clinging component from the kingpin; an angular encoder; and a connector coupling the releasable clinging assembly to the angular encoder.

[0025] In some aspects, the techniques described herein relate to a mechanical steer driving assembly for a trailer, the mechanical steer driving assembly being for transforming a change of hauling angle between a hauling saddle and a kingpin into a linear displacement substantially longitudinal to the trailer, the mechanical steer driving assembly including: an interfacing piece interfacing with the saddle, the interfacing piece being adapted to adopt direction of the saddle; a cog railway connected to the piece; a support structure to which is slidably mounted the cog railway; at least one rotatable gear mounted to the support structure, one of the at least one rotatable gear interfacing with the cog railway, with the one rotatable gear being exerted in rotating when the cog railway slides relative to the support structure; a hauling angle transformation mechanism mounted to the support structure and connected to a terminal gear of the at least one rotatable gear, the hauling angle transformation mechanism being adapted to receive a change in the hauling angle through the at least one rotatable gear and to translate it into a linear motion; and a transmission component connected to the hauling angle transformation mechanism, the hauling angle transformation mechanism being adapted to undergo the linear.

[0026] In some aspects, the techniques described herein relate to a steering axle to be mounted to a vehicle having a longitudinal axis, the steering axle including: an axle structure; a left steering piece rotatably mounted to the axle structure and adapted to have a left steerable wheel mounted thereto having a

rotation axis; a right steering piece rotatably mounted to the axle structure and adapted to have a right steerable wheel mounted thereto a rotation axis; and a central piece rotatably mounted to the axle structure about a pivot axis, the central piece having a left interface and a right interface symmetric to each other, the left interface and the right interface having a neutral position opposed to each other relative to the pivot axis of the central piece, wherein, in the neutral position, the rotation axes of the steerable wheels being parallel each other, and wherein the left interface and the right interface are non-symmetrical relative to their respective neutral position.

[0027] In some aspects, the techniques described herein relate to a steering driving assembly for a vehicle including a) a bogie including a steering axle and b) a chassis movable relative to the bogie, wherein the steering driving assembly is adapted to transmit a steering movement longitudinal to the vehicle to the steering axle, the steering assembly including: a trailer-mounted (stm) assembly including a stm body and a stm gear assembly mounted to the stm body, the stm gear assembly including a first stm gear and a second stm gear interfacing with the first stm gear; a bogie-mounted (bm) assembly including a bm body and a bm gear assembly including a fix bm gear mounted to the gm body, and a mobile bm gear interfacing with the first bm gear, a gear connecting arm connecting the fix bm gear to the mobile bm gear and allowing the mobile bm gear to partially revolve around the fix bm gear, wherein the mobile bm gear is mounted to a mobile shaft adapted to connect to a downstream steer driving arm; an upstream cog rail and a downstream cog rail that are mounted to the trailer-mounted assembly and the bogie-mounted assembly, wherein the upstream cog rail is adapted to connect to an upstream steer driving arm movable longitudinally to the vehicle, and wherein the upstream cog rail and the downstream cog rail interface with each other through the stm gear assembly; wherein the steering driving assembly allows displacement of the bogie-mounted assembly along the cog rails without displacement of the cog rails relative to each other, and wherein the steering

driving assembly is adapted to communicate movement of the upstream steer driving arm to the downstream steer driving arm therethrough.

[0028] In some aspects, the techniques described herein relate to a hydraulic power accumulator powered by rotation of wheels under an external force, the hydraulic power accumulator being fluidly connected to a hydraulic circuit including a hydraulic actuator powered with pressurized liquid, the hydraulic power accumulator including: a hydraulic generator mounted to the wheel and fluidly connected to the hydraulic circuit, the hydraulic generator being driven by the rotation of the wheel to pump liquid into the hydraulic circuit; a passive pressurized reservoir adapted to receive and store liquid pumped by the hydraulic generator, wherein pressure of liquid increases with its stored volume; controls adapted to use liquid under pressure from the pressurized reservoir to power a hydraulic component connected to the hydraulic circuit.

[0029] In some aspects, the techniques described herein relate to an air suspension for a vehicle including a chassis, including: a structure connected to wheels, the structure having a generally flat face; a shock absorber mounted to the structure and connected to the chassis; and an air spring mounted to the structure and connected to the chassis, wherein the structure includes a mounting plate for the air spring that is at an angle relative to the flat face of the structure.

[0030] In some aspects, the techniques described herein relate to a steering converter adapted to convert a steering-tractor movement into a steering movement steering steerable wheels, the steering converter including: a structure; a first component adapted to be exerted the steering-tractor movement relative to the structure in a first direction, the first component including a channel that is sloped relative to the first direction; a steering component rotatably mounted to the structure about a rotation axis, the steering component including a first shaft engaged in the channel, and second shaft distant to the first shaft designed to transmit the steering movement, wherein movement of the first component exerts the first shaft to travel into the channel.

[0031] Features and advantages of the subject matter hereof will become more apparent in light of the following detailed description of selected embodiments, as illustrated in the accompanying figures. As will be realized, the subject matter disclosed and claimed is capable of modifications in various respects, all without departing from the scope of the claims. Accordingly, the drawings and the description are to be regarded as illustrative in nature and not as restrictive and the full scope of the subject matter is set forth in the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0032] Further features and advantages of the present disclosure will become apparent from the following detailed description, taken in combination with the appended drawings, in which:

[0033] Fig. 1 is a side view of an exemplary tractor and a trailer disengage from the tractor, with normal orientations depicted, in accordance with an embodiment;

[0034] Fig. 2 is an elevated perspective view of a section of a trailer comprising two steerable axles, loading bed removed, with normal orientations depicted, in accordance with an embodiment;

[0035] Fig. 3 is an elevated perspective view of an angular sensor system adapted to be mounted to a tractor;

[0036] Fig. 4 is an exploded bottom perspective view of the angular sensor system of Fig. 3;

[0037] Fig. 5 is an exploded perspective view of the angular sensor system of Fig. 3;

[0038] Fig. 6 is an exploded view of the compressible assembly of the kingpin clinging assembly of Fig. 3 and of the cable connected thereto;

[0039] Fig. 7 is an exploded view of bearing assembly components of the angle sensor system of Fig. 3;

[0040] Fig. 8 is a perspective view of the angle sensor system mounted to a tractor (with only saddle mounting components depicted) and a saddle mounted on top;

[0041] Fig. 9 is an exploded perspective view of the angle sensor system mounted to a tractor (with only saddle mounting components depicted) and the saddle mounted on top of Fig. 8;

[0042] Fig. 10 is a perspective view of a mechanical steer driving system in accordance with an embodiment;

[0043] Fig. 11 is a bottom view of the mechanical steer driving system of Fig. 10;

[0044] Fig. 12 is a perspective view of the rotation reading mechanism of the mechanical steer driving system of Fig. 10, wherein the rotation reading mechanism is depicted mounted to a saddle of a tractor with a portion of the chassis of the tractor depicted;

[0045] Fig. 13 is a perspective view of a portion of the rotation reading mechanism of Fig. 12;

[0046] Figs. 14-15 are a partially exploded perspective view of the rotation reading mechanism and a portion of the angular translation mechanism of the mechanical steer driving system of Fig. 10;

[0047] Fig. 16 is a bottom plan view of the rotation reading mechanism and a portion of the angular translation mechanism of the mechanical steer driving system of Figs. 14-15;

[0048] Fig. 17 is another perspective view of a mechanical steer driving system of Fig. 10;

[0049] Fig. 18 is a perspective view from the front of a portion of the rotation reading mechanism comprising the fix portion and the interface between the arch-shaped cog railway and the first cog;

[0050] Figs. 19-20 are exploded perspective views of the components of Fig. 18;

[0051] Fig. 21 is an exploded perspective view of the junction of the fix portion with the arch-shaped cog railway according to the components depicted on Fig. 18;

[0052] Fig. 22 is an exploded perspective view of the junction of the first cog with the second cog according to the components depicted on Fig. 18;

[0053] Fig. 23 is a perspective view of the components of Fig. 18 and the hauling saddle depicting relative positions when the angle between the tractor and the trailer is close to 90 degrees;

[0054] Fig. 24 is a perspective partial view of a trailer with mechanical components of a steering assembly featuring a single axle mounted thereto;

[0055] Fig. 25 is an exploded perspective view of the components depicted on Fig. 24;

[0056] Fig. 26 is perspective view of the components of Fig. 24 with the wheels and the hub assemblies equipped of disc brakes removed;

[0057] Fig. 27 is an exploded perspective view of the components depicted on Fig. 26;

[0058] Fig. 28 is an elevated view of the components of Fig. 24 with the wheels are steered to the right;

[0059] Fig. 29 is an elevated view of the components of Fig. 24 with the wheels are steered to the left;

[0060] Fig. 30 is an elevated view of the components of Fig. 28, with the wheels removed;

[0061] Fig. 31 is an elevated view of the components of Fig. 29, with the wheels removed;

[0062] Fig. 32 is an elevated view of the components of Fig. 28, with the wheels and the hub assemblies removed;

[0063] Fig. 33 is an elevated view of the components of Fig. 29, with the wheels and the hub assemblies removed;

[0064] Fig. 34 is a partially exploded view of components of the external portion of the axle of a steered wheel comprising a hydraulic generator in accordance with an embodiment;

[0065] Fig. 35 is an exploded view of the components of Fig. 34;

[0066] Fig. 36 is an exploded view of the axle for steered wheels comprising a hydraulic generator in accordance with an embodiment;

[0067] Fig. 37 is a side view of a portion of a steered-wheel trailer in accordance with an embodiment;

[0068] Fig. 38 is a rear-perspective cross-section view of a left portion of the portion of the of a steered-wheel trailer according to cross-section lines A-A depicted on Fig. 37;

[0069] Fig. 39 is a side view of a portion of a steered-wheel trailer in accordance with an embodiment;

[0070] Fig. 40 is a rear-perspective cross-section view of a left portion of the portion of the of a steered-wheel trailer according to cross-section lines A-A depicted on Fig. 39;

[0071] Fig. 41 is a detailed rear-perspective cross-section view of components depicted on Fig. 40 according to detail section -B- depicted on Fig. 40;

[0072] Fig. 42 is a first portion of a hydraulic circuit schematic of the hydraulic system of the steering system in accordance with an embodiment;

[0073] Fig. 43 is a second portion of the hydraulic circuit schematic of the hydraulic system of the steering system complementary to the one of Fig. 42;

[0074] Fig. 44 is a 60-degrees elevated-side view of components of a steering system featuring two steered axles in accordance with an embodiment;

[0075] Fig. 45 is a perspective view of a tractor having a saddle;

[0076] Fig. 46 is a closeup view of the saddle mounted to the chassis of the tractor of Fig. 45;

[0077] Fig. 47 is a perspective view of a tractor with a trailer attached thereto ready to be hauled;

[0078] Fig. 48 is a bottom perspective view of a tractor of the PRIOR ART comprising a kingpin adapted to attach to the saddle of a tractor;

[0079] Fig. 49 is a schematic of the rotatable pieces components and the wheels of a steering axle with construction lines and shapes in accordance with an embodiment;

[0080] Fig. 50 is a perspective view of a rear mechanical steering driving assembly in accordance with an embodiment;

[0081] Fig. 51 is a perspective view of an articulated operating arm assembly in accordance with an embodiment;

[0082] Figs. 52 and 53 are respectively a perspective view and an exploded perspective view of the trailer-mounted translation assembly of the rear mechanical steering driving assembly of Fig. 50;

[0083] Figs. 54 and 55 are respectively a perspective view and an exploded perspective view of the bogie-mounted translation assembly of the rear mechanical steering driving assembly of Fig. 50;

[0084] Fig. 56 is a perspective view of a clinging component in accordance with an embodiment;

[0085] Fig. 57 is an exploded view of the clinging component of Fig. 56;

[0086] Fig. 58 is a perspective view from the center line of a trailer of a portion of a steering axle showing a cogged piece, the wheel mounted thereto with break-related components, and a portion of a beam;

[0087] Figs. 59, 60 and 61 are respectively an elevated 45-degrees perspective view from the front, a 10-degrees elevated 15-degrees perspective view from the front, and a bottom perspective view all depicting a portion of a rear-mechanical steering driving assembly connected to a steering axle mounted to a movable bogie in accordance with an embodiment;

[0088] Figs. 62 and 63 are respectively a bottom perspective view and a top perspective view without a support plate of a steer driving assembly In accordance with an embodiment;

[0089] Figs. 64 and 65 are respectively a front bottom perspective view and a front top perspective view of a steering converter in accordance with an embodiment;

[0090] Figs. 66 and 67 are respectively a bottom perspective view and a bottom plane view of the steering converter of Figs. 64 and 65 with cover plates removed;

[0091] Fig. 68A is a bottom plane view of the steering converter of Figs. 64 and 65 with all covers, and steering transmission components removed;

[0092] Fig. 68B is a top plane view of the remaining components of the steering converter depicted on Fig. 68A;

[0093] Fig. 69A is a bottom perspective view of the steering converter of Figs. 64 and 65 with the cover and the gears removed;

[0094] Fig. 69B is a top perspective view of the steering converter of Figs. 64 and 65 with the cover and the gears removed;

[0095] Fig. 70 is a perspective view of a steering axle in according with another embodiment;

[0096] Figs. 71 and 72 are respectively a front elevation view and a rear elevation view of the steering axle of Fig. 70;

[0097] Fig. 73 is a side elevation view of the steering axle of Fig. 70;

[0098] Fig. 74 is a cross-section view of the steering axle of Fig. 70 according to lines 74-74 depicted on Fig. 72;

[0099] Fig. 75 is a cross-section view of the steering axle of Fig. 70 according to lines 75-75 depicted on Fig. 72;

[0100] Fig. 76 is a perspective cross-section view of the steering axle of Fig. 70 according to lines 76-76 depicted on Fig. 73;

[0101] Fig. 77 is an elevation cross-section view of the steering axle of Fig. 70 according to lines 767-767 depicted on Fig. 73;

[0102] Fig. 78 is a perspective cross-section view of the steering axle of Fig. 70 according to lines 789-789 depicted on Fig. 73;

[0103] Fig. 79 is an elevation cross-section view of the steering axle of Fig. 70 according to lines 789-789 depicted on Fig. 73;

[0104] Figs 80 and 81 are oblique perspective views of a teeth shield in accordance with an embodiment;

[0105] Fig. 82 is a perspective view of an angular encoder system and a kingpin before they are engaging with each other in accordance with an embodiment;

[0106] Fig. 83 is a perspective view of an angular encoder system in accordance with an embodiment;

[0107] Fig. 84 is a perspective view of the interfacing top of the angular encoder system of Fig. 83;

[0108] Figs. 85 and 86 are respectively a front elevation view and a bottom plane view of a kingpin with a settling component mounted thereto in accordance with an embodiment; and

[0109] Fig. 87 is a bottom perspective view of a kingpin with a settling component mounted thereto of Figs. 85 and 86.

[0110] It will be noted that throughout the appended drawings, like features are identified by like reference numerals.

DETAILED DESCRIPTION

[0111] The realizations will now be described more fully hereinafter with reference to the accompanying figures, in which realizations are illustrated. The foregoing may, however, be embodied in many different forms and should not be construed as limited to the illustrated realizations set forth herein.

[0112] With respect to the present description, references to items in the singular should be understood to include items in the plural, and vice versa, unless explicitly stated otherwise or clear from the text. Grammatical conjunctions are intended to express any and all disjunctive and conjunctive combinations of conjoined clauses, sentences, words, and the like, unless otherwise stated or clear from the context. Thus, the term "or" should generally be understood to mean "and/or" and so forth.

[0113] Recitation of ranges of values and of values herein or on the drawings are not intended to be limiting, referring instead individually to any and all values falling within the range, unless otherwise indicated herein, and each separate value within such a range is incorporated into the specification as if it were individually recited herein. The words "about", "approximately", or the like, when accompanying a numerical value, are to be construed as indicating a deviation as would be appreciated by one of ordinary skill in the art to operate satisfactorily for an intended purpose. Ranges of values and/or numeric values are provided herein as examples only, and do not constitute a limitation on the scope

of the described realizations. The use of any and all examples, or exemplary language ("e.g.," "such as", or the like) provided herein, is intended merely to better illuminate the exemplary realizations, and does not pose a limitation on the scope of the realizations. No language in the specification should be construed as indicating any unclaimed element as essential to the practice of the realizations. The use of the term "substantially" is intended to mean "for the most part" or "essentially" depending on the context. It is to be construed as indicating that some deviation from the word it qualifies is acceptable as would be appreciated by one of ordinary skill in the art to operate satisfactorily for the intended purpose.

[0114] In the following description, it is understood that terms such as "first", "second", "top", "bottom", "above", "below", and the like, are words of convenience and are not to be construed as limiting terms.

[0115] The terms "top", "up", "upper", "bottom", "lower", "down", "vertical", "horizontal", "interior" and "exterior" and the like are intended to be construed in their normal meaning in relation with normal installation of the product, with indication of normal orientation of the components being provided on Figs. 1-2.

[0116] It should further be noted that for purposes of this disclosure, the term "coupled" means the joining of two members directly or indirectly to one another. Such joining may be stationary in nature or movable in nature and/or such joining may allow for the flow of fluids, electricity, electrical signals, or other types of signals or communication between two members. Such joining may be achieved with the two members, or the two members and any additional intermediate members being integrally formed as a single unitary body with one another or with the two members or the two members and any additional intermediate members being attached to one another. Such joining may be permanent in nature or alternatively may be removable or releasable in nature.

[0117] Referring now to the drawings, and more particularly to Figs. 1-2 and 45-48, there is depicted a combination of a tractor **100** and a semi-trailer **110**

designed to be hauled by the tractor **100**. The semi-trailer **110** features at least one axle distant from the rotatable hauling attachment **105** linking the semi-trailer **110** to the tractor **100**.

[0118] The axles of the semi-trailer **110** are operated with a wheel steering system **115** comprising a front mechanical steer driving assembly **160**, fig. 10, that steers the trailer-axle mounted wheels according to the misalignment of the semi-trailer **110** relative to the tractor **100** that results in an optimum radius of steering for each of the wheels of the tractor **100** that is function of the exact misalignment, i.e., relative angle, thereof and of e.g., the position of each of the wheels of the semi-trailer **110** relative to the hauling attachment **105**. Accordingly, based on the angle resulting in the hauling attachment linking them, the wheels of the semi-trailer **110**, hereinafter steered wheels, are steered to ease the hauling of the semi-trailer **110** as to provide other advantages as is discussed hereinafter.

[0119] It is worth mentioning herein that nowadays most semi-trailers feature non-steerable wheels having disadvantages over steered wheels semi-trailers **110**. Even thus the straight axle of non-steerable wheels provides some stability, non-steerable wheels cause a substantial level of ripping (i.e., the tires being in some degree pulled sideways instead or in combination with the tires rolling on the ground), which causes substantial wear to the wheel bearings, the tires, and the ground surface on which ripping occurs. Furthermore, a tractor **100** hauling a non-steerable wheels semi-trailer must adopt a larger radius of curvature compared to semi-trailers equipped with steered wheels since the non-steerable wheels semi-trailer marry to a lesser degree the path of the tractor **100**. It results, in urban conditions, in the non-steerable wheels semi-trailer frequently rolling on sidewalks and the driver bring obligated to drive the tractor **100** such that it rolls over multiple driveways 1- to limit the path of the non-steerable wheels semi-trailer to remain in the driveway, and 2- to try to prevent the non-steerable wheels semi-trailer to hit obstacles such as buildings and road signposts, thereby obstructing substantially the vehicles circulation. All of these factors are incentives toward the

use of steered wheels semi-trailers **110** that have a greater efficacy in urban conditions and therethrough improving the efficiency of deliveries through lower requirements to place the steered wheels semi-trailers **110** in the desired location for delivery, a shorter time period necessary to move the steered wheels semi-trailers **110** to the delivery location, and a broader range of locations reachable with the steered wheels semi-trailers **110** compared to non-steerable wheels semi-trailers.

[0120] Associated advantage of the use of steered wheels semi-trailers **110** further comprises lowering the hauling power required to haul the tractor- semi-trailer combination at substantial hauling angles between the tractor **100** and the steered wheels semi-trailer **110**. With non-steerable wheels trailers, the required power increases along with an increase of the hauling angle. At the contrary, the present semi-trailer **110** with steered wheels require almost none to no additional power to haul the tractor- semi-trailer combination at an important hauling angle since the wheels remain in the rolling configuration instead of entering in a ripping configuration. In other words, the hauling power required remains substantially the same regardless of the hauling angle.

[0121] Furthermore, use of steered wheels semi-trailers **110** decreases substantially the risks of the semi-trailer overturning with the hauling angle increasing compared to non-steerable wheels semi-trailers.

[0122] Furthermore, according to embodiment, the maximum steering angles with steered wheels semi-trailers may be set to adopt at least 25 degrees, at least 30 degrees, at least 35 degrees, at least 40 degrees and even up to 45 degrees without the steering of the wheels generating instability, tire rubbing over the structure of the semi-trailer, tire ripping, or any other non-discussed disadvantages.

[0123] Furthermore, the ripping and the undesired passages over sidewalks and other low obstacles frequently occurring with non-steerable wheels

semi-trailers exert efforts to the structure of non-steerable wheels semi-trailers. Such efforts, since generating e.g., premature wear, must be considered at the design time. In practice, with nowadays non-steerable wheels semi-trailers, additional attention must be set to respond to the side forces and the effect of these side forces. To respond to these potential efforts, the design of semi-trailers featuring non-steerable wheels anticipates these conditions with a more robust structure.

[0124] Due to the decrease in lateral forces, the life of the semi-trailer structure can be lengthened through a decrease in fatigue in the materials which can create long-term cracks.

[0125] Accordingly, the present steered wheels semi-trailer **110** featuring steered wheels mitigates these problems with wheels mounted to an axle steered in a linked manner with the left wheel and the right wheel being adapted to adopt their own steering angle set according to the specific configuration of the semi-trailer **110**, namely, e.g., the distance between the axle and the hauling attachment **105**, the wheelbase, etc. Accordingly, the present steered wheels semi-trailer **110** furthermore minimizes to substantially none the ripping of wheels occurring at all hauling angles since the wheels of both sides are configured to adopt the precise required steering angle. Furthermore, the present steered wheels semi-trailer **110** is adapted to set steering angles of a plurality of axles featuring steered wheels in a linked manner while steering the wheels of the axles to different angles based on, e.g., the distance between the hauling attachment and each of the axles.

[0126] Accordingly, the present wheel steering system **115** may be adapted to a plurality of semi-trailer designs that feature different characteristic, comprising a different number of axles, different distances between the axles, different transversal distance between the wheels mounted to the same axle, and the numbers of semi-trailers interconnected in a semi-trailer-train configuration.

[0127] Furthermore, the present wheel steering system **115** provides flexibility through the steering wheel system **115** allowing the operator to select an operating configuration among a) a straight wheels configuration, b) a steered wheels configuration in automatic mode and c) a manual correction mode at low speed. It also provides a level of security unattained until now through a mechanical solution resulting, in case of component failure, into the wheel steering system **115** returning automatically and autonomously into the straight wheel configuration. Therethrough, it prevents instability that could potentially occur, e.g., if the steering system **115** did not prevent the direction of the steered wheels of the semi-trailer and the steering direction from adopting incompatible values following failure of a component.

[0128] It is operable, and thus provides flexibility, in both forward operations and backward operations.

[0129] It is therethrough contemplated the options that different embodiments of the present steering system **115** may feature one or more, up to all, of the advantages listed hereinbefore.

[0130] Referring now to Figs. 1, and 3-7 is depicted an angular encoder system **120** for a hauling assembly **125**. The angular encoder system **120** is adapted to register the angle of at the steering direction interface **350** located at the hauling attachment **105**, and more precisely angle that adopts the kingpin **102** relative to the hauling saddle **128** as the semi-trailer **110** hauls and steers the steered wheels semi-trailer **110**. The angular encoder system **120** comprises a kingpin clinging assembly **130** adapted to cling to the downward face **424**, perpendicular to the axis of the kingpin **102** depicted on Fig. 48, and to rotate with the kingpin **102** of the semi-trailer as it pivots into the hauling saddle **128**.

[0131] The kingpin clinging assembly **130** comprises components extending through the base plate **132**, thus having reading-related and communicating components above the base plate **132** and other components below the base plate

132, in a more protected configuration. The kingpin clinging assembly **130** comprises a gearbelt pulley **134** located under the base plate **132** that exerts the movements of the kingpin **102** to an angular encoder **138** through a timing belt **136**. An encoder connector **137**, connected to the angular encoder **138**, is mounted on the top of the base plate **132** for easy connection thereto.

[0132] The angular encoder system **120** further comprises a disengaging means **122** that allows to controllably disengage (i.e., break magnetic clinging) of the kingpin clinging assembly **130** over the kingpin **102** when about to disengage the hauling assembly **125** linking the semi-trailer **110** to the tractor **100**.

[0133] The kingpin clinging assembly **130** comprises a compressible assembly **150** to which is connected a cable **140** secured into a sheath **142**. The disengaging means **122** comprises a cable **140** that, when pulled, forces compression of the compressible assembly **150**, and thereby disengages the magnetic top **144** of the compressible assembly **150** from the kingpin **102**. Since the sheath **142** is fixed at one end **146** to the interfacing piece **148** on which is at least partially mounted the kingpin clinging assembly **130**, and that the cable **140** is traveling freely into the sheath **142**, attached at one extremity to the magnetic top **144**, by pulling the cable **140**, the magnetic top **144** is pulled downward and disengaged from the kingpin **102**.

[0134] The compressible assembly **150** comprises the magnetic top **144**, an intermediary portion **145**, a spring **152**, and a base **154**, wherein the spring **152** is secured on top to the magnetic top **144** and at its base to the base **154**, therefore able to transmit rotation of the magnetic top **144** to the base **154**. As the base **154** pivots, the connected gearbelt pulley **134** located under the base plate **132** also pivots. The rotation is transmitted through the timing belt **136** to the angular encoder **138**. Signals from the angular encoder **138** may be communicated to appropriate systems, such as e.g., a display control (not depicted) located in the cabin of the tractor **100**.

[0135] Preferably, the cable **140** is connected at the extremity opposed to the compressible assembly **150** to the saddle release handle **156** (part of the disengaging means **122**) designed to release the kingpin **102** from the hauling saddle **128**. Though this connection, the kingpin clinging assembly **130** is always disengaged from the kingpin **102** when the kingpin **102** can be disengaged from the saddle **128**, preventing breaking of the kingpin clinging assembly **130** at the dismounting step and avoiding the operator to perform an additional action when disengaging the kingpin **102**.

[0136] It is therethrough contemplated that the angular encoder system **120** is adapted to be mounted to existing hauling saddles **128** without modification of existing hauling saddles **128**. As depicted on Fig. 9, the angular encoder system **120** is adapted to be mounted thereunder, taking advantage of existing mounting components to be mounted to the semi-trailer **110**.

[0137] Referring now additionally to Figs. 82 to 87, an angular encoder system **121** in accordance with another embodiment comprises an interfacing top **644** featuring a substantially linear protrusion **646** comprising a rounded front **648**, inwardly curved sides **650**, and a straight end **662**. The protrusion **646** is adapted to interface and set in a settling component **652** fixedly mounted to the bottom of the kingpin **102**. The settling component **652** comprises a bottom face **656** featuring a channel **654** having a funnel-shaped front portion **658** and a linear-shaped portion **660** beyond the front portion **658**. The interfacing top **644**, indirectly connected to the angular encoder **138** (not identified on Figs. 82 to 87, see e.g., Fig. 4), is adapted to follow rotation exerted through misalignment of the tractor **100** and semi-trailer **110** relative to each other. The interfacing of the protrusion **646** and of the channel **654** allows them to engage and disengage easily as the hauling saddle **128** and the kingpin **102** make contact and are released from each other. A biasing means, typically a spring (not shown) is connected to the interfacing top **644** so that when the interfacing top **644** and the kingpin **102** are disengaged, the interfacing top **644** automatically returns to an aligned position,

aka a direction parallel to the longitudinal orientation of the tractor **100**, easing next engagement of the protrusion **646** in the channel **654**.

[0138] Referring additionally to Figs. 56-57, the clinging component **392** is the component adapted to cling to the kingpin face (see Fig. 48) facing down in the hauling saddle **128**. The clinging component **392** comprises a base **394**, a top **396**, and at least one biasing means **402**, e.g., springs, biasing the top toward alignment with the base. The springs **402** are mounted in pair operating in opposed directions. Two pairs are operating in distinct directions misaligned of e.g., 90 degrees relative to each other for each pair of springs **402** being able to undergo movement of the kingpin **102** and to bias the clinging component **392** toward its center. Springs **402** are set in guiding means **404** that limit linear displacement of in the general direction of the springs **402**. Abutments **406** limit linear displacement of the springs **402** in the first direction, interaction between the abutment **406** and a compressed spring (spring **402** not illustrated in its compressed state in the drawings) exerting a force toward moving the above portion toward the center. Accordingly, an intermediary plate **408** comprising two faces is dividing and interfacing with the two pair of springs **402**. Thereby, the intermediary plate **408** is adapted to undergo displacements along the direction of the bottom springs and of the top springs without exerting rotation to the base. It is worth mentioning that the intermediary plate **408** is rigidly connected to a clinging piece **410**. It is also worth mentioning that the first pair of springs **402**, the second pair of springs **402** and the intermediary plate **408** are encapsulated between the base **394** and a cover **398**, thereby the clinging component **392** featuring a clinging piece **410** adapted to move along the kingpin **102** extending distant to the base **394**.

[0139] Referring now to Figs. 1, and 10-17, the semi-trailer **110** comprises a front mechanical steer driving assembly **160** that is adapted to connect to the hauling saddle **128** (see Figs. 8-9) at the time the kingpin **102** is engaged in the hauling saddle **128** to define the hauling assembly **125** (see Fig. 8). The front mechanical steer driving assembly **160** comprises a rotation reading mechanism

162, an angular translation mechanism **164** and a steering transmission mechanism **166** connected to each other.

[0140] Referring particularly to Figs. 1 and 12, the rotation reading mechanism **162** is adapted to have a fix component **168** marrying the funnel portion **170** of the hauling saddle **128** when engaging the kingpin **102** in the hauling saddle **128**.

[0141] Preferably, the fix component **168** has a V-shape (or other functional shape of projection) that is wedged in the funnel portion **170** as the kingpin **102** is engaged in the hauling saddle **128**. The sides of the fix component **168**, abutting the sides of the funnel portion **170**, ensures transmission of any rotation of the tractor **100** relative to the semi-trailer **110**.

[0142] The funnel portion **170** is rigidly connected to an arch-shaped cog railway **172** wrapping around the operating angles of the hauling assembly **125**. A first gear **174** rotatably mounted to the general structure of the front mechanical steer driving assembly **160**, is adapted to pivot when the angle between the tractor **100** and the semi-trailer **110** changes. The first gear **174** is rigidly connected to a second gear **176** mounted on the opposed side, fig. 16. The second gear **176** for its part drives the third gear **178** rotatably mounted to the structure. Accordingly, the teeth ratio between the pair of cog railway-cog and cogs provided a first transmission ratio of the rotation angle between the tractor **100** and the semi-trailer **110**. That ratio allows to translate an above **180**-degrees rotation into a less than 90-degrees rotation for the reasons better explained hereinafter. Accordingly, this assembly may be understood as a series of interconnected gears comprising a terminal gear connected to a cogged piece part of, mounted to or fixedly linked otherwise to the angular translation mechanism.

[0143] It is contemplated therethrough that the rotation reading mechanism **162**, fig.18, has a generally flat shape adapted to be mounted to the semi-trailer **110**, rear to the kingpin **102**, without creating obstruction preventing standard

kingpins **102**, aka kingpins **102** used nowadays on non-steerable wheels semi-trailers, to be used. The described rotation reading mechanism **162** takes advantage of the existing clearance and of existing structures (see ex. Fig.12) to avoid replacement of existing components of a tractor **100** to retrofit the semi-trailer into a steered wheels semi-trailer **110**.

[0144] Referring now to Figs. 1 and 18-23, the rigid mounting of the cog railway **172** and of the fix component **168** is illustrated through a series of plates and fixtures.

[0145] The first gear **174**, rotatably mounted to the structure provided by the plates that when mounted to each other define an enclosure for the first gear **174**, is forced to pivot when the angle between the tractor **100** and the semi-trailer **110** changes. Therethrough, relative angle between the semi-trailer **110** and the tractor **100** is transmitted to the second gear **174**.

[0146] Referring particularly to Fig. 23, it is worth mentioning that as the relative angle between the semi-trailer **110** and the tractor **100** changes, the arch-shaped cog railway **172** moves relative to its housing **180**, the housing **180** being connected, and preferably an extension of the general structure of the front mechanical steer driving assembly **160**. An open-ended arch-shaped slot **182** provides the clearance for the arch-shaped cog railway **172** to travel in both directions.

[0147] It is thereby contemplated that the generally flat design of the housing **180** allows the housing **180** to travel in the clearance existing opposed to the semi-trailer **110**, aka between the hauling saddle **128** and the cabin of the tractor **100**, thanks to the elevated nature of the hauling saddle **128** relative to the chassis of the tractor **100**. The general flat shape of the housing **180** also allows the housing **180** to travel without interfering to the release handle **156**, fig. 9.

[0148] Fig. 22 depicts that the rigid mounting of the first gear **174** to the second gear **176**. According to the embodiment, the gears **174**, **176** are maintained in an enclosure rather than rotatably mounted to a common axle.

[0149] According to an embodiment, the floor (not identified) of the semi-trailer **110** (see Fig. 1) forms part of the enclosure containing the gears **174**, **176**.

[0150] Referring to Figs. 1, 10-11, 17, the third gear **178** is mounted to the cam **184** with the rotation of the cam **184** translating angular change between the tractor **100** and the semi-trailer **110** into a linear displacement of the steering transmission mechanism **166**. The steering transmission mechanism **166** and the cam **184** are joined through a guided pin **188** travelling in a slot **190** as the cam **184** rotates.

[0151] Since the slot **190** is not of an arch-shaped sharing its center of curvature with the rotatable axis of the third gear **178**, rotation of the third gear **178** translates into a linear movement of the guided pin **188**.

[0152] The slot **190** has a particular shape. It is worth mentioning that the slot **190** has a particular shape around the 0 degree to communicate no steering to the semi-trailer when the tractor turn angle is less than 5 degrees. Such solution is applied to avoid some swaying that may result from the steering of the wheels of the semi-trailer on highways and other similar conditions. It further provides a solution to desensitize the angle communication between the front part and the rear part, since, based on the nature of the fixation of longitudinally settable wheel assembly(ies) to the structure of the semi-trailer (further discussed hereinafter), such fixation may generate errors that need to be damped off to prevent instability.

[0153] It is worth noting that the cooperation of the cam **184**, the slot **190** and the pin **188** undergo low resistance. The other end of the front mechanical steer driving assembly **160** is configured to register linear movements without exerting strong resistance.

[0154] In an alternative realization, function is performed through a linear displacement instead of an angular displacement provided by the cam **184**, to obtain the same displacement as the arm member **192**. According to an embodiment (not depicted), the linear displacement involves an input gear, a toothed rail interfacing with the gear, and a slotted component connected to the distant end of the toothed rail, with the shape of the slot allowing to control the resulting displacement, e.g., no displacement with a change of angle of less than 5 degrees around the aligned position, a proportional displacement afterwards until reaching a limit angle, and a null displacement with higher degree of misalignment in order to prevent mechanical failures that could occur with very high steering angles.

[0155] The steering transmission mechanism **166** comprises a first arm member **192** connected through the guided pin **188** to the angular translation mechanism **164**, and a second arm member **200** adapted to communicate, through its linear movement, angle changes between the tractor **100** and the semi-trailer **110**.

[0156] The first arm member **192** is mounted to the underbelly **112**, below the floor, of the semi-trailer **110** using supports **194**, the latter fixedly mounted to the semi-trailer **110** while allowing frontward-backward movement of the first arm member **192**.

[0157] Close to its rear extremity, the first arm member **192** features a series of adjustment holes (not visible on the drawings) allowing to adjust the length of the steering transmission mechanism **166** according to the trailer configuration, e.g., according to the specific distance of the first axle relative to the kingpin **102**. A coupling **198**, attached to the front section of the second arm member **200**, is adapted to connect the first arm member **192** to the second arm member **200**. By selecting which adjustment holes to use, the operator sets the length of the steering transmission mechanism **166**.

[0158] Referring to Figs. 47-48 and 50-55, semi-trailers are usually equipped with a movable bogie **302** on which axle(s) and wheels are mounted, wherein the bogie **302** is movable frontward or rearward for optimization based on the weight and distribution of the weight to be loaded on the semi-trailer. Accordingly, distance between the kingpin **102** and the steered wheel hub assemblies **224**, figs. 25-31, mounted to the bogie **302** must be easily adjustable.

[0159] The present steer driving assembly **160** includes a mechanical steering drive assembly whose rear mechanism **308**, Fig. 50, makes it possible to move the bogie **302** under the semi-trailer **110**. The arm **196** is connected to the coupling **198** by bolting. The end of the arm **422** is connected to the coupling **198** which consists of a tube which moves longitudinally relative to the component **420**. The other end of the arm **421**, named extremity **306**, is connected to the group of rear axles of the semi-trailer **110**. Given the presence of mechanical play between the mechanical bogie **302** and the point of attachment to the structure of the semi-trailer **110**, a rigid link connects them.

[0160] In Fig. 59, in addition to Figs. 51 to 55, is depicted the mechanism **310** which makes it possible to relocate, aka move and lock, the bogie **302** under the semi-trailer **110** while maintaining the set steering. The arm **196**, connected to the steer driving assembly **160** frontward and thereby being driven as the tractor **100** and the semi-trailer **110** turn relative to each other, is connected to the front end of the mechanism **310**. The rear end of the mechanism **310** is connected to and drives the steering axle **334** through the rotatable arm **336**. A first portion of the mechanism **310**, namely the fix assembly **320**, is mounted under the semi-trailer **110** to its underbelly **304**, and it thus fix. A second portion of the mechanism **310**, namely the bogie-mounted assembly **312**, is mounted to the bogie **302** and is thus mobile relative to the fix assembly **320**. The mechanism **310** comprises cog rails **314**, **316** which connect to the fix assembly **320** to the bogie-mounted assembly **312** without needing to exert a change in the driven direction of the steering axle **334**.

[0161] Since the bogie **302** can move, the bogie-mounted assembly **312** moves with it. Thus, the steer driving assembly **160** becomes more flexible to the effects of movements of the bogie **302** under the semi-trailer **110**. The end **306** of the arm **421** connects the group of axles of the bogie **302** in the same way.

[0162] Referring particularly to Figs. 54 and 55, the fix assembly **320** comprises a structure **324** on which are mounted a pair of gears **326**, mounted on shafts **416**, that are interfacing with each other and with the cog rails **314**, **316**. Position of a first gear **326b** is fix, while position of second gear **326a** is rotatable around the first gear **326b**, with arms **328** maintaining the interface in-between. An arch-shaped slot **327** allows limited rotation of the position of the second gear **326a**. The arm **421** is connected to the first cog rail **314**, which, when the fix assembly **320** is fix, drives the second cog rail **316** driving the steering through the bogie-mounted assembly **312**.

[0163] The bogie-mounted assembly **312**, mounted to the bogie **302**, is somewhat similar to the fix assembly **320**. The bogie-mounted assembly **312** comprises a pair of gears **318a** and **318b** each interfacing with one of the cog rails **314**, **316** and interfacing with each other so that, when the steering is not changing, a movement in the opposite direction is transmitted by a first cog rail **314** to the second cog rail **316**. The bogie-mounted assembly **312** further comprises a mounting structure **322**, comprising two parts providing a top and bottom enclosure to the gears **318**, that is mounted to the structural bogie **302**. The mounting structure **322** providing the structure to mount the bogie-mounted assembly **312** to the bogie **302**, to mount the gears **318**, and to provide a guide for the translation of the cog rails **314**, **316**. The bogie-mounted assembly **312** further comprises shafts **319** for the gears **318**, arms **317** and a slot **315** allowing rotation of the second gear **319b** around the first gear **319a** corresponding to steering angles.

[0164] It is worth mentioning that in the fix assembly **320**, the shaft **416a** of one gear **326a** is adapted to rotate around the other **416b** of the other gear **326b**,

thereby exerting movement to the steering arm **317b**, the latter connected to the steering axle **334** and thereby driving the steering axle **334**.

[0165] It is also worth mentioning that the configuration of the structures **322** and **324** are preferably designed to define a room between plates for the gears and cog rails to take place. The room feature a top plate and a bottom plate providing the desired support necessary for shafts and other components, else than the arms linking the shafts of the gears. The arm **317b** connected to the steering axle **334** is located below, so as to connect about the height of the driving arms **232**. It is also worth mentioning that the rooms have openings facing each other for the cog rails **314**, **316** to extend therethrough and between the rooms and beyond the rooms in the opposite sides. The rooms are depicted having no side walls facing each other, thus featuring a single large opening. In other embodiments, openings may be more limited to providing clearance for the cog rails. Shielding structures may also be present to protect the cog rails **314**, **316** from dust and other foreign material.

[0166] Referring additionally to Fig. 58, 59, 60, and 61, changing longitudinal location of the bogie **302** may therefore being easily performed with minimal efforts, i.e., without requiring the operator to get under the semi-trailer **110**, dismount components, are reattach components afterward. Changing longitudinal location of the bogie **302** is performed by pulling the handle **338** which disengages a pin **340** from one of the holes **342** present in the beams **344**. It is followed, under power of the tractor **100**, with the pulling the semi-trailer **110** forward or rearward. Once at desired location, the handle **338** are pushed back, resulting in the pin **340** being inserted in another one of the holes **342** and thus setting the new longitudinal location of the bogie **302**.

[0167] It is worth mentioning that the configuration of the mechanism **310** allows to longitudinally move the bogie **302** without changing the steering direction of the steering axle **334**. The displacement of the bogie-mounted assembly **312** relative to the fix assembly **320** exerts relative displacement of the cog rails **316**,

316 without exerting a rotation of the arms **317b**, and thus without affecting the steering of steering axle **334**.

[0168] It should be kept in mind that this kind of fixation of the bogie **302** relative to the underbelly **304** of the semi-trailer **110** was originally designed for non-steerable wheels. As the semi-trailer **110** is hauled, clearance in this fixation allows small longitudinal displacements of the bogie **302** that is not a problem with non-steerable wheels. The same cannot be stated for steerable wheels. If the steering system **115** was not designed to ignore small longitudinal displacements, it would result in the steerable wheel hub assemblies **224** swaying, or as a visual comparison vibrating, what could generate instability to the steering system **115**. The semi-trailer **110** is designed to generate no steering force over the two driving arms **232** when small changes around the straight alignment arise between the tractor **100** and the semi-trailer **110**, aka the steering direction interface **350** (see e.g., Fig. 46). The result is such that no steering of the wheels occurs. Other advantage is that noise over the rear mechanical steering driving mechanism **310** is also damped the same way. Bogie-generated noise resulting from the undesired displacement of the bogie **302**, is damped in the same way.

[0169] It should be noted that the slot **190** in one embodiment, e.g., Fig. 11, and the channel of Figs. 64, 65, provide solutions to damp that noise.

[0170] Referring now to Figs. 1, 24-33, and 48, the steering assembly **220** is mounted to longitudinal beams **222** mounted to the chassis **352** forming the underbelly **304** of the semi-trailer **110**. The steering assembly **220** defines a non-continuous axle (opposite to axles of exemplary semi-trailers having non-steerable wheels). Steered wheel hub assemblies **224** and tires **226** are mounted to the axle, outward from the longitudinal beams **222**. The longitudinal beams **222** have a proximal end **414** ending frontward to the pieces **230**, **234**, providing the clearance necessary to them to efficiently interface, as to provide clearance rearward for break-related components **418** to take place and operate the wheel hub

assemblies **224** in all steering angles of the wheel hub assembly **224** without component hitting each other.

[0171] The steering assembly **220**, figs. 24-25, comprises a rotatable central cogged piece **230** driven by two driving arms **232** operating in collaboration that are adapted to exert changes in the direction of the central cogged piece **230**. The two driving arms **232** are mounted to the rotatable central cogged piece **230** within the external interface, close to the cogged interface, opposed to each other, and in neutral, i.e., straight steering angle, aka when the hub assemblies **224** are straight, for optimization of the torque exerted by the two driving arms **232** up to the maximum steering angle.

[0172] An angular encoder **228** is mounted to the head of the shaft **236** for monitoring and control of the angle of the rotatable central cogged piece **230**, allowing to compare electronically the data of the angular encoders **138**, **228** for validation and control as explained in more details hereinafter.

[0173] Side cogged pieces **234**, interfacing with the teeth of the rotatable central cogged piece **230**, are adapted to transmit rotation of the rotatable central cogged piece **230** to the wheel hub assemblies **224**, thus steering the wheel hub assemblies **224**.

[0174] The rotatable central cogged piece **230** is rotatably mounted to the chassis of the semi-trailer **110** through a shaft **236** extending through components joining the longitudinal beams **222**.

[0175] When the two driving arms **232** exerts a counterclockwise rotation of the rotatable central cogged piece **230** (ex. depiction on Fig. 28), the interface between the teeth of the rotatable central cogged piece **230** and the left side cogged piece **234** forces the left wheel to pivot clockwise, and similarly the interface between the teeth of the rotatable central cogged piece **230** and the right side cogged piece **234** forces the right wheel to pivot clockwise. However, the ratio of steering, in other words the steering angle of the wheel relative to the pivoting

angle of the rotatable central cogged piece **230** is based on the local operating radii of the rotatable central cogged piece **230** and the side cogged pieces **234** at the interface.

[0176] It is worth mentioning that in the depicted example the steering angle of the left wheel differs from the steering angle of the right wheel. The reason is that the interfaces of the rotatable central cogged piece **230** and of the side cogged pieces **234** are non-circular interfaces (compared to co-centered circles **360**) with a progressively changing radius. As illustrated on Fig. 49, the rotatable central cogged piece **230** has an operating interface **354** that is close to a portion of a spiral or to a portion of an ovoid (versus a circle **231**). The side cogged pieces **234**, rotatable around their axes **364**, also has an operating interface that is close to a portion of a spiral or to a portion of an ovoid (versus circle **233**). The interfaces are designed for, in any operating angle, to have their operating radii completing each other such that the clearance between the cogs in the interface remains substantially constant regardless of the angle adopted by the rotatable central cogged piece **230**.

[0177] Referring particularly to Fig. 49, in the neutral position, aka when the wheel hub assemblies **224** are directed to parallel directions, the rotation axes **372** of the steerable wheel hub assemblies **224** are coaxial. The central piece **230** comprises a left interface **350** and a right interface **350** defined according to a longitudinal plane **390** comprising the pivot axis **362** of the central piece **230** and perpendicular to the coaxial rotation axes **372**, wherein the left interface **354** and the right interface **354** are mirror images of each other. The central piece **230** comprises a cogged portion adapted to interface with the left steering piece, thus not mandatory featuring the whole circumference of the central piece **230**. Joints **368** linking the central piece **230** to the driving arms **232** are at the same distance of the axis **372**, and at the same angle relative to the neutral plane **380** comprising the plane **390** comprising the pivot axes of the central piece **230** and the side cogged pieces **234**. Preferably, this angle is close to 0 degree to provide the

optimum lever distance. It is worth mentioning that the rotatable central cogged piece **230** and the side cogged pieces **234** are mounted to a common body assembly **238** joining the longitudinal beams **222**, thereby ensuring planar alignment of the side cogged pieces **234** relative to the rotatable central cogged piece **230** regardless of damping positions, aka the actions of the damper component over the axle assembly.

[0178] Preferably, the common body assembly **238** comprises a top axle body **240** mounted to the top of the longitudinal beams **222**, and a bottom axle body **242** mounted to the bottom of the longitudinal beams **222**. The common body assembly **238** thereby defines a rigid enclosure to mount the rotatable central cogged piece **230** and the side cogged pieces **234** thereto.

[0179] The side cogged pieces **234** are rotatably mounted to the top axle body **240** and the bottom axle body **242**, outside the longitudinal beams **222**. The side cogged pieces **234** are rigidly connected to the spindles **246** on which are mounted the wheel hub assemblies **224**. The spindles **246** are steering the wheel hub assemblies **224**. Therethrough, there is providing a steering axis **244** that may be designed to optimize the stability of the semi-trailer at all operating steering angles by optimizing the distance between the steering axes **244**.

[0180] It is worth mentioning that the open-front configuration of the common body assembly **238** provides clearance for connecting the two driving arms **232** to the rotatable central cogged piece **230**.

[0181] According to an embodiment, the weight of the **220** is decreased to increase the weight of the freight the semi-trailer may be loaded with. The structure of the rotatable central cogged piece **230**, the structure of the cogged pieces **234**, and the structure of the common body assembly **238** are optimized. Accordingly, based on the distribution of the forces differing from the known steering solutions, the components of the present steering system **115** is kept relatively light. It is worth mentioning that since the forces undergone by the components at the limit

steering angles are not substantially greater than the forces undergone near the straight angle, the components may be designed lighter, designed regarding a well-known and limited range of conditions of operation.

[0182] Still referring to Figs. 25-27, the suspension components are mounted to the top axle body **240** linking the longitudinal beams **222** to the floor of the semi-trailer **110**. The suspension components comprise, above each longitudinal beams **222**, a combination of a shock absorber **250** and an air spring **252**. The air springs **252** are mounted to a sloped plate **254** having an angle based on the radius of curvature of the damped arm. This configuration is selected to decrease the differences of compression between the front portion and the rear portion of the flex member of the air spring **252**. Location is further selected to decrease potential misalignment that would result from the compression of the air spring **252** based on the structure on which the air spring **252** is mounted pivoting around an axis (not shown) relatively close to the air spring **252**.

[0183] Referring particularly to Fig. 31, the air brake assembly **260** of each of the steered wheel hub assemblies **224** is located substantially on the topside of the wheel hub assemblies **224**. The brake assembly **260** comprises a disk **262**, a pad assembly **264** mounted such that its bottom part is located at least equal, and preferably above the center of the wheel hub assembly **224**. The brake chambers **266** are mounted below the side cogged pieces **234**. The clearance provided by the steering assembly **220** under the side cogged pieces **234** provides clearance for the brake chambers **266** to travel as the wheel hub assemblies **224** are steered, and for a lock bar (for mechanical locking the wheel, not depicted) able to be installed on the brake chambers **266** in all steering angles of the wheel hub assemblies **224**.

[0184] Accordingly, the configurations of the steering assembly **220** and of the air brake assembly **260** generates no interference therebetween within the whole range of operating steering angles of e.g., between -40 and 40 steering degrees of the wheel hub assemblies **224**. The open-bottom configuration of the

air brake assembly **260** further prevents premature wear through available natural drainage of foreign material, e.g., gravel, ice, that may be projected e.g., between the pads and the disks **262**.

[0185] Referring now to Figs. 1 and 2, steered wheels semi-trailers **110** may feature a plurality of steered wheel axles. Section of the semi-trailer **110** depicted on Fig. 2 provides an example of a semi-trailer featuring two steered wheel axles driven together.

[0186] According to embodiments, the distance between the steered wheel axles may vary from a minimum distance (corresponding substantially to the closest distance two axles of a semi-trailer having non-steerable axles operates nowadays) to an undetermined distance that is based on other aspects, such as the structure, of the semi-trailer **110**.

[0187] Referring additionally to Figs. 1 and 44, the steering axles **334** may comprise master steering axle **334a** and a slave steering axle **334b**. Hydraulic four-controls cylinders **282** controlling the steering of the steering assembly **220** are single-rod two-barrels **287** cylinders mounted at each end of the rod **285**, that provides four-end-of course positions. These four end-of-course positions allow to provide fine control of the extension of the hydraulic cylinders **282**, and particularly provides at least one intermediary end-of-course position corresponding to the straight configuration of the steered wheels.

[0188] The hydraulic cylinders **282** are connected to an arm **290** rigidly connected to a control arm **292** at which are connected the two driving arms **232**. A linking arm **294**, adjusted in function of the distance between the two steering assembly **220**, connects the arm **290** and thereby ensures that the front steering assembly and the rear (dependent) steering assembly will operate in synchronous manner.

[0189] It is worth mentioning that even though the control of the front rotatable central cogged piece and the rear rotatable central cogged piece angle

adopt the same angle, the steering angles of the four wheels are designed to be unique (based on the distance of the axle from the kingpin **102**, and the wheels being the inner wheel or the outer wheel at this angle of the semi-trailer **110** relative to the tractor **100**). Such unicity is performed through a specific configuration, aka shape, of a rotatable central cogged piece **230** and of side cogged pieces **234** for the front and the rear axle. Such unicity allows to minimize to substantially zero (0) the ripping through adoption by all wheels the appropriate steering angle according to their specific steering radius, regardless of the number of axles and the longitudinal positions of the axles.

[0190] It is worth mentioning that the arms **290**, through ball joints **332** mounted to the linking arm **294** joining the steering assemblies, are isolated from effects of bumps on the road. The linking arm **294** is free to adopt a variety of angles as the shock absorbers operate. Accordingly, the hydraulic cylinders **282** are also isolated from most of the vibration, thereby extending the life expectancy of the hydraulic cylinders **282** and of their parts, e.g., seals.

[0191] Referring now to Figs. 62 and 63, an alternative embodiment involves displacement of the steering converter mechanism from the angle sensor system, e.g., angular translation mechanism **164** depicted in e.g., Fig. 16, to a separate mechanism. Accordingly, the steering driving assembly **500** of Figs. 62 and 63 is limited to reading direction of the tractor **100** relative to the semi-trailer **110**, and through a series of cogs, to convert that angle into a longitudinal displacement of an arm member **192**.

[0192] The steering driving assembly **500** comprises upstream a funnel portion **170** connected to an arch-shaped cog railway **172** moveable relative to a frame **506**, and driving a first gear **502**. The first gear **502** is mounted to a shaft **516** common with a second gear **508**, thus driving the second gear **508**. The second gear **508** drives the arm member **192** through an interface with a cogged portion **510** converting the pivoting of the second gear **508** into longitudinal displacement of the first arm member **192**.

[0193] A plate **512** and a beam **514** complete the steering driving assembly **500**, providing structure, support, and protection of the components into a slim structure easily mountable to the underbelly **304** of the semi-trailer **110** without requiring changes in the design of the semi-trailer **110** or the hauling saddle **128** of the tractor **100**.

[0194] Referring to Figs 64 to 67, 68A-B and 69A-B, an embodiment comprises a distinct steering converter mechanism embodied as a steering converter **520**. The steering converter **520** comprises a housing **522** with an aperture at its front through which extends the first arm member **192**. The steering converter **520** comprises a mechanism converting longitudinal displacement of the first arm member **192**, a steered movement, in a steering displacement control transmitted by the displacement of a shaft **524** mounted to an arm **526** pivotally mounted to a shaft **530**, aka a steering movement. The mechanism permits to control the responsiveness of the steering transmitted to the steering axle rearward. A trap **528** at the front of the housing **522** allows to set the responsiveness of the steering converter **520**.

[0195] Referring particularly to Figs. 68A-B and 69A-B, the steering converter **520** comprises a set of gears **532**, **534**, **536** interfacing with a pair of cog rails **538**, **540**, the first cog rail **538** being longitudinally driven by the first arm member **192**, and the second cog rail **540** allowing to adjust responsiveness of the steering converter **520** through the setting of the longitudinal straight portion of the channel **542**. More precisely, setting of the distance between the wide portions **596** of the interfacing components **544** (versus the narrow portion **597**) allows to set a longitudinal central portion of the channel **542** of between a null length to a substantial length. According to a longitudinal length exerting no movement of the arm **526**, increasing the length of the longitudinal central portion of the channel **542** decreases the responsiveness of the steering converter **520**, or in other words increase the minimum steered angle before obtaining a steering movement transmittable to the steering axle.

[0196] For illustration, the cog rails **538**, **540** are mounted to or part of interfacing components **544**, **546** each featuring a channel portion **548**, **550** comprising a slopped portion **600** adapted to convert a longitudinal displacement of the arm member **192** into a displacement of the shaft **524**, and a longitudinal portion **604** distant from the interface of the interfacing components **544**, **546**. The latter longitudinal portion **604** is adapted to exert no additional displacement of the shaft **524** from displacement of the first arm member **192**, thereby allowing extreme misalignment of the tractor **100** and semi-trailer **110** without exerting overlimit steering to the steering axle. The interface between the interfacing component **544**, **546** is longitudinally adjustable, allowing to provide almost no to a central longitudinal portion **602** of the channel **542** having a substantial length. The central portion **602** provides a path wherein displacement of the first arm member **192** about the aligned position of the tractor **100** and semi-trailer **110** does not convert into a steering of the steering axle. Therefore, by adjusting the length of that interface central longitudinal portion **602**, a level of noise cancellation may be set, including preventing conversion of any changes of direction of the tractor **100** into steering of the steering axle.

[0197] According to an embodiment, adjustment of the responsiveness of the steering converter **520** can be done by screwing/unscrewing a screw **552** accessible through the trap **528**.

[0198] Such feature is particularly useful, e.g., to set no responsiveness of the steering axle for highway circuits, for when the tractor **100** and semi-trailer **110** are about to operate at high speed.

[0199] It is to be understood that the conversion is made by the shaft **608**, mounted to the arm **526**, with its travel in the channel **542** forced by the movement of the interfacing components **544** relative to the housing **522**. When the shaft **608** is exerted to move away from the center of the channel **542**, it exerts a rotation of the arm **526** around its rotation axis **601**, resulting in a movement of the shaft **524** and its axis **601** connected to the steering axle.

[0200] It is further to be understood that the length of the central longitudinal portion of the channel **542**, since not exerting a rotation of the arm **526**, sets the steered angle before the wheels of the semi-trailer **110** being steering, and the longitudinal portions **604** of the channels **542** beyond the sloped portion **600** exerts no additional steering of the wheels of the semi-trailer **110**, regardless of the additional steered angle the semi-trailer **110** may undertake. Thus, length of the longitudinal portions and of the sloped portion sets the responsiveness of the steering converter **520**.

[0201] It is worth mentioning that even though a manual mode of operation is provided to set the responsiveness of the steering converter **520**, in alternative embodiments, other solutions including, e.g., electric components, hydraulic components, mechanical switches, may be used to set the responsiveness from the cabin of the tractor **100**, from the side of the semi-trailer **110**, etc. and/or may allow to switch between a responsiveness setting transmitting steering to a no responsiveness setting without losing the responsiveness setting previously set. Therefore, complementary control solutions for the steering converter **520** are contemplated therein.

[0202] Referring now to Fig. 70 to 79, an embodiment of a steering axle **564** more compact than the steering axle **334** is depicted. The steering axle **564** comprises a central cogged piece **230** driven the driving arms **232**, with an angular encoder **228** mounted thereto. It comprises cogged pieces **234** driven by the rotatable central cogged piece **230** with wheel hub assemblies **224** steered by the cogged pieces **234**. It is still adapted to have air springs **252** mounted thereto, and brake assembly **260** mounted to the wheel hub assemblies **224**, comprising service brake chamber **566** mounted about the wheel hub assemblies **224**, above the cogged pieces **234**. The steering axle **564** further comprises a general structure **570** allowing to connect and hold these components, with the general structure **570** connected directly and/or indirectly through shock absorbers **568** to the underbelly of the semi-trailer **110**. Finally, the steering axle **564** comprises, in

realization of the steering axle **564** being open to the road, teeth shields **572** protecting the teeth and general interface of the cogged pieces **230**, **234** from dust and foreign material.

[0203] It is to be noted from Figs. 71 and 72 that the general structure **570** is made of different components bolted together defining a cage of protection of the cogged pieces **230**, **234**, allowing easy opening of the cage of protection by disassembling a part from the general structure **570**. For instance, the general structure **570** comprises parts extending frontward and rearward, e.g., part **578** from the central axle parts **574** and **576**, allowing to slide the cogged pieces **230**, **234** horizontally out of the cage of protection without having e.g., to cut off parts. Such solution, in addition to be more compact, eases maintenance of the steering axle **564** relative to the steering axle **334**.

[0204] It is worth mentioning that the location and position of the service brake chamber **566**, mounted on brackets **580** provides a level of clearance allowing a maximum steering angle of the wheel hub assemblies **224** not limited by the service brake chamber **566** abutting against another part, but rather only by the setting of e.g., the steering converter **520**.

[0205] Referring now particularly to Figs. 73, 74, and 75 are depicted a side view of the steering axle **564**, and different cross-section side views of the steering axle **564** in according to rotation axes of the rotatable central cogged piece **230**, and of a cogged piece **234**.

[0206] From these cross-section views, it is depicted the different parts **574**, **576**, **578** and **582** combining into the cage of protection of the cogged pieces **230**, **234**, with nuts and bolts depicting the ease assemble them into the cage of protection and to open the cage of protection for maintenance.

[0207] It is further patent, further considering Figs. 77 to 79, that the axis of the cogged pieces **230**, **234** are all aligned, providing an utmost design to limit

forces and relative movements that may generate premature wear to one of the components of the steering axle **564**.

[0208] It is also to be noted that the parts **582** allow to mount the steering axle **564** to the bogie, wherein rotatable connection between the parts **582**, **584** provides the necessary flexibility of the steering axle **564**.

[0209] Referring particularly to Figs. 76 to 79, it is further patent that maintenance is possible from the assembly of the general structure **570**, and that two driving arms **232** driving the rotatable central cogged piece **230** are adapted to be connected at the same height at both ends, limiting the requirements and fatigue the ball bearings used to mount the **232** at each end will endure.

[0210] Referring now to Figs. 80 and 81, the teeth shield **572** consists in a pair of curved channels **586** opposed to each other with a central floor-free portion **588** opening the channels **586** to each other. The teeth shields **572** are made of polymer, light while able to resist to different temperatures. The object of the teeth shields **572** is to prevent gravel and other debris to be present between the teeth of the cogged pieces **230**, **234** at their interface, thereby increase life cycle of the cogged pieces **230**, **234**. The general shape of the teeth shields **572**, in addition to the interfacing cogged pieces moving in opposed direct helps in keeping the **572** in place. Practically, according to an embodiment, the teeth shields **572** are made of a top piece **590** and a bottom piece **592** that are clipped to each other once the cogged pieces **230**, **234** are mounted to the general structure **570**. According to another embodiment (not depicted), the teeth shields **572** are made of a front piece and a rear piece that are clipped to each other about the central floor-free portion **588** other once the cogged pieces **230**, **234** are mounted to the general structure **570**. The teeth shields **572** may feature a closable opening **594** for lubricating the cogged pieces **230**, **234** at their interface.

[0211] Referring particularly to Figs. 42 and 43, it is to be noted that the hydraulic cylinder **282**, aka hydraulic linear actuator, through its double-barrel

four(4) inlets configuration, ensures that the same volume of oil is used, and thus maintained, in the hydraulic system regardless of the configuration of the hydraulic cylinder **282**, aka position of the arm extremities or pistons, in the barrels. As the arm moves in one barrel, the same volume of oil pushed out of the first barrel is freed in the second barrel. By associating the aligned configuration of the steering axle **334** with an extreme position of the arm relative to at least one of the barrel, it is always possible through control of pressure in one of the inlets to force alignment of the steering axle **334**.

[0212] Preferably, counter balance vales are connected to each one of the inlets of the hydraulic cylinders **282** to prevent overpressure at the inlets, extra pressure at one inlet being counterbalanced by the associated counter balance valve,

[0213] According to realizations, hydraulic cylinders **282** may be mounted to connect a steering axle **334** or a part of steering axle **334** to another steering axle, or to a fix component of the semi-trailer **110** or of the bogie **302**. The last option, through ais absolute reference, allows at any point to set a steering axle **334** is the neutral aligned position.

[0214] It is to be noted that the present steering assembly **220** is a hydraulic powered system, and as any hydraulic system on heavy vehicles, and particularly heavy semi-trailers, operation of the hydraulic system requires a lot of amperage to operate. Nowadays, some designs of semi-trailers adopt a solution to that problem which consists in having an important number of batteries mounted to the semi-trailer for autonomously powering the hydraulic pump(s) of the hydraulic system, what frequently sum up to a power requirement of two hundred (**200**) Amperes of 12 Volts direct current. Accordingly, an alternative solution adopted nowadays also comprise to install generators on the semi-trailers to decrease the necessary stocking capacity of the batteries.

[0215] Hence, herein is described an alternative energy stocking system **270** for powering the hydraulic system of the steering assembly **220**. The energy stocking system **270** allows to substantially decrease the necessary stocking capacities of the batteries of the semi-trailer, and environmental impact.

[0216] The energy stocking system **270** takes advantage of the rotation of the wheel hub assemblies **224** as the semi-trailer **110** is hauled by the tractor **100**. The energy stocking system **270** combines a number of hydraulic generators **272**, fig. 34, and a hydraulic accumulator **274** (see Fig. 42). The hydraulic generators **272** are installed opposed to the external extremity of the spindles **246** and are driven through the spindles **246** as the wheel hub assemblies **224** are rotating engaged to the ground. The hydraulic generators **272** are hydraulic pumps that pump oil into the under-pressure accumulator **274** to stock hydraulic potential energy available afterwards to exert pressure into the hydraulic system on demand.

[0217] As is described in details hereinafter, the hydraulic generators **272** are coupled to a circuit that operated in close circuit once the accumulator **274** has reached its optimal pressure, preventing over-pressurizing, premature wear, and/or failure of the present energy stocking system **270**.

[0218] Referring additionally to Fig. 43, the hydraulic accumulator **274** comprises, according to an embodiment, three individual hydraulic accumulators **276** commonly connected to the hydraulic circuit, and adapted to contain seven (7) liters of oil under about two thousand five hundred (**2500**) PSI (Pounds per square inch) of pressure. The accumulators **276** comprises a compressible oil compartment **278** and a gas compartment **280** in which nitrogen is stocked and used to compress the compressible oil compartment **278** as the compressible oil compartment **278** is evacuated from its oil. In opposition, the nitrogen increase pressure as the compressible oil compartment **278** is filled with oil; the compressible oil compartment **278** and gas compartment **280** being complementary to each other.

[0219] Referring to Figs. 34-41, the hydraulic generators **272** are mounted coaxially to the axle and the spindles **246**. The hydraulic generators **272** are fixedly connected to the spindles **246** such as when the wheel hub assemblies **224** roll as the tractor **100** hauls the semi-trailer **110**, the hydraulic generators **272** are powered. The hydraulic generators **272** comprise an inner part, fixedly mounted to the rotating spindle **274**, and a non-rotating outer part, connected to the axle, with relative rotation pumping the oil.

[0220] Accordingly, energy stocking system **270** requires a less powerful pump and thus less electric energy to be stocked to power it. For instance, the present steering assembly **220** that would require about two hundred (**200**) Amperes for powering the hydraulic system according to common designs, may operate with a pump and e.g., batteries requiring less than twenty (20) Amperes. In the present case, two batteries are used at the startup of the hydraulic system to power a startup pump that would fill the hydraulic accumulator **274** before the operation (note: since a startup phase, the process may be performed according to a lower response-time requirement, thus with a less powerful pump requiring less amperage). During the operation, the startup pump will usually not be required to operate in real time to respond to hydraulic pressure response. The startup pump would operate almost only to complement the hydraulic generators **272** when deemed necessary. After the startup phase, the batteries would power valves and other components that are consuming less energy than a hydraulic pump to direct the hydraulic power stocked in the hydraulic accumulator **274** toward the appropriate component of the hydraulic system. Such flow of operation and requirements will become apparent from the following detailed description.

[0221] Referring to Figs. 42-43, a hydraulic circuit schematic is provided. Depicted on Fig. 42 are the batteries **284**, a startup motor **286** operating at the startup to fill the hydraulic accumulator **274**, and the non-pressurized oil container **288**. Fig. 42 depicts on the top left the hydraulic accumulator **274**. The remaining

of the circuit on Fig. 42 depicts the circuit controlling the hydraulic cylinders **282** operating the steering of the steering assembly **220**.

[0222] Fig. 43 depicts the part of the circuit associated with the hydraulic generators **272** and the closed circuit taking place once the hydraulic accumulator **274** has reached the desired pressure.

[0223] Control components and valves (not individually identified) are completing the circuit and can be understood from the circuit by a person skilled in the art.

[0224] It is worth mentioning that the steering assembly **220** is controlled by two hydraulic four-controls cylinders **282** (see Fig. 42) each featuring e.g., four inlets/outlets **296** that allows to reset the steering wheels to the straight configuration by operating the hydraulic cylinders **282** to a specific end-of-course position. The use of an end-of-course position as the straight configuration prevents the necessity to use an encoder and to store data that is necessary to refer to restore the system to its straight configuration. Such solution prevents failures such as controller memory and angular encoder failures to require urgency maintenance. The same applies to the hydraulic pressure entries. The steering system **115** is designed such that when a failure occurs that prevents correct control of the cylinders to steer the wheels, pressure in some normally open valves automatically results in the wheels on both sides of the semi-trailer (since joined through the rotatable central cogged piece **230**) to resume to the straight configuration, namely the wheels returning to a straight direction, i.e., parallel to each other and parallel to the longitudinal axis of the semi-trailer.

[0225] The steering system **115** comprises a series of security features and security redundancy solutions in addition to the four inlet/outlet cylinders, the normally open valves, and the hydraulic energy stocking discussed before. These security features (not explained herein but understandable from the figures by a person skilled in the art) ensures that the steering system **115**, in almost all cases

of failures, either remains operable or steer the wheels to the straight configuration, and thus allowing the operator to continue operating the semi-trailer **110** (e.g., completing remaining deliveries of the day and returning to the garage) until maintenance is performed.

[0226] Therefore, one person skilled in the art would recognize that the present description contemplated therethrough steered wheels semi-trailers featuring a variety of configurations, wherein the parameters used to establish the configuration of the steered wheels semi-trailer may comprise, in a non-limiting manner:

- Distance of the steered axles relative to the kingpin **102**;
- Wheelbase;
- Installation of the steering system **115** on a single semi-trailer, on a front or a rear semi-trailer of a road train;
- Steering system comprising a single steered axle, a dependent steered axle, etc.
- Etc.

[0227] It is also contemplated that the steering system **115** may be installed on a self-powered vehicle, e.g., articulated buses and airplanes, with the angle driving parameters driving the steering angles of the wheels being potentially captured in an alternative manner than via the sensing of the rotation of a kingpin relative to a hauling saddle without departing from the scope of the present description.

[0228] It is also contemplated that embodiments may encompass a combination of one or more, up to all of the features described herein without departing from the scope of the description.

[0229] It is further contemplated that technical variations are also intended to be contemplated therethrough, wherein the general geometry of the described

features and/or the general way in which it works are generally maintained. Examples of such technical variations comprises alternative fixation techniques, alternative number of components involved in generating a coupling, and an operating interface based on e.g., use of cogs, use of interconnecting chain(s), use of interconnecting belt(s).

[0230] It is also contemplated that systems described herein may be embodied in other environment having similar requirements but not listed herein.

[0231] For instance, a similar hydraulic energy stocking system may be installed on garbage trucks equipped with a hydraulic arm used to lift and empty garbage cans into a compactor bin. The hydraulic energy stocking system may accumulate hydraulic energy during rides between residences and/or when the motor runs, and uses the accumulate hydraulic power (alone or in combination with pump provided power) to power to the hydraulic arm, thus decreasing peak power requirements. Such exemplary solution thus requires a less powerful pump to be installed thereto.

[0232] While preferred embodiments have been described above and illustrated in the accompanying drawings, it will be evident to those skilled in the art that modifications may be made without departing from this disclosure. Such modifications are considered as possible variants comprised in the scope of the disclosure.

CLAIMS:

1. A steering axle to be mounted to a vehicle having a longitudinal axis, the steering axle comprising:

an axle structure on which is mounted steerable wheels each rotatable about a rotation axis;

a left steering piece rotatably mounted to the axle structure and adapted to have a left steerable wheel mounted thereto having a rotation axis;

a right steering piece rotatably mounted to the axle structure and adapted to have a right steerable wheel mounted thereto a rotation axis; and

a central piece rotatably mounted to the axle structure about a pivot axis, the central piece having a left interface and a right interface symmetric to each other,

the left interface and the right interface having a neutral position opposed to each other relative to the pivot axis of the central piece, wherein, in the neutral position, the rotation axes of the steerable wheels being parallel each other, and wherein the left interface and the right interface are non-symmetrical relative to their respective neutral position.

2. The steering axle of claim 1, wherein, in the neutral position, the rotation axes of the steerable wheels are coaxial.

3. The steering axle of claim 2, wherein the central piece comprises a left interface and a right interface defined according to a longitudinal plan comprising the pivot axis of the central piece and perpendicular to the coaxial rotation axes, wherein the left interface and the right interface are mirror images of each other.

4. The steering axle of claim 1, wherein the central piece comprises a clogged portion adapted to interface with the left steering piece.

5. The steering axle of claim 4, further comprising a steer driving arm connected to the central piece.

6. The steering axle of claim 5, further comprising a joint joining the driving arm to the central piece, and
wherein, when the central piece is in the neutral position, the joints are equidistant relative to a frontmost portion of the central piece respectively to the left and to the right of the frontmost portion.

7. The steering axle of claim 6, wherein, when the central piece is in the neutral position, the joints are equidistant relative to the frontmost and relative to a rearmost portion of the central piece.

8. The steering axle of claim 5, wherein the axle structure comprising a pair of longitudinal beams, wherein the driving arm extends between the longitudinal beams.

9. The steering axle of claim 8, further comprising a top axle body and a bottom axle body each mounted to the longitudinal beams, wherein the central piece, the left steering piece and the right steering piece are mounted to the top axle body and the bottom axle body.

10. The steering axle of claim 9, wherein the central piece, the left steering piece and the right steering piece are mounted between the top axle body and the bottom axle body.

11. The steering axle of claim 8, wherein the longitudinal beams comprising a proximal end providing longitudinal clearance relative to the left interface and the right interface.

12. The steering axle of claim 1, wherein the vehicle comprises a chassis, the steering axle further comprising a suspension mounted to the axle structure, the suspension comprising:

a mounting plate mounted to the axle structure at a mounting angle greater than zero (0) degree relative to a plan parallel to the chassis;

an air spring mounted to the mounting plate, the air spring adapted to be connected to the chassis; and

a shock absorber mounted to the axle structure, with the shock absorber adapted to be connected to the chassis.



13. The steering axle of claim 12, wherein the mounting plate is facing partially frontward.

14. The steering axle of claim 12, wherein the shock absorbed is directed partially frontward relative to its mounting to the axle structure.

15. The steering axle of claim 12, wherein the left steering piece and the right steering piece are respectively rotatable about a left axis and a right axis, and wherein the left axis, the pivot axis, and the right axis are in a common plane.

16. The steering axle of claim 13, further comprising a joint joining driving arm to the central piece located about a common plane.

17. A vehicle comprising the steering axle of claim 1.

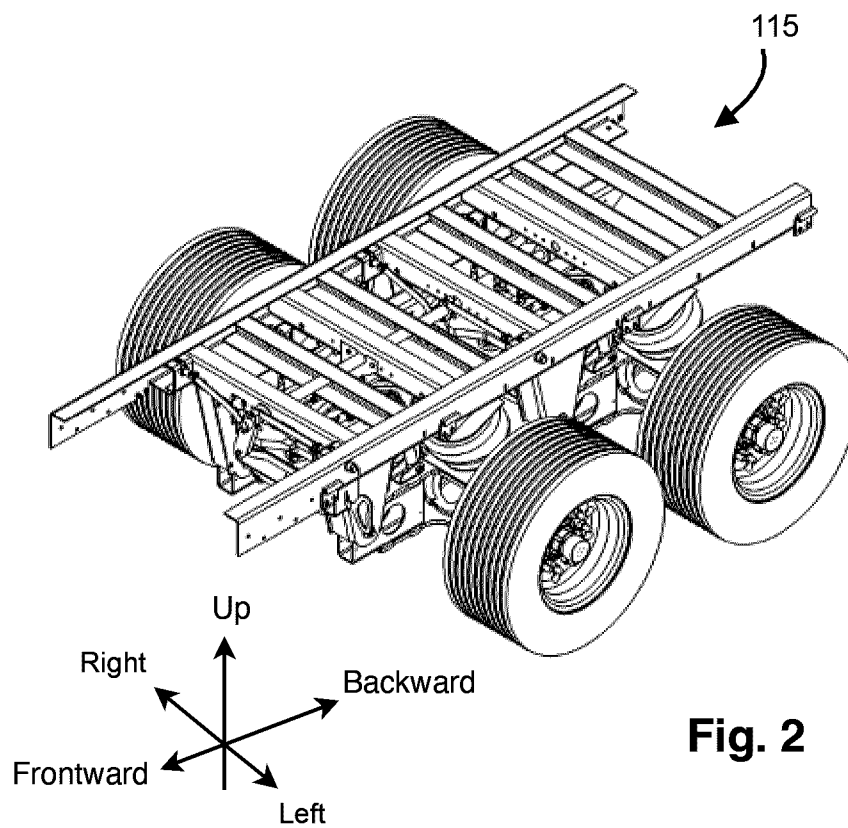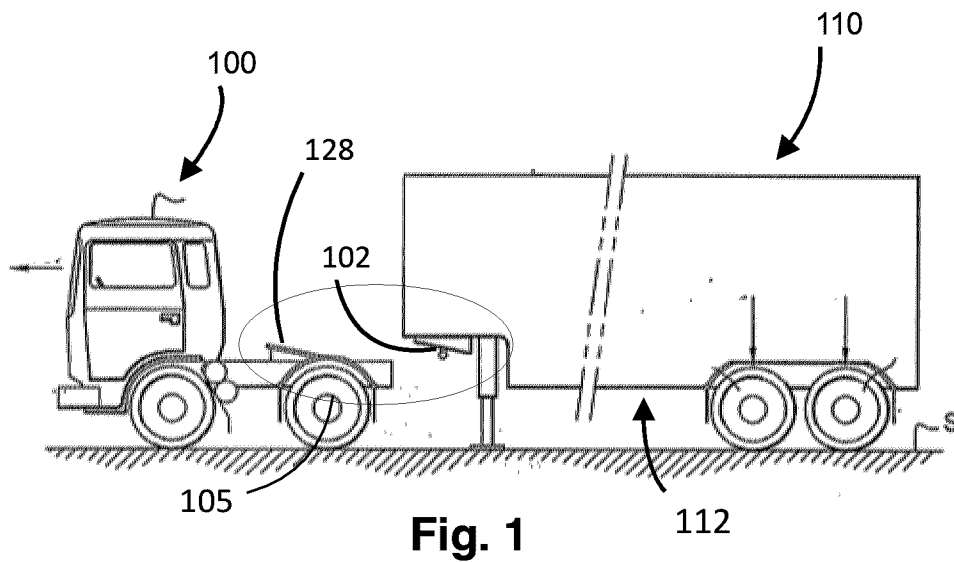

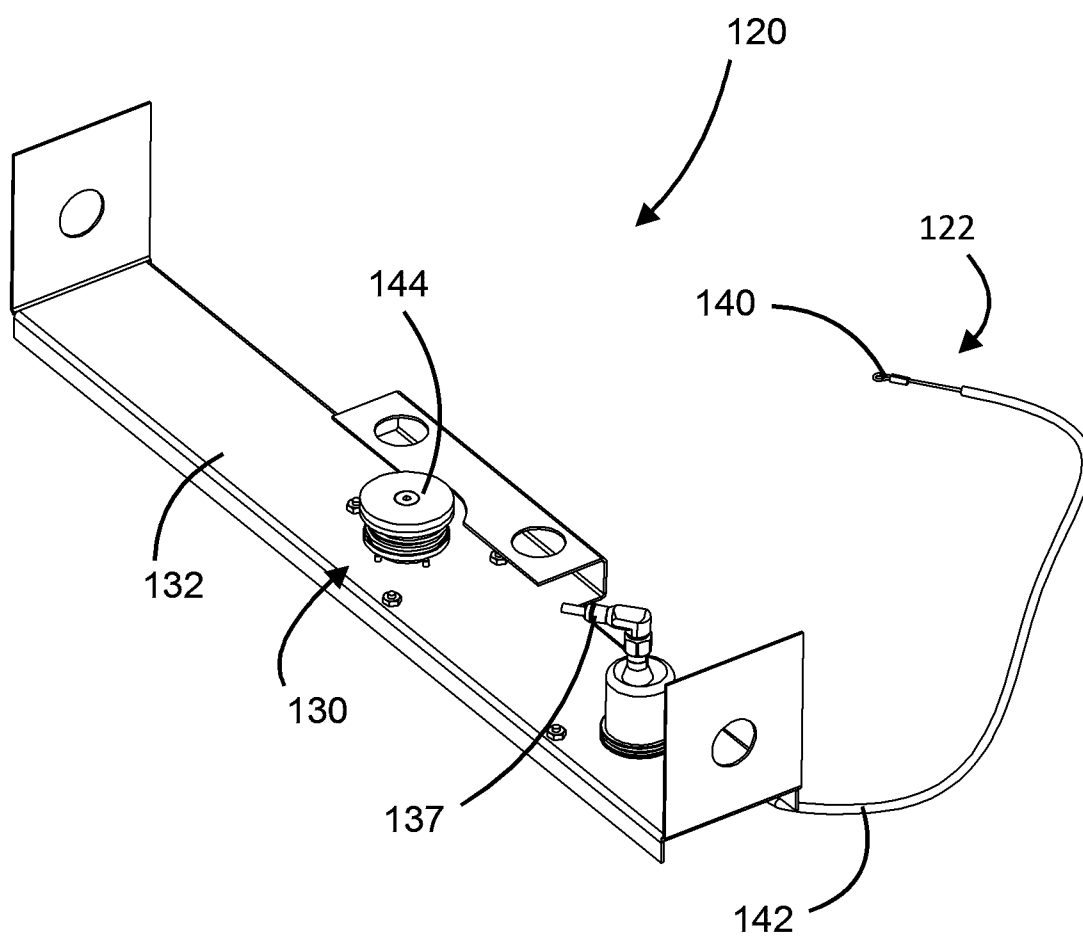


Fig. 3

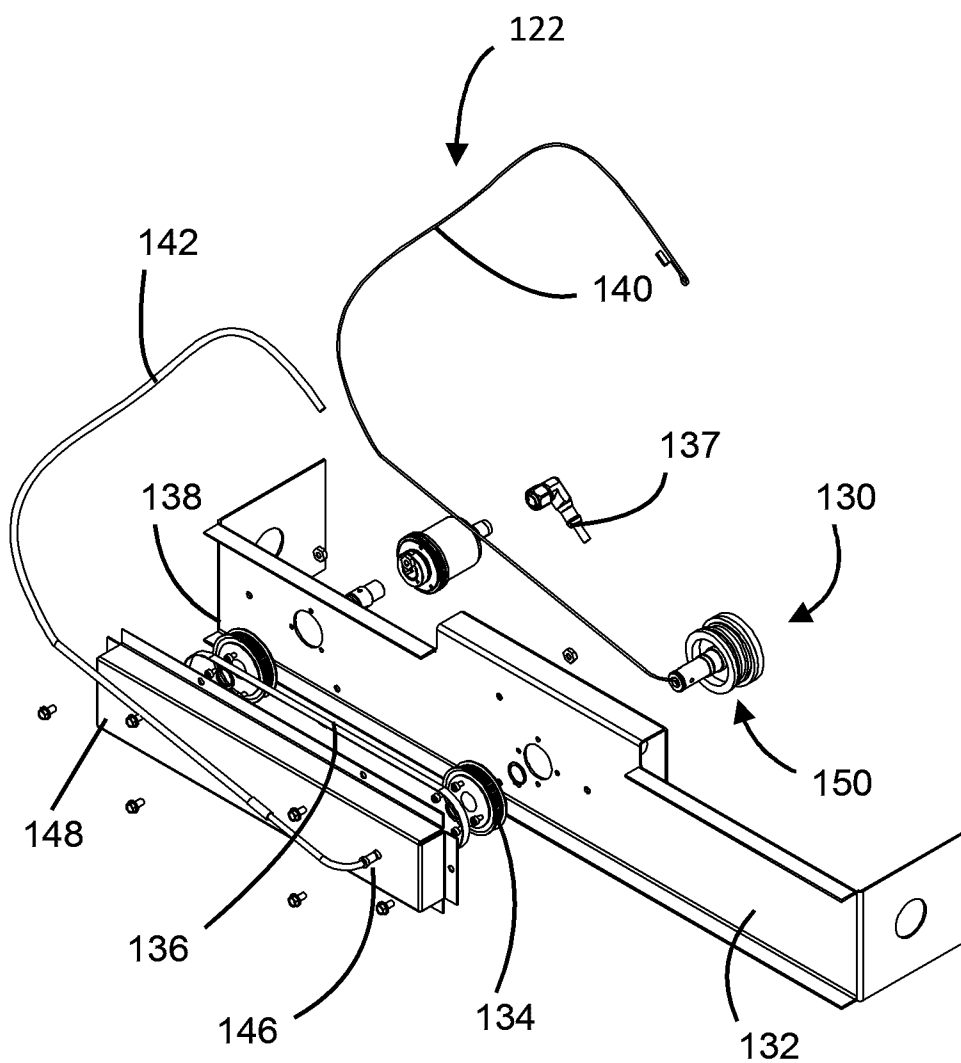


Fig. 4

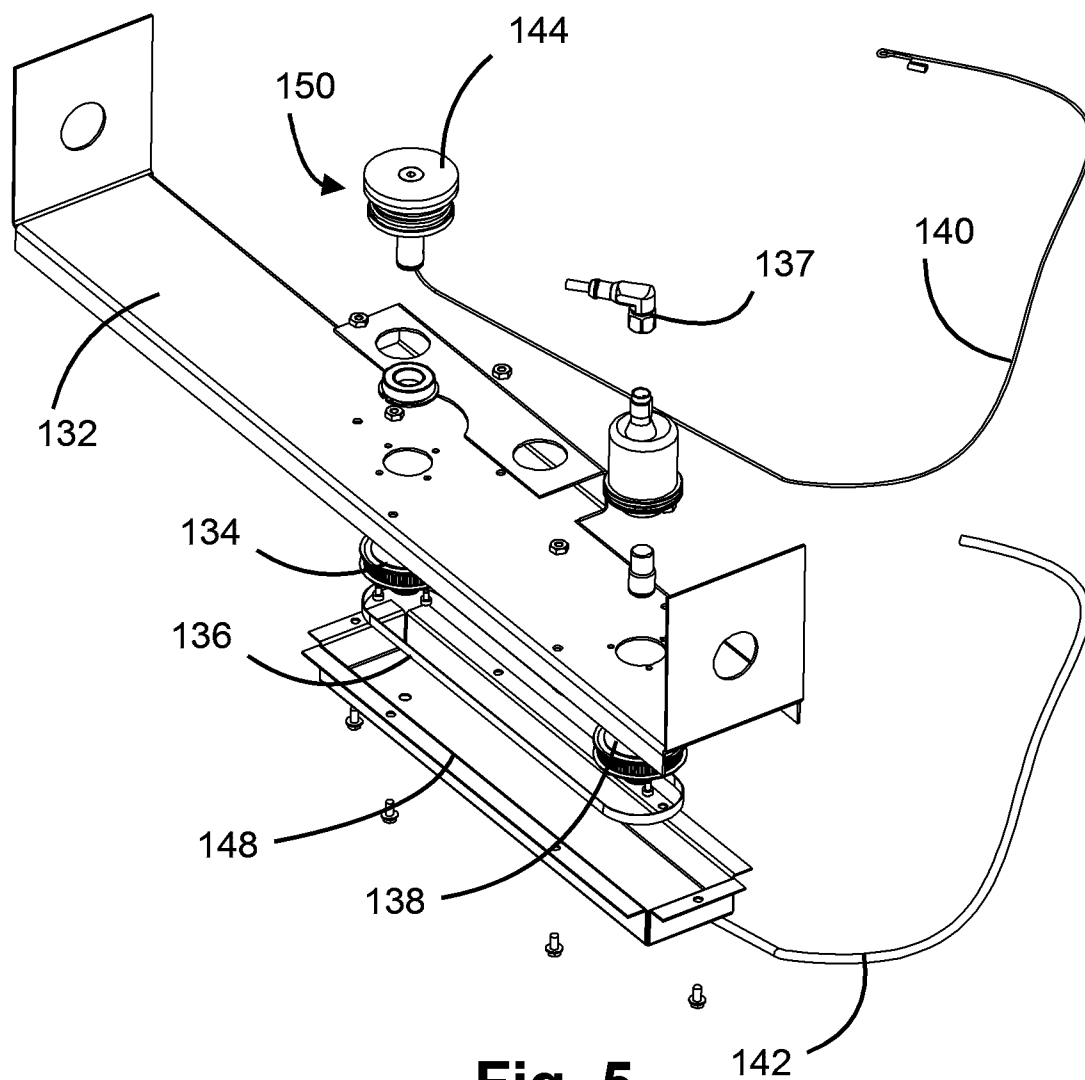


Fig. 5

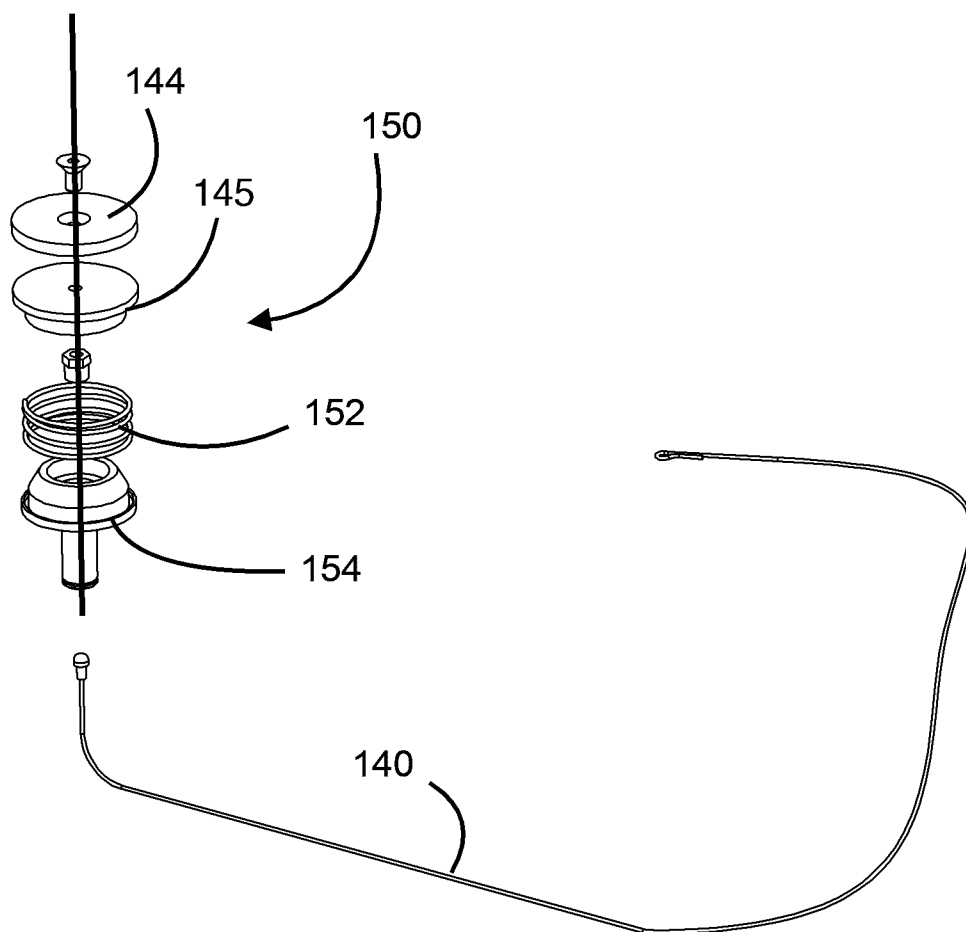


Fig. 6

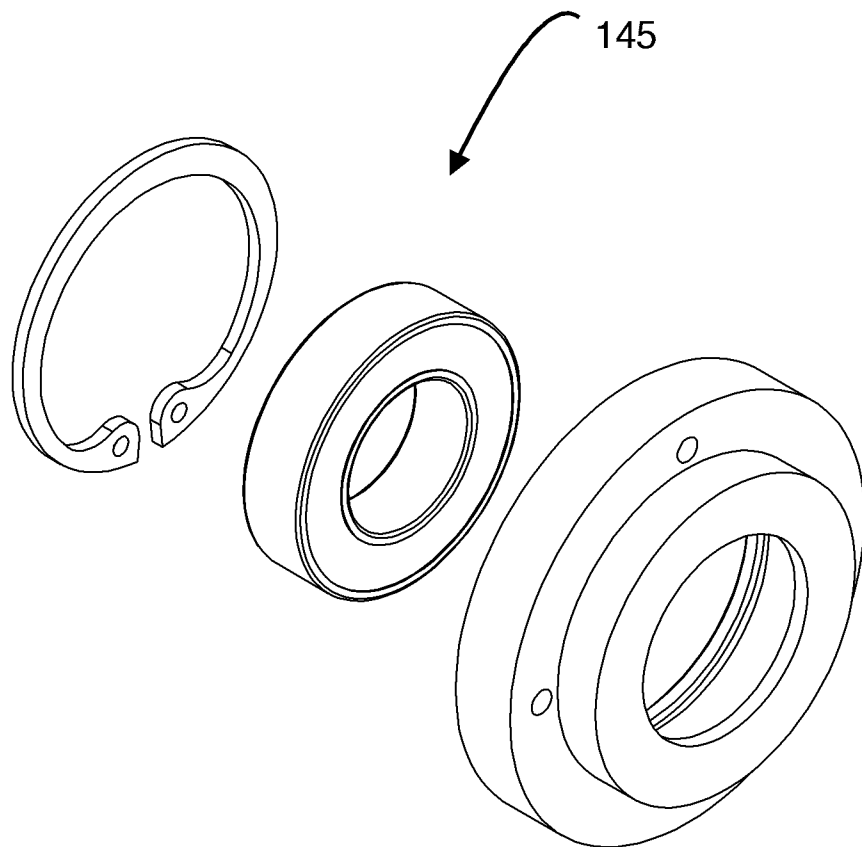


Fig. 7

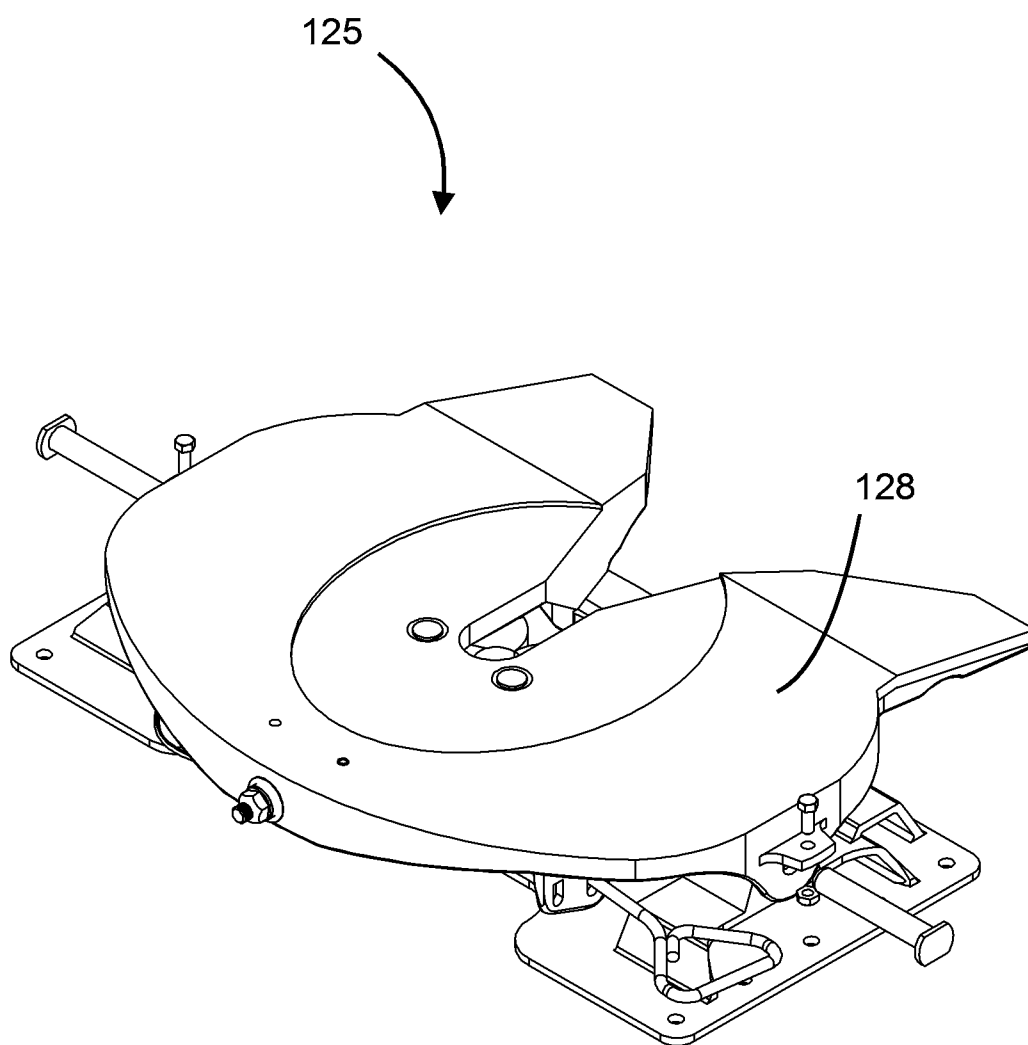


Fig. 8

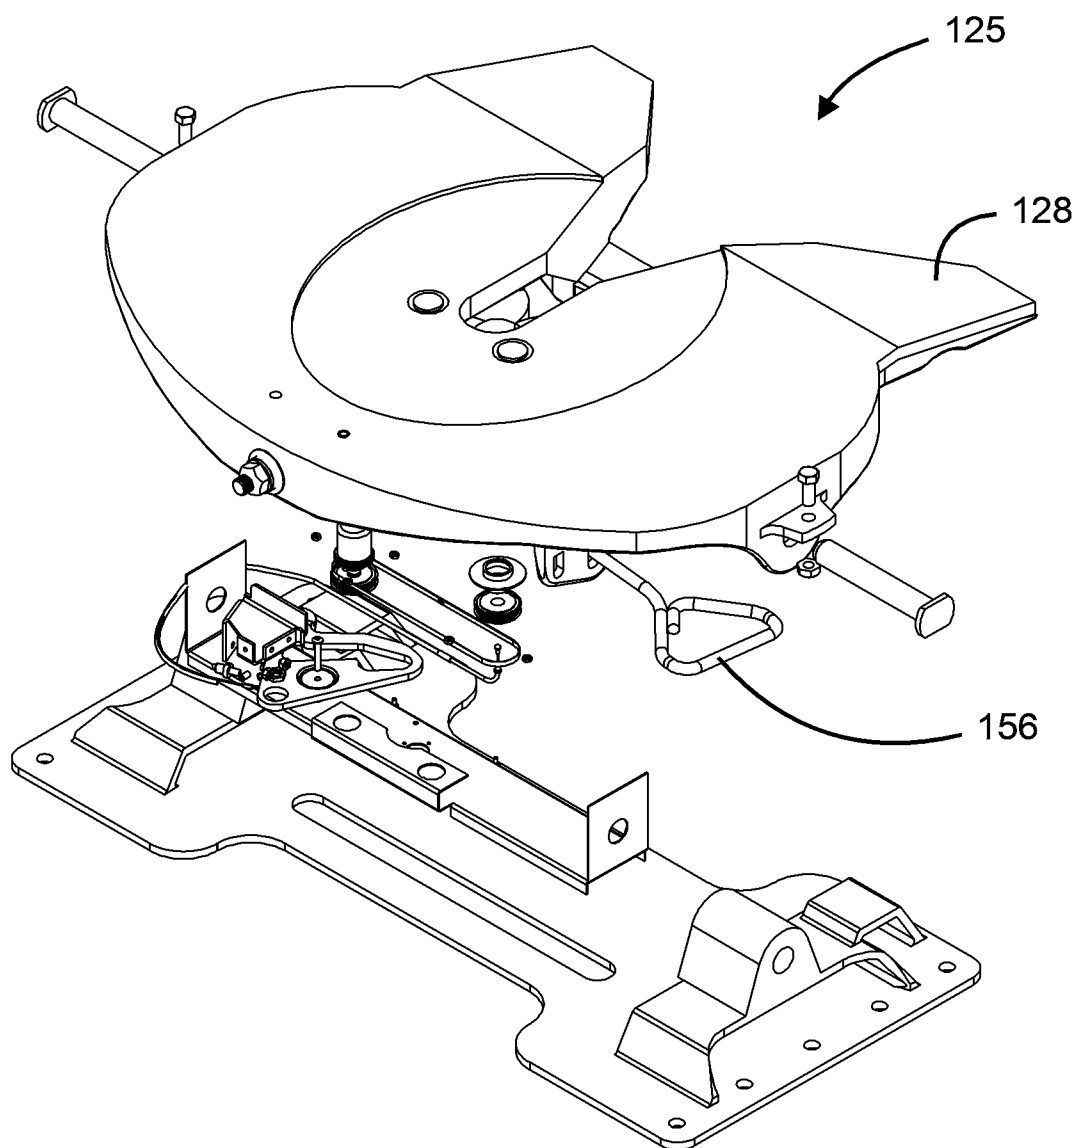


Fig. 9

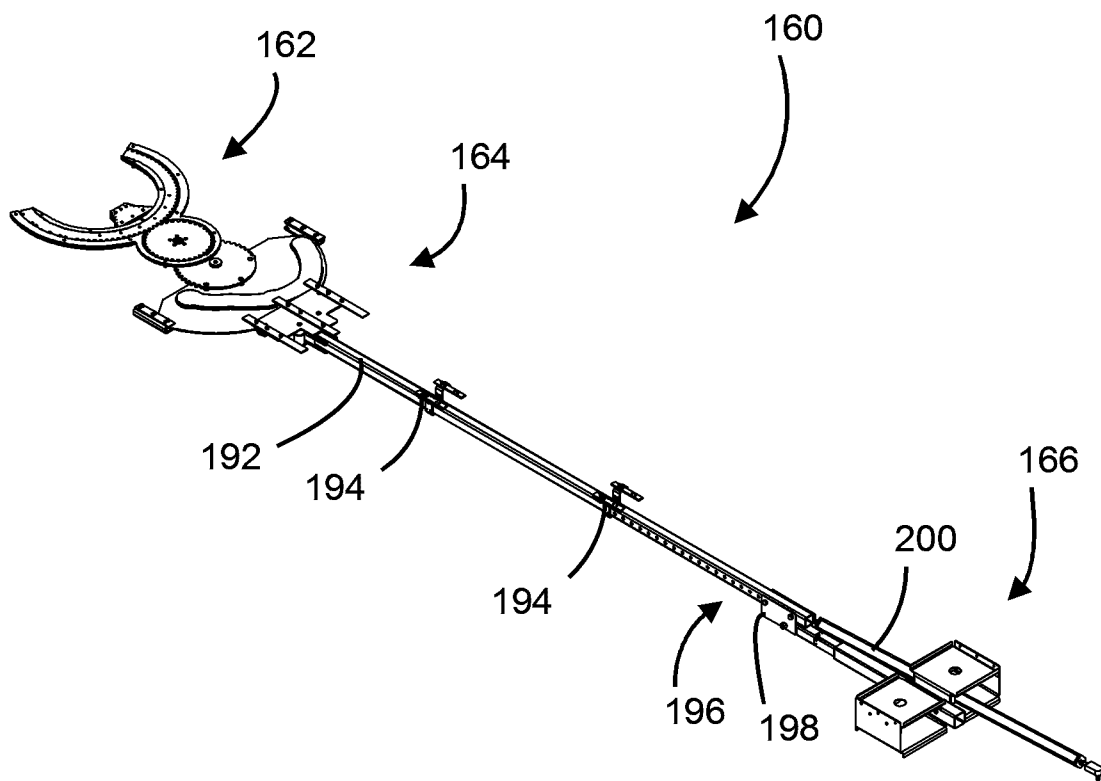
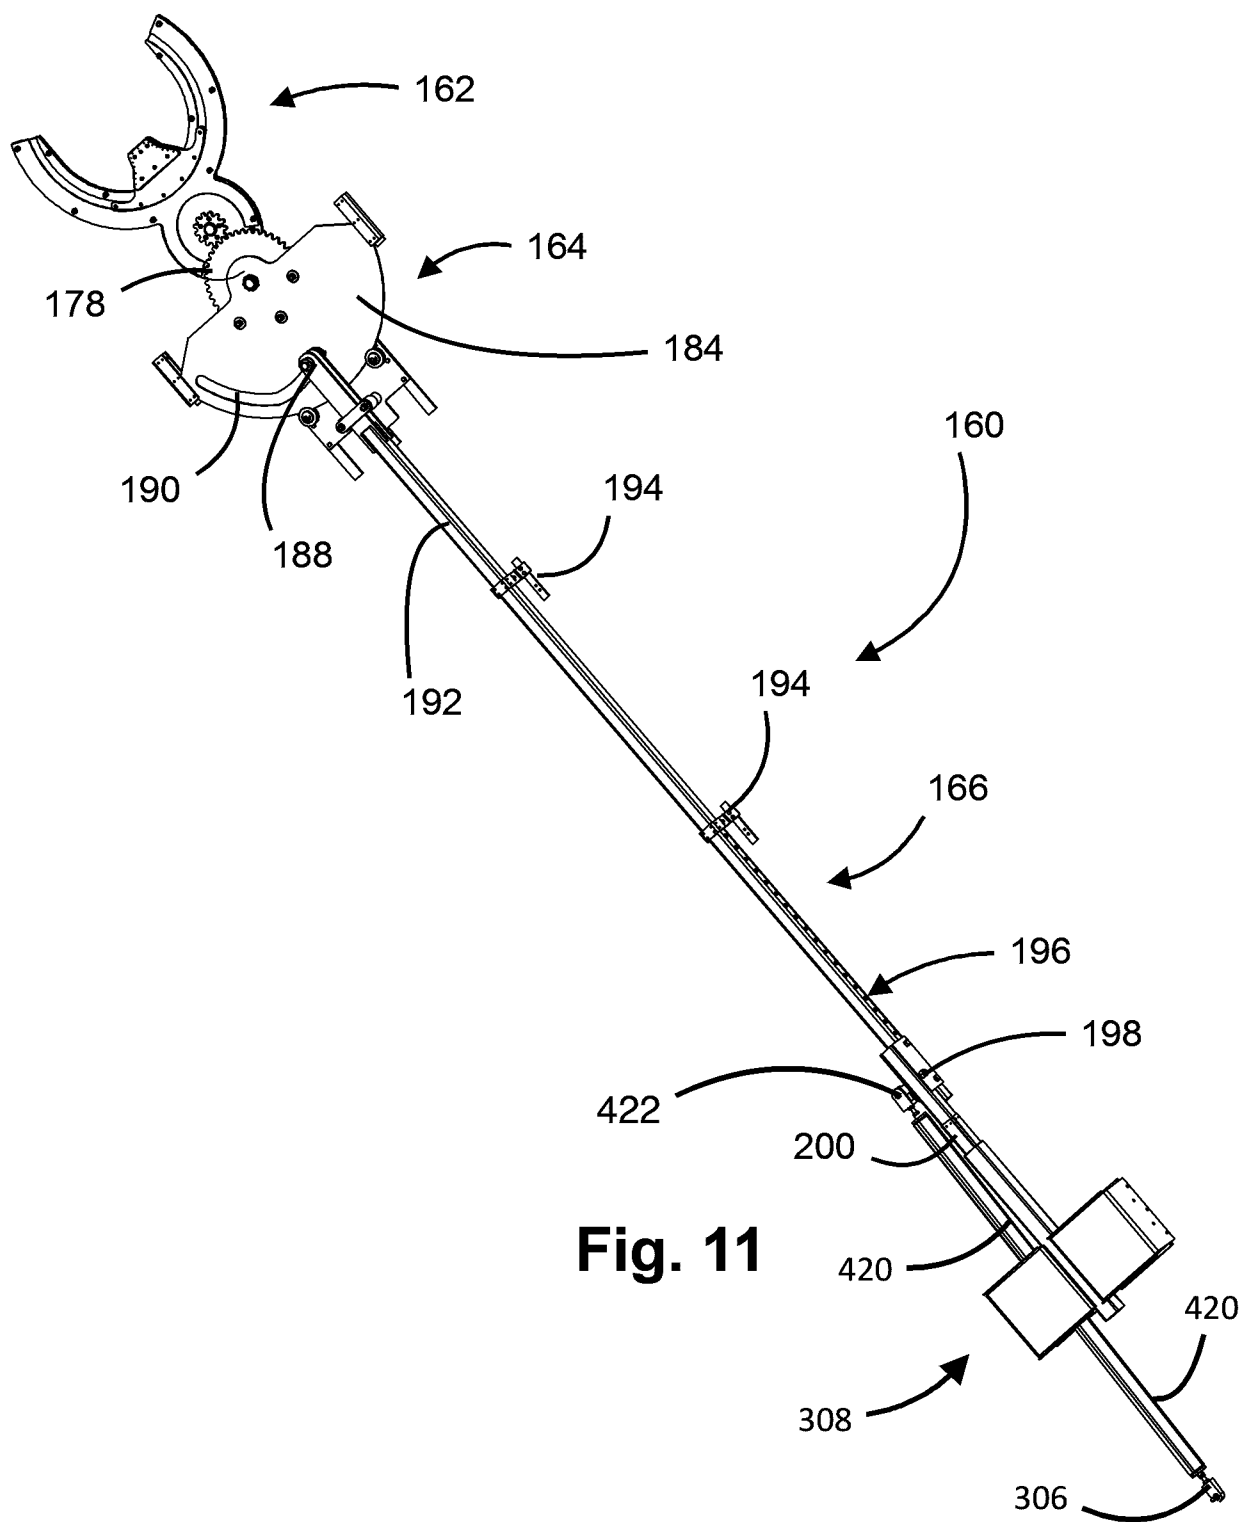


Fig. 10



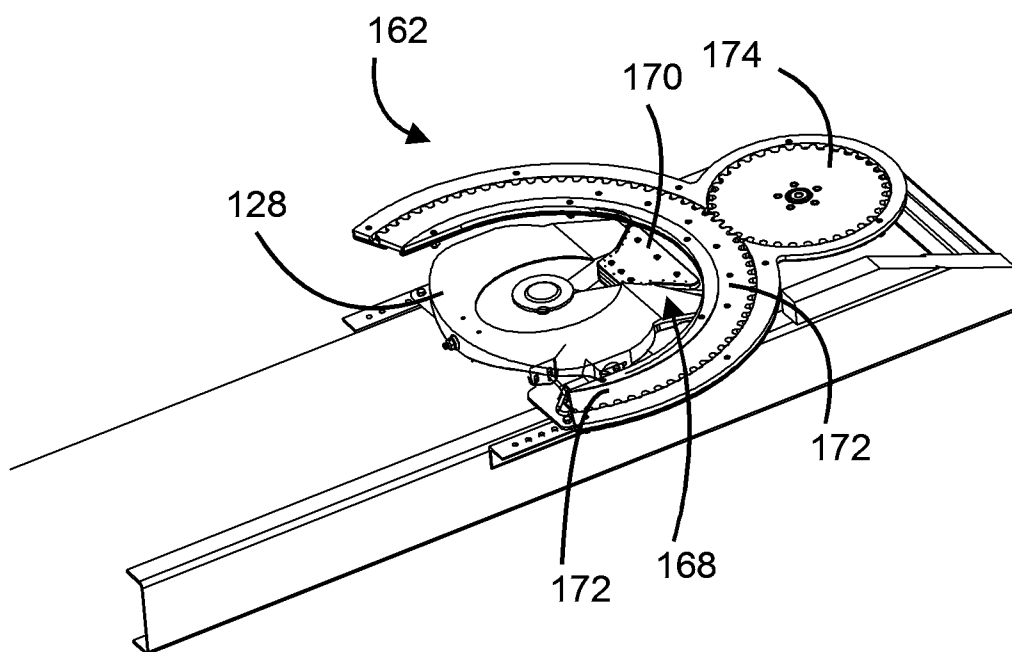


Fig. 12

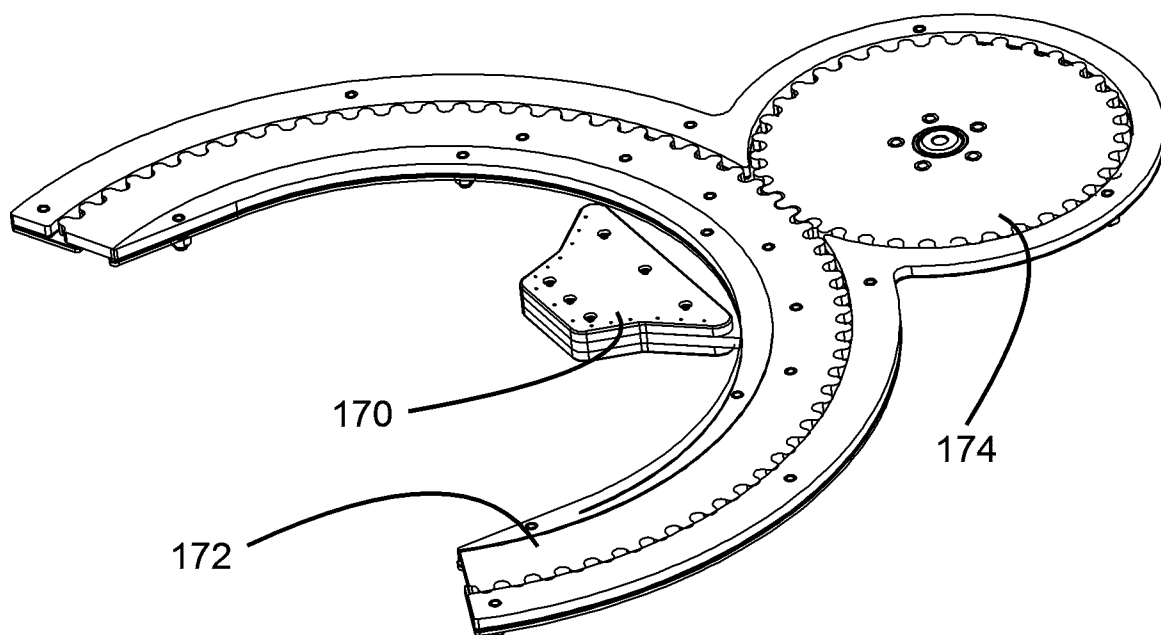


Fig. 13

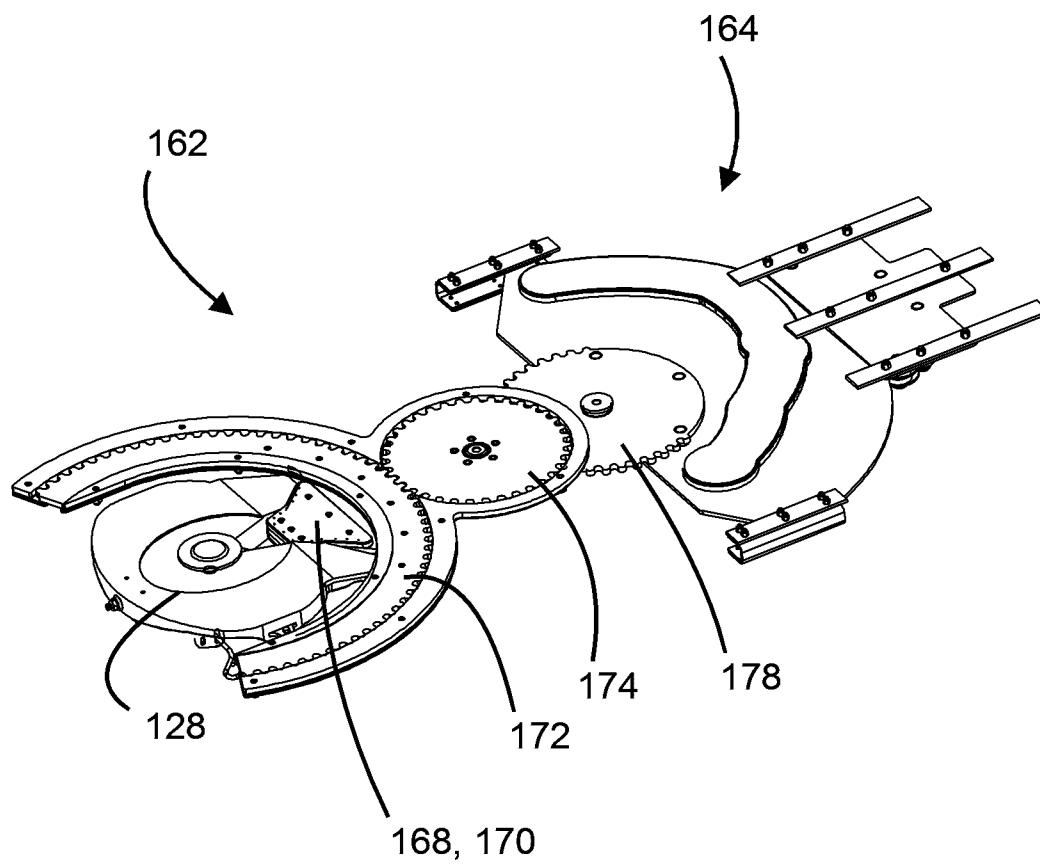


Fig. 14

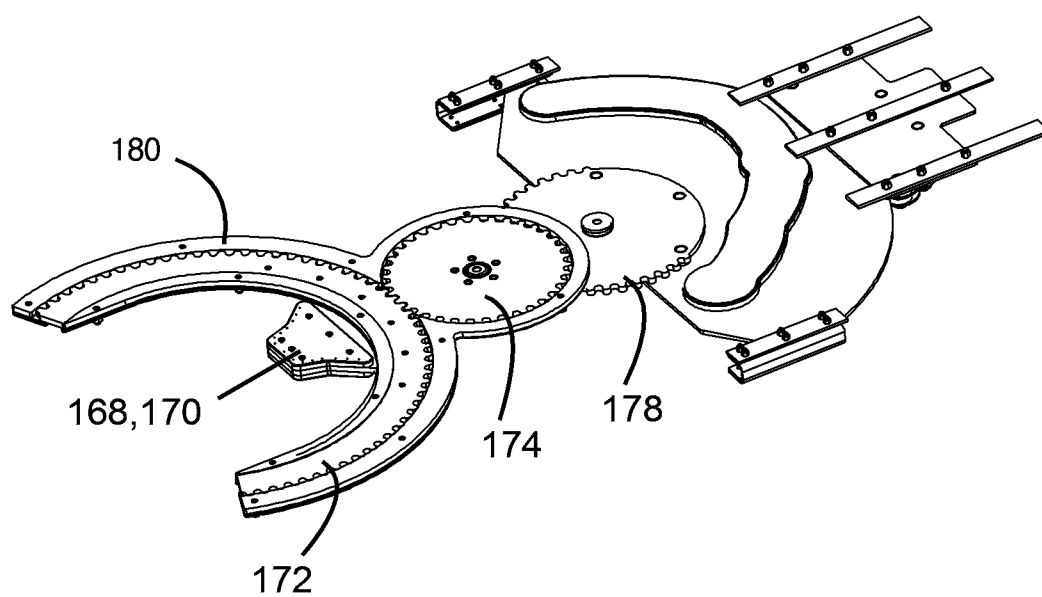


Fig. 15

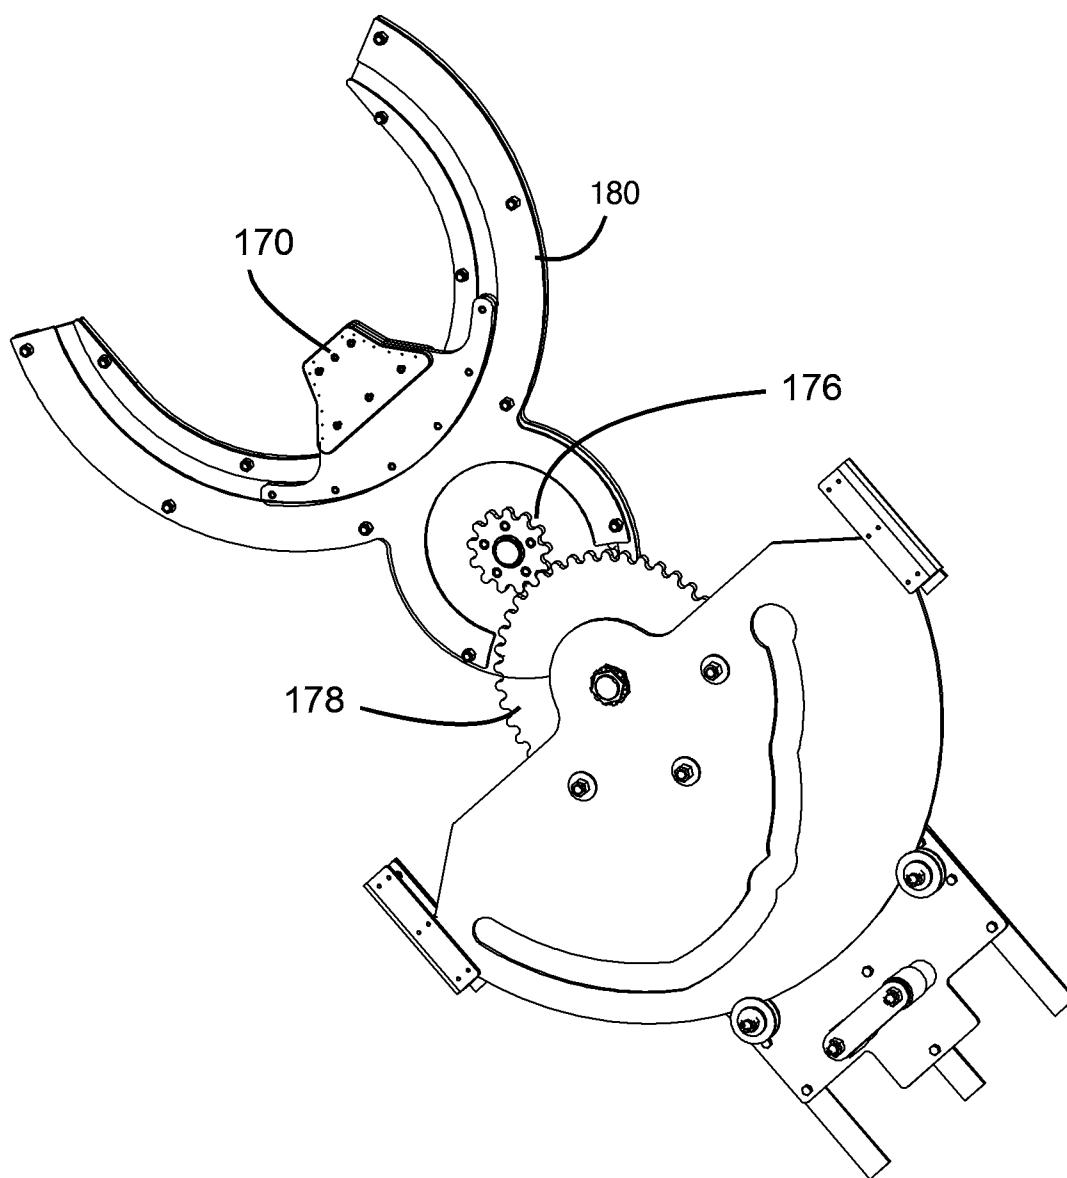


Fig. 16

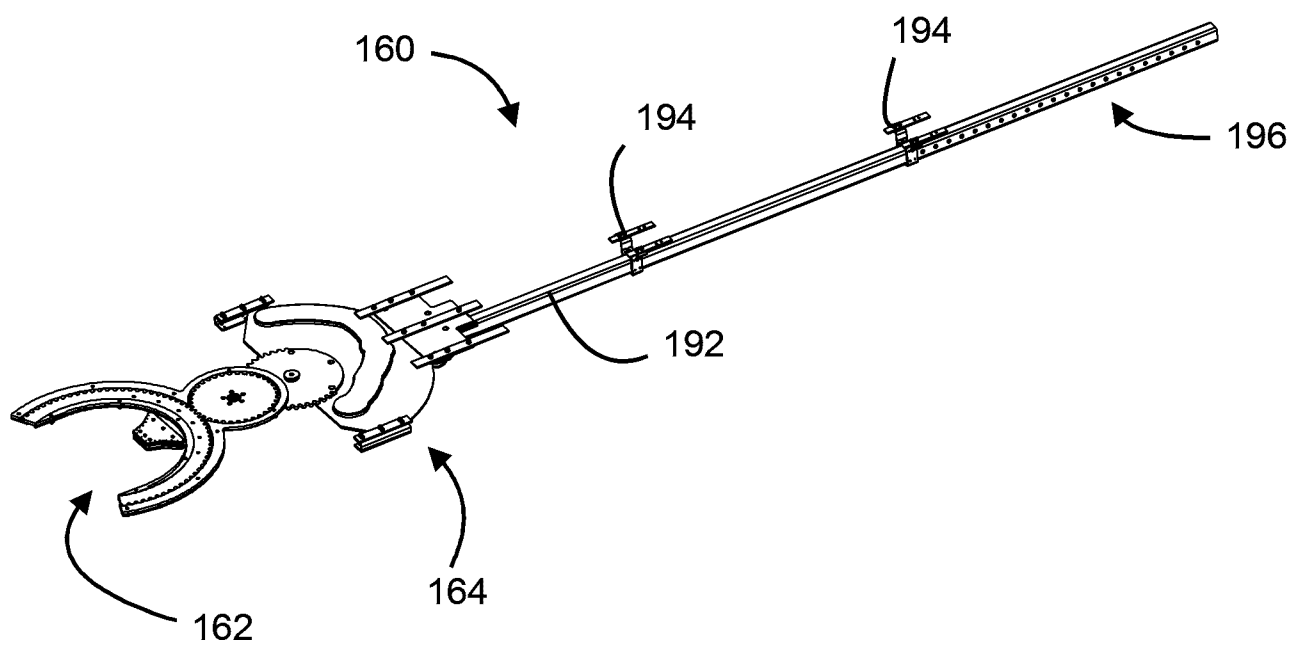


Fig. 17

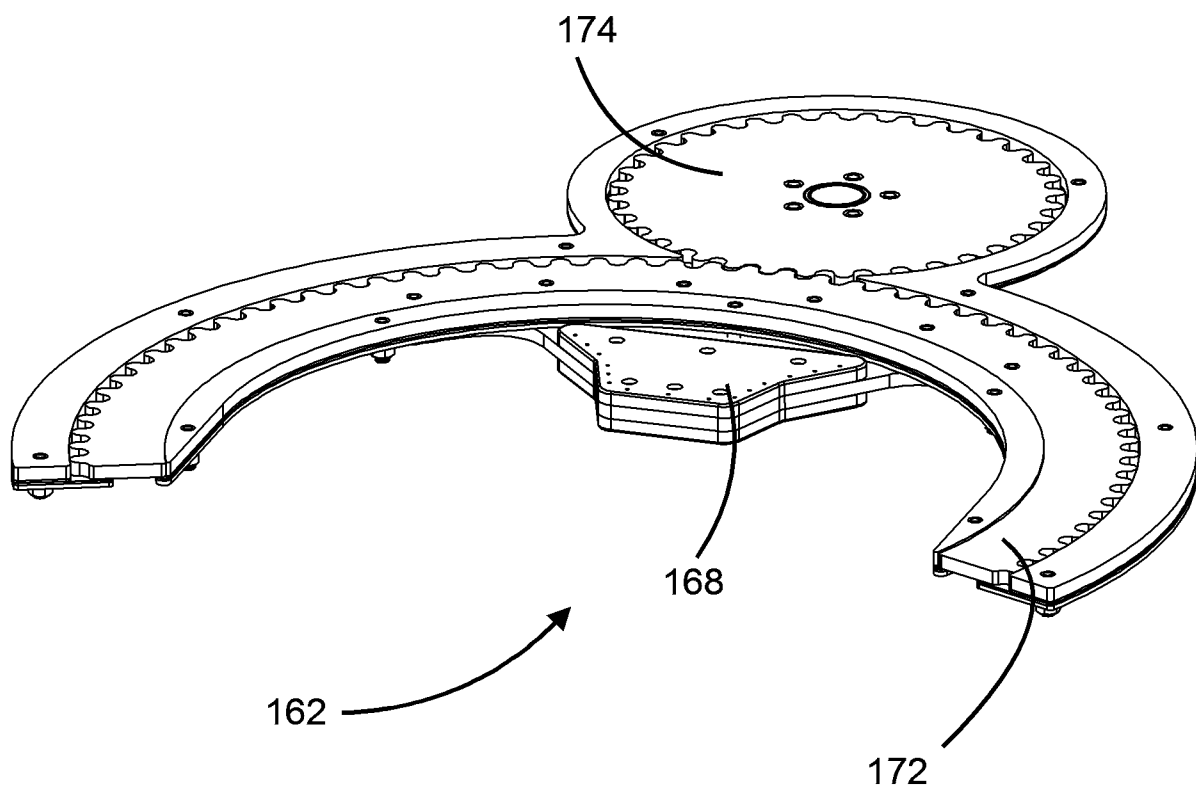


Fig. 18

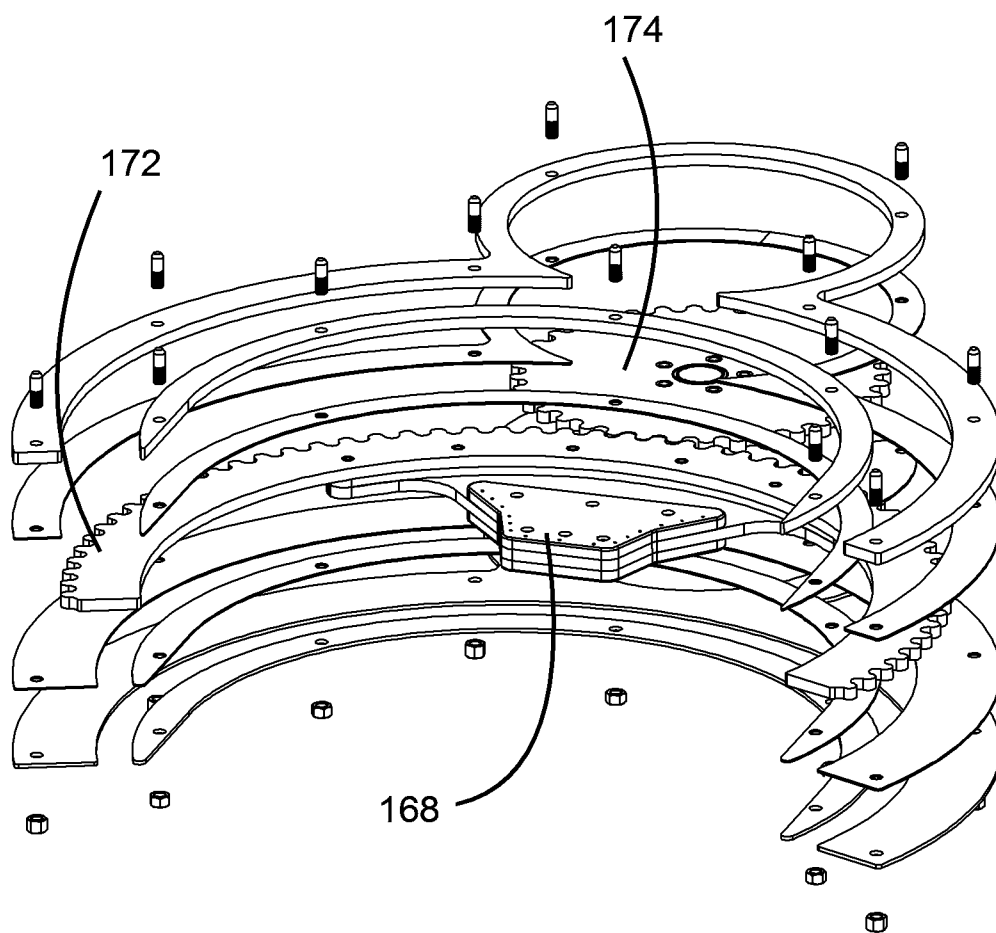


Fig. 19

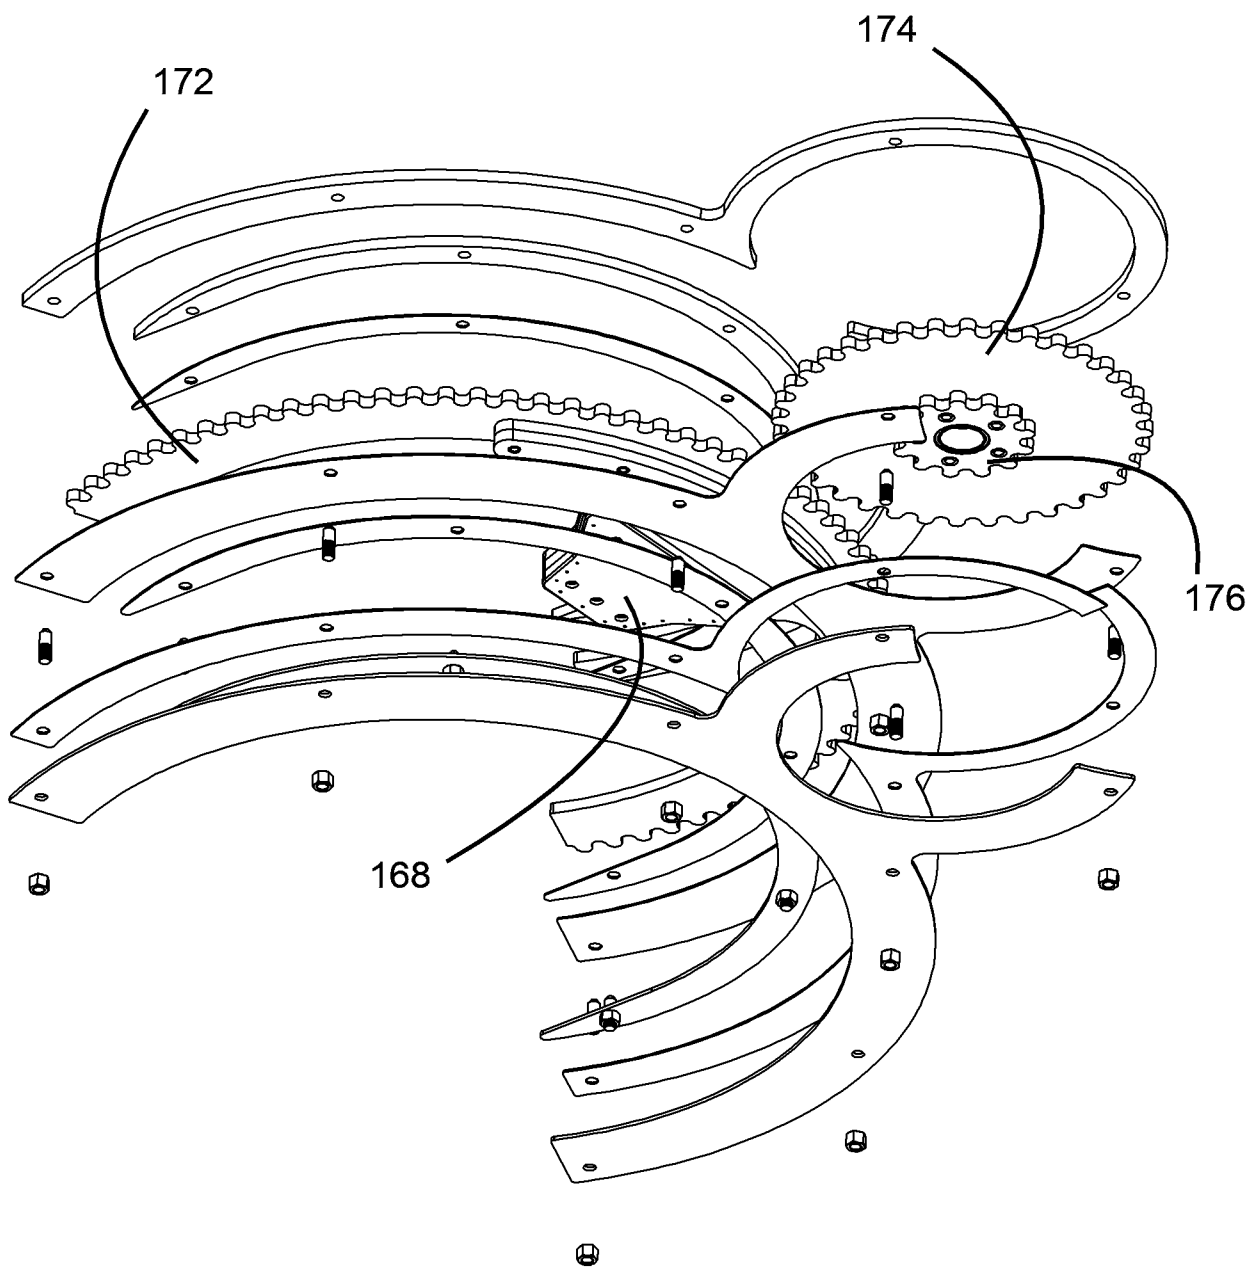


Fig. 20

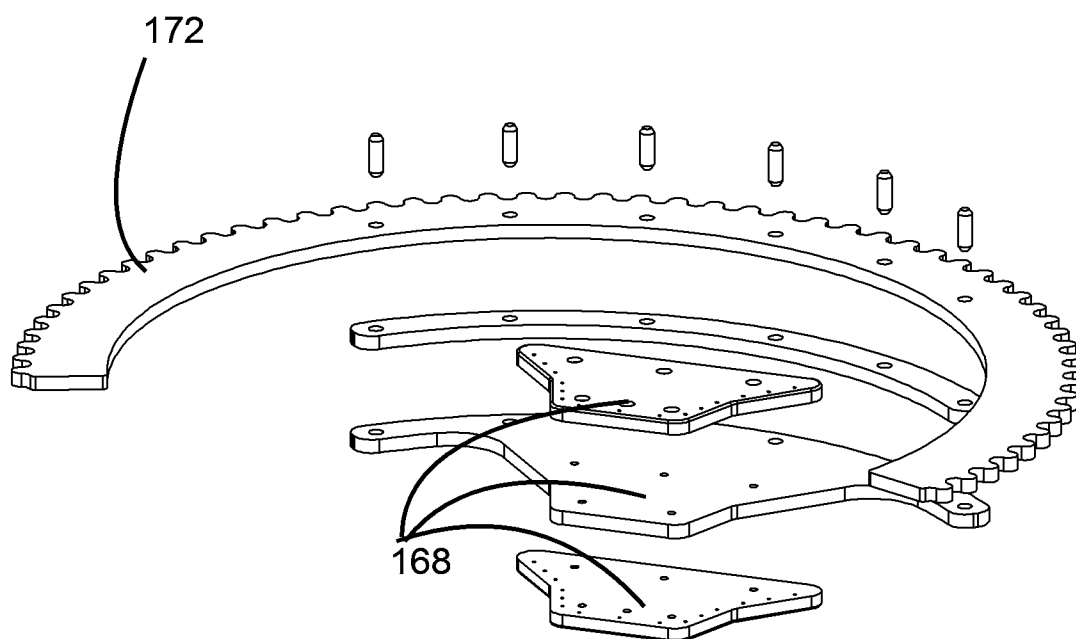


Fig. 21

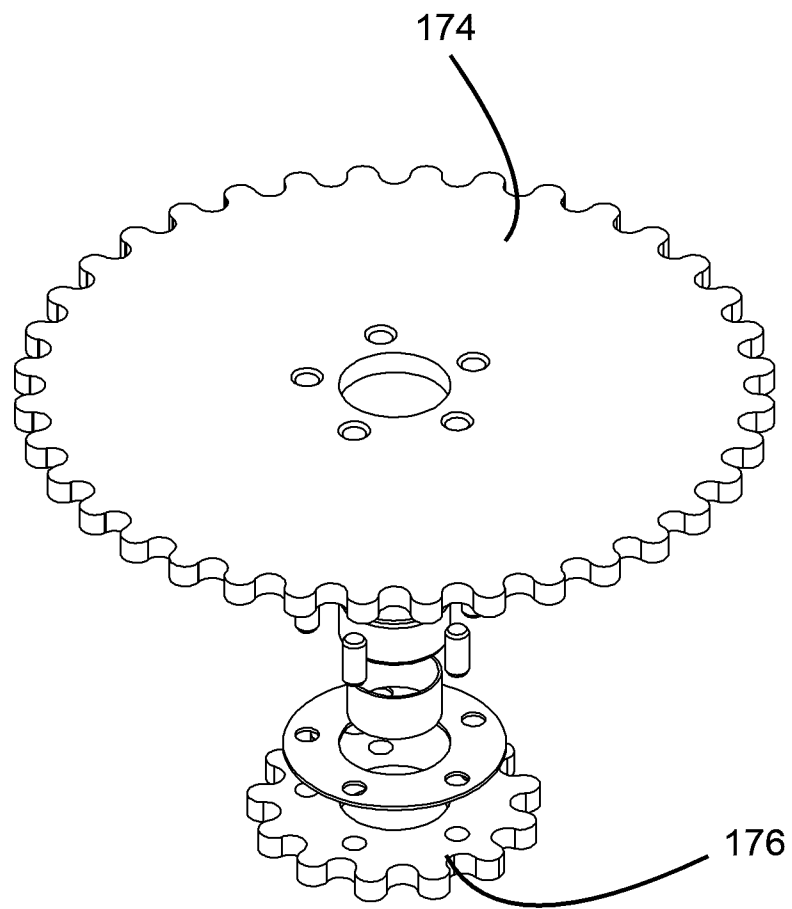


Fig. 22

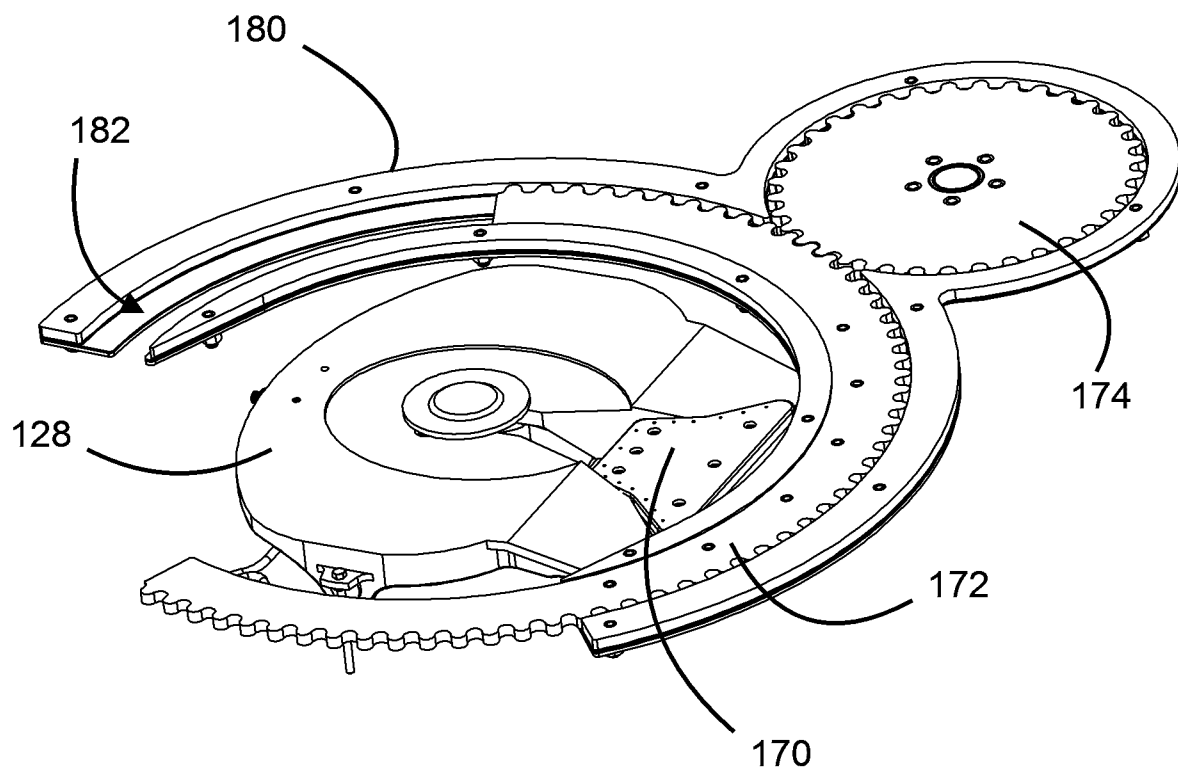


Fig. 23

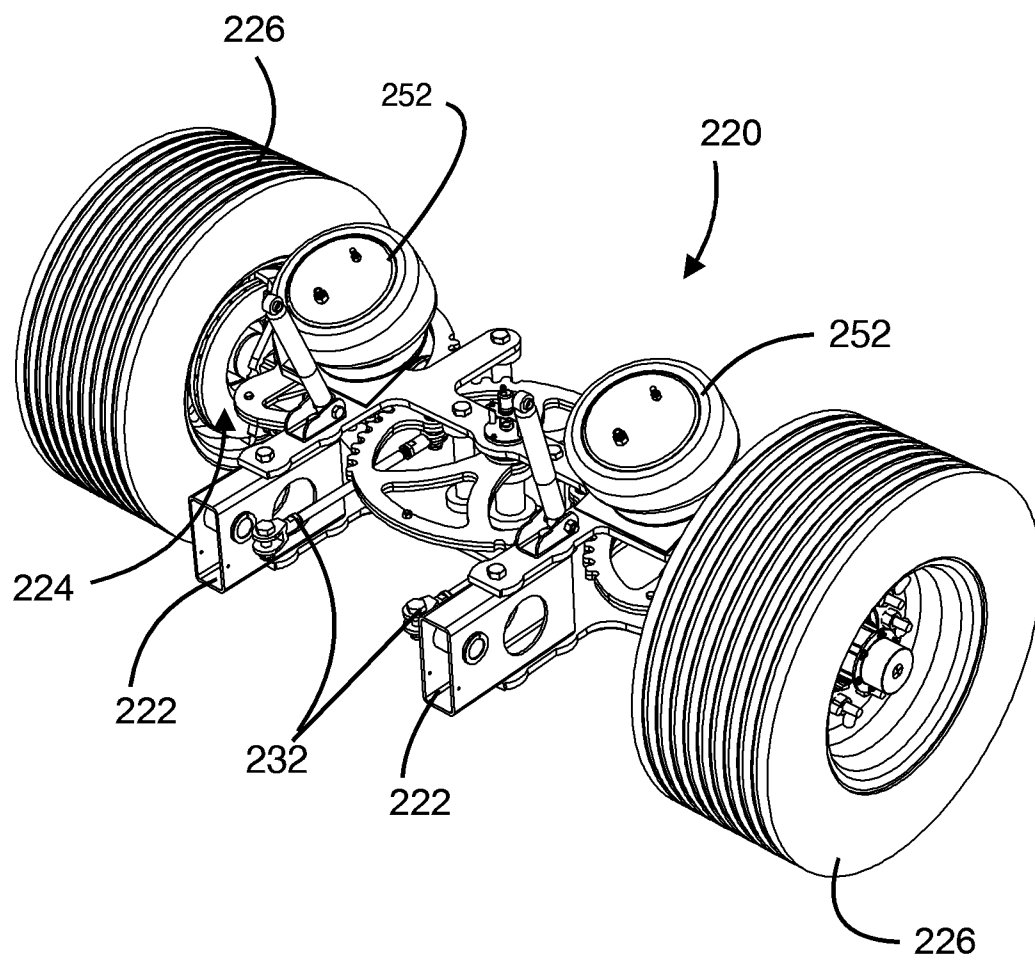


Fig. 24

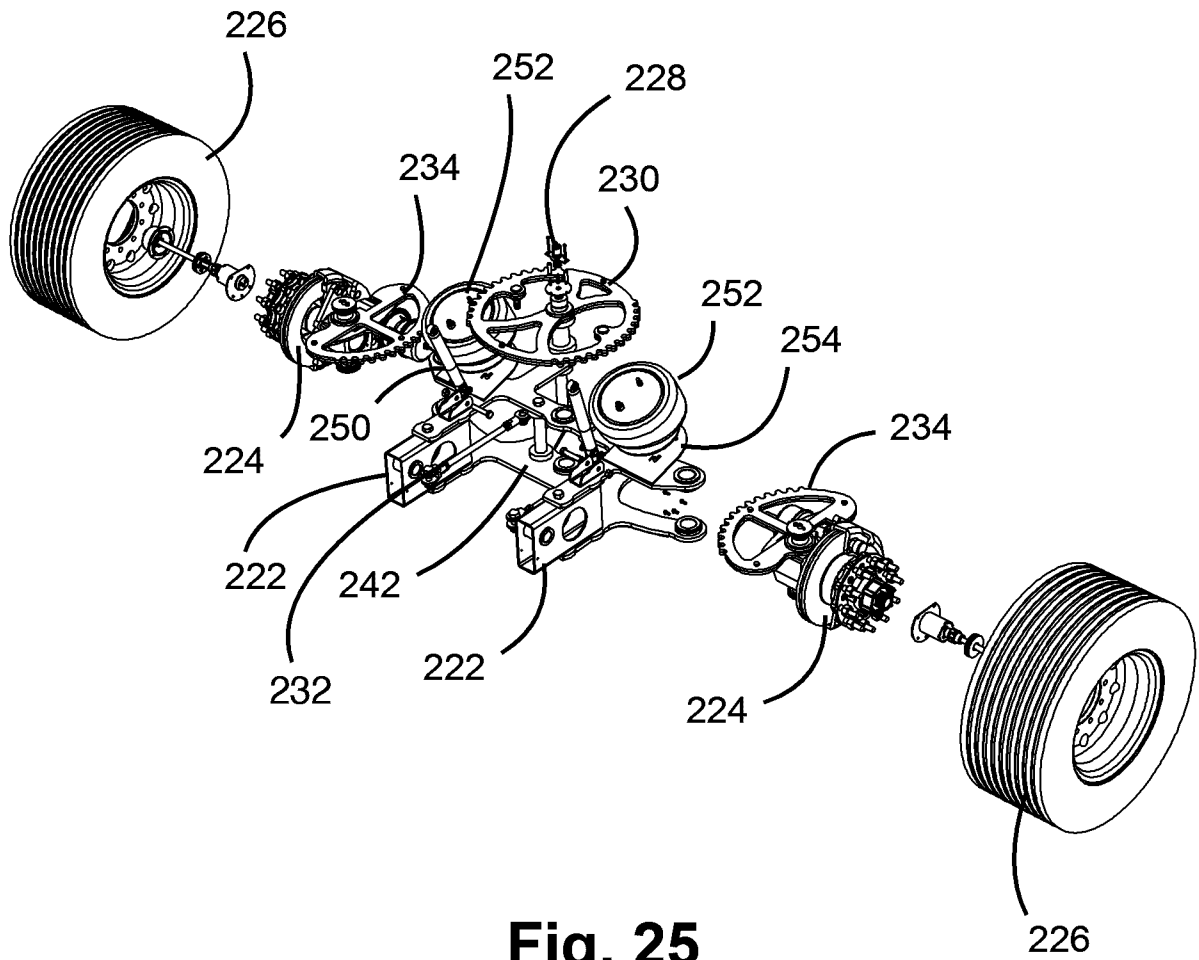


Fig. 25

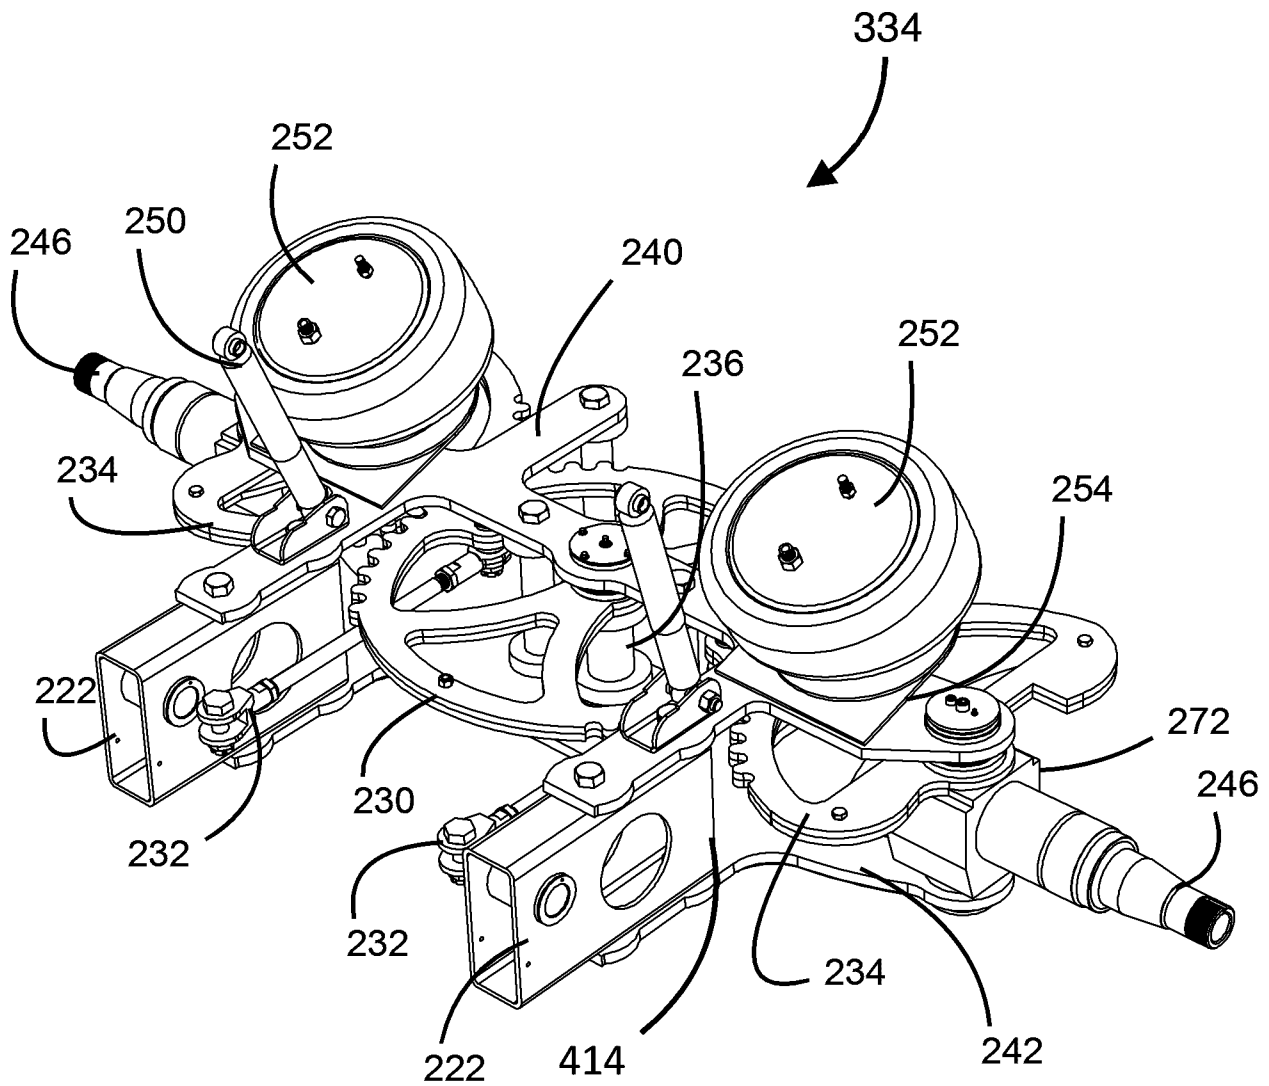


Fig. 26

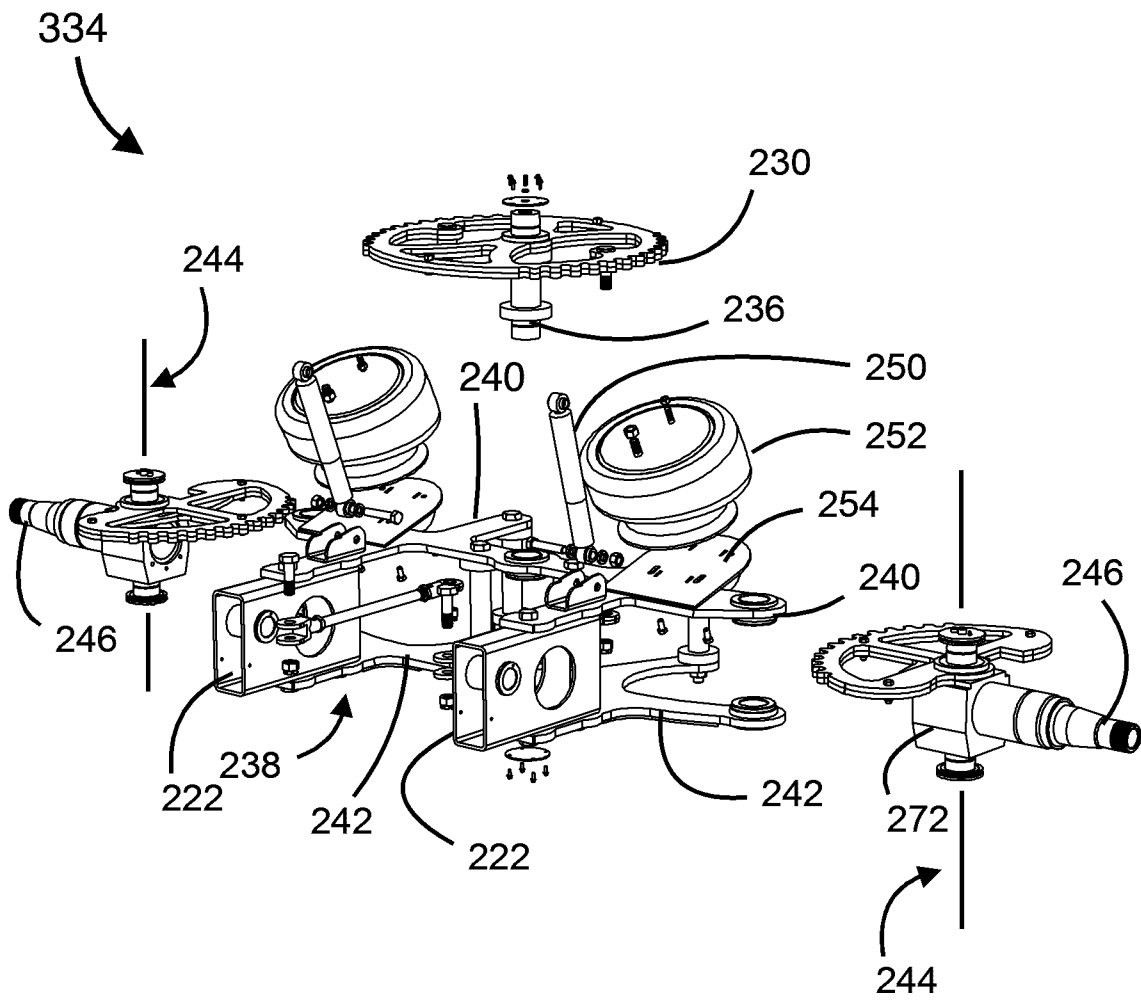


Fig. 27

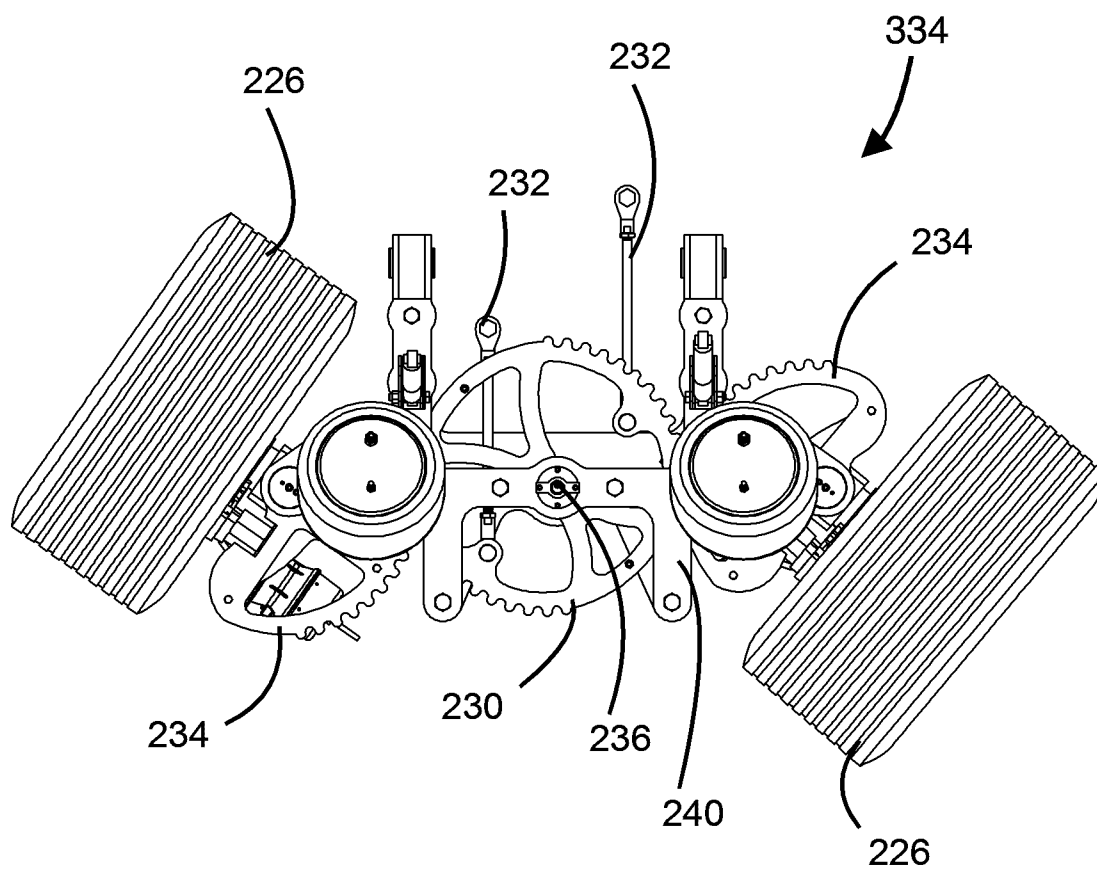


Fig. 28

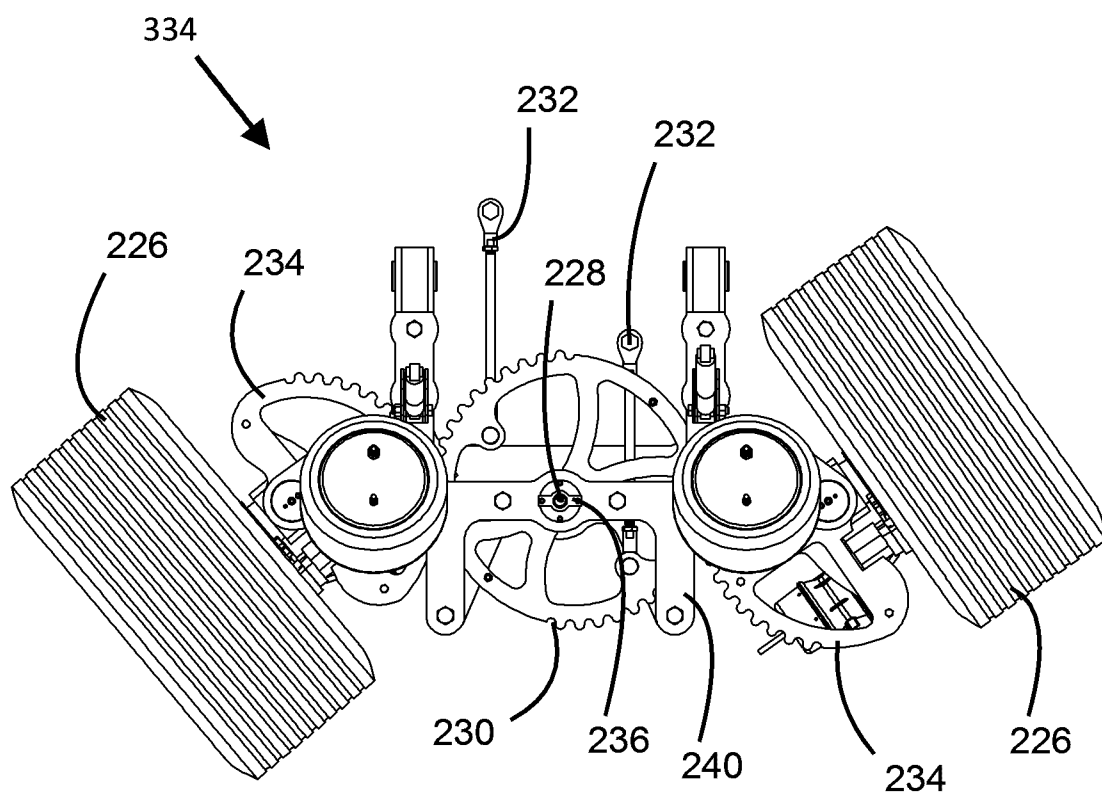


Fig. 29

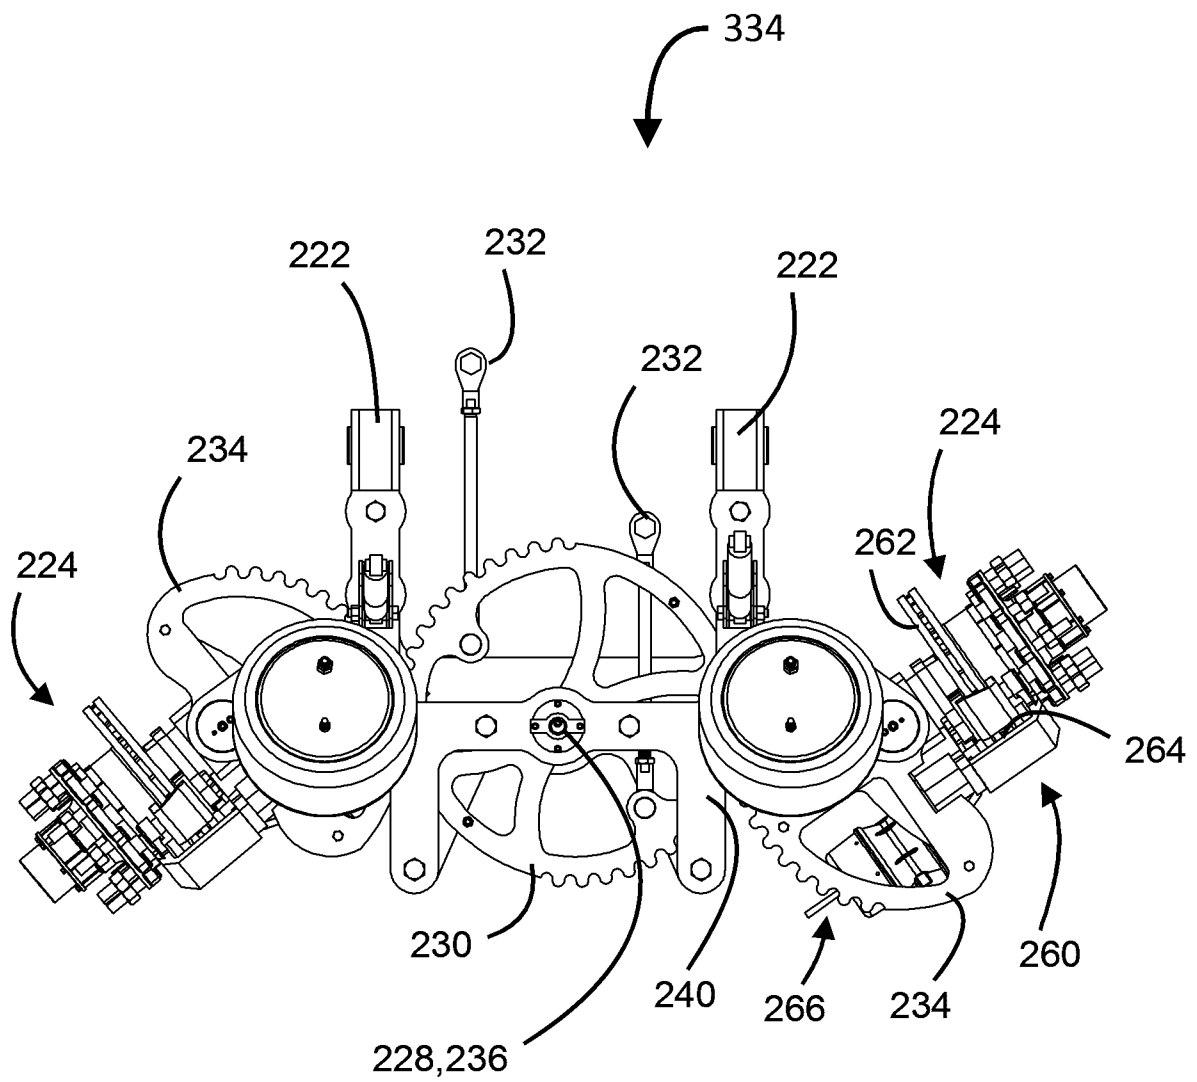


Fig. 31

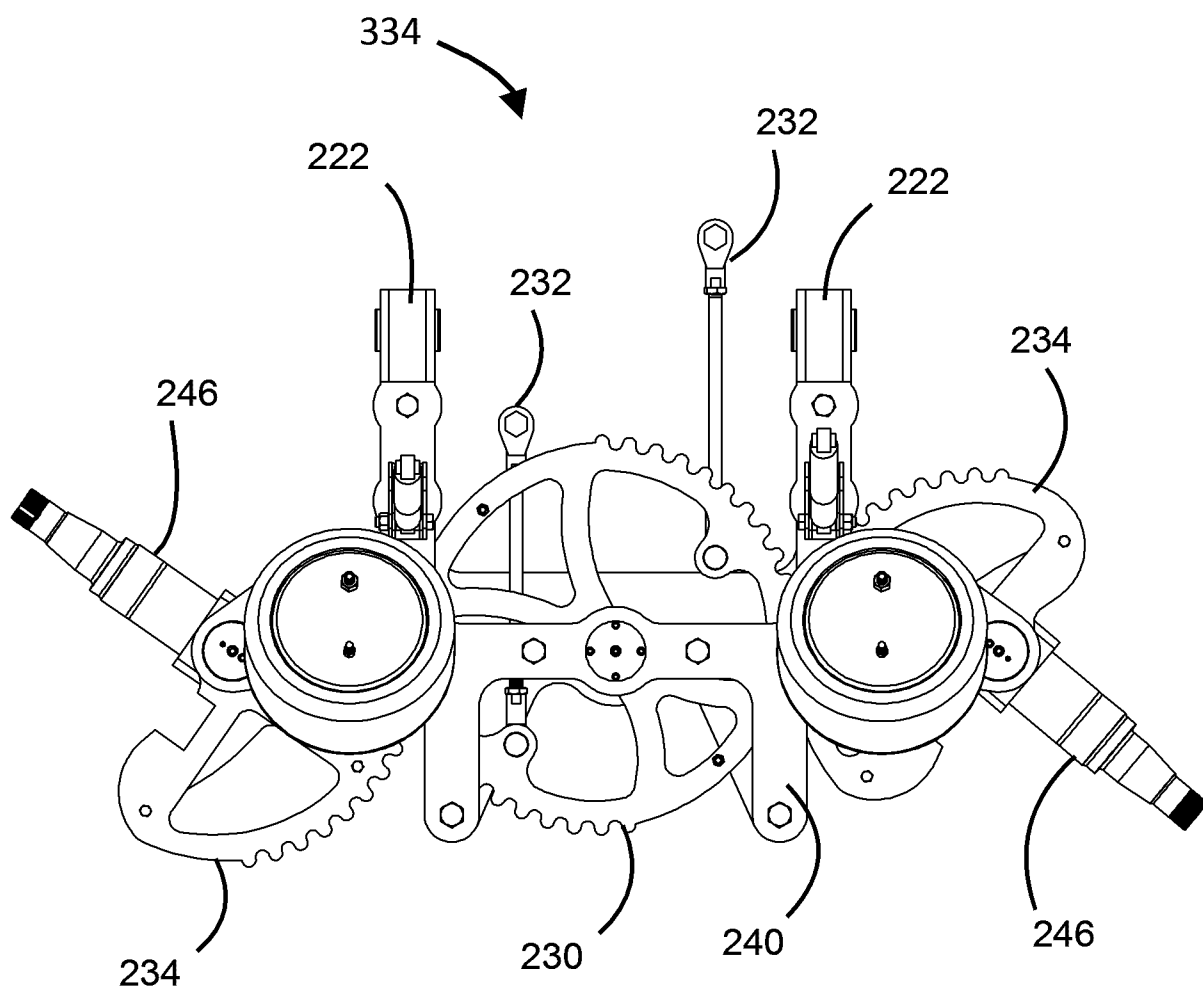


Fig. 32

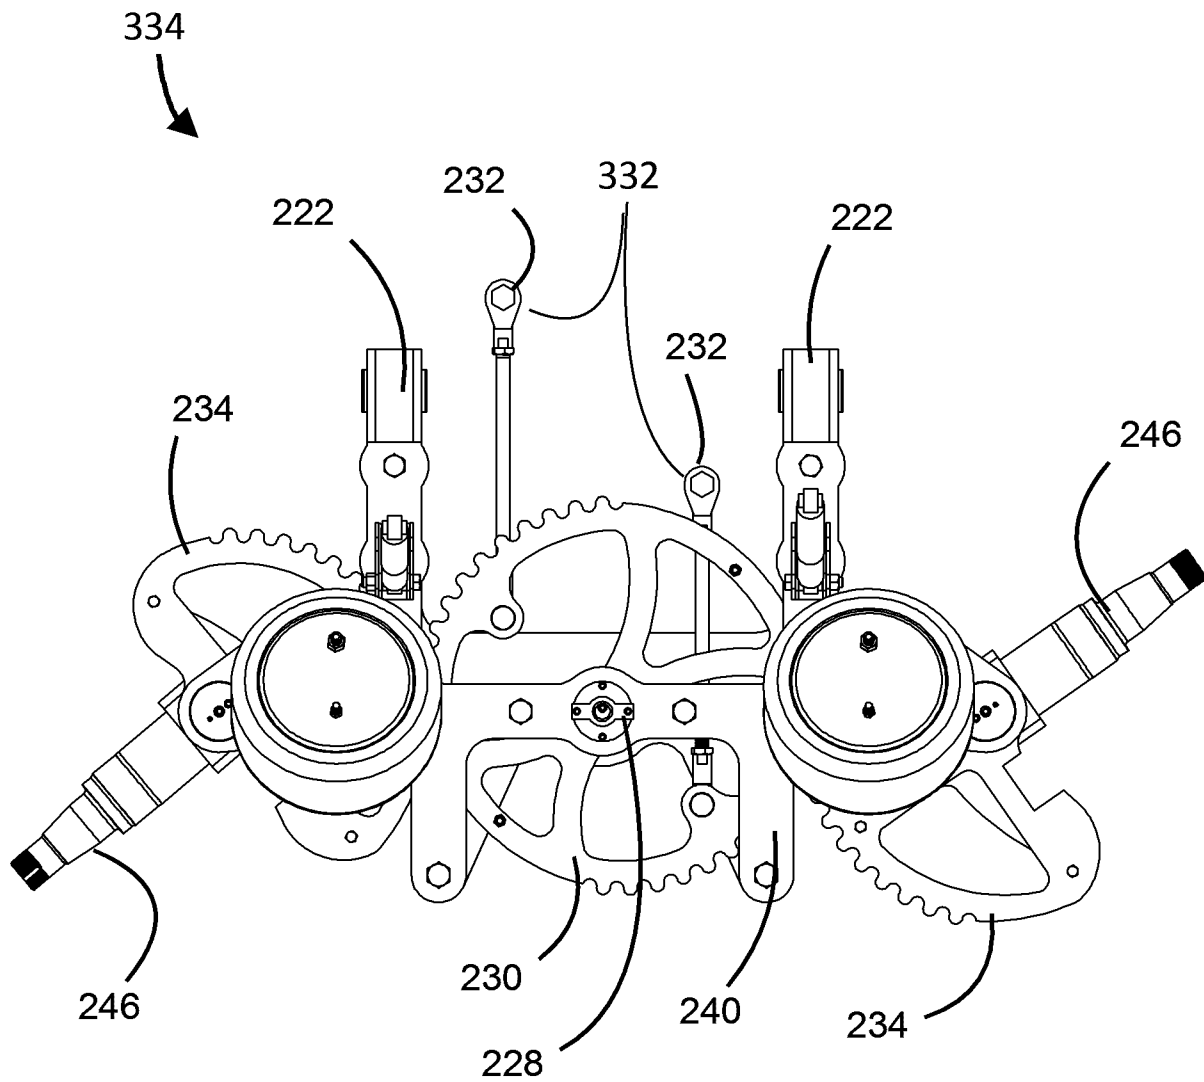


Fig. 33

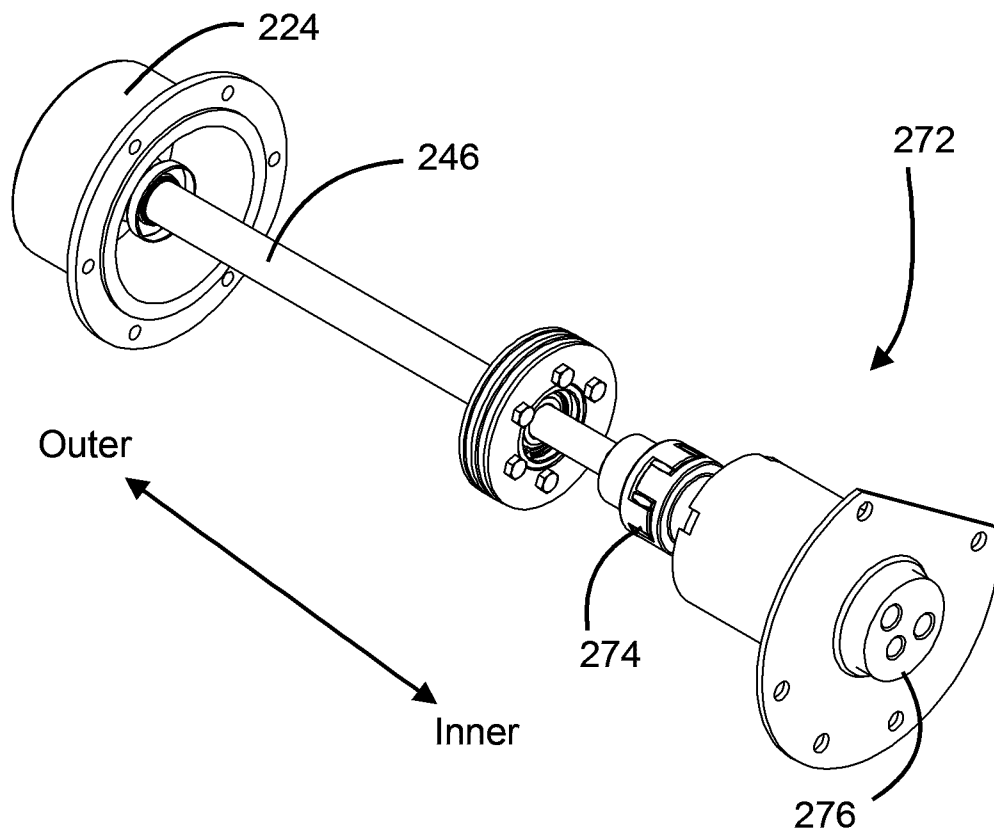


Fig. 34

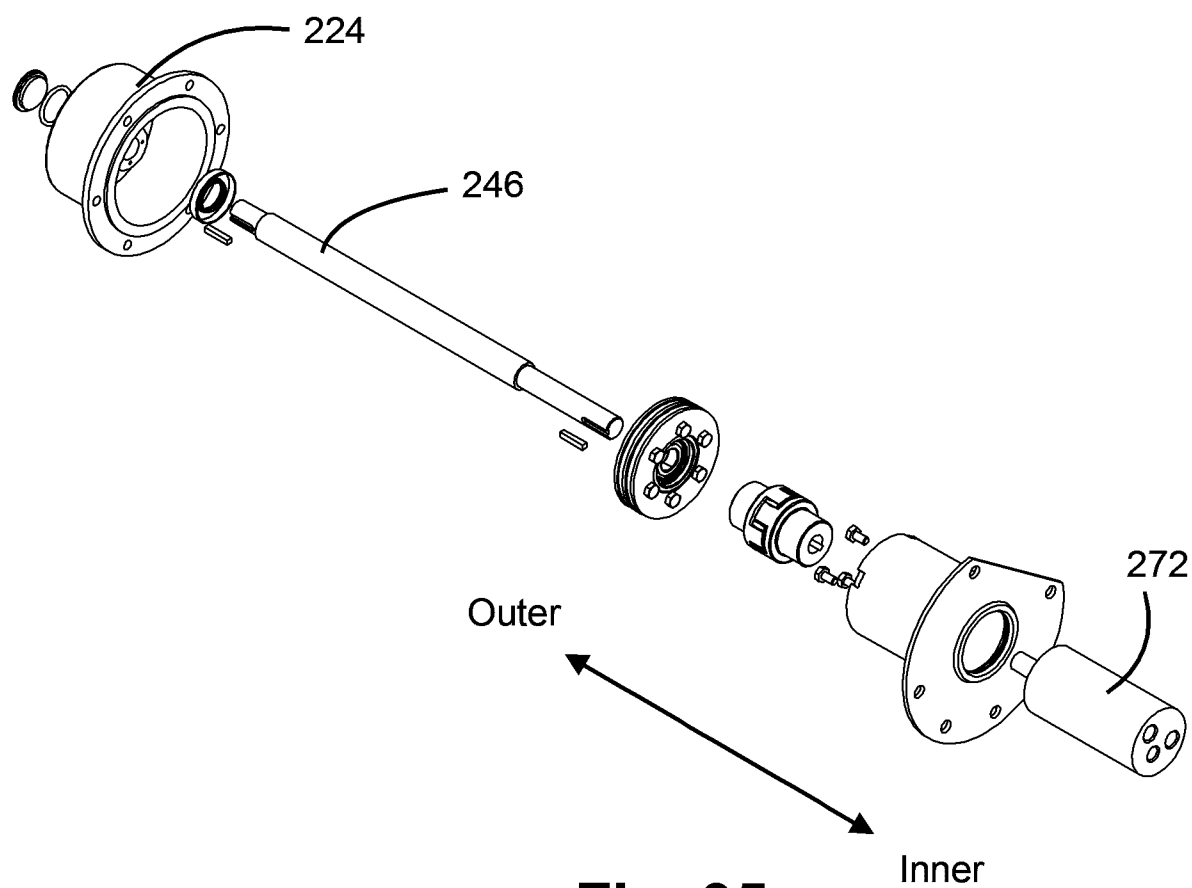


Fig. 35

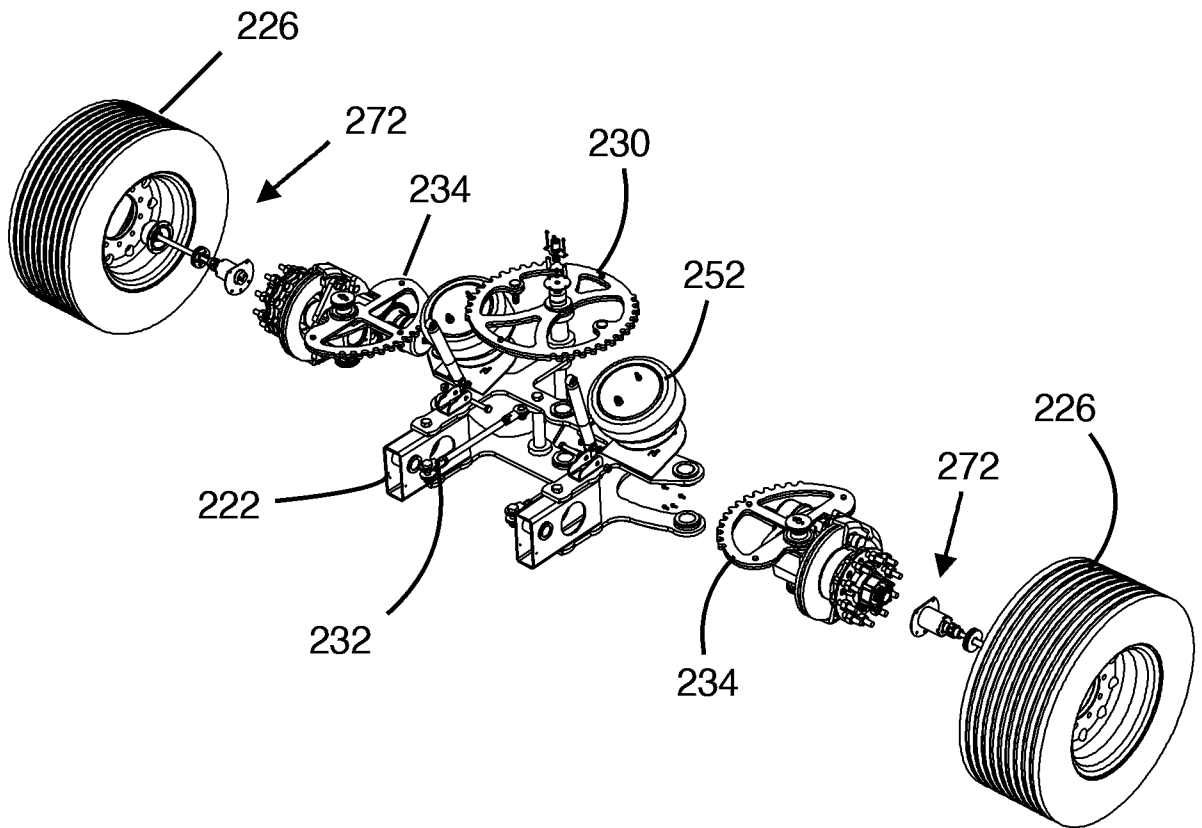


Fig. 36

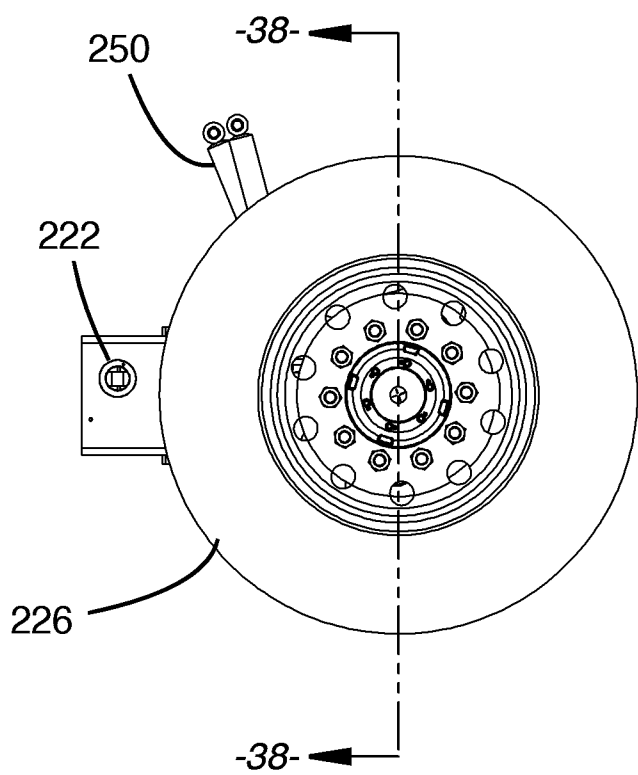


Fig. 37

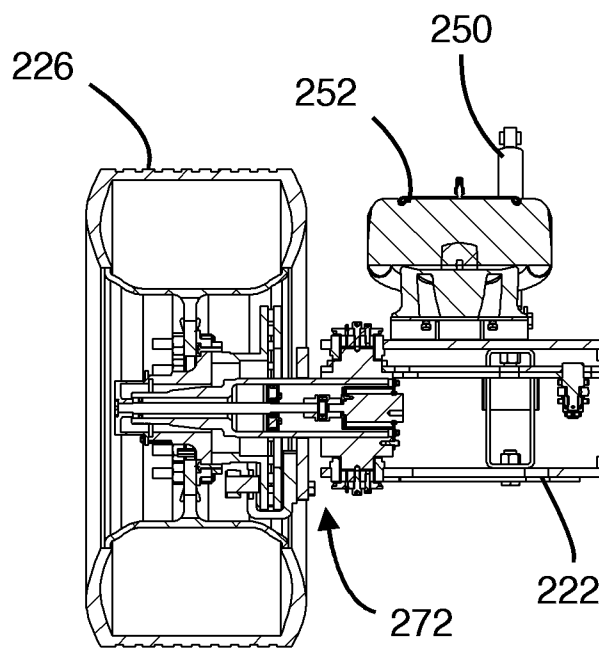


Fig. 38

Fig. 41

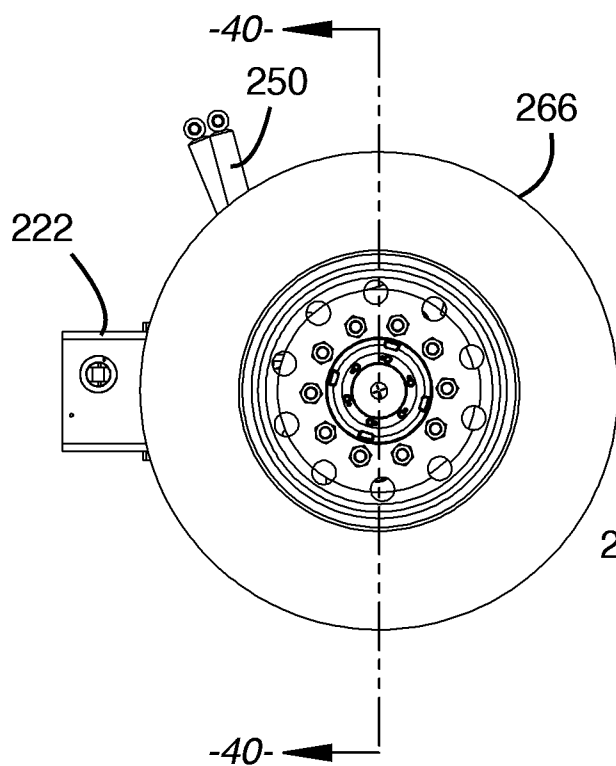
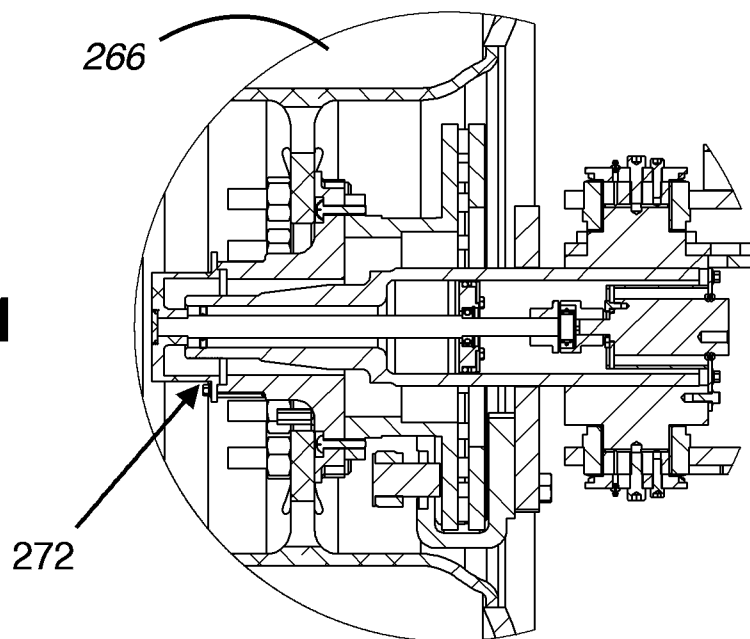


Fig. 39

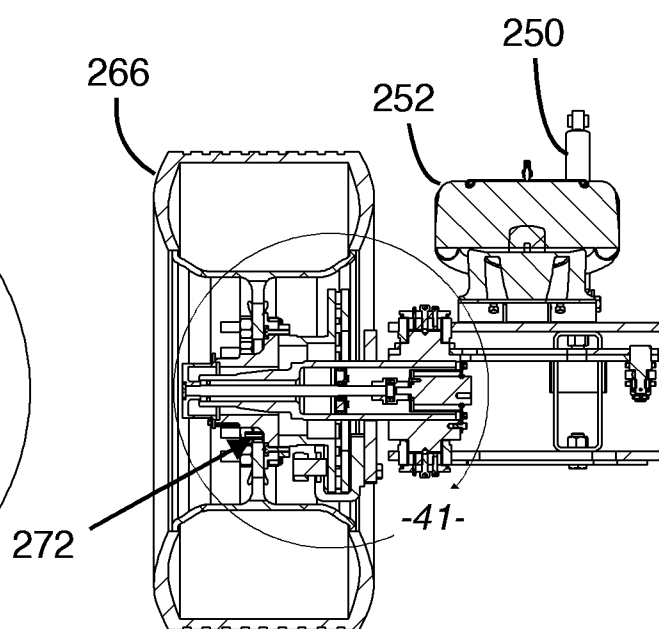


Fig. 40

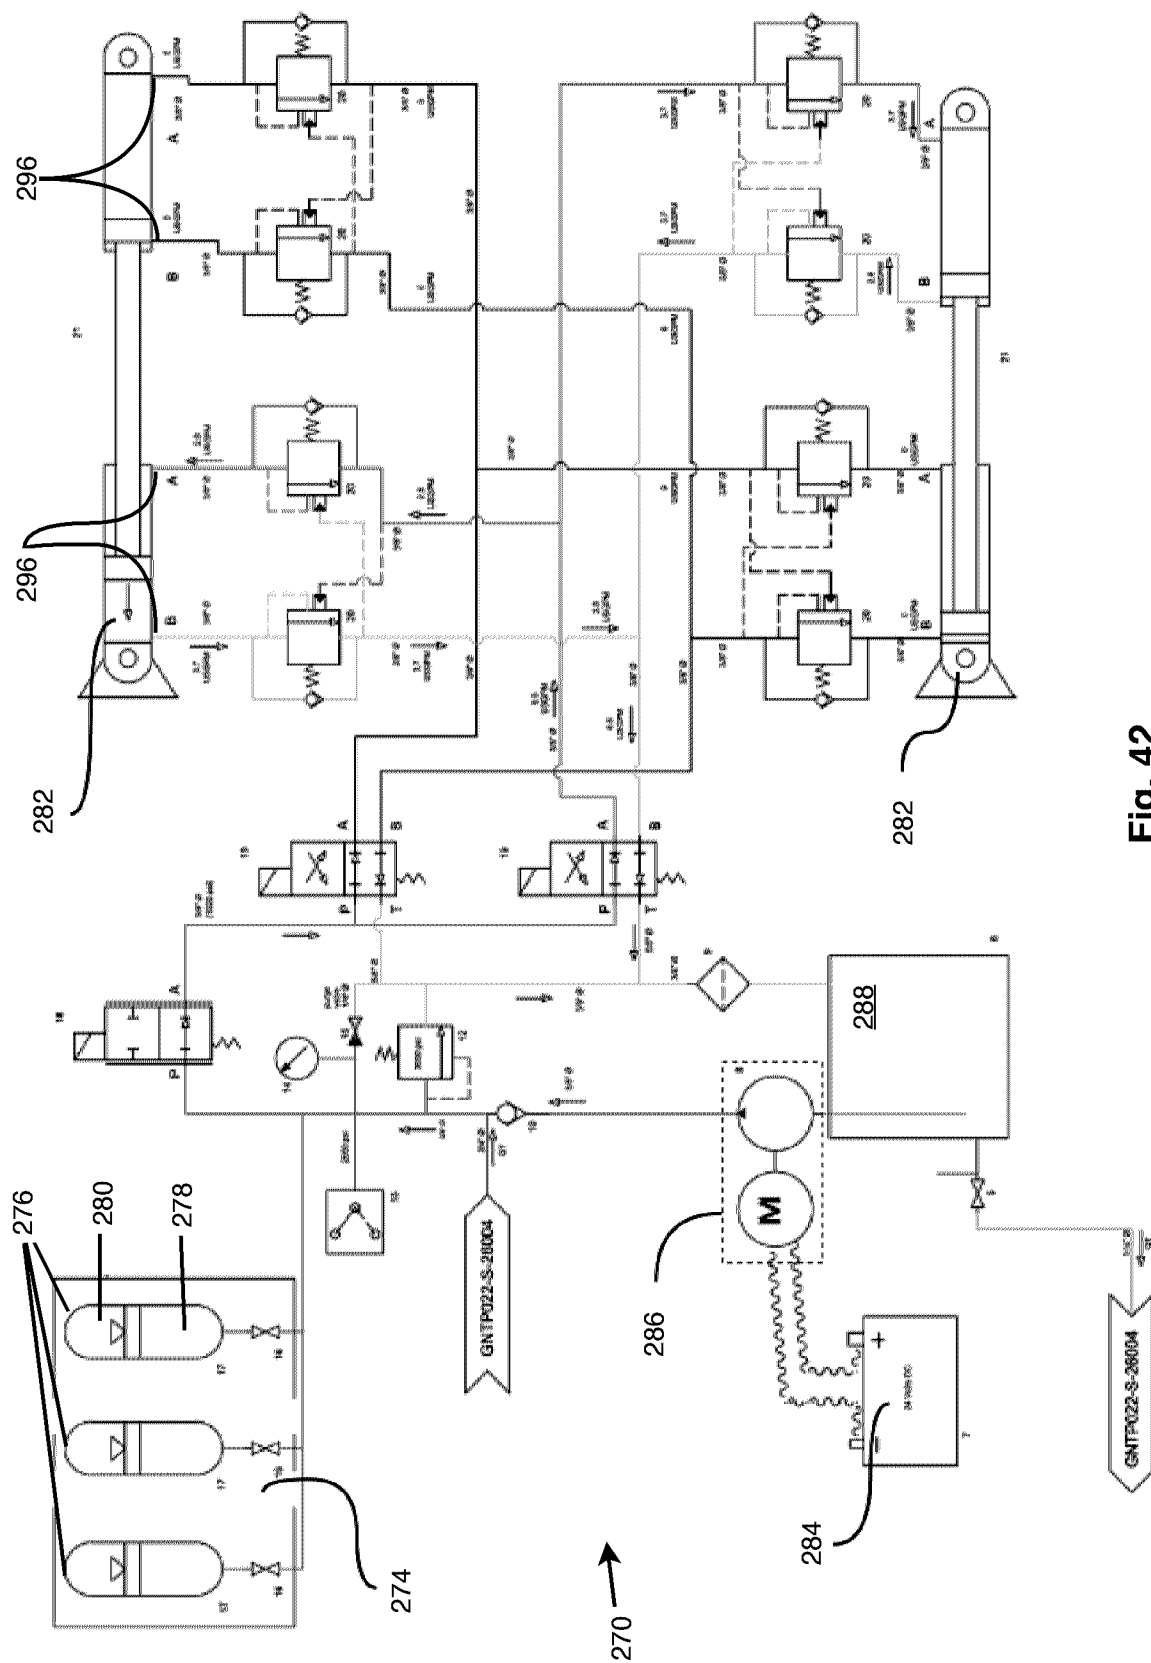


Fig. 42

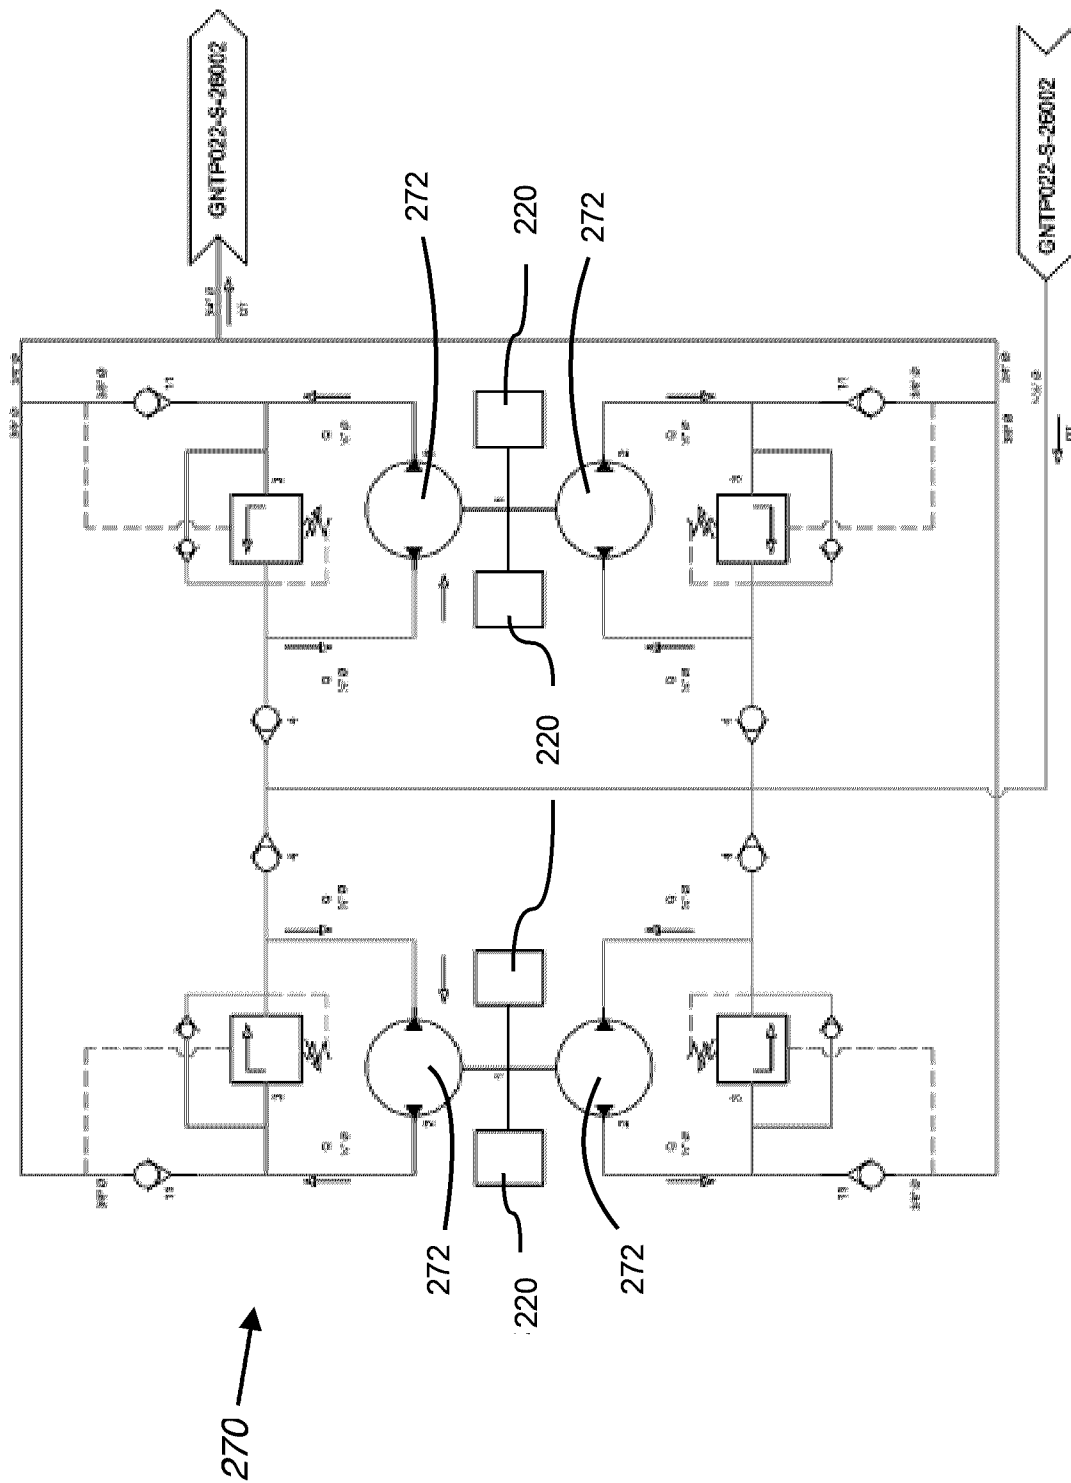


Fig. 43

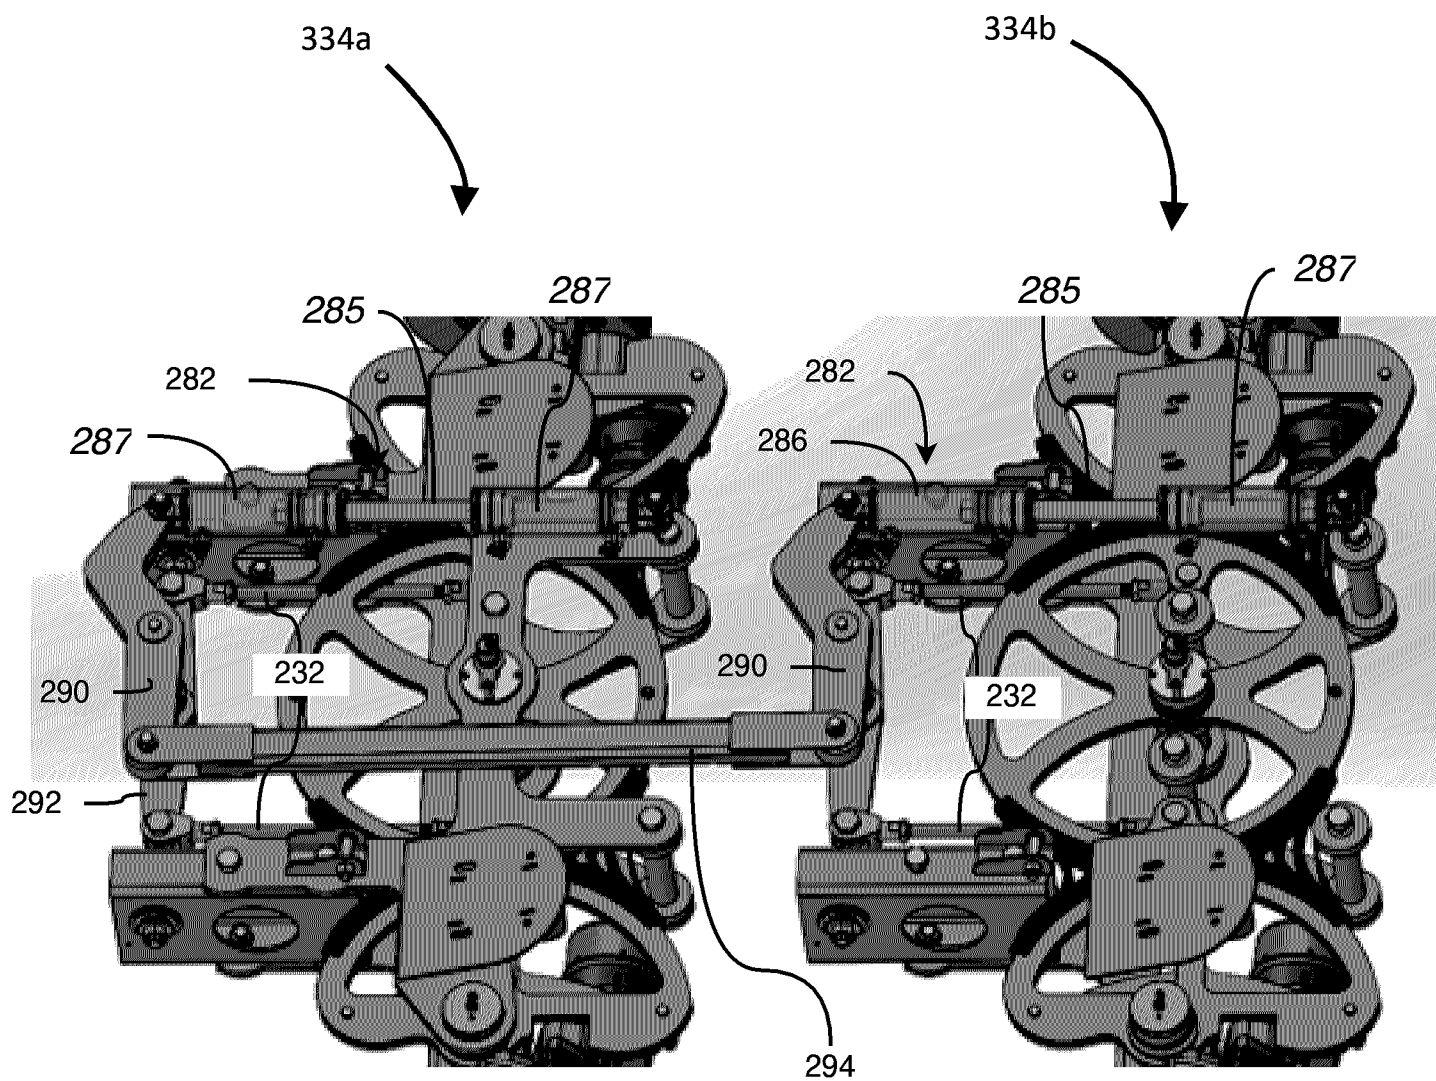


Fig. 44

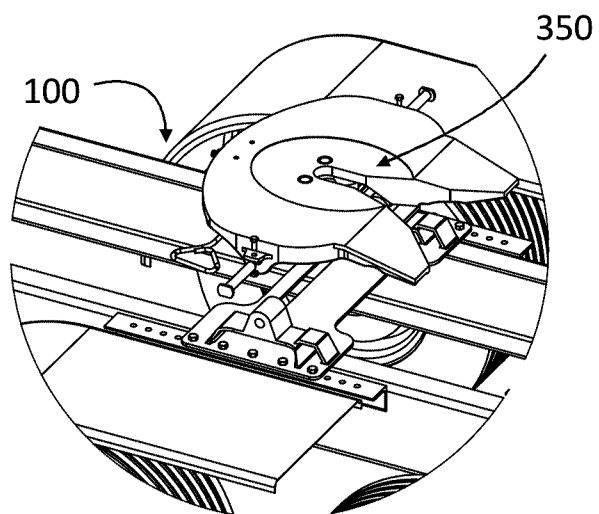


Fig. 46



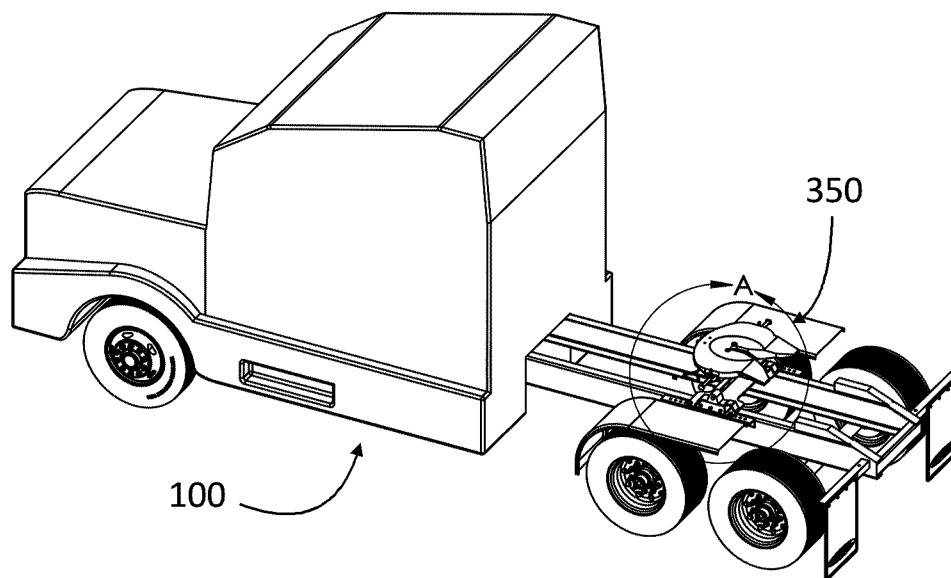


Fig. 45

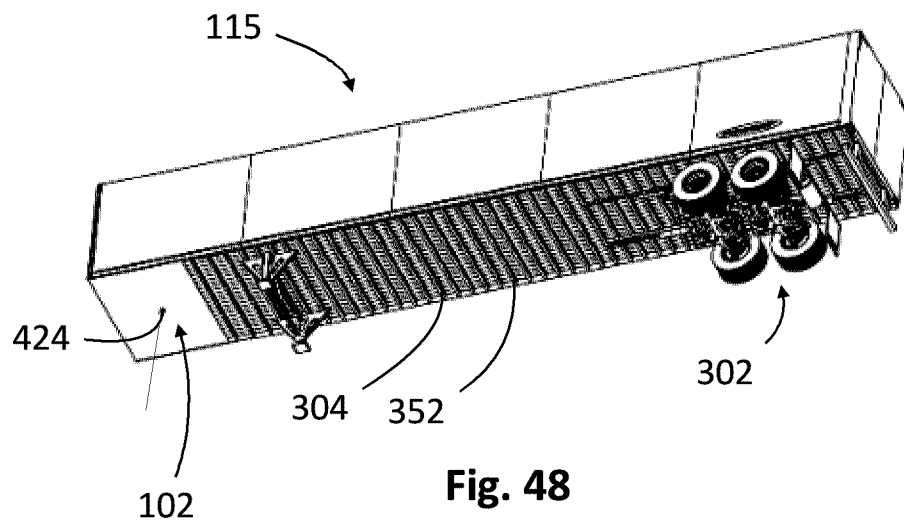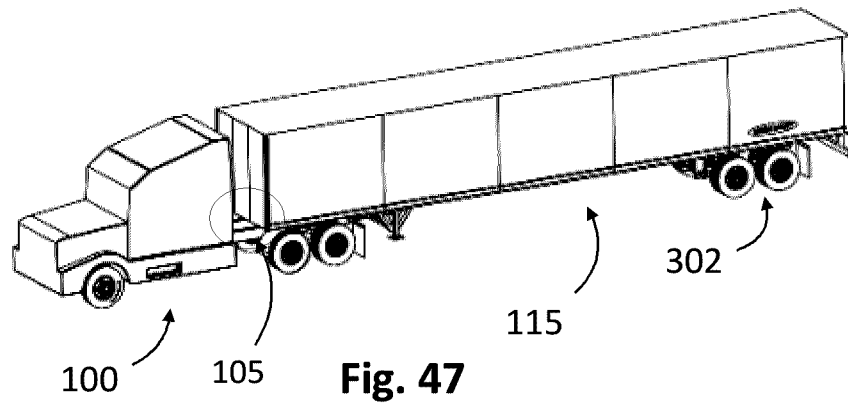

Prior Art

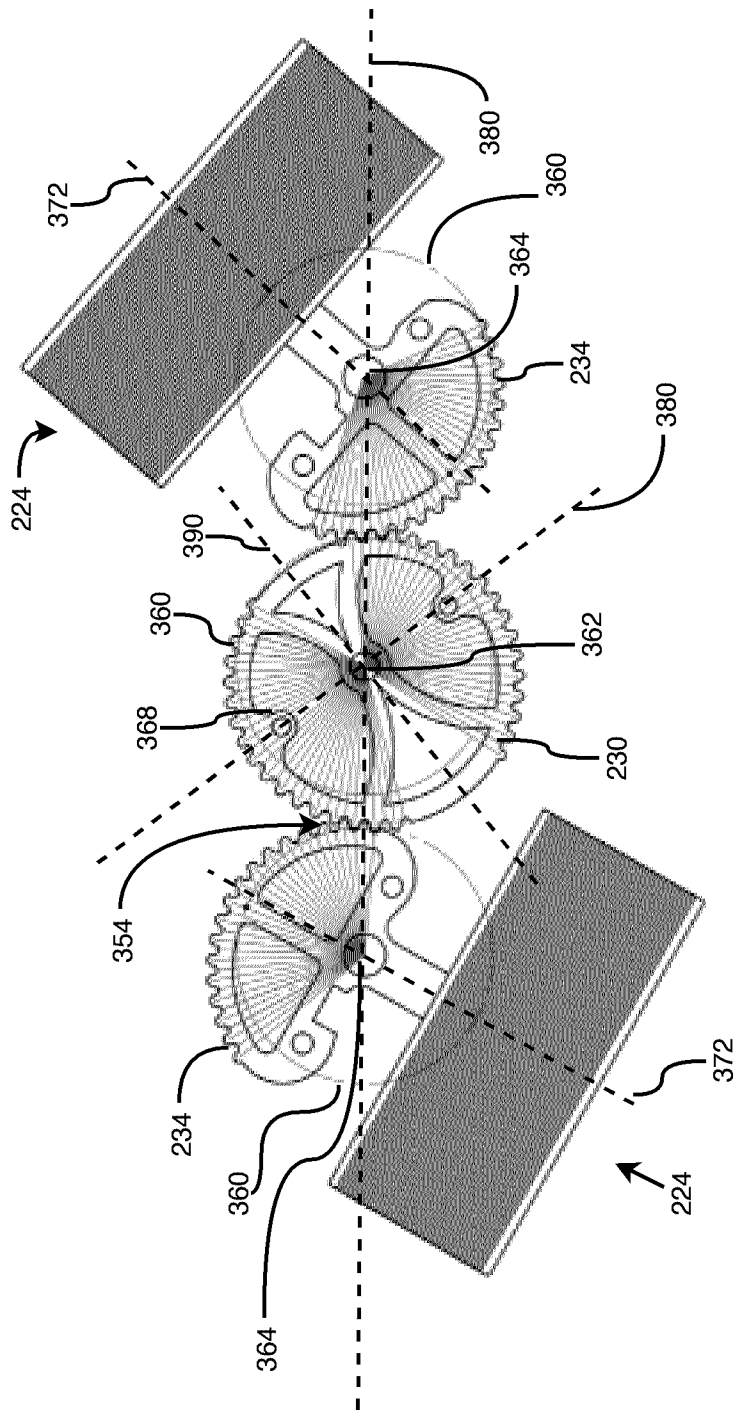


Fig. 49

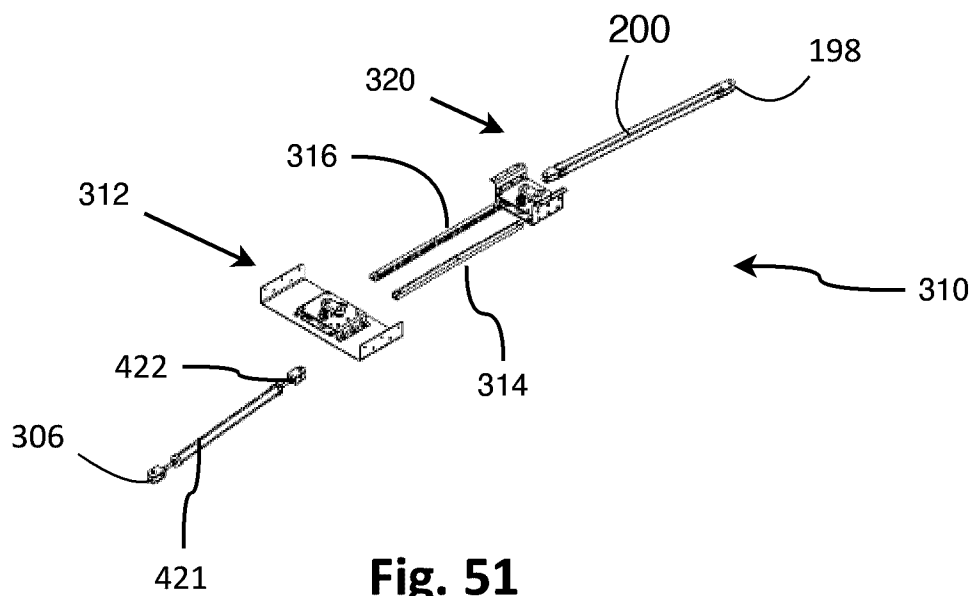


Fig. 51

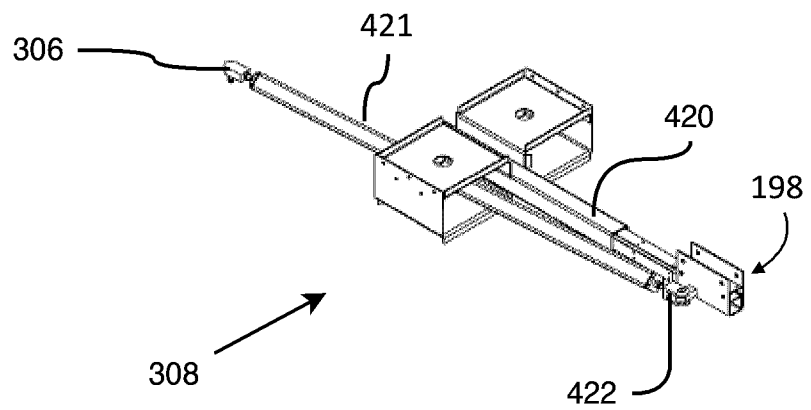


Fig. 50

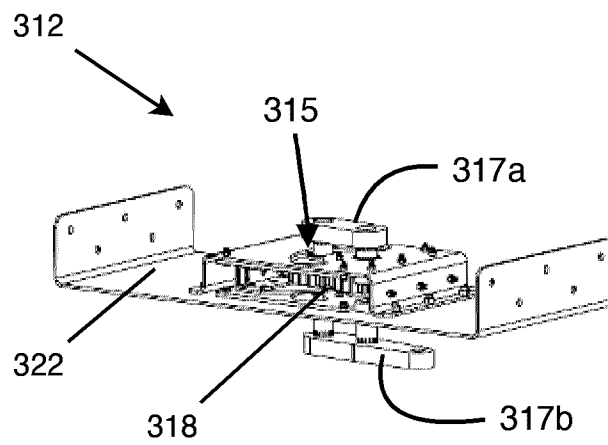


Fig. 52

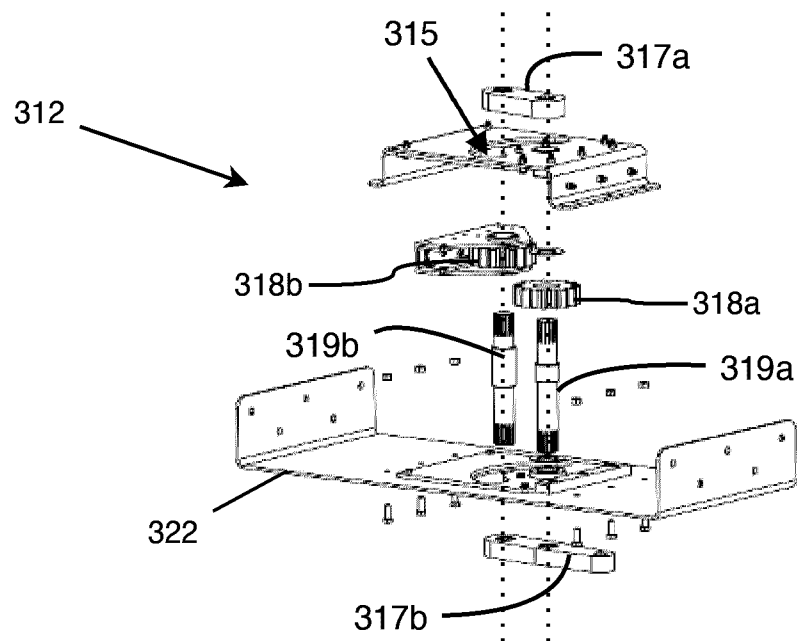


Fig. 53

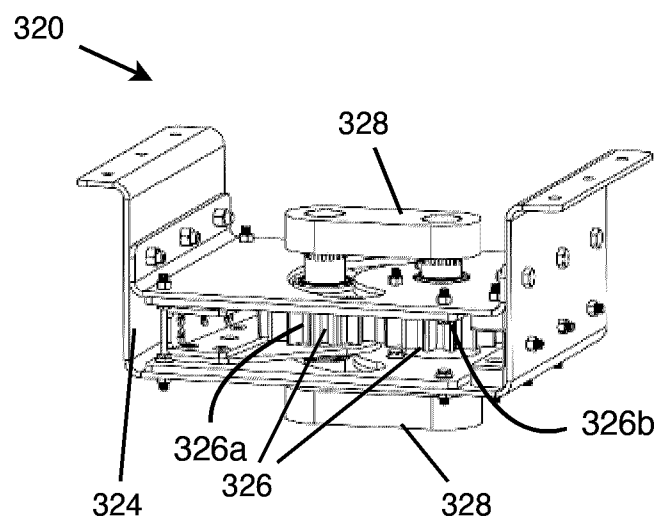


Fig. 54

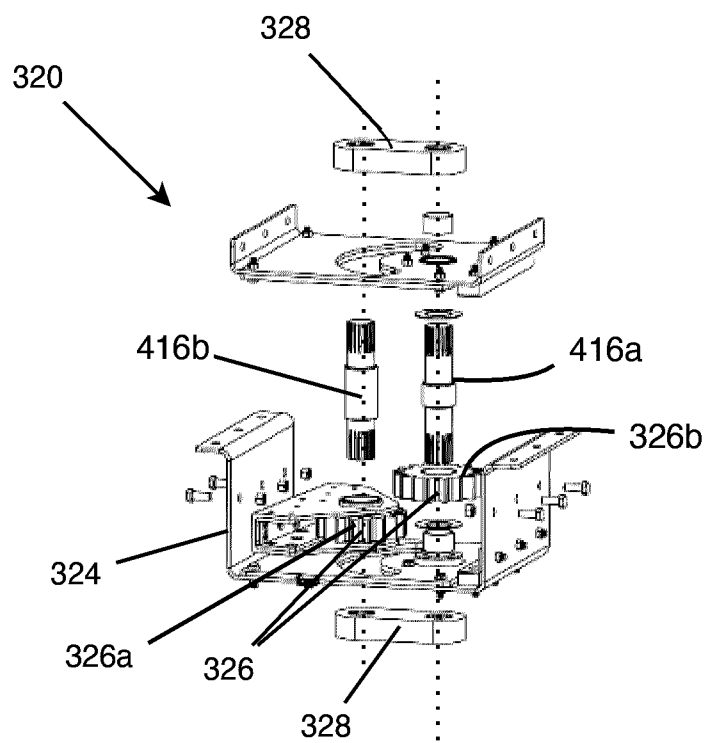


Fig. 55

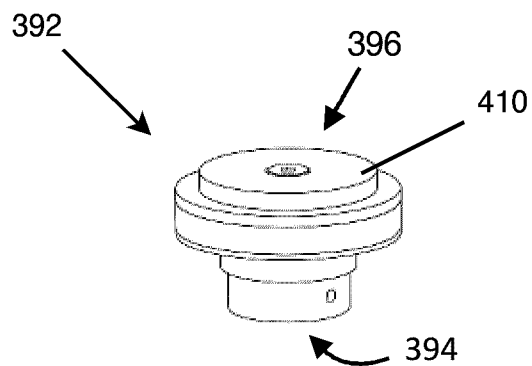


Fig. 56

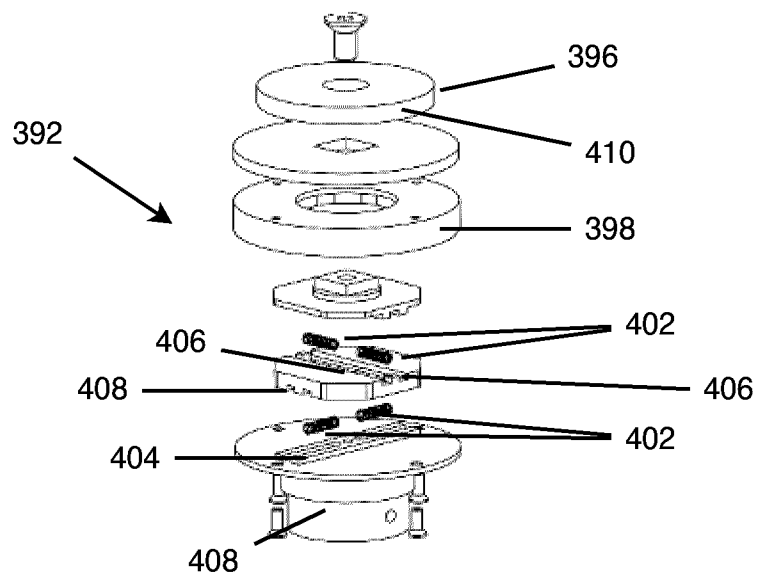


Fig. 57

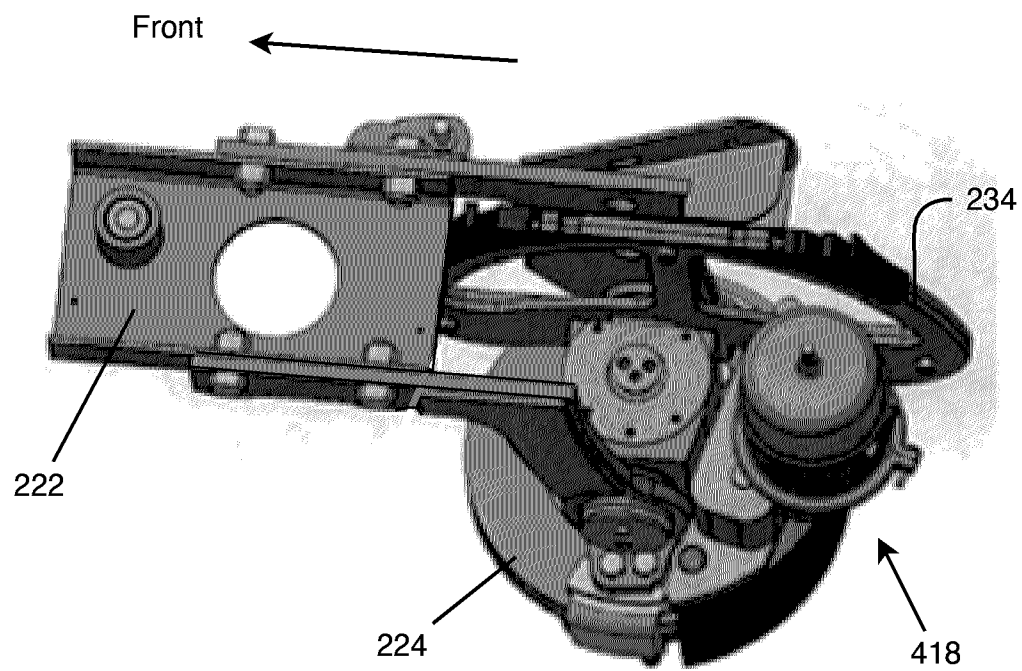


Fig. 58

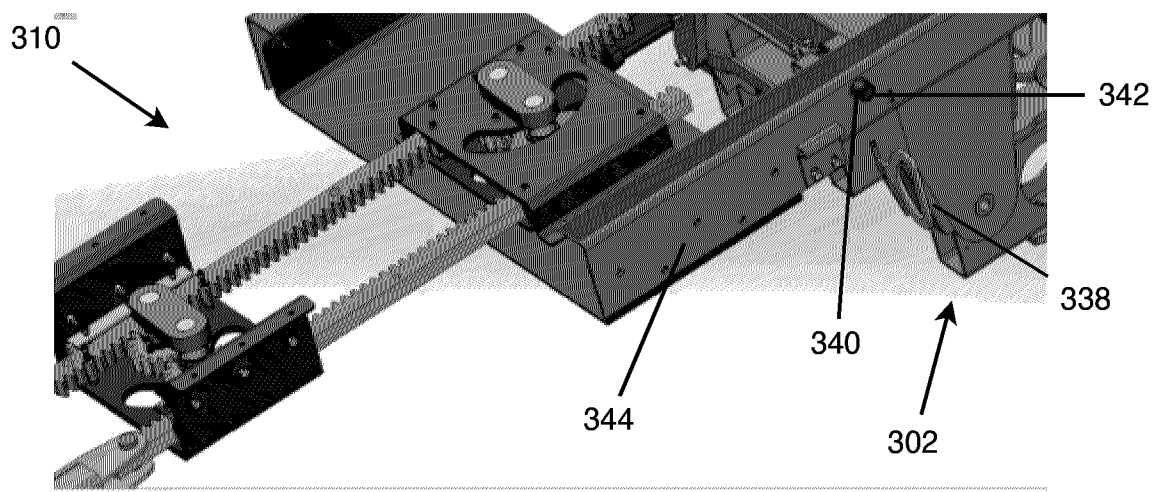


Fig. 59

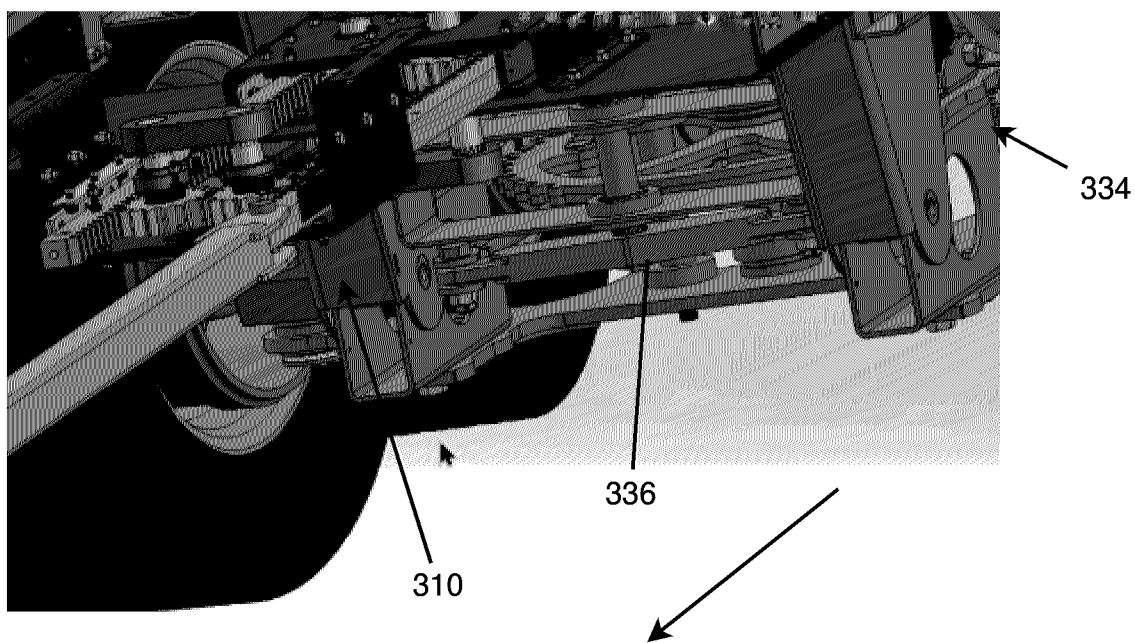


Fig. 60

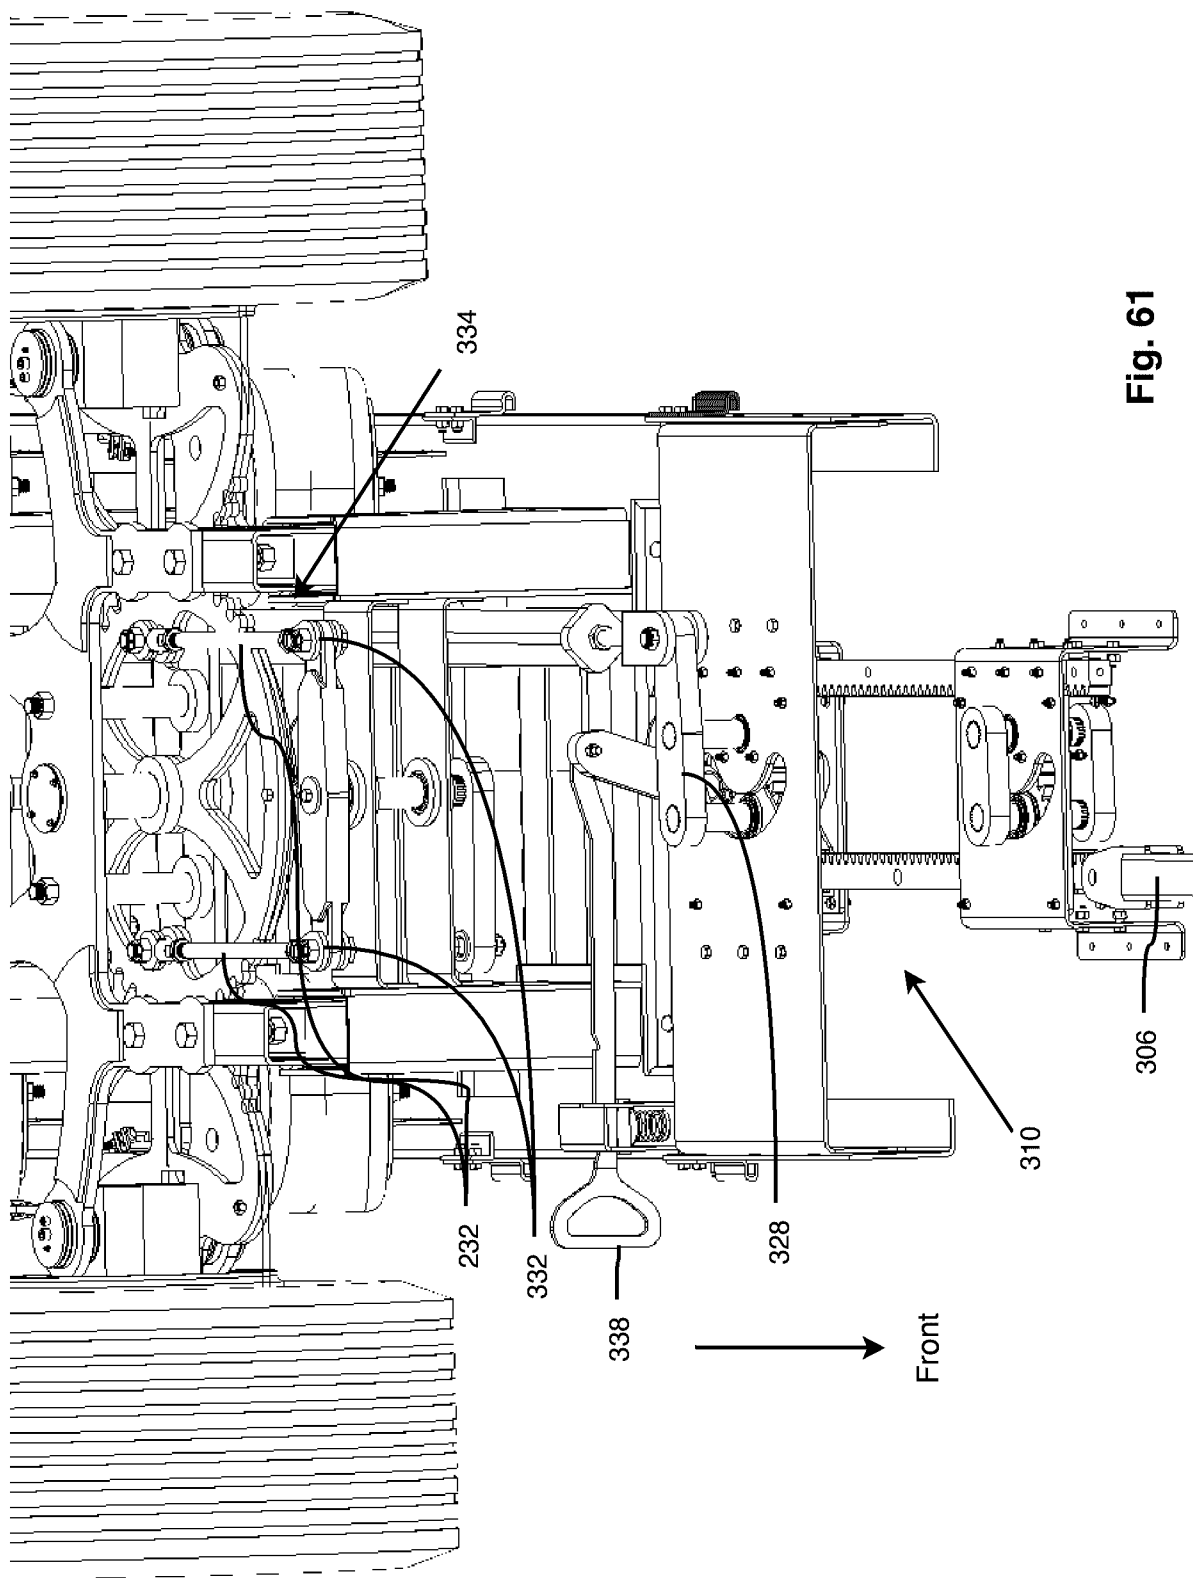
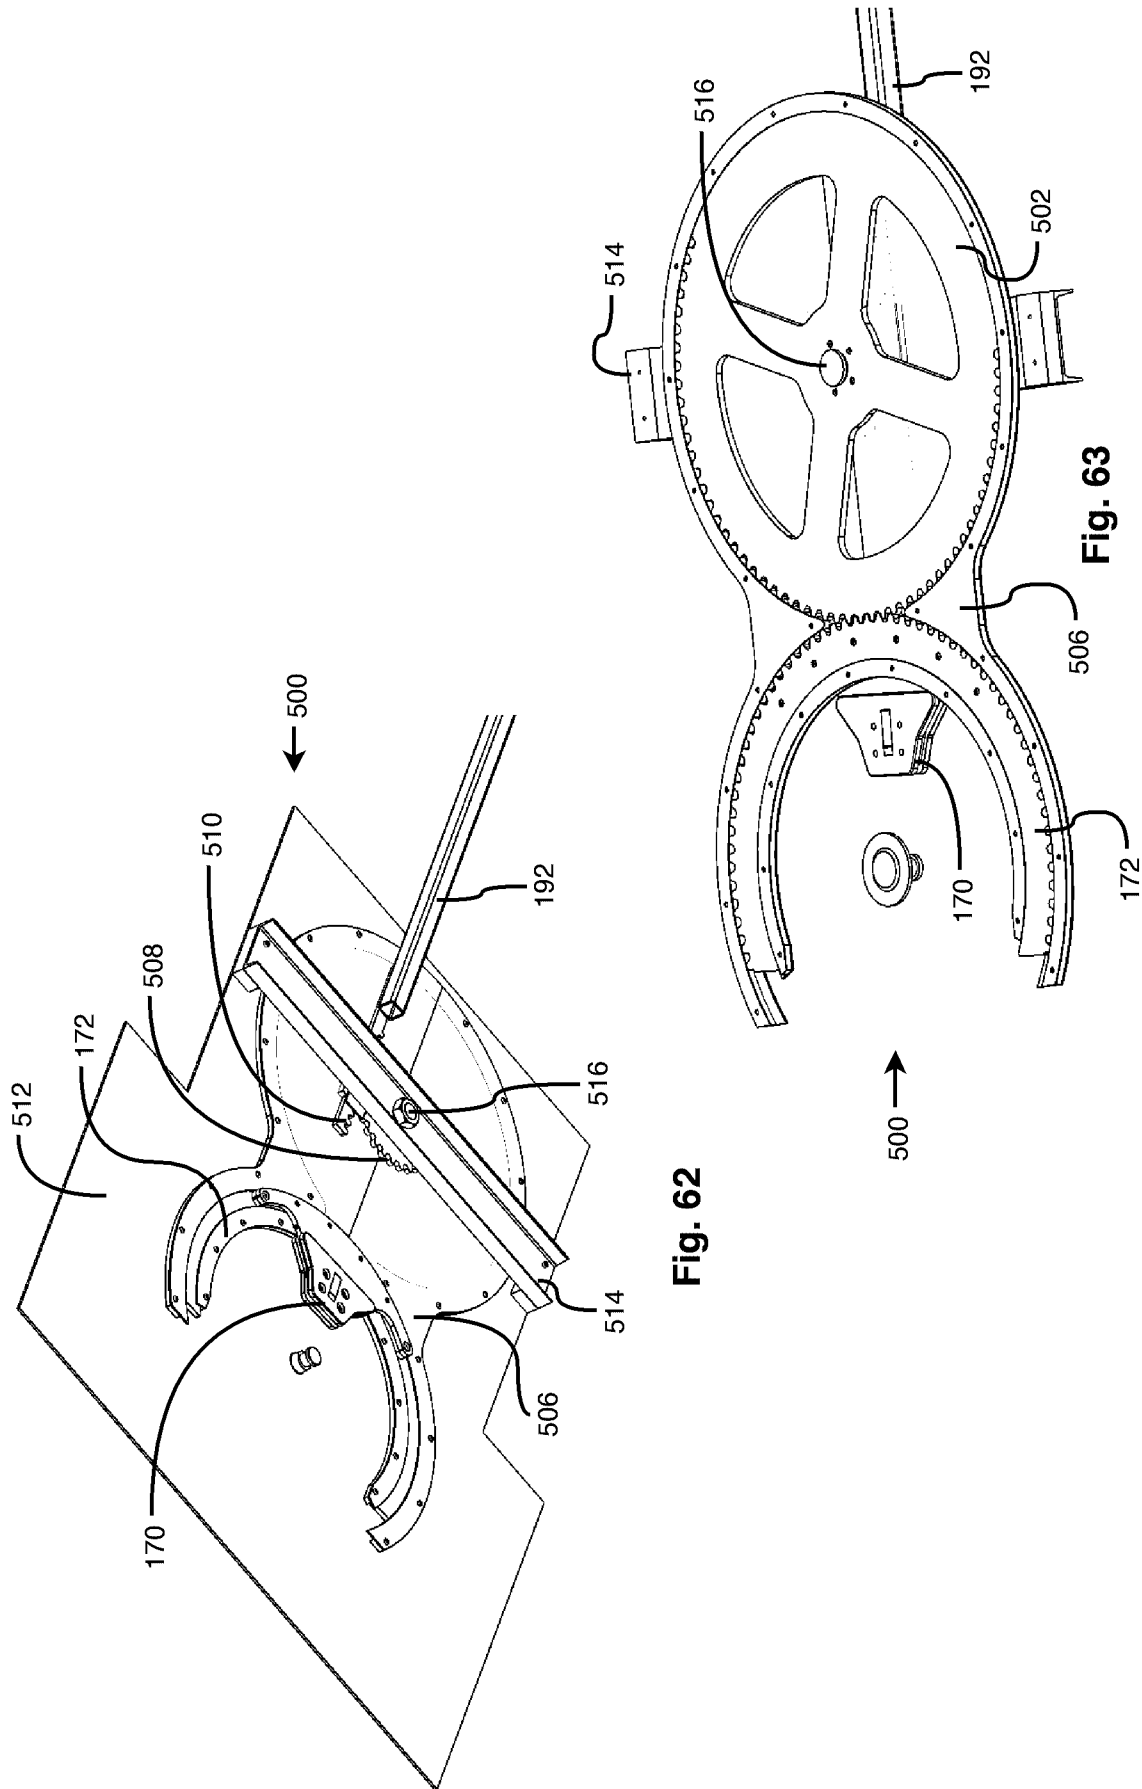
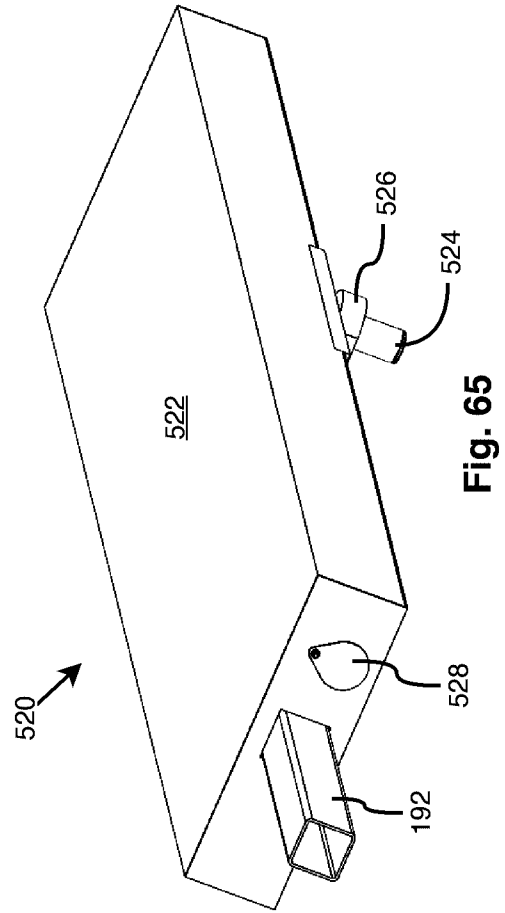
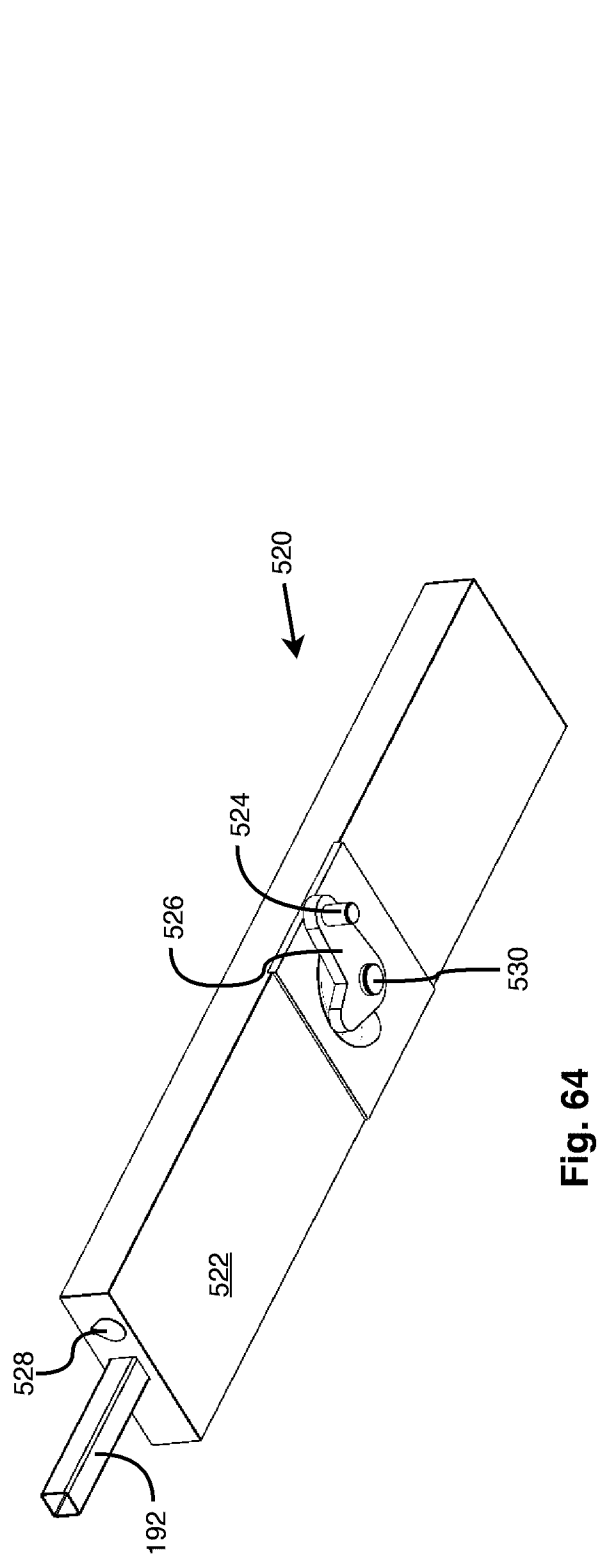


Fig. 61





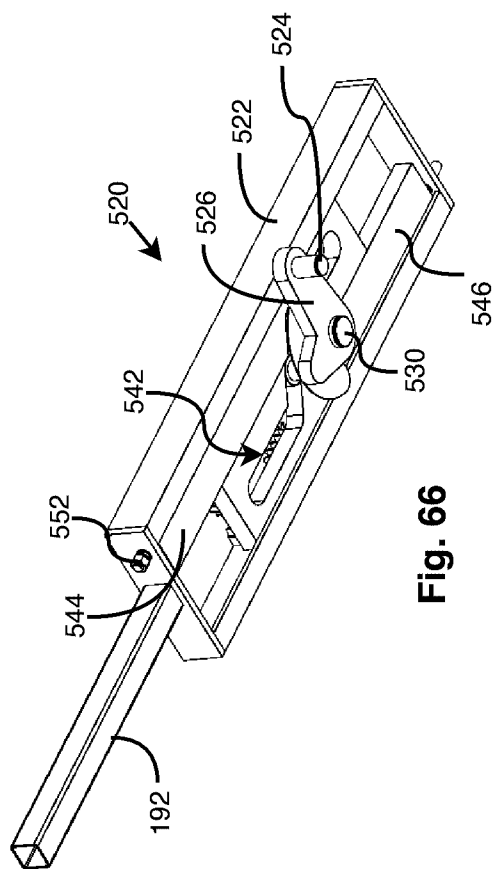


Fig. 66

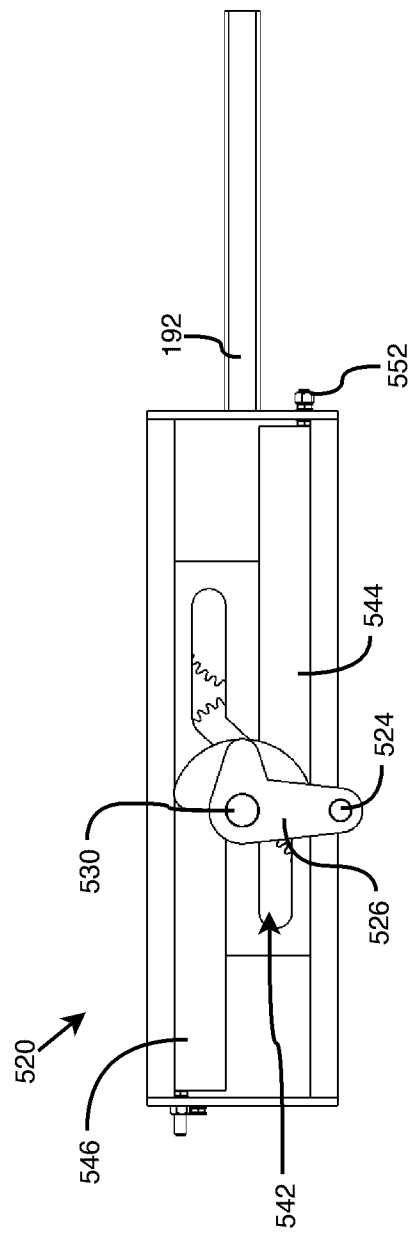


Fig. 67

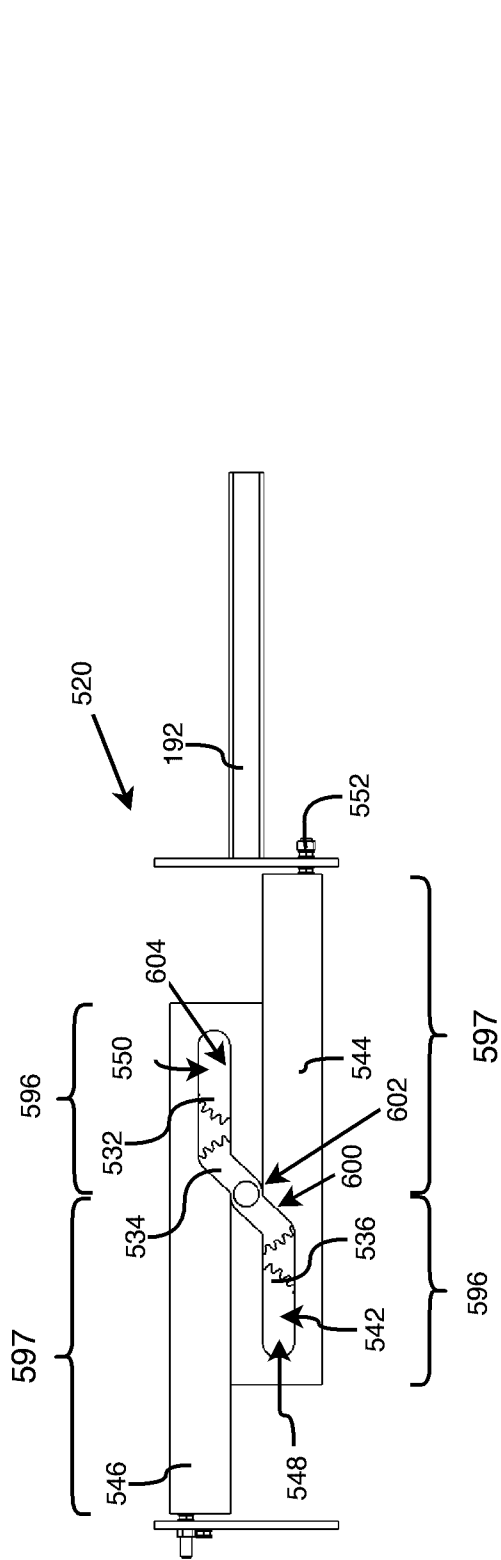


Fig. 68A

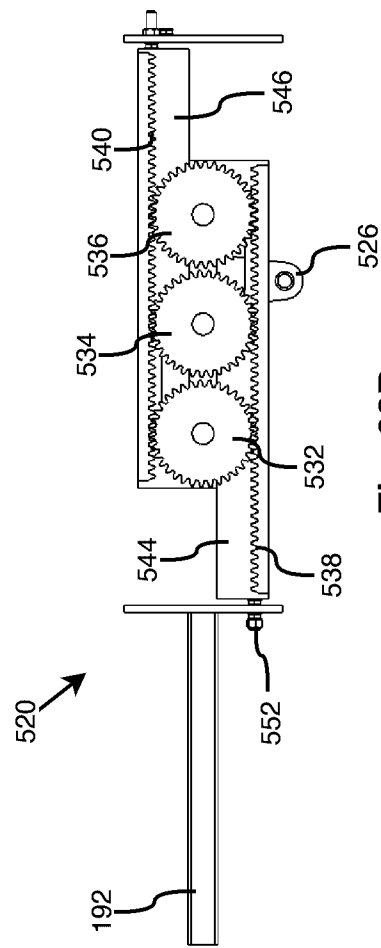


Fig. 68B

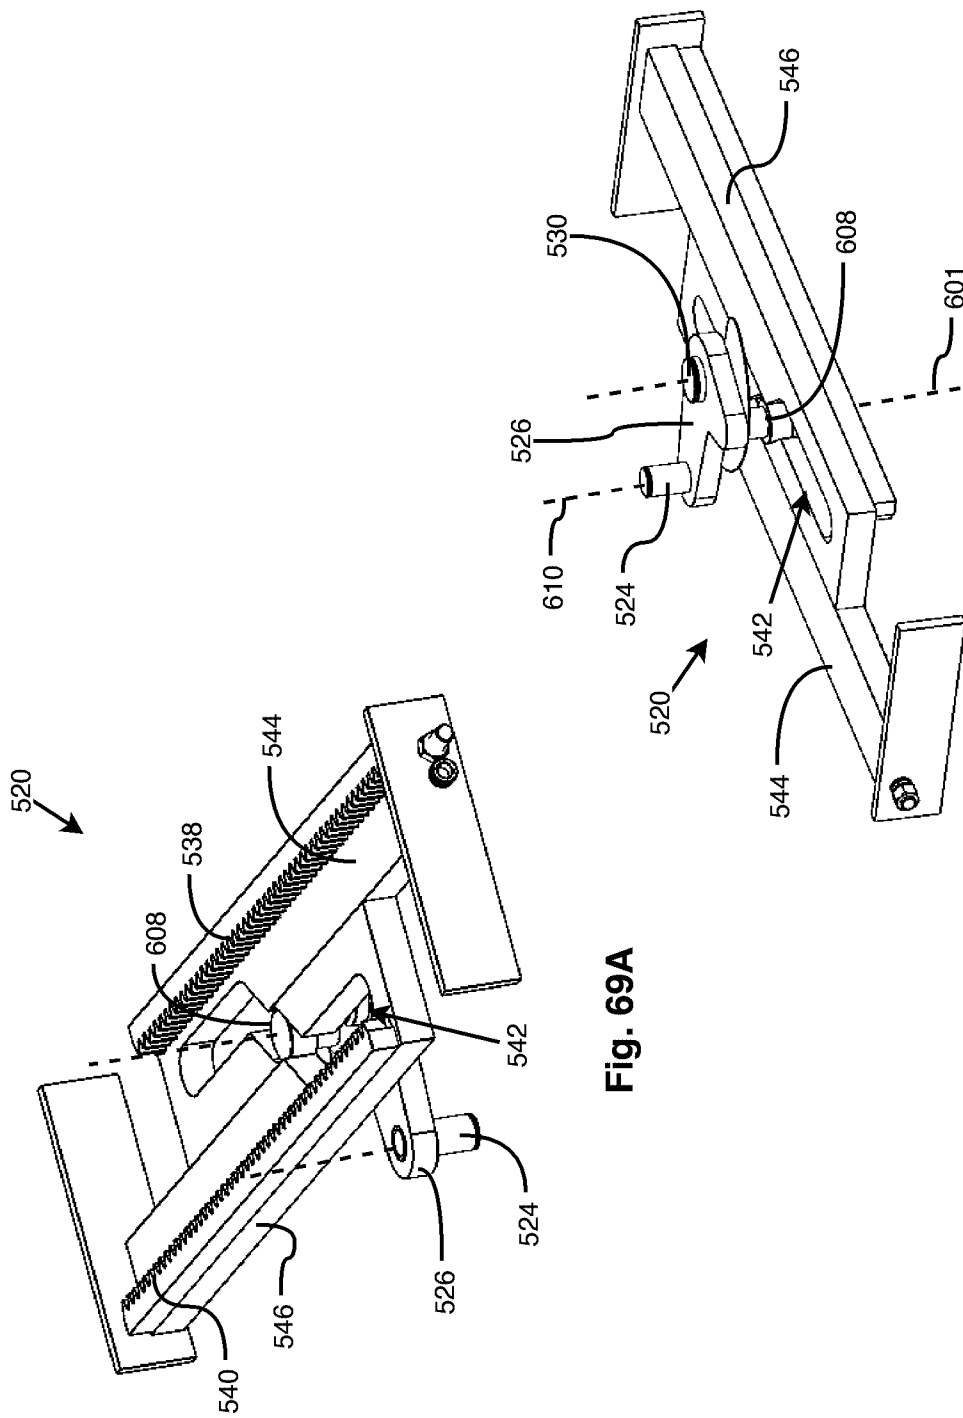


Fig. 69A

Fig. 69B

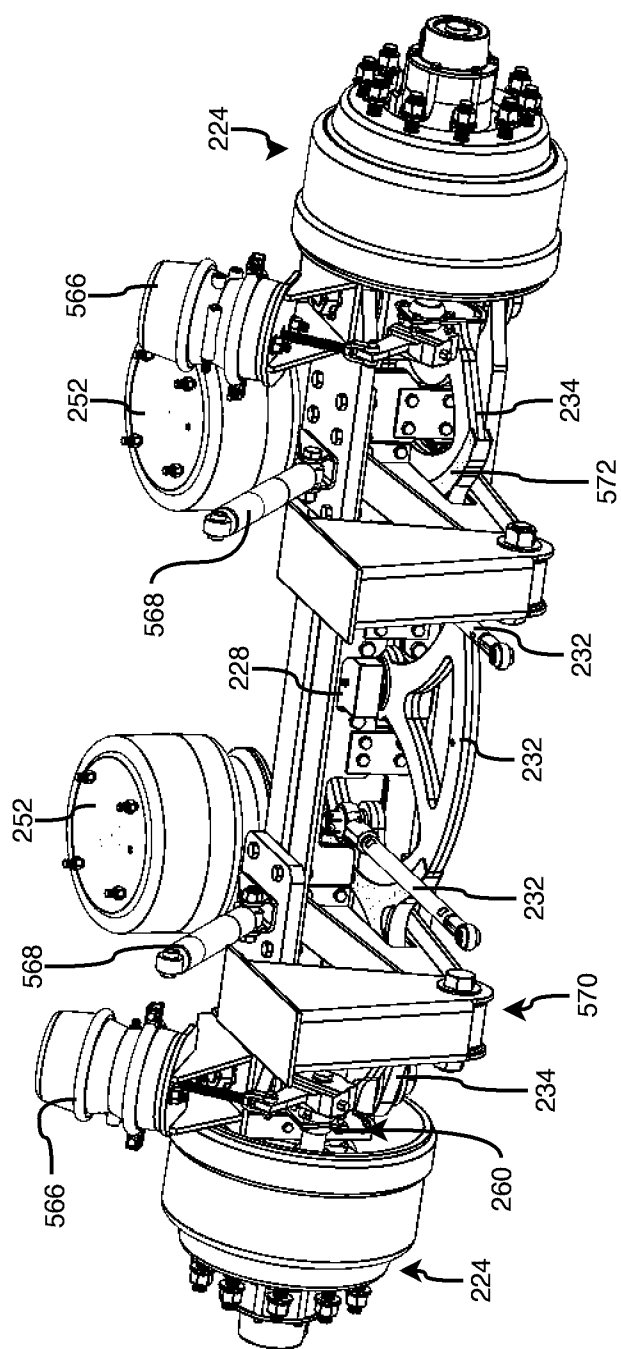


Fig. 70

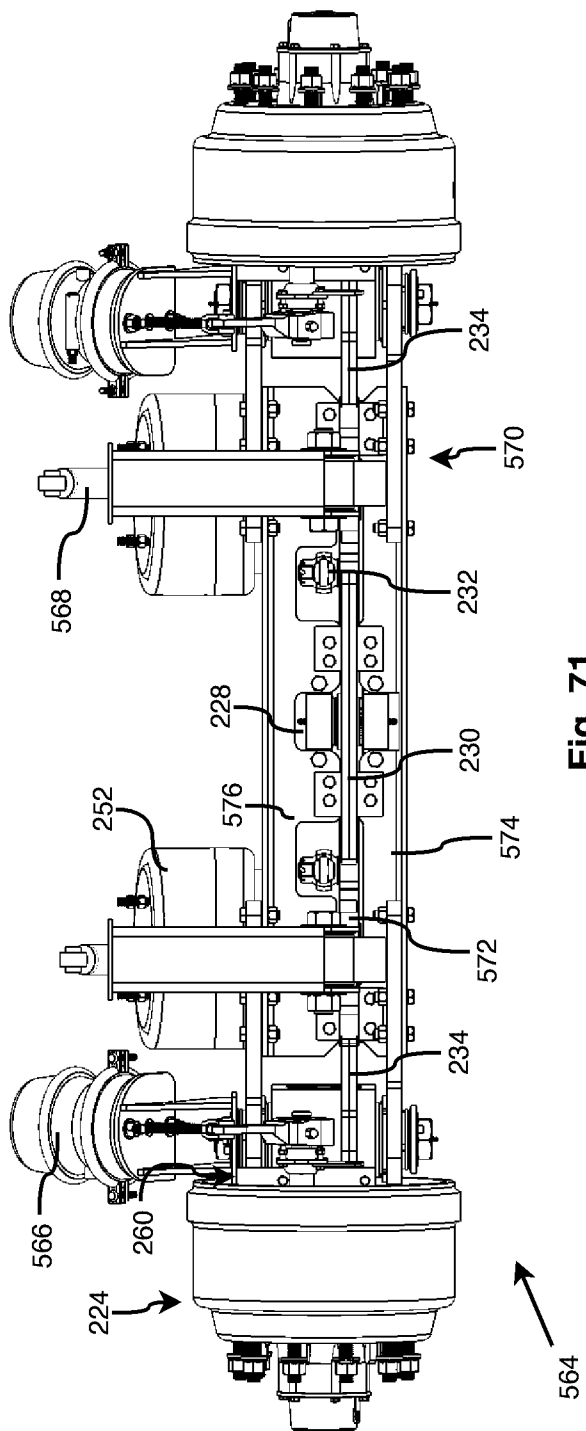


Fig. 71

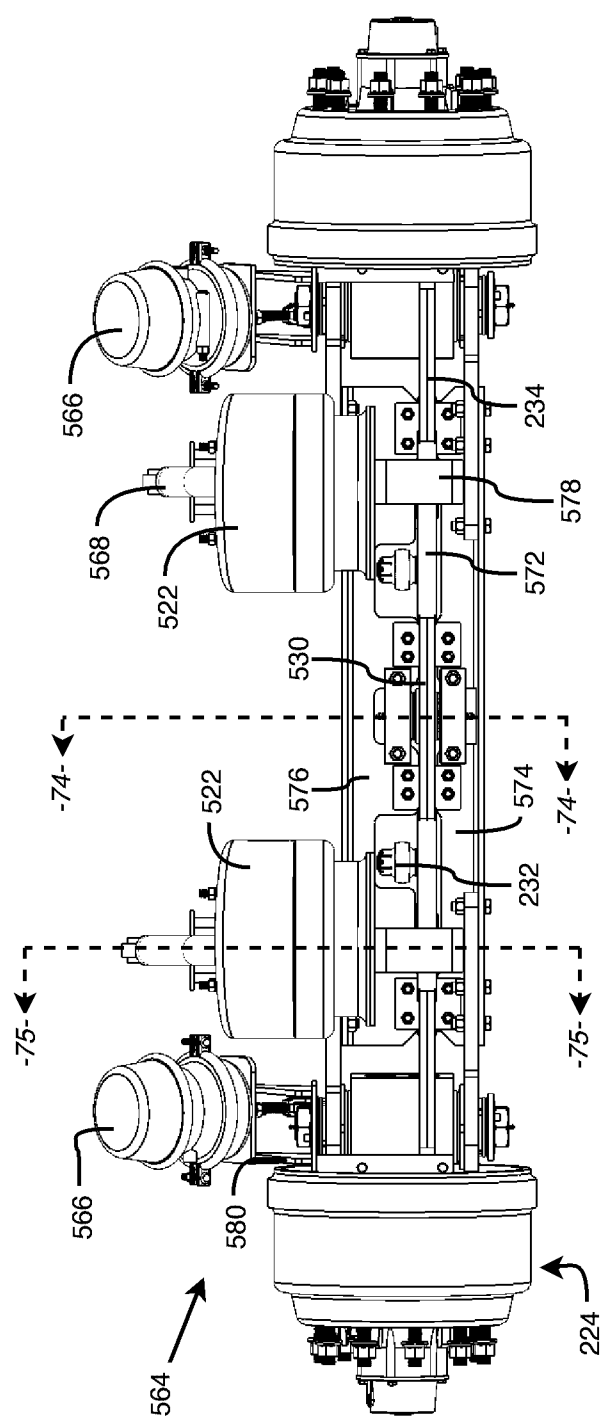


Fig. 72

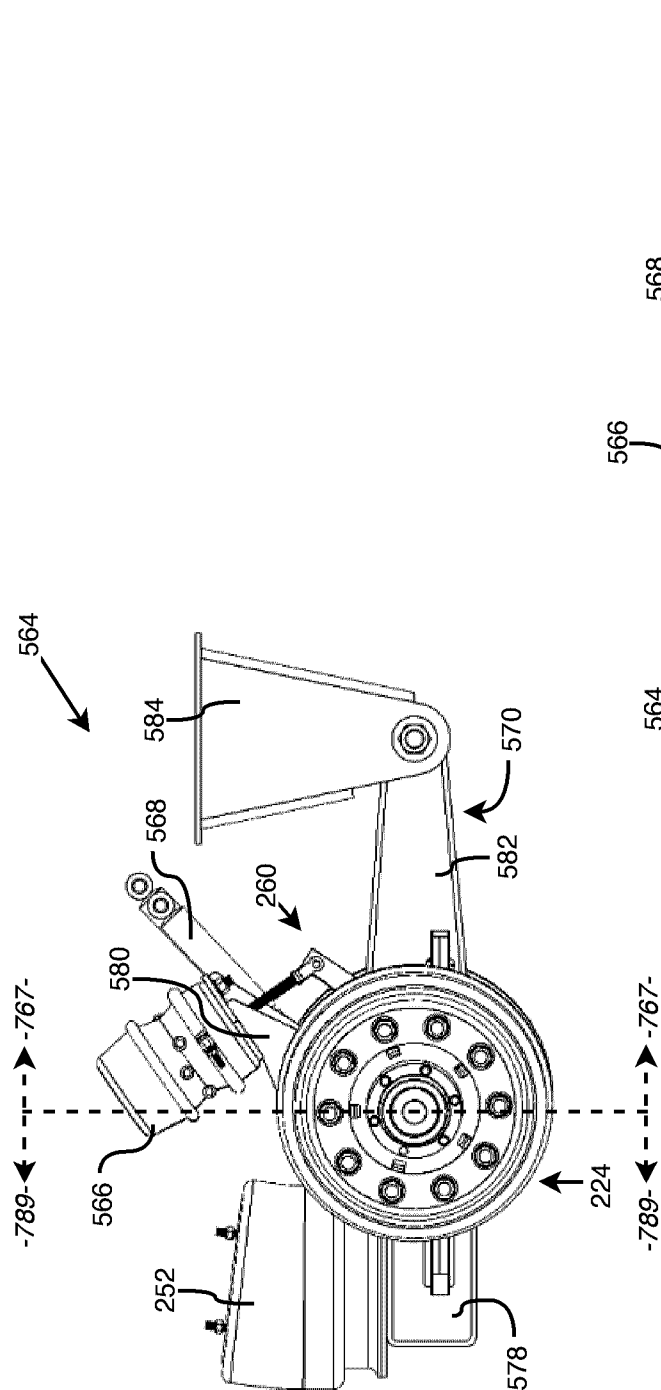


Fig. 73

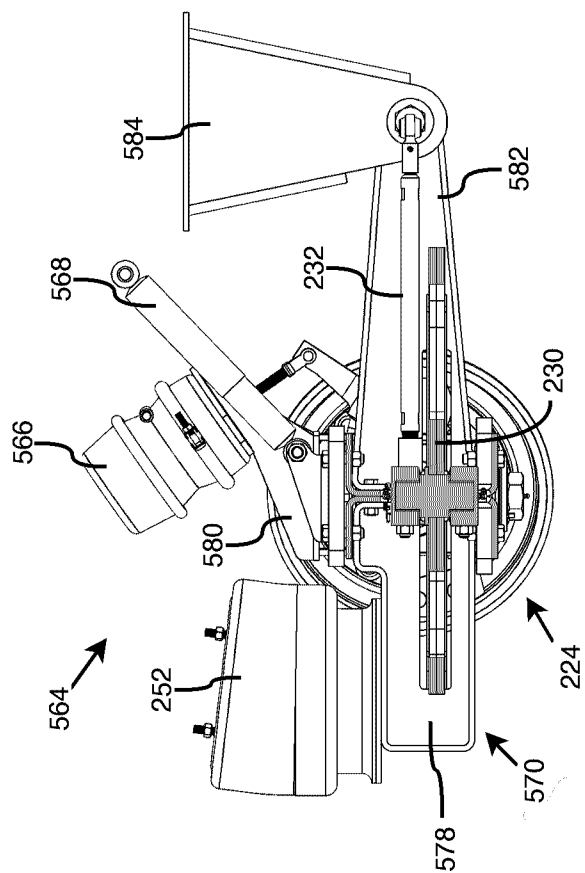


Fig. 74

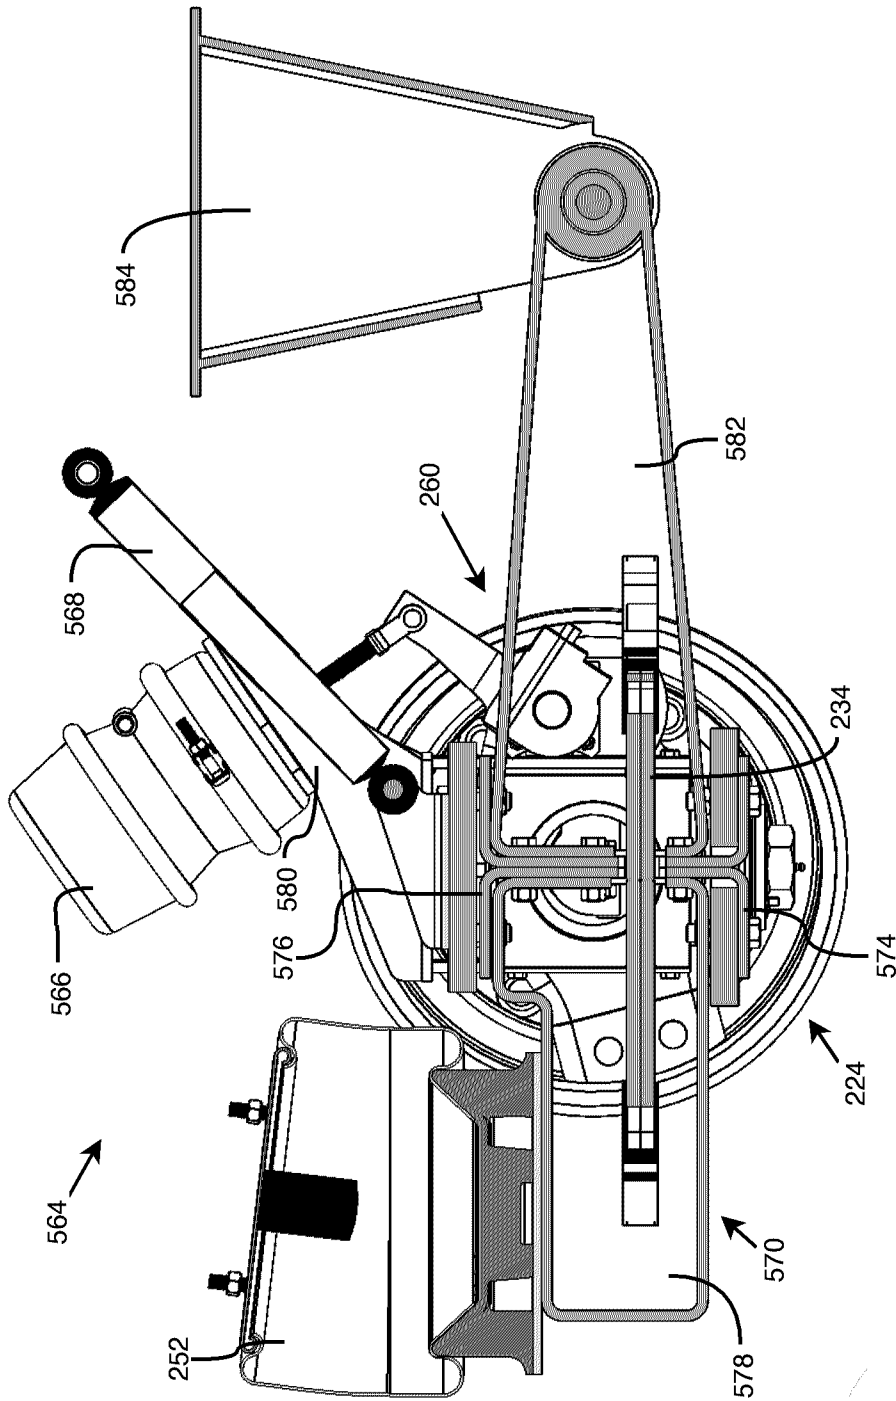


Fig. 75

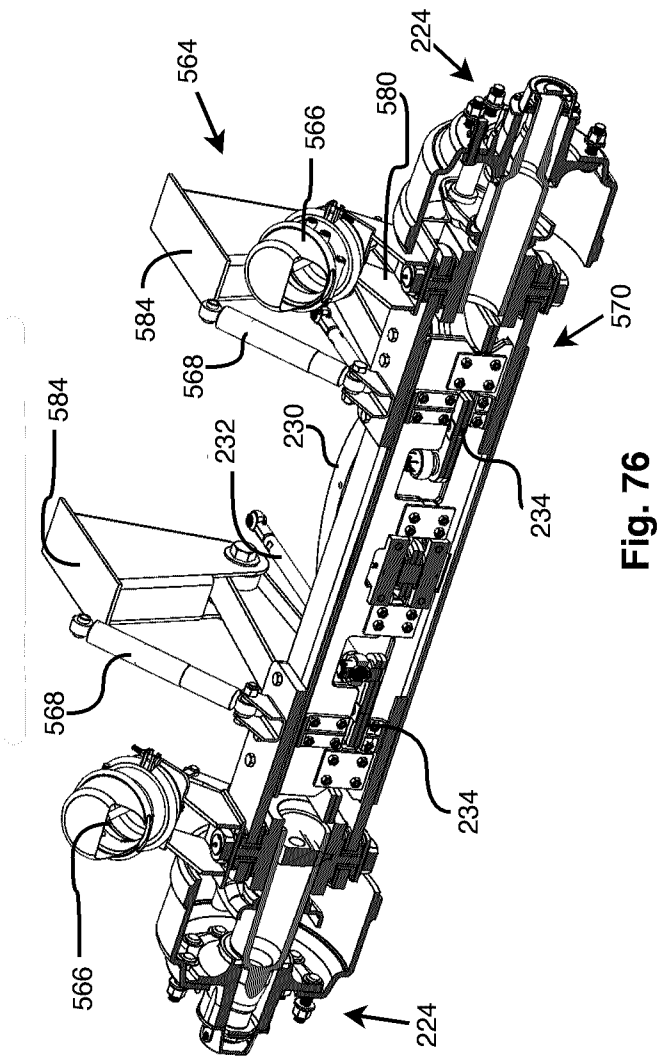


Fig. 76

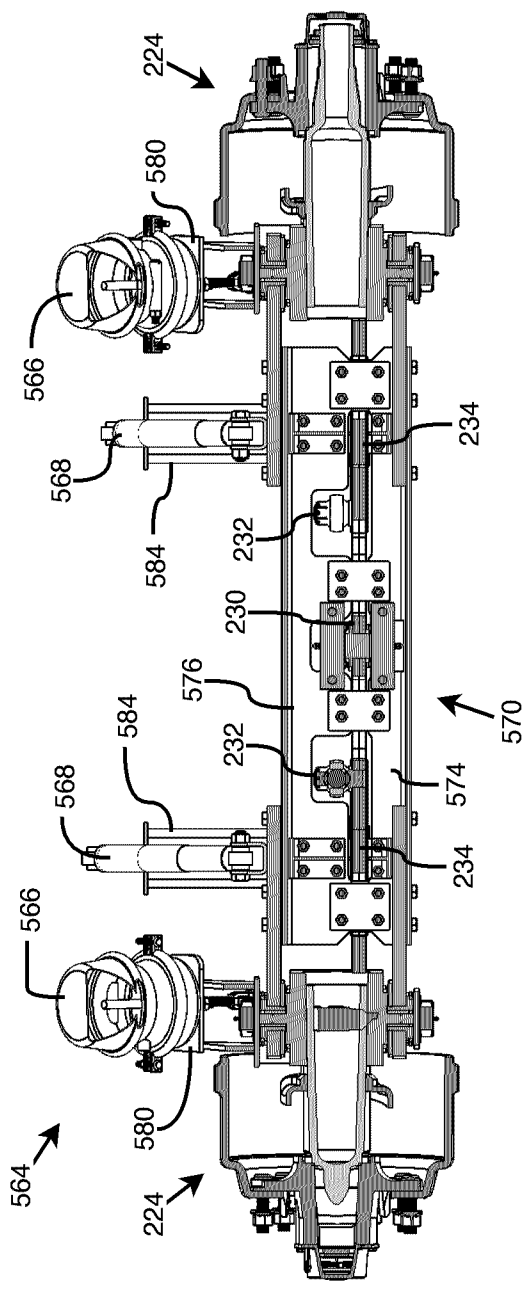


Fig. 77

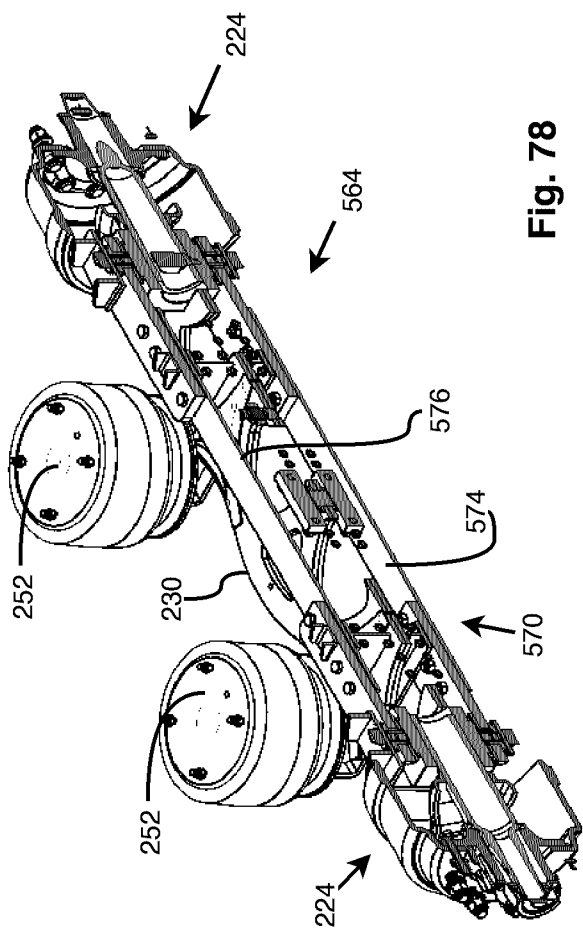


Fig. 78

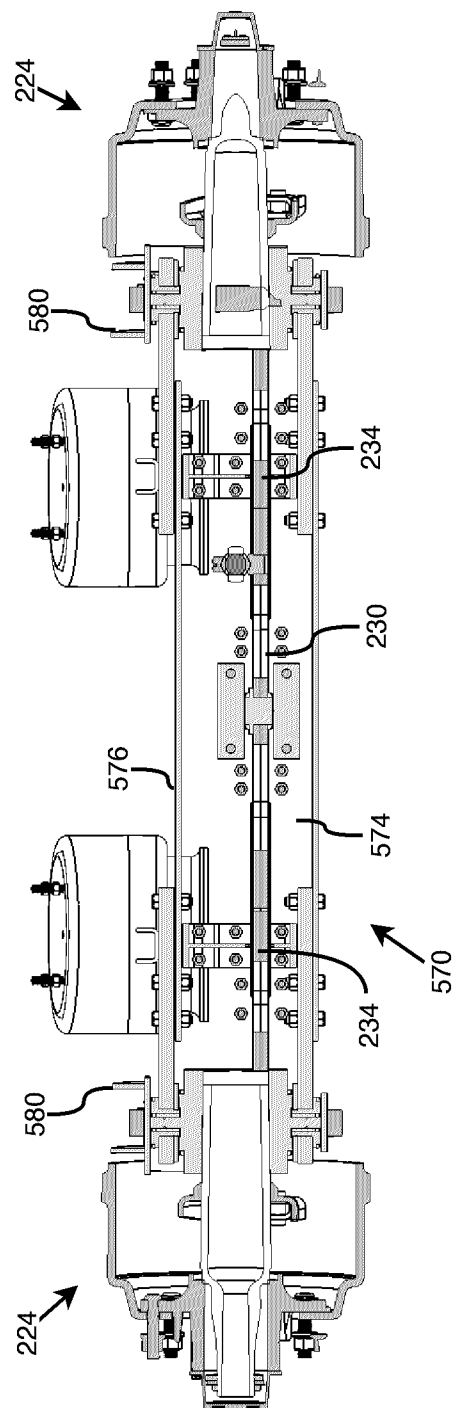


Fig. 79

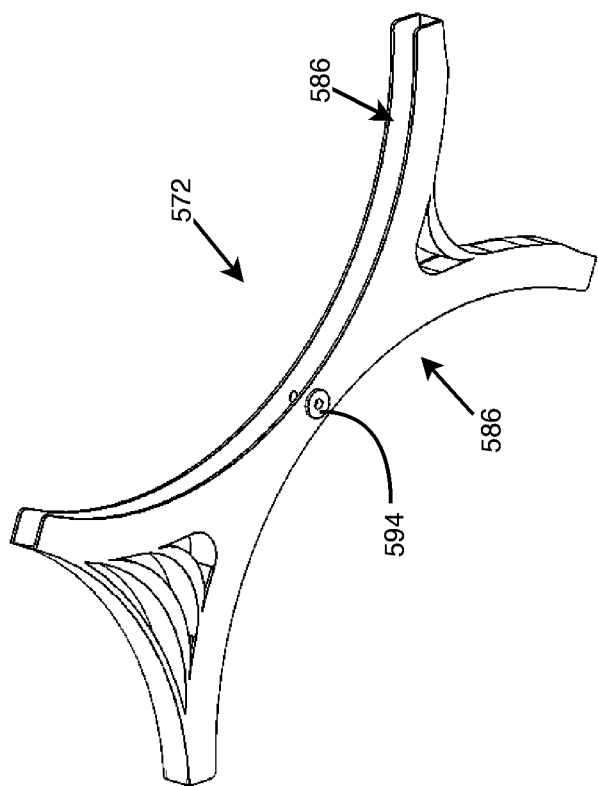


Fig. 80

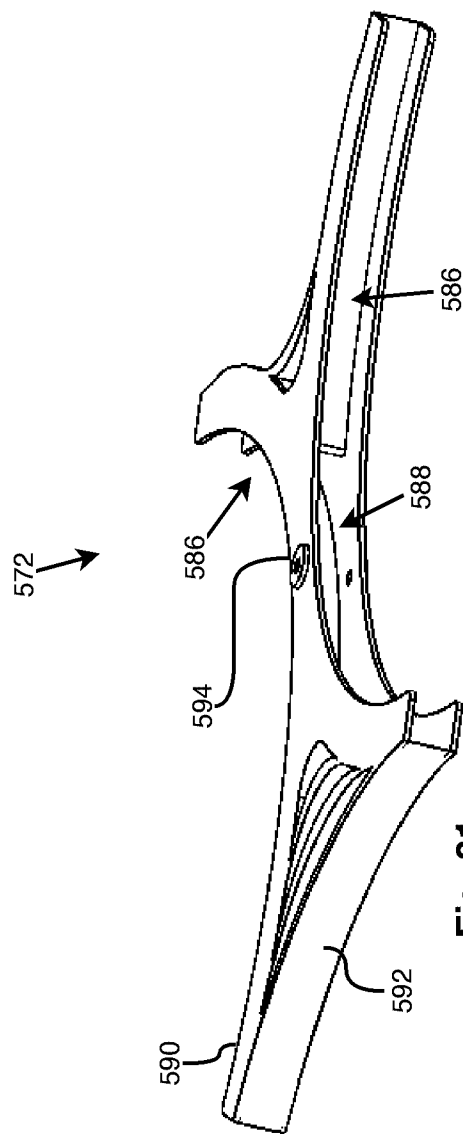


Fig. 81

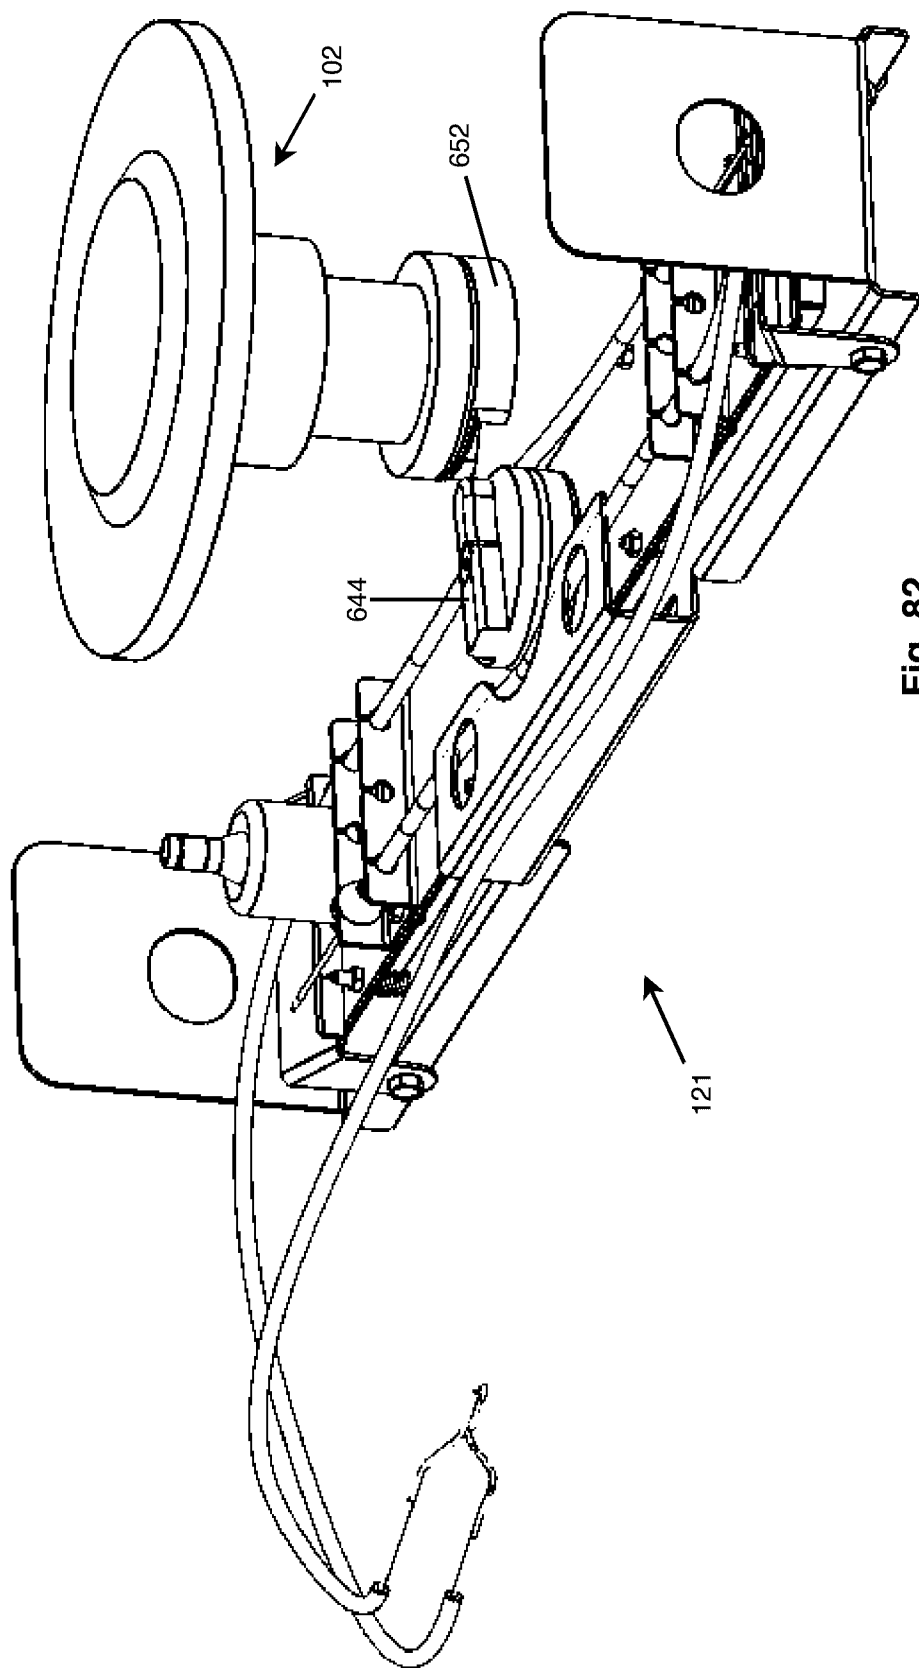


Fig. 82

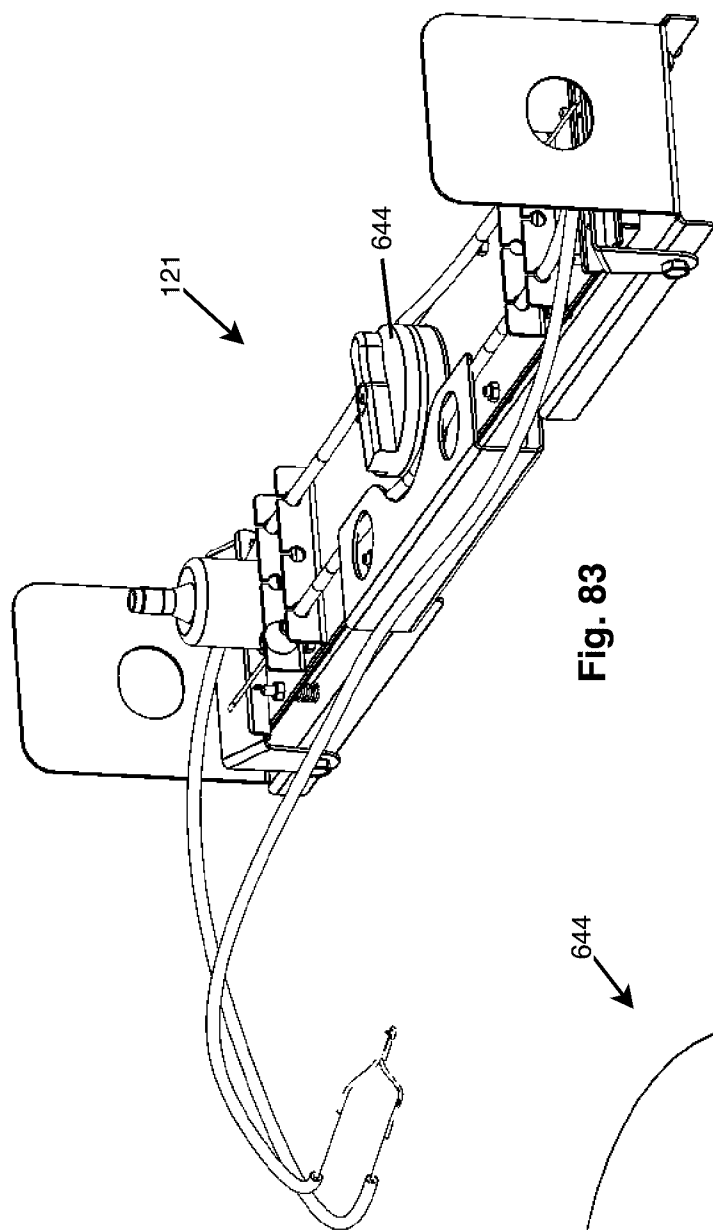


Fig. 83

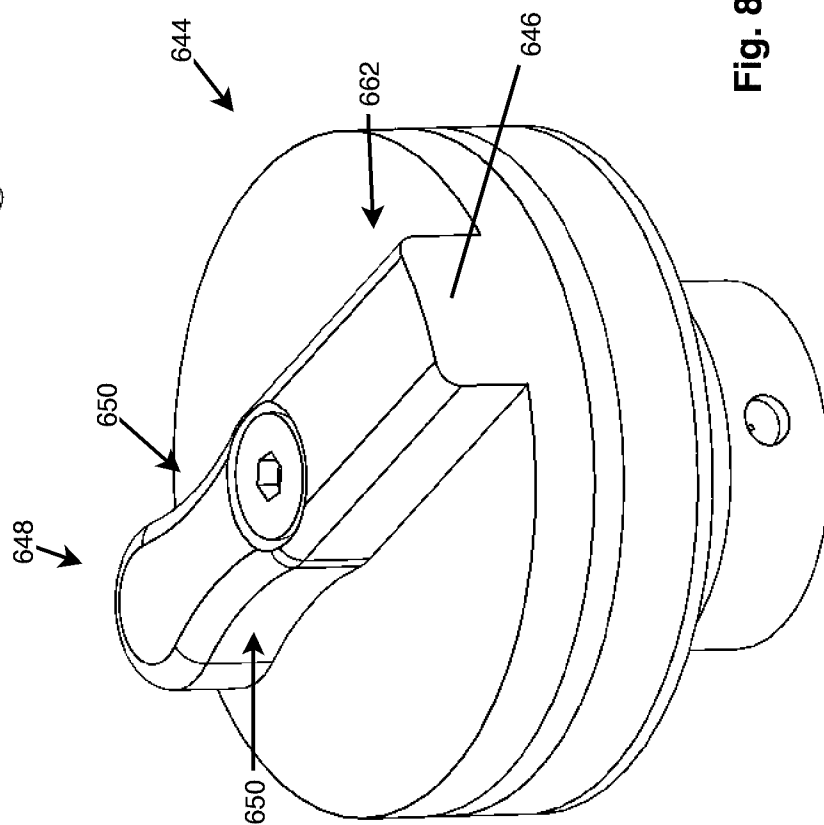


Fig. 84

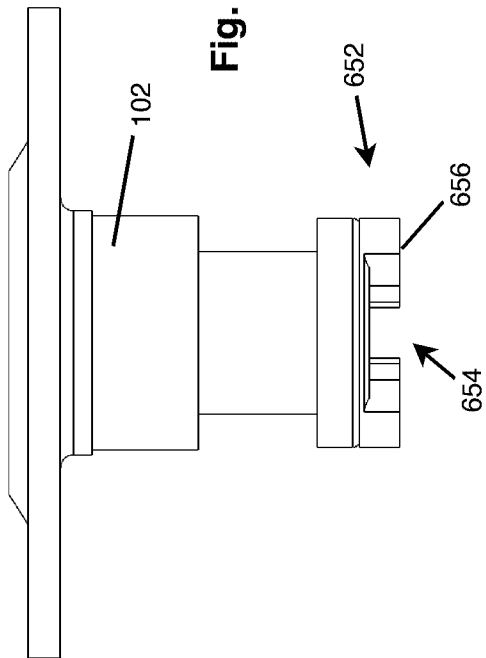


Fig. 85

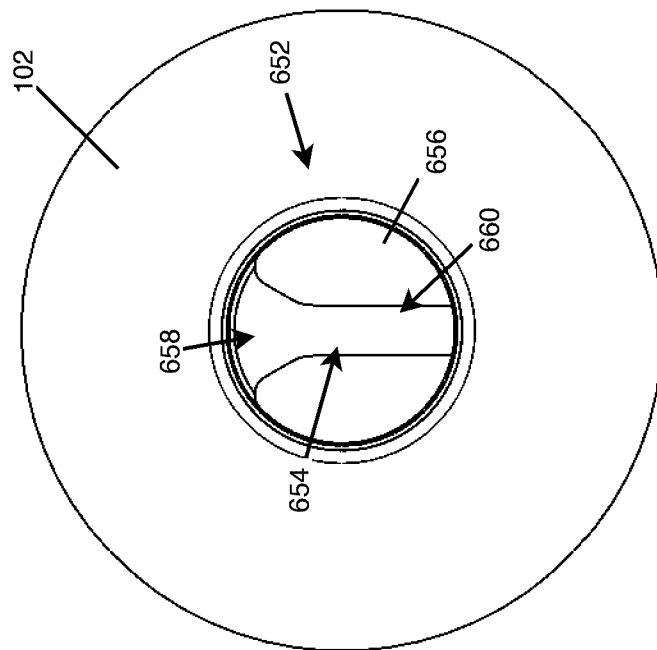


Fig. 86

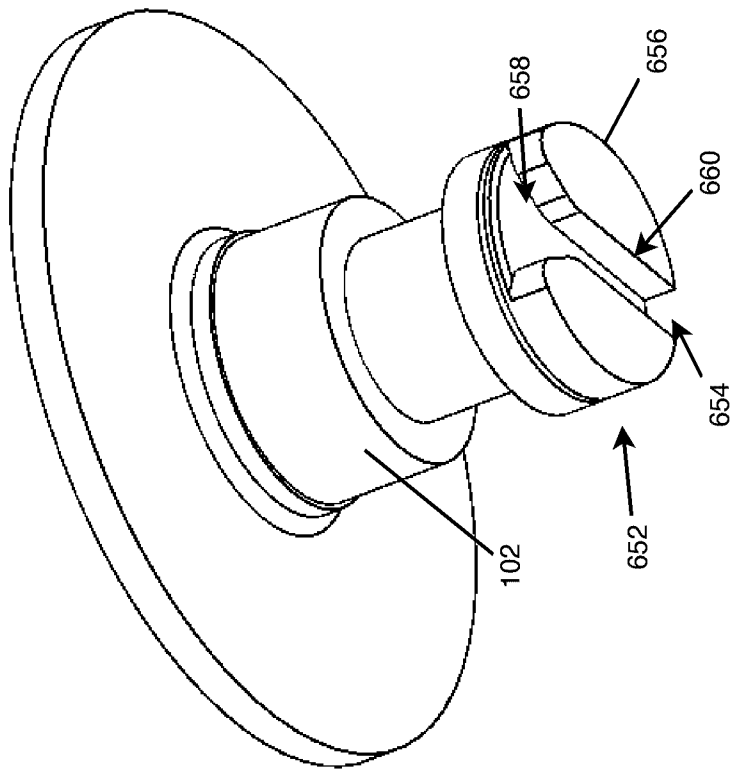


Fig. 87

Front



222

224

234

418

