



(86) Date de dépôt PCT/PCT Filing Date: 2000/03/03
(87) Date publication PCT/PCT Publication Date: 2000/09/08
(45) Date de délivrance/Issue Date: 2008/09/16
(85) Entrée phase nationale/National Entry: 2001/08/29
(86) N° demande PCT/PCT Application No.: US 2000/005605
(87) N° publication PCT/PCT Publication No.: 2000/051729
(30) Priorité/Priority: 1999/03/03 (US09/261,453)


(51) Cl.Int./Int.Cl. *B01J 27/02* (2006.01),
B01J 23/882 (2006.01), *B01J 37/08* (2006.01),
C10G 45/08 (2006.01)

(72) Inventeurs/Inventors:
BRIGNAC, GARLAND BARRY, US;
KOCISCIN, JOSEPH JOHN, US;
MCKNIGHT, CRAIG A., US

(73) Propriétaire/Owner:
EXXONMOBIL RESEARCH AND ENGINEERING
COMPANY, US

(74) Agent: BORDEN LADNER GERVAIS LLP

(54) Titre : PROCEDE AMELIORE D'ACTIVATION DE CATALYSEUR POUR L'HYDRODESULFURATION SELECTIVE
CATALYTIQUE DU NAPHTE
(54) Title: IMPROVED CATALYST ACTIVATION METHOD FOR SELECTIVE CAT NAPHTHA
HYDRODESULFURIZATION

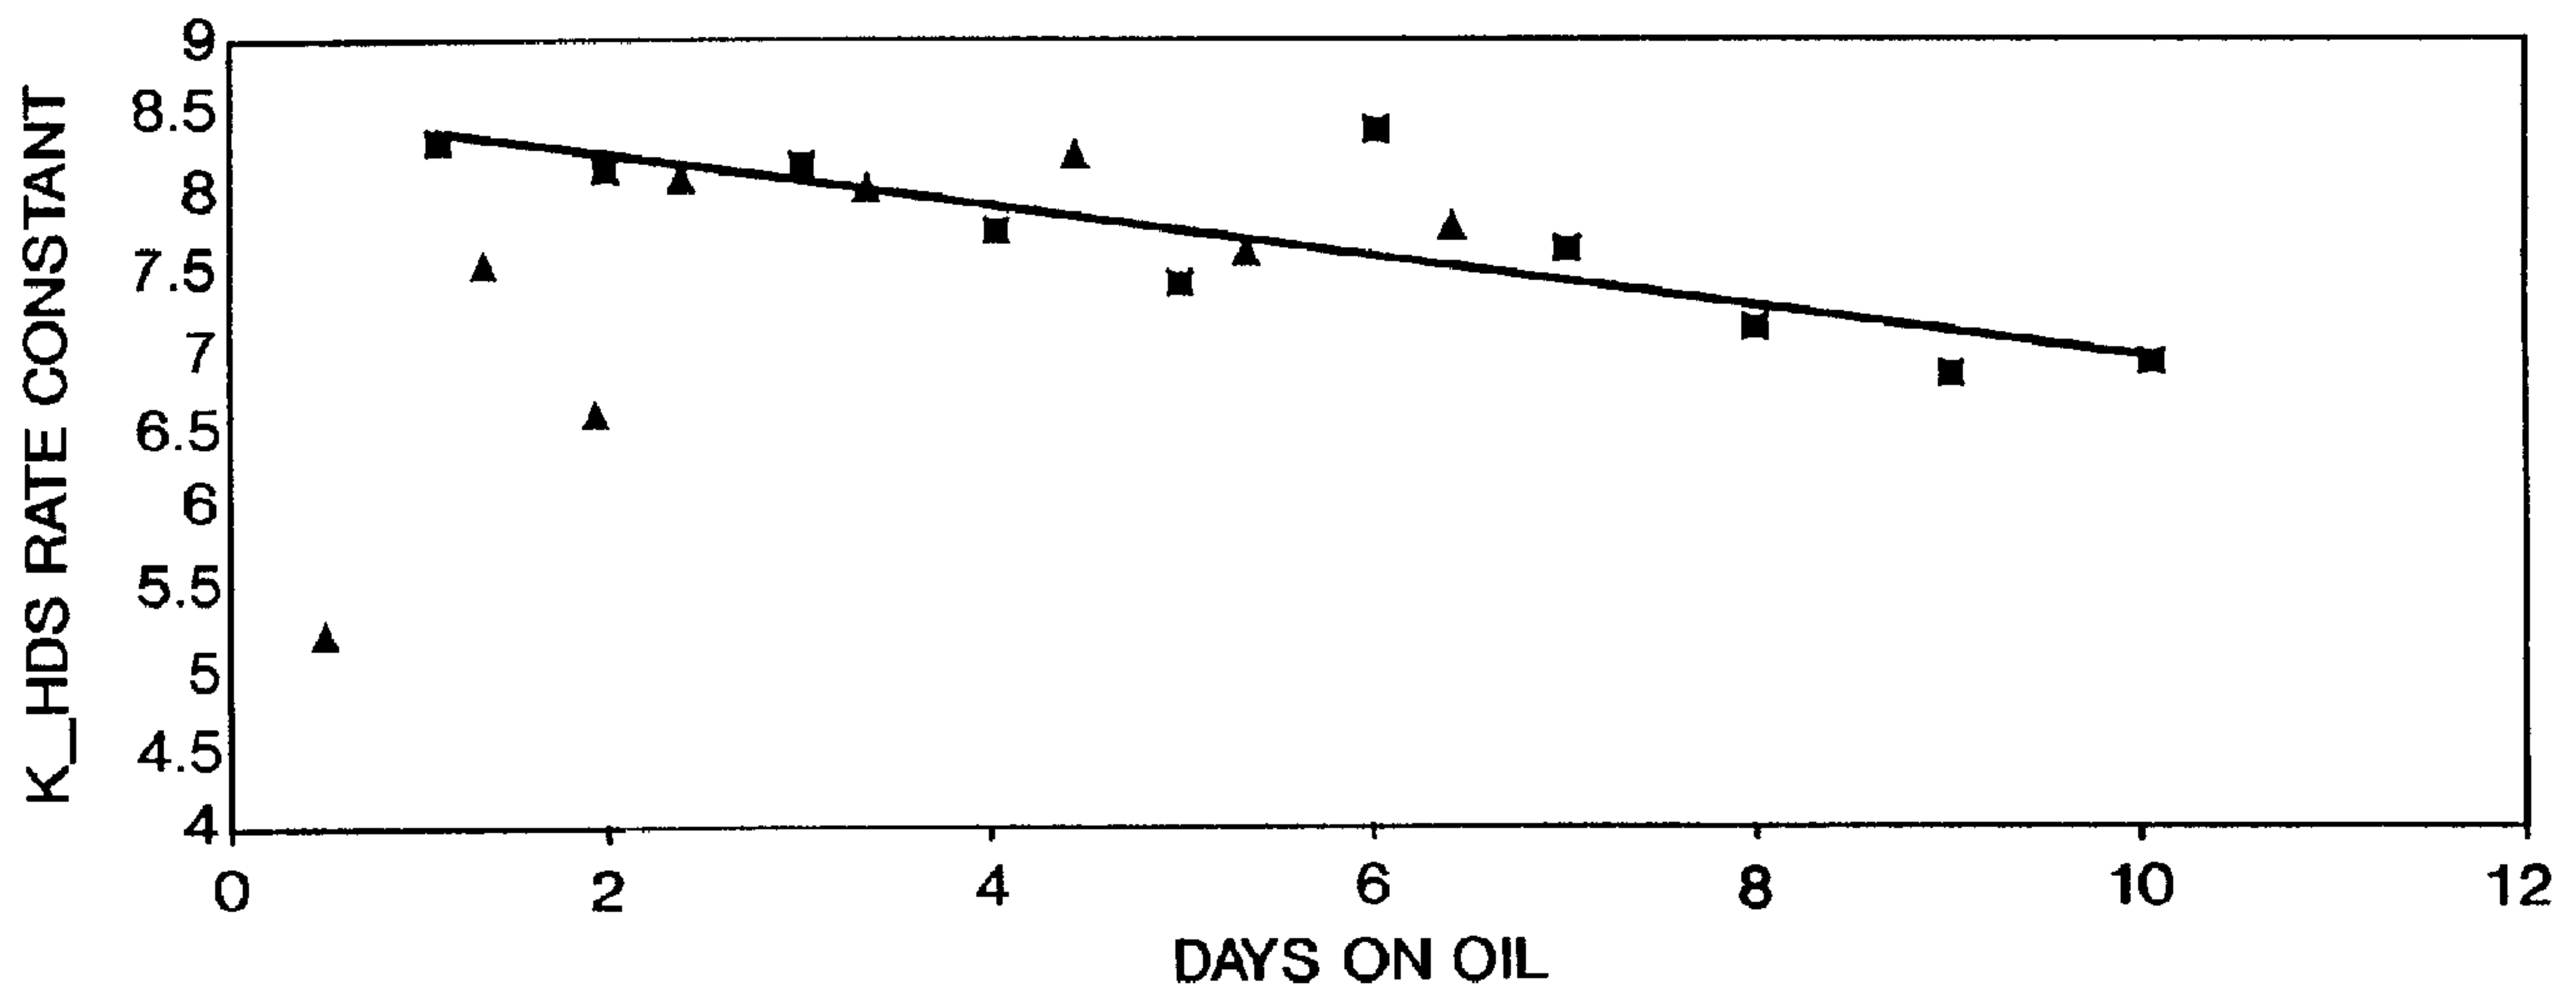

▲ STANDARD ACTIVATION ■ IMPROVED ACTIVATION

(57) Abrégé/Abstract:

An improved catalyst activation process for olefinic naphtha hydrodesulfurization. This process maintains the sulfur removal activity of the catalyst while reducing the olefin saturation activity.

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : B01J 27/02, 27/047, 27/051, 27/049, 27/043, 23/00, C10G 45/04, 45/60	A1	(11) International Publication Number: WO 00/51729 (43) International Publication Date: 8 September 2000 (08.09.00)
--	-----------	---

(21) International Application Number: PCT/US00/05605

(22) International Filing Date: 3 March 2000 (03.03.00)

(30) Priority Data:
09/261,453 3 March 1999 (03.03.99) US

(71) Applicant: EXXON RESEARCH AND ENGINEERING COMPANY [US/US]; 180 Park Avenue, P.O. Box 390, Florham Park, NJ 07932-0390 (US).


(72) Inventors: BRIGNAC, Garland, Barry; 13598 Highway 10, Clinton, LA 70722 (US). KOCISCIN, Joseph, John; 7 Gramercy Drive, Piscataway, NJ 08854 (US). McKNIGHT, Craig, A.; 7705 North Jefferson Place Circle, Apt.#A, Baton Rouge, LA 70809-8630 (US).

(74) Agents: HUGHES, Gerard, J. et al.; Exxon Research and Engineering Company, P.O. Box 390, Florham Park, NJ 07932-0390 (US).

(81) Designated States: AL, AU, BA, BB, BG, BR, CA, CN, CU, CZ, EE, GE, HR, HU, ID, IL, IN, IS, JP, KP, KR, LC, LK, LR, LT, LV, MG, MK, MN, MX, NO, NZ, PL, RO, RU, SG, SI, SK, SL, TR, TT, UA, UZ, VN, YU, ZA, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published*With international search report.*

(54) Title: IMPROVED CATALYST ACTIVATION METHOD FOR SELECTIVE CAT NAPHTHA HYDRODESULFURIZATION

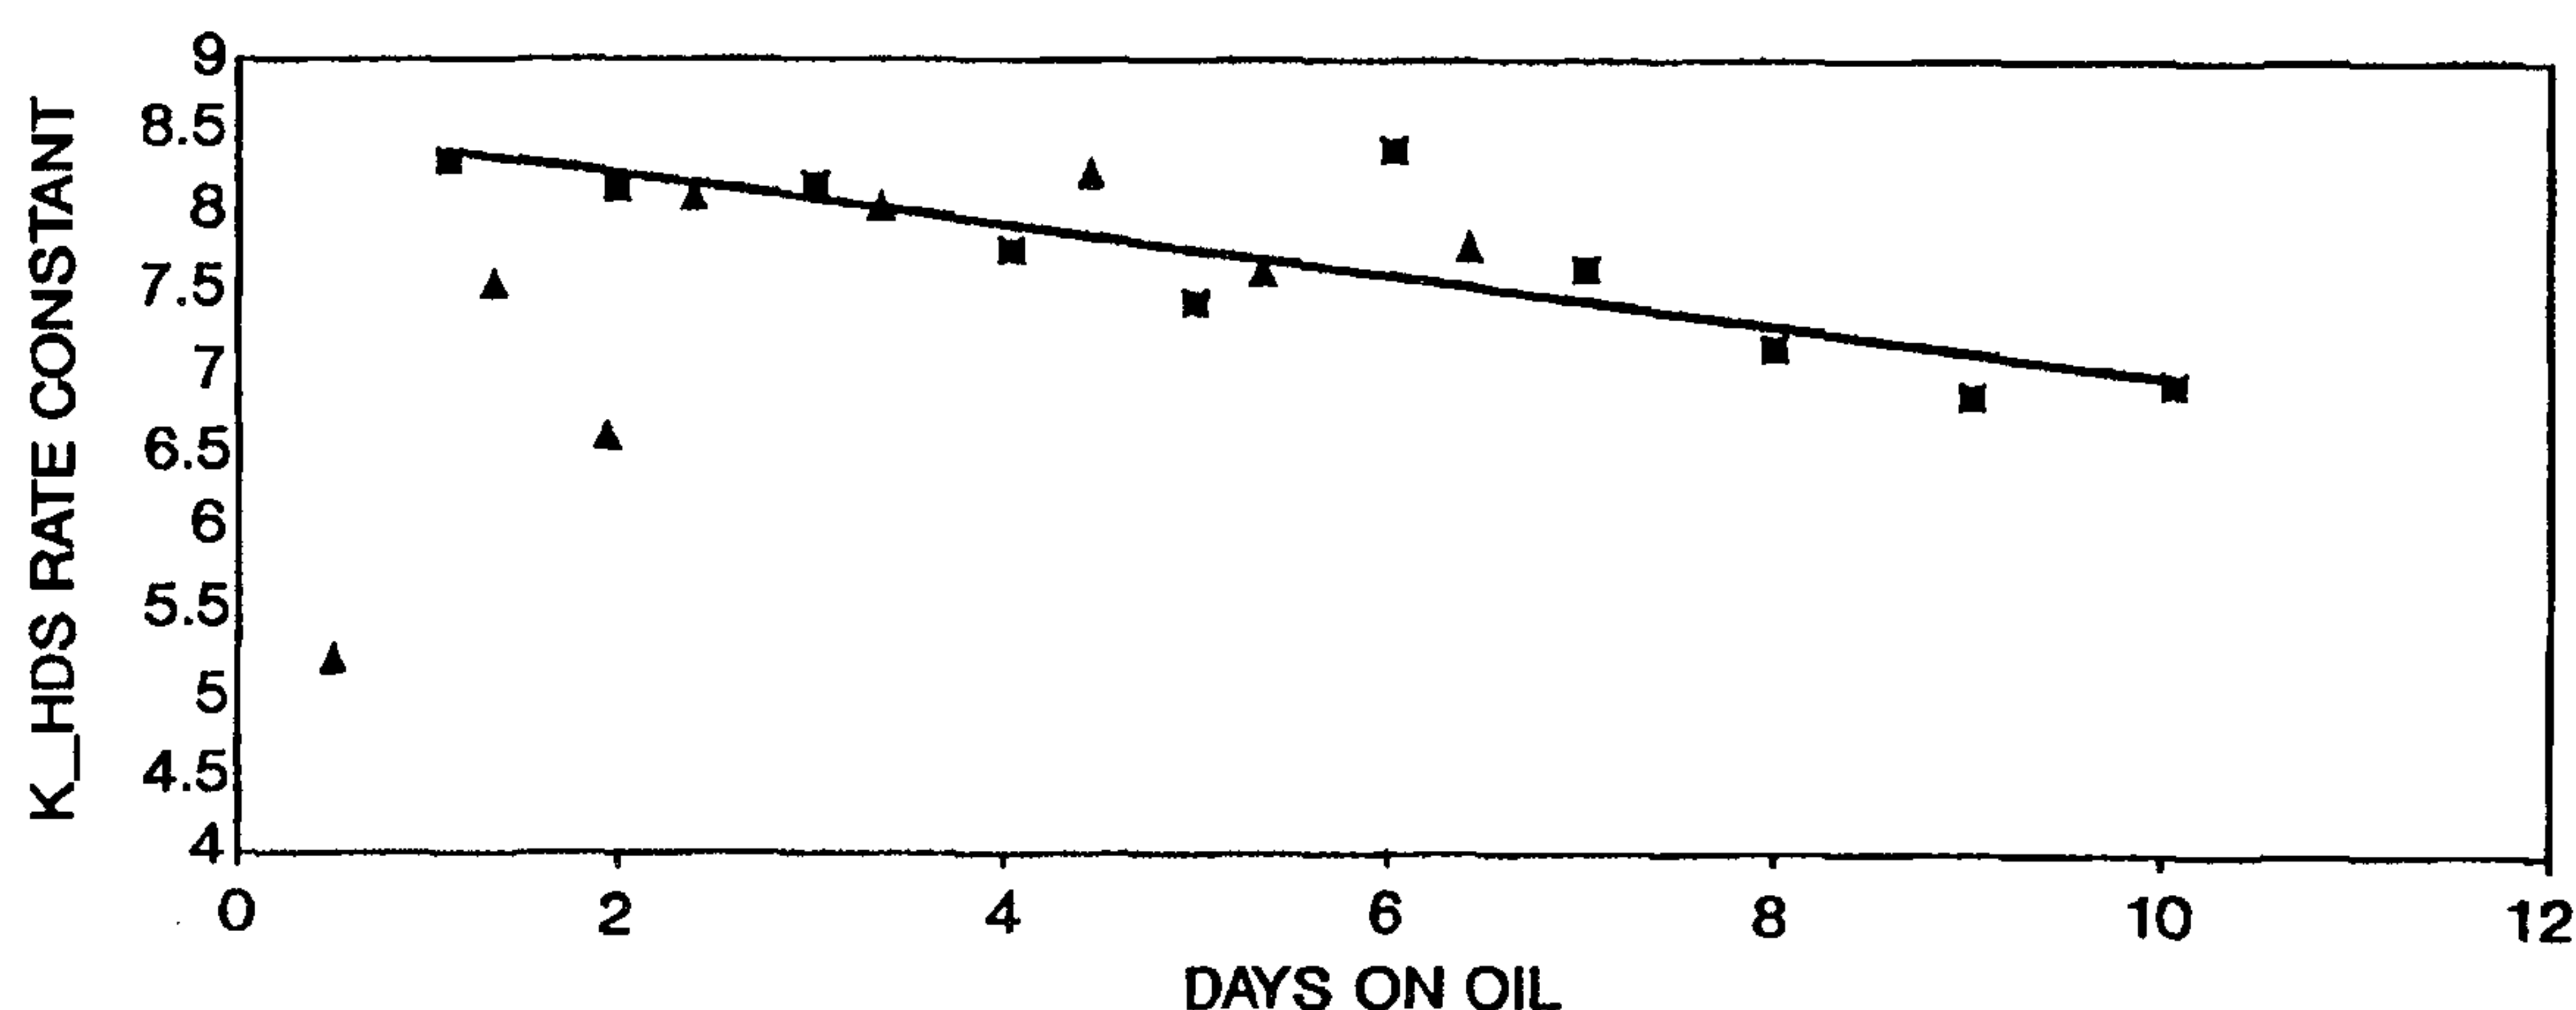

▲ STANDARD ACTIVATION ■ IMPROVED ACTIVATION

(57) Abstract

An improved catalyst activation process for olefinic naphtha hydrodesulfurization. This process maintains the sulfur removal activity of the catalyst while reducing the olefin saturation activity.

IMPROVED CATALYST ACTIVATION METHOD FOR SELECTIVE CAT NAPHTHA HYDRODESULFURIZATION

FIELD OF THE INVENTION

The present invention relates to an improved catalyst activation process for olefinic naphtha hydrodesulfurization. This process maintains the sulfur removal activity of the catalyst while reducing the olefin saturation activity.

BACKGROUND OF THE INVENTION

Hydrotreating of petroleum feedstocks to remove heteroatoms, particularly sulfur, is critical to modern refiners in order to meet ever more demanding environmental regulations. A major source of air pollution worldwide is the exhaust from hundreds of millions of motor vehicles due to fuel combustion. Fuels containing sulfur produce sulfur dioxide and other pollutants leading to a host of environmental concerns, such as smog and related health issues, acid rain leading to deforestation, water pollution, as well as other environmental problems. To help reduce or eliminate these environmental problems, the sulfur content of fuels has been, and will continue to be, restricted to increasingly smaller concentrations.

Hydrodesulfurization is one of the fundamental hydrotreating processes of the refining and petrochemical industries. The removal of feed sulfur by conversion to hydrogen sulfide is typically achieved by reaction with hydrogen over non-noble metal sulfides, especially those of Co/Mo and Ni/Mo, at fairly severe temperatures and pressures to meet product quality specifications, or to supply a desulfurized stream to a subsequent sulfur sensitive process.

Some naphtha fractions contain olefins, such as, for example, cracked naphthas or coker naphthas, which typically contain over about 20 wt.% olefins. At least a portion of the olefins are hydrogenated to saturated hydrocarbons during the hydrodesulfurization operation. Since the olefins are high octane components, for some motor fuel use, it is desirable to retain the olefins rather than to convert them to saturated compounds. Conventional fresh hydrodesulfurization catalyst have both hydrogenation and desulfurization activity. Hydrodesulfurization of cracked naphthas using conventional naphtha desulfurization catalysts under conventional startup procedures and under conditions required for sulfur removal, produces a significant loss of olefins through hydrogenation. This results in a lower grade fuel product which needs more refining, such as isomerization, blending, or other refining, to produce higher octane fuel, adding significantly to production expenses.

Selective hydrodesulfurization to remove sulfur while minimizing hydrogenation of olefins and octane reduction by various techniques, such as selective catalysts, have been described. For example, U.S. Patent Nos. 4,132,632 and 4,140,626 disclose selective desulfurization of cracked naphthas by using specific catalysts having particular amounts of Group VI and VIII metals on magnesia support. U.S. Patent No. 4,149,965 discloses a process for starting-up naphtha hydrodesulfurization using partially deactivated hydrotreating catalyst under relatively low pressure of less than 200 psig. The catalyst is partially deactivated using a substantially non-metals containing hydrocarbonaceous oil for a time ranging from about 10 hrs to about 20 days. U.S. Patent No. 2,983,669 discloses a processes for treating petroleum having a high sulfur content using fractionation and hydrodesulfurization. It is suggested in this '669 patent that the hydrodesulfurization catalyst be one that does not readily promote hydrogenation, such as a partially spent catalyst.

Hydrosulfurization catalysts age, losing activity during use by collecting deposits of carbonaceous material and/or impurities, such as metals, from the treated feedstock. Eventually, with increased deposition, the catalyst is no longer able to provide effective hydrosulfurization. The deactivated catalyst may be regenerated and reused, but is generally less effective than fresh catalyst by requiring higher temperature to give the desired activity and becoming deactivated more quickly than fresh catalyst. Although hydrosulfurization catalysts can usually be repetitively regenerated, they eventually become irreversibly deactivated, or spent, essentially losing their intended hydrosulfurization utility.

It is known to hydrosulfurize an olefinic naphtha by adding a nitrogen compound to the feed in order to deactivate the catalyst for the hydrosulfurization reaction. See U.S. Patent No. 2,913,405.

It is also known to hydrotreat a straight run fuel oil at a pressure not greater than 150 psig and at a temperature from 400° to 500°F in the presence of a catalyst that had been employed in a prior hydrotreating process operated at a higher pressure than the pressure of the fuel oil hydrotreating step until the catalyst had been substantially permanently deactivated for the purpose of said high pressure process, as shown in U.S. Patent No. 3,870,626.

Spent hydrosulfurization catalysts have been used in hydrosulfurization. For example, U.S. Patent No. 3,876,532 discloses a process for hydrosulfurizing middle distillate, virgin oils using spent hydrotreating catalysts under extremely mild conditions to reduce acid and mercaptan content, to remove sulfur below 0.2 wt.%, or 2,000 ppm. U.S. Patent No. 4,414,102 discloses the use of spent hydrosulfurization catalyst to transform nitrogen- or oxygen-containing compounds to sulfur-containing compounds followed by mild hydrosulfurization

treatment. Also, U.S. Patent No. 5,286,373 discloses a process for selectively hydrodesulfurizing naphtha by contacting the naphtha, which contains olefins and thiohydrocarbons, with hydrogen under vigorous hydrodesulfurization conditions in the presence of essentially deactivated hydrodesulfurization catalyst which selectively produces hydrogen sulfide and desulfurized hydrocarbons and resulting in a relatively high olefin content.

Although some of the above processes have met with commercial success, there still remains a need in the art for improved activation process for cat naphtha desulfurization catalysts that do not require the use of an additional deactivation step.

SUMMARY OF THE INVENTION

In accordance with the present invention there is provided a process for the activation of a CoMo supported catalyst for the selective hydrodesulfurization of cat naphtha without saturating a significant amount of the olefins, which process comprises:

- a) heating the catalyst to a temperature of about 350°F to about 450°F in an effective amount of time, in the presence of hydrogen and hydrogen sulfide, and in the presence of virgin naphtha at an effective pressure such that the environment is not a reducing environment;
- b) holding the catalyst at 350°F to about 450°F for an effective amount of time so that at least 20% of the metals that will sulfide will sulfide; and
- c) further heating said catalyst to a temperature from about 550°F to 700°F in the presence of hydrogen and hydrogen sulfide and in the presence of virgin naphtha

and at an effective pressure such that the environment is non-reducing, so that substantially all of the metals are sulfided.

In a preferred embodiment of the present invention the temperature of step a) is obtained by ramping at a rate of about 10°F to about 80°F per hour.

In another preferred embodiment of the present invention the total pressure is from about 200 to 400 psig.

BRIEF DESCRIPTION OF THE FIGURES

Figure 1 is a plot of pilot plant data for the desulfurization of a cat naphtha versus days on oil using both a conventional catalyst activation procedure and the catalyst activation procedure of the instant invention.

Figure 2 is a plot of data showing olefin saturation for a cat naphtha using a conventional catalyst activation in a pilot plant and the catalyst activation procedure of the present invention in a commercial unit.

Figure 3 is plot of data showing desulfurization of a cat naphtha in a stacked catalyst bed arrangement using a conventional catalyst activation procedure in a pilot plant, versus the catalyst activation procedure of the present invention in a commercial unit.

Figure 4 is a plot of data showing olefin saturation of a cat naphtha in a stacked catalyst bed arrangement using a conventional catalyst activation procedure in a pilot plant, versus the catalyst activation procedure of the present invention in a commercial unit.

DETAILED DESCRIPTION OF THE INVENTION

This invention enables the selective hydrodesulfurization of a naphtha that contains significant amounts of both sulfur and olefins, while minimizing loss in octane. Naphtha feedstocks suitable for use in the present invention can comprise any one or more refinery streams boiling in the range from about 50°F to about 450°F, at atmospheric pressure. The naphtha feedstock generally contains cracked naphtha which usually comprises fluid catalytic cracking unit naphtha (cat naphtha), coker naphtha, hydrocracker naphtha, resid hydrotreater naphtha, debutanized natural gasoline (DNG), and gasoline blending components from other sources wherein a naphtha boiling range stream can be produced. Cat naphtha and coker naphtha are generally more olefinic naphthas since they are products of catalytic and/or thermal cracking reactions, and are the more preferred streams for use in the present invention.

The naphtha feedstock, preferably a cracked naphtha feedstock, generally contains not only paraffins, naphthenes, and aromatics, but also unsaturates, such as open-chain and cyclic olefins, dienes, and cyclic hydrocarbons with olefinic side chains. The cracked naphtha feedstock generally comprises an overall olefins concentration ranging as high as about 60 wt.%, more typically about 5 wt.% to 50 wt.%, and most typically from about 5 wt.% to about 40 wt.%. The cracked naphtha feedstock can comprise a diene concentration of as much as 15 wt.%, preferably from about 0.02 wt.% to about 15 wt.%, and more preferably from about 0.02 to 5 wt.%, based on the weight of the feedstock. High diene concentrations can result in a gasoline product with poor stability and color. The cracked naphtha feedstock sulfur content will generally range from about 0.05 wt.% to about 0.7 wt.% and

more typically from about 0.07 wt.% to about 0.5 wt.% based on the total weight of the feedstock. Nitrogen content will generally range from about 5 wppm to about 500 wppm, and more typically from about 20 wppm to about 200 wppm.

Any suitable naphtha hydrodesulfurization catalyst can be used in the practice of the present invention. Generally, such catalysts will be comprised of at least one Group VIII metal, selected from Ni and Co and at least one Group VI metal selected from Mo and W, and an inorganic support material. It is preferred for naphtha desulfurization that the Group VIII metal be Co and the Group VI metal be Mo. The concentration of metal will typically be from about 2 to 60 wt.%, preferably from about 5 to 50 wt.%, and more preferably from about 8 to 40 wt.%. The ratio of Group VIII metal to Group VI metal will typically be from about 0.5:1 to about 100:1, preferably from about 1:1 to about 20:1; and more preferably from about 0.6:1 to about 10:1. The surface area, pore volume, grain size, skeletal or grain density, porosity, and other characteristics of the catalyst may be any effective, including known type or amount. Illustrative catalysts are presented in the Oil and Gas Journal, dated Oct. 14, 1991 on pages 43 to 78.

A particularly preferred catalyst is one having properties which include: (a) a MoO_3 concentration of about 1 to 10 wt.%, preferably about 2 to 8 wt.%, and more preferably about 4 to 6 wt.%, based on the total weight of the catalyst; (b) a CoO concentration of about 0.1 to 5 wt.%, preferably about 0.5 to 4 wt.%, and more preferably about 1 to 3 wt.%, also based on the total weight of the catalyst; (c) a Co/Mo atomic ratio of about 0.1 to about 1.0, preferably from about 0.20 to about 0.80, more preferably from about 0.25 to about 0.72; (d) a median pore diameter of about 60Å to about 200Å, preferably from about 75Å to about 175Å and more

preferably from about 80Å to about 150Å; (e) a MoO_3 surface concentration of about 0.5×10^{-4} to about 3×10^{-4} g. MoO_3/m^2 , preferably about 0.75×10^{-4} to about 2.5×10^{-4} , more preferably from about 1×10^{-4} to about 2×10^{-4} ; and (f) an average particle size diameter of less than 2.0 mm, preferably less than about 1.6 mm, more preferably less than about 1.4 mm, and most preferably as small as practical for a commercial hydrodesulfurization process unit. The most preferred catalysts will also have a high degree of metal sulfide edge plane area as measured by the Oxygen Chemisorption Test described in "Structure and Properties of Molybdenum Sulfide: Correlation of O_2 Chemisorption with Hydrodesulfurization Activity", S.J. Tauster et al., Journal of Catalysis 63, pp 515-519 (1980).

The Oxygen Chemisorption Test involves edge-plane area measurements made wherein pulses of oxygen are added to a carrier gas stream and thus rapidly traverse the catalyst bed. For example, the oxygen chemisorption will be from about 800 to 2,800, preferably from about 1,000 to 2,200, and more preferably from about 1,200 to 2,000 μmol oxygen/gram MoO_3 . The terms hydrotreating and hydrodesulfurization are sometimes used interchangeably in this document.

The hydrogen may be provided as substantially pure hydrogen gas or may contain inert or other gases, including light hydrocarbons. Any hydrogen not consumed during the reaction may be recycled for reuse. The hydrogen is generally provided as hydrogen-containing gas with a major amount of, over half up to nearly pure, hydrogen gas with the balance being inert or hydrocarbonaceous gases. The amount of hydrogen used may be any amount effective for hydrodesulfurization to occur. Typically, hydrogen is added for continuous reactions at a treat gas ratio of from about 500 scf/B to about 5,000 scf/B, preferably from about 1,200 scf/B to about 3,000 scf/B, wherein scf/B means standard cubic feet per barrel.

The present invention is practiced by first heating the catalyst to a first end temperature of about 350°F to about 450°F in an atmosphere containing hydrogen and hydrogen sulfide at a concentration that will provide a non-reducing environment. The heating to this first end temperature is conducted in an effective amount of time. That is by ramping the temperature at a rate such that a non-reducing sulfiding environment is maintained. This heating rate will typically be from about 10°F/hr to about 80°F/hr, preferably from about 30°F/hr to about 60°F per hour. This heating will be conducted in a hydrogen/hydrogen sulfide environment, in the presence of virgin naphtha, and at an effective pressure. That is, at a pressure that will also maintain a non-reducing sulfiding environment. Typical pressures will be from about 200 to 400 psig total pressure, preferably about 250 to 350 psig total pressure. By virgin naphtha we mean a naphtha that preferably comes directly from a pipe still and thus is not a cracked naphtha from a downstream process unit. Virgin naphthas are typically substantially sulfur and olefin free. The sulfur content of a virgin naphtha will usually be from about 100 to about 1,000 wppm, have a nitrogen content from about 0.1 wppm to 50 wppm, and containing substantially no olefins.

The catalyst will be held at this first end temperature for an effective amount of time. That is, for a time sufficient to sulfide at least about 20% of the metal of said catalyst. This holding period will typically be from about 2 hours to about 24 hours, preferably from about 5 hours to about 15 hours.

The catalyst, after said holding period, will be heated to a second end temperature at an effective heating rate. This second heating will also be in the presence of a hydrogen/hydrogen sulfide environment and also in the presence of a virgin naphtha. The heating rate and the total pressure will be such that a non-

reducing sulfiding environment is maintained. The heating rate and the total pressure will be within the ranges given for heating to the first end temperature. The catalyst will be held at this second end temperature also for an effective amount of time. This effective amount of time will be for a time sufficient to allow substantially complete sulfiding of the catalytic metals of said catalyst.

This invention will be further understood by the following examples, which are presented for illustrative purposes and are not to be limiting in any way.

Example 1

A commercially prepared, reference batch of catalyst available from Criterion under the name C-447 was used in this test. The catalyst (C-447) was comprised of 15.3 wt.% MoO₃, 4.32 wt.% CoO on an alumina support. The catalyst was tested in a commercially available 1.6 mm trilobe size. The improved activation method of this invention was performed in-situ with a 10 mole% H₂S/H₂ gas blend (384 scf/B gas rate) and a virgin light naphtha which is low in sulfur (about 200 wppm), and nitrogen (about 0.1 wppm) and olefins (substantially none), for approximately 14 hrs at two holding temperatures, 400 (gas/liquid mixed phase and 650°F (all vapor phase) with reactor pressure of 300 psig. The reactor was then cooled to 250°F before the introduction of the cat naphtha feed. The test was performed in an isothermal, downflow, all vapor-phase pilot plant. The activity test used an intermediate/heavy cat naphtha feed with a 162-475°F boiling range, 1850 wppm total sulfur, and 26 bromine number. Catalyst volume loading was 20 cubic centimeters. Reactor conditions were 500°F, 2600 scf/B, 100% hydrogen treat gas and 300 psig total inlet pressure. Space velocity was held constant at 6.5 LHSV. HDS levels ranged between 97.4 and 96.1% and olefin saturation between 46.7 and

40.2%. For comparison, a conventional type of activation of the same batch of C-447 was performed in-situ with a 10 mole% H_2S/H_2 gas blend (0.85 scf/hr gas rate) for approximately 14 hrs at two holding temperatures, 450 and 700°F with reactor pressure of 30 psig. After cooling to 200°F, other parameters were kept the same as the improved activation method of this invention. Figure 1 hereof, shows that the improved activation method of this invention preserves catalyst activity for desulfurization of the intermediate/heavy cat naphtha. Figure 2 hereof shows that the improved activation method of the this invention reduces olefin saturation activity. Table I hereof summarizes the benefit from the improved activation method of this invention.

Example 2

A pilot plant containing a stacked catalyst bed was used. The lower most, or downstream most catalyst bed contained the C-447 catalyst (Catalyst B) as described in Example 1 above. The upper most, or upstream catalyst bed contained a catalyst (Catalyst A) comprised of about 1.2 wt.% CoO , 4.5 wt.% MoO_3 on an alumina support and having a median pore diameter of about 87Å. The ratio of each catalyst to each other was about 50/50. This stacked catalyst bed was activated by the same conventional type procedure as recited in Example 1 above.

For comparison, a commercial process unit containing a stacked bed of the catalyst set forth above, except the ratio was Cat A/Cat B of 40/60. The activation of this stacked bed of catalyst was performed in-situ starting with a 0.5 mole% H_2S/H_2 gas blend (3,500 scf/B) and a virgin naphtha (20, 000 barrels). The stacked bed of catalyst was heated to a temperature of 400°F at a rate of 10 to 15°F per hour and held at that temperature (all vapor phase) at a reactor pressure of about 300 psig until breakthrough of H_2S was observed. The H_2S concentration in the treat gas was

then increased to 1.0 to 1.5 mole% in hydrogen and the reactor temperature increased to 590°F (all vapor phase). After breakthrough of H₂S was observed, the reactor was cooled to 400°F and an intermediate/heavy cat naphtha, as described above was introduced. Figure 3 hereof shows comparable commercial and pilot plant sulfur removal activities. Also, Figure 4 hereof, shows lower olefin hydrogenation activity for the commercial feedstock using the improved activation method of the presently claimed invention, and Table 2 hereof shows a summary of the benefit of the activation method of this invention.


CLAIMS:

1. A process for the activation of a CoMo supported catalyst for the selective hydrodesulfurization of naphtha feedstock containing significant amounts of sulfur and olefins, without saturating a significant amount of the olefins, which process comprises:
 - (a) heating the catalyst to a temperature of about 350°F to about 450°F at a heating rate of about 10°F/hr to about 80°F/hr in the presence of hydrogen and hydrogen sulfide, and in the presence of virgin naphtha at an effective pressure such that the environment is not a reducing environment, said pressure ranging from 200 psig to 400 psig total pressure;
 - b) holding the catalyst at 350°F to about 450°F for an amount of time so that at least 20% of the metals capable of sulfiding will sulfide; and
 - c) further heating said catalyst to a temperature from about 550°F to 700°F in the presence of hydrogen and hydrogen sulfide and in the presence of the virgin naphtha and at an effective pressure such that the environment is non-reducing, wherein said pressure ranges from 200 psig to 400 psig, so that substantially all of the metals are sulfided.
2. The process of claim 1 wherein the naphtha feedstock is a cracked naphtha feedstock and contains about 5 wt.% to about 50 wt.% olefins.
3. The process of claim 2 wherein the naphtha feedstock has a diene concentration of about 0.02 to 15 wt.%.
4. The process of any one of claims 1 to 3 wherein the temperature of step a) is reached by heating at a rate of about 30 to 60°F per hour at a total pressure of about 250 to 350 psig.
5. The process of claim 2 wherein the naphtha feedstock is a cat naphtha and contains a sulfur concentration of about 0.05 to 0.7 wt.%, based on the total weight of the naphtha.

6. The process of claim 5 wherein the naphtha is cat naphtha, coker naphtha, hydrocracker naphtha, resid, or hydrotreater naphtha.
7. The process of any one of claims 1 to 6 wherein the virgin naphtha used in step a) contains about 100 wppm to about 1,000 wppm sulfur and substantially no olefins.

1 / 4


FIG. 1

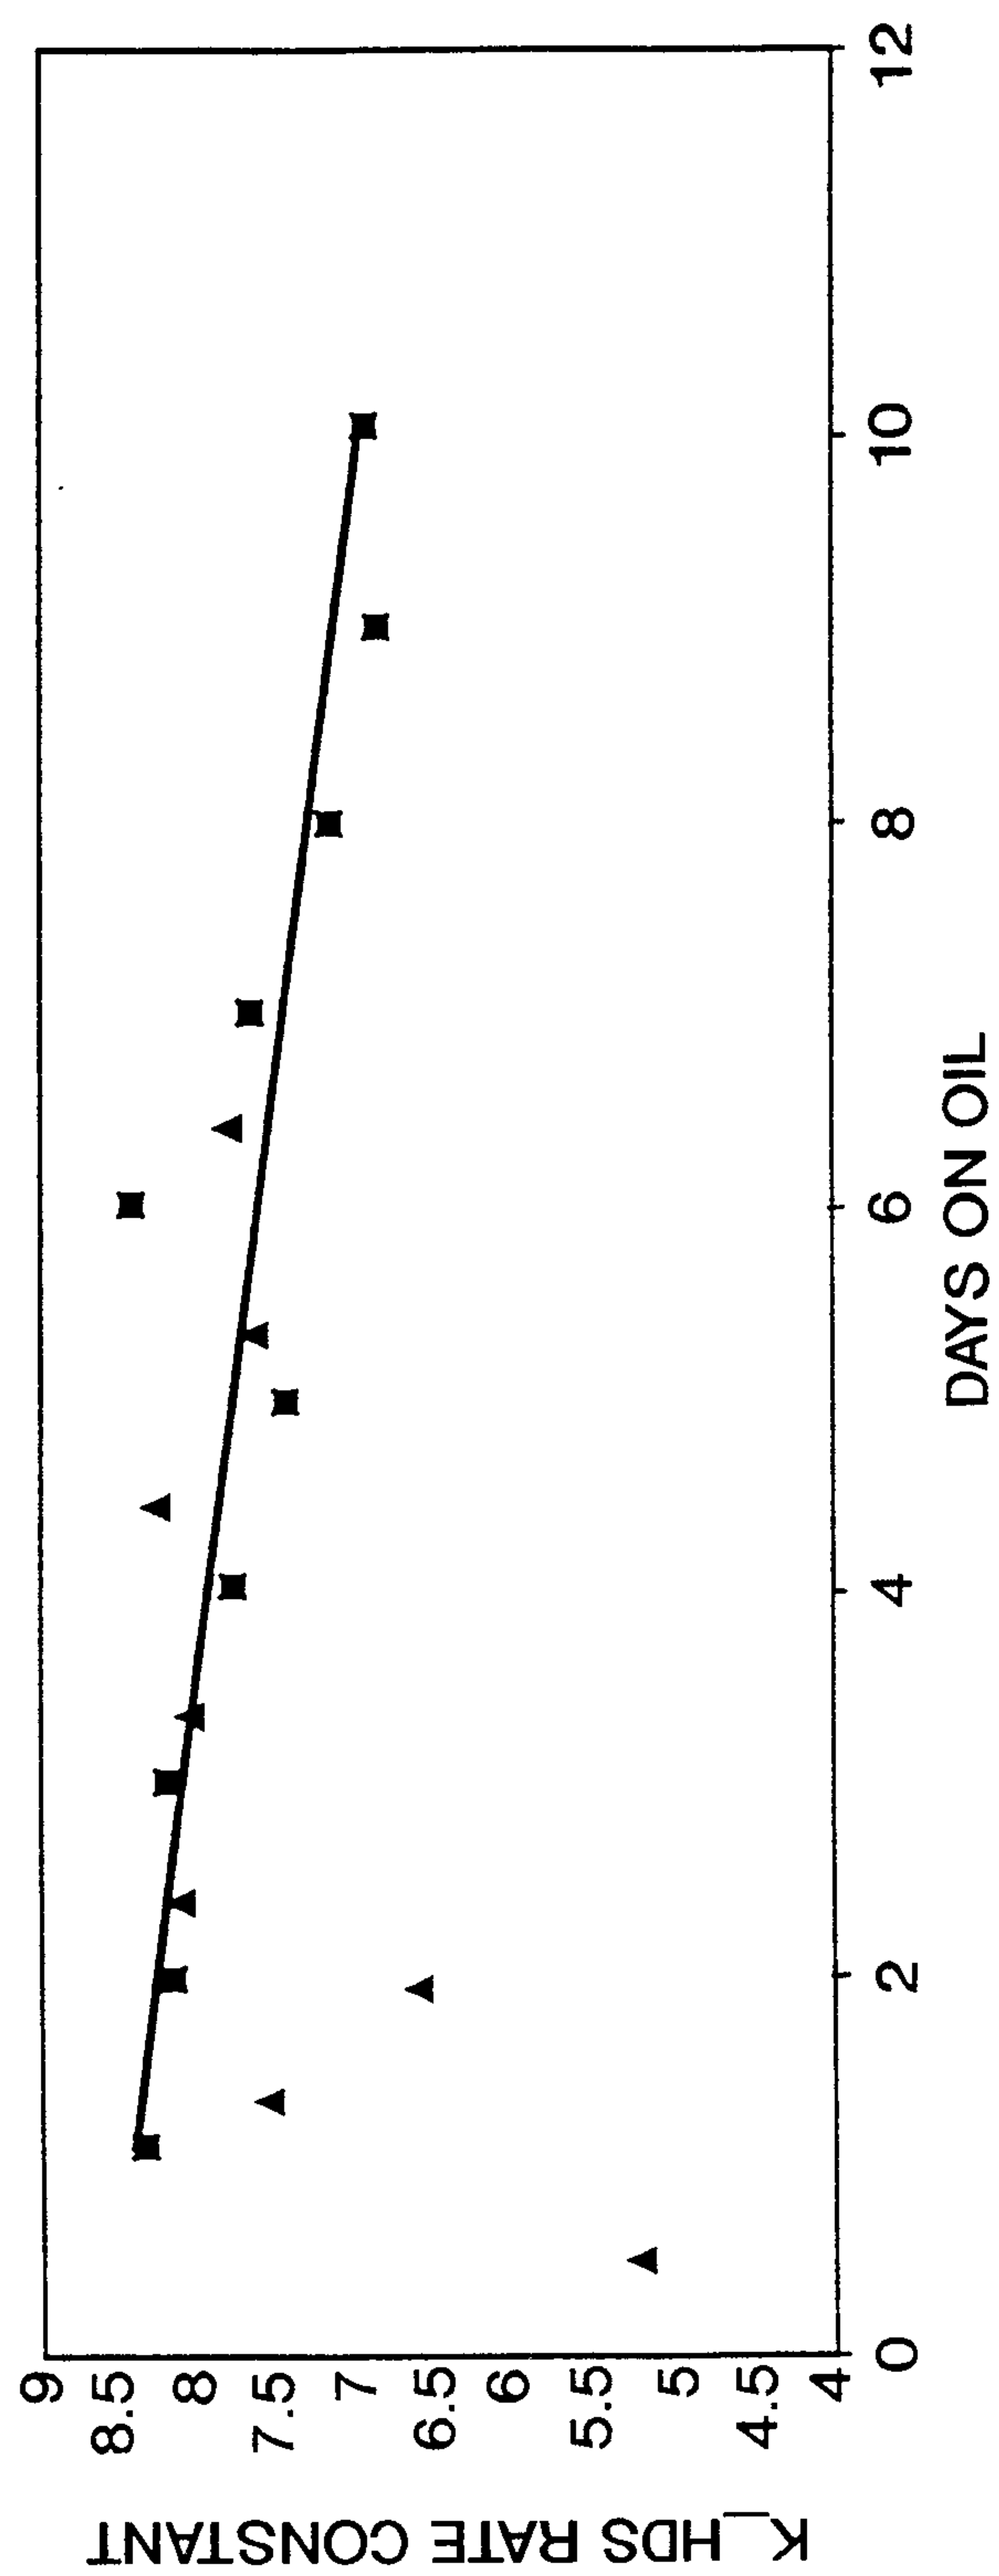

▲ STANDARD ACTIVATION ■ IMPROVED ACTIVATION

2 / 4

FIG. 2

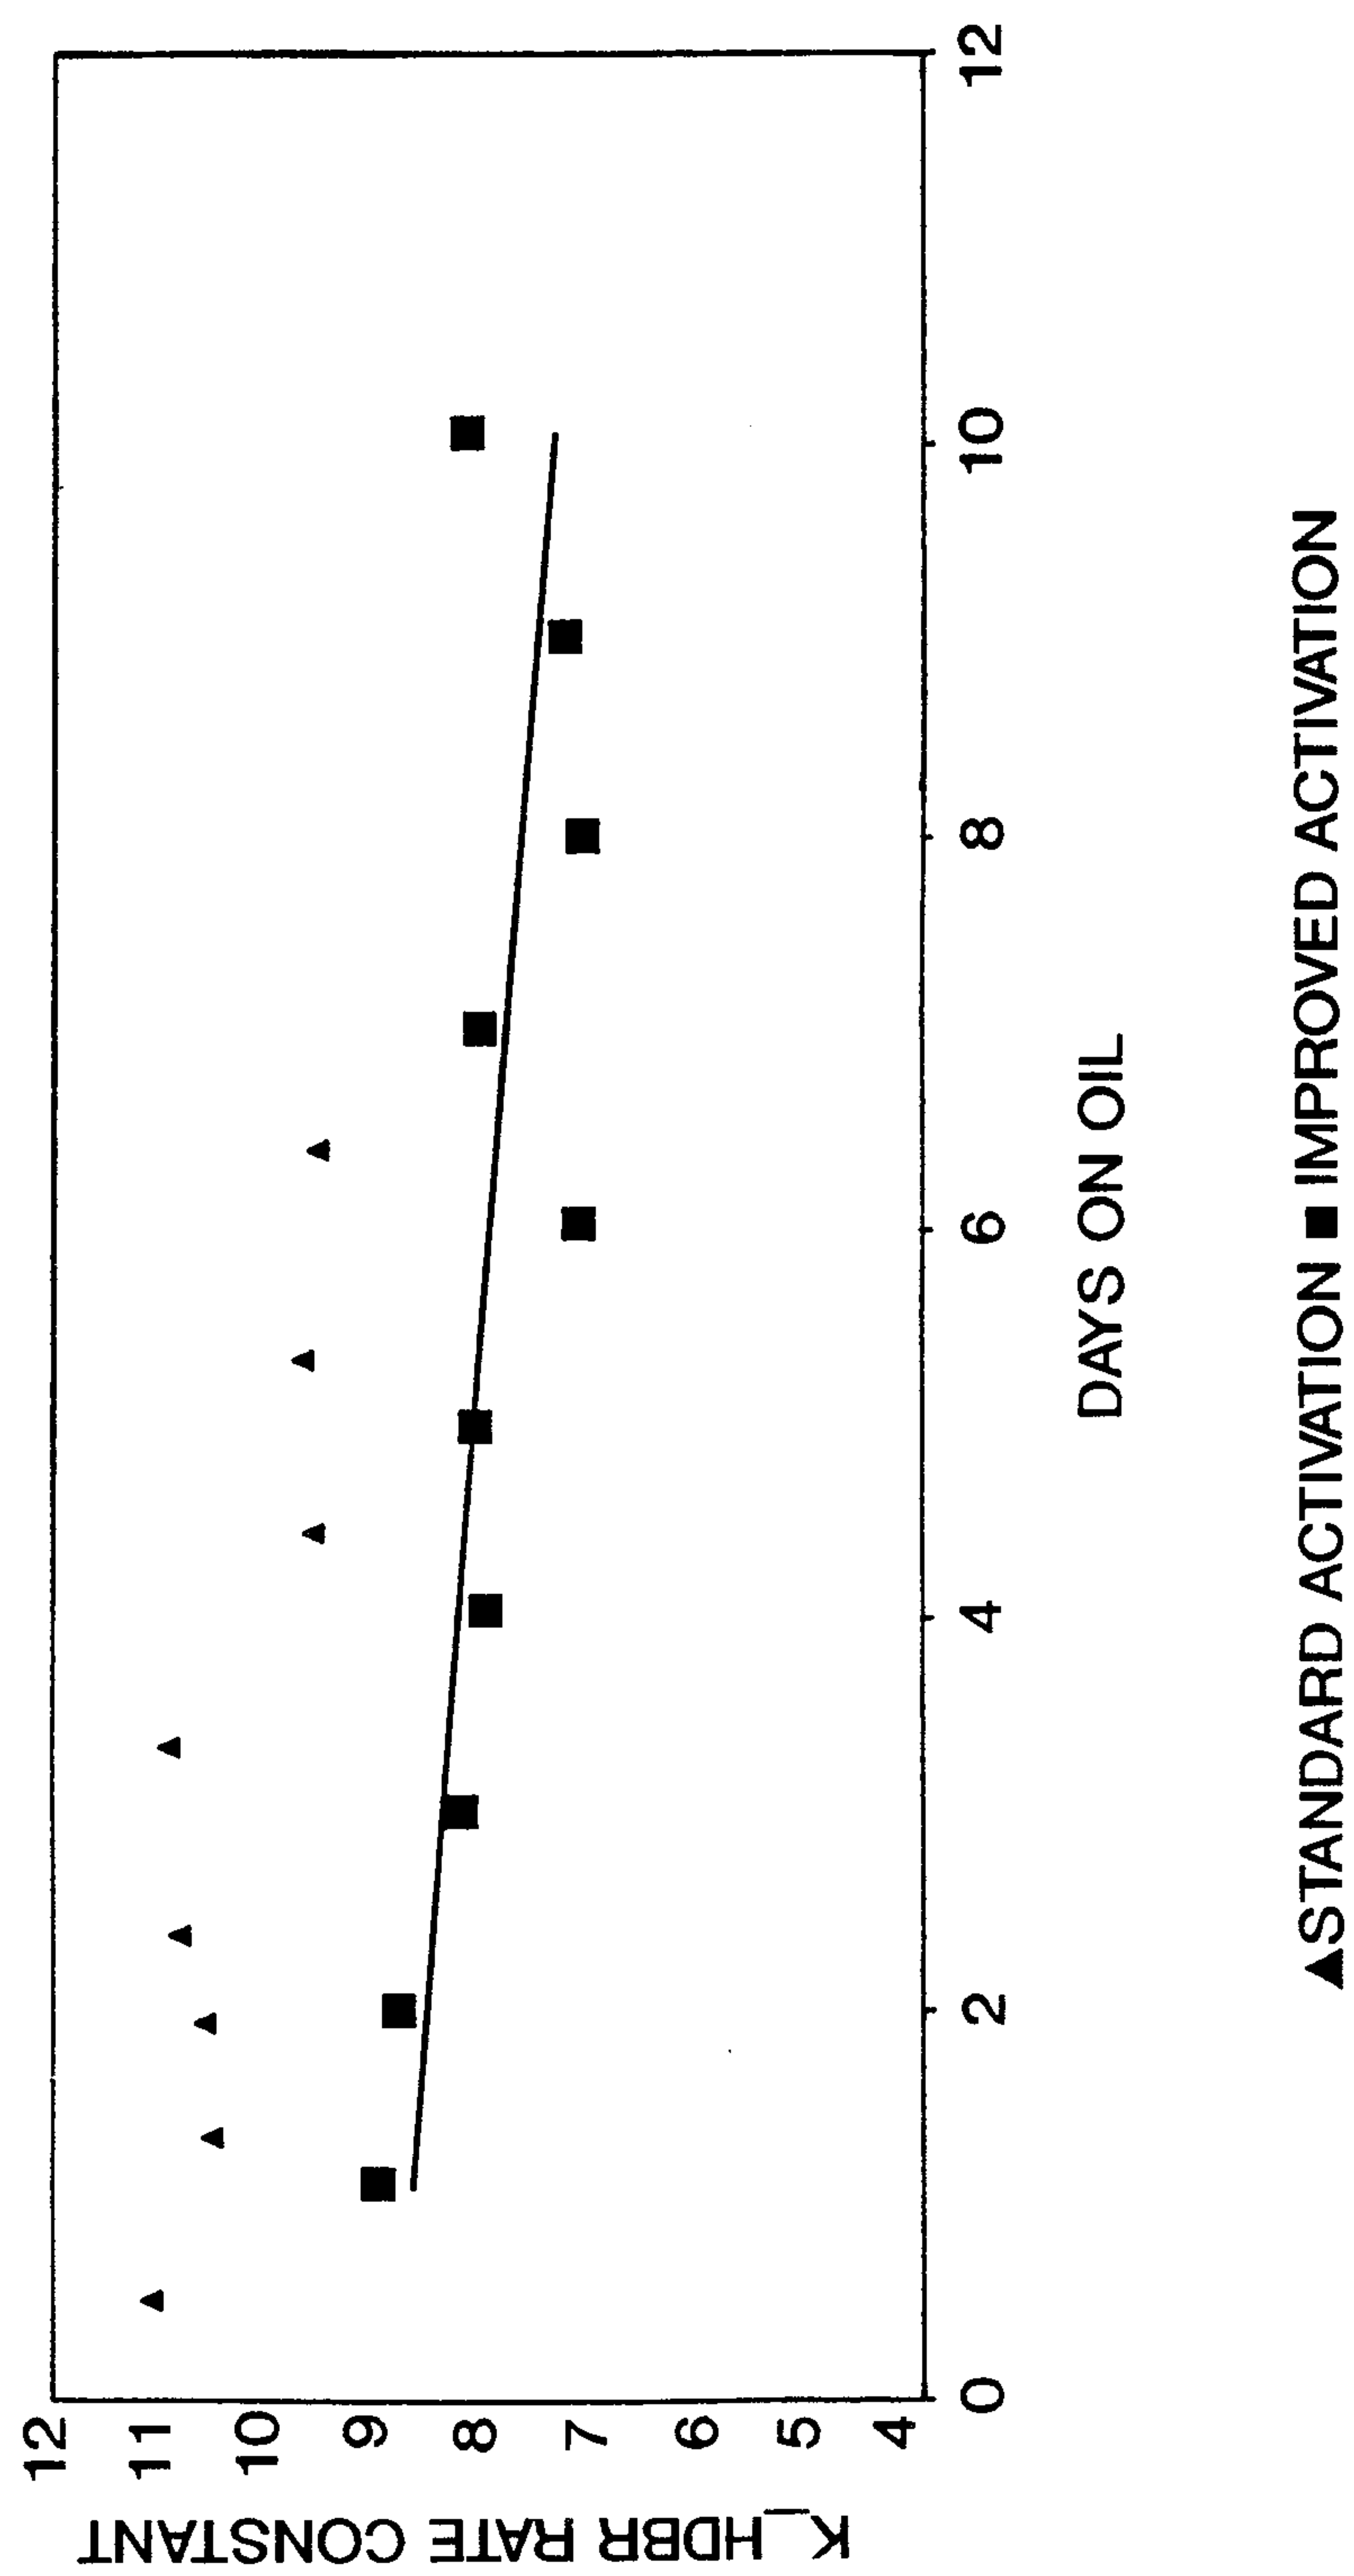

3 / 4

FIG. 3



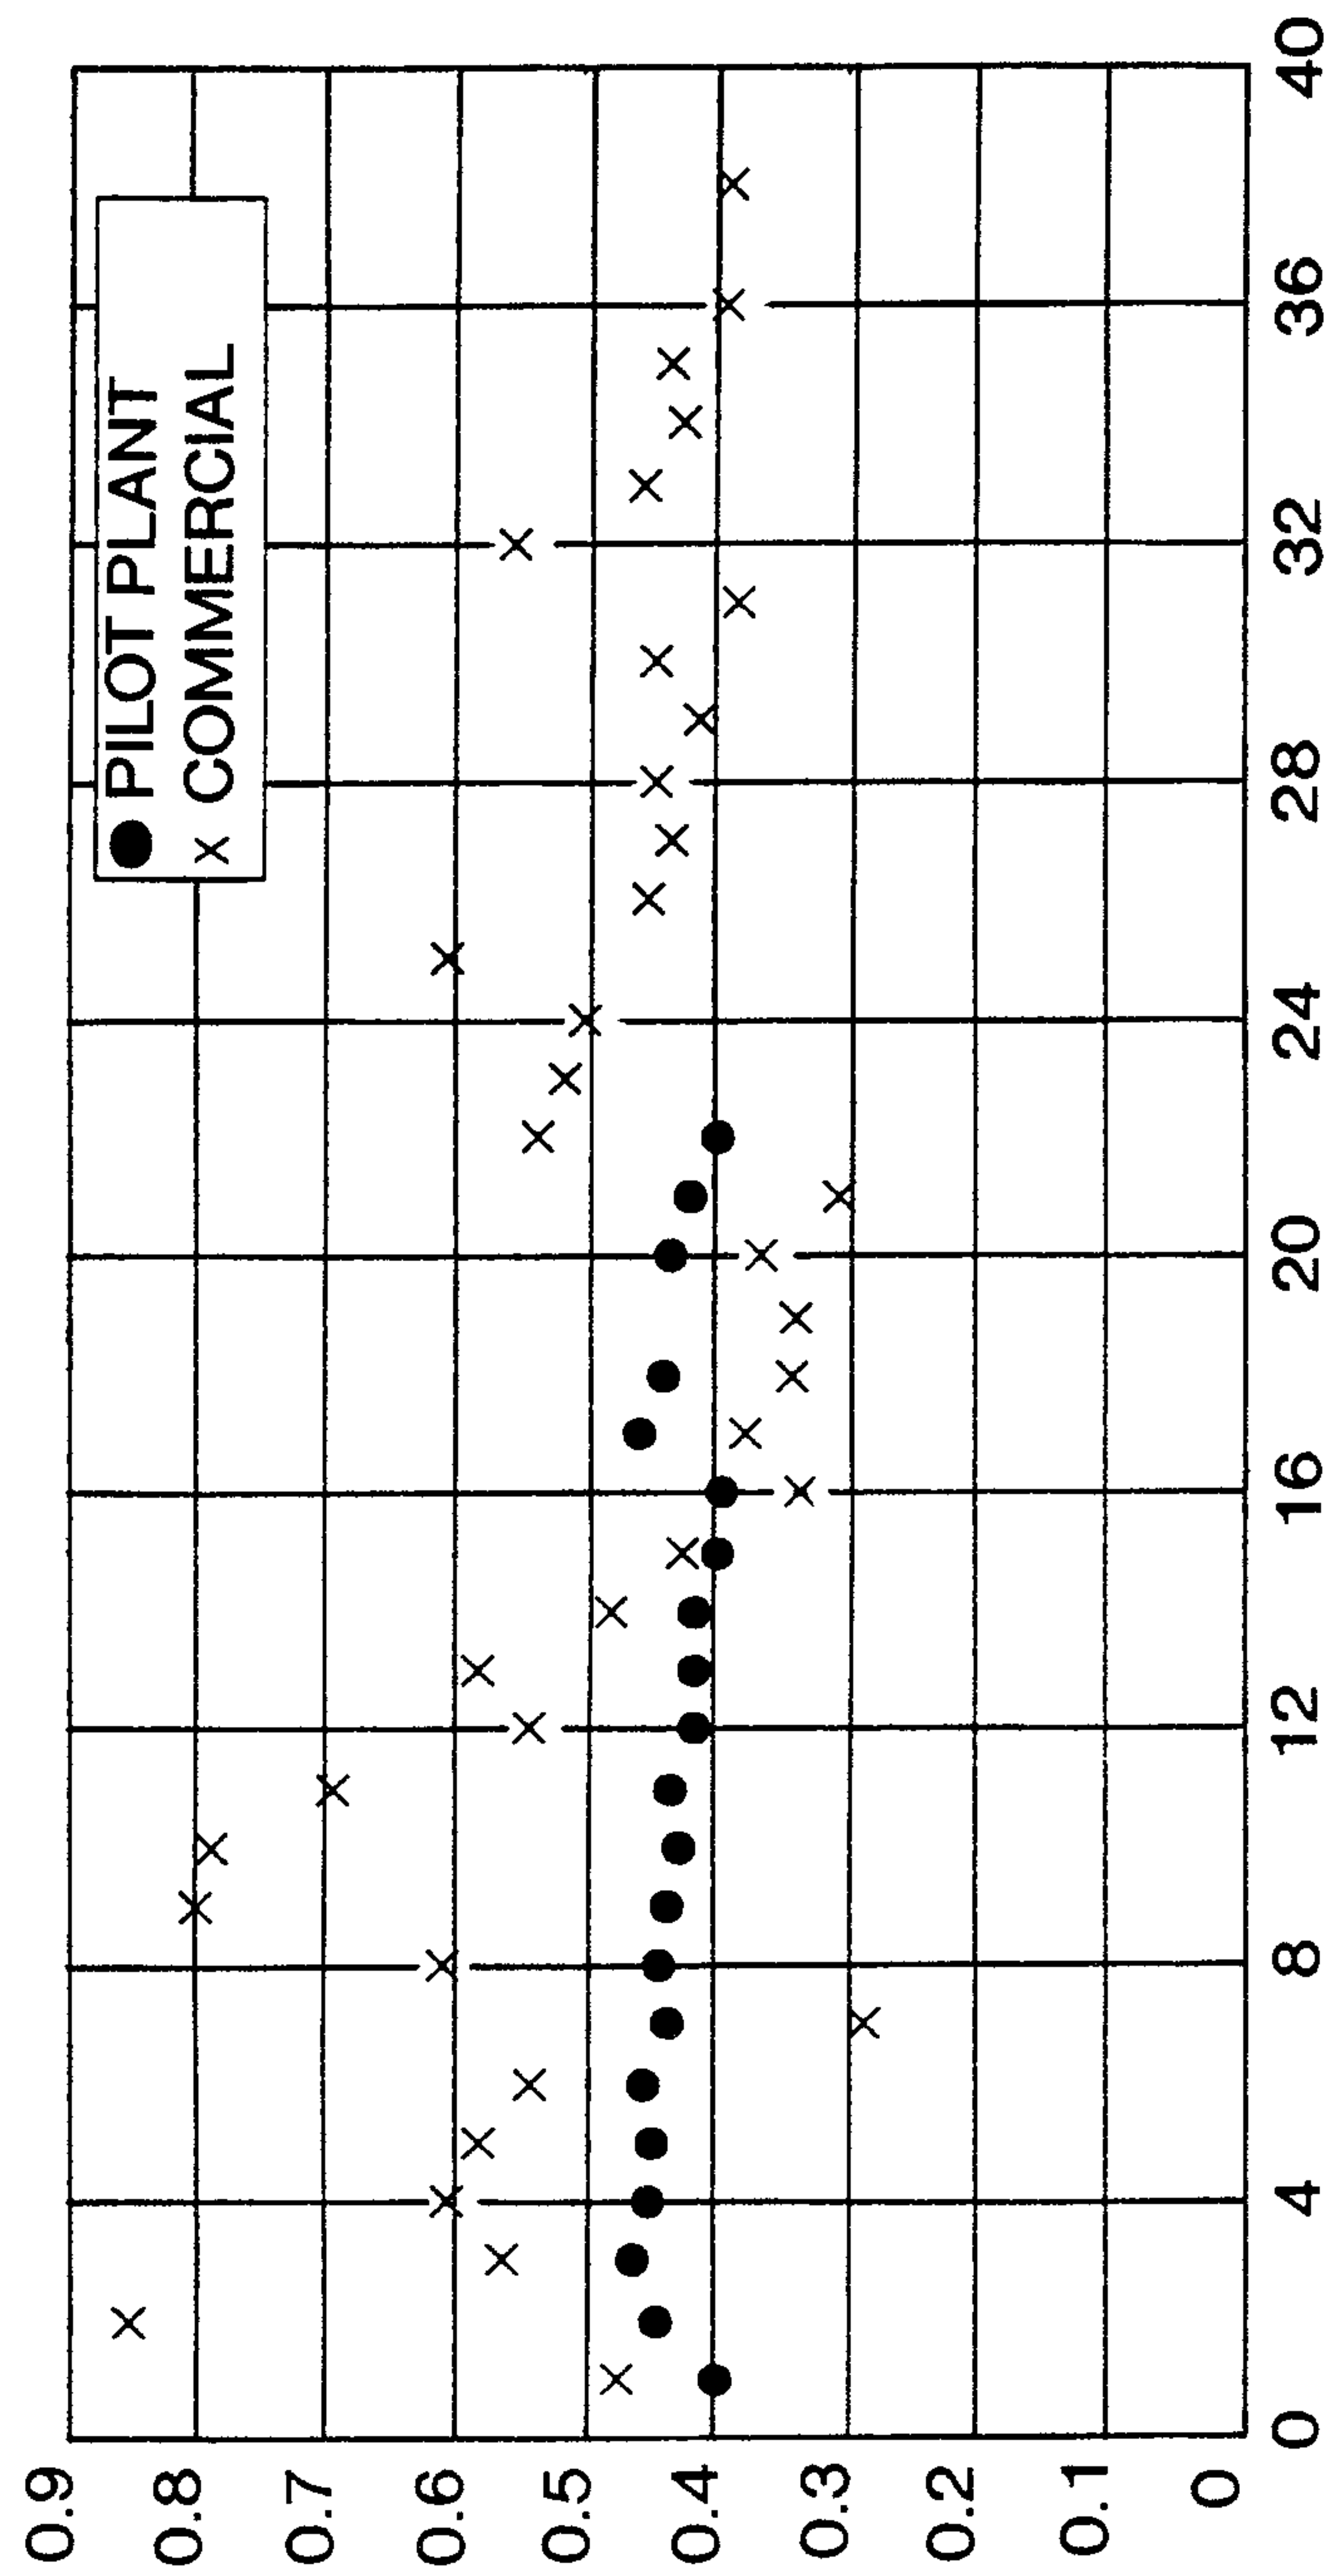


FIG. 4

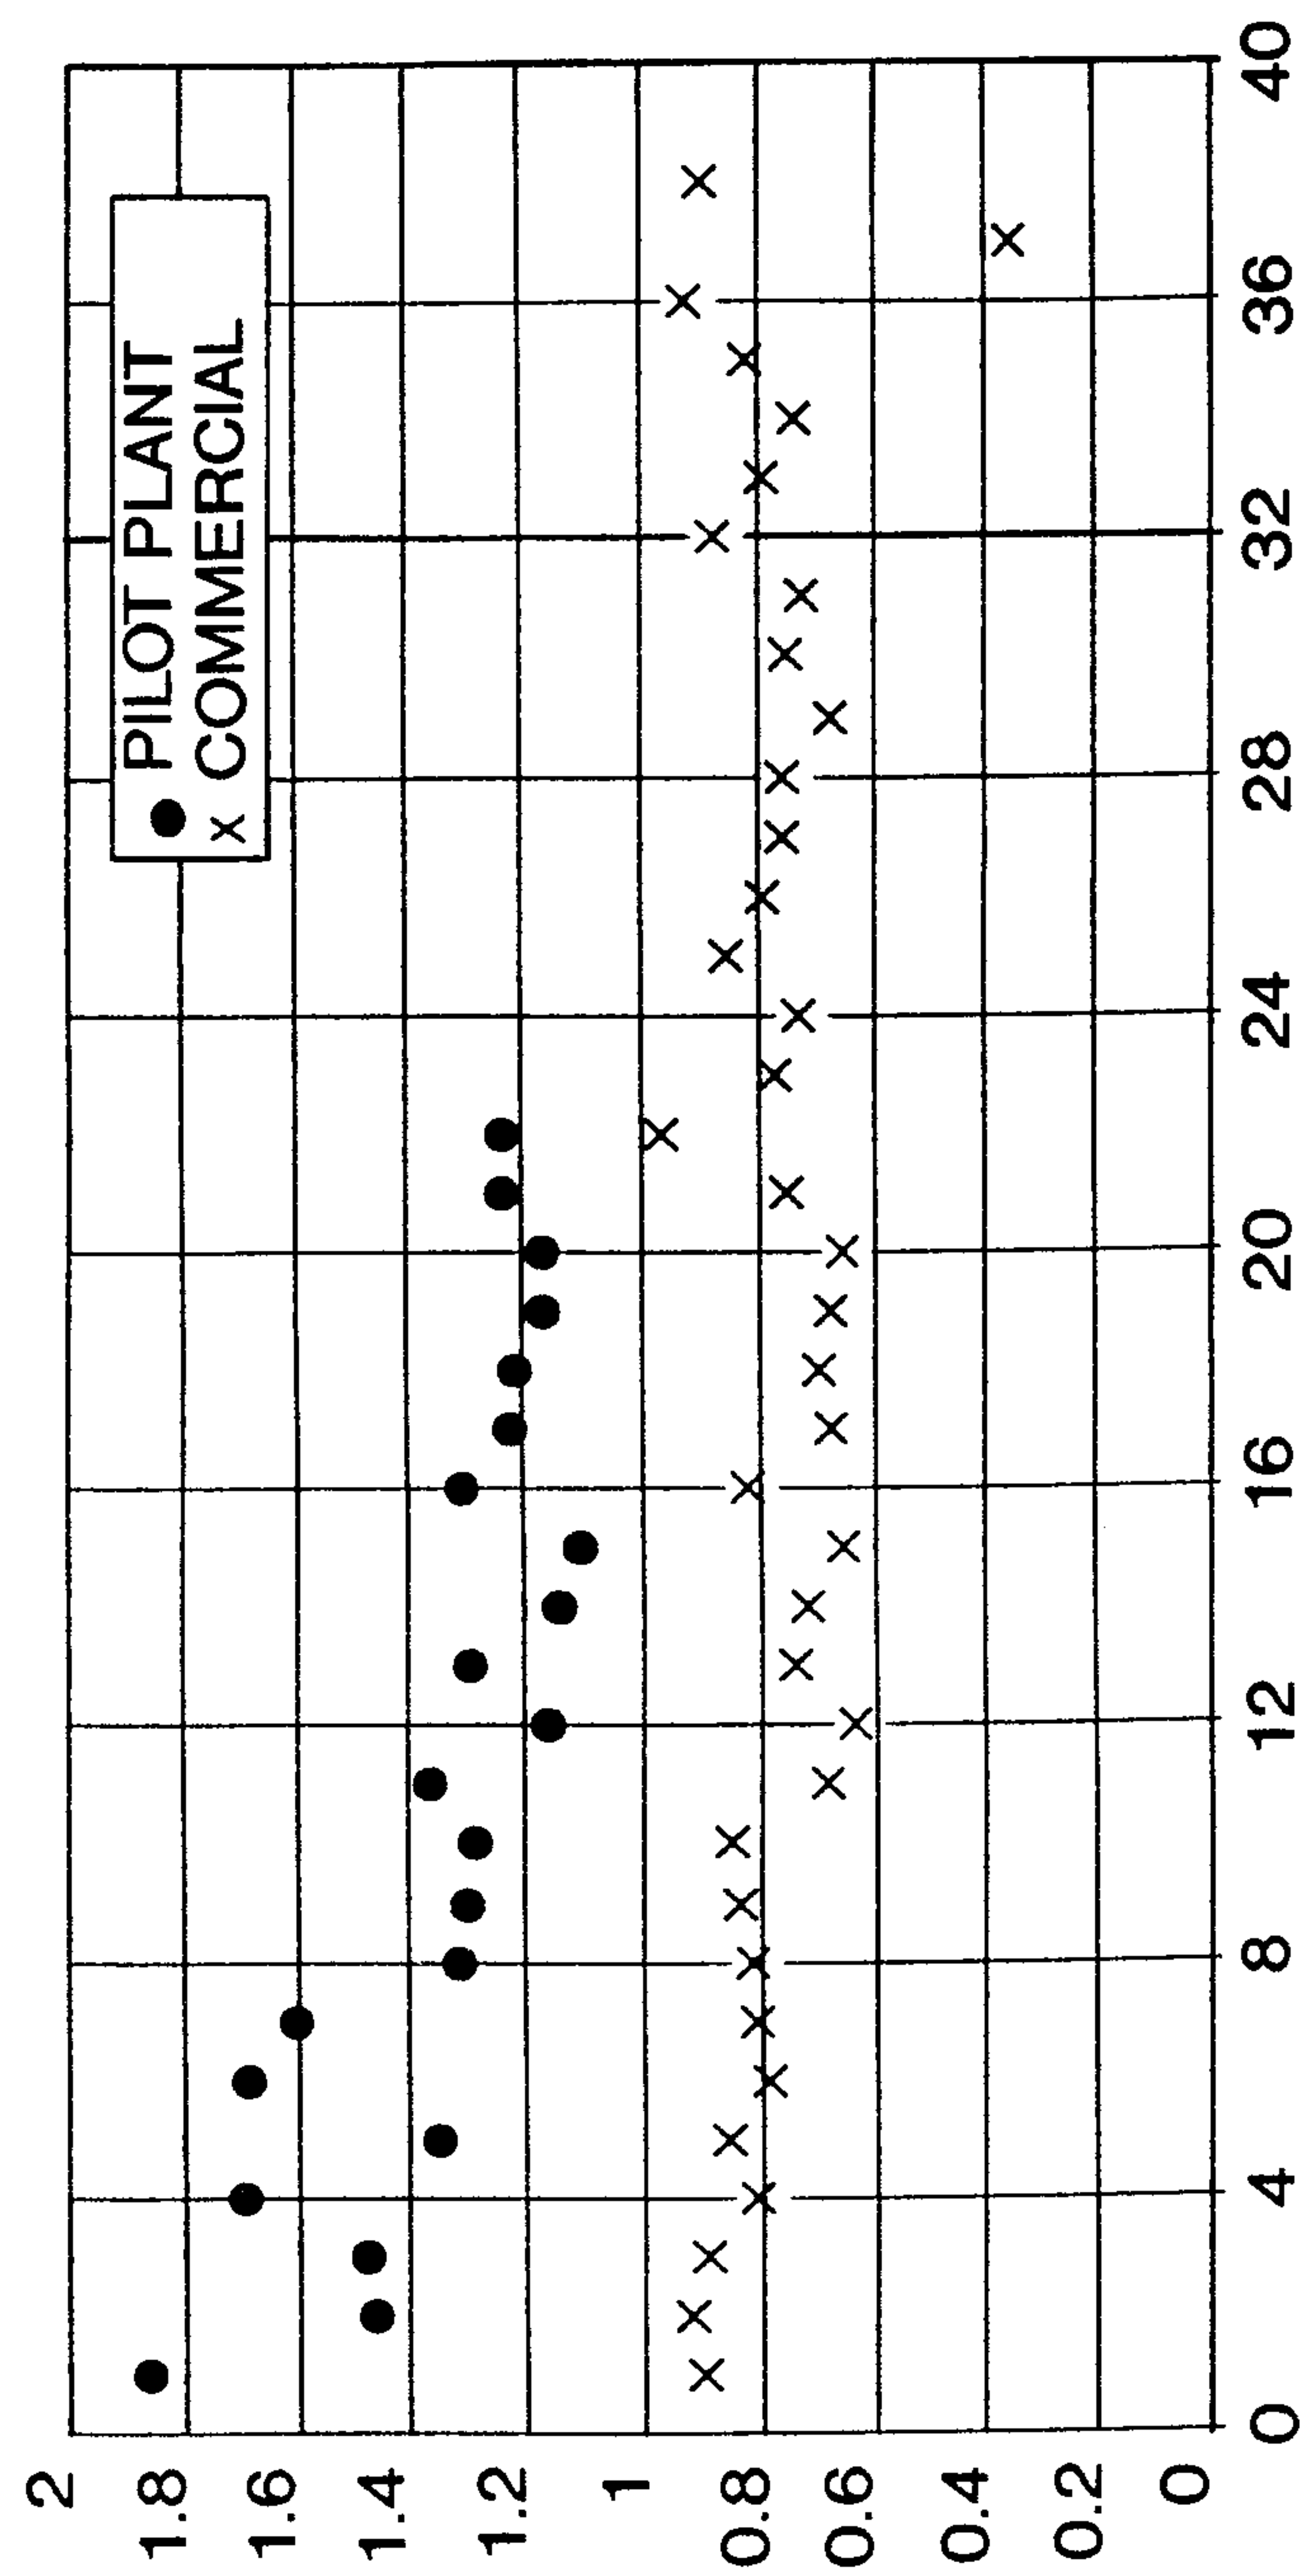

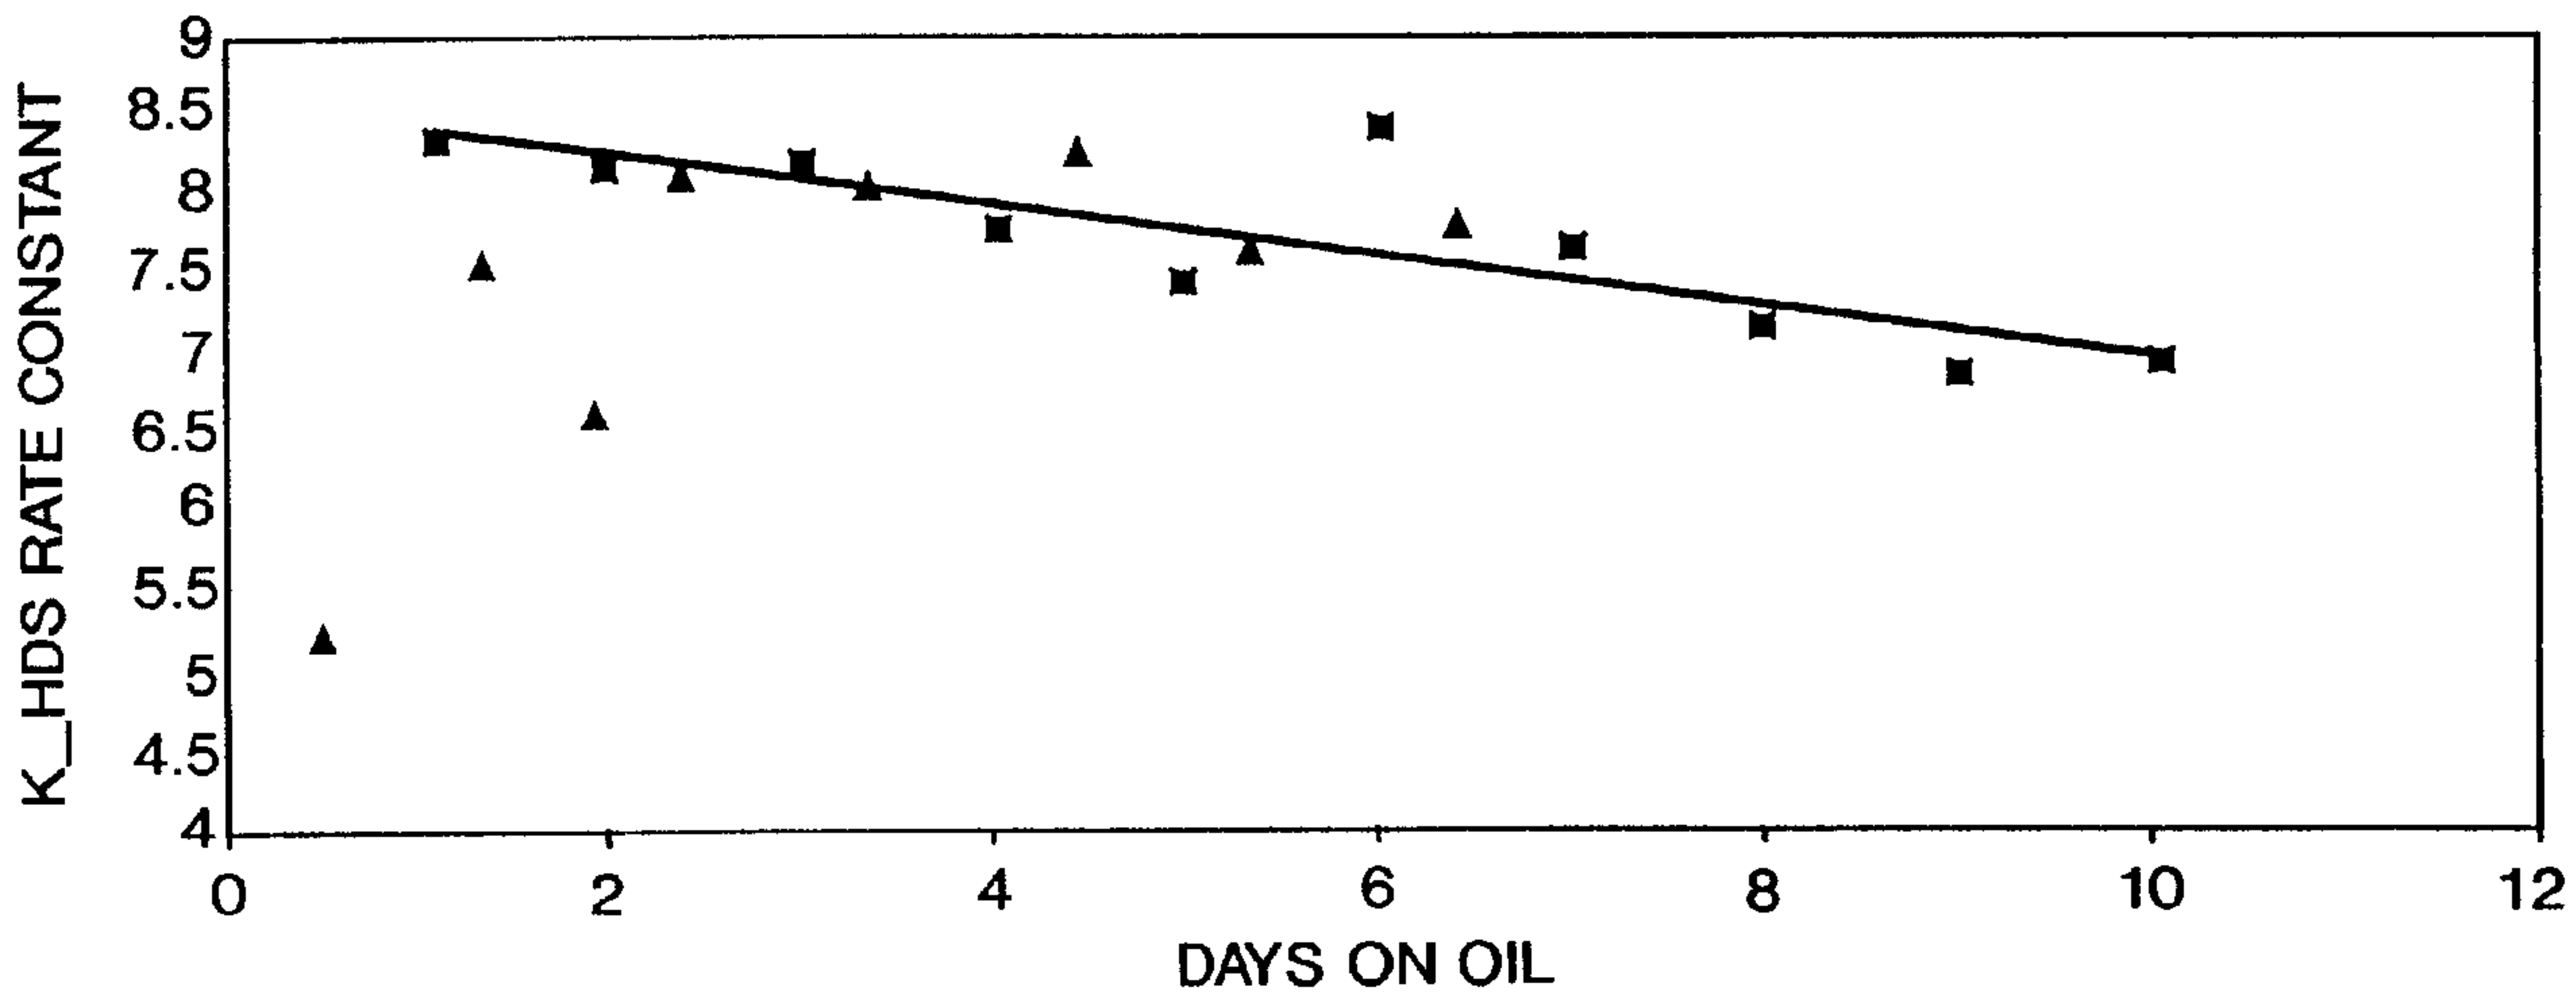

▲ STANDARD ACTIVATION ■ IMPROVED ACTIVATION