



(86) Date de dépôt PCT/PCT Filing Date: 2004/12/07  
(87) Date publication PCT/PCT Publication Date: 2005/06/30  
(85) Entrée phase nationale/National Entry: 2006/06/15  
(86) N° demande PCT/PCT Application No.: EP 2004/013899  
(87) N° publication PCT/PCT Publication No.: 2005/058775  
(30) Priorités/Priorities: 2003/12/17 (DE103 59 536.8);  
2004/09/22 (DE10 2004 045 900.2)

(51) Cl.Int./Int.Cl. *C06B 25/04* (2006.01),  
*C06C 9/00* (2006.01)  
(71) Demandeur/Applicant:  
RUAG AMMOTEC GMBH, DE  
(72) Inventeurs/Inventors:  
HAGEL, RAINER, DE;  
BLEY, ULRICH, DE  
(74) Agent: ROBIC

(54) Titre : AGENTS DE PRE-ALLUMAGE THERMIQUES  
(54) Title: THERMAL PRE-IGNITION AGENTS

(57) Abrégé/Abstract:

The invention relates to thermal pre-ignition agents and to their use as thermal fuses, in particular for use in gas generators of motor-vehicle safety systems.



(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES  
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG(19) Weltorganisation für geistiges Eigentum  
Internationales Büro(43) Internationales Veröffentlichungsdatum  
30. Juni 2005 (30.06.2005)

PCT

(10) Internationale Veröffentlichungsnummer  
WO 2005/058775 A1(51) Internationale Patentklassifikation<sup>7</sup>: C06B 25/04,  
C06C 9/00

(21) Internationales Aktenzeichen: PCT/EP2004/013899

(22) Internationales Anmeldedatum:  
7. Dezember 2004 (07.12.2004)

(25) Einreichungssprache: Deutsch

(26) Veröffentlichungssprache: Deutsch

(30) Angaben zur Priorität:  
103 59 536.8 17. Dezember 2003 (17.12.2003) DE  
10 2004 045 900.2  
22. September 2004 (22.09.2004) DE(71) Anmelder (für alle Bestimmungsstaaten mit Ausnahme von  
US): RUAG AMMOTEC GMBH [DE/DE]; Kronacher  
Strasse 63, 90765 Fürth (DE).

(72) Erfinder; und

(75) Erfinder/Anmelder (nur für US): HAGEL, Rainer  
[DE/DE]; Schorlachstrasse 23, 91058 Erlangen (DE).  
BLEY, Ulrich [DE/DE]; Büsumerstrasse 8, 90766 Fürth  
(DE).(74) Anwalt: UPPENA, Franz; Patente, Marken & Lizenzen,  
c/o Chemetall GmbH, Trakehner Str. 3, 60487 Frank-  
furt/Main (DE).(81) Bestimmungsstaaten (soweit nicht anders angegeben, für  
jede verfügbare nationale Schutzrechtsart): AE, AG, AL,  
AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH,  
CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES,  
FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.(84) Bestimmungsstaaten (soweit nicht anders angegeben, für  
jede verfügbare regionale Schutzrechtsart): ARIPO (BW,  
GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,  
ZM, ZW), eurasisches (AM, AZ, BY, KG, KZ, MD, RU,  
TJ, TM), europäisches (AT, BE, BG, CH, CY, CZ, DE, DK,  
EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL,  
PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI,  
CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


## Veröffentlicht:

- mit internationalem Recherchenbericht
- vor Ablauf der für Änderungen der Ansprüche geltenden  
Frist; Veröffentlichung wird wiederholt, falls Änderungen  
eintreffen

Zur Erklärung der Zweibuchstaben-Codes und der anderen Ab-  
kürzungen wird auf die Erklärungen ("Guidance Notes on Co-  
des and Abbreviations") am Anfang jeder regulären Ausgabe der  
PCT-Gazette verwiesen.

(54) Title: THERMAL PRE-IGNITION AGENTS

(54) Bezeichnung: THERMISCHE FRÜHZÜNDMITTEL

(57) Abstract: The invention relates to thermal pre-ignition agents and to their use as thermal fuses, in particular for use in gas  
generators of motor-vehicle safety systems.(57) Zusammenfassung: Die Erfindung betrifft thermische Frühzündmittel und deren Verwendung als thermische Sicherung, ins-  
besondere für den Einsatz in Gasgeneratoren für Kraftfahrzeugsicherheitssysteme.

WO 2005/058775 A1

### Thermal pre-ignition agents

The present invention provides pre-ignition agents which can be used, for example, as thermal fuses in gas generators for motor vehicle safety systems.


- 5 Thermal pre-ignition agents are pyrotechnic substances or mixtures. They have the function, *inter alia*, of igniting the gas-producing mixtures of the gas generator, which generally have very high thermal stability, in a controlled manner in the event of a vehicle fire.
- 10 There are used as thermal pre-ignition agents, for example, nitrocellulose, propellant-charge powders derived therefrom, or the mixtures based on nitrotriazolone and guanidine nitrate described in patent application DE 197 30 873 A1. These mixtures have
- 15 ignition temperatures of approximately 160°C and, in the case of nitrocellulose, have only inadequate long-term stability.

The object of the present invention was to provide pyrotechnic mixtures having ignition temperatures of

20 about 200°C and adequate long-term stability, which mixtures can be used as thermal pre-ignition agents for gas generators in motor vehicle safety systems. The object underlying the invention has been achieved by the use of 2-[bis-(2,4,6-trinitrophenyl)]aminoethyl nitrate,

25 abbreviated to dipicrylaminoethyl nitrate (DPN). This substance can be used either on its own or in mixtures with further components. DPN can be prepared from 2,4-dinitrochlorobenzene and ethanolamine with subsequent nitration (lit.: R.V. Clark, Ind. Eng. Chem., 25, 1385

30 (1933)). The structural formula is as follows:

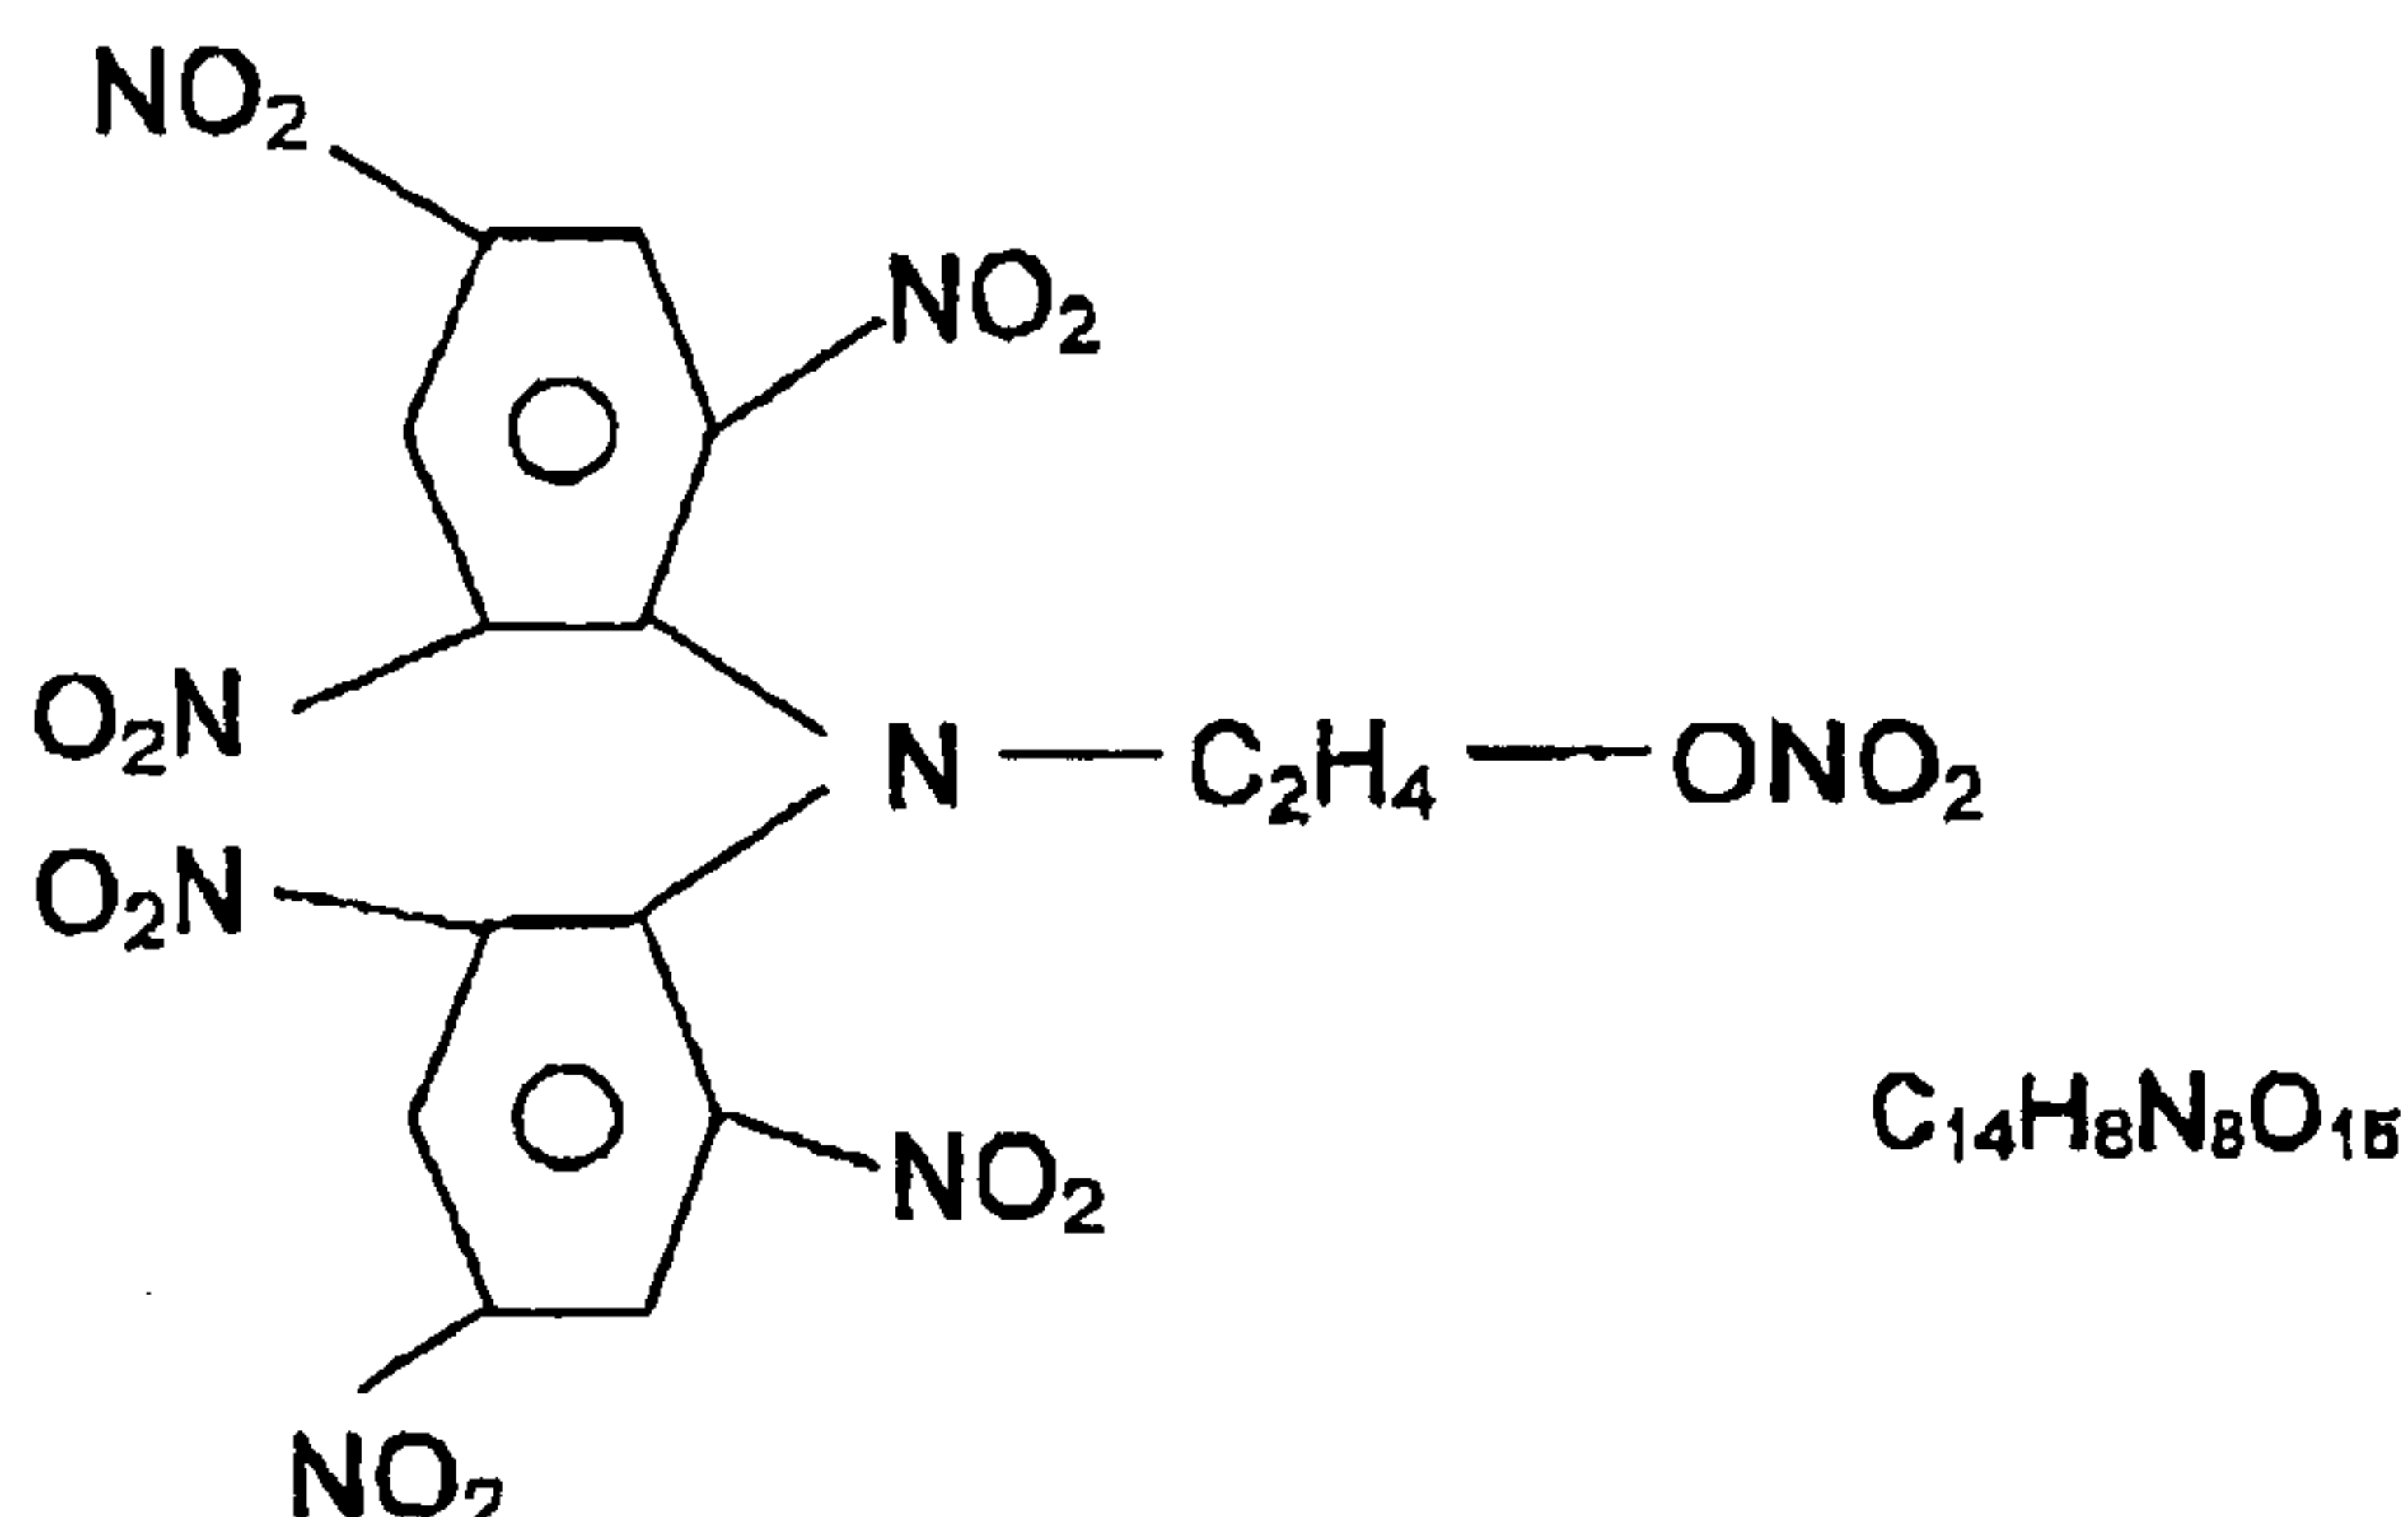

The deflagration point of pure DPN is at about 200°C. Surprisingly, it has been found that, in mixtures of DPN with selected components as additives, the deflagration point can be controlled in the range from 178°C to 208°C, and the deflagration temperatures of the mixtures may be lower than those of the individual components. For pre-ignition agents, deflagration temperatures below 200°C are of particular interest. The mixtures according to the invention meet this demand, while having excellent long-term stability.

There can be used as additives:

**1. Nitrogen-containing compounds** (on their own or in mixtures)

nitroguanidine, nitroaminoguanidine, nitrotriazolone, derivatives of tetrazole, such as 5-aminotetrazole, ditetrazolylamine, ditetrazole and salts thereof, nitraminotetrazole and its salts, such as ammonium nitraminotetrazole and aminoguanidinium nitraminotetrazole, aminoguanidine nitrate, diaminoguanidine nitrate, triaminoguanidine nitrate, guanidine nitrate, dicyandiamidine nitrate, diaminoguanidine azotetrazolate.

**2. Oxidising agents** (on their own or in mixtures)

nitrates of the alkali or alkaline earth metals or of ammonium such as sodium nitrate or potassium nitrate,

perchlorates of the alkali or alkaline earth metals or of ammonium, peroxides of the alkaline earth metals or of zinc.

**3. Reducing agents** (on their own or in mixtures)

5 aluminium, titanium, titanium hydride, boron, boron hydride, zirconium, zirconium hydride, silicon, graphite, activated carbon, carbon black.

**4. Binders** (on their own or in mixtures)

10 cellulose and derivatives thereof, polyvinylbutyrals, polynitropolyphenylene, polynitrophenyl ether, Plexigum, polyvinyl acetate and copolymers.

**5. High-energy additives** (on their own or in mixtures)

hexogen, octogen and nitrocellulose.

**6. Combustion moderators and processing aids** (on their  
15 own or in mixtures)

ferrocene and derivatives, acetylacetates, salicylates, silicates, silica gels, boron nitride.

20 Production and processing are carried out according to known and conventional processes. These include, for example, kneading, extrusion, extrusion moulding, pelleting or granulation.

The Examples which follow are intended to illustrate the invention in greater detail without limiting it.

25 Table 1 shows the compositions of twelve different mixtures. The components were weighed in the indicated weight ratios (amounts are in percent by weight (wt.%) into plastics beakers and homogenised for 30 minutes in a tumbler mixer.

Table 1: Examples

Mixture	DPN in wt. %	Nitroguanidine in wt. %	5-Amino- tetrazole in wt. %	Guanidine nitrate in wt. %	Potassium nitrate in wt. %	Sodium nitrate in wt. %	Potassium perchlorate in wt. %
1	50				50		
2	50					50	
3	50						50
4	20	30			50		
5	20	30				50	
6	20	30					50
7	20		30		50		
8	20		30			50	
9	20		30				50
10	20			30	50		
11	20			30		50	
12	20			30			50

Table 2 shows the heat of explosion of the mixtures and their friction and impact sensitivity. The friction and impact sensitivity was measured according to methods of the Bundesanstalt für Materialforschung [Federal Institute of Materials Research] (BAM), while the heat of explosion was measured using a calorimeter from EKA.

Table 2: Overview of the heat of explosion and friction and impact sensitivity

Mixture	Heat of explosion in J/g	Friction sensitivity in N	Impact sensitivity in J
1	4859	240	6
2	3280	240	7.5
3	5915	120	5
4	5157	360	7.5
5	3125	120	>30
6	5523	80	10
7	4014	240	6
8	3187	360	15
9	5056	80	6
10	4509	360	7.5
11	3484	360	10
12	5115	160	10

Table 3 summarises the deflagration points before and after exposure to heat (400 h, 110°C) and the weight losses after exposure to heat for 72 hours and 400 hours at 110°C. The deflagration points were determined by thermogravimetric analysis (Mettler) at a rate of heating of 10°C per minute. The weight loss was measured analogously to the Holland test.

After 400 hours, only slight weight losses of from 0.2 to 0.5 wt.% are found, and there is no significant change in the deflagration temperature after exposure to heat.

Table 3: Overview of weight losses and deflagration temperatures

Mixture	Weight loss 72 h 110°C in wt.%	Weight loss 400 h 110°C in wt.%	Deflagration temperature in °C	Deflagration temperature after 400 h, 110°C in °C
1	0.11	0.27	203	202
2	0.15	0.35	203	203
3	0.12	0.29	201	201
4	0.11	0.49	207	206
5	0.16	0.53	196	194
6	0.11	0.49	201	202
7	0.10	0.44	196	200
8	0.11	0.42	178	184
9	0.11	0.42	196	198
10	0.09	0.18	205	205
11	0.12	0.26	206	208
12	0.11	0.31	205	205

The Examples show that the mixtures defined according to the invention have deflagration temperatures in the range from 178 to 208°C and are to be regarded as stable according to the requirements of the automotive industry.

The present invention specifically provides:

Thermal pre-ignition agents which contain as a component dipicrylaminoethyl nitrate (DPN) in amounts by weight of from 10 to 100 %.

Thermal pre-ignition agents which, in addition to DPN, contain nitrogen-containing compounds, on their own or in mixtures, in amounts by weight of from 0 to 90 %, such as, for example, nitroguanidine, nitroaminoguanidine, nitrotriazolone, derivatives of tetrazole, such as 5-aminotetrazole, ditetrazolylamine, ditetrazole and salts thereof, nitraminotetrazole and its salts, such as ammonium nitraminotetrazole and aminoguanidinium nitraminotetrazole, aminoguanidine nitrate, diaminoguanidine nitrate, triaminoguanidine nitrate, guanidine nitrate, dicyandiamidine nitrate, diaminoguanidine azotetrazolate.

Thermal pre-ignition agents which, in addition to DPN and the above-mentioned nitrogen-containing compounds, on their own or in mixtures, contain oxidising agents, on their own or in mixtures, in amounts by weight of from 10 to 90 %, such as, for example, nitrates of the alkali or alkaline earth metals or of ammonium, such as sodium nitrate or potassium nitrate, perchlorates of the alkali or alkaline earth metals or of ammonium, peroxides of the alkaline earth metals or of zinc.

Thermal pre-ignition agents which, in addition to DPN, the above-mentioned nitrogen-containing compounds, on their own or in mixtures, and/or the above-mentioned oxidising agents, on their own or in mixtures, contain reducing agents, on their own or in mixtures, in amounts by weight of from 1 to 80 %, such as, for example, aluminium, titanium, titanium hydride, boron, boron hydride, zirconium, zirconium hydride, silicon, graphite, activated carbon, carbon black.

Thermal pre-ignition agents which, in addition to DPN, the above-mentioned nitrogen-containing compounds, on their own or in mixtures, the above-mentioned oxidising agents, on their own or in mixtures, and/or the above-mentioned reducing agents, on their own or in mixtures, contain binders, on their own or in mixtures, in amounts by weight of from 1 to 80 %, such as, for example,

cellulose and derivatives thereof, polyvinylbutyrals, polynitropolyphenylene, polynitrophenyl ether, Plexigum, polyvinyl acetate and copolymers.

5 Thermal pre-ignition agents which, in addition to DPN, the above-mentioned nitrogen-containing compounds, on their own or in mixtures, the above-mentioned oxidising agents, on their own or in mixtures, the above-mentioned reducing agents, on their own or in mixtures, and/or the above-mentioned binders, on their own or in mixtures,  
10 contain high-energy additives, on their own or in mixtures, in amounts by weight of from 10 to 80 %, such as, for example, hexogen, octogen and nitrocellulose.

15 Thermal pre-ignition agents which, in addition to DPN, the above-mentioned nitrogen-containing compounds, on their own or in mixtures, the above-mentioned oxidising agents, on their own or in mixtures, the above-mentioned reducing agents, on their own or in mixtures, the above-mentioned binders, on their own or in mixtures, and/or the above-mentioned high-energy additives, on their own  
20 or in mixtures, contain combustion moderators and processing aids, on their own or in mixtures, in amounts by weight of from 0.1 to 20 %, such as, for example, ferrocene and derivatives, acetylacetates, salicylates, silicates, silica gels, boron nitride.

25

**Patent Claims**

1. Thermal pre-ignition agents containing from 10 to 90 wt.%, preferably from 25 to 75 wt.%, particularly preferably from 40 to 60 wt.%, dipicrylaminoethyl nitrate and from 10 to 90 wt.%, preferably from 25 to 75 wt.%, particularly preferably from 40 to 60 wt.%, of an oxidising agent.
2. Thermal pre-ignition agents containing from 10 to 90 wt.%, preferably from 10 to 50 wt.%, particularly preferably from 10 to 30 wt.%, dipicrylaminoethyl nitrate, from 10 to 90 wt.%, preferably from 10 to 60 wt.%, particularly preferably from 20 to 40 wt.%, of a nitrogen-containing compound and from 10 to 90 wt.%, preferably from 25 to 75 wt.%, particularly preferably from 40 to 60 wt.%, of an oxidising agent.
3. Thermal pre-ignition agents according to claim 1 or 2, characterised in that the oxidising agent is selected from one or more of the nitrates of the alkali and/or alkaline earth metals and/or of ammonium, of the perchlorates of the alkali and/or alkaline earth metals and/or of ammonium, of the peroxides of the alkaline earth metals and/or of zinc.
4. Thermal pre-ignition agents according to claim 2 to 3, characterised in that the nitrogen-containing compound is selected from one or more of nitroguanidine, nitroaminoguanidine, nitrotriazolone, derivatives of tetrazole and/or salts thereof, nitraminotetrazole and/or its salts, aminoguanidine nitrate, diaminoguanidine nitrate, triaminoguanidine nitrate, guanidine nitrate, dicyandiamidine nitrate, diaminoguanidine azotetrazolate.
5. Thermal pre-ignition agents according to one or more of claims 1 to 4, characterised in that they contain from 1 to 80 wt.%, preferably from 1 to 40 wt.%,

- particularly preferably from 1 to 15 wt.%, of a reducing agent, preferably selected from one or more of aluminium, titanium, titanium hydride, boron, boron hydride, zirconium, zirconium hydride, silicon, graphite, activated carbon, carbon black.
- 5
6. Thermal pre-ignition agents according to one or more of claims 1 to 5, characterised in that they contain from 1 to 80 wt.%, preferably from 1 to 40 wt.%, particularly preferably from 1 to 20 wt.%, of a binder, preferably selected from one or more of cellulose and derivatives thereof, polyvinylbutyrals, polynitropolyphenylene, polynitrophenyl ether, Plexigum, polyvinyl acetate and copolymers.
- 10
7. Thermal pre-ignition agents according to one or more of claims 1 to 6, characterised in that they contain from 10 to 80 wt.%, preferably from 10 to 50 wt.%, particularly preferably from 10 to 30 wt.%, high-energy additives, preferably selected from one or more of hexogen, octogen and nitrocellulose.
- 15
8. Thermal pre-ignition agents according to one or more of claims 1 to 7, characterised in that they contain from 0.1 to 20 wt.%, preferably from 0.1 to 10 wt.%, combustion moderators and processing aids, preferably selected from one or more of ferrocene and derivatives thereof, acetylacetates, salicylates, silicates, silica gels and boron nitride.
- 20
- 25
9. Use of a thermal pre-ignition agent according to one or more of claims 1 to 8 as a thermal fuse in gas generators for motor vehicle safety systems.