



(51) International Patent Classification:

H01L 31/0749 (2012.01) H01L 31/0264 (2006.01)
H01L 31/0224 (2006.01)

(21) International Application Number:

PCT/US2015/066139

(22) International Filing Date:

16 December 2015 (16.12.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/092,602 16 December 2014 (16.12.2014) US

(71) Applicants: UNIVERSITY OF SOUTHERN CALIFORNIA [US/US]; USC Stevens Center for Innovation, 1150 South Olive Street, Suite 2300, Los Angeles, CA 90015 (US). REGENTS OF THE UNIVERSITY OF CALIFORNIA [US/US]; Office of the Secretary and Chief of Staff to the Regents, 1111 Franklin St. 12th Floor, Oakland, CA 94607 (US).

(72) Inventors: CRONIN, Stephen, B.; 623 Prospect Avenue, Unit 6, South Pasadena, CA 91030 (US). DHALL, Rohan; 3710 McClintock Avenue, RTHB113, University Of Southern California, Los Angeles, CA 90089 (US). LAKE, Roger; Department of Electrical and Computer Engineering, UC Riverside, Chung Hall 437, 900 University Avenue, Riverside, CA 92521 (US). LI, Zhen; 3710 McClintock Avenue, RTHB113, University of Southern California, Los Angeles, CA 90089 (US). NEUPANE, Mahesh; 2200 Candices Choice Court, Apt J, Bel Air, MD 21015 (US). WICKRAMARATNE, Darshana; Materials Department, UC Santa Barbara, Engineering II 1355, Santa Barbara, CA 93106 (US).

(74) Agent: BROWN, Marc, E.; McDermott Will & Emery LLP, 2049 Century Park East, Suite 3800, Los Angeles, CA 90067 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))

(54) Title: BULK DIRECT GAP MOS2 BY PLASMA INDUCED LAYER DECOUPLING

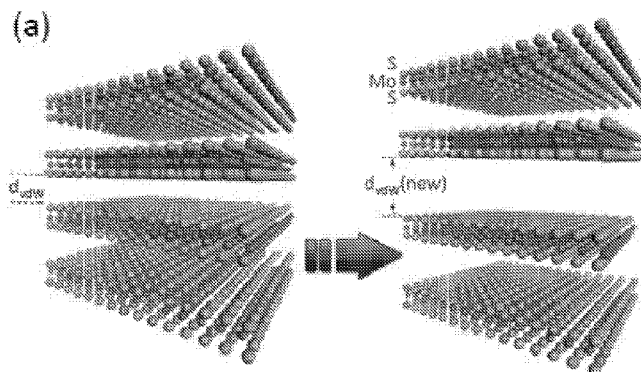

(57) Abstract: Bulk direct transition metal dichalcogenide (TMDC) may have an increased interlayer separation of at least .5, 1, or 3 angstroms more than its bulk value. The TMDC may be a bulk direct band gap molybdenum disulfide (MoS₂) or a bulk direct band gap tungsten diselenide (WSe₂). Oxygen may be between the interlayers. A device may include the TMDC, such as an optoelectronic device, such as an LED, solid state laser, a photodetector, a solar cell, a FET, a thermoelectric generator, or a thermoelectric cooler. A method of making bulk direct transition metal dichalcogenide (TMDC) with increased interlayer separation may include exposing bulk direct TMDC to a remote (aka downstream) oxygen plasma. The plasma exposure may cause an increase in the photoluminescence efficiency of the TMDC, more charge neutral doping, or longer photo-excited carrier lifetimes, as compared to the TMDC without the plasma exposure.



BULK DIRECT GAP MOS₂ BY PLASMA INDUCED LAYER DECOUPLING

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application is based upon and claims priority to U.S. provisional patent application 62/092,602, entitled "BULK DIRECT GAP MOS₂ BY PLASMA INDUCED LAYER DECOUPLING," filed December 16, 2014, attorney docket 094852-0048. The entire content of this application is incorporated herein by reference.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH

[0002] This invention was made with government support under Contract No. DE-FG02-07ER46376 awarded by the Department of Energy; this invention was also made with government support under Contract Nos. 1124733 and 1128304 awarded by the National Science Foundation. The government has certain rights in the invention.

BACKGROUND

TECHNICAL FIELD

[0003] This disclosure relates to bulk direct transition metal dichalcogenides (TMDCs).

DESCRIPTION OF RELATED ART

[0004] Two dimensional materials, such as graphene and few layer transition metal dichalcogenides (TMDCs) have attracted great research interest in the past decade, since mechanical exfoliation of these materials from their three dimensional bulk counterparts was demonstrated [K. Novoselov, D. Jiang, F. Schedin, T. Booth, V. Khotkevich, S. Morozov, A. Geim, *Proceedings of the National Academy of Sciences of the United States of America* 2005, 102, 10451]. Graphene, in particular, is of tremendous interest from a scientific standpoint due to its linear band dispersion [A. C. Neto, F. Guinea, N. Peres, K. S. Novoselov, A.

K. Geim, *Reviews of Modern Physics* 2009, 81, 109], and excellent carrier mobility [K. I. Bolotin, K. Sikes, Z. Jiang, M. Klima, G. Fudenberg, J. Hone, P. Kim, H. Stormer, *Solid State Communications* 2008, 146, 351], allowing observation of phenomena such as the quantum hall effect [Y. Zhang, Y.-W. Tan, H. L. Stormer, P. Kim, *Nature* 2005, 438, 201; A. K. Geim, K. S. Novoselov, *Nature Materials* 2007, 6, 183; V. Singh, M. M. Deshmukh, *Physical Review B* 2009, 80, 081404], non-adiabatic phonon anomalies [S. Pisana, M. Lazzeri, C. Casiraghi, K. S. Novoselov, A. K. Geim, A. C. Ferrari, F. Mauri, *Nature Materials* 2007, 6, 198], and Dirac Fermion nature of electrons [S. Pisana, M. Lazzeri, C. Casiraghi, K. S. Novoselov, A. K. Geim, A. C. Ferrari, F. Mauri, *Nature Materials* 2007, 6, 1988; J. Tsang, M. Freitag, V. Perebeinos, J. Liu, P. Avouris, *Nature Nanotechnology* 2007, 2, 725]. However, due to its gapless dispersion, its utility in the field of optoelectronics may be limited.

[0005] Transition metal dichalcogenides, such as MoS₂, WS₂, and WSe₂, on the other hand, are found to exist in similar layered structures and exhibit finite band gaps in the visible wavelength range [Q. H. Wang, K. Kalantar-Zadeh, A. Kis, J. N. Coleman, M. S. Strano, *Nature Nanotechnology* 2012, 7, 699; M. Chhowalla, H. S. Shin, G. Eda, L.-J. Li, K. P. Loh, H. Zhang, *Nature Chemistry* 2013, 5, 263; K. F. Mak, C. Lee, J. Hone, J. Shan, T. F. Heinz, *Physical Review Letters* 2010, 105, 136805].

[0006] TMDCs have traditionally been used as lubricants and host materials for intercalation compounds [M. Dresselhaus, *MRS Bulletin* 1987, 12, 24; S. M. Whittingha, *Intercalation chemistry*, Elsevier, 2012]. The optical properties of these TMDCs may vary significantly with layer thickness [K. F. Mak, C. Lee, J. Hone, J. Shan, T. F. Heinz, *Physical Review Letters* 2010, 105, 136805]. While monolayer MoS₂ and WSe₂ are direct band gap materials, their few layer counterparts are indirect semiconductors, which show a greatly suppressed photoluminescence(PL) [K. F. Mak, C. Lee, J. Hone, J. Shan, T. F. Heinz, *Physical Review Letters* 2010, 105, 136805; A. Splendiani, L. Sun, Y. Zhang, T. Li, J. Kim, C.-Y. Chim, G. Galli, F. Wang, *Nano Letters* 2010, 10, 1271]. Consequently, most recent research efforts have been directed towards monolayer TMDCs. Monolayers, while direct band gap, have small optical densities, which may limit their potential use in practical devices.

SUMMARY

[0007] Bulk direct transition metal dichalcogenide (TMDC) may have an increased interlayer separation of at least .5, 1, or 3 angstroms more than its bulk value. The TMDC may be a bulk direct band gap molybdenum disulfide (MoS_2) or a bulk direct band gap tungsten diselenide (WSe_2). Oxygen may be between the interlayers. A device may include the TMDC, such as an optoelectronic device, such as an LED, solid state laser, a photodetector, a solar cell, a FET, a thermoelectric generator, or a thermoelectric cooler.

[0008] A method of making bulk direct transition metal dichalcogenide (TMDC) with increased interlayer separation may include exposing bulk direct TMDC to a remote (aka downstream) oxygen plasma. The plasma exposure may cause an increase in the photoluminescence efficiency of the TMDC, more charge neutral doping, or longer photo-excited carrier lifetimes, as compared to the TMDC without the plasma exposure.

[0009] These, as well as other components, steps, features, objects, benefits, and advantages, will now become clear from a review of the following detailed description of illustrative embodiments, the accompanying drawings, and the claims.

BRIEF DESCRIPTION OF DRAWINGS

[0010] The drawings are of illustrative embodiments. They do not illustrate all embodiments. Other embodiments may be used in addition or instead. Details that may be apparent or unnecessary may be omitted to save space or for more effective illustration. Some embodiments may be practiced with additional components or steps and/or without all of the components or steps that are illustrated. When the same numeral appears in different drawings, it refers to the same or like components or steps.

[0011] FIG. 1 illustrates an optical microscope image of a few layer MoS_2 flake (a) before and (b) after 3 minutes of oxygen plasma treatment. FIG. 1(c) illustrates photoluminescence spectra before and after oxygen plasma treatment, plotted on different Y scales, highlighting the blue shift of the A exciton, the narrowing of the spectral linewidth, and the emergence of the asymmetry in PL lineshape after plasma treatment at 300K. FIG. 1(d) is an inset that shows the emergence of a

distinct, low energy peak at 100K. The relative intensity of the low energy PL peak is shown as a function of temperature.

[0012] FIG. 2 illustrates AFM (height) images of a MoS₂ flake taken (a) before and (b) after a 3 minute oxygen plasma treatment (Plotted on different color scales). The step height profiles along the dashed lines are shown in (c). A significant increase in sample thickness, of about 2nm, is observed after plasma treatment.

[0013] FIG. 3 illustrates an optical microscope image of a few layer MoS₂ flake (a) before and (b) after 3 minutes of oxygen plasma treatment. FIG. 1(c) illustrates Raman spectra before and after plasma treatment. No significant shift in the Raman peaks is observed, although the Raman intensity for both peaks is reduced, and a slight narrowing of the peaks is observed.

[0014] FIG. 4(a) illustrates atomistic structure of the 4L- MoS₂ with the equilibrium vdW gap, d_{vdw} , and the modified vdW gap, d_{vdw} (new). FIG. 4(b) illustrates direct gap (solid) and indirect gap (dotted) energy transitions for 2L, 3L and 4L MoS₂ for a range of increases in the vdW gap (Δd_{vdw}). The dotted vertical lines indicate the indirect to direct transition vdW gaps for 2L (green), 3L (blue), and 4L (red) MoS₂.

[0015] FIGS. 5(a) and 5(b) illustrate different parts of a table that provides a list of PL peak positions and linewidths measured before and after oxygen plasma treatment for 35 MoS₂ flakes measured in this study.

[0016] FIG. 6 is a table of Raman scattering peak position and width for the E_{2g}¹ and A_{1g} Raman modes for 17 flakes measured before and after optimized oxygen plasma treatment.

[0017] FIG. 7 illustrates AFM images taken before (a) and after (b) 3 minutes of oxygen plasma treatment for a flake of MoS₂ indicating a significant reduction in the surface residue due to plasma cleaning.

[0018] FIG. 8 shows the increase in flake thickness for 12 different many-layer MoS₂ flakes.

[0019] FIG. 9 illustrates correlation of the observed PL enhancement with the relative increase in interlayer separation ($\Delta h/h$) showing trend lines corresponding

to two types of samples with uniformly intercalated layers (blue) and top-layer only intercalation (red).

[0020] Figs. 10(a) and 10(b) illustrate the structural quality of the flake was confirmed using high resolution imaging and electron diffraction at 200kV. FIG. 10(c) illustrates an electron diffraction pattern. FIG. 10(d) illustrates an EELS spectrum. FIG. 10(e) illustrates the shift of the plasmon loss peak is plotted as a function of the oxygen plasma exposure time.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

[0021] Illustrative embodiments are now described. Other embodiments may be used in addition or instead. Details that may be apparent or unnecessary may be omitted to save space or for a more effective presentation. Some embodiments may be practiced with additional components or steps and/or without all of the components or steps that are described.

[0022] A robust method for engineering the optoelectronic properties of many-layer MoS₂ using low energy oxygen plasma treatment is now described.

[0023] Gas phase treatment of MoS₂ with oxygen radicals generated in an upstream N₂-O₂ plasma may enhance the photoluminescence (PL) of many-layer, mechanically exfoliated MoS₂ flakes by up to 20 times, without reducing the layer thickness of the material. A blue shift in the photoluminescence spectra and narrowing of linewidth may be consistent with a transition of MoS₂ from indirect to direct band gap material. Atomic force microscopy and Raman spectra reveal that the flake thickness may actually increase as a result of the plasma treatment, indicating an increase in the interlayer separation in MoS₂. Ab-initio calculations reveal that the increased interlayer separation may be sufficient to decouple the electronic states in individual layers, leading to a transition from an indirect to direct gap semiconductor. With optimized plasma treatment parameters, enhanced PL signals for 32 out of 35 many-layer MoS₂ flakes (2-15 layers) tested were observed, indicating this method may be robust and scalable. Monolayer MoS₂, while direct band gap, may have a small optical density, which may limit its potential use in practical devices. The results presented here may provide a material with the direct band gap of monolayer MoS₂, without reducing sample thickness, and hence optical density.

[0024] A gentle oxygen plasma treatment may produce a direct band gap transition in many-layer MoS₂. The band structure of MoS₂ with more than 4 layers in thickness is almost identical to that of bulk MoS₂, and flakes thicker than that are considered “many-layer” in this disclosure. The data gathered was obtained from samples with thicknesses up to 15 layers (approximately 12nm), and approximately 5-15µm in size. This transition was studied using photoluminescence spectroscopy, Raman Spectroscopy, atomic force microscopy (AFM), and electron energy loss spectroscopy (EELS). Ab-initio calculations provide insight into the layer decoupling mechanism responsible for this indirect to direct gap transition.

[0025] Low power, remote (or downstream) plasma treatment has been effectively used to remove hydrocarbon impurities in situations where the sample itself is known to be susceptible to damage by fast moving ionic species [B. Anthony, L. Breaux, T. Hsu, S. Banerjee, A. Tasch, *Journal of Vacuum Science & Technology B: Microelectronics and Nanometer Structures* 1989, 7, 621]. For example, remote plasma has been used to selectively etch away metallic carbon nanotubes and surface contaminants, to enable fabrication of semiconducting single wall carbon nanotube field effect transistors [G. Zhang, P. Qi, X. Wang, Y. Lu, X. Li, R. Tu, S. Bangsaruntip, D. Mann, L. Zhang, H. Dai, *Science* 2006, 314, 974]. An XEI Evactron Soft Clean plasma cleaner may be used, in which the plasma is generated by flowing room air past an electrode supplied with 20W of RF power at 200mTorr. The sample is placed a certain distance (6-10cm) away from the plasma source, and ionized oxygen atoms diffuse towards the sample chamber with low kinetic energies. Samples were exposed to the O₂ plasma for about 3 minutes. While typical plasma cleaners used in semiconductor fabrication operate using a “sputtering” mechanism, wherein the sample is bombarded with ions carrying significant kinetic energy, remote plasma cleaners rely mainly on the chemical reactivity of the ionized oxygen to remove surface contaminants. Despite the presence of nitrogen in the gas mixture, the plasma itself mainly consists of oxygen radicals, since the N₂ molecule has a much higher bonding energy.

[0026] FIGS. 1(a) and 1(b) show optical microscope image of a mechanically exfoliated flake of MoS₂ on an oxidized silicon wafer. The photoluminescence (PL) spectra of these flakes are obtained using a 532nm excitation laser focused to a

0.5 μm spot, attenuated in power to $10 \mu\text{W}/\mu\text{m}^2$, to minimize sample heating. The PL spectra of the same MoS_2 flake taken before and after three minutes of oxygen plasma treatment are shown in FIG. 1(c). The two peaks labeled A and B correspond to transitions between the conduction band and the two (spin-orbit split) valence bands at the K point in the Brillouin zone. In this particular case, there is a sixteen fold enhancement of the PL intensity after the oxygen plasma treatment, along with significant (about 46%) narrowing of the spectral linewidth, indicating an improvement in material quality. The PL peak also shifts from typical energies between 1.81-1.83 eV before O_2 plasma to 1.86 eV after the plasma treatment. This is consistent with the observations of Mak et. al on suspended, monolayer, direct gap MoS_2 [K. F. Mak, C. Lee, J. Hone, J. Shan, T. F. Heinz, *Physical Review Letters* 2010, 105, 136805].

[0027] FIGS. 5(a) and 5(b) illustrate different parts of a table that provides a list of PL peak positions and linewidths measured before and after oxygen plasma treatment for 35 MoS_2 flakes measured in this study. Enhanced PL intensities were observed for 32 out of 35 many-layer MoS_2 flakes tested, indicating this method is robust and scalable.

[0028] The large intensity enhancement and blueshift of the PL peak observed after oxygen treatment is not the result of a reduction in the layer thickness of the MoS_2 , as shown by AFM and Raman measurements. The AFM images taken before and after oxygen treatment, surprisingly, reveal an increase in flake thickness, as shown in Figure 2c. The error in height measurements can be estimated from the standard deviation of the measured profile on the underlying SiO_2 substrate, which is found to be $2.4 \text{ \AA}$ both before and after plasma treatment. For the AFM data shown in Figure 2c, the step height along the white dashed lines in FIGS. 2a and 2b increases by about $20 \pm 5 \text{ \AA}$ due to the treatment with oxygen plasma. The $20 \text{ \AA}$ increase in the film thickness, distributed across the 9 nm MoS_2 film consisting of 11 to 13 monolayers, corresponds to an average increase in each van-der-Waals (vdW) gap of $1.5 \text{ \AA}$ to $1.8 \text{ \AA}$. Density functional theory calculations described below show that this increased interlayer distance is sufficient to cause an indirect to direct band gap transition suggesting that the enhanced PL observed is the result of plasma-assisted layer decoupling of the MoS_2 lattice.

[0029] Raman spectra taken before and after oxygen treatment also indicate that no thinning of the sample is occurring. In FIG. 3c, the Raman spectra of an MoS₂ flake exhibit two peaks corresponding to the E_{2g}¹ (in plane) and A_{1g} (out of plane) vibrational modes [C. Lee, H. Yan, L. E. Brus, T. F. Heinz, J. Hone, S. Ryu, *ACS Nano* 2010, 4, 2695]. The separation between these two peaks provides a good measure of the layer thickness of the material, varying from 19cm⁻¹ for monolayer to 25cm⁻¹ for N-layer (N>6) MoS₂ [C. Lee, H. Yan, L. E. Brus, T. F. Heinz, J. Hone, S. Ryu, *ACS Nano* 2010, 4, 2695]. The Raman spectra of 17 flakes of MoS₂ were studied, before and after O₂ plasma treatment. On average, the separation between the two Raman peaks reduced from 22.6 cm⁻¹ to 21.4 cm⁻¹ after plasma treatment, indicating that the flakes are still multilayer MoS₂. We consistently see a downshift in the A_{1g} (out of plane) Raman mode position and a narrowing of the Raman linewidth. However, no consistent and systematic change of the in plane (E_{2g}¹) mode is observed, which is also seen to upshift slightly at times. These results indicate that the intralayer spring constant is unaffected by the plasma treatment, and the interlayer “spring constant” is consistently weakened (albeit by a small amount). This shows that a mere flake thinning is not the mechanism responsible for the enhanced PL intensity observed after O₂ plasma treatment. On the contrary, an increase in the flake thickness shown by AFM, and the softening of the interlayer spring constant seen in the Raman spectra, point to a mechanism in which the interlayer van der Waals coupling is weakened. The reduction in Raman intensity is a possible consequence of the change in lattice symmetry, which determines the matrix elements and selection rules for Raman active vibrational modes. A tabulated summary of the Raman data is given in FIG. 6. While Raman spectroscopy can only differentiate single layer, bilayer and trilayer MoS₂ reliably, the Raman data excludes the possibility that the flake thickness has actually been reduced to monolayer MoS₂.

[0030] To explain the observed change in the PL peak with oxygen intercalation, the emergence of the PL peak at 1.8 eV is attributed to an increase in the van-der-Waals (vdW) gap between the adjacent layers of MoS₂. To support this argument, the electronic band structure of bilayer (2L) was calculated, trilayer (3L) and quad-layer (4L) MoS₂, as shown in FIG. 4(b), for a range of vdW gap distances between the adjacent layers. Calculations are based on first-principles

density functional theory (DFT) using the projector augmented wave method as implemented in the software package VASP [G. Kresse, J. Hafner, *Physical Review B* 1993, 47, 558]. The screened Heyd-Scuseria-Ernzerhof (HSE) hybrid functional has been employed for this study [J. Heyd, G. E. Scuseria, M. Ernzerhof, *The Journal of Chemical Physics* 2003, 118, 8207]. Spin-orbit coupling was included self-consistently within the band structure calculations. The HSE calculations incorporate 25% short-range Hartree Fock exchange, and the screening parameter is set to 0.4 Å [F. Zahid, L. Liu, Y. Zhu, J. Wang, H. Guo, *AIP Advances* 2013, 3, 052111]. A Monkhorst-Pack scheme was adopted to integrate over the Brillouin zone with a k-mesh 9 x 9 x 1 for the bilayer and trilayer structures. The k-mesh was reduced to a converged 4 x 4 x 1 grid for the quadrilayer structure HSE calculations. A plane-wave basis kinetic energy cutoff of 300 eV was used. The lattice constants for the bilayer and trilayer structures are obtained from our prior calculations on the bulk structure of MoS₂ that have been optimized with vdW interactions accounted for using a semi-empirical correction to the Kohn-Sham energies [D. Wickramaratne, F. Zahid, R. K. Lake, *The Journal of Chemical Physics* 2014, 140, 124710]. A vacuum spacing of 15 Å is added along the z-axis for all the structures. The atomic coordinates for each structure were optimized in all directions using the DFT-D2 dispersion corrections [S. Grimme, *Journal of Computational Chemistry* 2006, 27, 1787] until all the interatomic forces are below 0.01 eV/Å. The default level of theory in all calculations is HSE with spin-orbit coupling. Only deviations from the defaults are noted. The equilibrium vdW gap, d_{vdW} , is 3.12 Å for the 2L, 3L and 4L MoS₂ structures.

[0031] The valence band edge, Γ_v , is composed of 28% p_z orbitals from the S atoms and 67% d_z^2 orbitals from Mo atoms. The valence bands at K_v contain no d_z^2 or p_z components and are primarily composed of d_x^2 , and d_{xy} orbitals. Because of the large p_z orbital component of the S atoms, the Γ_v valley has the largest interlayer coupling and is, therefore, most sensitive to the presence of adjacent layers. When two monolayers are brought together, the Γ_v valleys of the two layers couple and split. At the equilibrium interlayer distance of 3.12 Å, the energy splitting is 620 meV. The corresponding energy splitting at K_v due to interlayer coupling is 74 meV. Thus, the interlayer coupling causes the Γ_v valley to rise above the K_v valley as two monolayers are brought into close proximity.

[0032] The orbital composition of the conduction band at K_c is 67% d_z^2 with no p_z component. The next closest conduction band valley is at Σ_c composed of 36% d_z^2 and a minor contribution from the p_z orbitals of the S atoms. The conduction band at K_c has no p_z components from the sulfur atoms. Thus, the K_c valley is only weakly affected by the proximity of an adjacent layer, and as two monolayers are brought together, the conduction band remains at K_c for the 2L, 3L and 4L structures.

[0033] The electronic band structures for 2L, 3L, and 4L MoS_2 are calculated for a range of vdW gap distances starting from the equilibrium value of $d_{\text{vdW}} = 3.12 \text{ \AA}$ and increasing it up to a maximum of 1.6 times the equilibrium value. When the vdW gap is increased by a factor of 1.6 in a 2L structure, the energy of Γ_v decreases by 470 meV with respect to the vacuum energy. The K_v - K_c direct gap transition changes by only 2 meV. A crossover from an indirect to direct gap transition occurs when the equilibrium vdW gap in 2L, 3L, and 4L MoS_2 is increased by 1.0 $\text{\AA}$, 1.13 $\text{\AA}$, and 1.45 $\text{\AA}$, respectively. At these separation distances the direct gap and indirect gap energies are equal. With further increases in the vdW gap the band gap becomes direct. The direct gap K_v - K_c and the indirect gap Γ_v - K_c band gap energies calculated using DFT are illustrated for the 2L, 3L, and 4L structures in FIG. 4b. The calculated increases in the vdW gaps that produce the indirect to direct transition are consistent with the experimentally measured increase in the film thickness shown in FIG. 2(c).

[0034] The consistency between the increase in interlayer separation revealed by AFM and Raman spectroscopy, and the corresponding increase in PL yields with theoretical calculations point to a mechanism in which exposure to oxygen plasma disturbs the interlayer van der Waals bonding. One scenario which could lead to this effect is intercalation of van der Waals gap of MoS_2 by a foreign species during expose to oxygen plasma. Electrochemical techniques, using liquid phase solvents, have been shown to enable intercalation of small chemical species (such as lithium ions) into lattices of layered materials like graphite [Z. Shu, R. McMillan, J. Murray, *Journal of The Electrochemical Society* 1993, 140, 922]. More recently, such methods have been used to completely separate the individual layers of two dimensional materials [V. Nicolosi, M. Chhowalla, M. G. Kanatzidis, M. S. Strano, J. N. Coleman, *Science* 2013, 340; J. N. Coleman, M.

Lotya, A. O'Neill, S. D. Bergin, P. J. King, U. Khan, K. Young, A. Gaucher, S. De, R. J. Smith, *Science* 2011, 331, 568; Y. Hernandez, V. Nicolosi, M. Lotya, F. M. Blighe, Z. Sun, S. De, I. McGovern, B. Holland, M. Byrne, Y. K. Gun'Ko, *Nature Nanotechnology* 2008, 3, 563; G. Eda, H. Yamaguchi, D. Voiry, T. Fujita, M. Chen, M. Chhowalla, *Nano Letters* 2011, 11, 5111]. Layer separation is achieved by completely saturating the interlayer gaps in the host TMDC lattice with guest species, followed by mechanical agitation. From intercalation chemistry, we know that a guest species need not distribute itself evenly in the interlayer gaps of the host lattice. It is common to find staging of guest atoms, which is the occupation of every other interlayer gap [M. Dresselhaus, *MRS Bulletin* 1987, 12, 24; S. M. Whittingha, *Intercalation chemistry*, Elsevier, 2012; G. Wieggers, *Physica B+ C* 1980, 99, 151]. Similarly, the guest species may cover only a fraction of the area in any one interlayer gap, leaving the host atomic layers weakly bound to one another. It would be expected, that completely saturating the interlayer spaces with guest species would lead to complete exfoliation of MoS₂. Overexposure of MoS₂ flakes to the plasma treatment may sometimes leads to complete removal of the flakes. However, unlike previous liquid based exfoliation methods, by controlling the plasma treatment parameters, only partial coverage of the interlayer spaces may be ensured, and hence prevent complete exfoliation. FIG. 8 shows the increase in flake thickness for 12 different many-layer MoS₂ flakes. 11 out of 12 flakes show an increase in the thickness after plasma treatment. 10 of these 12 samples showed an increase in the PL intensity. FIG. 9 shows the PL enhancement factor plotted as a function of the change in flake thickness for these 10 samples.

[0035] In MoS₂, such an engineered system may be tremendously advantageous for device applications. By reducing the inter-planar overlap of electronic states in many-layer MoS₂, one would expect the material to behave as a stack of isolated "monolayer" MoS₂, each with a direct band gap desirable for optoelectronic applications. One of the challenges in creating an optoelectronic device such as a p-n junction from a "monolayer" crystal arises from local fluctuations in charge densities due to surface impurities, which precludes controlled doping of the material. The direct band gap many-layer crystal obtained in this work would be far less susceptible to surface effects. Furthermore, many

layer, direct band gap MoS₂ would enable cross plane p-n junctions to be fabricated with finite space charge regions, as in conventional p-n junctions. The applicability of this method in decoupling layers is likely limited for significantly thicker flakes, due to the kinetics of the intercalation process. The intercalation of foreign species appears to be quite stable, and plasma-treated MoS₂ does not revert to its indirect form over time. The presence of foreign species, however, significantly destabilizes the interlayer van der Waals bonding in the MoS₂, and some delamination of the MoS₂ is observed when stored under ambient conditions over the span of a few weeks. By applying various strategies for hermetic sealing, this instability may be overcome in practical device applications.

[0036] Another aspect of the oxygen plasma treatment, evident from the AFM images in Figs. 7(a) and 7(b), is the dramatic reduction in surface contaminants arising from lithographic and exfoliation residues, which is expected to contribute to the dramatic increase in PL efficiency shown in FIG. 1(c). The plasma cleaning treatment also leads to a consistent narrowing of the PL linewidth, as evident in FIG. 1c. While the intensity of the A exciton luminescence is greatly enhanced, the intensity of the B exciton is actually diminished. This is also to be expected, since optically generated higher energy (B) excitons, due to their increased lifetimes, now have more time to find a decay path to the more energetically favorable (A) state before radiative recombination. This transition from B to A is disallowed in defect free MoS₂, since those states are orthonormal. However, oxygen plasma treatment perturbs the crystal potential, thereby allowing this transition, and explaining the reduction of B exciton luminescence. This observed blue shift in the PL peak is consistent with previous studies on suspended MoS₂ [K. F. Mak, C. Lee, J. Hone, J. Shan, T. F. Heinz, *Physical Review Letters* 2010, 105, 136805] and MoS₂ passivated by ionic liquids [Z. Li, S.-W. Chang, C.-C. Chen, S. B. Cronin, 2014]. The lineshape of the observed luminescence from the A exciton is found to be asymmetric, with a significant shift of the spectral weight towards the low energy side, as shown in FIG. 1c. This apparent asymmetry is the result of the emergence of a peak near the low energy shoulder of the A excitonic peak. Photoluminescence spectra taken at cryogenic temperatures provide insight into the underlying nature of this lineshape asymmetry. Here, the lower energy peak may be distinguished clearly, shown in the inset of FIG. 1(d). As shown recently

by Korn et al. [T. Korn, S. Heydrich, M. Hirmer, J. Schmutzler, C. Schüller, *Applied Physics Letters* 2011, 99, 102109], this peak (labeled A^d) is characteristic of the formation of a localized excitonic state, due to the creation of defects, or alternatively, the emergence of disorder. FIG. 1d shows the relative intensity of this low energy A^d peak to the dominant A exciton peak, as a function of sample temperature. At room temperature, the excitonic state is no longer well localized, leading to a diminished intensity of the observed disorder related peak. When higher RF power plasmas are used, the emergence of disorder and defects as indicated by the sub-band gap A^d peak in the PL spectra at room temperature are observed. However, under the optimized conditions used in this work, any A^d peak in the PL spectra at room temperature is not observed. HRTEM and EELS analysis presented in FIG. 10(a-e). FIG. 10(a-c) also does not reveal significant flake deterioration, even after several minutes of exposure to remote oxygen plasma. As a consequence of disorder, one would expect the PL intensity to vary spatially. However, in 2D PL maps, inhomogeneity of PL intensity over a MoS_2 flake of uniform thickness was not detected. This may be because both the exciton radius, and the size of any defect state, are expected to be at least an order of magnitude smaller than the diffraction limit. While interpretation of far field optical spectroscopy, as presented in this disclosure, sheds some light on the possible mechanisms at play, more direct evidence may be found by near field optical studies. Similarly, a more detailed ab-initio calculation by including guest species in the van der Waals gap would prove to be useful.

[0037] A recent report in literature [H. Nan, Z. Wang, W. Wang, Z. Liang, Y. Lu, Q. Chen, D. He, P. Tan, F. Miao, X. Wang, *ACS Nano* 2014] also observes similar PL enhancement, attributed to formation of Mo-O bonds based on XPS signals. However, XPS measurements are ill suited to flakes of MoS_2 , as the illuminated spot size is typically 15-20 μm , which is considerably larger than the typical flake size. Such a bond formation may have a dramatic impact on the Raman spectrum, due to a change in the atomic mass. No such shift was observed, hence ruling out Mo-O bond formation.

[0038] In summary, an indirect to direct band gap transition in many-layer MoS_2 has been demonstrated using a simple, scalable oxygen plasma induced process. The PL efficiency is found to increase due to the decoupling of electronic

states in individual layers. Furthermore, a significant narrowing in spectral linewidth is observed, indicating an increase in the exciton lifetime in MoS₂, due to removal of surface contaminants. The mechanism for the photoluminescence enhancement relies on incomplete filling (or intercalation) of the interlayer gap with a guest species, with a very slight change in doping. While the increase in interlayer separation confines the carriers in two dimensions, the possible creation of defects in MoS₂ likely gives rise localized excitonic states with longer lifetimes. This simple processing step could have vast implications for future generations of optoelectronic devices by providing direct band gap transition metal dichalcogenides with large optical densities.

[0039] The table in Figs. 5A and 5B show photoluminescence peak height, position, and linewidth for the A exciton peak for 35 flakes of MoS₂ before and after O₂ plasma treatment. The narrowing in peak linewidth and blueshift of peak position are also listed. Overall, 32 out of 35 flakes show an enhanced PL intensity. The last line indicates on average PL is enhanced 6.7 times, blueshifted by 26.4 meV, and the peak linewidth reduces by 14 meV due to the plasma treatment.

[0040] The large standard deviation in table in Figs. 5A and 5B is to be expected since the study investigates plasma induced decoupling in a variety of layer thicknesses of the “as-exfoliated” flakes. Furthermore, the surface conditions vary from sample to sample in mechanically exfoliated flakes, due to a lack of control over surface morphology and residues. This is apparent in the wide spread of the PL emission energies (1.81-1.86 eV) before oxygen plasma treatment. After treatment with O₂ plasma, however, a much more narrow distribution of PL emission energies (1.86-1.88 eV) is observed, particularly for flakes showing substantial PL enhancement.

[0041] FIG. 6 is a table of Raman scattering peak position and width for the E_{2g}¹ and A_{1g} Raman modes for 17 flakes measured before and after optimized oxygen plasma treatment. No systematic change in the peak position is observed for all 17 samples. However, the A_{1g} peak width is seen to consistently reduce after the plasma treatment. Raman data was not collected for all samples in the table illustrated in Figs. 5A and 5B, however, sample numbers given in the tables illustrates in Figs. 5A, 5B, and 6 correspond to the same flakes of MoS₂.

[0042] FIG. 7 illustrates AFM images taken before (a) and after (b) 3 minutes of oxygen plasma treatment for a flake of MoS₂ indicating a significant reduction in the surface residue due to plasma cleaning.

PL Enhancement Mechanisms: Layer Decoupling and Removal of Surface Residue

[0043] FIG. 8 shows the increase in flake thickness for 12 different many-layer MoS₂ flakes. 11 out of 12 flakes show an increase in the thickness after plasma treatment. 10 of these 12 samples showed an increase in the PL intensity. Figure S3 shows the PL enhancement factor plotted as a function of the change in flake thickness for these 10 samples. Two distinct trends are evident in this plot. For the samples indicated in blue, the PL enhancement factor scales linearly with the relative increase in thickness ($\Delta h/h$), indicating that all of the MoS₂ layers are being evenly intercalated. Samples in red, on the other hand, show a universal PL enhancement factor of approximately 2.2X independent of the relative increase in thickness, which we attribute to intercalation only of the top layer.

[0044] In FIG. 8, the measured thicknesses of 12 different many-layer MoS₂ flakes before and after treatment is shown with remote oxygen plasma, as measured using atomic force microscopy.

TEM and EELS Analysis

[0045] To ensure structural integrity of the MoS₂ is not disturbed by the oxygen plasma treatment, high resolution transmission electron microscopy was performed. To investigate any change in the charge density of the sample, the plasmon loss peak in the electron energy loss spectrum [R. F. Egerton, *Electron energy-loss spectroscopy in the electron microscope*, Springer, 2011] (EELS) was studied for MoS₂ in a transmission electron microscope (TEM). To first order, the unscreened plasmon frequency is defined by the Drude model as

$$\omega_p^2 = \frac{ne^2}{m\epsilon_0}.$$

[0046] FIG. 9 illustrates correlation of the observed PL enhancement with the relative increase in interlayer separation ($\Delta h/h$) showing trend lines corresponding to two types of samples with uniformly intercalated layers (blue) and top-layer only intercalation (red).

[0047] A few layer flake of MoS₂ was transferred to a TEM grid, using the standard PMMA transfer technique [X. Li, Y. Zhu, W. Cai, M. Borysiak, B. Han, D. Chen, R. D. Piner, L. Colombo, R. S. Ruoff, *Nano Letters* 2009, 9, 4359]. The structural quality of the flake was confirmed using high resolution imaging and electron diffraction at 200kV, as shown in Figs 10(a) and 10(b), and STEM-EELS images were collected on a post column Gatan Imaging Filter Quantum system after successive oxygen plasma steps. EEL spectra obtained are fitted to a Gaussian function to determine the plasmon energy. The shift of the plasmon loss peak is plotted as a function of the oxygen plasma exposure time in FIG. 10(e), showing a consistent increase in plasmon energy, which indicates an increase in charge density in the MoS₂. It should be noted that the first data point in this plot is affected by beam induced surface contamination of the MoS₂ during our initial high resolution imaging, which required exposure to the beam for a few hours. All subsequent EELS images required considerably shorter exposures to the electron beam. This upshift in the plasmon loss peak indicates about a 1% increase in the density of valence electrons in the sample, which would be explained by partial intercalation with a foreign species having more valence shell electrons than molybdenum. The emergence of the trion state, however, is deemed unlikely with just a 1% modulation of charge density.

Applications

[0048] Semiconductor optoelectronic devices have revolutionized technology over the last decade, with the rapid emergence of light emitting diodes (LEDs) and photovoltaic solar cells. Similarly, diode pumped lasers such as vertical cavity surface emitting lasers (VCSELs) are a class of optoelectronic devices which currently form the backbone of the optical communication channels which power the internet. This progress has been enabled by research efforts to enhance the interaction of light (photons) with the semiconducting material and its charge carriers (electrons and holes). In indirect gap semiconductors (such as silicon), the transfer of energy from photons to electrons is inherently inefficient, since it requires the creation of lattice vibration to conserve momentum. However, direct gap semiconductors are not limited by this requirement, and hence, are inherently better suited for efficient optoelectronic devices. However, direct gap

semiconductors are not limited by this requirement, and hence, are inherently better suited for efficient optoelectronic devices.

[0049] Recently, two dimensional semiconductors such as transition metal dichalcogenides (TMDCs) have been explored as potential semiconductors of for future device application. While single atomic layers of this material are direct gap (and hence desirable for optoelectronics), multiple layer TMDCs are indirect gap, and hence form inefficient optoelectronic devices. Our approach, based on a scalable exposure to remotely generate oxygen plasma, has been shown to convert such multiple layer TMDCs from indirect to direct gap materials through electronic decoupling. This process opens up the possibility of creating efficient optoelectronic devices from multilayer TMDCs desirable for potential future application such as LEDs, lasers, and photovoltaic solar cells.

[0050] Recently, two dimensional semiconductors such as transition metal dichalcogenides (TMDCs) have been explored as potential semiconductors of for future device application. While single atomic layers of this material are direct gap (and hence desirable for optoelectronics), multiple layer TMDCs are indirect gap, and hence form inefficient optoelectronic devices. The approach described herein, based on a scalable exposure to remotely generate oxygen plasma, has been shown to convert such multiple layer TMDCs from indirect to direct gap materials through electronic decoupling. This process opens up the possibility of creating efficient optoelectronic devices from multilayer TMDCs desirable for potential future application such as LEDs, lasers, and photovoltaic solar cells.

[0051] The components, steps, features, objects, benefits, and advantages that have been discussed are merely illustrative. None of them, nor the discussions relating to them, are intended to limit the scope of protection in any way. Numerous other embodiments are also contemplated. These include embodiments that have fewer, additional, and/or different components, steps, features, objects, benefits, and/or advantages. These also include embodiments in which the components and/or steps are arranged and/or ordered differently.

[0052] For example, this material could be as a light emitting diode (LED), solid state laser, photodetector, solar cell, field effect transistor (FET), or thermoelectric generator or cooler.

[0053] Unless otherwise stated, all measurements, values, ratings, positions, magnitudes, sizes, and other specifications that are set forth in this specification, including in the claims that follow, are approximate, not exact. They are intended to have a reasonable range that is consistent with the functions to which they relate and with what is customary in the art to which they pertain.

[0054] All articles, patents, patent applications, and other publications that have been cited in this disclosure are incorporated herein by reference.

[0055] The phrase “means for” when used in a claim is intended to and should be interpreted to embrace the corresponding structures and materials that have been described and their equivalents. Similarly, the phrase “step for” when used in a claim is intended to and should be interpreted to embrace the corresponding acts that have been described and their equivalents. The absence of these phrases from a claim means that the claim is not intended to and should not be interpreted to be limited to these corresponding structures, materials, or acts, or to their equivalents.

[0056] The scope of protection is limited solely by the claims that now follow. That scope is intended and should be interpreted to be as broad as is consistent with the ordinary meaning of the language that is used in the claims when interpreted in light of this specification and the prosecution history that follows, except where specific meanings have been set forth, and to encompass all structural and functional equivalents.

[0057] Relational terms such as “first” and “second” and the like may be used solely to distinguish one entity or action from another, without necessarily requiring or implying any actual relationship or order between them. The terms “comprises,” “comprising,” and any other variation thereof when used in connection with a list of elements in the specification or claims are intended to indicate that the list is not exclusive and that other elements may be included. Similarly, an element preceded by an “a” or an “an” does not, without further constraints, preclude the existence of additional elements of the identical type.

[0058] None of the claims are intended to embrace subject matter that fails to satisfy the requirement of Sections 101, 102, or 103 of the Patent Act, nor should they be interpreted in such a way. Any unintended coverage of such subject

matter is hereby disclaimed. Except as just stated in this paragraph, nothing that has been stated or illustrated is intended or should be interpreted to cause a dedication of any component, step, feature, object, benefit, advantage, or equivalent to the public, regardless of whether it is or is not recited in the claims.

[0059] The abstract is provided to help the reader quickly ascertain the nature of the technical disclosure. It is submitted with the understanding that it will not be used to interpret or limit the scope or meaning of the claims. In addition, various features in the foregoing detailed description are grouped together in various embodiments to streamline the disclosure. This method of disclosure should not be interpreted as requiring claimed embodiments to require more features than are expressly recited in each claim. Rather, as the following claims reflect, inventive subject matter lies in less than all features of a single disclosed embodiment. Thus, the following claims are hereby incorporated into the detailed description, with each claim standing on its own as separately claimed subject matter.

CLAIMS

The invention claimed is:

1. Bulk direct transition metal dichalcogenide (TMDC) with an increased interlayer separation of at least .5 angstrom more than its bulk value.
2. The TMDC of claim 1 wherein the TMDC is a bulk direct band gap molybdenum disulfide (MoS_2).
3. The TMDC of claim 2 wherein the increased separation is at least 1 angstrom.
4. The TMDC of claim 2 wherein the increased separation is at least 3 angstrom.
5. The TMDC of claim 2 further comprising oxygen between the interlayers.
6. The TMDC of claim 1 wherein the TMDC is a bulk direct band gap tungsten diselenide (WSe_2).
7. A device comprising the TMDC of claim 1.
8. The device of claim 7 wherein the device is an optoelectronic device.
9. The device of claim 8 wherein the optoelectronic device is an LED.
10. The device of claim 8 wherein the optoelectronic device is a solid state laser.
11. The device of claim 8 wherein the optoelectronic device is a photodetector.
12. The device of claim 8 wherein the optoelectronic device is a solar cell.
13. The device of claim 8 wherein the optoelectronic device is a FET.
14. The device of claim 8 wherein the optoelectronic device is a thermoelectric generator.
15. The device of claim 8 wherein the optoelectronic device is a thermoelectric cooler.
16. A method of making bulk direct transition metal dichalcogenide (TMDC) with increased interlayer separation comprising exposing bulk direct TMDC to a remote (aka downstream) oxygen plasma.

17. The method of claim 16 wherein the plasma exposure causes an increase in the photoluminescence efficiency of the TMDC as compared to the TMDC without the plasma exposure.

18. The method of claim 16 wherein the plasma exposure causes more charge neutral doping as compared to the TMDC without the plasma exposure.

19. The method of claim 10 wherein the plasma exposure results in longer photo-excited carrier lifetimes as compared to the TMDC without the plasma exposure.

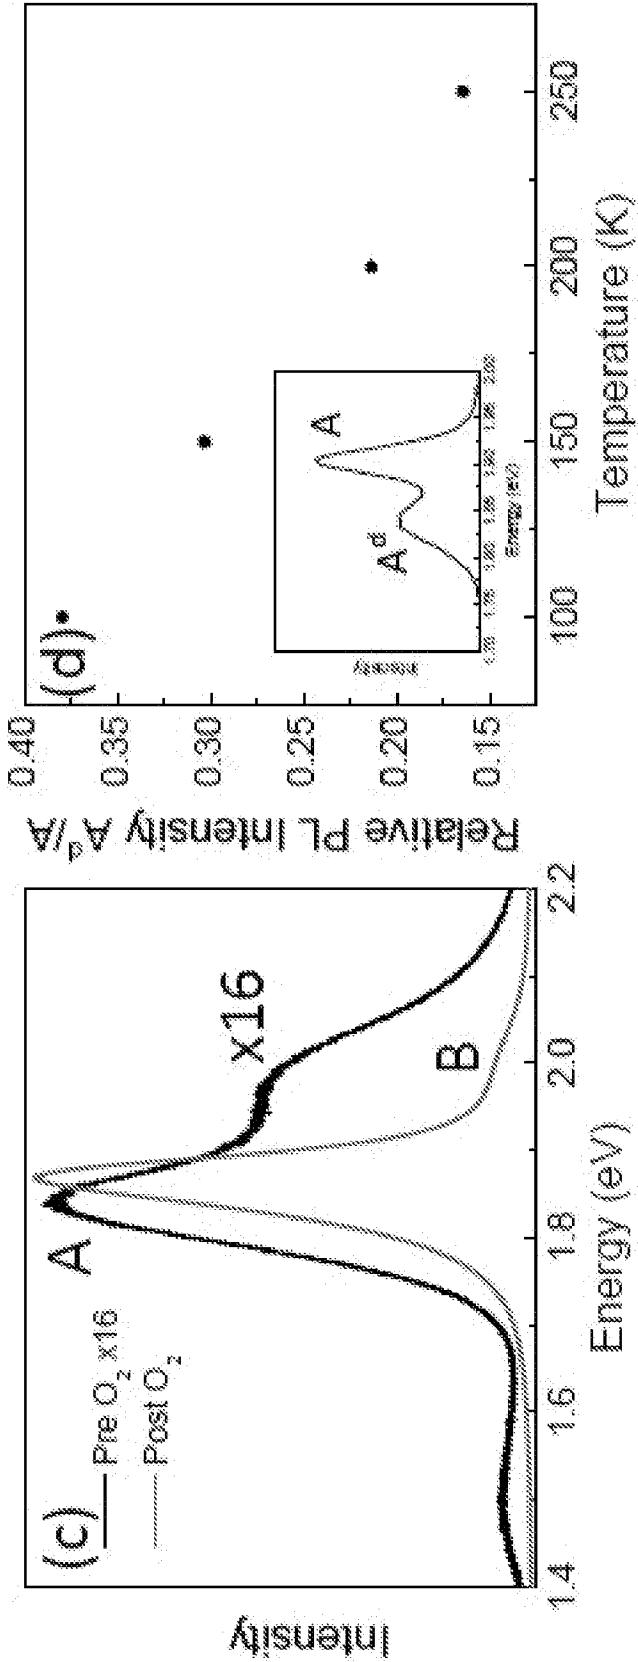
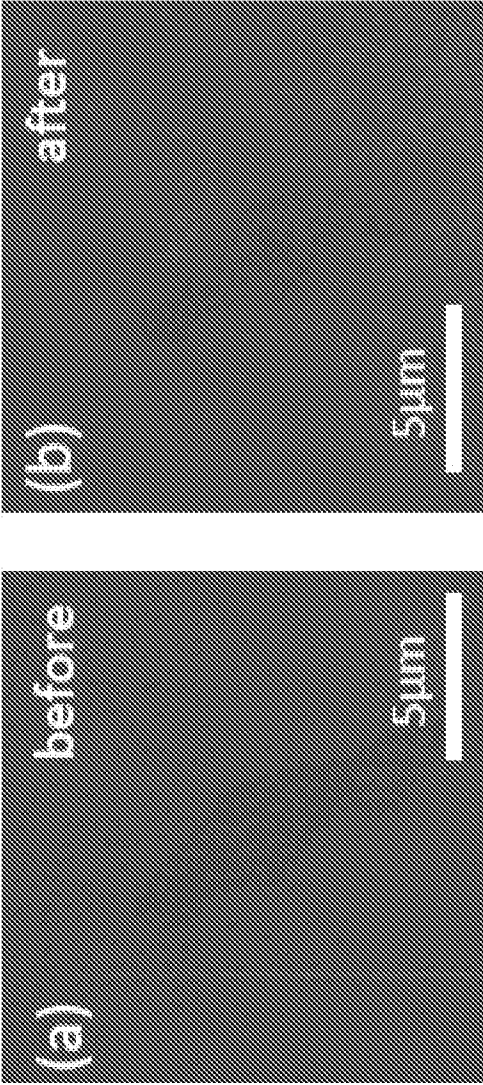


FIG. 1

2/10

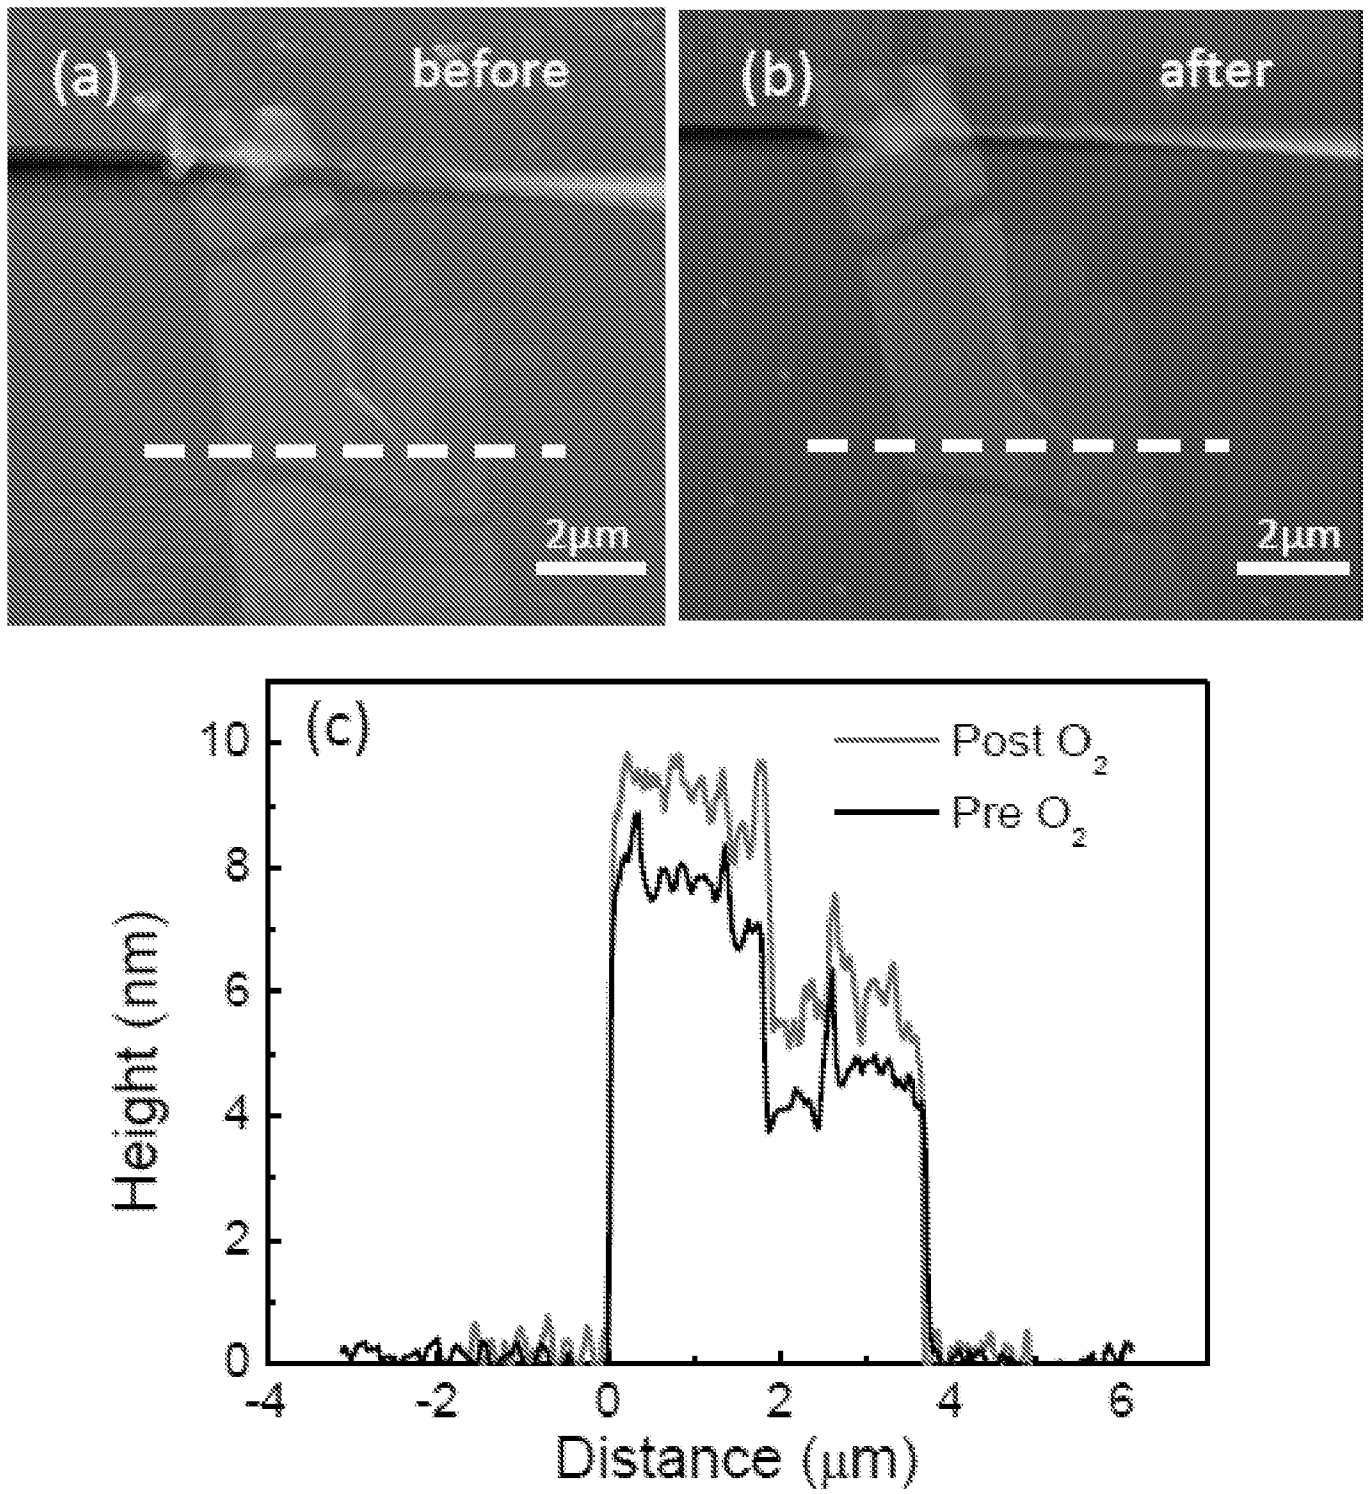


FIG. 2

3/10

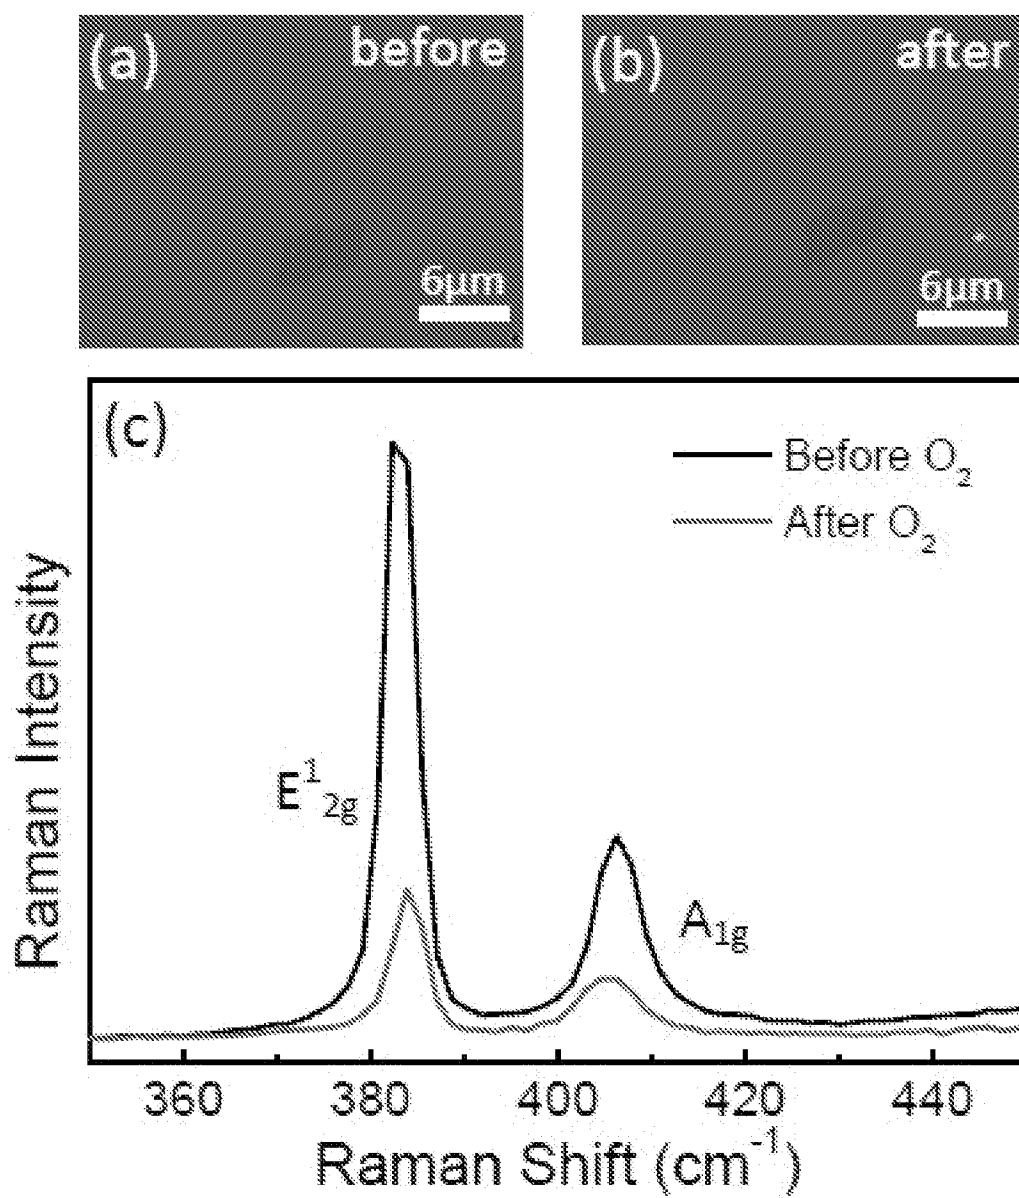


FIG. 3

4/10

FIG. 4A

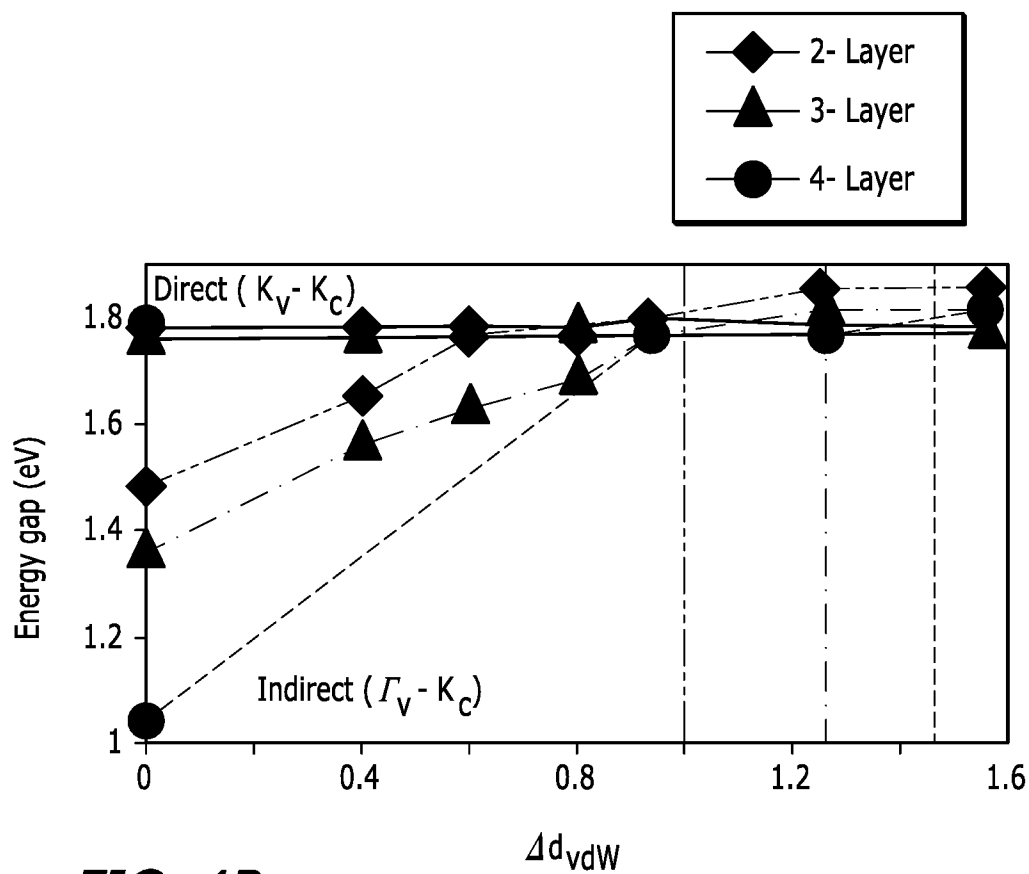
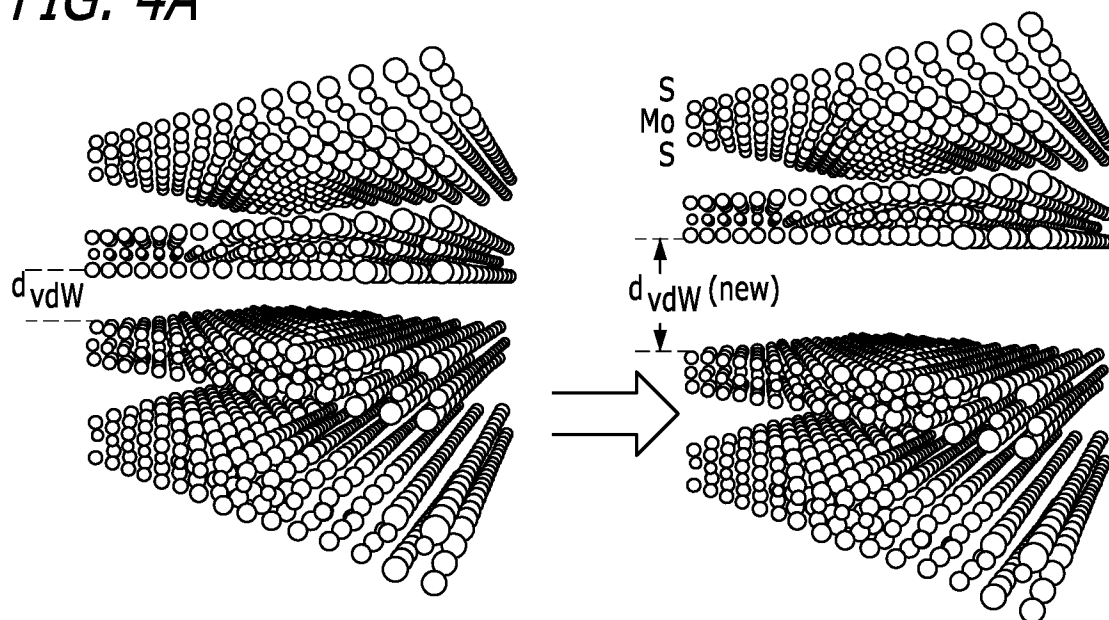


FIG. 4B

5/10

Sno	Pre O ₂ Treatment			Post O ₂ Treatment					
	A Peak			A Peak					
	Height (Counts)	Center (eV)	Width (meV)	Height (Counts)	Center (eV)	Width (meV)	PL Blueshift (meV)	Δ width (meV)	PL Enhancement
1	6532	1.832	58	121040	1.867	29	35	-29	18.5
2	3680	1.826	60	24498	1.863	40	37	-20	6.7
3	3860	1.816	56	6600	1.808	72	-8	16	1.7
4	4378	1.822	55	30406	1.856	44	35	-10	6.9
5	7351	1.832	57	20096	1.837	53	5	-3	2.7
6	10881	1.830	57	163812	1.861	33	31	-24	15.1
8	11592	1.827	58	222173	1.868	33	41	-25	19.2
9	11614	1.831	59	192731	1.866	35	35	-24	16.6
10	7574	1.814	55	12338	1.821	65	8	10	1.6
11	17039	1.815	62	80517	1.848	41	33	-21	4.7
12	13355	1.807	60	5461	1.825	54	18	-6	0.4
13	13037	1.811	63	48597	1.865	31	54	-32	3.7
14	16616	1.824	60	121148	1.861	38	37	-22	7.3
16	17513	1.825	63	28747	1.869	43	44	-20	1.6
17	23582	1.816	55	12098	1.845	59	29	4	0.5
18	11144	1.831	45	6109	1.832	61	1	16	0.6
19	19399	1.839	53	102603	1.863	35	25	-19	5.3

FIG. 5A

6/10

20	3499	1.838	45	6104	1.836	52	-2	7	1.7
21	4617	1.841	51	37555	1.863	33	22	-18	8.1
23	3404	1.830	66	15016	1.869	35	38	-31	4.4
25	2882	1.828	53	12194	1.876	34	48	-19	4.2
27	4145	1.839	52	59454	1.867	33	28	-19	14.3
34	6580	1.851	49	35625	1.873	27	22	-22	5.4
37	2859	1.845	47	12304	1.872	28	28	-18	4.3
38	3632	1.849	46	35641	1.872	27	23	-18	9.8
39	4847	1.852	46	26829	1.872	28	20	-18	5.5
41	2553	1.845	40	6383	1.883	35	38	-5	2.5
43	3043	1.841	38	30866	1.845	28	22	-10	10.1
47	2284	1.849	48	15510	1.871	31	28	-17	6.8
49	3233	1.836	46	20282	1.873	28	22	-18	6.3
50	3178	1.839	46	19232	1.874	29	21	-17	6.1
51	1731	1.844	42	10963	1.877	28	33	-13	6.3
52	1571	1.845	41	9902	1.878	29	33	-12	6.3
53	2735	1.853	43	26206	1.872	28	19	-15	9.6
54	2804	1.851	44	27625	1.872	28	21	-16	9.9
Avg	7393	1.837	52	45905	1.857	37.9	26.4	-13.9	6.7

FIG. 5B

7/10

Sno	E_{1s} Peak				A_{1s} Peak			
	Pre O ₂ Treatment		Post O ₂ Treatment		Pre O ₂ Treatment		Post O ₂ Treatment	
	Centre	Width	Centre	Width	Centre	Width	Centre	Width
1	383.8	3.7	385.2	4.0	405.3	8.5	405.1	5.8
2	382.5	3.9	383.1	4.2	405.9	7.1	405.8	5.8
3	382.3	3.7	382.9	3.6	406.6	5.2	406.6	6.0
4	383.0	3.9	382.9	3.6	406.3	6.9	404.2	6.0
5	384.0	4.8	382.7	4.5	406.1	8.0	405.0	6.1
6	384.3	3.5	384.3	4.4	407.3	8.2	404.3	6.7
8	384.2	4.3	384.9	4.2	406.0	7.5	404.5	6.4
9	384.2	3.4	382.7	4.0	406.7	8.0	405.1	6.5
10	384.1	3.7	382.8	3.4	407.6	6.5	405.0	6.8
11	383.8	4.4	383.8	3.6	405.3	9.7	404.3	7.0
12	383.4	4.6	383.0	3.7	405.2	10.7	406.6	5.5
13	382.9	4.1	383.4	3.5	406.3	8.5	405.8	6.0
14	384.1	4.5	385.8	3.3	405.9	9.1	404.6	8.1
16	384.0	3.9	385.5	4.4	405.8	8.7	405.2	6.6
17	383.9	4.7	384.4	3.8	405.9	8.4	406.2	6.4
18	383.8	4.4	383.5	4.2	407.9	6.0	407.0	6.0
19	384.5	4.2	385.6	4.1	406.4	8.7	405.3	6.8
Avg:	383.7	4.1	383.9	3.9	406.3	8.0	405.3	6.4

FIG. 6

8/10

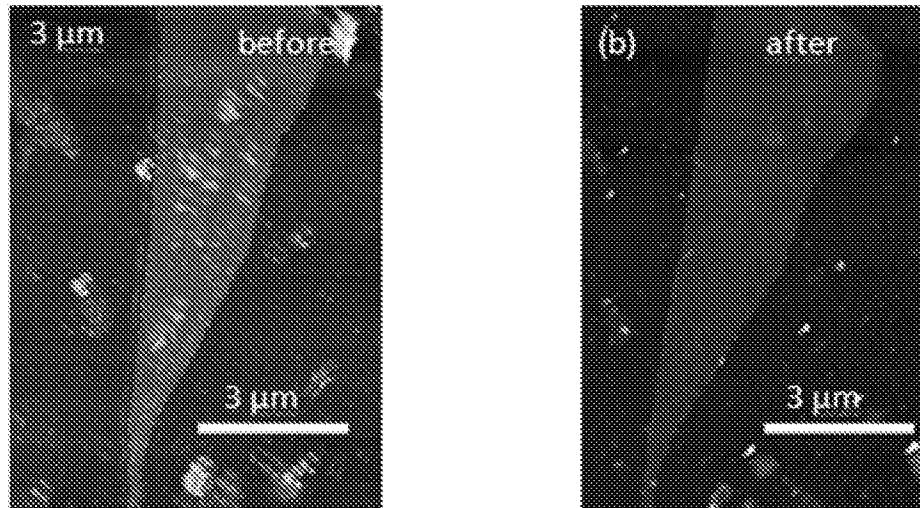


FIG. 7

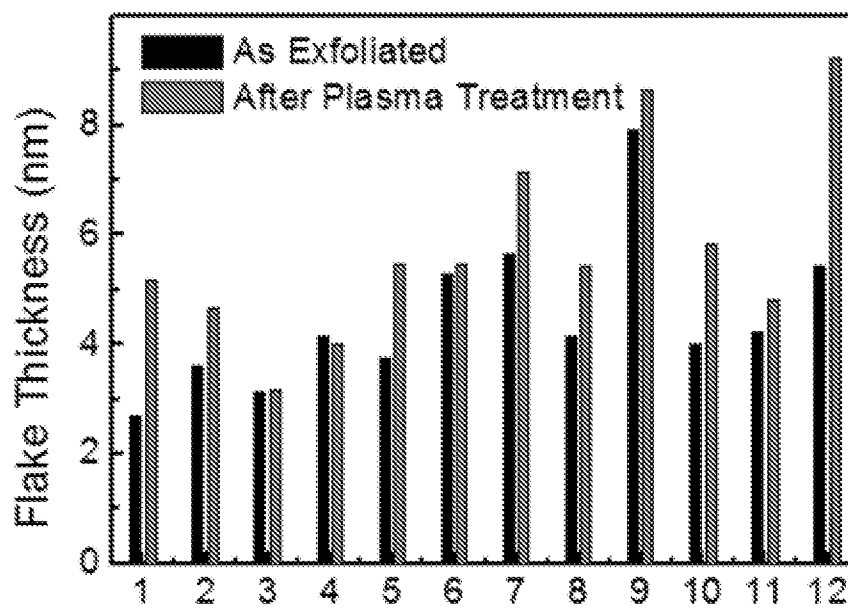
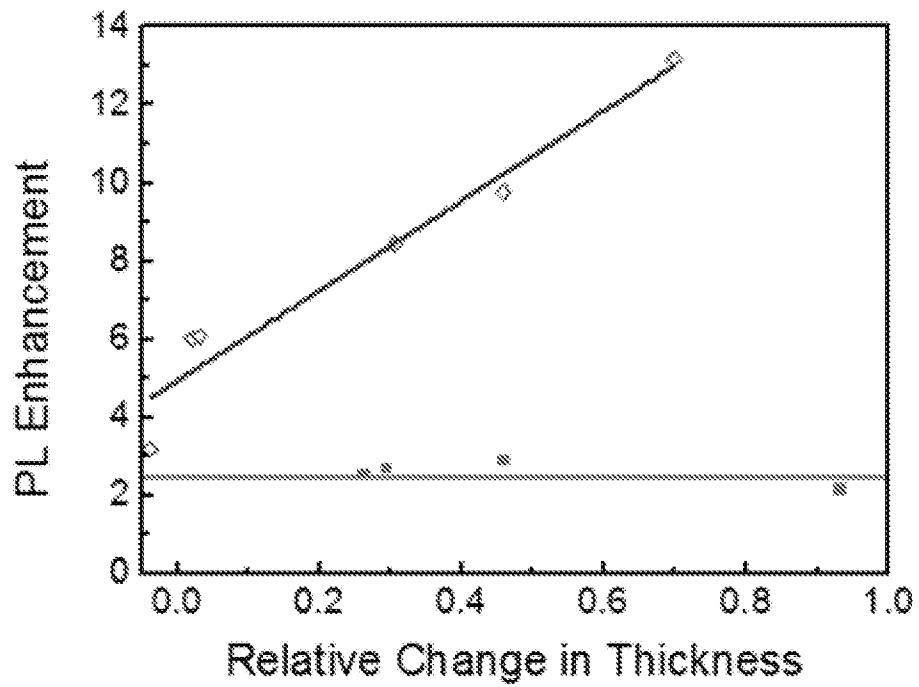


FIG. 8

9/10

*FIG. 9*

10/10

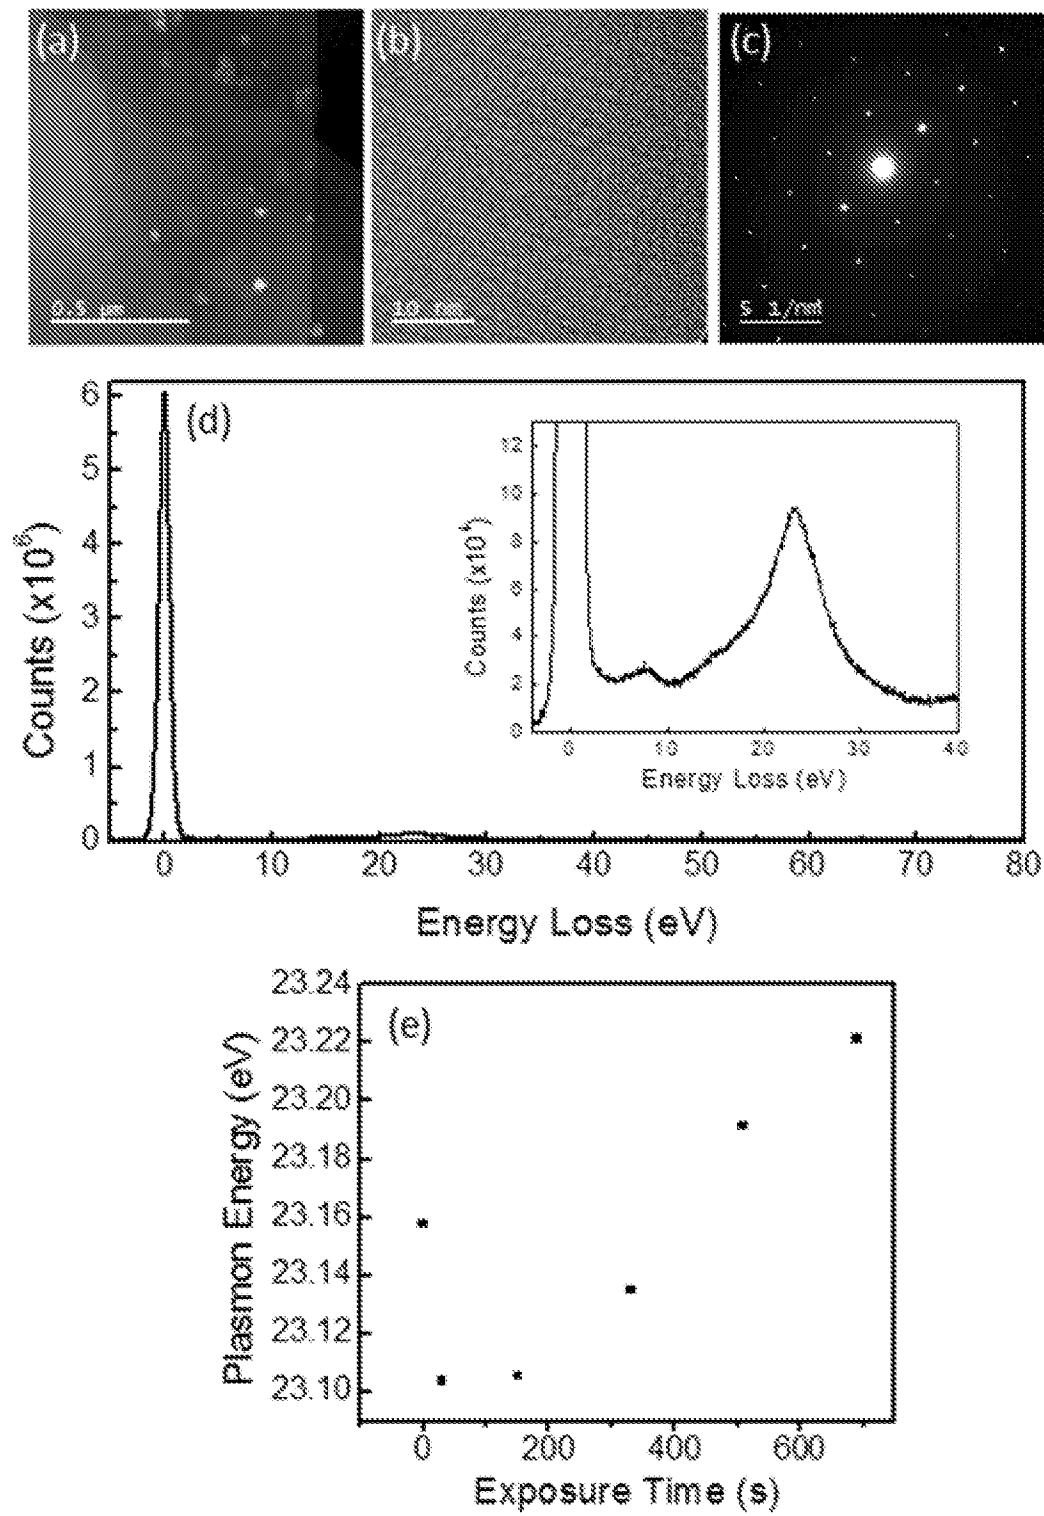


FIG. 10

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 15/66139

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - H01L 31/0749; H01L 31/0224; H01L 31/0264 (2016.01)

CPC - Y02P70/521; Y02E10/50; H01L31/022433; H01L31/035209; H01L31/032; H01L31/022466

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8): H01L 31/0749; H01L 31/0224; H01L 31/0264 (2016.01)

CPC: Y02P70/521; Y02E10/50; H01L31/022433; H01L31/035209; H01L31/032; H01L31/022466

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
USPC: 136/256, 438/94, 136/258 (Keyword limited, terms below)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PatBase, Google Patents, Google Scholar (NPL);

Keywords: Transition metal dichalcogenide, TMDC, molybdenum disulfide, tungsten diselenide, oxygen plasma, optoelectronic

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 2011/0037033 A1 (Green et al.) 17 February 2011 (17.02.2011) para [0077], [0087]	1-4, 7-9, 11-13 ----- 5-6, 10, 14-19
Y	US 2012/0107488 A1 (Frey et al.) 03 May 2012 (03.05.2012) para [0015], [0023], [0061], [0092]	5-6, 16-19
Y	WO 2013/140181 A1 (The University of Manchester) 26 September 2013 (26.09.2013) para [0001], [0006], [0009], [0014], [0028], [0051], [0054], [0063], [0094]-[0097], [0123], [0128] [00133], Figure 2	10
Y	US 2005/0058406 A1 (Reilly et al.) 17 March 2005 (17.03.2005) para [0003], [0008], [0009], [0010], abstract	14-15
A	US 2014/0008616 A1 (Geim et al.) 09 January 2014 (09.01.2014) entire document	1-19
A	US 2009/0178702 A1 (Pichler) 16 July 2009 (16.07.2009) para [0002], [0012], [0014], [0016], [0023], [0027]	1-19

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

02 February 2016 (02.02.2016)

Date of mailing of the international search report

26 FEB 2016

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774