



- (51) **International Patent Classification:**  
*C08K 9/04* (2006.01) *C09D 11/00* (2006.01)  
*B44F 1/12* (2006.01)
- (21) **International Application Number:**  
PCT/AU2012/000078
- (22) **International Filing Date:**  
1 February 2012 (01.02.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**  
2011900302 1 February 2011 (01.02.2011) AU
- (71) **Applicant (for all designated States except US):** COMMONWEALTH SCIENTIFIC AND INDUSTRIAL RESEARCH ORGANISATION [AU/AU]; Limestone Avenue, Campbell, Australian Capital Territory 2602 (AU).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** SUBRAMANIAN, Priya [AU/AU]; 1/11 Yarrbat Avenue, Balwyn, Victoria 3103 (AU). JACKSON, Wayne Kevin [AU/AU]; 77 McCrae Road, Rosanna, Victoria 3085 (AU). BATEMAN, Stuart Arthur [AU/AU]; 3 Wortley Avenue, Mount Waverley, Victoria 3150 (AU). CASEY, Philip Stephen [NZ/AU]; 11 Wendover Court, Mount Waverley, Victoria 3149 (AU). HARRIS, Dominic Richard [AU/AU]; 494 Highbury Road, Mount Waverley, Victoria 3149 (AU).
- (74) **Agent:** WATERMARK PATENT & TRADE MARKS ATTORNEYS; Level 2, 302 Burwood Road, Hawthorn, Victoria 3122 (AU).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— with international search report (Art. 21(3))

(54) **Title:** TRANSPARENT INFRARED ABSORBING MATERIALS

(57) **Abstract:** An infrared absorbing material, an infrared absorbing ink formulation and a method of production are provided in which at least one infrared absorbing dye is supported on nanoparticles having an average size not greater than 100nm in at least one direction. The dye-supporting nanoparticles may be dispersed in a carrier vehicle such that the infrared absorbing material or ink is substantially transparent to visible radiation. The infrared absorbing material and ink are particularly suitable for use in banknotes and other security documents.



## **TRANSPARENT INFRARED ABSORBING MATERIALS**

### **FIELD OF THE INVENTION**

5 This invention relates in general to transparent infrared absorbing materials. In particular, the transparent infrared absorbing materials can be applied to the transparent window security feature of polymer banknotes, and it is convenient to describe it in this manner. However, it should be noted that the invention is not limited to this application.

### **BACKGROUND TO THE INVENTION**

10 Polymer banknotes have been in circulation in Australia since 1992, when the first denomination in the current banknote series was issued. Polymer banknotes offer many advantages over traditional paper banknotes, specifically longer life and enhanced security. One of the major reasons for the increased security of polymer banknotes is the use of a transparent window.

15 However, the use of transparent windows in banknotes can cause problems for banknote processing equipment such as automatic teller machines (ATMs), banknote counting machines, banknote acceptors and the like.

Typically, many optical sensors are required to determine the position of a banknote within banknote processing equipment, or the completeness of the  
20 banknote i.e. whether there are any holes in the banknote. The inclusion of transparent windows without any consideration for the operation of optical sensors can disrupt efficient machine processing of polymer banknotes by third parties. From a security perspective, it also restricts the optimum use of window designs for counterfeit deterrence.

### **25 Machine Processing Of Banknotes**

Over the past 20 years there has been exponential growth in the use of machines for counting, sorting and authenticating banknotes. These machines range from simple banknote counters used by a myriad of retail outlets, to counting machines that can denominate (typically used by commercial banks),  
30 automatic teller machines, banknote acceptors used in vending machines and gaming equipment, and high-speed note processors used by large cash-in-transit companies and central banks to authenticate, denominate, count and sort banknotes.

For such equipment to function efficiently, it is essential that the machine detects the presence of a banknote and when it is ready to be received/processed, and that the banknote is correctly aligned throughout its transport. This enables such equipment to correctly count banknotes, and to  
5 present the banknote to a higher level sensor which efficiently presents the banknotes to the end user. Machines of all types tend to have a series of sensors which determine that a single banknote is being processed, and that notes are not stuck together.

The leading edge of a banknote is fundamental to the operation of  
10 banknote processing equipment. The machine is required to detect the starting position of the banknote within its transport, and thereafter detect various machine-readable characteristics of the banknote, such as magnetics, fluorescence, printed indicia, opacity, etc. These characteristics can be used for authentication of a banknote. The second reason for determining banknote  
15 presence is to ensure that the note is intact and that there are no missing pieces, holes or tears, which can lead to machine 'jams'. A further reason is to ensure an accurate count of banknotes.

In general, banknote equipment manufacturers seek to use optical sensors that achieve a large signal to noise ratio (which can overcome soiling from  
20 contaminants, including airborne particulate contaminants), and which reduce hardware costs (sensor and receiver). Machine manufacturers usually select sensors that are commonly used and which are robust and economical, in particular infrared (IR) sensors.

IR sensors use light emitting diodes which emit a monochromatic source of  
25 light in the near-infrared (NIR) region. These IR sensors either work in transmission mode or reflection mode. Under reflection mode, the IR beam and the IR sensors are placed in tandem. When the IR beam strikes the transparent window of the banknote, it is transmitted instead of being reflected. The sensor therefore perceives the clear area as being no different from the surrounding air.  
30 Because of this, the signal to noise ratio is low, and the machine's sensor software judges that there is no banknote present. If the signal to noise ratio was high, the software would consider that a banknote was present. Under transmission mode, the IR beam and the IR sensors are placed on opposite sides

of the banknote. When the IR beam strikes the transparent window of the banknote the IR beam is uninterrupted as it travels through the polypropylene film. Because of this the signal to noise ratio is high, and the sensor software judges no banknote is present.

5 It is therefore desirable from a machine processing perspective to provide an infrared absorbing material which is suitable for application to, or incorporation within, a transparent window of a security document, such as a banknote, that enables the window area to be detected by IR sensors, without significantly affecting other properties of the window.

10 It is also desirable to provide a transparent infrared adsorbing material that exhibits strong absorbency of radiation in the IR spectrum, and which exhibits good transmission of light in the visible spectrum.

Any discussion of documents, devices, acts or knowledge in this specification is included to explain the context of the invention. It should not be  
15 taken as an admission that any of the material formed part of the prior art base or the common general knowledge in the relevant art in Australia on or before the priority date of the claims herein.

## **SUMMARY OF THE INVENTION**

According to one aspect of the present invention there is provided a  
20 transparent infrared absorbing material including: a carrier vehicle; and at least one infrared absorbing dye supported on nanoparticles having an average size of not greater than 100nm, wherein the dye-supporting nanoparticles are dispersed in the vehicle such that the infrared absorbing material is substantially transparent to visible radiation.

25 According to another aspect of the invention there is provided a method of producing a transparent infrared absorbing material or ink formulation including the steps of: mixing at least one infrared absorbing dye with particles of an inorganic or organic material, nanomilling the mixture to produce nanoparticles of the inorganic or organic material on which the infrared absorbing dye is  
30 supported, the nanoparticles having an average size of not greater than 100 nm, and dispersing the dye-supporting nanoparticles in a carrier vehicle to produce an infrared absorbing material which is substantially transparent to visible radiation.

Preferably the carrier vehicle is a printing medium, such as an ink, resin or varnish. The carrier vehicle may be a polymer-based resin. The carrier vehicle is preferably substantially transparent to visible radiation.

5 In one preferred embodiment, the carrier vehicle is a substantially transparent radiation curable vehicle which is curable by radiation when applied to a substrate to form a substantially transparent film on the substrate. The vehicle may be curable by any of the following types of radiation, such as heat (IR), light, ultraviolet radiation, electron beams and X-rays. Examples of radiation curable vehicles include UV curable inks and resins, such as acrylate based  
10 resins, for example, Sicpa HV OC6.

According to a third aspect of the invention there is provided an ink formulation including one or more resins or blend of resins, at least one infra red absorbing dye supported on nanoparticles having an average size not greater than 100 nm at least in one direction, wherein the nanoparticles are dispersed in  
15 a carrier vehicle.

Preferably, wherein the resin or blend of resins is selected from thermoplastic, elastomeric or thermoset resins or an aqueous or solvent based resin dispersion.

The one or more infrared absorbing dyes may be supported on the same  
20 type of nanoparticles or on different types of nanoparticles.

The formulation or material may include at least one other infrared absorbing dye not supported on nanoparticles.

The formulation or material may include other additives, agents or components selected from but not limited to rheology modifiers, flow control  
25 agents, surfactants, adhesion promoters, adhesive resins, UV absorbers, flame retardants, surface finishing agents that promote gloss or matt finish, other solvents to improve miscibility or dispersion or other dispersants.

In some preferred embodiments the formulation or material may include one or more agents which facilitate a bathochromic or hypsochromic shift, for  
30 example, amines or hydroxyl-ethyl modified amines.

The average size of the nanoparticles in at least one direction in the material or ink formulation preferably falls substantially within the range from

about 30nm to about 100nm, and more preferably from about 50nm to about 80nm. Preferably, the average size of the nanoparticles is at least 30nm.

The nanoparticles are preferably nanoparticles formed from at least one IR absorbing material. The nanoparticles may be formed from a conducting, semi-conducting or insulating material. The IR absorbing material or materials may include any one or more of the following: a metallic or semi-conducting species, such as silicon and its compounds, a metal, a metal salt, a metal oxide or a metal nitride, or a mixture of any two or more of these materials. The metallic or semi-conducting species may be selected from the group consisting of group 13, group 14, transition metals and rare earth metals. Preferably, the metallic or semi-conducting species is selected from a group including silicon, germanium, the metallic elements of period 3, the metallic elements of period 4, the metallic elements of period 5, the metallic elements of the lanthanide series, and compounds of these elements. Examples of particularly preferred materials for the nanoparticles include alumina ( $\text{Al}_2\text{O}_3$ ), silica ( $\text{SiO}_2$ ), clays and micas, including fluoromica clays and modified montmorillonites, such as Cloisite B (registered trade mark), lanthanum and its compounds, such as lanthanum hexaboride ( $\text{LaB}_6$ ), indium compounds, such as indium tin oxide (ITO), and combinations of such materials. Other possible IR absorbing materials for the nanoparticles include titanium metal and its compounds, such as titanium nitride, zirconium and its compounds, such as zirconium nitride, molybdenum metal and compounds thereof, copper and its compounds, such as copper chromate, neodymium and its compounds, such as neodymium oxide and neodymium chloride, dysprosium and its compounds, such as dysprosium oxide and praseodymium oxide.

The at least one dye in the material or ink formulation may consist of any IR-absorbing dye. Preferably the infrared absorbing dye is an organic or complexed dye. Preferred dyes include perylene-based dyes, including IR absorbing dyes sold under the trade mark Lumogen by BASF, for example, Lumogen 765 or 788. Another preferred dye is dithiolene dyes sold under the brand name Epolight, such as Epolight 3072 or 4105 or 2057. Other NIR dyes which can be used are those sold under the brand name ADS. For example, ADS798SM or ADS890MC are potential candidates but are compromised by their colour and/or non-transparency.

In another preferred embodiment the IR material, the ink formulation or the method of production results in a bathochromic or hypsochromic shift such that absorbance wavelength may be shifted from a low to a higher wavelength or from a higher to a lower wavelength using physical, chemical or thermal means during production.

In a further aspect of the invention, the transparent infrared absorbing material of the first aspect, or the ink formulation of the third aspect, is used in the manufacture of a security document.

According to another aspect of the invention, there is provided a security document incorporating a transparent infrared absorbing material in accordance with the first aspect of the invention. A preferred embodiment of this aspect is a security document including a transparent window wherein the infrared absorbing material is applied to the window.

In alternative embodiment, the infrared absorbing material may be applied to an opaque area of a security document. In this case the infrared absorbing material may form a covert security feature which is detectable by measuring the amount of infrared radiation reflected by the security feature.

According to a further aspect of the invention there is provided a security document including a transparent window, wherein an infrared absorbing material is applied to or incorporated within the window.

The infrared absorbing material in this aspect preferably includes an infrared absorbing dye. Suitable IR absorbing dyes including but not limited to perylene-based or complexed dyes, such as Lumogen 765 or 788 or any improvements on these. Alternatively, or additionally, the infrared absorbing material includes infrared absorbing nanoparticles preferably having an average size of not greater than 100nm. The average size of the IR absorbing nanoparticles preferably falls substantially within the range from about 30nm to 100nm, and more preferably from about 50nm to about 80nm. The nanoparticles may be formed from an IR absorbing material. In a particularly preferred embodiment of this aspect, an infrared absorbing dye is supported on nanoparticles of IR absorbing materials, such as described above.

The infrared absorbing material may be applied to the transparent window in the form of a printing medium, such as a transparent ink, resin or varnish. It is

also possible that the infrared absorbing material could be incorporated in a transparent substrate forming the window of the security document.

In a particularly preferred embodiment, the security document is a banknote.

## 5 BRIEF DESCRIPTION OF THE DRAWINGS

It will be convenient to further describe the invention with respect to the accompanying drawings. Other embodiments of the invention are possible, and consequently, the particularity of the accompanying drawings is not to be understood as superseding the generality of the preceding description of the  
10 invention.

Figure 1 shows a cross-section through a polymer banknote incorporating an infrared absorbing material within a window area of the banknote.

Figure 2 shows the reflectance spectra of air and a piece of paper.

Figure 3 shows the reflectance spectra of air and transparent Biaxially  
15 Oriented Polypropylene (BOPP) film.

Figure 4 shows a UV-Vis-NIR transmission profile for coatings based on  $\text{LaB}_6$ .

Figure 5 shows a UV-Vis-NIR transmission profile for coatings based on  $\text{LaB}_6$  and ITO.

20 Figure 6 shows Lumogen 788 in UV cured film at high and low concentration.

Figure 7 shows Lumogen 788 in UV cured film at varying concentrations.

Figure 8 shows the reflectivity of coatings containing various concentrations of Lumogen 788.

25 Figure 9 shows the spectra of UV cured coatings containing various concentrations of Lumogen 788 before and after QUV exposure.

Figure 10 shows the colour shift of Lumogen 788 in UV cured film after QUV exposure.

30 Figure 11 shows the spectral performance of Lumogen 788 when using a clarified resin and when using an unclarified resin.

Figure 12 shows the UV-Vis-NIR transmission profile for Lumogen 788 on various nanosubstrates.



Figure 13 is similar to Figure 12 and shows the Bathochromic shift when Lumogen 788 is supported on Fluoromica MEE (dipolyoxyethylene alkyl ammonium).

Figure 14 shows the Absorbance vs Wavelength profile for a formulation of IR122 with and without the addition of Cloisite 30B.

Figure 15 shows the Absorbance vs Wavelength profile for a formulation of Lumogen 788 and MEE at ambient temperature and at an elevated temperature.

Figure 16 shows the Absorbance vs Wavelength profiles for formulations of Lumogen 788 with different amounts of Cloisite 30B added, one of which was heated to an elevated temperature.

Figure 17 shows the Absorbance vs Wavelength profile for a formulation of Lumogen 788 without Cloisite 30B added at an ambient temperature and at an elevated temperature.

Figure 18 shows the Absorbance vs Wavelength profile for a formulation of Lumogen 765 with Cloisite added using different techniques.

Figure 19 shows the Transmission vs Wavelength profile for formulations of Somasif ME 100 with and without the addition of triethanolamine.

## **DESCRIPTION OF PREFERRED EMBODIMENTS**

### **Definitions**

Throughout the specification the following definitions are used.

Nanoparticle: A nanomaterial having an average size of not greater than 100nm at least in one direction.

Resins: Resins include polymers and polymeric resins.

### **Description**

Figure 1 is a cross-section of a polymer banknote 1 formed from a substrate 2 of transparent polymeric material having a number of layers and coatings applied to each side of the substrate 2 except in an area 3 which forms a clear window 4. The substrate 2 may be formed from any transparent polymeric material which is flexible. In one preferred embodiment, the substrate 2 is formed from a film of Biaxially Oriented Polypropylene (BOPP) about 70-80 microns thick.

The layers and coatings applied to each side of the substrate 2 preferably include one or more opacifying layers 5, 6 and various printed ink layers. The opacifying layers 5, 6 may comprise pigmented coatings including a pigment,

such as titanium dioxide, dispersed within a binder or carrier of cross-linkable polymeric material. Such opacifying coatings form white layers 5, 6 on the substrate which are substantially opaque to visible and IR radiation and which facilitate the subsequent application of the printed ink layers to form designs on the banknote. The opacifying layers 5, 6 may be applied by rotogravure printing, sometimes referred to simply as Gravure printing. The printed ink layers may include any one or more of the following: offset print layers 7; intaglio print layers 8, 9; letterpress printing 10 and Gravure printing. A clear overcoat 11, such as a clear resin or varnish, may be applied over the printed ink layers 7-10.

The window 4 of the banknote may include at least one security feature 12 such as an embossing, a lens or microlens structure, a diffraction grating, a hologram or other optically variable device (OVD).

The polymer banknote 1 of Figure 1 differs from conventional polymer banknotes in that it includes a transparent infrared (IR) absorbing material applied as a coating 12 on the area 3 of the transparent substrate 2 forming the clear window 4 of the banknote. The transparent infrared (IR) absorbing material may be applied on one or both sides of the substrate in the area of the window 4. The transparent infrared (IR) absorbing material is adapted to absorb IR radiation while being substantially transparent to radiation in the visible spectrum. Thus the clear window 4 with the IR absorbing material applied substantially prevents the transmission of IR so that the presence of the banknote can be detected by IR detectors, e.g. in cash machines, without substantially affecting the security aspects of the window, i.e. the clear window 4 itself and any security feature located in the window.

For traditional paper banknotes, cash machine sensors are either simple mechanical pressure transducers or optical sensors which measure relative opacity, i.e. the differential between air and a piece of paper. Figure 2 shows the reflectance spectra of air 20 and a piece of paper 22. The differential between the two spectra is significant, more than 30%. Mechanical pressure sensors are capable of measuring either a paper or a polymer banknote, whereas many optical sensors are incapable of discriminating the difference between a transparent polymeric substrate, e.g. Biaxially Oriented Polypropylene (BOPP) film, and air. This is because the relative opacity differential between a

transparent substrate and air is not significant. Figure 3 shows the differential between the reflectance spectra of a BOPP transparent film 32 and air 30 is less than 5%. The capability of the sensors to discriminate between BOPP 32 and air 30 is essential to detect the leading edge of the note and/or any missing portion or hole within the banknote.

To overcome the above problem a transparent infrared absorbing material that meets the following criteria was created:

1. Robust (meeting all the physical and chemical resistance banknote durability tests);
2. Clarity (allowing light to pass diffusely enabling a clear unobstructed view of an object/image seen through the window);
3. Transparency in the visible region 400-700nm (preferably less than 20% absorption when measured using a UV-Vis spectrophotometer); and
4. Absorbency of IR in a defined region.

Furthermore, it is desirable to have automatic reading devices be able to identify currency whilst being imperceptible to the general public. The incorporation of visually transparent NIR (near infrared) absorbing additives into proprietary printing ink system(s) for the printing of banknotes and/or the plastic substrate itself can address this problem.

Transmission of infrared radiation is governed by the ability of the IR absorbing materials to absorb in the wavelengths of interest (the absorption coefficient), the concentration of the IR absorbing material in the system (additive loading) and the path length through which the light passes (film or substrate thickness).

Current NIR dyes have the potential to achieve a solution but performance limitations include low thermal and environmental stability, narrow absorption wavelength range and absorption carry over into the visible region.

There are many IR absorbing dyes available, however maintaining visual transparency and clarity with a high absorption in the IR region with use of a small concentration of dyes has not been achievable until now.

An alternative approach is that based on the use of NIR absorbing nano-additives. In recent years there has been increasing interest in the use of inorganic additives to control the transmission, absorption and reflectance of NIR

wavelengths particularly in applications for solar control coatings. In these applications, appreciable NIR absorption/reflection combined with visible transparency attributes is sought which may be achieved by reducing the additive size to a dimension well below that of the wavelength of light (400-700nm).

5           It should be noted that many known organic IR absorbing dye compounds are complex molecules and their application as a visually transparent IR absorbing in the NIR region is highly limited due to the difficulty in processing them for application. Broadly, the present invention overcomes the limitations of processing such IR materials by supporting an IR absorbing dye on nanoparticles  
10       having an average size of not greater than 100nm and dispersing the dye-supporting nanoparticles within a carrier or vehicle, such an ink or resin. This may be achieved by using a unique nanomilling technique which reduces the average particle size to a dimension not greater than 100nm, i.e. well below that of the wavelength of visible light (400-700nm).

15           The nanomilling technique optimises the particle size distribution and level of dispersion by tailoring its surface chemistry to the specific matrix employed. Both particle size distribution and surface chemistry can be simultaneously varied by incorporating surface modifying agents into the reactive milling process.

          Nanoparticles are produced by a nanomilling process. This nanomilling  
20       process produces particles with a distribution of sizes. The nanomilling process used involves putting two particulate entities together, the dye and the carrier particle, in a matrix or mill base and then milling. During the milling process dye based materials are incorporated into/onto the carrier particle as it undergoes comminution. This process avoids agglomeration or separation of the dye into a  
25       separate phase within the matrix and is used to disperse the IR nanoparticles within the final carrier ink or resin without agglomeration. Preferably, the dye based nanoparticles are then dispersed throughout the resin. By supporting the dye on nanoparticles of selected clays a bathochrome wavelength shift to higher NIR wavelengths occurs. This not only allows a very small concentration of IR  
30       pigments/dyes to be used to achieve a visually transparent coating but with a stronger and broader absorption range in the IR region. Nanoparticles have one or more of their dimensions substantially smaller than the wavelength of visible light (400-700nm) and thus have the potential to appear transparent when

dispersed in a coating or thin film. Consequently, the spacing between nanoparticles when dispersed in a matrix is critical for potential transparency to be achieved. Because the dye is supported on carrier nanoparticles, when these are effectively dispersed the dye itself will also be effectively dispersed such that it does not substantially affect the transparency of the coating/film resin matrix to visible light while simultaneously allowing it to be detected by IR sensors.

It is important that the window on polymer banknotes remains transparent for security purposes. However, it must be able to absorb IR for machine detection. Most IR absorbing materials are green, this provides approximately 40% absorbency. Therefore, it is necessary to have smaller IR absorbing particles, preferably having an average size of not more than 100 microns.

Most IR absorbing dyes have poor light fastness. The IR absorbing dyes and nanoparticles mixed in overcoat UV resin in this invention are robust and can survive harsh chemicals and QUV exposure. Figure 9 illustrates the percentage transmission vs wavelength for IR 788 at varying concentration in UV cured resin before and after QUV exposure.

The use of nearly transparent IR inks on the window will allow use of larger windows on the banknote design which will not be an impediment in the IR sensor. The presence of IR properties in these ink systems will make it easier for the IR sensors to detect the presence of a banknote even with a larger window.

Semiconductor materials such as metal oxides can be processed from sub-micron size to nanoparticulate size using the nanomilling technique. The nanoparticulate can then be applied on a clear banknote window for authentication using IR sensors in banknote processing machines.

Alternatively, the IR absorbing material could be applied over an opaque portion of the banknote, to provide a covert security feature, for example, an IR signature.

The preparation and trials of some different IR absorbing materials will now be described.

### **Inorganic Additives**

Lanthanum hexaboride ( $\text{LaB}_6$ ) and indium tin oxide (ITO), both IR absorbing inorganic materials were used to make transparent infrared absorbing materials.

Firstly, wet formulation dispersions and/or nano-dispersions were prepared using proprietary milling protocol/techniques and normally included a predetermined combination of raw additive, the resin system, a diluent if required, usually methyl ethyl ketone (MEK) and/or a surfactant. Simultaneous size  
5 reduction and chemical modification occurred during this process and required milling times of typically greater than 24 hours. At the end of a mill run, grinding media is separated from the mill base by either centrifugation or sieving. This mill base concentrate was then used to prepare films and/or coatings.

Sprayed films on Mylar (clear PET) targeted formulations in the uncured  
10 polymer resin system. The coating liquid was thinned down with spraying thinners (2 parts to 1) and sprayed with one coat. This was left for 20 minutes for the solvent to evaporate. Film thicknesses were typically 5-10 microns thick.

Films were cured by UV using an Ecocure 1 Bench Top Laboratory UV cure unit. The light source is a medium pressure mercury vapour lamp (1.5kW),  
15 controlled by two level power (high: 120 watt/cm<sup>2</sup>, low: 70 watt/cm<sup>2</sup>) with conveyor speeds ranging from 0.550m/min; irradiation zone of 180x25mm (belt width/length 180mm/1900mm). Curing was judged by loss of tackiness of the test coating and no generation of discolouration.

The spectral properties of the films were determined using a  
20 spectrophotometer in absorption/transmission mode typically across a wavelength range of 300nm - 3000nm.

Lanthanum hexaboride (LaB<sub>6</sub>) and indium tin oxide (ITO), two IR absorbing inorganic materials were used. LaB<sub>6</sub> absorbs between 750nm and 1400nm and is generally only available as micron sized particles (approximately 10 microns).  
25 Indium tin oxide (ITO) absorbs from 1200nm to greater than 2400 nm. ITO is available as nanometric size particles (40nm).

Nanomilling conducted with LaB<sub>6</sub> and ITO resulted in particle sizes of 40-80nm for LaB<sub>6</sub> and approximately 25nm for ITO. Dispersants can be used to assist comminution and restrain however, they do not eliminate agglomeration.  
30 Formulations using high concentrations of LaB<sub>6</sub> pigment loading (up to 10%) in UV curing resin alone, i.e. no diluent, resulted in substantial flocculation rendering the dispersion unusable. When the same formulation was prepared using dispersants flocculation occurred.

Figures 4 and 5 show typical UV-Vis-NIR transmission profiles for a series of UV curing films containing nanoparticles of  $\text{LaB}_6$  only (Figure 4) and films containing based on nanoparticles of  $\text{LaB}_6$  and ITO. In Figure 4, line 41 is the transmission profile for a wet  $7.9\mu\text{m}$  film thickness, line 42 for a wet  $4.8\mu\text{m}$  film thickness, line 43 for a dry  $5.0\mu\text{m}$  film thickness and line 44 for a dry  $3\mu\text{m}$  film thickness. This figure shows that the use of  $\text{LaB}_6$  alone has good potential but requires optimisation of wettability, dispersion and coating processing.

In Figure 5 line 51 is the transmission profile for a nanomilled resin without additive, line 52 for resin containing 5% ITO, line 53 for  $\text{LaB}_6$  with surfactant Solsperse 24000 and line 54 for  $\text{LaB}_6$  with surfactant Solsperse 17000.

The NIR absorption band for  $\text{LaB}_6$  is in the desired spectral range (900-1000nm). However, for ITO NIR absorption is only effective above approximately 1500nm.

High NIR absorption and low transmission (less than 50%) requires elevated loadings (up to 5 wt%) to achieve the target NIR range with  $\text{LaB}_6$ . High NIR absorption and low transmission (less than 50%) with high visible transparency (approximately 70%) is achieved in the target NIR range.

Elevated  $\text{LaB}_6$  loadings (greater than 0.44 wt%), compromise coating colour and also compromise the gloss finish appearance of the coatings. This gives rise to a stippled matt finish presenting an increasingly speckled appearance. At lower loadings this effect is less pronounced.

The use of  $\text{LaB}_6$  alone requires optimisation of wettability, dispersion and coating processing. Its use in combination with a NIR dye is more promising.

#### **NIR Absorbing Dyes**

BASF Lumogen IR 765 and Lumogen IR 788, perylene-based IR dyes, are visibly transparent in plastics while absorbing in the IR. They are usually marketed for use in the laser welding of plastics.

Lumogen IR 765 incorporated into PVB (polyvinyl butyral) shows 60% reduced NIR transmission between 700-800 nm with high visible transmission (>90%). When coated onto nanoparticles of  $\text{LaB}_6$  a further reduction in IR transmission to about 50% resulted but the visible transmission was compromised from 90% to about 70%. When the same dye was incorporated into a UV curing resin and cured, even at concentrated levels, little or no solubilisation

occurred presumably due to the dye recrystallising, producing blotchy films with little or no IR absorption.

Lumogen IR 788 is effective in controlling NIR transmission between 0% and 90% in the near desired range when incorporated into the existing base resin. It is not significantly affected by exposure to UV during curing or prolonged QUV exposure. Colour shift in the coatings after prolonged QUV exposure is minimal ( $\Delta E^*$  is less than 3) and high visible transmissions can simultaneously be attained. Lumogen IR 788 was incorporated into UV cured films at both high and low concentration and cured in the usual way. At high dye concentrations IR transmission was reduced to almost 0% but some compromise in visible transmission. At low concentrations there is little absorbance because the optical density of the dye was too low. The dye was not significantly affected by exposure to UV during curing. This is shown in Figure 6 (concentrated and diluted) and Figure 7 (systematic concentration variation). In Figure 6, line 61 shows the uncured concentrate, line 62 the uncured dilution, line 63 the cured concentrate and line 64 the cured dilution. In Figure 7, line 71 shows a dye concentration of 0.25%, line 72 a dye concentration of 0.5%, line 73 a dye concentration of 0.75%, line 74 a dye concentration of 1.0% and line 75 a dye concentration of 1.6%. Figure 8 shows the reflectance vs wavelength for coatings containing varying concentrations of Lumogen IR 788. Line 81 shows a dye concentration of 0.25%, line 82 a dye concentration of 0.5%, line 83 a dye concentration of 0.75% and line 84 a dye concentration of 1.0%.

A common constraint that limits the wider use of dyes is their light stability. A series of UV cured coatings containing a systematically varied (Lumogen) dye concentration (0.25 - 1% dye) were exposed to UV for three days (72hrs) in a Q-Lab accelerated weathering cabinet using a lamp UV wavelength of 340 nm, energy intensity of  $0.6 \text{ W/m}^2$  and a set temperature of  $40^\circ\text{C}$ . No condensation cycle was used. Figure 9 displays the transmission vs wavelength for UV cured coatings containing varying concentrations of Lumogen IR 788. The UV-Vis-NIR spectra before and after exposure of each sample was compared (for straight dye) and this is shown in Figure 9. In Figure 9, line 91 shows an IR788 dye concentration of 0.25% after QUV exposure, line 92 a 0.25% concentration of IR788 before QUV exposure, line 93 a 0.5% concentration of IR788 after QUV



exposure, line 94 a 0.5% concentration of IR788 before QUV exposure, line 95 a 0.75% concentration of IR788 after QUV exposure, line 96 a 0.75% concentration of IR788 before QUV exposure, line 97 a 1.0% concentration of IR788 after QUV exposure, and line 98 a 1.0% concentration of IR788 before QUV exposure.

5 Figure 9 indicates that the Lumogen 788 dye is relatively insensitive to prolonged QUV exposure (approximately 3 days). This is advantageous when exposed to many detectors.

The measured colour shift for the straight dye is shown in the table of Figure 10. Figure 10 indicates that the colour shift in the coatings after prolonged  
10 QUV exposure is also minimal ( $\Delta E^*$  is less than 3). Therefore, even when exposed to multiple detectors or other QUV exposure the coatings will not significantly change colour.

The resin may contain pre-added solids for example talcs, silicas to improve printability, though the spectral performance can be improved if the base  
15 resin is clarified to reduce the pre-added solids. The spectral performance is improved by increasing the visible transmission and reducing the NIR transmission, this is shown in Figure 11. In Figure 11, line 111 shows the clarified resin and line 112 the unclarified resin.

### **Dye With Nanoparticles**

20 Lumogen IR 765 absorbed onto  $\text{LaB}_6$  in PVB showed increased IR absorption over the dye itself. UV curing films were prepared that included Lumogen IR 765 on AluC (25nm  $\text{Al}_2\text{O}_3$ ). In manually prepared films (wet and dry) a broad IR absorption band was observed with no absorption “spike” as had been observed with Lumogen IR 765 on  $\text{LaB}_6$  in PVB. This was attributed to the non-  
25 solubilisation (recrystallisation) of Lumogen IR 765 in the UV curing resin.

Lumogen IR 788 was milled in UV curing resin with various nanoadditive substrates e.g. AluC, Cloisite 30B and a series of modified fluoromica clays. The transmission vs wavelength profile for these materials is shown in Figures 12 and 13. In these figures, line 121 shows the profile for 3.2% MEE (modified with  
30 dipolyoxyethylene alkyl ammonium) spun UV curing clay resin, lines 122, 123 and 124 show the profiles for Lumogen IR 788 in a UV curing resin at concentrations of 0.5% (dry), 0.75% (wet) and 1% (wet), and lines 125, 126 and 127 show the profiles for Lumogen IR 788 at a concentration of 0.48% in the following UV

curing resins : 3.2% Fuoromica ME100 spun clarified UV resin, 3.2% AluC spun clarified UV resin and 3.2% Fuoromica MEE (modified with dipolyoxyethylene alkyl ammonium) spun UV curing resin. Figure 13 is similar to Figure 12 and shows a bathochromic shift 129 of approximately 150nm in the dye absorption band which occurs between line 124 and line 127 when the Lumogen IR 788 dye is supported on nanoparticles of Fuoromica MEE (modified with dipolyoxyethylene alkyl ammonium). It was further discovered that this bathochromic shift could be produced during the mixing/milling preparation chemically by the addition of an amine such as triethanolamine or the application of heat applied by, but not limited to, radiant, inductive, sonication or microwave means such that the mixture was heated to a temperature above ambient but below 100°C, Furthermore, it was discovered that a hypsochromic shift could be produced in these systems chemically by hydrolysing with an organic acid so as to reduce the absorbance wavelength from approximately 870nm to 725nm.

Thus supporting an IR absorbing dye on nanoparticles of alumina or selected clays can broaden the absorption profile in the NIR region compared to the dye alone. A further advantage is that the molal absorption coefficient appears to be improved when supported on specific substrates. This allows the design of broader NIR absorption profiles by anchoring the IR absorbing dye onto nanoparticles such as nanoclay platelets.

The use of visually transparent materials based predominantly on NIR absorbing semi-conductor nanoparticles offer several advantages over straight NIR dyes. One advantage is improved thermal and environmental durability. Other advantages include broad NIR absorption characteristics and the potential for a lower cost product.

Such materials have the advantage of providing sufficiently detectable optical density in the NIR region without substantially compromising NIR optical attributes, visible transparency and/or colour or other non spectral material performance properties.

#### **Example – Bathochromic Shift with Cloisite 30B**

Formulations of a demonstration dye IR122 with Cloisite 30B and without Cloisite 30B were nanomilled and their absorbance measured. In Figure 14, line 141 represents the formulation with Cloisite 30B added and line 142 without

Cloisite 30B added. A bathochromic wavelength shift 143 was observed when Cloisite 30B was included.

**Example – Bathochromic Shift (Thermal)**

Figure 15 shows that a bathochromic shift is driven by elevated  
5 temperature using Lumogen 788 and MEE.

In this example, a formulation including 0.5% by weight of Lumogen IR788 and 3.2% by weight of Somasif MEE was nanomilled and its absorbance measured (but not heated) (line 151). The same formulation was then heated to slightly less than 100°C, remilled and its absorbance measured (heated) 152. A  
10 bathochromic wavelength shift was observed 153.

Another example shown in Figure 16 shows a bathochromic shift driven by elevated temperature using Lumogen 788 and Cloisite 30B.

In this example formulations of 0.5% by weight of Lumogen IR788 with different amounts of Cloisite 30B were nanomilled and their absorbances  
15 measured (not heated). Lines 161 and 162 respectively represent the absorbance spectra for formulations including 0.5% by weight of Lumogen 788 nanomilled with amounts of 3.2% and 1.2% by weight of Cloisite 30B measured at ambient temperature. Lines 163 and 164 represent the absorbance spectra for similar formulations (in duplicate) containing 1.6% by weight Cloisite 30B heated  
20 to slightly less than 100°C, remilled and their absorbance measured. In the heated duplicates 163,164, a bathochromic wavelength shift 165 was observed.

These examples show that increasing the Cloisite (clay) content from 1.2 wt% to 3.2 wt% does not induce the shift, ie the clay itself does not induce the shift. The heated sample at a 1.6 wt% Cloisite (clay) content was repeated to  
25 confirm that heat induces the effect. The slight difference in intensity difference between the two is likely due to experimental variability (probably slight differences in temperature). The effect of temperature is thus confirmed by duplicate behaviour.

In the example of Figure 17 heated 171 and unheated 172 formulations of  
30 Lumogen IR788 (no Cloisite) were nanomilled and their absorbance measured. No bathochromic shift was observed.

The example shown in Figure 17 shows that no bathochromic shift occurs when a clay (eg Cloisite) is not present.

**Example - Hypsochromic Shift Due To Temperature**

Another example shown in Figure 18 shows a hypsochromic shift using Lumogen IR765 and Cloisite 30B when hot milled. In this example, a formulation of 0.5% by weight of Lumogen IR765 and 1.2% by weight of Cloisite 30B was hot  
5 nanomilled at a temperature above 100°C. Its absorbance spectrum is shown at 183. Its absorbance shifted to a lower wavelength. Magnetic stirring 181 at ambient temperature and high shear mixing 182 at about 60°C produced little or no shift while hot milling at >100°C produced a hypsochromic shift 184.

**Example - Bathochromic Shift (Chemical)**

10 Another example shown in Figure 19 shows a chemical bathochromic shift. In this example, two formulations of Lumogen IR788 and Somasif ME100 (unmodified fluoromica) were nanomilled. To one was added triethanolamine (Nitrogen tri-hydroxyethyl, TEA). A bathochromic shift 193 was observed when TEA was added. The absorbance spectra of the formulations without TEA and  
15 with TEA are shown respectively at 191 and 192.

CLAIMS

1. A transparent infrared absorbing material including:  
a carrier vehicle; and  
at least one infrared absorbing dye supported on nanoparticles having an  
5 average size of not greater than 100nm,  
wherein the dye-supporting nanoparticles are dispersed in the carrier  
vehicle such that the infrared absorbing material is substantially transparent to  
visible radiation.
2. A method of producing a transparent infrared absorbing material or ink  
10 formulation including the steps of:  
mixing at least one infrared absorbing dye with particles of an inorganic or  
organic material,  
nanomilling the mixture to produce nanoparticles of the inorganic or  
organic material on which the infrared absorbing dye is supported, the  
15 nanoparticles having an average size of not greater than 100 nm, and  
dispersing the dye-supporting nanoparticles in a carrier vehicle to produce  
an infrared absorbing material which is substantially transparent to visible  
radiation.
3. A material according to claim 1 or a method according to claim 2 wherein  
20 the average size of the nanoparticles is at least 30 nm.
4. A material or method according to any one of the preceding claims wherein  
the average size of the nanoparticles falls substantially within the range from  
30nm to 100nm, and more preferably from about 50nm to about 80nm.
5. A material or method according to any one of the preceding claims wherein  
25 the carrier vehicle is a printing medium.
6. A material or method according to claim 5 wherein the printing medium is  
an ink or resin.

7. A material or method according to any one of the preceding claims wherein the carrier vehicle includes a polymer-based resin.
8. A material or method according to any one of the preceding claims wherein the carrier vehicle is substantially transparent to visible radiation.
- 5 9. A material or method according to any one of the preceding claims wherein the nanoparticles are formed from at least one IR absorbing material.
10. A material or method according to any one of the preceding claims wherein the nanoparticles are formed from at least one conducting, semi-conducting material or insulating material.
- 10 11. A material or method according to claim 9 or claim 10 wherein the at least one IR absorbing material for the nanoparticles includes a metallic or semi-conducting species, such as silicon and its compounds, a metal, a metal salt, a metal oxide or a metal nitride, or a mixture of any two or more of these materials.
- 15 12. A material or method according to claim 11 wherein the metallic or semi-conducting species is selected from the group consisting of group 13, group 14, transition metals and rare earth metals.
- 20 13. A material or method according to claim 11 or claim 12 wherein the metallic or semi-conducting species is selected from the group consisting silicon, germanium, the metallic elements of period 3, the metallic elements of period 4, the metallic elements of period 5 and the metallic elements of the lanthanide series.
- 25 14. A material or method according to claim 11 wherein the metallic species for the nanoparticles is selected from alumina ( $\text{Al}_2\text{O}_3$ ), silica ( $\text{SiO}_2$ ), clays and micas, including fluoromica clays and modified montmorillonites, such as Cloisite B, lanthanum and its compounds, such as lanthanum hexaboride ( $\text{LaB}_6$ ), Indium and its compounds, such as indium tin oxide (ITO), and combinations of these materials.

15. A material or method according to any one of the preceding claims wherein the infrared absorbing dye is an organic or complexed dye.
16. A material or method according to any one of the preceding claims wherein the infrared absorbing dye is a perylene-based or dithiolenes-based dye
- 5 17. A material or method according to any one of the preceding claims wherein the at least one infrared absorbing dye is selected from a group including Lumogen 765 and Lumogen 788.
18. A method or material according to any one of the preceding claims that results in a bathochromic or hypsochromic shift.
- 10 19. A method or material according to claim 18 whereby the bathochromic or hypsochromic shift is obtained thermally by elevating the temperature of the formulation.
20. A method or material according to claim 19 wherein the formulation is heated to a temperature of at least 40°C.
- 15 21. A method or material according to claim 20 wherein the formulation is heated to a temperature of up to 120°C.
22. A method or material according to claim 19 wherein the formulation is heated to a temperature falling substantially in the range from 80°C to 100°C.
23. A method or material according to any of claims 19 to 22 wherein the  
20 formulation is nanomilled during or after heating.
24. A method or material according to any one of claims 18 to 23 wherein the bathochromic or hypsochromic shift is obtained chemically by the use of at least one chemical modifier.

25. A method or material according to claim 24 wherein the at least one chemical modifier is selected from a group including amines and hydroxyl-ethyl modified amines.

26. A method or material according to any of claims 18 to 25 wherein the heating and/or chemical modification are performed either as separate treatment steps or simultaneously while the formulation is being prepared under high shear mixing or milling conditions.

27. A security document incorporating a transparent infrared absorbing material according to claim 1 or any one of claims 3 to 26.

28. A security document according to claim 27, wherein the document includes a transparent window and the infrared absorbing material is applied to or incorporated within the window.

29. A security document including a transparent window, wherein an infrared absorbing material is applied to or incorporated within the window.

30. A security document according to claim 29 wherein the infrared absorbing material is an infrared absorbing dye.

31. A security document according to claim 29 or claim 30 wherein the infrared absorbing material includes infrared absorbing nanoparticles having an average size of not greater than 100nm.

32. A security document according to claim 31 wherein the average size of the nanoparticles falls substantially within the range from about 30nm to 100nm, and preferably from about 50nm to about 80nm.



33. A security document according to claim 29 wherein the infrared absorbing material is applied to or incorporated within the window by any one of the following methods: spraying, spin-coating, roll-coating, dip-coating, draw-down coating, direct-printing, offset lithography-printing, gravure-printing, intaglio-printing, letterpress-printing, screen printing, polymer melt processing methods  
5 including injection moulding, extrusion or film processing.

34. An ink formulation including one or more resins or blend of resins, at least one infra red absorbing dye supported on nanoparticles having an average size not greater than 100 nm at least in one direction, wherein the nanoparticles are  
10 dispersed in a carrier vehicle.

35. An ink formulation according to claim 34 wherein the resin or blend of resins is selected from thermoplastic, elastomeric or thermoset resins or an aqueous or solvent based resin dispersion.

36. An ink formulation according to claim 34 or claim 35 wherein one or more  
15 infrared absorbing dyes are supported on the same type of nanoparticle or different types of nanoparticles.

37. An ink formulation according to any one of claims 34 to 36 wherein the formulation further includes at least one other infrared absorbing dye not supported on nanoparticles.

20 38. An ink formulation according to any one of claims 34 to 37 wherein the ink formulation includes other additives, agents or components selected from but not limited to rheology modifiers, flow control agents, surfactants, adhesion promoters, adhesive resins, UV absorbers, flame retardents, surface finishing agents that promote gloss or matt finish, other solvents to improve miscibility or  
25 dispersion or other dispersants.

39. An ink formulation according to any one of claims 34 to 38 wherein the ink formulation includes agents which facilitate bathochromic or hypsochromic shift, for example, amines or hydroxyl-ethyl modified amines.

40. Use of a material according to claim 1 or any one of claims 3 to 26 or use  
5 of an ink according to any one of claims 33 to 39 in the manufacture of a security document.

1 / 10

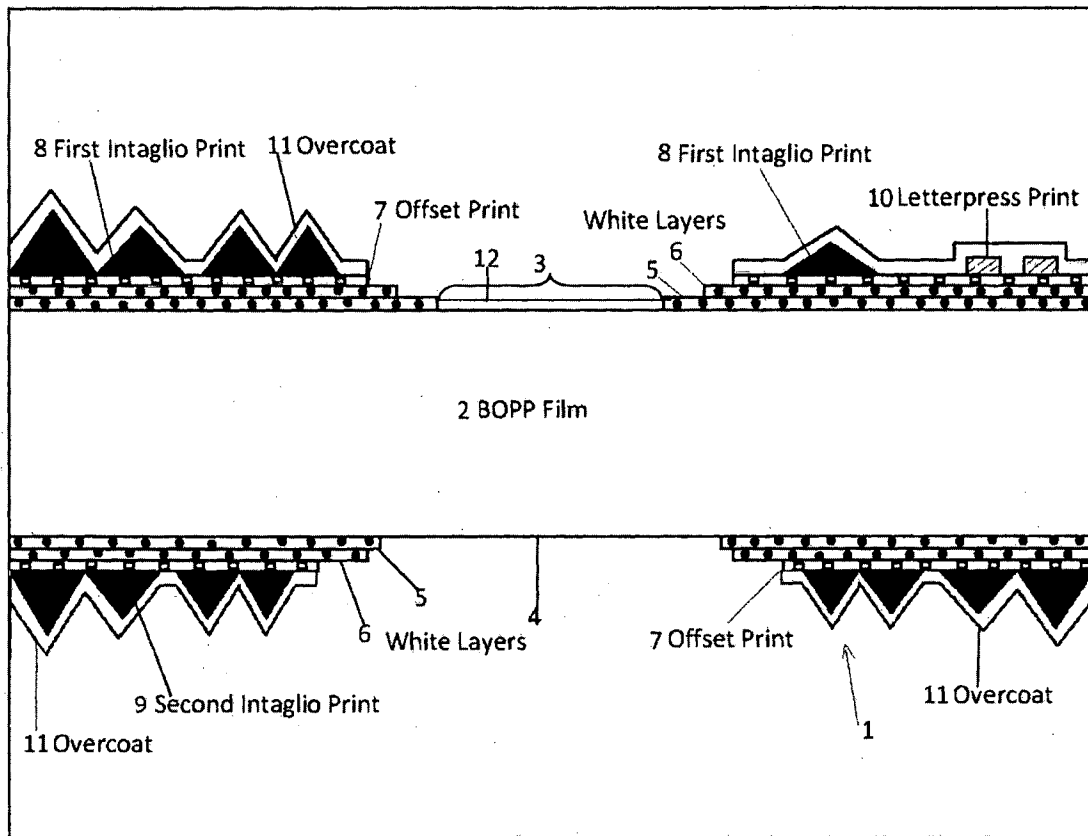


FIGURE 1

2 / 10

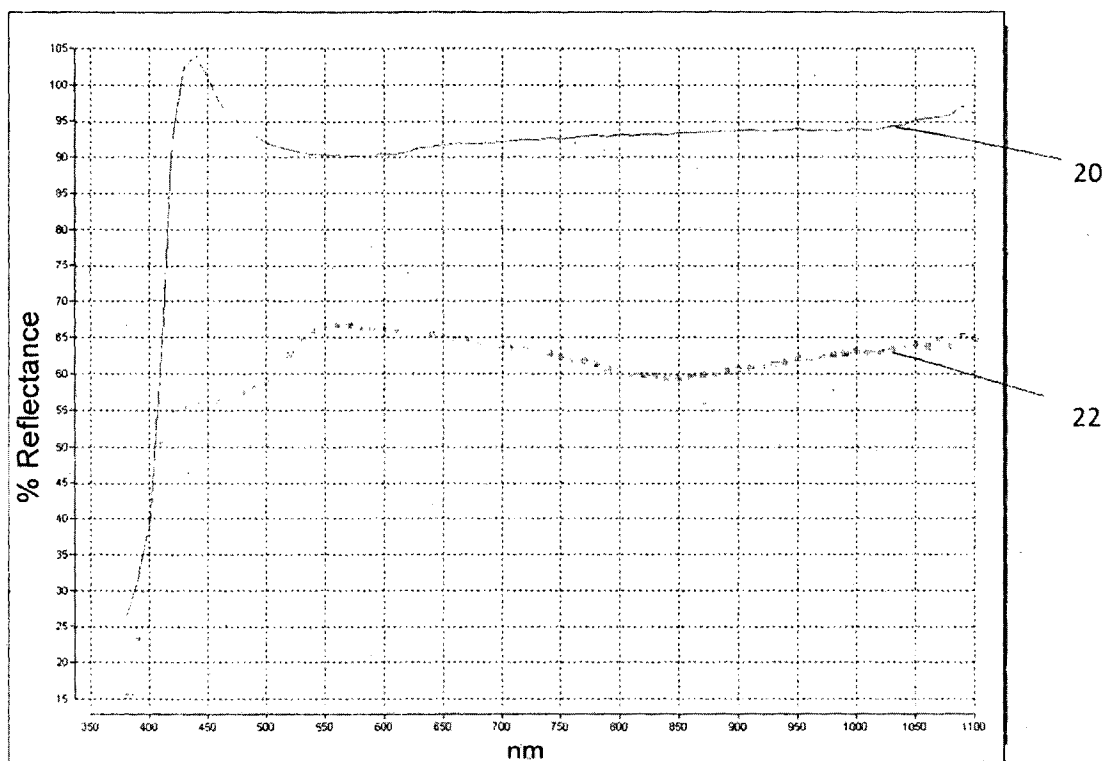


FIGURE 2

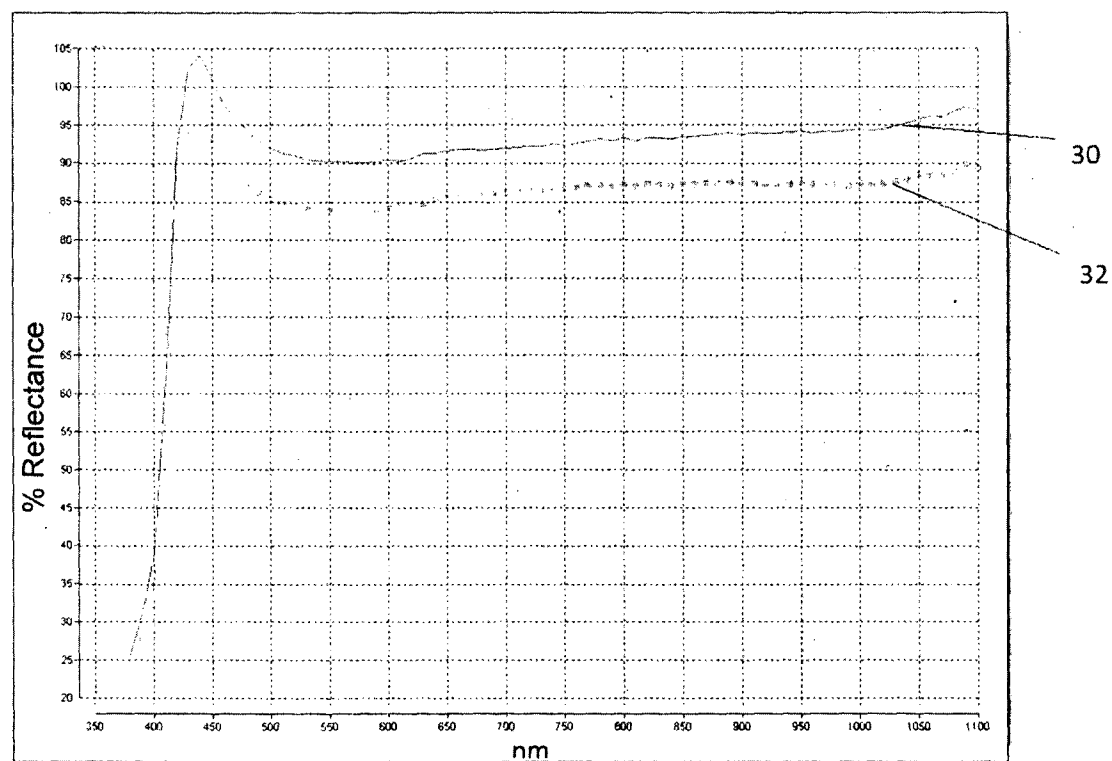


FIGURE 3

3 / 10

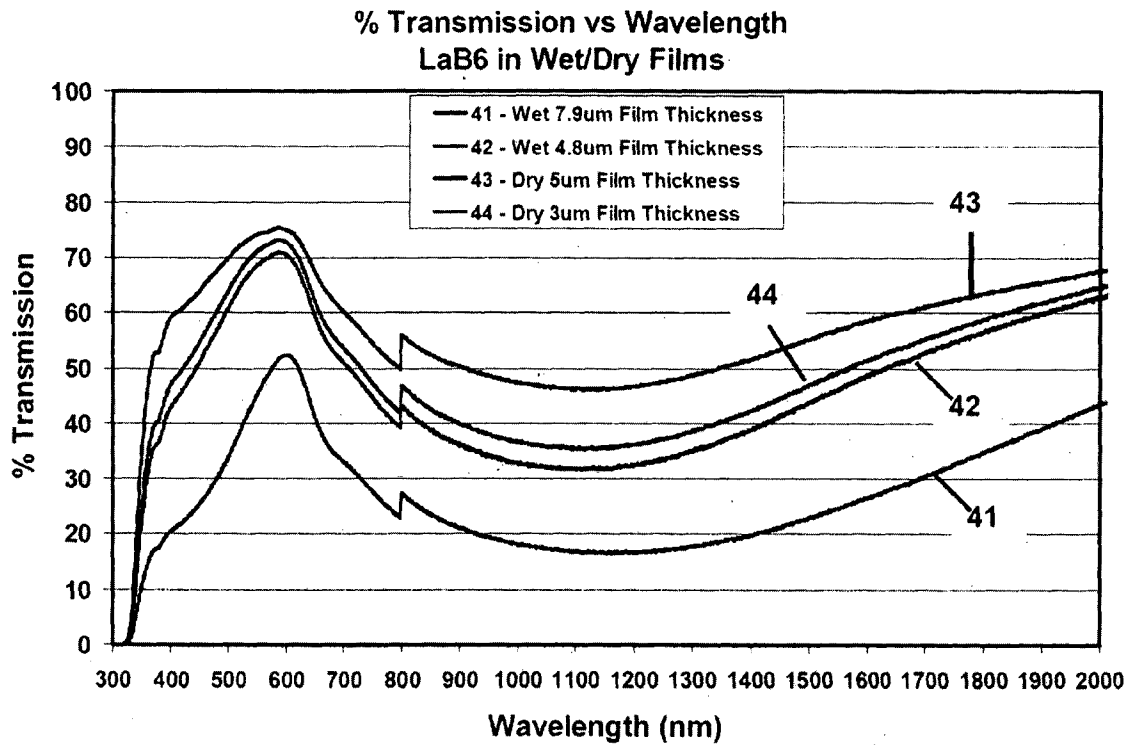


FIGURE 4

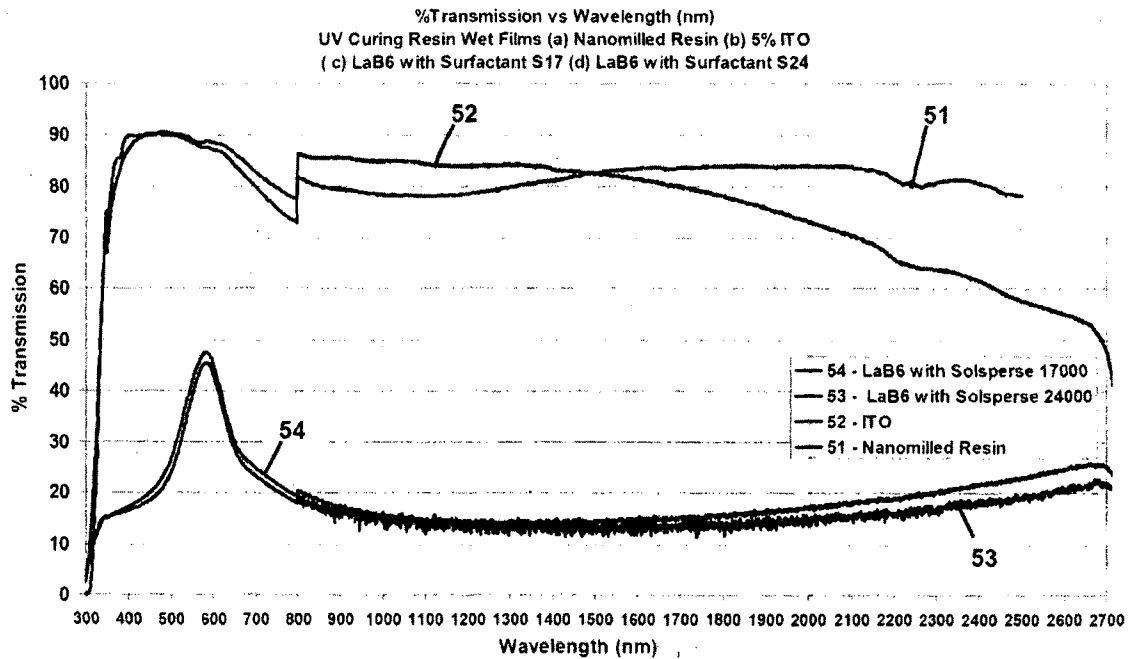


FIGURE 5

4 / 10

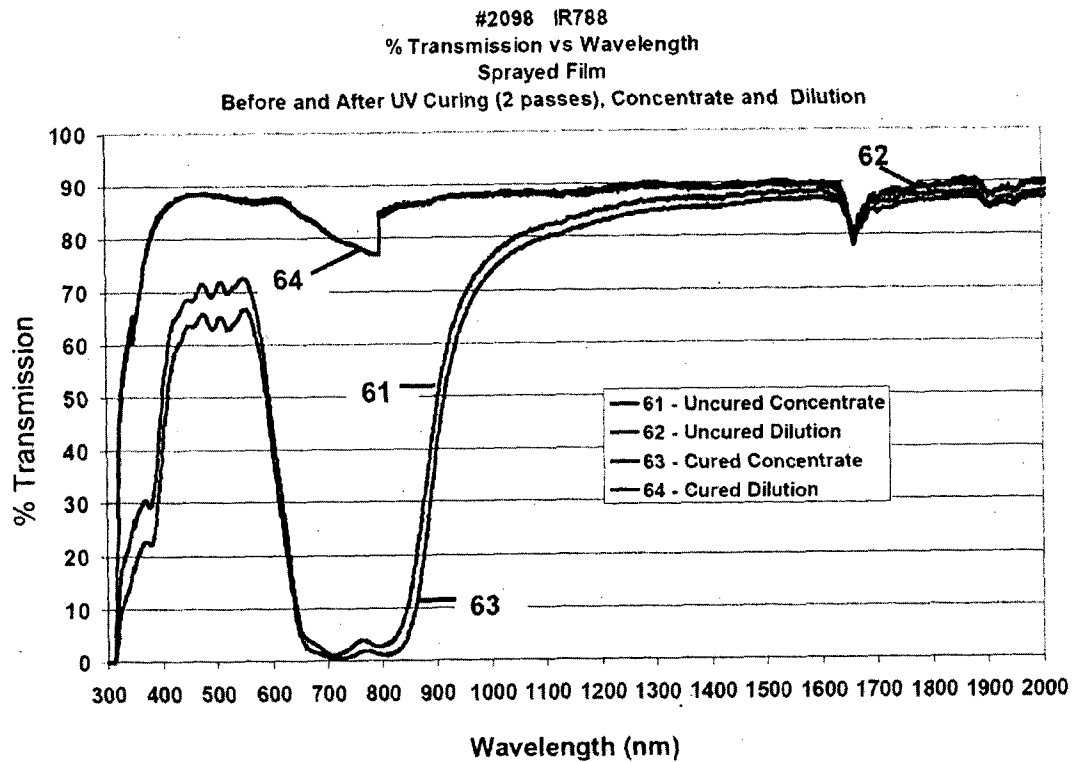


FIGURE 6



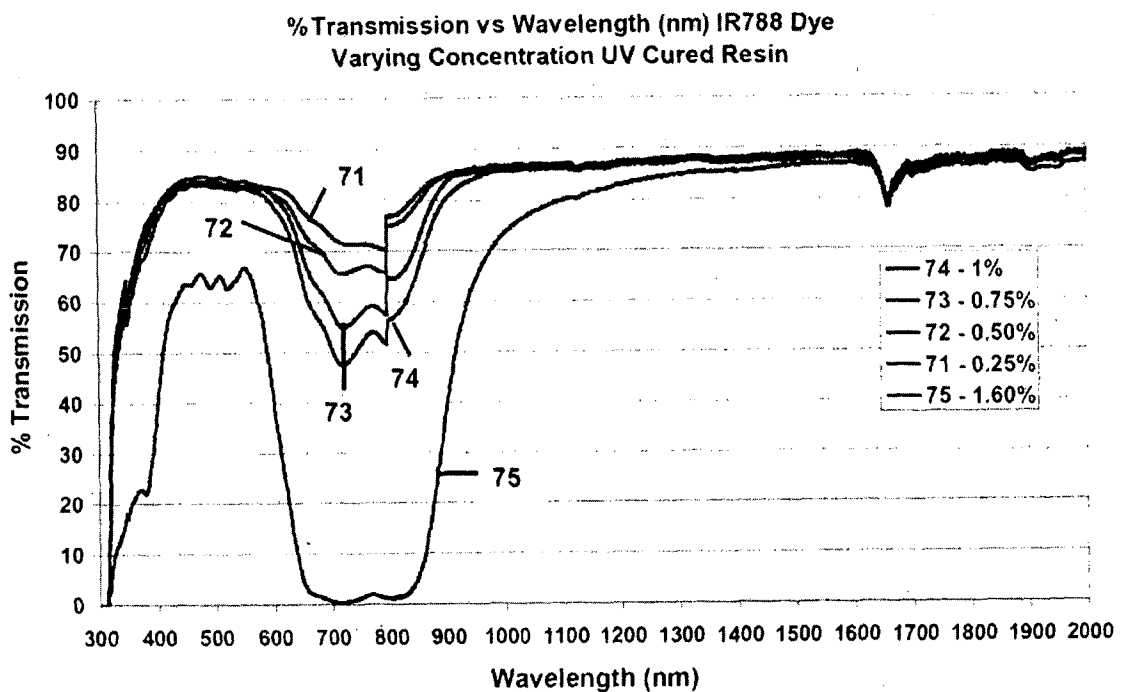


FIGURE 7

5 / 10

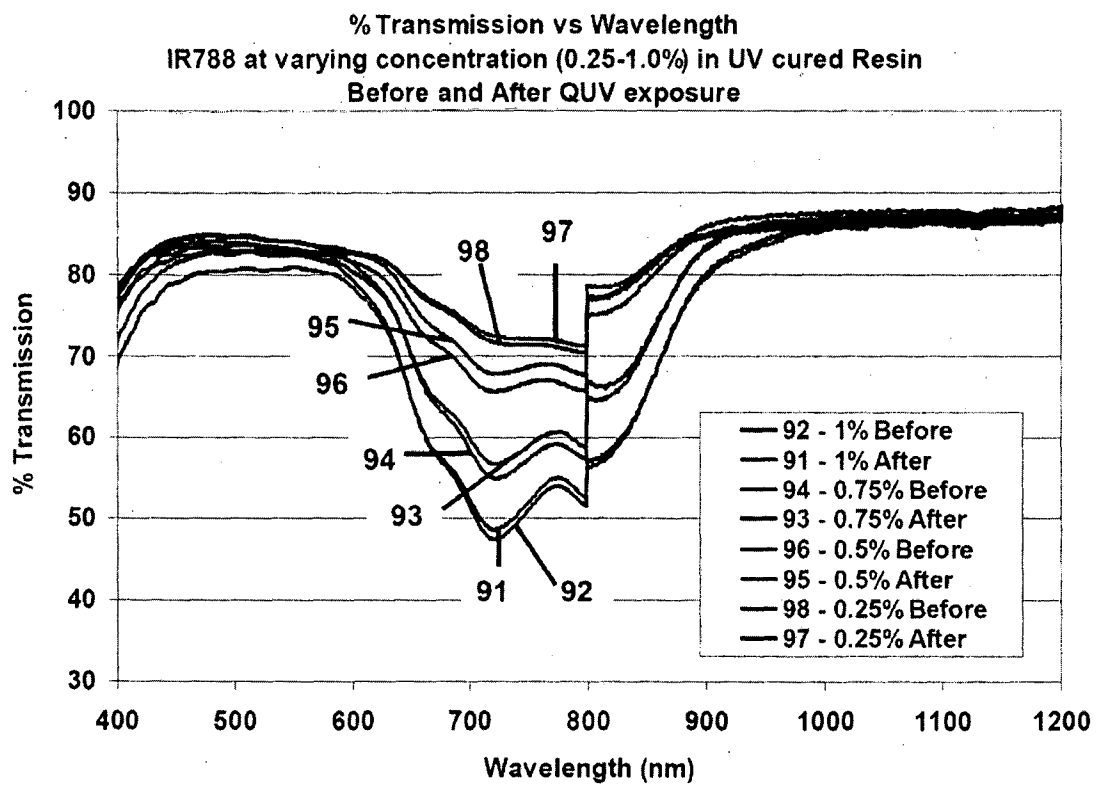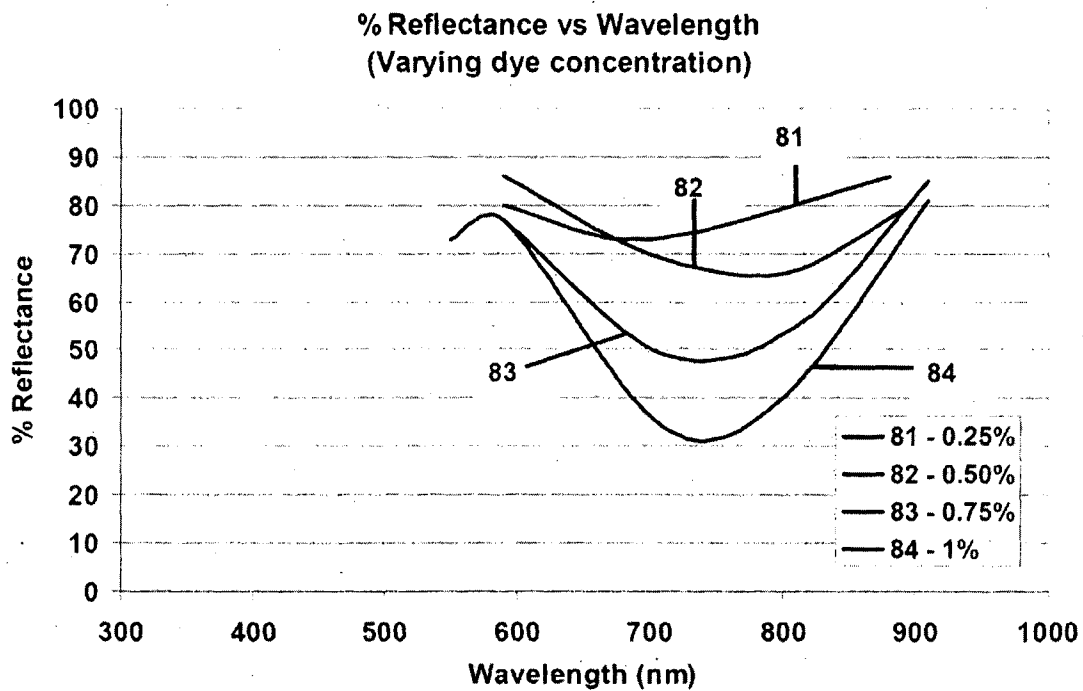

6 / 10

| Colour Change |              |         |       |
|---------------|--------------|---------|-------|
|               |              | Initial | Final |
| 0.25%         | L*           | 91.45   | 91.26 |
|               | a*           | -1.37   | -1.66 |
|               | b*           | 0.59    | 1.15  |
|               | $\Delta E^*$ |         | 0.66  |
| 0.50%         | L*           | 90.95   | 90.72 |
|               | a*           | -2.43   | -2.50 |
|               | b*           | -0.10   | 0.95  |
|               | $\Delta E^*$ |         | 1.08  |
| 0.75%         | L*           | 89.79   | 89.33 |
|               | a*           | -4.27   | -4.36 |
|               | b*           | -0.49   | 1.48  |
|               | $\Delta E^*$ |         | 2.02  |
| 1.00%         | L*           | 88.70   | 87.85 |
|               | a*           | -5.89   | -6.10 |
|               | b*           | -0.87   | 1.76  |
|               | $\Delta E^*$ |         | 2.77  |

FIGURE 10

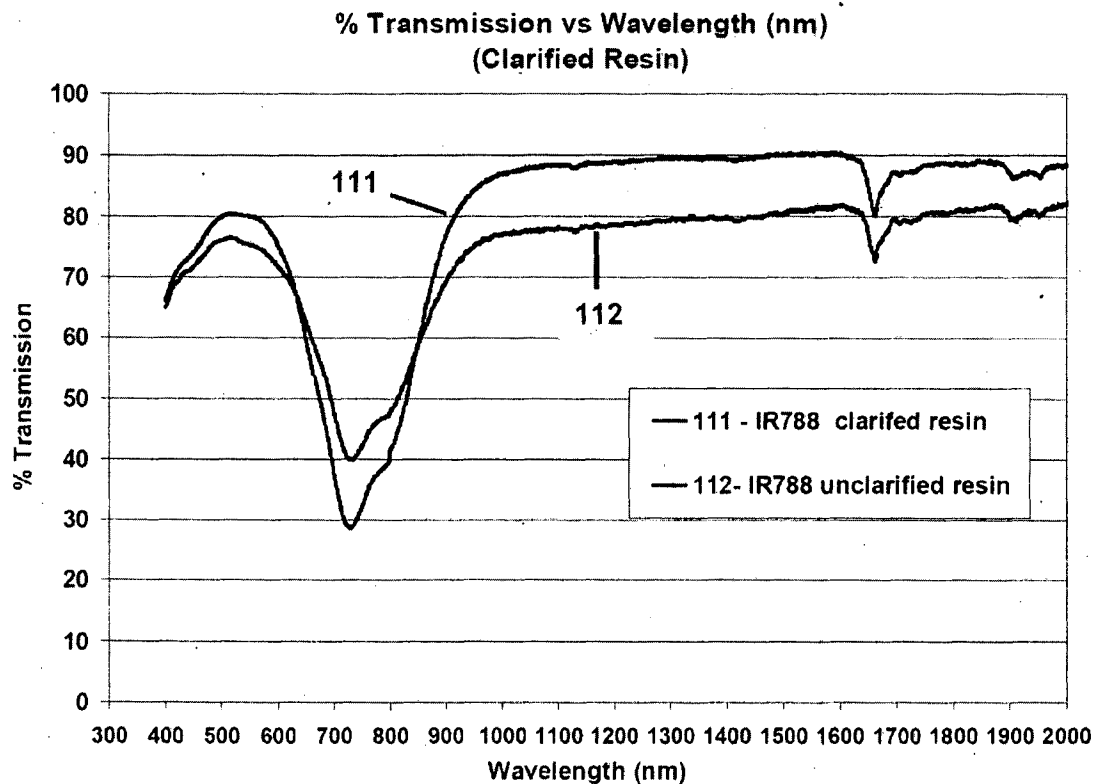


FIGURE 11



7 / 10

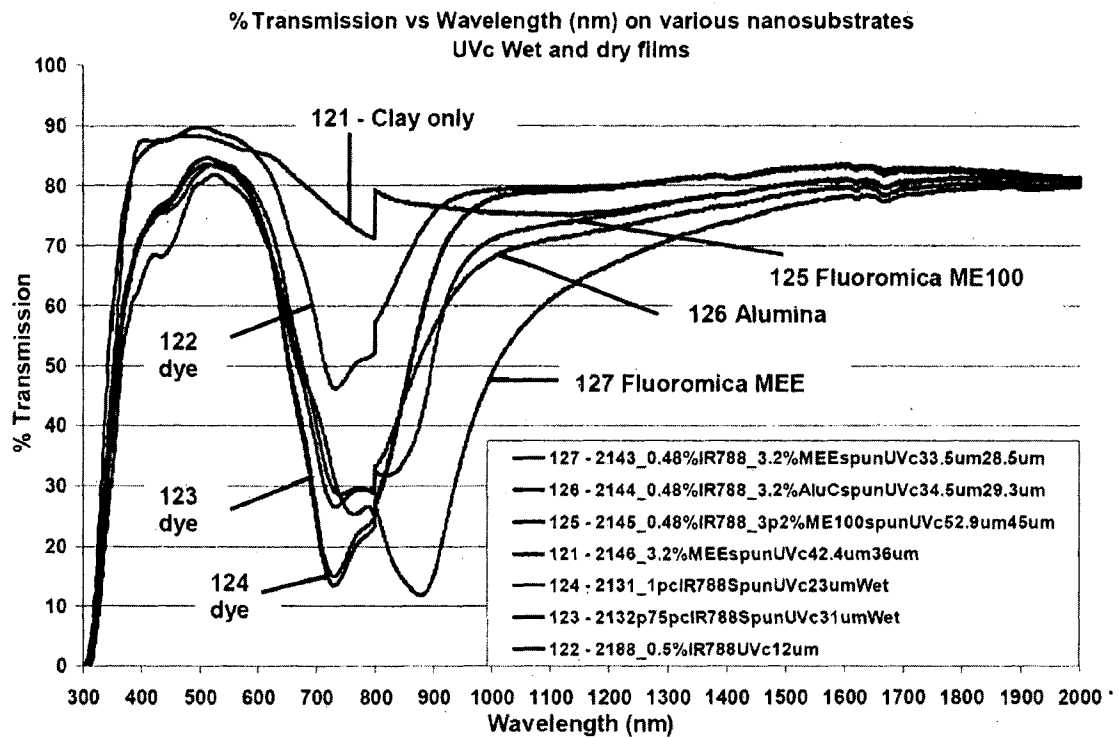


FIGURE 12

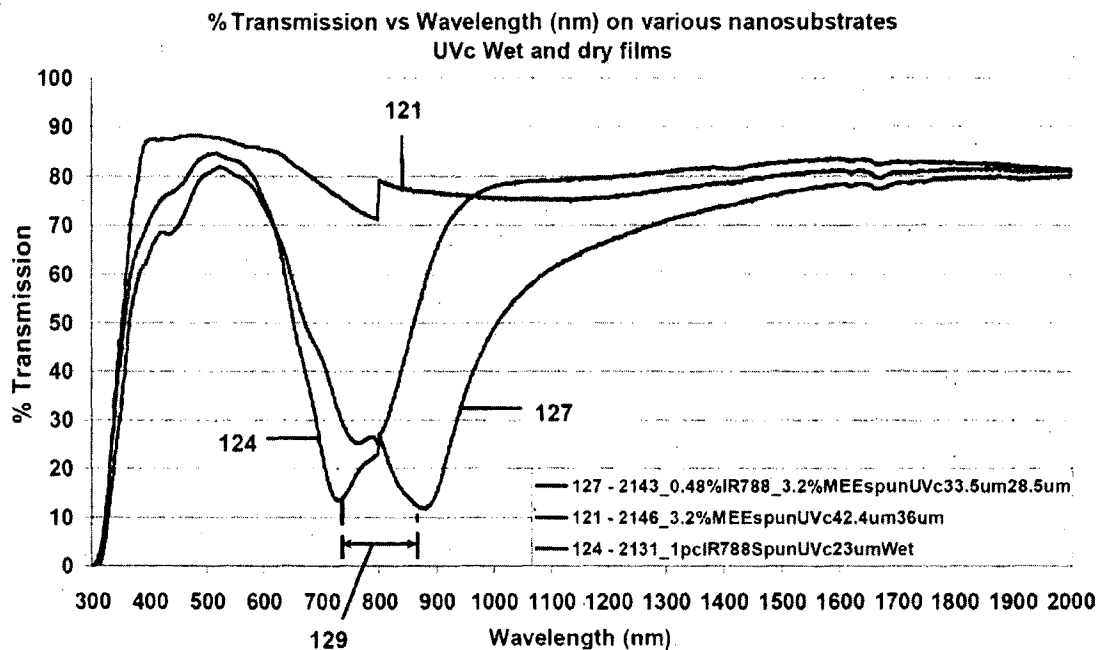


FIGURE 13

8 / 10

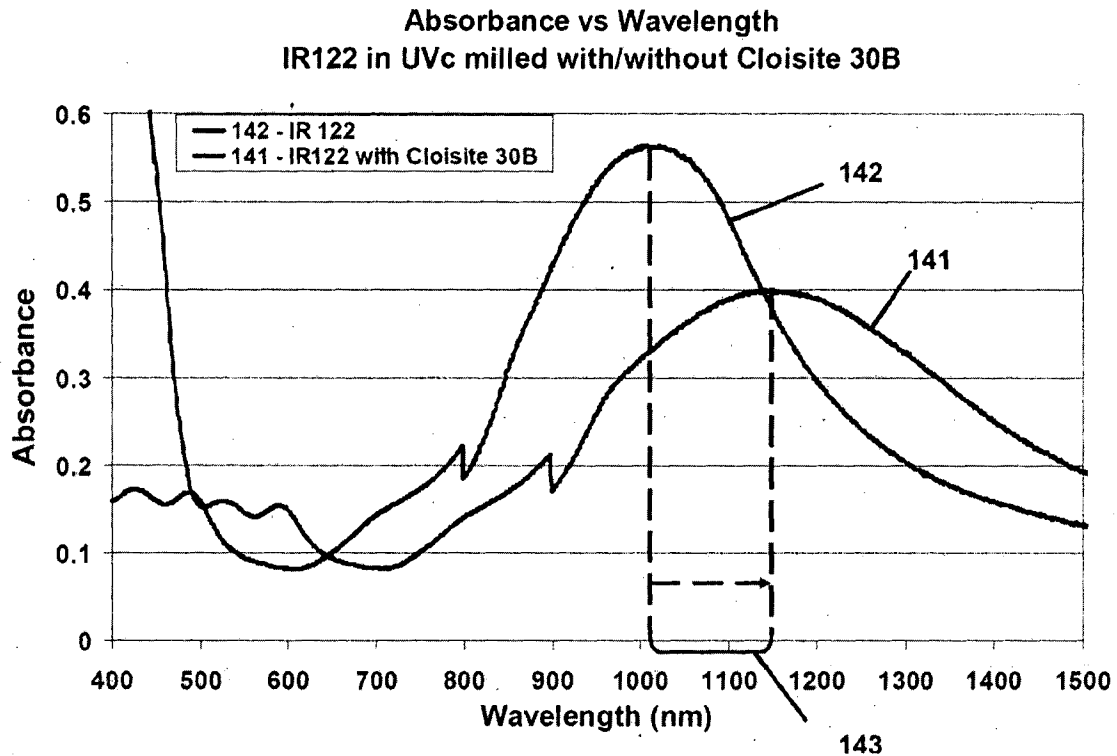


FIGURE 14



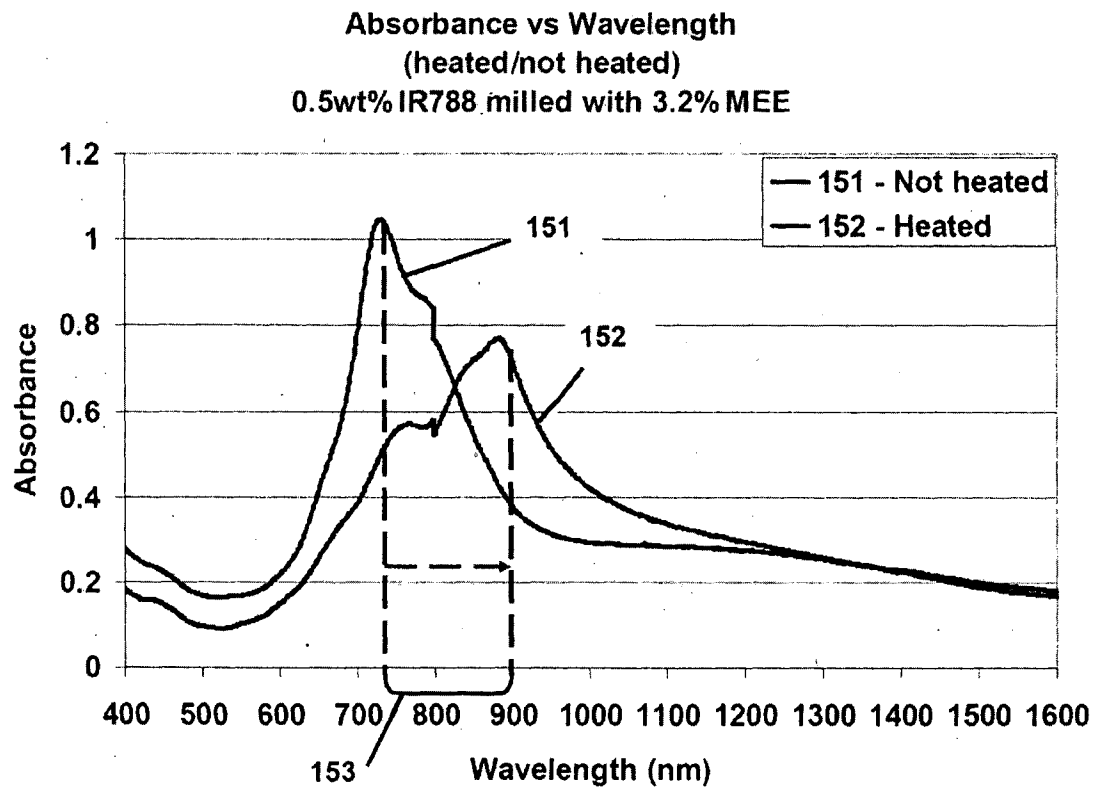


FIGURE 15

9 / 10

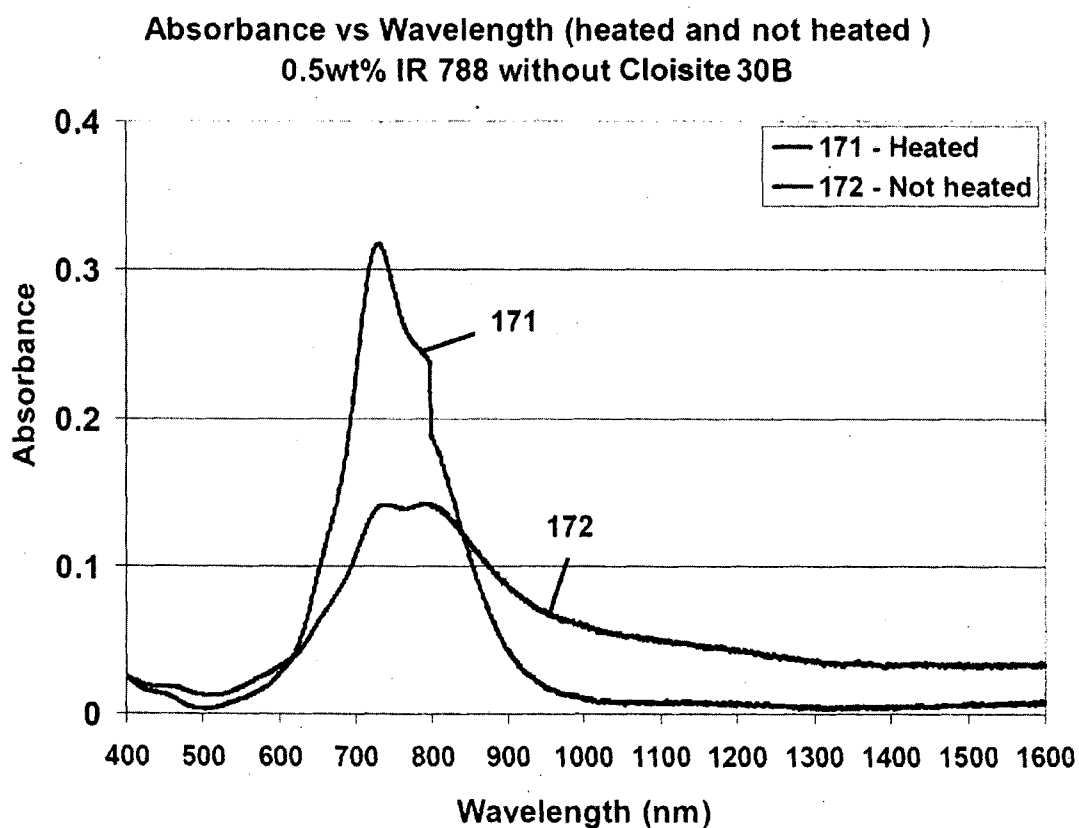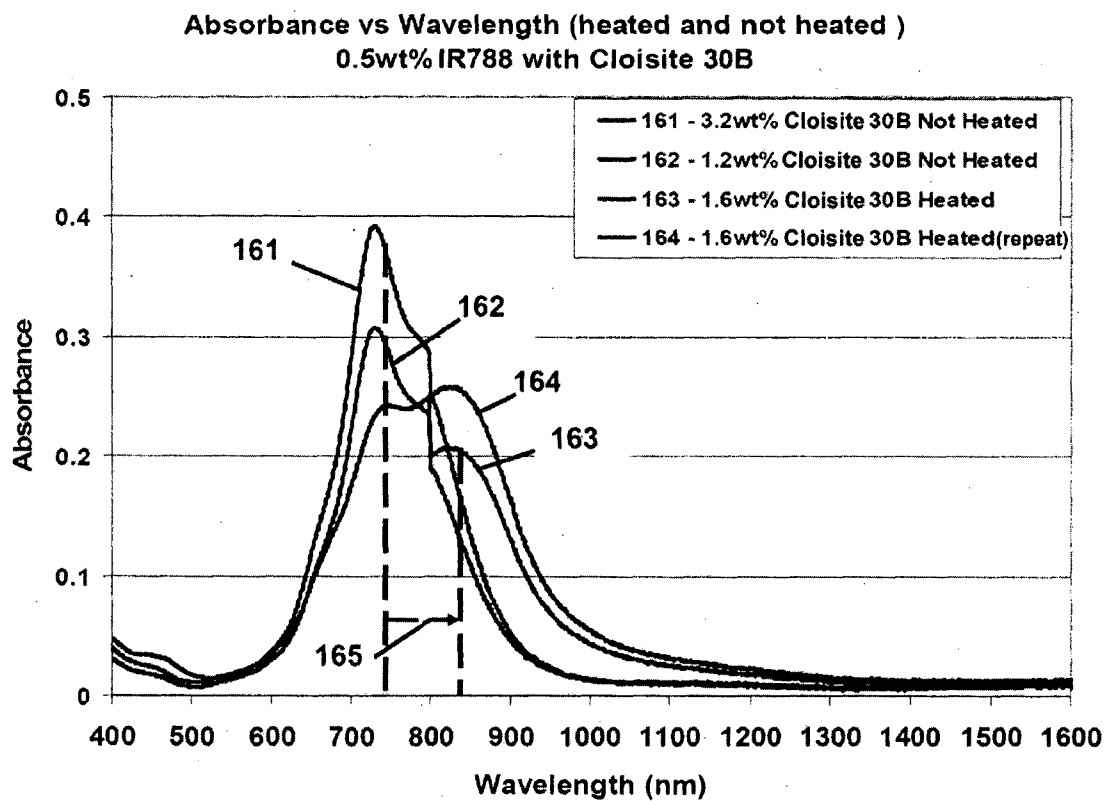

10 / 10

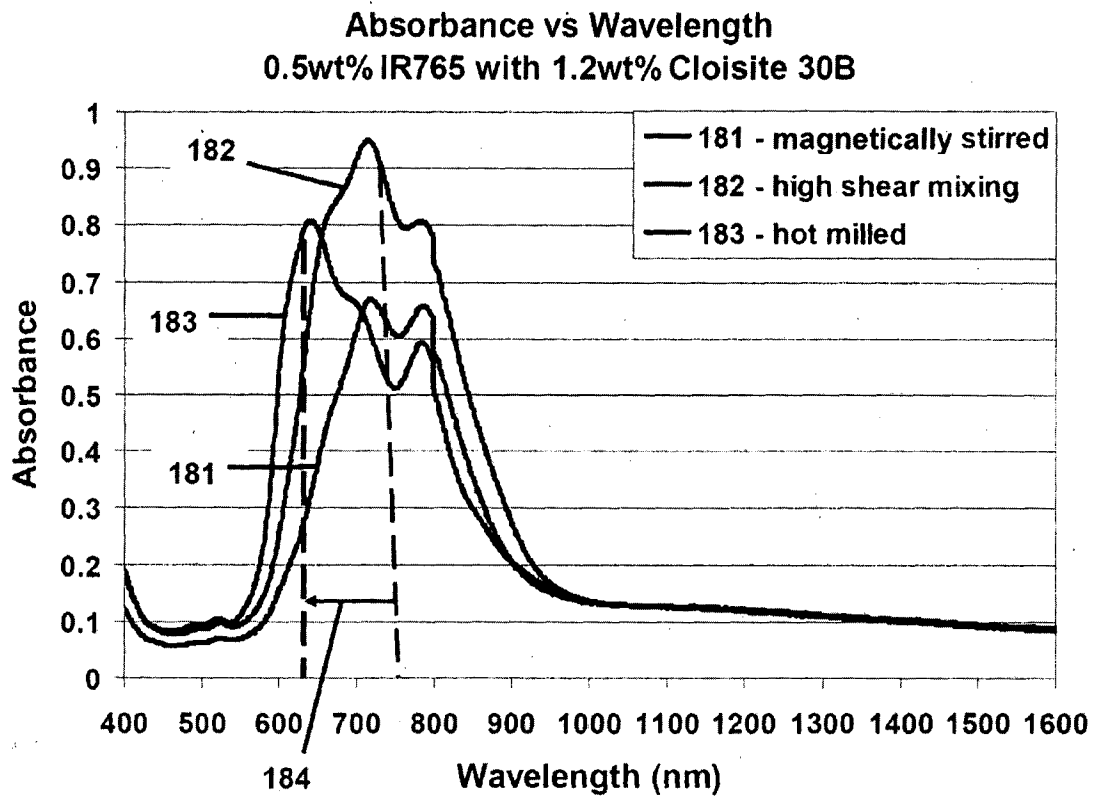


FIGURE 18

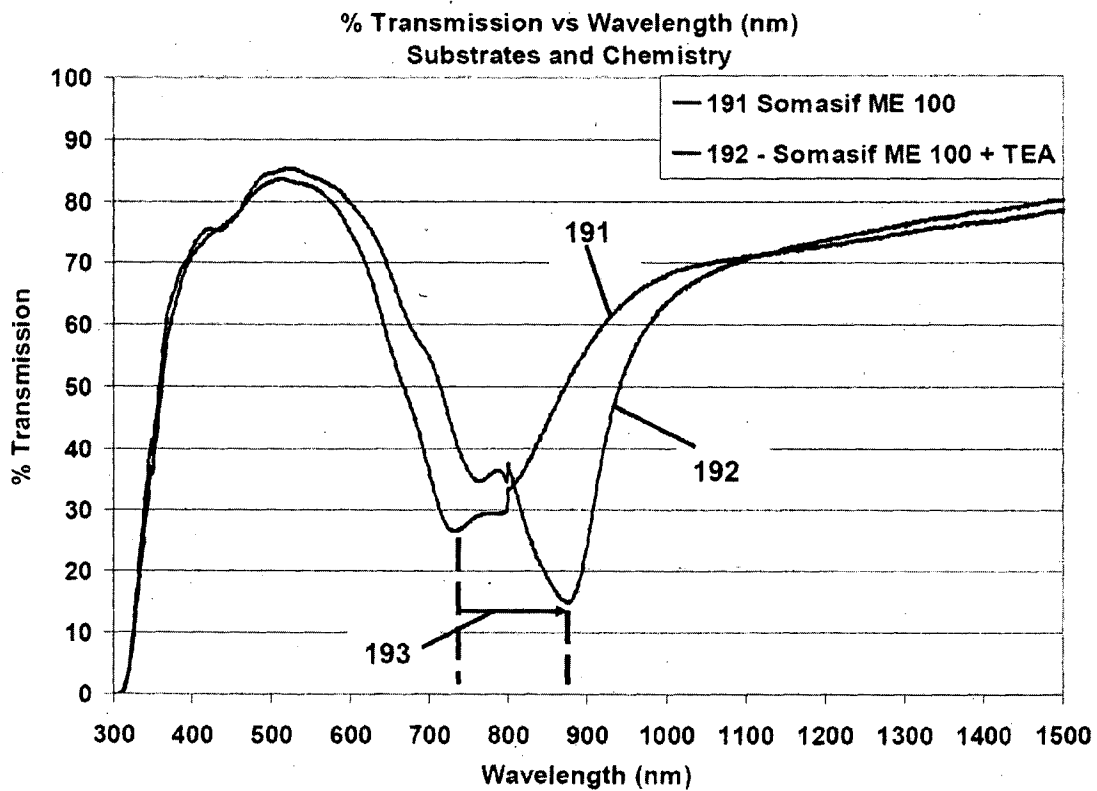


FIGURE 19

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU2012/000078

## A. CLASSIFICATION OF SUBJECT MATTER

Int. Cl. *C08K 9/04* (2006.01) *B44F 1/12* (2006.01) *C09D 11/00* (2006.01)

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPODOC, WPI, CAPLUS: infrared, absorb, dye, nanoparticle, transparent and like terms

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages          | Relevant to claim No. |
|-----------|---------------------------------------------------------------------------------------------|-----------------------|
| X         | US 2007/0210287 A1 (GUERRA) 13 September 2007<br>Examples I & II                            | 1-4, 7-26             |
| X         | US 2009/0093578 A1 (GUERRA) 9 April 2009<br>Examples C, D & E                               | 1-4, 7-26             |
| A         | US 2010/0059691 A1 (LEWIS et al.) 11 March 2010<br>Examples 1-14                            | 1-28, 34-40           |
| A         | JP 2004-168842 A (SUMITOMO METAL MINING CO LTD) 17 June 2004<br>Paragraphs [0039] to [0042] | 1-28, 34-40           |

☒ Further documents are listed in the continuation of Box C☒ See patent family annex

|                                                                                                                                                                         |                                                                                                                                                                                                                                                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| * Special categories of cited documents:                                                                                                                                |                                                                                                                                                                                                                                                  |
| "A" document defining the general state of the art which is not considered to be of particular relevance                                                                | "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention                                              |
| "E" earlier application or patent but published on or after the international filing date                                                                               | "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone                                                                     |
| "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) | "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art |
| "O" document referring to an oral disclosure, use, exhibition or other means                                                                                            | "&" document member of the same patent family                                                                                                                                                                                                    |
| "P" document published prior to the international filing date but later than the priority date claimed                                                                  |                                                                                                                                                                                                                                                  |

Date of the actual completion of the international search  
16 February 2012Date of mailing of the international search report  
30 March 2012Name and mailing address of the ISA/AU  
AUSTRALIAN PATENT OFFICE  
PO BOX 200, WODEN ACT 2606, AUSTRALIA  
E-mail address: pct@ipaustalia.gov.au  
Facsimile No. +61 2 6283 7999Authorized officer  
**N. L. KING**  
AUSTRALIAN PATENT OFFICE  
(ISO 9001 Quality Certified Service)  
Telephone No : +61 2 6283 7953

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU2012/000078

| C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT |                                                                                                                                                                                                                           |                       |
|-------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| Category*                                             | Citation of document, with indication, where appropriate, of the relevant passages                                                                                                                                        | Relevant to claim No. |
| A                                                     | LANGHALS, H. "Control of the Interactions in Multichromophores: Novel Concepts. Perylene Bis-imides as Components for Larger Functional Units", Helvetica Chimica Acta, 2005, Vol. 88, pages 1309-1343<br>Entire document | 24, 25                |
| A                                                     | US 6911254 B2 (FISHER et al.) 28 June 2005<br>Examples 1-11                                                                                                                                                               | 1-28, 34-40           |
| A                                                     | US 7550193 B2 (HU et al.) 23 June 2009<br>Examples 1-3                                                                                                                                                                    | 1-28, 34-40           |

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU2012/000078

**Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)**

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a)

**Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)**

This International Searching Authority found multiple inventions in this international application, as follows:

See Supplemental Sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.: 1-28 and 34-40

**Remark on Protest**

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

**Supplemental Box**

(To be used when the space in any of Boxes I to IV is not sufficient)

**Continuation of Box No. III:**

This International Application does not comply with the requirements of unity of invention because it does not relate to one invention or to a group of inventions so linked as to form a single general inventive concept.

In assessing whether there is more than one invention claimed, I have given consideration to those features which can be considered to potentially distinguish the claimed combination of features from the prior art.

Where different claims have different distinguishing features they define different inventions.

This International Searching Authority has found that there are two different inventions as follows:

Invention 1 consisting of claims 1 to 28 and 34-40 which are directed to a transparent infrared absorbing material or an ink formulation with

- (a) at least one infrared absorbing dye supported on nanoparticles with an average size of not greater than 100 nm, and
- (b) wherein the nanoparticles are dispersed in a carrier vehicle.

It is considered that features (a) and (b) are first and second distinguishing features.

Invention 2 consisting of claims 29 to 33 which are directed to a security document with

- (c) a transparent window, and
- (d) an infrared absorbing material applied to or incorporated within the window.

It is considered that features (c) and (d) are third and fourth distinguishing features.

PCT Rule 13.2, first sentence, states that unity of invention is only fulfilled when there is a technical relationship among the claimed inventions involving one or more of the same or corresponding special technical features.

PCT Rule 13.2, second sentence, defines a special technical feature as a feature which makes a contribution over the prior art.

Because Invention 2 has no distinguishing feature in common with Invention 1 there is *a priori* lack of unity.



## INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/AU2012/000078

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

| Patent Document Cited in Search Report                                                                                    |            | Patent Family Member |             |    |            |
|---------------------------------------------------------------------------------------------------------------------------|------------|----------------------|-------------|----|------------|
| US                                                                                                                        | 2007210287 | US                   | 2007210286  | US | 2009093578 |
|                                                                                                                           |            | WO                   | 2009064860  | WO | 2008134517 |
| US                                                                                                                        | 2010059691 | AU                   | 2007251399  | CA | 2652009    |
|                                                                                                                           |            | GB                   | 2438196     | EP | 2027218    |
|                                                                                                                           |            | WO                   | 2007132214  |    |            |
| JP                                                                                                                        | 2004168842 | NONE                 |             |    |            |
| US                                                                                                                        | 6911254    | AU                   | 2002248140  | BR | 0115342    |
|                                                                                                                           |            | EP                   | 1334151     | CN | 1492908    |
|                                                                                                                           |            | KR                   | 20030066661 | IL | 155888     |
|                                                                                                                           |            | US                   | 2002086926  | JP | 2004518785 |
|                                                                                                                           |            | WO                   | 02060988    | MX | PA03004244 |
|                                                                                                                           |            |                      |             | NZ | 525835     |
|                                                                                                                           |            |                      |             | US | 2003054160 |
| US                                                                                                                        | 7550193    | AU                   | 2007248454  | CA | 2651319    |
|                                                                                                                           |            | EP                   | 2027193     | CN | 101437879  |
|                                                                                                                           |            |                      |             | US | 2008102282 |
|                                                                                                                           |            |                      |             | WO | 2007130607 |
| Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001. |            |                      |             |    |            |
| END OF ANNEX                                                                                                              |            |                      |             |    |            |