

[54] IMPERVIOUS SINTERED IRON-COPPER
METAL OBJECT

[75] Inventors: Howard I. Sanderow, Cherry Hill,
N.J.; Kenneth M. Merz, Malvern,
Pa.

[73] Assignee: TRW Inc., Cleveland, Ohio

[22] Filed: Feb. 21, 1973

[21] Appl. No.: 334,242

[52] U.S. Cl. 29/182.5, 29/182, 75/212,
75/226

[51] Int. Cl. B22f 1/00

[58] Field of Search 75/212, 226; 29/182.5,
29/182

[56] References Cited
UNITED STATES PATENTS

2,610,118 9/1952 Drapeau et al. 75/212

3,142,894 8/1964 Ross et al. 75/212
3,520,680 7/1970 Orlemann 75/212

FOREIGN PATENTS OR APPLICATIONS


1,123,685 8/1968 Great Britain 75/212
779,969 7/1957 Great Britain 75/212
3,717,106 10/1962 Japan 75/212


Primary Examiner—Carl D. Quarforth
Assistant Examiner—B. Hunt
Attorney, Agent, or Firm—Jacob Trachtman

[57] ABSTRACT

A metallic object formed of metal particles com-
pressed together to form a rigid object. Each of the
metal particles is coated with a metal having a melting
temperature lower than that of the metal of the parti-
cles. The coating metal fills the voids between the par-
ticles so that the object is impervious to fluids.

4 Claims, 1 Drawing Figure

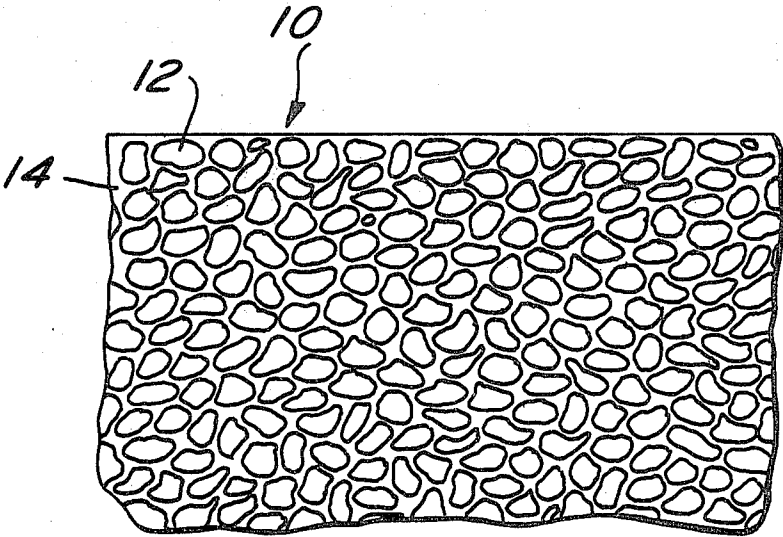

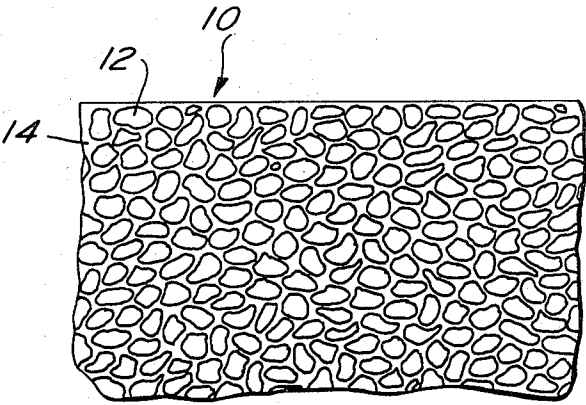

IMPERVIOUS SINTERED IRON-COPPER METAL OBJECT

The present invention relates to a metallic object formed by powder metallurgy, and more particularly to such a metallic object which is impervious to fluids and a method of making such metallic objects.

A method of making metallic objects, known as powdered metallurgy, generally includes the steps of compressing together and sintering under the application of heat, particles of the metal to bond the particles together as a rigid body. The metal bodies made by this technique generally have a density of 80 percent to 90 percent of the theoretical density so as to include interconnected pores or voids. This pore network permits the passage of fluids through the body so that such bodies cannot be used to make parts where imperviousness is required, such as parts for pumps, fluid transmission systems, etc.

Various techniques have been developed to form an impervious metallic body by powdered metallurgy. One technique is to raise the finished product density to achieve non-interconnected porosity. However, this technique requires large presses and high temperature sintering treatments. Also, it entails stringent process controls and numerous quality control and final part inspection operations. All of these requirements makes this technique very costly to carry out.

Another technique which has been developed is a controlled oxidation of the compressed metal body, generally a steam oxidation process, to fill surface voids with oxides of the metal. This technique has been found to be difficult to control as to the type of oxide formed, depth of the oxide layer, surface hardness and surface quality. Also, since it requires a secondary operation after the standard powdered metallurgy processing, the overall cost of making the body is increased. In addition, the bodies made by this technique are lower in density in order that a substantial oxide layer can be produced in the surface pores. This leads to a lower strength of the bodies as compared to standard bodies. Similarly, the bodies cannot be hardened by carburizing treatment, since carbon would react with the surface layer, reducing the oxide back to the metal and opening the surface pores. Still another disadvantage of this technique is that the impervious layer is localized at the surface of the body. This precludes any surface finishing or metal working operations that would break the surface oxide layer.

A third technique which has been developed is to impregnate the pores of the body with a plastic or a liquid metal which is not soluble with the metal of the particles which form the body. However, this technique also has the disadvantage of extra expense because of the additional processing required. Also, this technique has been found to be difficult to control and maintain long term part-to-part uniformity. When a plastic is used to impregnate the pores of the body, no additional strengthening is afforded by the plastic, leaving the final product with a lower tensile strength than can be achieved without impregnation. When a metal is used to impregnate the pores, relatively large contents of the metal are required to achieve imperviousness.

It is therefore an object of the present invention to provide a novel impervious metal body made by powdered metallurgy.

It is another object of the present invention to provide an impervious metal body made by powdered metallurgy which can be surface hardened without losing imperviousness.

It is a further object of the present invention to provide a novel method of making an impervious metal body by powdered metallurgy.

It is still a further object of the present invention to provide a method of making a body by powdered metallurgy which provides imperviousness during the compression-sintering operation.

Other objects will appear hereinafter.

These objects are achieved by using metal particles which are coated with a thin film of a metal having a melting temperature lower than that of the metal of the particles. After the coated particles are compressed to form the body, they are heated to the melting temperature of the coating metal. The melted coating metal flows to fill the voids between the particles. When the body is cooled, there is provided a body of the particles bonded together with the spaces between the particles being filled with the coating metal to provide an impervious body.

The drawing is an enlarged sectional view of a part of a metal body of the present invention.

The metal body of the present invention, generally designated as 10, comprises particles 12 of a desired metal, such as iron. Each of the particles 12 is completely surrounded by a thin layer 14 of a metal, such as copper, having a melting temperature lower than the melting temperature of the metal of the particles 12. When the particles 12 are compressed together and sintered, the iron particles bond together by solid state diffusion while the layer 14 is molten and fills the voids between the particles 12. The metal layer 14 filling most voids between the particles 12, renders the body 10 impervious to the flow of fluid through the body 10 by eliminating interconnected voids. There must be at least 12 percent by weight of the metal layer 14. Although suitable metal bodies 10 can be obtained with the metal layer 14 being present in the amount of 12 to 16 percent by weight, up to 30 percent by weight of the metal layer 14 can also be used.

To make the metal body 10, the individual metal particles 12 are first coated with the metal layer 14. This is preferably done by a chemical displacement process.

For example, a 12 percent copper on iron particle can be made by starting with -100 mesh iron particles and an aqueous plating solution of $\text{CuSO}_4 \cdot 5\text{H}_2\text{O}$. The amount of the copper sulfate solution is calculated to provide 12 percent copper in the bath. The solution is maintained at room temperature and a pH of 3 with H_2SO_4 additions. The iron powder used is introduced into the solution, rapidly stirred for a period of 3 to 10 minutes, and removed from the solution. The coated powder is then washed in slightly acidified water and vacuum dried.

The coated particles are then mixed together with graphite (0.5 to 1.0 percent) and a lubricant such as zinc stearate (0.75 percent). The graphite has been found to reduce the solubility of the copper in the iron. This leaves more of the copper to fill the pores or voids and make a more dense body. The lubricant helps in the compacting of the body. A charge of the coated particles is then compacted at a pressure of 35-50 tons per square inch and sintered for about 30 minutes at 2,050°F in dissociated ammonia. The compacting

3

presses the particles close together. The sintering causes the metal layer 14 to melt. The liquid metal flows and fills the voids between the particles. When the body cools, the metal solidifies and forms the impervious body 10.

Since the body is made entirely of metal and does not contain interconnecting voids extending therethrough, it can be surface hardened by carburization without destroying the imperviousness of the body. Also, the body can be surface ground, punched, reamed or otherwise machined without affecting the imperviousness of the body. By making the body of the coated metal particles, the impervious body can be made by a standard compression-sintering operation so as to maintain a low cost for making the body.

What is claimed is:

4

1. An impervious metal body comprising a plurality of iron powder particles bonded together, each of said particles being coated with a layer of copper, with the copper layer substantially filling the spaces between the particles so that the body is impervious, the body including from about 12% to about 30% by weight of copper.

2. A metal body in accordance with claim 1 in which the body includes between 12 percent and 16 percent by weight of copper.

3. A metal body in accordance with claim 1 including carbon dispersed in the iron particles of the body.

4. A metal body in accordance with claim 3 including between 0.5 percent and 1.0 percent by weight of carbon dispersed in the iron particles of the body.

* * * * *

20

25

30

35

40

45

50

55

60

65