



(86) Date de dépôt PCT/PCT Filing Date: 2016/08/19
(87) Date publication PCT/PCT Publication Date: 2017/03/02
(45) Date de délivrance/Issue Date: 2024/02/20
(85) Entrée phase nationale/National Entry: 2018/02/15
(86) N° demande PCT/PCT Application No.: EP 2016/069731
(87) N° publication PCT/PCT Publication No.: 2017/032719
(30) Priorité/Priority: 2015/08/21 (EP15181990.1)

(51) Cl.Int./Int.Cl. *C04B 40/00* (2006.01)
(72) Inventeurs/Inventors:
GAEDT, TORBEN, DE;
HESSE, CHRISTOPH, DE
(73) Propriétaire/Owner:
BASF SE, DE
(74) Agent: BORDEN LADNER GERVAIS LLP

(54) Titre : COMPOSITION D'ACCELERATEUR POUR LE DURCISSEMENT DU CIMENT
(54) Title: ACCELERATOR COMPOSITION FOR THE CURING OF CEMENT

(57) **Abrégé/Abstract:**

The invention relates to a process for producing a composition suitable as accelerator for the curing of cement, by contacting the components aa) at least one component selected from the series of hydraulic binders and/or latent hydraulic binders, and bb) at least one dispersant suitable for the dispersing of inorganic particles in water, and cc) water, the weight ratio of components aa) to cc) being between 1.5:1 and 1:70, wherein the rate ratio of components aa) to bb) is between 20:1 and 1:2. In addition, the use of the composition obtained as hardening acceleration for chemical mixtures in construction is disclosed.

Abstract

The invention relates to a process for producing a composition suitable as accelerator for the curing of cement, by contacting the components aa) at least one component selected from the series of hydraulic binders and/or latent hydraulic binders, and bb) at least one dispersant suitable for the dispersing of inorganic particles in water, and cc) water, the weight ratio of components aa) to cc) being between 1.5:1 and 1:70, wherein the rate ratio of components aa) to bb) is between 20:1 and 1:2. In addition, the use of the composition obtained as hardening acceleration for chemical mixtures in construction is disclosed.

ACCELERATOR COMPOSITION FOR THE CURING OF CEMENT

The present invention relates to a process for producing a composition suitable as an accelerator for the curing of cement.

5 In cement hydration, the various cement clinker phases react with water substantially to form the hardened cement phases calcium silicate hydrate, ettringite, calcium aluminate ferrite phases, monosulfate, and portlandite.

WO 2010026155 discloses accelerating the hydration cement by addition of calcium silicate hydrates seeds to cement or in concrete. The development of strength by a
10 cement can be accelerated by the addition of such calcium silicate hydrate seeds. In that case the calcium silicate hydrate seeds are produced by reaction of a water-soluble calcium component with a water-soluble silicon component in aqueous solution in the presence of a water-soluble comb polymer suitable as a plasticizer for hydraulic binders.

DE 694 07 418 discloses a solidification and hardening accelerator for silicatic, hydraulic
15 binders which originates in particular from the hydration of artificial Portland cements, comminuted Portland clinkers or composite Portland cements, or mixtures of the aforesaid starting materials. For many applications, however, the acceleration effect is insufficient, and fairly large quantities of this accelerator must be used, meaning that there are also limits on the economically rational possibilities for use.

20 The problem addressed by the present invention is that of providing a process for producing a composition that is suitable as a hardening accelerator for hydraulically setting binders and that improves the development of early strength by the hydraulically setting binders, more particularly by cement. Development of early strength refers in particular to the compressive strength 6 hours after the hydraulically setting binder, or a
25 hydraulically setting binder mixture, has been prepared by mixing with water. Furthermore, the composition ought to be able to be produced economically advantageously with favorable and readily available raw materials.

The solution to this problem is a process for producing a composition suitable as
30 accelerator for the curing of cement, by contacting the components
aa) at least one component selected from the series of hydraulic binders and/or latent hydraulic binders, and
bb) at least one dispersant suitable for the dispersing of inorganic particles in water, and

cc) water,
the weight ratio of components aa) to cc) being between 1.5:1 and 1:70 and wherein
the weight ratio of components aa) to bb) is between 20:1 and 1:2.


- 5 Surprisingly it has emerged in this context that not only has it been possible to solve
the stated problem to its full extent but also the composition produced in accordance
with the invention receives no unwanted salts from the production operation.

10 With further preference, bb), the at least one dispersant, comprises a water-soluble
polymer preferably comprising at least two monomer units. It may also, however, be
advantageous to use copolymers having three or more monomer units.

15 "Water-soluble polymers" in the sense of the present specification are polymers which
in water at 20°C under atmospheric pressure have a solubility of at least 1 gram per
liter, more particularly at least 10 grams per liter, and very preferably of at least
100 grams per liter.

In one preferred embodiment, said at least one dispersant comprises polyether groups
of the structural unit (I)

20



where

- * indicates the site of bonding to the polymer,
25 U is a chemical bond or an alkylene group having 1 to 8 carbons,
X is oxygen, sulfur or a group NR¹,
k is 0 or 1,
n is an integer whose average value, based on the polymer, is in the range from 3
to 300,
30 Alk is C₂-C₄ alkylene, and within the group (Alk-O)_n Alk may be identical or different,
W is a hydrogen, a C₁-C₆ alkyl or an aryl radical or is the group Y-F, where
Y is a linear or branched alkylene group having 2 to 8 carbons and may carry a
phenyl ring,
F is a 5- to 10-membered nitrogen heterocycle which is bonded via nitrogen and
35 which as ring members, besides the nitrogen atom and besides carbon atoms, may
have 1, 2 or 3 additional heteroatoms selected from oxygen, nitrogen, and sulfur, it
being possible for the nitrogen ring members to have a group R², and for 1 or 2 carbon
ring members to be present in the form of a carbonyl group,
R¹ is hydrogen, C₁-C₄ alkyl or benzyl, and
40 R² is hydrogen, C₁-C₄ alkyl or benzyl

With particular preference, the dispersant of the invention comprises at least one group
from the series of carboxyester, carboxyl, phosphono, sulfinio, sulfo, sulfamido, sulfoxy,

3

sulfoalkyloxy, sulfinoalkyloxy, and phosphonoxy group.


With more particular preference, the polymer of the invention comprises an acid group. The term "acid group" is understood in the present specification to refer both to the free acid and to the salts thereof. The acid may preferably be at least one from the series of
 5 carboxyl, phosphono, sulfino, sulfo, sulfamido, sulfoxy, sulfoalkyloxy, sulfinoalkyloxy, and phosphonoxy group. Particularly preferred are carboxyl and phosphonoxy groups.

10 In one particularly preferred embodiment, the dispersant comprises a polycondensation product comprising

(II) a structural unit containing an aromatic or heteroaromatic and the polyether group, and also

(III) a phosphated structural unit containing an aromatic or heteroaromatic.

15 The structural units (II) and (III) are preferably represented by the following general formulae




20 where

A is identical or different and is represented by a substituted or unsubstituted, aromatic or heteroaromatic compound having 5 to 10 carbons in the aromatic system, the other radicals possessing the definition stated for structural unit (I);

25

(III)

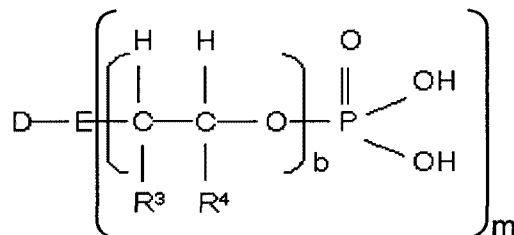

where

30 D is identical or different and is represented by a substituted or unsubstituted, aromatic or heteroaromatic compound having 5 to 10 carbons in the aromatic system.

Furthermore, E is identical or different and is represented by N, NH or O, m = 2 if E = N and m = 1 if E = NH or O.

35

R³ and R⁴ independently of one another are identical or different and are represented by a branched or unbranched C₁ to C₁₀ alkyl radical, C₅ to C₈ cycloalkyl radical, aryl radical, heteroaryl radical or H, preferably by H, methyl, ethyl or phenyl, more

4

preferably by H or methyl, and especially preferably by H. Furthermore, b is identical or different and is represented by an integer from 0 to 300. If $b = 0$, $E = O$. More preferably $D = \text{phenyl}$, $E = O$, R^3 and $R^4 = H$, and $b = 1$.

- 5 The polycondensation product preferably comprises a further structural unit (IV) which is represented by the following formula



where

- 15 Y independently at each occurrence is identical or different and is represented by (II), (III) or further constituents of the polycondensation product.

R^5 and R^6 are preferably identical or different and represented by H, CH_3 , COOH or a substituted or unsubstituted, aromatic or heteroaromatic compound having 5 to 10 carbons. R^5 and R^6 here in structural unit (IV) are independently of one another

20 preferably represented by H, COOH and/or methyl.

In one particular preferred embodiment, R^5 and R^6 are represented by H.

The molar ratio of the structural units (II), (III), and (IV) in the phosphated polycondensation product of the invention may be varied within wide ranges. It has

25 proven useful for the molar ratio of the structural units [(II) + (III)]: (IV) to be 1:0.8 to 3, preferably 1:0.9 to 2, and more preferably 1:0.95 to 1.2.

The molar ratio of the structural units (II): (III) is normally 1:10 to 10:1, preferably 1:7 to

30 5:1, and more preferably 1:5 to 3:1.

The groups A and D in the structural units (II) and (III) in the polycondensation product are usually represented by phenyl, 2-hydroxyphenyl, 3-hydroxyphenyl, 4-

hydroxyphenyl, 2-methoxyphenyl, 3-methoxyphenyl, 4-methoxyphenyl, naphthyl, 2-

hydroxynaphthyl, 4-hydroxynaphthyl, 2-methoxynaphthyl, 4-methoxynaphthyl,

35 preferably phenyl, and A and D may be selected independently of one another and may also each consist of a mixture of the stated compounds. The groups X and E are represented independently of one another preferably by O.

Preferably, n in structural unit (I) is represented by an integer from 5 to 280, more

40 particularly 10 to 160, and very preferably 12 to 120, and b in structural unit (III) is represented by an integer from 0 to 10, preferably 1 to 7, and more preferably 1 to 5. The representative radicals whose length is defined by n and b may consist here of uniform structural groups, though it may also be useful for them to comprise a mixture

of different structural groups. Furthermore, the radicals of the structural units (II) and (III) may independently of one another each have the same chain length, with n and b in each case being represented by one number. In general, however, it will be useful for these each to be mixtures having different chain lengths, and so the radicals of the structural units in the polycondensation product have different numerical values for n and, independently for b.

In one particular embodiment, the present invention further envisages a sodium, potassium, ammonium and/or calcium salt, and preferably a sodium and/or potassium salt, of the phosphated polycondensation product.


The phosphated polycondensation product of the invention frequently has a weight-average molecular weight of 5000 g/mol to 150 000 g/mol, preferably 10 000 to 100 000 g/mol, and more preferably 20 000 to 75 000 g/mol.

With regard to the phosphated polycondensation products for preferred use in accordance with the present invention, and to their preparation, reference is additionally made to patent applications WO 2006/042709 and WO 2010/040612.

In a further preferred embodiment, the dispersant comprises at least one copolymer which is obtainable by polymerization of a mixture of monomers comprising (V) at least one ethylenically unsaturated monomer which comprises at least one radical from the series of carboxylic acid, carboxylic salt, carboxylic ester, carboxylic amide, carboxylic anhydride, and carboxylic imide, and (VI) at least one ethylenically unsaturated monomer comprising a polyether group, the polyether group being represented preferably by the structural unit (I).

The copolymers in accordance with the present invention contain at least two monomer units. It may, however, also be advantageous to use copolymers having three or more monomer units.

In one preferred embodiment, the ethylenically unsaturated monomer (V) is represented by at least one of the following general formulae from the group of (Va), (Vb), and (Vc):

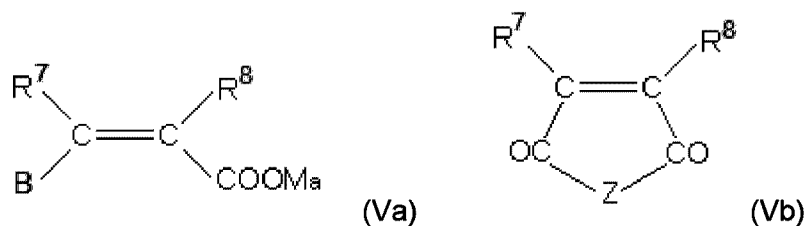

In the monocarboxylic or dicarboxylic acid derivative (Va) and in the monomer (Vb)

6

present in cyclic form, where Z = O (acid anhydride) or NR¹⁶ (acid imide), R⁷ and R⁸ independently of one another are hydrogen or an aliphatic hydrocarbon radical having 1 to 20 carbons, preferably a methyl group. B is H, -COOM_a, -CO-O(C_qH_{2q}O)_r-R⁹, -CO-NH-(C_qH_{2q}O)_r-R⁹.

5

M is hydrogen, a mono- or di- or trivalent metal cation, preferably sodium, potassium, calcium or magnesium ion, or else ammonium or an organic amine radical, and a = 1/3, 1/2 or 1, according to whether M is a mono-, di- or trivalent cation. Organic amine radicals used are preferably substituted ammonium groups which derive from primary, secondary or tertiary C₁₋₂₀ alkylamines, C₁₋₂₀ alkanolamines, C₅₋₈ cycloalkylamines, and C₆₋₁₄ arylamines. Examples of the corresponding amines are methylamine, dimethylamine, trimethylamine, ethanolamine, diethanolamine, triethanolamine, methyldiethanolamine, cyclohexylamine, dicyclohexylamine, phenylamine, diphenylamine in the protonated (ammonium) form.

10


15

R⁹ is hydrogen, an aliphatic hydrocarbon radical having 1 to 20 carbons, a cycloaliphatic hydrocarbon radical having 5 to 8 carbons, an aryl radical having 6 to 14 carbons, this radical optionally being substituted as well, q = 2, 3 or 4 and r = 0 to 200, preferably 1 to 150. The aliphatic hydrocarbons here may be linear or branched and also saturated or unsaturated. Preferred cycloalkyl radicals are cyclopentyl or cyclohexyl radicals, and preferred aryl radicals are phenyl or naphthyl radicals, which in particular may also be substituted by hydroxyl, carboxyl or sulfonic acid groups. Furthermore, Z is O or NR¹⁶, where R¹⁶ independently of each occurrence is identical or different and is represented by a branched or unbranched C₁ to C₁₀ alkyl radical, C₅ to C₈ cycloalkyl radical, aryl radical, heteroaryl radical or H.

20

25

The following formula represents the monomer (Vc):



30

In this formula, R¹⁰ and R¹¹ independently of one another are hydrogen or aliphatic hydrocarbon radical having 1 to 20 carbons, a cycloaliphatic hydrocarbon radical having 5 to 8 carbons, an optionally substituted aryl radical having 6 to 14 carbons.

35

Furthermore, R¹² is identical or different and is represented by (C_nH_{2n})-SO₃H with n = 0, 1, 2, 3 or 4, (C_nH_{2n})-OH with n = 0, 1, 2, 3 or 4; (C_nH_{2n})-PO₃H₂ with n = 0, 1, 2, 3 or 4, (C_nH_{2n})-OPO₃H₂ with n = 0, 1, 2, 3 or 4, (C₆H₄)-SO₃H, (C₆H₄)-PO₃H₂, (C₆H₄)-OPO₃H₂

and

$(C_nH_{2n})-NR^{14}_b$ with $n = 0, 1, 2, 3$ or 4 and b by 2 or 3 .

R^{13} is $H, -COOM_a, -CO-O(C_qH_{2q}O)_r-R^9, -CO-NH-(C_qH_{2q}O)_r-R^9$, where M_a, R^9, q and r possess the definitions stated above.

10


R^{14} is hydrogen, an aliphatic hydrocarbon radical having 1 to 10 carbons, a cycloaliphatic hydrocarbon radical having 5 to 8 carbons, an optionally substituted aryl radical having 6 to 14 carbons.

Furthermore, Q is identical or different and is represented by NH, NR^{15} or O , where R^{15} is an aliphatic hydrocarbon radical having 1 to 10 carbons, a cycloaliphatic hydrocarbon radical having 5 to 8 carbons or an optionally substituted aryl radical having 6 to 14 carbons.

15

In one particularly preferred embodiment, the ethylenically unsaturated monomer (VI) is represented by the following general formulae (VIa)

(VIa)

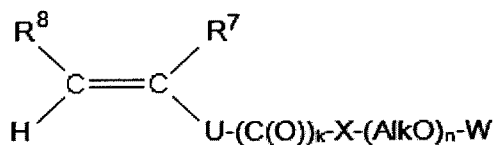


20

in which all the radicals having the definitions above.

In a further-preferred embodiment, the ethylenically unsaturated monomer (VI) is represented by the following general formulae (VIb)

25

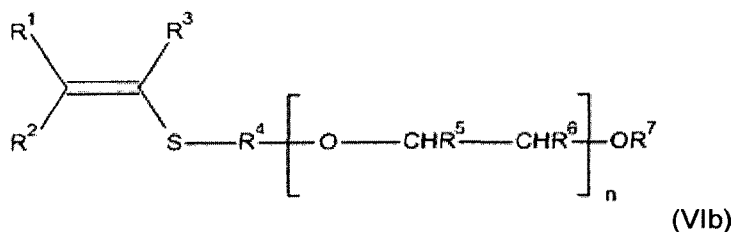


30 where

R^1, R^2, R^3 independently of one another, identically or differently, are H, CH_3 ,

R^4 is linear or branched C_1-C_{30} alkylene,

R^5, R^6 independently of one another, identically or differently, are H, C_1-C_{20} alkyl, C_3-C_{15} cycloalkyl, aryl, $-CH_2-O-C_1-C_{20}$ alkyl, $CH_2-O-C_2-C_{20}$ alkenyl,

and R⁵ and R⁶ may also together form a C₃-C₆ alkylene,
 R⁷ independently at each occurrence, identically or differently, is H, C₁-C₄ alkyl



R⁸ is C₁-C₂₂ alkyl, C₂-C₂₂ alkenyl, and
 5 n independently at each occurrence, is identical or different and is an integer
 from 2 to 200.

In particular, the copolymer has an average molar weight (Mw) of between 5000 and
 150 000 g/mol, more preferably 10 000 to 80 000 g/mol, and very preferably 15 000 to
 60 000 g/mol, as determined by gel permeation chromatography.

10 The polymers are analyzed for average molar mass and conversion by means of size
 exclusion chromatography (column combinations: Shodex™ OH-Pak SB 804 HQ and OH-
 Pak SB 802.5 HQ from Showa Denko, Japan; eluent: 80 vol% aqueous solution of
 HCO₂NH₄ (0.05 mol/l) and 20 vol% MeOH; injection volume 100 µl; flow rate 0.5 ml/min)).

The copolymer of the invention preferably fulfills the requirements of the industry standard
 15 EN 934-2 (February 2002).

A further-preferred embodiment of the present specification is a process of the invention
 wherein the components

- aa) at least one component selected from the series of hydraulic binders and/or latent
 hydraulic binders, and
 - 20 bb) at least one dispersant suitable for the dispersing of inorganic particles in water, and
 - cc) water,
- are contacted with one another until the suspended matter fraction M is greater than
 25 wt%,

M being determined by the following method:

- 25 a) preparing a suspension by making up 2 grams of the composition, based on the
 solids fraction, to a volume of 100 ml with distilled water
- b) transferring the suspension to a measuring cylinder to reach a height of 20 cm in the
 cylinder
- c) leaving the cylinder to stand at 20°C for 24 hours
- 30 d) fully decanting the supernatant into a beaker
- e) carrying out quantitative determination of the mass m and the solids content SC for
 - i) the sediment in the measuring cylinder (m_{sediment} and SC_{sediment}) and
 - ii) the supernatant ($m_{\text{supernatant}}$ and $SC_{\text{supernatant}}$),

the suspended matter fraction M being calculated as follows:

35
$$M = \frac{SC_{\text{supernatant}} \cdot m_{\text{supernatant}}}{(SC_{\text{sediment}} \cdot m_{\text{sediment}} + SC_{\text{supernatant}} \cdot m_{\text{supernatant}})} \cdot 100\%.$$

In one particularly preferred embodiment, the suspended matter fraction M of the composition is greater than 35 wt%, more particularly greater than 40 wt%, 45 wt%, 50 wt%, 60 wt%, 65 wt%, 70 wt%, 75 wt%, and more preferably greater than 80 wt%.

5 Said contacting of the components takes place in particular with mixing. Suitable for this purpose are virtually all forms of equipment known to the skilled person. Mixing in the context of this invention means commingling or homogenizing that intensifies the contact between the components to be mixed and is therefore intended to allow uniform and/or rapid formation of the desired product. The mixing may generate a very largely homogeneous mixture and/or initiate or accelerate a chemical reaction.

10 Examples of methods which bring about mixing are stirring, shaking, the nozzle injection of gases or liquids, and irradiation with ultrasound. Suitable processes and apparatus which bring about mixing are known to the skilled person. Suitable mixing apparatuses are, for example, stirred tanks, dynamic and static mixers, single-shaft stirring mechanisms, examples being stirring mechanisms that have scraper devices, especially those as paste
15 stirrers, multishaft stirrers, especially PDSM mixers, solid mixers, and also mixing/kneading reactors. Advantageous in this context for the reaction rate and product quality are processes which introduce a high shearing energy. With more particular preference, therefore, the process of the invention is carried out at least temporarily using an apparatus from the series of toothed colloid mill, bead mill, ball mill, ultrasound devices,
20 rotor-stator (e.g. IKA™ Ultra-Turrax), and dissolver disk.

In one preferred embodiment, said contacting takes place with introduction of shearing energy, with more than 100 kWh, more particularly more than 500 kWh, preferably more than 1000 kWh, more particularly 200 to 10 000 kWh, especially preferably 300 to 3000 kWh of shearing energy being introduced per metric ton of composition.

25 The stated shearing energy pertains to the power taken up by the apparatus used during the grinding of one metric ton of the composition.

The introduction of shearing energy may be carried out in particular in a stirred ball mill. The stirred ball mill comprises a grinding chamber containing grinding media, and a stator and a rotor which are disposed in the grinding chamber. With further preference the stirred
30 ball mill comprises a grinding-stop inlet aperture and a grinding-stop outlet aperture for feeding grinding stock into and out of the grinding chamber, respectively, and also a grinding media removal device, which is disposed upstream of the outlet opening in the grinding chamber and which serves to remove grinding media carried in the grinding stock from the grinding stock before the latter is fed out of the grinding compartment through the
35 outlet opening.

In order to boost the mechanical grinding power introduced into the grinding stock in the grinding chamber, the rotor and/or the stator preferably carry pins which project into the grinding compartment. In operation, therefore, a contribution to the grinding power is provided first of all, directly, by impacts between the grinding stock and the pins. On the other hand, a further contribution to the grinding power is made indirectly, by impacts between the pins and the grinding media carried in the grinding stock, and by the impacts that then take place in turn between the grinding stock and the grinding media. Lastly, further contributions to comminuting the suspended grinding-stock particles are also made by expansion forces and shearing forces which act on the grinding stock.

In a further-preferred embodiment, the weight ratio of components aa) to bb) is between 10:1 and 1:2, more particularly between 5:1 and 1:1.5, especially preferably between 3:1 and 1:1. With wide preference, the weight ratio of components aa) to cc) may be between 1:1 and 1:10.

Said contacting of the components essential to the invention may also take place, advantageously, with a temporal offset. In that case it is preferred first to contact components aa) and cc) and only then to add component bb). By this means it is possible to reduce the amount of dispersant used for the same activity of the resulting product. In particular, component bb) may be added between 5 and 60 minutes, more particularly between 15 and 45 minutes, and very preferably between 20 and 40 minutes after the contacting of components aa) and cc).

In a further preferred embodiment, a portion of component bb) is added during the mixing of components aa) and cc), and the remainder of component bb) is added between $0.01 t_M$ and $1.00 t_M$, more particularly between $0.25 t_M$ and $1.00 t_M$, and very preferably between $0.5 t_M$ and $1.00 t_M$ after the contacting of components aa) and cc). Here, t_M is the total mixing time in the process for producing the composition.

Component aa) is understood to comprise hydraulic binders, especially cement based on Portland cement (EN 197), cement with special properties (DIN 1164), white cement, calcium aluminate cement or high-alumina cement (EN 14647), calcium sulfoaluminate cement, and specialty cements.

For the purposes of the specification, latent hydraulic binders are, in particular, pozzolan, volcanic slag, volcanic tuff, flyash, blast furnace slag, microsilica, kaolin, metakaolin, activated clay, trass, pozzolana, kieselguhr, and also diatomaceous earth in conjunction with an alkaline activator, especially preferably waterglass.

With particular preference, component aa) is a hydraulic binder, more particularly Portland cement, preferably white cement.

In one preferred embodiment, the components contacted with one another in the process of the invention consist to an extent of at least 50 wt%, preferably at least 70 wt%, more particularly at least 80 wt%, very preferably at least 90 wt%, of components aa), bb) and cc). More particularly, the components contacted with one another in the process of the invention may consist of components aa), bb), and cc).

In one preferred embodiment a further component dd) is used in the form of an SiO₂ source, such as colloidal SiO₂, finely divided silica (e.g., Aerosil, Sipernat), microsilica or flyash, in the process of the invention. Suitable in that case in particular are amounts between 1 and 20 wt%, more particularly 5 to 15 wt%, based on all the components used.

Furthermore, a calcium sulfate source may be used as further component ee). Suitable in that case in particular are amounts between 1 and 10 wt%, more particularly 2 to 8 wt%, based on all the components used.

Furthermore, a component ff) may be used in the process of the invention that comprises calcium silicate hydrate in finely divided form. Particularly suitable for example are the compositions described in WO 2010026155 on pages 37 to 42. Especially suitable in that case are amounts between 1 and 15 wt%, more particularly 2 to 10 wt%, based on all the components used.

The process of the invention may be carried out at room temperature under atmospheric pressure. In order to accelerate the reaction, however, it is also possible to select higher temperatures and optionally to operate under increased pressure. The process may advantageously be carried out at temperatures between 50°C and 250°C. In that case it is possible to employ a pressure of up to 40 bar.

The invention also relates to the use of the compositions of the invention for accelerating hardening of chemical mixtures in construction, comprising cement, slag, preferably granulated blast furnace slag, flyash, finely ground silica, metakaolin, natural pozzolans, calcined oil shale, calcium sulfoaluminate cements and/or calcium aluminate cements, preferably in chemical mixtures in construction which comprise predominantly cement as hydraulic binder.

The amount of the compositions of the invention added is preferably from 0.01 wt% to 15 wt%, more preferably 0.1 wt% to 6 wt%, very preferably 0.1 wt% to 5 wt% of the solids of the compositions, based on the inorganic binders – cement, slag, preferably granulated blast furnace slag, flyash, finely ground silica, metakaolin, natural pozzolans, calcium oil shale, calcium sulfoaluminate cements and/or calcium aluminate cements. The amount of the compositions of the invention added is preferably from 0.01 wt% to 15 wt%, more preferably 0.1 wt% to 8 wt%, very preferably 0.5 wt% to 5 wt% of the solids of the compositions, based on cement.

The cement is preferably selected from Portland cement, high-alumina cement, calcium sulfoaluminate cement, or mixtures of the stated cement types. Especially preferred is cement of the Portland cement type.

Examples

Determination of suspended matter fraction M

- 5 The suspended matter fraction M describes the tendency of the particulate suspension to undergo sedimentation, and is obtained from the ratio of the solids in the supernatant after a certain time to the solids in the suspension as a whole. To determine the suspended matter fraction M, the following steps are carried out:
- 10 a) Determination of the empty weight m_0 of a 100 ml measuring cylinder
 b) Preparation of a suspension by placing 2 grams of the inventive composition, based on the solids fraction, into the cylinder, making up the cylinder to a volume of 100 ml with distilled water, and homogenizing the suspension by shaking. The aim of the dilution step is to reduce the particle-particle
 15 interactions during sedimentation in the field of gravity, and so allowing the sedimentation process to proceed in accordance with Stokes' law. The height of the suspension in the measuring cylinder here reaches 20 cm.
 c) The suspension is left to stand at 20°C for 24 hours. During this time the cylinder is covered in order to minimize evaporation of water.
 20 d) After 24 hours, the supernatant is separated from the settled sediment by decanting. This is done by transferring the supernatant into a beaker provided, whose empty weight $m_{0(\text{supernatant})}$ has been determined beforehand. It is very important here to avoid remixing of the settled sediment with the supernatant. Mixing of the sediment with supernatant would falsify the determination of the
 25 suspended matter fraction M.
 e) The mass of sediment m_{sediment} is determined after decanted by weighing of the cylinder, including sediment, and subtraction of the empty weight m_0 of the cylinder.
 f) The mass of the supernatant $m_{\text{supernatant}}$ is determined after decanting by
 30 weighing of the beaker including the supernatant and subtraction of the empty weight of the beaker $m_{0(\text{supernatant})}$.
 g) Sediment and supernatant are homogenized again
 h) A sample is taken from each of the sediment and the supernatant, and the solids content of each such sample is determined by drying to constant weight
 35 at 105°C. This is preferably done using a drying balance with infrared heating. The solids content may alternatively also be determined by storage of the sample in a drying cabinet at 105°C for 6 hours. The drying then gives, accordingly, the solids contents for the supernatant $SC_{\text{supernatant}}$ and for the sediment SC_{sediment} .
 40 i) Lastly, from the values determined, the suspended matter fraction M is calculated as follows:

$$M = \frac{SC_{\text{supernatant}} \cdot m_{\text{supernatant}}}{(SC_{\text{sediment}} \cdot m_{\text{sediment}} + SC_{\text{supernatant}} \cdot m_{\text{supernatant}})} \cdot 100\%.$$

The higher the suspended matter fraction M, the fewer the particles which have undergone sedimentation after 24 hours. Accordingly, a suspended matter fraction M of 100% indicates that the inventive suspension exhibits no sedimentation at all.

Calorimetry

- 5 To estimate the acceleration performance of the samples, measurements were carried out by isothermal heat flow calorimetry on the TAMAir instrument from TA® Instruments.

Polymers 1 and 2:

General protocol for the preparation of polymers 1 and 2:

- 10 A 1-liter four-neck flask with thermometer, reflux condenser and a connection for two feeds is charged with 875 g of 40% strength aqueous polyethylene glycol hydroxybutyl monovinyl ether and NaOH (20 %). The details of the molar masses of the respective polyethylene glycol hydroxybutyl monovinyl ethers can be found in table B. Thereafter the solution is cooled to 20°C. Acrylic acid (99%) is now slowly added to the solution of polyethylene glycol hydroxybutyl monovinyl ether in the reservoir flask. The pH here falls
- 15 to around 4-5. Next, 0.5 g of iron(II) sulfate heptahydrate and also 5 g of Rongalite and mercaptoethanol are added. After brief incorporation by stirring, the metered addition takes place of a further 3 g of 50% of hydrogen peroxide. The temperature here rises from 20°C to about 30°C up to 65°C. The solution is subsequently stirred for 10 minutes before being neutralized with aqueous sodium hydroxide solution (20%). The result is a clear
- 20 aqueous polymer solution with a slight yellow coloration and a variable solids content. All variable quantities for the chemicals used in preparing the polycarboxylate ethers polymer 1 and polymer 2 (NaOH, mercaptoethanol and acrylic acid), and the molar masses of the respective polyethylene glycol hydroxybutyl monovinyl ether can be found in tables A and B below.

- 25 Table A: details of the preparation of polymers 1 and 2

	NaOH (20 %) [g]	Mercaptoethanol [g]	Acrylic acid (99 %) [g]
Polymer 1	40	6.0	122.8
Polymer 2	20	2.7	84.9

Table B affords an overview of the structural parameters of the polycarboxylate ethers used as spraying assistants.

Table B: overview of the structural parameters of the PCEs

Additive (PCE)	A	B	C	Solids content (wt%)
Polymer 1	1/900	28 537	5800	33.2
Polymer 2	1/372	23 239	3000	35.1

A: Charge density (number of moles of carboxylate and/or carboxyl groups/total molar mass of the PCE) (mol/(g/mol))

B: Weight-average molecular weight M_w (g/mol)

C: Molar mass of polyethylene glycol hydroxybutyl monovinyl ether used (g/mol)

5 Polymer 3:

Polymer 3 is a condensate composed of the units phenol PEG5000, phenoxyethanol phosphate and formaldehyde. The molecular weight M_w is 25 730 g/mol. The polymer was prepared in accordance with polymer 7 from WO2015/091461 (tables 1 and 2). The solids content is 33.7 wt%.

10 Polymer 4:

Polymer 4 is a comb polymer polymerized from a hydroxyethyl methacrylate phosphoric ester and an ester of methacrylic acid and methylpolyethylene glycol with a molecular weight of 5000 g/mol. The synthesis was carried out in accordance with the preparation of P1 from WO2014/026938. The molecular weight M_w is 36 600 g/mol. The solids

15 content of the polymer solution is 28.8 wt%.

BNS:

BNS is a commercially available dispersant based on naphthalenesulfonate. The product Flube™ CA 40 from Giovanni Bozzetto S.p.A. was used. The solids content is 42 wt%.

Blank

20 50 g of Milke® CEM I 52.5 R were mixed with 40 g of water and homogenized with an IKA® paddle stirrer at 750 rpm for 90 seconds. 3 g of this homogeneous cement paste were passed on for isothermal heat flow calorimetry.

Example 1 (inventive)

25 50 g of Aalborg White Cement® CEM I 52.5 R were weighed out into a 2-liter plastic (PE) bottle. Then 40 g of a polycarboxylate ether (dispersant; brand name: Melflux® 6681 F) were weighed out into the plastic bottle. Added to this mixture were 900 g of mains water. The bottle was closed with a plastic cap and shaken vigorously by hand until no sediment of still-dry cement was left. Then a magnetic stirring rod was added and the mixture was stirred at 23°C and 250 revolutions per minute for 2 months. This

30 produces a suspension having a solids content of 10.1 wt%. The solids content is determined by drying the sample at 105°C to constant mass.

Suspended matter fraction M: 80.1%

Example 2 (comparative example)

- 50 g of Aalborg White Cement CEM I 52.5 R were weighed out into a 2-liter plastic (PE) bottle. Added to the cement were 900 g of mains water. The bottle was closed
- 5 with a plastic cap and shaken vigorously by hand until no sediment of still-dry cement was left. Then a magnetic stirring rod was added and the mixture was stirred at 23°C and 250 revolutions per minute for 2 months. In this case a white particulate suspension formed which without being stirred undergoes virtually complete sedimentation within an extremely short time.
- 10 This produces a suspension having a solids content of 6.1 wt%. The solids content is determined by drying the sample at 105°C to constant mass.
- Suspended matter fraction M: 29.2%

Comparative example C1

- 15 100 g of Milke CEM I 52.5 R were mixed with 40 g of water and homogenized for 90 seconds with an IKA paddle stirrer at 500 rpm. 3 g of this homogeneous cement paste was supplied for isothermal heat flow calorimetry.

Comparative example C2

- 20 100 g of Milke CEM I 52.5 R were mixed with 12.5 g of the sample from example 2 and 28.26 g of water. The water/cement ratio is therefore 0.4. 3 g of the homogeneous cement paste containing the sample from example 2 were subsequently supplied for isothermal heat flow calorimetry.

25 Inventive exampleCal1 (Calorimetry)

- 100 g of Milke CEM I 52.5 R were mixed with 12.5 g of the sample from example 1 and 28.76 g of water. The water/cement ratio is therefore 0.4. 3 g of the homogeneous cement paste containing the sample from example 1 were subsequently supplied for
- 30 isothermal heat flow calorimetry.

Table 1 summarizes the results:

Experiment	Acceleration factor according to L. Nicoleau (2012)	Cumulative heat of hydration after 6 h in joules/gram (cement)
C1	1.00	23.3
C2	1.05	26.4
Cal1	1.75	47.3

- 5 For comparison of the samples, the maximum slopes in the heat flow between 2 and 8 hours were each ascertained and were placed in relation to the slope of comparative measurement C1. The relative slope was determined in accordance with the publication by L. Nicoleau (2012) (L. Nicoleau: The acceleration of cement hydration by seeding: Influence of the cement mineralogy. Ibausil 18th International Construction Material Conference at Weimar (2012), Conference volume pages 1-0330 - 1-0337).
- 10 The heat of hydration here correlates with the development of the early strength of a cement-containing building material mixture (paper by C. Hesse (2014): Small particles with large effect – New pathways of acceleration. 6th Heidelberg Cement Construction Chemistry days at Münster, April 3/4, 2014, Münster).
- 15 Figure 1 shows the heat flow in mW/gram of cement over time for experiments C1 and Cal1.

General example 3: grinding in a shaker

- 20 1000 g of ZrO₂ grinding beads with a diameter of 0.8 - 1 mm were weighed out into a 0.5 liter Duran glass bottle. The bottle was tared and, for examples 3.1 to 3.11, 20 g of Aalborg White Cement CEM I 52.5 R were added. For examples 3.12 to 3.14, 20 g of a 1:1 (w/w) mixture of Aalborg White CEM I 52.5 R and Salzgitter slag sand were added. In accordance with table 2, a solution of polymers 1, 2, 3, 4 or BNS was added, to give a specific ratio of cement to polymer. The polymer metering here refers to the solids
- 25 content of polymer in the polymer solution. Subsequently, the mass balance to 200 g was made with up with deionized water. The bottle was closed with a plastic cap. Batches of 4 bottles were fastened in a shaker (SK 300 from Fast & Fluid Management) and shaken for a defined time (cf. table 2). The resulting suspension was poured off into a sieve and the grinding beads were washed with 50 ml of water to
- 30 remove adhering suspension. The solids content of the suspension was determined by drying the sample at 130°C to constant weight.

Table 2: shaker grinding

Example	Polymer	Cement* / Polymer ratio [w/w]	Shaken for [min]	A	B	C
Blank	-	-	-	0	21.3	0.44

3.1	-	0	120	0	55.1	0.53
3.2	-	0	240	0	61.0	0.65
3.3	1	4	120	93	77.3	1.24
3.4	1	4	240	93	83.7	1.15
3.5	BNS	100	120	0	56.5	0.58
3.6	1	100	120	0	52.8	0.59
3.7	1	20	120	73	61.7	0.80
3.8	1	10	120	91	68.6	0.97
3.9	2	4	120	62	71.0	1.26
3.10	3	4	120	96	89.3	1.22
3.11	4	4	120	64	84.4	1.14
3.12	-	0	120	0	56.3	0.66
3.13	1	20	120	43	61.8	0.77
3.14	1	4	120	94	72.0	0.97

A: Suspended matter fraction M in [%]

B: Cumulative heat of hydration after 6 h in [joules/gram (cement)]

C: Acceleration factor according to L. Nicoleau (2012) [d(HF)/dt]

Cement*: Cement refers to Aalborg White Cement CEM I 52.5 R or to the 1:1 (w/w)

5 mixture of Aalborg White CEM I 52.5 R and slag sand

10 Examples 3.1 and 3.5 are comparative examples corresponding to DE69407418. Since DE69407418 did not disclose a specific dispersant or any amount for use, the dispersant used in example 3.5 was the standard dispersant BNS in a typically employed amount.

15 For examples 3.1, 3.3 and 3.5, the sedimentation factor was determined as instructed in DE69407418: a) the suspension obtained in the examples were transferred to a sedimentation cylinder, so that 10 g are contained, based on the solids content of the suspension. b) Then the suspension volume was made up to 100 ml with deionized water, taking account of the water obtained in the suspension. c) The suspension was homogenized by shaking and left to stand at 20°C for 48 h. The height of the sedimentation residue was read off on the cylinder.

Example 3.1: 100%

Example 3.3: 28%

20 Example 3.5: 100%

General example 4: grinding in a stirred ball mill

25 A 3.0-liter beaker was tared, and 200 g of Aalborg White Cement CEM I 52.5 R were added. Optionally, in accordance with table 3, a polymer solution was added, to give a specific ratio of cement to polymer of 4. The polymer metering here is based on the solids content of polymer in the polymer solution. Subsequently, the balance to a mass of 2000 g was made with deionized water. This suspension was stirred until homogeneous, then placed into the reservoir vessel of the stirred ball mill, and immediately stirred therein with an IKA overhead stirrer so that no separation occurred.

Grinding was carried out using a Netzsch® LabStar 01 stirred ball mill. Grinding took place in a jacket-cooled grinding chamber (grinding compartment volume of 0.93 liter) with SiC lining, so that the temperature of the suspension is pumped in circulation was 30°C. In the interior of the grinding chamber there was a polyethylene disc stirring mechanism (PU-TriNex™-993.06/A4). The grinding chamber was filled with ZrO₂ beads (diameter of 0.8 – 1.0 mm) to a grinding media fill level of 85 vol%. To obtain this bulk of beads, 586.5 ml of beads were measured out into a measuring cylinder and then introduced into the grinding chamber.

The suspension was pumped through the stirred ball mill in circulation by means of a peristaltic pump from Ismatec™ (Ismatec™-MCP-Prozess-IP65) for a defined time (cf. table 2) with a pumping capacity (pumping rate) at 22 liters/hour. The speed of rotation of the stirrer of the ball mill was 3500 revolutions per minute.

When the stipulated grinding time had expired, the ground suspension was introduced into a PE container.

The specific grinding energy E_m was determined via the following relationship:

$$E_m = P \cdot \frac{t}{m} \quad [\text{kWh/tonne}]$$

Where P is the actual recorded shaft power in kilowatts and was read off on the stirred ball mill, t is the grinding time in hours, and m the mass of suspension used and pumped in the circuit.

Table 3: stirred ball mill grinding

Example	Polymer	Grinding time [min]	A	B	C	D
4.1	-	120	0	51.2	0.54	1970
4.2	1	120	92	58.4	0.94	1870
4.3	1	240	92	76.9	1.24	3720

A: Suspended matter fraction M in [%]

B: Cumulative heat of hydration after 6 h in [joules/gram (cement)]

C: Acceleration factor according to L. Nicoleau (2012) [d(HF)/dt]

D: Specific energy E_m in [kWh/ton (suspension)]


Determination of the cumulative heat of hydration in examples 3 and 4:

a) 1 gram, based on the cement content originally present in the suspension, of a suspension from example 3 or 4 was weighed out into a beaker. b) Taking account of the water added through the suspension, the total amount of water was made up with deionized water to 20 g. c) Subsequently, 50 g of Milke® CEM I 52.5 R were added. d) The components were homogenized with an IKA® paddle stirrer at 750 rpm. e) 3 g of this homogeneous cement paste were passed on for isothermal heat flow calorimetry.

CLAIMS:

1. A process for producing a composition for use as an accelerator for curing cement, the process comprising:
- 5 contacting components
- aa) at least one hydraulic binder,
- bb) at least one dispersant for dispersing inorganic particles in water, and
- cc) water,
- wherein said contacting takes place with introduction of shearing energy, with
- 10 more than 100 kWh of shearing energy being introduced per metric ton of composition,
- the weight ratio of components aa) to cc) being between 1.5:1 and 1:70,
- wherein the weight ratio of components aa) to bb) is between 20:1 and 1:2.

- 15 2. The process according to claim 1, wherein said at least one dispersant comprises a water-soluble polymer having polyether groups of the structural unit (I)



20 wherein

* indicates the site of bonding to the polymer;

U is a chemical bond or an alkylene group having 1 to 8 carbons;

X is oxygen, sulfur or a group NR^1 ;

k is 0 or 1;

25 n is an integer whose average value, based on the polymer, is in the range from 3 to 300;

Alk is $\text{C}_2\text{-C}_4$ alkylene, and within the group $(\text{AlkO})_n$ Alk is identical or different;

W is a hydrogen, a $\text{C}_1\text{-C}_6$ alkyl or an aryl radical or is a Y-F group;

30 wherein

Y is a linear or branched alkylene group having 2 to 8 carbons and optionally a phenyl ring;

5 F is a 5- to 10-membered nitrogen heterocycle which is bonded via nitrogen and which as ring members, besides the nitrogen atom and carbon atoms, optionally has 1, 2 or 3 additional heteroatoms selected from oxygen, nitrogen, and sulfur, it being possible for the nitrogen ring members to have a group R², and for 1 or 2 carbon ring members to be present in the form of a carbonyl group;

R¹ is hydrogen, C₁-C₄ alkyl or benzyl; and

R² is hydrogen, C₁-C₄ alkyl or benzyl.


10 3. The process according to claim 1 or 2, wherein said at least one dispersant comprises at least one group from the series of carboxyester, carboxyl, phosphono, sulfino, sulfo, sulfamido, sulfoxy, sulfoalkyloxy, sulfinoalkyloxy, and phosphonooxy group.

15 4. The process according to claim 1, wherein said at least one dispersant comprises a polycondensation product comprising:
 (II) a structural unit containing an aromatic or heteroaromatic and a polyether group; and
 (III) a phosphated structural unit containing an aromatic or heteroaromatic
 20 group.

5. The process according to claim 4, wherein the structural units (II) and (III) are represented by the following general formulae:

(II)


25



wherein

30 A is identical or different and is represented by a substituted or unsubstituted, aromatic or heteroaromatic compound having 5 to 10 carbons in the aromatic system, the other radicals possessing the definition stated for structural unit (I);

(III)

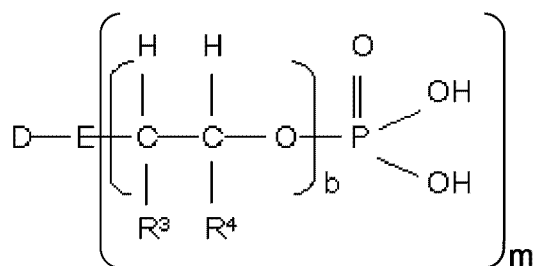


wherein

- 5 D is identical or different and is represented by a substituted or unsubstituted, aromatic or heteroaromatic compound having 5 to 10 carbons in the aromatic system;
- E is identical or different and is represented by N, NH or O;
 $m = 2$ if $E = N$ and $m = 1$ if $E = NH$ or O ;
- 10 R^3 and R^4 independently of one another are identical or different and are represented by a branched or unbranched C_1 to C_{10} alkyl radical, C_5 to C_8 cycloalkyl radical, aryl radical, heteroaryl radical or H; and
- b is identical or different and is represented by an integer from 0 to 300.

- 15 6. The process according to claim 4 or 5, wherein the polycondensation product comprises a further structural unit (IV) which is represented by the following formula:

(IV)

20




wherein


- 25 R^5 and R^6 are each independently H, CH_3 , COOH or a substituted or unsubstituted, aromatic or heteroaromatic compound having 5 to 10 carbons;

Y independently at each occurrence is identical or different and is represented by structural unit (II), structural unit (III) as defined in claim 5, or a further constituent of the polycondensation product.

- 5 7. The process according to claim 1 or 2, wherein said at least one dispersant comprises at least one copolymer which is obtained by polymerization of a mixture of monomers comprising:
- (V) at least one ethylenically unsaturated monomer which comprises at least one radical from the series of carboxylic acid, carboxylic salt, 10 carboxylic ester, carboxylic amide, carboxylic anhydride, and carboxylic imide; and
- (VI) at least one ethylenically unsaturated monomer comprising a polyether group.
- 15 8. The process according to claim 7, wherein the ethylenically unsaturated monomer (V) is represented by at least one of the following general formulae from the group of (Va), (Vb), and (Vc)



(Va)



(Vb)

20

wherein

R^7 and R^8 independently of one another are hydrogen or an aliphatic hydrocarbon radical having 1 to 20 carbons;

B is H, $-\text{COOM}_a$, $-\text{CO}-\text{O}(\text{C}_q\text{H}_{2q}\text{O})_r\text{R}^9$, or $-\text{CO}-\text{NH}(\text{C}_q\text{H}_{2q}\text{O})_r\text{R}^9$;

25 M is hydrogen, a mono-, di- or trivalent metal cation, ammonium ion or an organic amine radical;

a is 1/3, 1/2 or 1;


R^9 is hydrogen, an aliphatic hydrocarbon radical having 1 to 20 carbons, a cycloaliphatic hydrocarbon radical having 5 to 8 carbons, or an optionally substituted aryl radical having 6 to 14 carbons;

q independently for each $(C_qH_{2q}O)$ unit is identical or different and is 2, 3 or 4;

r is 0 to 200;

Z is O or NR^{16} ;

R^{16} independently at each occurrence is identical or different and is represented by a branched or unbranched C_1 to C_{10} alkyl radical, C_5 to C_8 cycloalkyl radical, aryl radical, heteroaryl radical or H,

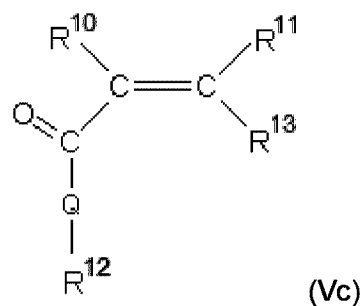

wherein

R^{10} and R^{11} independently of one another are hydrogen or an aliphatic hydrocarbon radical having 1 to 20 carbons, a cycloaliphatic hydrocarbon radical having 5 to 8 carbons, or an optionally substituted aryl radical having 6 to 14 carbons;

R^{12} is identical or different and is represented by $(C_nH_{2n})-SO_3H$ with $n = 0, 1, 2, 3$ or 4 , $(C_nH_{2n})-OH$ with $n = 0, 1, 2, 3$ or 4 , $(C_nH_{2n})-PO_3H_2$ with $n = 0, 1, 2, 3$ or 4 , $(C_nH_{2n})-OPO_3H_2$ with $n = 0, 1, 2, 3$ or 4 , $(C_6H_4)-SO_3H$, $(C_6H_4)-PO_3H_2$, $(C_6H_4)-OPO_3H_2$ or $(C_nH_{2n})-NR^{14}_b$ with $n = 0, 1, 2, 3$ or 4 and $b = 2$ or 3 ;

R^{13} is H, $-COOM_a$, $-CO-O(C_qH_{2q}O)_r-R^9$, or $-CO-NH-(C_qH_{2q}O)_r-R^9$, where M_a , R^9 , q and r possess definitions stated above;

R^{14} is hydrogen, an aliphatic hydrocarbon radical having 1 to 10 carbons, a cycloaliphatic hydrocarbon radical having 5 to 8 carbons, or an optionally substituted aryl radical having 6 to 14 carbons; and

Q is identical or different and is represented by NH, NR¹⁵ or O;
 wherein R¹⁵ is an aliphatic hydrocarbon radical having 1 to 10 carbons, a
 cycloaliphatic hydrocarbon radical having 5 to 8 carbons or an optionally
 substituted aryl radical having 6 to 14 carbons.

5

9. The process according to any one of claims 1 to 8, wherein said at least one
 dispersant comprises at least one water-soluble polymer which has an average
 molar weight (Mw) of between 5000 and 150 000 g/mol as determined by gel
 permeation chromatography.

10

10. The process according to any one of claims 1 to 9, where the components
 aa) at least one component selected from the of the group consisting of
 hydraulic binders and latent hydraulic binders;
 bb) at least one dispersant for dispersing inorganic particles in water; and
 cc) water,
 are contacted with one another until suspended matter fraction M is greater
 than 25 wt%, M being determined by the following method:

15

f) preparing a suspension by making up 2 grams of the
 composition, based on a solids fraction, to a volume of 100 ml
 with distilled water;

20

g) transferring the suspension to a measuring cylinder to reach a
 height of 20 cm in the cylinder;

h) leaving the cylinder to stand at 20°C for 24 hours;

i) fully decanting supernatant into a beaker; and

25

j) carrying out quantitative determination of mass m and solids
 content SC for:

iii) sediment in the measuring cylinder (m_{sediment} and
 SC_{sediment}); and

iv) the supernatant ($m_{\text{supernatant}}$ and $SC_{\text{supernatant}}$),

30

the suspended matter fraction M being calculated as follows:

$$M = \frac{SC_{\text{supernatant}} \cdot m_{\text{supernatant}}}{(SC_{\text{sediment}} \cdot m_{\text{sediment}} + SC_{\text{supernatant}} \cdot m_{\text{supernatant}})} \cdot 100\%.$$

11. The process according to any one of claims 1 to 10, wherein the weight ratio of components aa) to bb) is between 10:1 and 1:2.
12. The process according to any one of claims 1 to 11, wherein said component
5 aa) is Portland cement.
13. Use of a composition for accelerating hardening of chemical mixtures in construction,
wherein the composition is produced by contacting components
10 aa) at least one hydraulic binder,
bb) at least one dispersant for dispersing inorganic particles in water, and
cc) water,
wherein said contacting takes place with introduction of shearing energy, with
more than 100 kWh of shearing energy being introduced per metric ton of
15 composition,
the weight ratio of components aa) to cc) being between 1.5:1 and 1:70,
wherein the weight ratio of components aa) to bb) is between 20:1 and 1:2.
14. The use according to claim 13, wherein the composition comprises cement or
20 slag.
15. The use according to claim 13, wherein the composition comprises granulated blast furnace slag, flyash, ground silica, metakaolin, natural pozzolans, calcined oil shale, calcium sulfoaluminate cements, calcium aluminate cements, or
25 combinations thereof.
16. The use according to claim 13, wherein the at least one hydraulic binder is cement.

Fig. 1

