



(51) International Patent Classification:
H04R 1/00 (2006.01)

(21) International Application Number:
PCT/US2016/017335

(22) International Filing Date:
10 February 2016 (10.02.2016)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
14/618,963 10 February 2015 (10.02.2015) US

(71) Applicant: **BOSE CORPORATION** [US/US]; The Mountain, MS 3B1, Framingham, Massachusetts 01701-9168 (US).

(72) Inventors: **ZAMIR, Lee**; c/o Bose Corporation, The Mountain, MS 3B1, Framingham, Massachusetts 01701-9168 (US). **ZALISK, Michael**; c/o Bose Corporation, The

Mountain, MS 3B1, Framingham, Massachusetts 01701-9168 (US). **MOBED, Darius Darayes**; c/o Bose Corporation, The Mountain, MS 3B1, Framingham, Massachusetts 01701-9168 (US). **NAJEMY, Daniel D.**; c/o Bose Corporation, The Mountain, MS 3B1, Framingham, Massachusetts 01701-9168 (US).

(74) Agent: **SCHULER, David L.**; Bose Corporation, The Mountain, MS 3B1, Framingham, Massachusetts 01701-9168 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,

[Continued on next page]

(54) Title: SPEAKER KIT

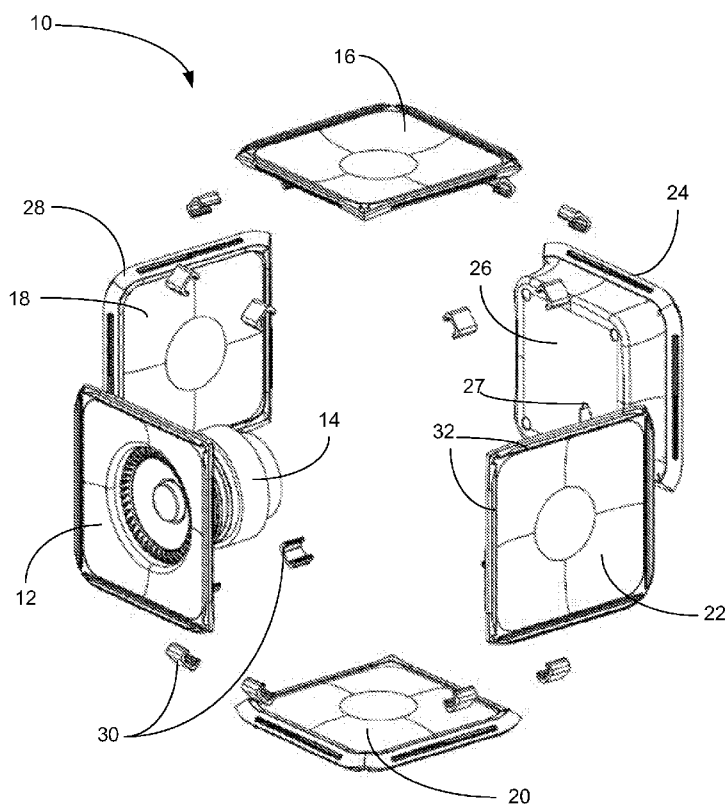


FIG. 1

(57) Abstract: In one aspect, a speaker kit includes a first portion of a speaker housing, and an electroacoustic driver that can be secured to the housing first portion. The kit has one or more additional portions of the speaker housing. One of the one or more additional housing portions has at least one electrical component secured thereto. The kit also has one or more mechanisms that can be used to hold the housing portions together such that the housing portions form an acoustic seal that encompasses an acoustic volume. The one or more mechanisms are removable from the housing portions such that the housing portions can be moved away from each other without damage to the housing portions or the one or more mechanisms.



SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,

DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT,
LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE,
SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

SPEAKER KIT

FIELD OF THE DISCLOSURE

[0001] The present disclosure relates to a speaker kit and components thereof.

BACKGROUND

[0002] With the increase in prevalence of mobile computing devices, children are being introduced to computing technology at a younger age. For example, it is common for a child to be proficient in operating a mobile phone or a tablet computer. It is desirable to encourage children's interest and familiarity with aspects of audio, video, and communications technologies.

SUMMARY

[0003] All examples and features mentioned below can be combined in any technically possible way.

[0004] In one aspect, a speaker kit includes a first portion of a speaker housing, and an electroacoustic driver that can be secured to the housing first portion. The kit has one or more additional portions of the speaker housing. One of the one or more additional housing portions has at least one electrical component secured thereto. The kit also has one or more mechanisms that can be used to hold the housing portions together such that the housing portions form an acoustic seal that encompasses an acoustic volume. The one or more mechanisms are removable from the housing portions such that the housing portions can be moved away from each other without damage to the housing portions or the one or more mechanisms.

[0005] Embodiments may include one of the following features, or any combination thereof. There are six housing portions which when held together form a parallelepiped. The at least one electrical component is selected from the group of electrical components including an amplifier, a digital signal processor, a microcontroller, a Bluetooth radio, and a light emitting diode. One or more of the housing portions including a gasket. The one or more mechanisms are each a clip which holds together two edges of a pair of housing portions. The at least one electrical component includes a Bluetooth receiver which can receive Bluetooth A2DP signals containing audio data

and Bluetooth LE signals containing command and control data. The at least one electrical component includes a port which can power a light source that can be used as both (i) a variable intensity lighting source, or (ii) a strobe light whose strobe rate is controllable to slow down a perceived motion of a diaphragm of the electroacoustic driver.

[0006] In another aspect, a speaker kit includes a first portion of a speaker housing, an electroacoustic driver that can be secured to the housing first portion, and one or more additional portions of the speaker housing. A wireless receiver can receive a first wireless signal containing audio data and a second, separate wireless signal containing control data. A port can power a light source that can be used as both (i) a variable intensity lighting source, or (ii) a strobe light whose strobe rate is controllable to slow down a perceived motion of a diaphragm of the electroacoustic driver. One or more mechanisms can be used to hold the housing portions together such that the housing portions form an acoustic seal that encompasses an acoustic volume.

[0007] Embodiments may include one of the above and/or below features, or any combination thereof. One of the one or more additional housing portions has at least one electrical component secured thereto. The one or more mechanisms are each a clip which holds together two edges of a pair of housing portions.

[0008] In yet another aspect, a user-assembled audio device includes an electroacoustic driver, an audio amplifier, an audio input operably connected to the audio amplifier, and a plurality of rigid housing portions configured to be assembled by a user to form a speaker housing. A first of the rigid housing portions is configured to receive the electroacoustic driver and a second of the rigid housing portions also houses the audio amplifier. One or more fasteners are configured to removably fasten the plurality of rigid housing portions together to form an acoustic seal between adjacent housing portions. A connector is configured to electrically connect the output of the amplifier to the electroacoustic driver.

[0009] Embodiments may include one of the above and/or below features, or any combination thereof. The electroacoustic driver is pre-installed in the first rigid housing portion configured to receive the electroacoustic driver. The audio amplifier is contained

within the second rigid housing portion. The connector comprises a pig-tail connector attached to the electroacoustic driver and configured to plug into a jack that electrically connects to the audio amplifier. The plurality of rigid housing portions include a gasket that helps form an acoustic seal between adjacent housing portions when assembled by a user. The fasteners comprise removable clips that hold together adjacent housing portions. The fasteners comprise screws that hold together adjacent housing portions. The audio device further includes a second electroacoustic driver. One of the plurality of rigid housing portions is configured to receive the second electroacoustic driver. The first housing portion is also configured to receive the second electroacoustic driver. The user-assembled speaker including the one electroacoustic driver forms a mono-channel audio device. The audio device further includes a second user-assembled speaker housing containing a single electroacoustic driver. The second user-assembled speaker housing contains a single electroacoustic driver that is configured to be electrically connected to the audio amplifier housed in the second rigid portion of the first user-assembled speaker. The audio amplifier includes a two-channel amplifier and sends a first channel to the first user-assembled speaker and a second channel to the second user-assembled speaker. The audio amplifier is configured to output a mono-channel audio signal when only the first user-assembled speaker is connected and a two-channel audio signal when both the first and second user-assembled speakers are connected. The audio input comprises a physical connector for connecting an audio source. The physical connector comprises a 3.5mm audio input jack. The audio input comprises a wireless receiver configured to receive wireless audio content. The wireless receiver comprises a Bluetooth receiver. The audio device further includes a signal processor for processing the audio received from the audio input prior to outputting the audio to the electroacoustic driver. The audio device further includes a wireless receiver for receiving wireless control commands. The audio device is enabled to allow control of the audio device via a separate computing device via the Bluetooth receiver. One of the control functions enabled is an alarm clock function that causes the audio device to play user-selected audio at a user-selected time.

BRIEF DESCRIPTION OF THE DRAWINGS

- [0010] FIG. 1 is a perspective view of a speaker kit;
- [0011] FIG. 2 a perspective view of a housing portion of the speaker kit of FIG. 1 with an electroacoustic transducer secured thereto;
- [0012] FIG. 3 a plan view of a housing portion of the speaker kit of FIG. 1;
- [0013] FIG. 4 is a graph that shows the intensity levels of RGB LEDs and the color that results therefrom;
- [0014] Fig. 5 is a schematic representation of the operational arrangement of the speaker; and
- [0015] FIG. 6 is a perspective view of the speaker kit of FIG. 1 in an assembled state.

DETAILED DESCRIPTION

[0016] The user-assembled speaker kits described below encourages understanding of a variety of technologies, such as acoustics, communications, electro-mechanical technologies.

[0017] With reference to FIGs. 1 and 5, a speaker kit 10 which can be assembled by a user into a speaker (i.e. an audio device) includes a first rigid portion 12 of a speaker housing. The first housing portion 12 is configured to have an electro-acoustic driver 14 secured (pre-installed) to it. Four additional rigid housing portions 16, 18, 20 and 22 are also provided with the kit. A sixth rigid housing portion 24 has electrical components 26 secured to the housing portion that include a two channel audio amplifier 25, a digital signal processor (DSP) 29, a microcontroller 31, an audio input in the form of a wireless receiver such as a Bluetooth transceiver 35 which can receive wireless Bluetooth A2DP signals containing audio data (i.e. content) and wireless control commands such Bluetooth LE signals containing command and control data, and one or more light emitting diodes (described in further detail below). The Bluetooth transceiver (or radio) communicates with the microcontroller 31 and with the DSP 29 via a buffer 37. The

amplifier 25 is electrically connected via a jack 27 by a pair of wires (not shown) to the driver 14.

[0018] Referring to FIG. 1, each of the housing portions are preferably made of translucent plastic and preferably include a translucent gasket 28 (preferably made of rubber) that is located about a periphery of the housing portion. The housing portions are configured to be assembled by a user to form a speaker housing. Instead of using a single driver 14, a pair of smaller drivers can be secured to the housing portion 12. Alternatively, the pair of drivers can be respectively secured to opposing housing portions 18 and 22 so that mechanical vibrations from the speakers substantially cancel out.

[0019] A group of sixteen fastening mechanisms in the form of clips 30 are used to hold the housing portions together such that the housing portions form an acoustic seal (a substantially airtight seal that preferably has less than about 1% leakage to/from an external environment) that encompasses an acoustic volume. Each clip 30 is slid onto or snapped onto a pair of adjacent edges of a respective pair of housing portions. The edges of the housing portion each have a lip 32 onto which the clip can grab and remain secured. The clips 30 are preferably made of plastic or metal. Although two clips 30 are shown for holding each pair of edges together, a single longer clip or more than two clips can be used. In another example screws, bolts, nails or other fasteners are used instead of or in addition to clips to hold the housing portions together.

[0020] As shown in Fig. 6, when the six housing portions are assembled together they form a parallelepiped (in this example a cube). Other arrangements of housing portions may be used. For example, a spherical speaker kit may have two, three or four housing portions which are secured together to encompass an acoustic volume. If a spherical kit with two hemispherically shaped housing portions are used, a single clip may be flexed to a more open configuration and then allowed to retract so that it can be snapped onto the lips of the two housing portions. After the speaker has been assembled, the clips 30 can be removed from the housing portions such that the housing portions can be moved away from each other without damage to the housing portions or the clips. A pyramid shape with five housing portions is another example of a speaker shape.

[0021] Turning to FIG. 2, the housing portion 12 is shown with the electro-acoustic driver 14 secured to it by four screws 33 (one screw is behind the transducer and is not visible). A gasket 28 is also visible in this view. An electrical connector in the form of a pair of wires 34 (mentioned above) connects at a first end via a pigtail connector to the driver 14 and at a second end to the jack 27 (FIG. 1) which is electrically connected to the amplifier 25. In another example, the driver 14 may not be secured to the housing portion 12 in the kit, but gets secured to the housing portion 12 by the person assembling the kit into a speaker.

[0022] With reference to FIGs. 3 and 5, a back side of the housing portion 24 which is not visible in FIG. 1 is shown. The housing portion 24 includes a power port (source) 36 which receives 12 volt DC electrical power from an external AC/DC power supply which is plugged into AC mains power. In addition to or as an alternate to using AC mains power, a disposable or rechargeable battery can be used to provide electrical power to the speaker. A 3.5mm port 38 is provided for use as an auxiliary audio input physical connector from an external audio source. An audio signal from the port 38 passes through a buffer 39 and then is passed onto the DSP 29. A light port 40 is used to provide electrical power to a light source that can be used as both (i) a variable intensity lighting source, or (ii) a strobe light whose strobe rate is controllable to slow down a perceived motion of a diaphragm of the electroacoustic driver. A port 42 can provide amplified audio signals from the amplifier 25 on the housing portion 24 over an electrical connection for operating a separate user assembled speaker housing containing a single electroacoustic driver (not shown) which can be operated with the instant speaker kit 10 as a stereo pair. Alternatively, the separate speaker can be a bass box.

[0023] A Bluetooth button/indicator 44 is provided for pairing the speaker via a Bluetooth wireless connection with an external audio source device (not shown). The button 44 is pressed and released to put the speaker into discoverable mode for a set period of time. In this state a blue LED indicator inside the button is flashing on and off. At the audio source device (e.g. a computing device such as an iPhone) a user looks for the speaker in the list of available Bluetooth devices and then selects the speaker in order to create a Bluetooth A2DP connection between the audio source device and the

speaker. The blue LED is now steadily lit. The user then starts up an application on the audio source device that is used to control the speaker and places the audio source device next to the speaker to cause a Bluetooth LE connection to automatically be created via the A2DP pairing. The Bluetooth LE connection allows control of the speaker by the audio source device. The application on the audio source device can include a control a function in the form of an alarm clock that causes the audio source device to play user-selected audio at a user-selected time over the speaker.

[0024] A power/mode button 46 is used for selecting on or standby states of the speaker, and for causing the speaker to cycle through various modes (discussed below). To turn the speaker on when it is currently in a standby state, the button 46 is pressed and released. The speaker will turn on to the last selected mode when the speaker was last turned to a standby state and a green power LED 45 adjacent to the power port 36 is lit. To turn the speaker to standby when it is currently powered on, the button 46 is pressed and held for at least two seconds. In standby the green LED 45 is not lit. The power source 36 and power/mode switch 46 are both electrically connected to the microcontroller 31 through a protection and load switch 49. A micro USB port 47 is used for microcontroller programming (e.g. Arduino programming) and firmware updating.

[0025] When the speaker is on it can be in one of number of modes which are cycled through by briefly pressing the button 46. In a color select mode a user moves a slider 48 (FIG. 3) to select a color from the rainbow which is created by red, green and blue LEDs 51 inside the speaker. This color will be transmitted through the translucent speaker housing. In FIG. 4 the Y axis shows the percent that each of these LEDs 51 are powered on relative to a full on state. The X axis shows the resulting color that is obtained based on the intensity level of each of the red, green and blue LEDs 51.

[0026] In a color cycle mode the user moves the slider 48 to select a rate (e.g. 500ms to 5 seconds) at which the speaker will automatically cycle smoothly through a complete rainbow spectrum. In a color random mode the user moves the slider to select a rate (e.g. 100ms to 2 seconds) at which the speaker will automatically abruptly change a cycling through the rainbow. In a color candle mode the user moves the slider 48 to select a color with the intensity of the LEDs 51 being varied to simulate the

flickering of a candle. In a color beat mode an audio signal received by the port 38 is used to drive a color intensity response in the red, blue and green LEDs 51. For example, the intensity of the red LED is controlled as a function of the acoustic level in the 20Hz-200Hz band, the intensity of the green LED is controlled as a function of the acoustic level in the 200Hz-1000Hz band, and the intensity of the blue LED is controlled as a function of the acoustic level in the 1kHz-10kHz band. If no audio signal is present the three LEDs 51 are set to create a dim white light.

[0027] In a tone generator mode the microcontroller 31 creates a sine wave on a channel driving the driver 14 and a square wave that is transmitted out of the port 42 to a separate speaker. The slider position sets the frequency from, for example, 5Hz-500Hz and the LEDs 51 are set to achieve a dim yellow light. In a filter sweep mode an audio signal received on the port 38 is narrow band filtered with the center of the band being set by the position of the slider 48. For example the band can be 100Hz wide and the center of the band can be set from 50Hz to 10kHz.

[0028] A number of implementations have been described. Nevertheless, it will be understood that additional modifications may be made without departing from the scope of the inventive concepts described herein, and, accordingly, other embodiments are within the scope of the following claims.

What is claimed is:

1. A speaker kit, comprising:
 - a first portion of a speaker housing;
 - an electroacoustic driver that can be secured to the housing first portion;
 - one or more additional portions of the speaker housing, one of the one or more additional housing portions having at least one electrical component secured thereto; and
 - one or more mechanisms that can be used to hold the housing portions together such that the housing portions form an acoustic seal that encompasses an acoustic volume, the one or more mechanisms being removable from the housing portions such that the housing portions can be moved away from each other without damage to the housing portions or the one or more mechanisms.
2. The speaker kit of claim 1, wherein there are six housing portions which when held together form a parallelepiped.
3. The speaker kit of claim 1, wherein the at least one electrical component is selected from the group of electrical components including an amplifier, a digital signal processor, a microcontroller, a Bluetooth radio, and a light emitting diode.
4. The speaker kit of claim 1, wherein one or more of the housing portions including a gasket.
5. The speaker kit of claim 1, wherein the one or more mechanisms are each a clip which holds together two edges of a pair of housing portions.
6. The speaker kit of claim 1, wherein the at least one electrical component includes a Bluetooth receiver which can receive Bluetooth A2DP signals containing audio data and Bluetooth LE signals containing command and control data.
7. The speaker kit of claim 1, wherein the at least one electrical component includes a port which can power a light source that can be used as both (i) a variable intensity lighting source, or (ii) a strobe light

whose strobe rate is controllable to slow down a perceived motion of a diaphragm of the electroacoustic driver .

8. A speaker kit, comprising:
a first portion of a speaker housing;
an electroacoustic driver that can be secured to the housing first portion;
one or more additional portions of the speaker housing;
a wireless receiver which can receive a first wireless signal containing audio data and a second, separate wireless signal containing control data;
a port which can power a light source that can be used as both (i) a variable intensity lighting source, or (ii) a strobe light whose strobe rate is controllable to slow down a perceived motion of a diaphragm of the electroacoustic driver; and
one or more mechanisms that can be used to hold the housing portions together such that the housing portions form an acoustic seal that encompasses an acoustic volume.

9. The speaker kit of claim 8, wherein one of the one or more additional housing portions has at least one electrical component secured thereto.

10. The speaker kit of claim 9, wherein the at least one electrical component is selected from the group of electrical components including an amplifier, a digital signal processor, a microcontroller, a Bluetooth radio, and a light emitting diode.

11. The speaker kit of claim 8, wherein there are six housing portions which when held together form a parallelepiped.

12. The speaker kit of claim 8, wherein one or more of the housing portions includes a gasket.

13. The speaker kit of claim 8, wherein the one or more mechanisms are each a clip which holds together two edges of a pair of housing portions.

14. A user-assembled audio device comprising:
an electroacoustic driver;

an audio amplifier;

an audio input operably connected to the audio amplifier;

a plurality of rigid housing portions configured to be assembled by a user to form a speaker housing, wherein a first of the rigid housing portions is configured to receive the electroacoustic driver and wherein a second of the rigid housing portions also houses the audio amplifier;

one or more fasteners that are configured to removably fasten the plurality of rigid housing portions together to form an acoustic seal between adjacent housing portions; and

a connector configured to electrically connect the output of the amplifier to the electroacoustic driver.

15. The audio device of claim 14, wherein the electroacoustic driver is pre-installed in the first rigid housing portion configured to receive the electroacoustic driver.

16. The audio device of claim 14, wherein the audio amplifier is contained within the second rigid housing portion.

17. The audio device of claim 14, wherein the connector comprises a pig-tail connector attached to the electroacoustic driver and configured to plug into a jack that electrically connects to the audio amplifier.

18. The audio device of claim 14, wherein the plurality of rigid housing portions include a gasket that helps form an acoustic seal between adjacent housing portions when assembled by a user.

19. The audio device of claim 14, wherein the fasteners comprise removable clips that hold together adjacent housing portions.

20. The audio device of claim 14, wherein the fasteners comprise screws that hold together adjacent housing portions.

21. The audio device of claim 14, further comprising

a second electroacoustic driver, and wherein one of the plurality of rigid housing portions is configured to receive the second electroacoustic driver.

22. The audio device of claim 21, wherein the first housing portion is also configured to receive the second electroacoustic driver.

23. The audio device of claim 14, wherein the user-assembled speaker including the one electroacoustic driver forms a mono-channel audio device.

24. The audio device of claim 23, further comprising:

a second user-assembled speaker housing containing a single electroacoustic driver.

25. The audio device of claim 24, wherein the second user-assembled speaker housing containing a single electroacoustic driver is configured to be electrically connected to the audio amplifier housed in the second rigid portion of the first user-assembled speaker.

26. The audio device of claim 25, wherein the audio amplifier comprises a two-channel amplifier and sends a first channel to the first user-assembled speaker and a second channel to the second user-assembled speaker.

27. The audio device of claim 26, wherein the audio amplifier is configured to output a mono-channel audio signal when only the first user-assembled speaker is connected and a two-channel audio signal when both the first and second user-assembled speakers are connected.

28. The audio device of claim 14, wherein the audio input comprises a physical connector for connecting an audio source.

29. The audio device of claim 28, wherein the physical connector comprises a 3.5mm audio input jack.

30. The audio device of claim 14, wherein the audio input comprises a wireless receiver configured to receive wireless audio content.

31. The audio device of claim 30 wherein the wireless receiver comprises a Bluetooth receiver.

32. The audio device of claim 14 further comprising a signal processor for processing the audio received from the audio input prior to outputting the audio to the electroacoustic driver.

33. The audio device of claim 14, further comprising a wireless receiver for receiving wireless control commands.

34. The audio device of claim 33, wherein the wireless receiver comprises a Bluetooth receiver.

35. The audio device of claim 34, wherein the audio device is enabled to allow control of the audio device via a separate computing device via the Bluetooth receiver.

36. The audio device of claim 35, wherein one of the control functions enabled is an alarm clock function that causes the audio device to play user-selected audio at a user-selected time.

1/4



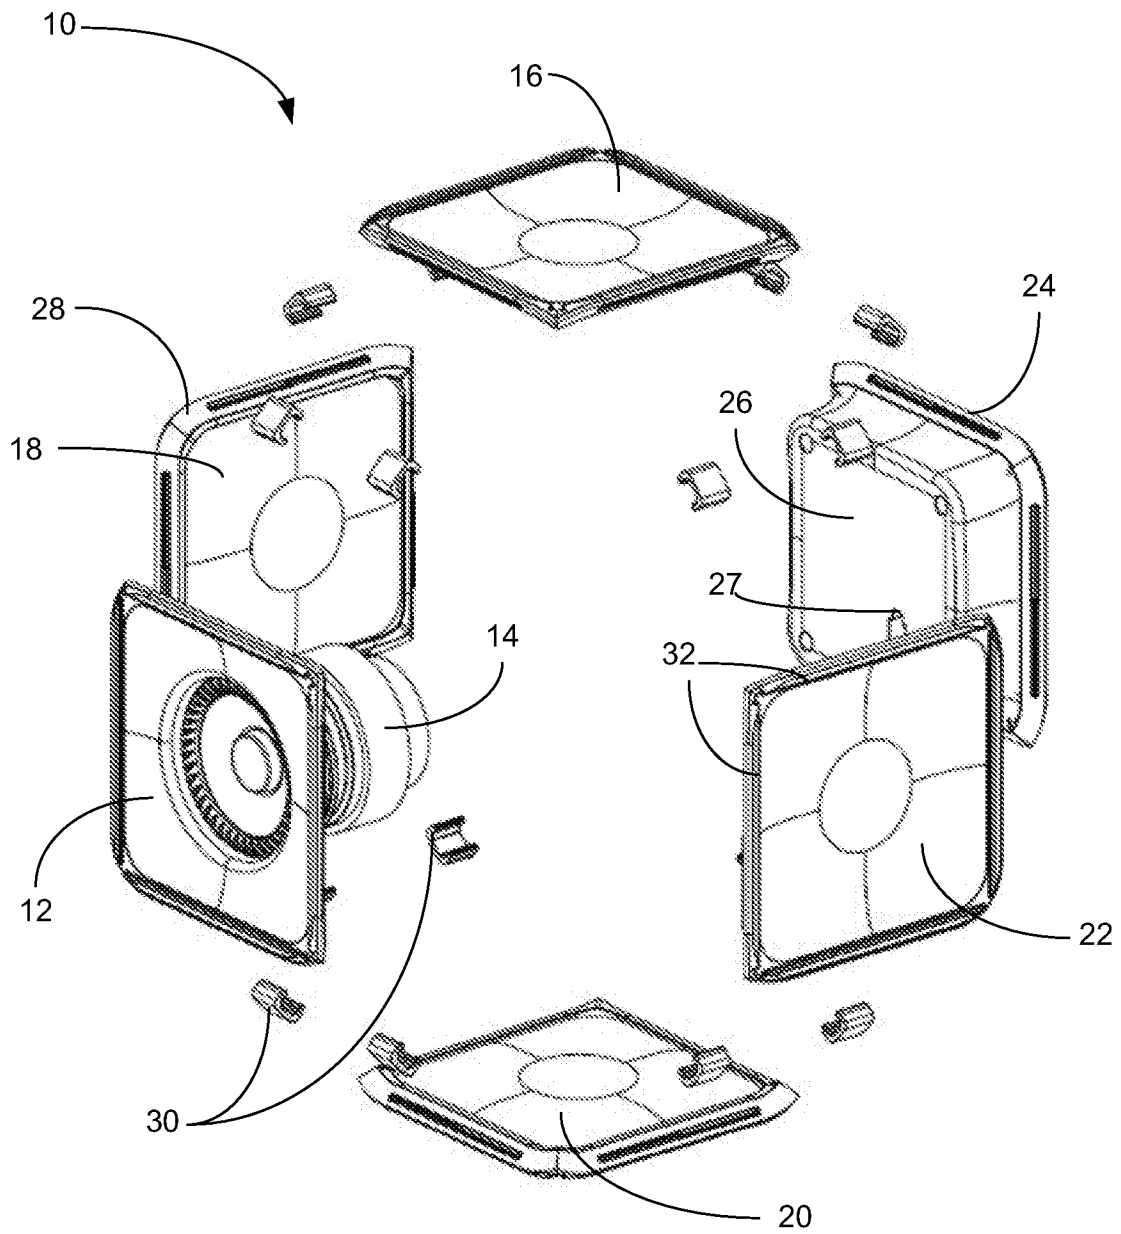


FIG. 1

2/4

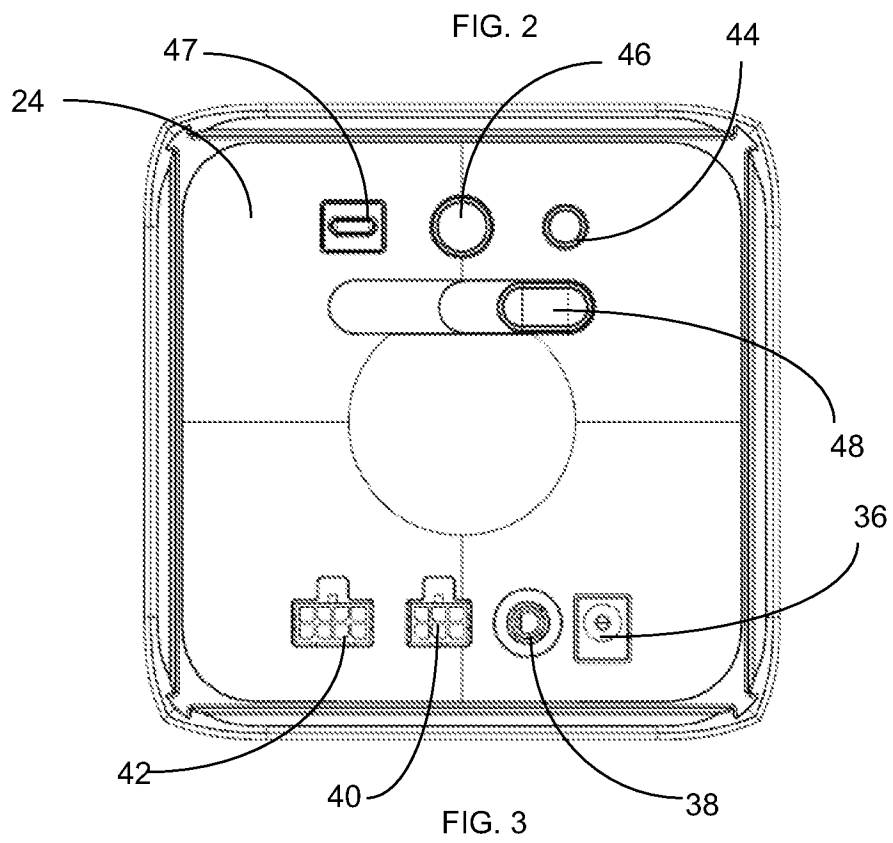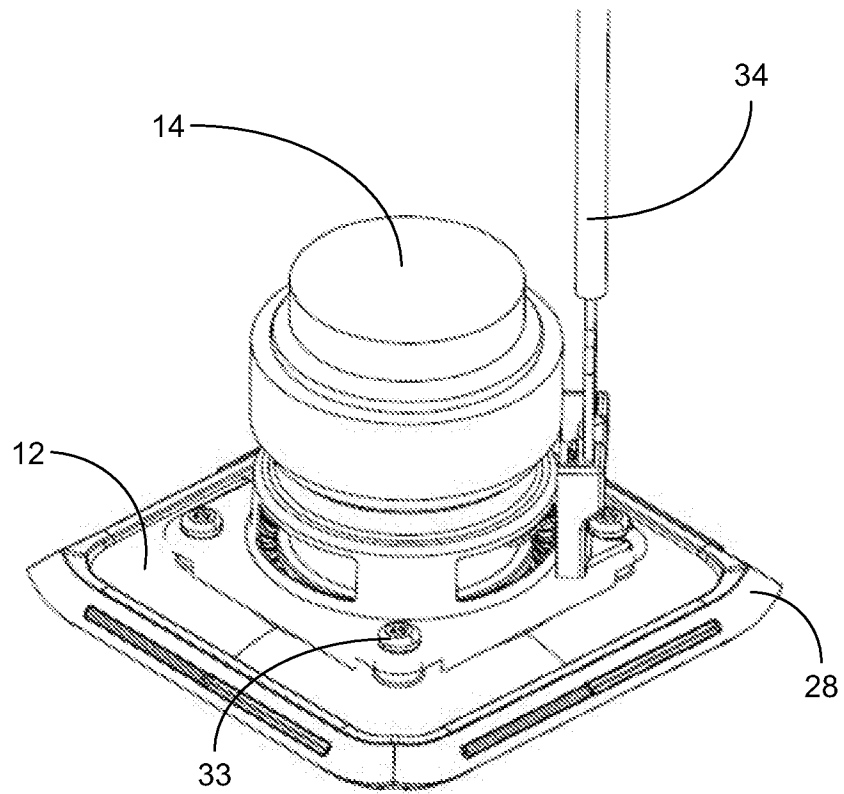

3/4

Rainbow Scroll:

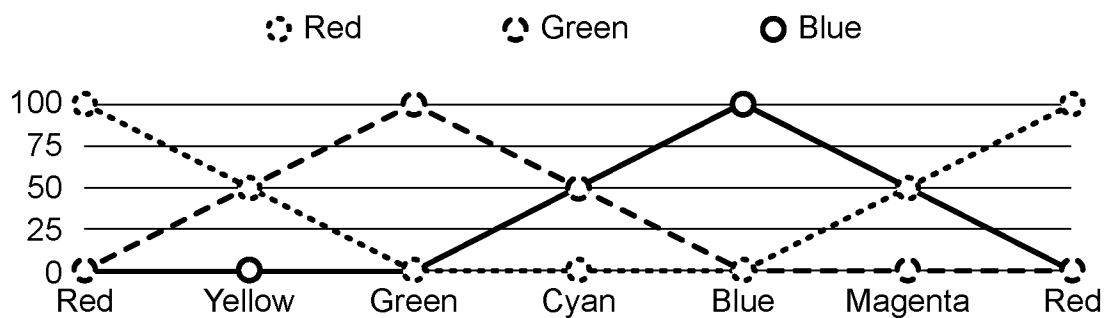


FIG. 4

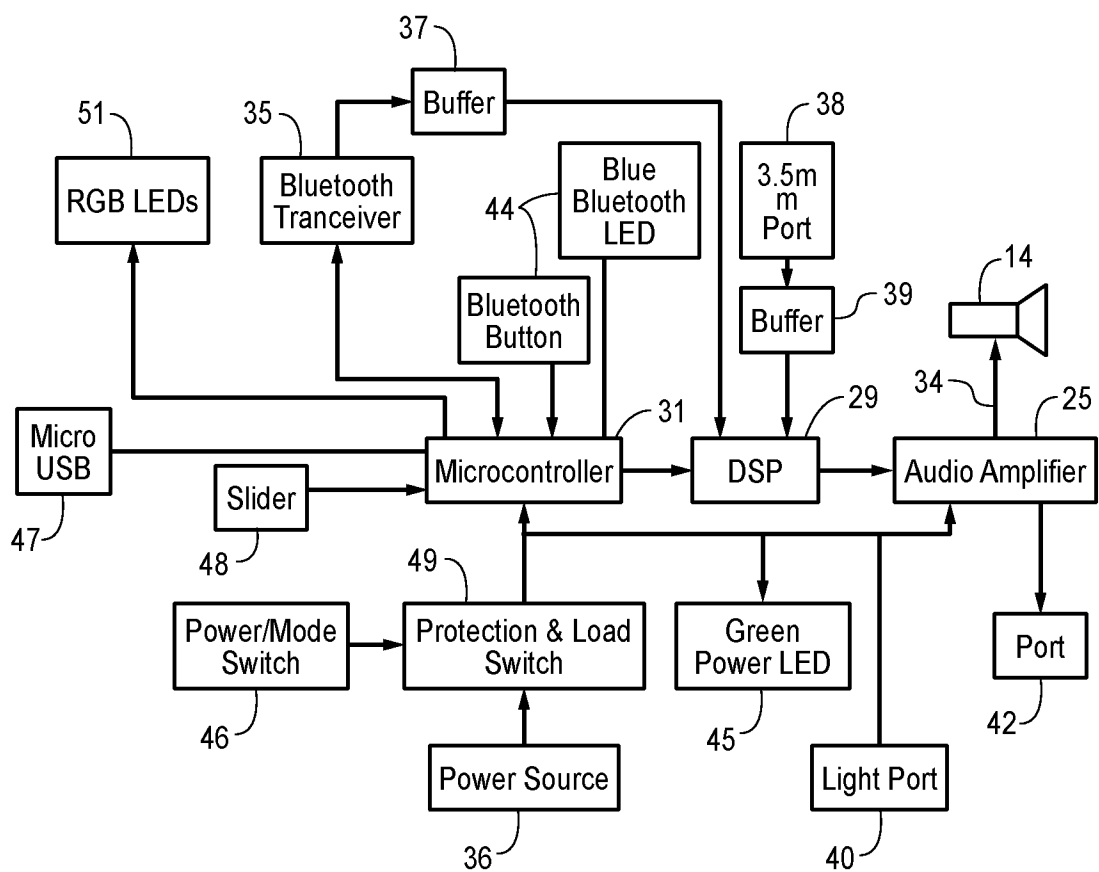


FIG. 5

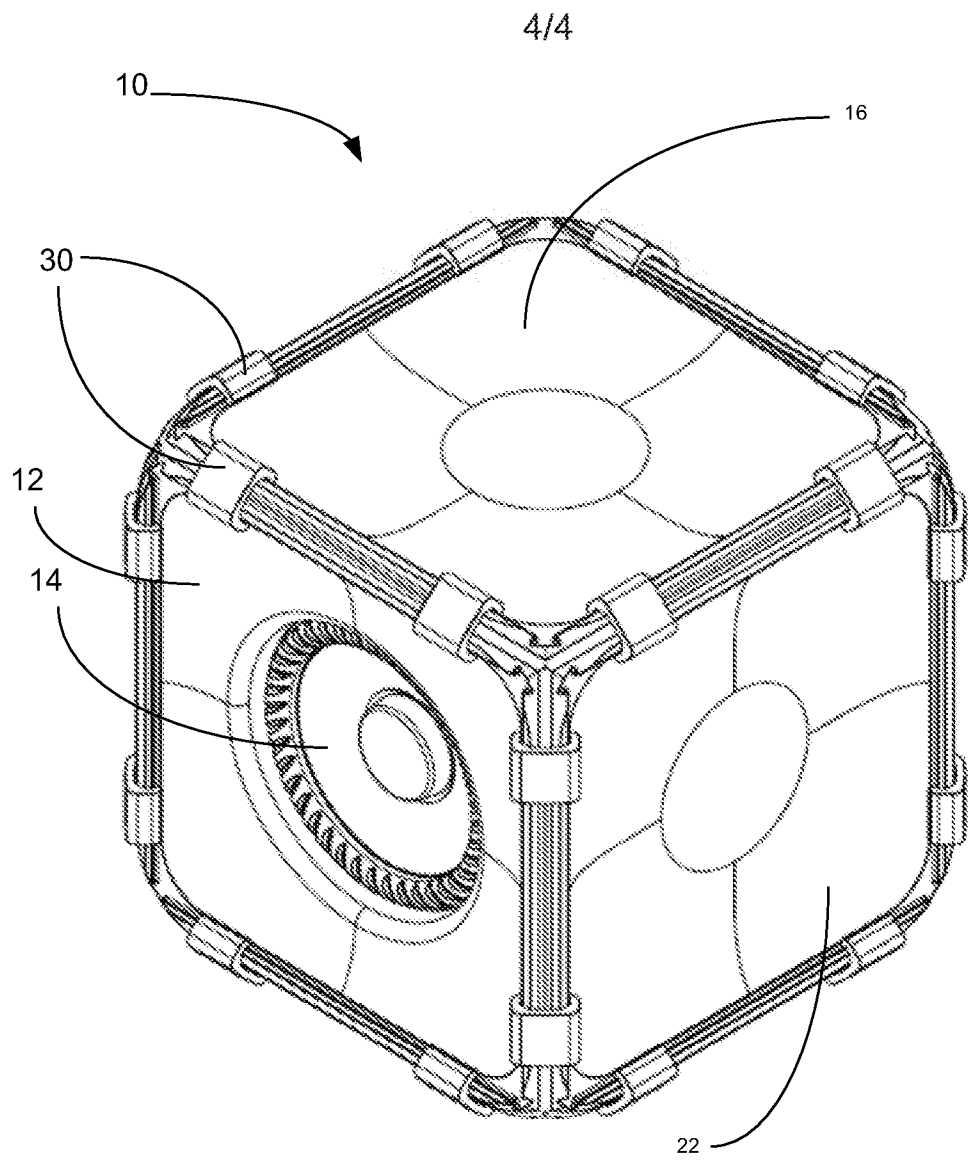


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2016/017335A. CLASSIFICATION OF SUBJECT MATTER
INV. H04R1/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	theloudspeakerkit: "Loudspeaker kits", Internet 29 October 2014 (2014-10-29), XP002755999, Retrieved from the Internet: URL:https://web.archive.org/web/2014102903 3819/http://www.theloudspeakerkit.com/loud speaker-components/ [retrieved on 2016-04-01] the whole document -----	1-36



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

1 April 2016

Date of mailing of the international search report

29/04/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Van Staveren, Martin