



(51) International Patent Classification:

H04R 1/02 (2006.01) H04R 1/34 (2006.01)

(21) International Application Number:

PCT/N02020/050 174

(22) International Filing Date:

24 June 2020 (24.06.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

20190836 28 June 2019 (28.06.2019) NO

(71) Applicant: NNNN AS [NO/NO]; Hvamsvegen 24, 2150 Ames (NO).

(72) Inventor: SKRAMSTAD, Rune; Stubberudveien 144, 303 1 Dranunen (NO).

(74) Agent: BRYN AARFLOT AS; Stortingsgata 8, 0161 OSLO (NO).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,

MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: DIRECTIONAL LOUDSPEAKER

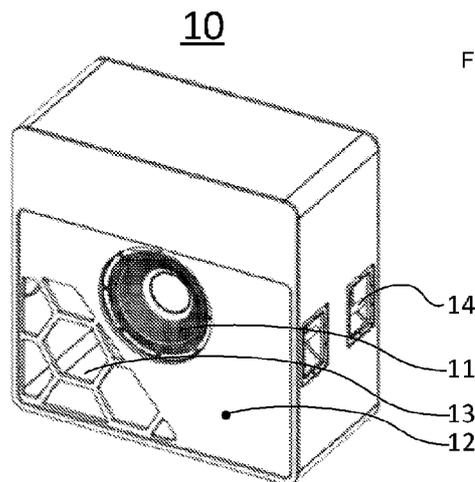


Fig. 1

(57) Abstract: The present invention discloses directional loudspeaker at least comprising: a loudspeaker cabinet comprising: a folded horn with a length of minimum one quarter of a wavelength, λ , and the horn mouth opening is asymmetrically placed in a front baffle providing a physical delay between the different wraparound pathways to the rear side of the loudspeaker cabinet; one or more driver speakers loading the horn with an open rear chamber, the open rear chamber having at least two opening pathways with a distance there between providing a physical delay of a rear wave, the loudspeaker cabinet provides at least four pathways for in phase and out of phase signals, at least two pathways for the out of phase signal and at least two pathways for the in phase signal amplified by the horn.



Directional loudspeaker

Technical Field

[0001] The present invention relates to a directional loudspeaker.

Background Art

[0002] The present invention relates generally to the field of professional, studio, cinema and high performance audio reproduction and the ability to control directivity; and, more particularly concerns infrabass, bass, midbass and midrange in scenarios where typically the speaker cabinet size is smaller than the wavelengths reproduced by the loudspeaker.

[0003] In the field of professional sound reinforcement there is a large need to be able to control directivity to avoid excessive sound levels where it is not needed. With controlled directivity it is possible to play loud towards spectators without disturbing the environment surrounding the event area. Another important aspect is increased feedback resistance when microphones are involved. The ability to achieve a more even frequency response over a larger area is also something that can be obtained by controlling and reduce overlap zones from different loudspeaker positions.

[0004] Early sound systems obtained controlled directivity towards low frequencies by their sheer size vs wavelengths while modern sound systems typically are based around smaller modules and signal processing to get the desired directivity.

[0005] The typical high performance large standalone horn speakers from the 1920's through the 1980's typically used large horn mouths and sometimes extra baffle walls to get directivity down towards low frequencies.

[0006] Large sound reinforcement low frequency systems from the 1970's through today often use a building block design by making a large subwoofer stack out of smaller modules where the combined total baffle size enables low frequency controlled directivity.

[0007] From about the 2000's array technology known from antenna theory, seismic, wave field synthesis and ultrasound beamforming has been

transferred to professional sound reproduction. However the most typical use cases involves simple configurations like; gradient arrays or static end fire arrays. Gradient arrays typically uses different signal processing for each element in the array to achieve a cardioid dispersion pattern. The result is great with regards to dispersion control but the impulse response is stretched and sound quality suffers so much that most high level sound engineers have this option as a last resort. A slightly better version of this uses a 2:1 configuration of the concept where two drivers are pointing forwards and one driver is pointing rearwards, in this configuration the rear wave contribution in the front is 6dB less and the impulse response stretch is thus less audible. The static version of this 2:1 concept has a small usable bandwidth of about one octave where the dispersion pattern is a cardioid or close to a cardioid. Fully passive cardioid subwoofers with two bass reflex elements in one speaker cabinet put into a specific configuration is also something that is in use.

[0008] End fire array is in another league with regards to sound quality and all elements of such an array combines in phase at the front of the array while they combine in chaotic phase and level on the rear side thus achieving rear cancellation. The drawback with this solution is the depth of the array which needs to be very deep, typically 4m or more with regard to low frequencies for a static array configuration. Four or more modules in the array is the minimum and the industry standard for good performance. Adaptive end fire arrays with a lot of headroom per element can be configured with less depth for equally good performance, but a highly competent system engineer will be needed to operate such an array or calculations have to be done upfront.

Disclosure of Invention

[0009] It is one object of the invention to provide a loudspeaker system which do not suffer from the problems indicated above. By introducing a directional loudspeaker at least comprising: a loudspeaker cabinet containing a folded horn with a length of minimum one quarter of the longest wavelength to be reproduced, λ , and the horn mouth opening asymmetrically placed in the front baffle providing a physical delay between the different wraparound

pathways to the rear side of the loudspeaker cabinet, a driver loading the horn with an open rear chamber, the open rear chamber having at least two opening pathways with a distance in between providing a physical delay of the rear wave. Said configuration providing at least four pathways for the in phase and out of phase signals, at least two pathways for the out of phase signal and at least two pathways for the in phase signal amplified by the horn, the at least four pathways providing physically different sound levels and delays with regards to a measurement point behind the loudspeaker cabinet on axis. The combination of these signals providing directionality making a sub cardioid dispersion pattern with 3-1 8dB sound level decrease with typically 6-1 2dB decrease on the rear side of the loudspeaker cabinet over its operating frequency range.

[001 0] Other advantageous features will be apparent from the accompanying claims.

Brief Description of Drawings

[001 1] Following is a brief description of the drawings in order to make the invention more readily understandable, the discussion that follows will refer to the accompanying drawings, in which

[0012] Fig. 1 shows front of a loudspeaker cabinet, front driver open rear chamber in centre of baffle, horn mouth opening with hexagon reinforcement in lower left corner,

[001 3] Fig. 2 shows section view cut with the centre plane of the loudspeaker cabinet showing the horn path from the magnet side of the drivers towards the horn opening in the lower left corner,

[0014] Fig. 3 shows front of the loudspeaker cabinet with hidden edges visible,

[001 5] Fig. 4 shows rear side of loudspeaker cabinet with rear driver in centre of rear plate, open rear chamber,

[0016] Fig. 5 shows a section view from the rear side cut with the centre plane showing horn path from the driver magnet side to the horn mouth opening in the lower right corner, and

[0017] Fig. 6 shows a loudspeaker cabinet seen from the front, the interior of the loudspeaker cabinet is shown with a rear driver speaker, and an interior horn is shown with its inner and outer walls.

Detailed description of the Invention

[0018] In the following it is firstly disclosed general embodiments in accordance to the present invention, thereafter particular exemplary embodiments will be described. Where possible reference will be made to the accompanying drawings and where possible using reference numerals in the drawings. It shall be noted however that the drawings are exemplary embodiments only and other features and embodiments may well be within the scope of the invention as described.

[0019] In the following description it will be adhered to the definitions below:

- Loudspeaker cabinet, is a cabinet for a directional loudspeaker 10 according to the present invention excluding active elements and terminals 41.

[0020] The present invention provides a new concept to directional loudspeakers, an option that could be used with or without any dedicated signal processing for directional control. In addition the invention has everything needed in each module for directional control given by the physical design, thus providing a simple solution without the large size, processing and need for multiple elements of prior art.

[0021] To achieve directional control in a loudspeaker cabinet where the baffle size is smaller than the wavelengths it is reproducing a novel concept is presented: One or several drivers load the acoustic front side into a folded horn that has a length of minimum one quarter of the longest wavelength to be reproduced - a quarter-wave horn - with a horn mouth opening at the exterior of the cabinet, the acoustic front side of the drivers representing the input signal from an amplifier device, the acoustic rear side of this driver or drivers have their rear acoustic output which is the out of phase input signal from the amplifier device in an open or resistive rear chamber with at least two different pathways into free air outside the loudspeaker cabinet. By designing in the horn mouth asymmetrically placed on the

baffle the sound that wrap around the loudspeaker cabinet from the horn mouth will have at least two different length pathways around the loudspeaker cabinet, and by adding the lower level out of phase rear wave of the driver or drivers coming from at least two different pathways the combined wave on the rear side of the loudspeaker cabinet will have significantly decreased level compared to the front wave. Depending on the design a broad band level decrease within the operating range in the amount of 3-18dB for the on axis rear wave compared to the on axis front wave has been calculated.

- [0022] The level and positioning of the direct radiating paths can be tuned with resistive material and/or geometrical positioning and/or shape of the pathways. The horn mouth opening positioning in the loudspeaker cabinet can be used to tune the path lengths and number of pathways around the loudspeaker cabinet for the wraparound sound.
- [0023] An example embodiment of said directional loudspeaker cabinet: Two drivers with open back rear chambers meeting free air mounted on the front and rear centreline of the loudspeaker cabinet, driving a folded horn with the horn mouth asymmetrically placed in the front baffle. In this configuration the rear wave on axis consists of four sound sources combining; source one starting at 0ms is the rear driver open chamber, source two is the front driver open chamber with approximately 3ms physical delay caused by wrapping sound around the loudspeaker cabinet, source three is the horns short pathway wrapping around the loudspeaker cabinet which is delayed by approximately 15ms, source four is the horns long pathway wrapping around the loudspeaker cabinet which is delayed by approximately 18ms.
- [0024] On the front side the sound pressure from the horn is significantly louder than from any of the drivers open rear chambers since the drivers combine into the horn with their acoustic front sides and are physically far apart on the outside of the loudspeaker cabinet with their acoustic rear sides.
- [0025] A prototype of this example embodiment has been measured and the average level decrease of the rear wave within the operating range of 23-

100Hz was about 7dB with no signal processing involved for a standalone unit.

[0026]

10	Directional loudspeaker i.e. horn loaded loudspeaker cabinet with one or more speaker drivers
11	Front driver element / front driver speaker
12	Front baffle
13	Horn mouth, in one embodiment hexagon reinforced
14	Loudspeaker cabinet handle
21	Magnet rear driver element / magnet rear driver speaker
22	Inner sidewall of horn
23	Outer sidewall of horn
31	Rear driver element / rear driver speaker
41	Contact terminals
42	Rear baffle
51	Magnet front driver element / magnet front driver speaker
62a	First outer wall of loudspeaker cabinet
62b	Second outer wall of loudspeaker cabinet
62c	Third outer wall of loudspeaker cabinet
62d	Fourth outer wall of loudspeaker cabinet
λ	λ , represents the longest wavelength the loudspeaker cabinet is configured to reproduce, this will be between 3 – 3000, and typically 16 - 300Hz

Claims

1. A directional loudspeaker at least comprising:
 - a) a loudspeaker cabinet comprising:
 - i. a folded horn with a length of minimum one quarter of a wavelength, where the wavelength is the longest wavelength the loudspeaker cabinet is configured to reproduce, λ , and the horn mouth opening is asymmetrically placed in a front baffle providing a physical delay of sound waves between the different wraparound pathways to the rear side of the loudspeaker cabinet;
 - ii. one or more driver speakers loading the horn with an open rear chamber, the open rear chamber having at least two opening pathways with a distance there between providing a physical delay of a rear sound wave,
 - iii. the loudspeaker cabinet provides at least four pathways for in phase and out of phase signals, at least two pathways for the out of phase signal and at least two pathways for the in phase signal amplified by the horn.
2. Directional loudspeaker according to claim 1, where the loudspeaker cabinet comprises two driver speakers loading the horn.
3. Directional loudspeaker according to claim 1, where the loudspeaker cabinet comprises multiple driver speakers loading the horn.
4. Directional loudspeaker according to any of the claims 1 - 3, where the loudspeaker cabinet further comprises at least one resistive rear chamber path.
5. Directional loudspeaker according to claim 1 - 3, where the loudspeaker cabinet further comprises two or more resistive rear chamber paths.
6. Directional loudspeaker according to claim 1 - 3, where the loudspeaker cabinet further comprises resistive rear chamber paths for all rear chamber paths.

10

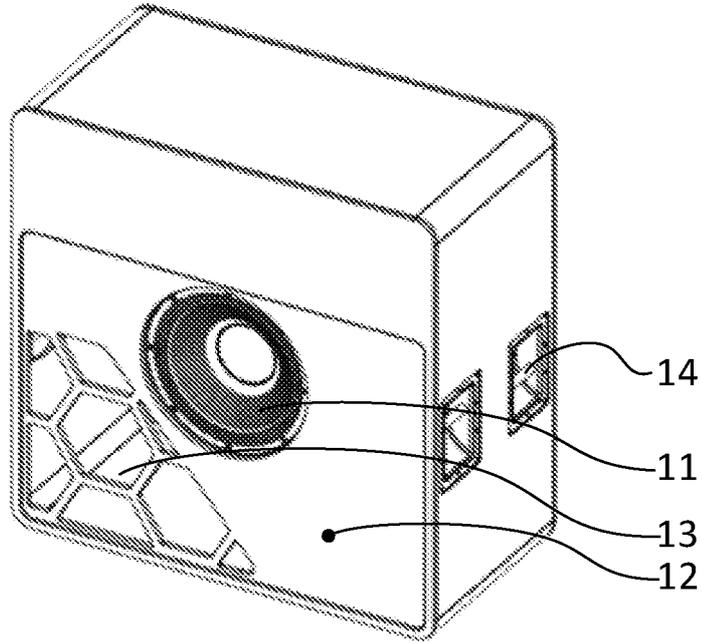


Fig. 1

10

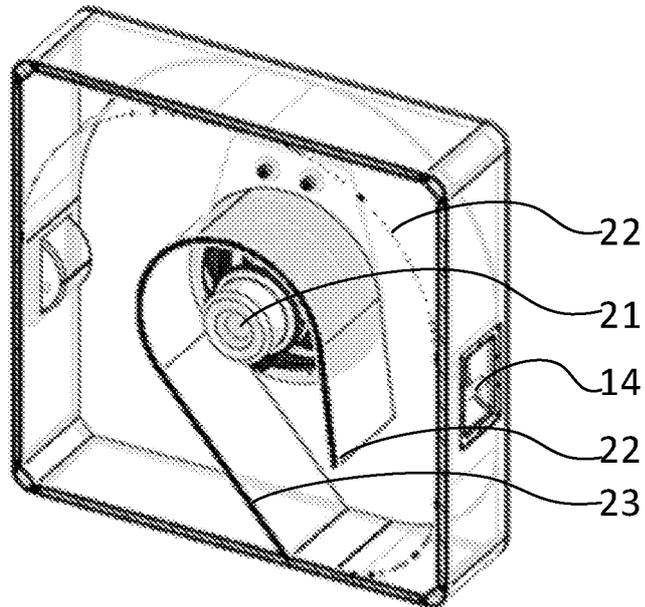


Fig 2

10

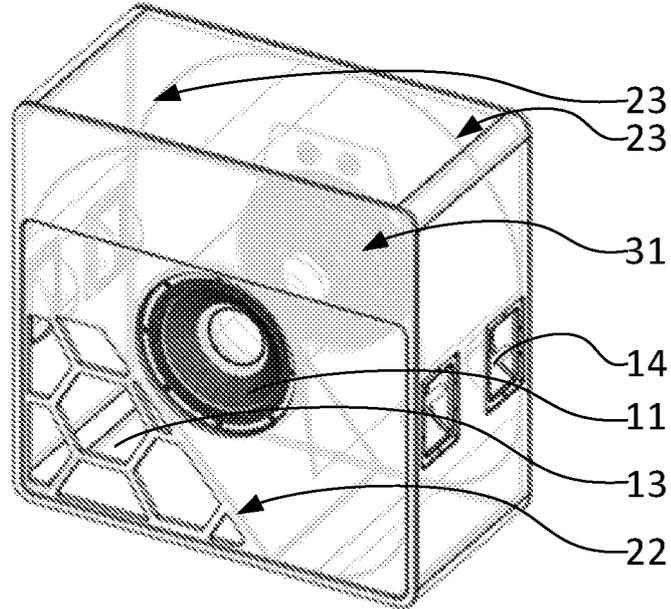


Fig. 3

10

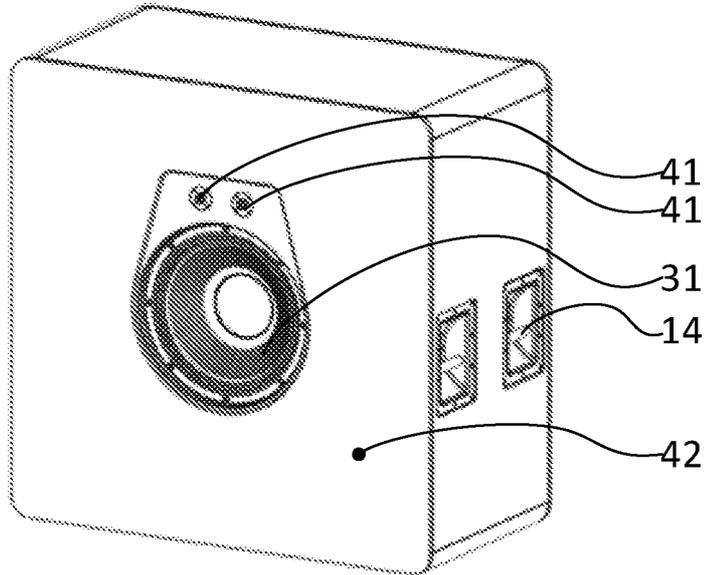


Fig. 4

10

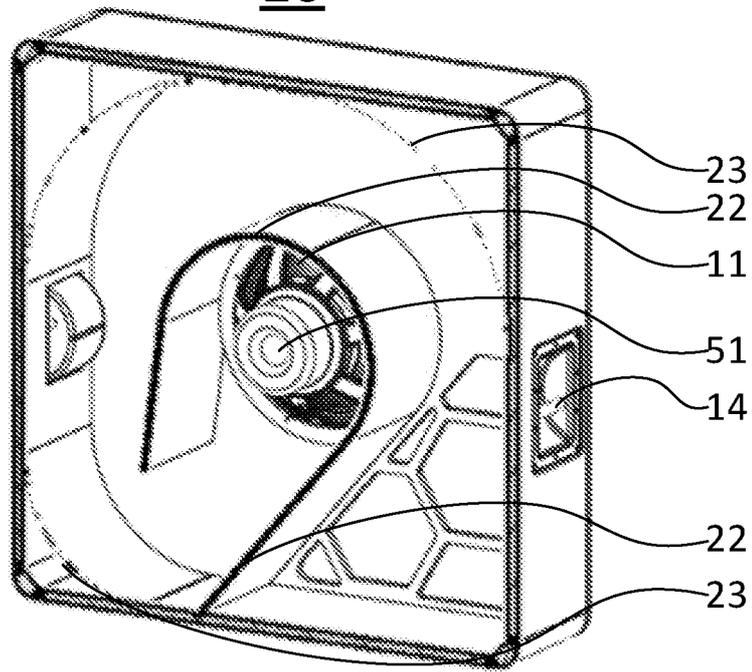


Fig. 5

10

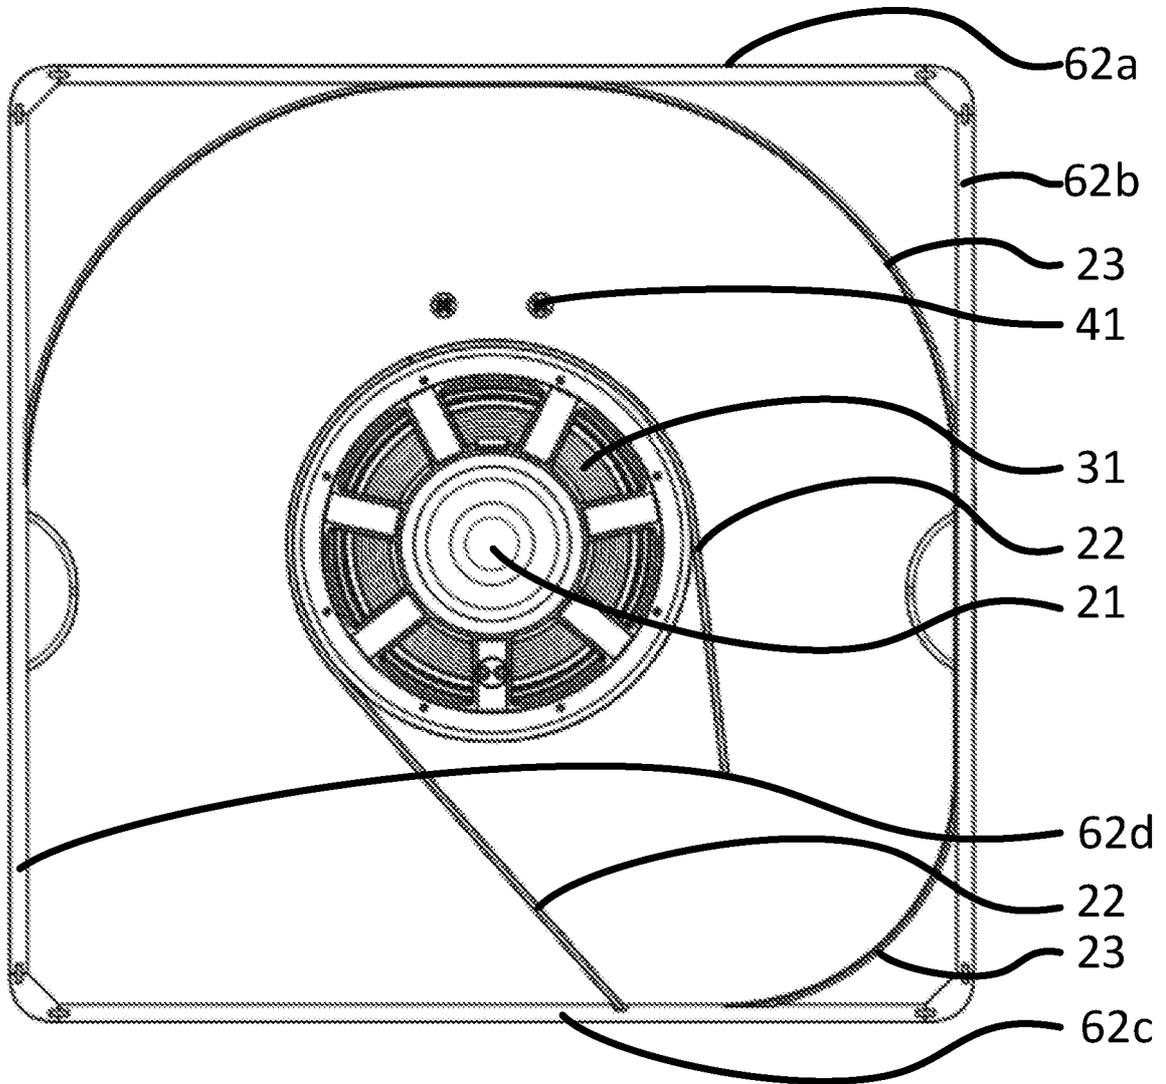


Fig. 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO2020/050174

A. CLASSIFICATION OF SUBJECT MATTER		
H04R 1/02 (2006.01), H04R 1/34 (2006.01)		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) IPC: H04R		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched DK, NO, SE, FI: Classes as above.		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPODOC, WPI, FULDTEKST: ENGELSK, TYSK, FRANSK		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2004003961 A1 (Gunness David W), 2004.01.08 Abstract, Paragraphs [0020]-[0023]; figure 1	1-6
Y	EP 3018915 B1 (Dutch & Dutch B.V.) 2018.06.06 Abstract, Paragraphs [0007]-[0010], [0017]	1-6
A	US 2015382090 A1 (Bisset Anthony Allen) 2015.12.31 Paragraph [0016], figure 1	1-6
A	WO 2010108123 A1 (Meyer sound lab inc) 2010.09.23 Whole document	1-6
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents:	"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family	
"A" document defining the general state of the art which is not considered to be of particular relevance		
"D" document cited by the applicant in the international application		
"E" earlier application or patent but published on or after the international filing date		
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)		
"O" document referring to an oral disclosure, use, exhibition or other means		
"P" document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search	Date of mailing of the international search report	
26/08/2020	28/08/2020	
Name and mailing address of the ISA Nordic Patent Institute Helgeshøj Allé 81 DK - 2630 Taastrup, Denmark. Facsimile No. -	Authorized officer Arne Fæster Telephone No. +47 22 38 75 52	

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/NO2020/050174

Patent document cited in search report / Publication date	Patent family member(s) / Publication date
US 2004003961 A1 2004.01.08	GB 2390518 A 2004.01.07 CN 1477899 A 2004.02.25 BR 0302331 A 2004.08.17
EP 3018915 B1 2018.06.06	EP 3018915 A1 2016.05.11 NL 2013741B B1 2016.10.06
US 2015382090 A1 2015.12.31	WO 2015200167 A1 2015.12.30 US 9479861 B2 2016.10.25 EP 3162084 A1 2017.05.03 EP 3162084 A4 2017.12.13 JP 2017521029 A 2017.07.27 JP 6616831B B2 2019.12.04 BR 112016030564 A2 2019.06.18
WO 2010108123 A1 2010.09.23	US 2010254558 A1 2010.10.07 US 8428284 B2 2013.04.23 MX 2011009819 A 2012.01.20 EP 2409499 A1 2012.01.25 EP 2409499 A4 2016.06.01 CN 102422653 A 2012.04.18 CN 102422653B B 2014.09.17 HK 1169254 A1 2015.05.15