

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
16 December 2004 (16.12.2004)

PCT

(10) International Publication Number
WO 2004/108271 A1


- (51) International Patent Classification⁷: **B01J 19/24**, C08F 2/01, 2/38, 210/02
- (21) International Application Number: PCT/US2003/020573
- (22) International Filing Date: 27 June 2003 (27.06.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 10/454,545 4 June 2003 (04.06.2003) US
- (63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application: US 10/454,545 (CON) Filed on 4 June 2003 (04.06.2003)
- (71) Applicant (for all designated States except US): **EXXON-MOBIL CHEMICAL PATENTS INC.** [US/US]; 5200 Bayway Drive, Baytown, TX 77522-2149 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **DONCK, Jan, C.** [BE/BE]; Bruul 20C, B-3220 Holsbeek (BE).
- (74) Agents: **GRIFFIS, Andrew, B.** et al.; ExxonMobil Chemical Company, P.O. Box 2149, Baytown, TX 77522-2149 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES,

[Continued on next page]

(54) Title: TUBULAR POLYMERIZATION REACTORS AND POLYMERIZATION PROCESS USING SAME

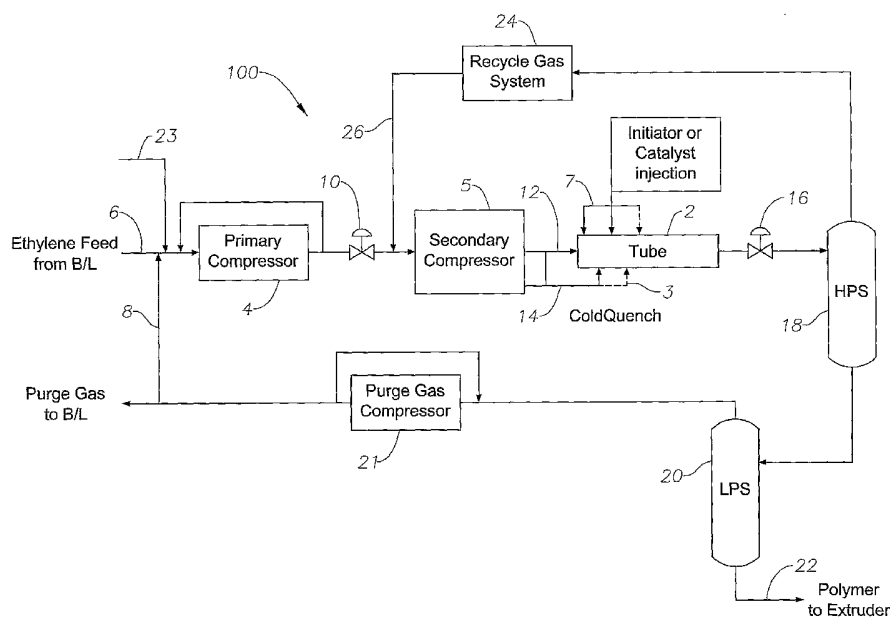

(57) Abstract: Tubular reactor apparatus and processes are provided for improved polymerization including using chain transfer agents and multiple monomer feeds spaced lengthwise along the tubular reactor providing high conversions of monomer into polymer. The invention also relates to polymers made from such a tubular reactor apparatus and processes including those polymers having a low haze value, a density over 0.92 g/cm³ and/or having terminal carbonyl groups. The apparatus and methods uncouple or reduce the dependency between the monomer concentration and transfer agent concentration. The uncoupling in other embodiments may also be varied leading to multiple desirable effects.



FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,

MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

Published:

- with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

TUBULAR POLYMERIZATION REACTORS AND POLYMERIZATION PROCESS USING SAME

CROSS-REFERENCE TO RELATED APPLICATIONS

- 5 [0001] This application claims the benefit of U.S. Application Serial No. 10/454,545, filed June 4, 2003, which is a continuation-in-part of, and claims the benefit of U.S. Application Serial No. 10/028,552, filed December 19, 2001 (now allowed), which is incorporated by reference herein.

FIELD OF THE INVENTION

- 10 [0002] This invention relates to an apparatus and processes for improved polymerization in tubular polymerization reactors, including those using chain transfer agents and multiple monomer feeds spaced lengthwise along the tubular reactor, to provide high conversions of monomer into polymer. The invention also
15 relates to polymers made from such processes and apparatus, including those polymers having a low haze value, a density over 0.92 g/cm³ and/or having terminal carbonyl groups.

BACKGROUND

- 20 [0003] Tubular polymerization reactor apparatus is used to make polyethylene, mainly by free radical initiation. Initiators may be oxygen, peroxides and similar agents. Catalysts used for coordination polymerization may also, where appropriate, be used.

- [0004] The highly exothermic polymerization reaction is performed in a tubular
25 reactor ("tube") forming part of the apparatus under high reactor operating pressure (2000 bar to 3500 bar) under turbulent flow, at high temperatures (120° C to 330° C). Heat may be removed through the tube wall, which may be liquid cooled. Tubular reactors may have outputs, which vary from 50 kT to 400 kT per annum. Low cost

production requires a high conversion of monomers to give as large an output of commercially desirable polymer types as is possible from given investment.

[0005] Referring to Figure 1, a tubular polymerization reactor 100 has a tube 2 with a length typically from 200 to 1600 meters determined on the basis of the desired heat removal capacity and a diameter of from 20 to 100 mm determined on the basis of the desired capacity and the required turbulent flow.

[0006] A medium pressure, primary compressor 4, which may include a number of compressor stages, not individually shown, is connected at its intake side to a source of fresh ethylene supplied by a conduit 6, and recycled ethylene from a recycle conduit 8 at a pressure of from 20 to 70 bar. The primary compressor raises the pressure of the monomer on the outlet side to a pressure of from 250 bar to 350 bar. A high pressure, secondary compressor 5, which may include a number of compressor stages, is connected at its intake side to the outlet side of the primary compressor 4 and raises the pressure of the feed containing ethylene further to the reactor operating pressure as indicated above of from 2000 to 3500 bar. The compressed pressurized monomer is then fed through conduits 12, 14 to various monomer feed locations 3 spaced lengthwise along tube 2.

[0007] Multiple free-radical initiator or catalyst injection positions 7 are also spaced lengthwise of the tube 2 to cause the monomer to be converted into polymer in at least two reaction zones formed inside the tube 2.

[0008] A mixture of polymer and unreacted monomer formed in the tube 2 passes from tube outlet 16 to a separating and recycling part of the polymerization apparatus. This part includes a high-pressure separator (HPS) 18, which receives the monomer-polymer mixture from the outlet of the tube 2. The HPS is connected to convey a mixture of polymer and monomer produced, to a low-pressure separator (LPS) 20 for further monomer removal. The resulting molten polymer phase is passed from the LPS 20 to a polymer finishing section with an extruder 22. A volatile monomer-rich phase comprising unreacted monomer separated in HPS 18, passes through a recycle conduit 24 at a pressure of approximately that of the outlet of the primary compressor

4 through line 26 to join the monomer containing feed passing from the primary to the secondary compressor 5. The volatile monomer rich phase including unreacted monomer from the LPS 20 passes to a low pressure purge compressor 21, which may have a number of stages, at a pressure above that at the intake of the primary compressor to the intake of the primary compressor 4.

[0009] At some location in the circuit a chain transfer agent is added for supply to the tube 2. Transfer agents are used to reduce the molecular weight, which can be expressed in a melt index (MI) value, and to narrow the molecular weight distribution (MWD).

10 [0010] A typical product range is shown in Figure 2 and covers a melt index ("MI", $I_{2.16}$) of from 0.1 to 50 dg/min, a molecular weight distribution (MWD) of from 5 to 50 and a haze of from 1 to 20. Haze is determined by ASTM D-1003; MI is determined by ASTM-1238 Condition E; Mw and Mn were measured by GPC (Gel Permeation Chromatography) on a Waters 150 gel permeation chromatograph
15 equipped with a differential refractive index (DRI) detector and a Chromatix KMX-6 on line light scattering photometer. The system was used at 135° C with 1,2,4-trichlorobenzene as the mobile phase. Shodex (Showa Denko America, Inc) polystyrene gel columns 802, 803, 804 and 805 were used. This technique is discussed in "Liquid Chromatography of Polymers and Related Materials III", J. Cazes editor, Marcel Dekker. 1981, p. 207, which is incorporated herein by reference.
20 No corrections for column spreading were applied; however, data on generally accepted standards, *e.g.*, National Bureau of Standards Polyethylene 1484, and anionically produced hydrogenated polyisoprenes (an alternating ethylene-propylene copolymer) demonstrated that such corrections on Mw/Mn (=MWD) were less than
25 0.05 units. Mw/Mn was calculated from elution times. The numerical analyses were performed using the commercially available Beckman/CIS customized LALLS software in conjunction with the standard Gel Permeation package. Calculations involved in the characterization of polymers by ^{13}C NMR follow the work of F. A.

Bovey in "Polymer Conformation and Configuration" Academic Press, New York, 1969.

[0011] In practical use of the apparatus, product quality has to be balanced with desired production economics. Higher conversion (giving low energy and recycle costs) tends to lead to a broader MWD and significant branching which leads to high and unacceptable haze values. Low density polyethylene requires production of relatively many short chain branches. Olefinically unsaturated comonomers are then used which have a low transfer coefficient (efficiency of transfer agents) and hence little chain length reducing activity. Examples are propylene or butene-1. A high concentration of such comonomers is needed to achieve a desired melt index, restricting the productive capacity on a given reactor. In some cases, certain areas of theoretically available MI, haze and density combinations cannot be produced at an acceptable cost. Particularly narrow molecular weight distribution (MWD), relatively high density polyethylenes generally cannot be made economically with saturated alkane transfer agents (which do not incorporate in the chain) as they have a very low transfer constant, lower than the propylene and butene-1 used for low density polyethylenes.

[0012] An initiator or catalyst injection position is associated with each reaction zone. Injection of the initiator causes an exothermic temperature rise which is removed by a cooling at the zone and downstream of that zone. The cooling is effected through the tube wall, optionally aided by a cooling liquid as a heat transfer medium and/or by a feed of cold monomer that is added downstream. Further, initiator may be added downstream to form another reaction zone for converting additional monomer into polymer.

[0013] Generally speaking, in the prior art, transfer agents have been added so as to have roughly the same concentration of chain transfer agent in each monomer feed. From an apparatus point of view, this can be achieved by mixing the transfer agent with the monomer fed before the monomer is compressed by the secondary compressor. The transfer agent is then added equally along the length of the tube,

although it may be consumed unequally and so concentration variations along the tube may result.

[0014] In Figure 1, a source 23 of transfer agent is connected to the intake of the primary compressor 4 and hence distributed, after passing through the secondary compressor 5, to the different monomer feeds 3 spaced along the tube 2. The recycle stream 8 coming from the LPS 20 and the purge compressor 21 is also passed to the intake of primary compressor 4. The recycle from the HPS 18 which contains unconsumed transfer agent is passed to the intake of the secondary compressor. Thus the transfer agent and monomer form a single, common gas stream with the desired concentration of transfer agent for compression in the secondary compressor 5 and for supply to the various feed positions 3 along the tube 2.

[0015] Furthermore, by selecting a transfer agent which has a low chain transfer activity, higher concentrations of transfer agent have to be used in the non-polymer gaseous fraction of the tube contents to achieve a target MI. The low chain transfer activity contributes to the creation of small transfer agent concentrations along the length of the tube where the chain transfer agents also have a low reactivity ratio. By using unsaturated transfer agents with low chain transfer activity, branches are formed along the polymer backbone and the density of the resulting polymer is reduced. In such apparatus, mostly chain transfer agents have been used having a chain transfer constant of less than 0.03.

[0016] The recycle from the HPS and LPS still contain, for transfer agents with a low reactivity ratio, a high level of transfer agent and the amount that is added from the source 23 is low relative to that present in the recycle 26 and 8.

[0017] It would be desirable to have methods and apparatus for transfer agent addition and selection so as to increase the process efficiency while obtaining a satisfactory commercial product, or to produce more satisfactory commercial products at prevailing process efficiencies.

SUMMARY

[0018] The present invention provides apparatus and methods which advantageously uncouple, or reduce the dependency, between the monomer concentration and transfer agent concentration and permit these concentrations to be varied along the tube length.

[0019] In one embodiment the invention provides a tubular polymerization reactor apparatus including a source of fresh monomer, first and second compressor stages for compressing monomer, a reactor tube, multiple feeds spaced lengthwise along the reactor tube for supplying monomer to the reactor, multiple free-radical or catalyst injection positions spaced lengthwise along the reactor tube for causing monomer to be converted into polymer inside the reactor, separators for receiving a monomer-polymer mixture from the reactor tube and separating the mixture into a volatile monomer-rich phase and molten polymerization phase, conduits for recycling the monomer-rich phase to the first and/or second compressor stages for recycling unreacted monomer to the reactor tube, and a source of transfer agent for modifying the molecular weight of the polymer for compression and feeding to the reactor tube. Compressor means is provided for compressing a transfer agent rich stream separately from a transfer agent-poor monomer stream and means is provided for feeding the compressed transfer agent rich stream to a polymerization reaction zone upstream of at least one reaction zone receiving the transfer agent-poor stream.

[0020] In another embodiment the invention provides a tubular polymerization reactor apparatus including a source of fresh monomer, first and second compressor stages for compressing monomer, a reactor tube, multiple feeds spaced lengthwise along the reactor tube for supplying monomer to the reactor, multiple free-radical or catalyst injection positions spaced lengthwise along the reactor tube for causing monomer to be converted into polymer inside the reactor, separators for receiving a monomer-polymer mixture from the reactor tube and separating the mixture into a volatile monomer-rich phase and molten polymerization phase, conduits for recycling the monomer-rich phase to the first and/or second compressor stages for recycling

unreacted monomer to the reactor tube, and a source of transfer agent for modifying the molecular weight of the polymer for compression and feeding to the reactor tube. Compressor means is provided for compressing a transfer agent rich stream separately from a transfer agent-poor monomer stream and means is provided for feeding the compressed transfer agent rich stream to a polymerization reaction zone upstream of at least one reaction zone receiving the transfer agent-poor stream containing 70 wt.% or less of the transfer agent relative to the transfer agent-rich stream.

[0021] In still another embodiment the invention provides a tubular polymerization reactor apparatus including a source of fresh monomer, first and second compressor stages for compressing monomer, a reactor tube, multiple feeds spaced lengthwise along the reactor tube for supplying monomer to the reactor, multiple free-radical or catalyst injection positions spaced lengthwise along the reactor tube for causing monomer to be converted into polymer inside the reactor, separators for receiving a monomer-polymer mixture from the reactor tube and separating the mixture into a volatile monomer-rich phase and molten polymerization phase, conduits for recycling the monomer-rich phase to the first and/or second compressor stages for recycling unreacted monomer to the reactor tube, and a source of transfer agent for modifying the molecular weight of the polymer for compression and feeding to the reactor tube. Compressor means is provided for compressing a transfer agent rich stream separately from a transfer agent-poor monomer stream and means is provided for feeding the compressed transfer agent rich stream to a polymerization reaction zone upstream of at least one reaction zone receiving the transfer agent-poor stream containing between 70 wt.% to 30 wt. % of the transfer agent relative to the transfer agent-rich stream.

[0022] In yet another embodiment the invention provides a tubular polymerization reactor apparatus including a source of fresh monomer, first and second compressor stages for compressing monomer, a reactor tube, multiple feeds spaced lengthwise along the reactor tube for supplying monomer to the reactor, multiple free-radical or

catalyst injection positions spaced lengthwise along the reactor tube for causing monomer to be converted into polymer inside the reactor, separators for receiving a monomer-polymer mixture from the reactor tube and separating the mixture into a volatile monomer-rich phase and molten polymerization phase, conduits for recycling
5 the monomer-rich phase to the first and/or second compressor stages for recycling unreacted monomer to the reactor tube, and a source of transfer agent for modifying the molecular weight of the polymer for compression and feeding to the reactor tube. Compressor means is provided for compressing a transfer agent rich stream separately from a transfer agent-poor monomer stream and means is provided for
10 feeding the compressed transfer agent rich stream to a polymerization reaction zone upstream of at least one reaction zone receiving the transfer agent-poor stream containing less than 30 wt.% of the transfer agent relative to the transfer agent rich stream.

[0023] In still yet another embodiment the invention provides a process for the
15 polymerization of ethylene, wherein the process includes combining fresh monomer and recycled monomer; compressing the combined monomer; supplying the monomer using multiple feeds to multiple reaction zones in a tubular reactor for polymerization by a free radical initiator to form a monomer-polymer mixture; separating the mixture into a volatile monomer-rich phase and molten polymer-rich
20 phase; recycling for compression the monomer-rich phase and supplying the monomer-rich phase to the reactor; and introducing transfer agent into the reactor to modify the molecular weight of the polymer, and further wherein the transfer agent includes a chain terminating transfer agent having a transfer coefficient of greater than 0.01, the transfer agent being in a transfer agent rich stream separately from a
25 transfer agent-poor monomer stream of the transfer agent, to a polymerization reaction zone upstream of at least one downstream reaction zone receiving the transfer agent-poor stream so as to achieve a depletion in the concentration of the transfer agent in the downstream reaction zone.

[0024] In yet still another embodiment the invention provides a process for the polymerization of ethylene, wherein the process includes combining fresh monomer and recycled monomer; compressing the combined monomer; supplying the monomer using multiple feeds to multiple reaction zones in a tubular reactor for
5 polymerization by a free radical initiator to form a monomer-polymer mixture; separating the mixture into a volatile monomer-rich phase and molten polymer-rich phase; recycling for compression the monomer-rich phase and supplying the monomer-rich phase to the reactor; and introducing transfer agent into the reactor to modify the molecular weight of the polymer, and further wherein the transfer agent
10 includes a chain terminating transfer agent having a transfer coefficient of greater than 0.01, the transfer agent being in a transfer agent rich stream separately from a transfer agent-poor monomer stream of the transfer agent, to a polymerization reaction zone upstream of at least one downstream reaction zone receiving the transfer agent-poor stream having 70 wt. % or less of the transfer agent relative to the
15 transfer agent rich stream so as to achieve a depletion in the concentration of the transfer agent in the downstream reaction zone.

[0025] An additional embodiment of the invention is a process for the polymerization of ethylene, wherein the process includes combining fresh monomer and recycled monomer; compressing the combined monomer; supplying the monomer using
20 multiple feeds to multiple reaction zones in a tubular reactor for polymerization by a free radical initiator to form a monomer-polymer mixture; separating the mixture into a volatile monomer-rich phase and molten polymer-rich phase; recycling for compression the monomer-rich phase and supplying the monomer-rich phase to the reactor; and introducing transfer agent into the reactor to modify the molecular weight
25 of the polymer, and further wherein the transfer agent includes a chain terminating transfer agent having a transfer coefficient of greater than 0.01, the transfer agent being in a transfer agent rich stream separately from a transfer agent-poor monomer stream of the transfer agent, to a polymerization reaction zone upstream of at least one downstream reaction zone receiving the transfer agent-poor stream having

between 70 wt.% and 30 wt. % of the transfer agent relative to the transfer agent rich-stream so as to achieve a depletion in the concentration of the transfer agent in the downstream reaction zone.

[0026] Even another embodiment the invention provides a process for the polymerization of ethylene, wherein the process includes combining fresh monomer and recycled monomer; compressing the combined monomer; supplying the monomer using multiple feeds to multiple reaction zones in a tubular reactor for polymerization by a free radical initiator to form a monomer-polymer mixture; separating the mixture into a volatile monomer-rich phase and molten polymer-rich phase; recycling for compression the monomer-rich phase and supplying the monomer-rich phase to the reactor; and introducing transfer agent into the reactor to modify the molecular weight of the polymer, and further wherein the transfer agent includes a chain terminating transfer agent having a transfer coefficient of greater than 0.01, the transfer agent being in a transfer agent rich stream separately from a transfer agent-poor monomer stream of the transfer agent, to a polymerization reaction zone upstream of at least one downstream reaction zone receiving the transfer agent-poor stream having less than 30 wt. % of the transfer agent relative to the transfer agent rich stream so as to achieve a depletion in the concentration of the transfer agent in the downstream reaction zone.

20

BRIEF DESCRIPTION OF DRAWINGS

[0027] These and other features, aspects, and advantages of the present invention will become better understood with reference to the following description, appended claims, and accompanying drawings, where:

25 [0028] Figure 1 shows a tubular polymerization reactor.

[0029] Figure 2 shows a typical polyethylene product range and covers a melt index (MI) of from 0.1 to 50, a molecular weight distribution (MWD) of from 5 to 50 and a haze of from 1 to 20.

[0030] Figure 3 shows one embodiment of a reactor apparatus of the invention.

DETAILED DESCRIPTION

[0031] In one embodiment, and referring now to Figure 3, the present invention provides a tubular polymerization reactor apparatus 200 having:

5 [0032] a source of fresh monomer 6, unrecycled, generally not containing transfer agent;

[0033] medium and high pressure compressors 4 and 5, respectively, for compressing monomer;

[0034] a reactor tube 2;

10 [0035] multiple monomer feed 3, spaced lengthwise along the reactor tube 2 for supplying monomer to the tube;

[0036] multiple free-radical or catalyst injection positions 7 spaced lengthwise along the tube 2 for causing monomer to be converted into polymer inside the tube in a reaction zone (not shown);

15 [0037] separators 18 and 20 for receiving a monomer-polymer mixture from the reactor tube 2 and separating the mixture into a volatile monomer-rich phase and molten, polymer-rich phase;

[0038] conduits 8 and 26 for recycling the monomer-rich phase for compression and for recycling unreacted monomer or monomers to the tubular reactor; and

20 [0039] a source of transfer agent 30 for modifying the molecular weight of the polymer including means 32 for compressing the transfer agent and feeding it to the tubular reactor via one or more transfer agent feeds 34 separately from the monomer feed(s) 3.

25 [0040] In the conventional apparatus described above with reference to Figure 1, transfer agent and monomer were mixed before a final common compression step and so supplied at equal transfer agent/monomer ratios at the different feeds 3. By contrast, in embodiments of the invention, compressor means 32 is provided for compressing a transfer agent rich gas stream 30 separately from a transfer agent-poor gas stream 12, and a transfer agent feeds 34 are provided for feeding the compressed

transfer agent-rich stream to a polymerization reaction zone upstream of at least one reaction zone receiving the transfer agent-poor stream. As a result less transfer agent is supplied towards the downstream end of the tubular reactor, *i.e.*, the part of the reactor containing one or more reaction zones downstream of one or more reaction zones located towards the upstream end of the reactor than is supplied towards those upstream reaction zone or zones.

[0041] Examples of chain transfer agents include tetramethylsilane, cyclopropane, sulfur hexafluoride, methane, t-butanol, perfluoropropane, deuterobenzene, ethane, ethylene oxide, 2,2-dimethylpropane, benzene, dimethyl sulfoxide, vinyl methyl ether, methanol, propane, 2-methyl-3-buten-2-ol, methyl acetate, t-butyl acetate, methyl formate, ethyl acetate, butane, triphenylphosphine, methylamine, methyl benzoate, ethyl benzoate, N,N-diisopropylacetamide, 2,2,4-trimethylpentane, n-hexane, isobutane, dimethoxymethane, ethanol, n-heptane, n-butyl acetate, cyclohexane, methylcyclohexane, 1,2-dichlorethane, acetonitrile, N-ethylacetamide, propylene, n-decane, N,N-diethylacetamide, cyclopentane, acetic anhydride, n-tridecane, n-butyl benzoate, isopropanol, toluene, hydrogen, acetone, 4,4-dimethylpentene-1, trimethylamine, N,N-dimethylacetamide, isobutylene, n-butyl isocyanate, methyl butyrate, n-butylamine, N,N-dimethylformamide, diethyl sulfide, diisobutylene, tetrahydrofuran, 4-methylpentene-1, p-xylene, p-dioxane, trimethylamine, butene-2, 1-bromo-2-chlorethane, octene-1, 2-methylbutene-2, cumene, butene-1, methyl vinyl sulfide, n-butyronitrile, 2-methylbutene-1, ethylbenzene, n-hexadecene, 2-butanone, n-butyl isothiocyanate, methyl 3-cyanopropionate, tri-n-butylamine, 3-methyl-2-butanone, isobutyronitrile, di-n-butylamine, methyl chloroacetate, 3-methylbutene-1, 1,2-dibromoethane, dimethylamine, benzaldehyde, chloroform, 2-ethylhexene-1, propionaldehyde, 1,4-dichlorobutene-2, tri-n-butylphosphine, dimethylphosphine, methyl cyanoacetate, carbon tetrachloride, bromotrichloromethane, di-n-butylphosphine, **acetaldehyde**, and phosphine.

[0042] For further details of transfer agents, see *Advances In Polymer Science*, Vol. 7, p. 386-448 (1970). Table 7 therein ranks several transfer agents in order of the chain transfer constant determined under set conditions. The tendency to copolymerize is indicated by the reactivity, also determined under set conditions.

- 5 [0043] Typical monomers include: vinyl ethers such as vinyl methyl ether, vinyl n-butyl ether, vinyl phenyl ether, vinyl beta-hydroxy-ethyl ether, and vinyl dimethylamino-ethyl ether; olefins such as ethylene, propylene, butene-1, cis-butene-2, trans-butene-2, isobutylene, 3,3,-dimethylbutene-1, 4-methylpentene-1, octene-1, and styrene; vinyl type- esters such as vinyl acetate, vinyl butyrate, vinyl pivalate, and
- 10 vinylene carbonate; haloolefins such as vinyl fluoride, vinylidene fluoride, tetrafluoroethylene, vinyl chloride, vinylidene chloride, tetrachloroethylene, and chlorotrifluoroethylene; acrylic-type esters such as methyl acrylate, ethyl acrylate, n-butyl acrylate, t-butyl acrylate, 2-ethylhexyl acrylate, alpha-cyanoisopropyl acrylate, beta-cyanoethyl acrylate, o-(3-phenylpropan-1,3,-dionyl)phenyl acrylate, methyl
- 15 methacrylate, n-butyl methacrylate, t-butyl methacrylate, cyclohexyl methacrylate, 2-ethylhexyl methacrylate, methyl methacrylate, glycidyl methacrylate, beta-hydroxyethyl methacrylate, beta-hydroxypropyl methacrylate, 3-hydroxy-4-carbomethoxy-phenyl methacrylate, N,N-dimethylaminoethyl methacrylate, t-butylaminoethyl methacrylate, 2-(1-aziridinyl)ethyl methacrylate, diethyl fumarate,
- 20 diethyl maleate, and methyl crotonate; other acrylic-type derivatives such as acrylic acid, methacrylic acid, crotonic acid, maleic acid, methyl hydroxy, maleate, itaconic acid, acrylonitrile, fumaronitrile, N,N-dimethylacrylamide, N-isopropylacrylamide, N-t-butylacrylamide, N-phenylacrylamide, diacetone acrylamide, methacrylamide, N-phenylmethacrylamide, N-ethylmaleimide, and maleic anhydride; and other
- 25 compounds such as allyl alcohol, vinyltrimethylsilane, vinyltriethoxysilane, N-vinylcarbazole, N-vinyl-N-methylacetamide, vinyldibutylphosphine oxide, vinyldiphenylphosphine oxide, bis-(2-chloroethyl) vinylphosphonate and vinyl methyl sulfide. The monomers/transfer agents are ranked in reactivity ratio order in Table 10. *See id.*

- [0044] The difference in the concentration in mol % of transfer agent supplied to the successive reaction zones may be in excess of 20 %. A simple constructional option for implementing a difference of such a magnitude is providing conduits for compressing some or all of the transfer agent which are separate from other conduits for compressing monomer. Therefore compressor means 32 may include a further compressor stage for an initial compression of the transfer agent obtained from the source of transfer agent 30, and a section of the second compressor stage connected to the outlet of the further compressor stage for raising the gas stream containing transfer agent to a pressure suitable for supplying to the reactor, the section being optionally used additionally for compressing part of the monomer obtained from the outlet of the first compressor stage, the transfer agent being passed through conduits segregated from another section of the second compressor stage which is used for compressing the transfer agent-poor monomer stream. In this manner fresh transfer agent is concentrated, to have effect in the upstream reaction zone.
- [0045] The transfer agent rich stream may be connected to be introduced upstream of all reaction zones receiving a transfer agent-poor stream. This may magnify the effect and benefit of embodiments of the invention. In another embodiment, where three or more reaction zones are used, the transfer agent rich stream may be supplied to a reaction zone intermediate two reaction zones receiving a transfer agent poor-stream. This may tend to dilute the benefit of upstream transfer agent injection.
- [0046] An added modification in another embodiment is to further uncouple the volatile part of the mixture from the tubular reactor outlet from the general monomer feed and to not distribute the residual transfer agent present therein to the feed streams used for the downstream reaction zones. The monomer-rich recycled stream from the combined separators is connected to be supplied to an extent exceeding from 75% by volume of the total recycle stream mass to one or more reaction zones upstream of at least one downstream reaction zone. The remaining part of the recycle stream mass can be combined with the monomer feed supplied to the medium pressure compressor intake for distribution to all other feed positions. The effect can

be optimized by providing a recycled monomer-rich feed connected to be supplied to an extent of from 75 to 100% of its volume to a first reaction zone located furthest upstream of all other reaction zones spaced lengthwise along the tubular reactor.

[0047] Construction of an apparatus for providing such an arrangement results where
5 the transfer agent-rich stream is connected to be passed from the further compressor stage and combined with the recycled monomer-rich stream for compression in the segregated section of the second compressor stage.

[0048] While the monomer can be any molecule or molecules capable of addition polymerization by either a free-radical mechanism or coordination catalytic
10 mechanism, the predominant monomer may be ethylene. Other monomers which incorporate less easily and may have transfer-activity and a molecular weight limiting effect (and indeed can, for some purposes, be regarded as incorporating transfer agents) include: vinyl acetate, ethyl acrylate, methyl acrylate, butyl acrylate, and the like. Most commonly ethylene is used at a mole concentration of at least 90%, or
15 96%, or 98%, the percentages being based on the total weight of all monomer and transfer agent present.

[0049] While, in theory, Ziegler-Natta catalysts can be used such as TiCl_3 based catalysts with an aluminum alkyl activator, or metallocene catalysts with an alumoxane or non-coordinating anion activator, or using a free-radical initiator,
20 generally initiators can be selected from the list given in *Advances of Polymer Science* op cit.

[0050] Preferably, the transfer agents have the properties:

[0051] they possess high transfer activity which enables them to reduce the melt index (MI) at relatively low concentrations of transfer agents. A review of the
25 transfer agents in *Advances of Polymer Science* op cit will show the suitable candidates. Particularly suited are methyl vinyl sulfide, and n-butyronitrile; and

[0052] they incorporate and have a high reactivity ratio so the concentration will deplete, in the absence of further addition downstream, as the reaction mixture passes downstream in the tube through the successive reaction zones, with the proviso that

such transfer agents to do not lower the density and incorporate at the ends of the polymer chain without creating branches.

[0053] Other transfer agents may be present in addition, to form short-chain branches to the extent that the desired conversion enhancing effect is not negated.

- 5 [0054] Operating conditions for tubular reactors are in general well known, but the amount of monomer vs. transfer agent fed can advantageously be biased to achieve a high transfer agent concentration in the upstream feed or feeds.

- [0055] The addition of the free-radical initiator to a monomer mixture causes generally the formation of a reaction zone in which monomer is converted
10 exothermally and the resulting temperature rise is controlled by cooling and addition of further monomer to the downstream end of the reaction zone. Thus, temperature and reagent concentration can vary along the length of the tubular reactor.

- [0056] Embodiments of the invention generally provide, for this aspect, a process for polymerization of ethylene which includes combining fresh monomer and recycled
15 monomer and compressing the combined recycled and fresh monomer and supplying the monomer using multiple feeds to multiple reaction zones in a tubular reactor for polymerization by a free radical initiator to form a monomer-polymer mixture; and separating the mixture into a volatile monomer-rich phase and molten polymer-rich phase with the monomer-rich phase being recycled for compression and supplying to
20 the reactor, the process further including introducing transfer agent into the reactor to modify the molecular weight of the polymer.

- [0057] In such embodiments, the transfer agent includes a chain terminating transfer agent of a carbonyl containing linear compound incorporating predominantly in a position close to the end of the polymer chain, having a transfer coefficient of greater
25 than 0.01, the transfer agent being in a transfer agent rich stream separately from a transfer agent-poor monomer stream to a polymerization reaction zone upstream of at least one reaction zone receiving the transfer agent-poor stream.

[0058] As indicated above, the chain terminating transfer agent rich stream is introduced preferably upstream of all reaction zones receiving a transfer agent-poor

stream. Similarly the monomer-rich recycled stream from at least one of the separators is advantageously supplied to an extent exceeding 75% by volume to one or more reaction zones upstream of at least one downstream reaction zone. Suitably a recycled monomer-rich feed is supplied to an extent of from 75 to 100% of its volume to a reaction zone upstream of all other reaction zones spaced lengthwise along the tubular reactor.

[0059] A particular chain terminating transfer agent contemplated may predominantly be propionaldehyde. Its effects may be focused on one or more reaction zones. Propionaldehyde may cause a linear polymer to be formed, which can act as the platform for added polymerization in downstream polymerization reaction zones and higher conversion therein, without materially upsetting product quality. The chain terminating transfer agent may be added in such amounts in such a way that the concentration of chain terminating transfer agent at the outlet of the tube is at least 50% less than that at the uppermost upstream reaction zone.

[0060] While in a conventional process using an almost homogeneous transfer agent distribution, the process is run so as to convert as much of the polymer in the first reaction zone as possible, it has been surprisingly found that advantageous operation results by increasing the proportion of transfer agent further by reducing the amount of monomer supplied upstream, particularly the first upstream reaction zone. The mol % of monomer fed in the stream supplied to the reaction zone located furthest upstream may be less than that at least one reaction zone downstream thereof.

[0061] By using a chain terminating transfer agent which gives by and large a linear polyethylene chain backbone, the process may not have to be manipulated to obtain desired levels of branching and branching may be provided by a transfer agent selected for that purpose. Such chain transfer agents may incorporate poorly such as propylene or butene-1 but preferably are selected to incorporate well, such as methyl methacrylate, as noted *supra*. In this way, the monomer rich part of the recycle contains relatively low levels of chain forming transfer agents for introduction in the upstream reaction zones.

[0062] The chain branch forming transfer agent may be fed predominantly to reaction zone or zones downstream of an upstream reaction zone.

[0063] Although the present invention has been described in considerable detail with reference to certain preferred versions thereof, other versions are possible. For example, while polyethylenes are discussed, other polyolefins are contemplated. Therefore, the spirit and scope of the appended claims should not be limited to the description of the preferred versions contained herein, which include, without limitation, the following more preferred embodiments: a tubular polymerization reactor apparatus comprising: (a) a source of fresh monomer; (b) first and second compressor stages for compressing monomer; (c) a reactor tube; (d) multiple feeds, spaced lengthwise along the reactor tube for supplying monomer to the reactor; (e) multiple free-radical or catalyst injection positions spaced lengthwise along the tubular reactor for causing monomer to be converted into polymer inside the tubular reactor; (f) separators for receiving a monomer-polymer mixture from the reactor tube and separating said mixture into a volatile monomer-rich phase and molten polymerization phase; (g) conduits for recycling the monomer-rich phase to the first, and/or second compressor stages for recycling unreacted monomer to the reactor tube; and (h) a source of transfer agent for modifying the molecular weight of the polymer for compression and feeding to the reactor tube; wherein compressor means is provided for compressing a transfer agent rich stream separately from a transfer agent-poor monomer stream and means is provided for feeding the compressed transfer agent rich stream to a polymerization reaction zone upstream of at least one reaction zone receiving the transfer agent-poor stream; and also the following even more preferred embodiments: the reactor apparatus wherein said transfer agent-poor stream contains less than 30 wt.% of the transfer agent relative to the transfer agent rich stream; the reactor apparatus wherein said transfer agent-poor stream contains 70 wt. % or less of the transfer agent relative to the transfer agent-rich stream; the reactor apparatus wherein said transfer agent-poor stream contains between 70 wt. % and 30 wt. % of the transfer agent relative to the transfer agent-rich stream; and any of the

aforementioned more preferred or even more preferred embodiments with the following additionally more preferred embodiments, alone or in combination as would be apparent to one of skill in the art in possession of the present disclosure: the reactor apparatus wherein compressor means comprises a further compressor stage

5 for an initial compression of the transfer agent obtained from the source of transfer agent, and a section of the second compressor stage, connected to the outlet of the further compressor stage for raising the gas stream containing transfer agent to a pressure suitable for supplying to the reactor, said section being optionally used additionally for compressing part of the monomer obtained from the outlet of the first

10 compressor stage, said transfer agent being passed through conduits segregated from another section of the second compressor stage which is used for compressing the transfer agent-poor monomer stream; the reactor apparatus wherein the transfer agent rich stream is connected to be introduced upstream of all reaction zones receiving a transfer agent-poor stream, particularly wherein the monomer-rich recycled stream

15 from at least one of the separators is connected to be supplied to an extent exceeding 75% by volume to one or more reaction zones upstream of at least one downstream reaction zone, or even more particularly wherein a recycled monomer-rich feed is connected to be supplied to an extent of from 75 to 100% of its volume to a reaction zone upstream of all other reaction zones spaced lengthwise along the tubular reactor;

20 the reactor apparatus wherein the transfer agent is connected to be passed from the further compressor stage and combined with the recycled monomer-rich stream for compression in the segregated section of the second compressor stage, particularly wherein a pair of sources of transfer agents are arranged for connection to different reaction zones; and another more preferred embodiment which is a process for the

25 polymerization of ethylene comprising: (a) combining fresh monomer and recycled monomer and compressing the combined monomer and supplying the monomer using multiple feeds to multiple reaction zones in a tubular reactor for polymerization by a free radical initiator to form a monomer-polymer mixture; (b) separating the mixture into a volatile monomer-rich phase and molten polymer-rich phase; (c) recycling for

compression said monomer-rich phase and supplying said monomer-rich phase to the reactor; and (d) introducing transfer agent into the reactor to modify the molecular weight of the polymer; wherein the transfer agent comprises a chain terminating transfer agent having a transfer coefficient of greater than 0.01, said transfer agent
5 being in a transfer agent rich stream separately from a transfer agent-poor monomer stream of the transfer agent, to a polymerization reaction zone upstream of at least one downstream reaction zone receiving the transfer agent-poor stream so as to achieve a depletion in the concentration of the transfer agent in said at least one downstream reaction zone; and even more preferred embodiments which are said
10 process wherein said transfer agent-poor stream comprises less than 30 wt. % of the transfer agent relative to the transfer agent-rich stream; wherein said transfer agent-poor stream comprises 70 wt. % or less of the transfer agent relative to the transfer agent-rich stream; said process wherein said transfer agent-poor stream comprises between 70 wt. % and 30 wt. % of the transfer agent relative to the transfer agent-rich
15 stream; or any of the aforementioned more preferred or even more preferred processes, alone or in combination as would be apparent to one of ordinary skill in the art in possession of the present disclosure, of the following: said process wherein the transfer agent-rich stream is introduced upstream of all reaction zones receiving a transfer agent-poor stream; said process wherein the monomer-rich recycled stream
20 from at least one of the separators is supplied to an extent exceeding 75% by volume to one or more reaction zones upstream of at least one downstream reaction zone, and more particularly wherein a recycled monomer-rich feed is supplied to an extent of from 75 to 100% of its volume to a reaction zone upstream of all other reaction zones spaced lengthwise along the tubular reactor, even more particularly wherein the
25 transfer agent supplied at an upstream feed comprises propionaldehyde and/or wherein the concentration of transfer agent at the outlet of the tubular reactor is at least 50% less than the concentration transfer agent in the uppermost upstream reaction zone; wherein the transfer agent is selected from the group consisting of

propionaldehyde, methyl vinyl sulfide, n-butyronitrile, propylene, butene-1, 4-methylpentane-1, isobutylene, diisobutylene, acetaldehyde, and mixtures thereof.

[0064] What is claimed is:

Claims

1. A tubular polymerization reactor apparatus comprising:
- (a) a source of fresh monomer;
 - 5 (b) first and second compressor stages for compressing monomer;
 - (c) a reactor tube;
 - (d) multiple feeds, spaced lengthwise along the reactor tube for supplying monomer to the reactor;
 - 10 (e) multiple free-radical or catalyst injection positions spaced lengthwise along the tubular reactor for causing monomer to be converted into polymer inside the tubular reactor;
 - (f) separators for receiving a monomer-polymer mixture from the reactor tube and separating said mixture into a volatile monomer-rich phase and molten polymerization phase;
 - 15 (g) conduits for recycling the monomer-rich phase to the first and/or second compressor stages for recycling unreacted monomer to the reactor tube; and
 - (h) a source of transfer agent for modifying the molecular weight of the polymer for compression and feeding to the reactor tube;
 - 20 wherein compressor means is provided for compressing a transfer agent rich stream separately from a transfer agent-poor monomer stream and means is provided for feeding the compressed transfer agent rich stream to a polymerization reaction zone upstream of at least one reaction zone receiving the transfer agent-poor stream.
 - 25
2. The reactor apparatus of Claim 1, wherein said transfer agent-poor stream contains less than 30 wt.% of the transfer agent relative to the transfer agent rich stream.

3. The reactor apparatus of Claim 1, wherein said transfer agent-poor stream contains 70 wt. % or less of the transfer agent relative to the transfer agent-rich stream.
- 5 4. The reactor apparatus of Claim 1, wherein said transfer agent-poor stream contains between 70 wt. % and 30 wt. % of the transfer agent relative to the transfer agent-rich stream.
- 10 5. The reactor apparatus of claim 1, wherein compressor means comprises a further compressor stage for an initial compression of the transfer agent obtained from the source of transfer agent, and a section of the second compressor stage, connected to the outlet of the further compressor stage for raising the gas stream containing transfer agent to a pressure suitable for supplying to the reactor, said section being optionally used additionally for
15 compressing part of the monomer obtained from the outlet of the first compressor stage, said transfer agent being passed through conduits segregated from another section of the second compressor stage which is used for compressing the transfer agent-poor monomer stream.
- 20 6. The reactor apparatus of claim 1, wherein the transfer agent rich stream is connected to be introduced upstream of all reaction zones receiving a transfer agent-poor stream.
- 25 7. The reactor apparatus of claim 6, wherein the monomer-rich recycled stream from at least one of the separators is connected to be supplied to an extent exceeding 75% by volume to one or more reaction zones upstream of at least one downstream reaction zone.

8. The reactor apparatus of claim 7, wherein a recycled monomer-rich feed is connected to be supplied to an extent of from 75 to 100% of its volume to a reaction zone upstream of all other reaction zones spaced lengthwise along the tubular reactor.
- 5
9. The reactor apparatus of claim 5, wherein the transfer agent is connected to be passed from the further compressor stage and combined with the recycled monomer-rich stream for compression in the segregated section of the second compressor stage.
- 10
10. The reactor apparatus of claim 9, wherein a pair of sources of transfer agents are arranged for connection to different reaction zones.
11. A process for the polymerization of ethylene comprising:
- 15
- (a) combining fresh monomer and recycled monomer and compressing the combined monomer and supplying the monomer using multiple feeds to multiple reaction zones in a tubular reactor for polymerization by a free radical initiator to form a monomer-polymer mixture;
- (b) separating the mixture into a volatile monomer-rich phase and molten polymer-rich phase;
- 20
- (c) recycling for compression said monomer-rich phase and supplying said monomer-rich phase to the reactor; and
- (d) introducing transfer agent into the reactor to modify the molecular weight of the polymer;
- 25
- wherein the transfer agent comprises a chain terminating transfer agent having a transfer coefficient of greater than 0.01, said transfer agent being in a transfer agent rich stream separately from a transfer agent-poor monomer stream of the transfer agent, to a polymerization reaction zone upstream of at

least one downstream reaction zone receiving the transfer agent-poor stream so as to achieve a depletion in the concentration of the transfer agent in said at least one downstream reaction zone.


- 5 12. The process of claim 11, wherein said transfer agent-poor stream comprises less than 30 wt. % of the transfer agent relative to the transfer agent-rich stream.
- 10 13. The process of claim 11, wherein said transfer agent-poor stream comprises 70 wt. % or less of the transfer agent relative to the transfer agent-rich stream.
- 15 14. The process of claim 11, wherein said transfer agent-poor stream comprises between 70 wt. % and 30 wt. % of the transfer agent relative to the transfer agent-rich stream.
- 15 15. The process of claim 11, wherein the transfer agent-rich stream is introduced upstream of all reaction zones receiving a transfer agent-poor stream.
- 20 16. The process of claim 15, wherein the monomer-rich recycled stream from at least one of the separators is supplied to an extent exceeding 75% by volume to one or more reaction zones upstream of at least one downstream reaction zone.
- 25 17. The process of claim 16, wherein a recycled monomer-rich feed is supplied to an extent of from 75 to 100% of its volume to a reaction zone upstream of all other reaction zones spaced lengthwise along the tubular reactor.
18. The process of claim 17, wherein the transfer agent supplied at an upstream feed comprises propionaldehyde.

19. The process of claim 17, wherein the concentration of transfer agent at the outlet of the tubular reactor is at least 50% less than the concentration transfer agent in the uppermost upstream reaction zone.

5

20. The process of claim 11, wherein the transfer agent is selected from the group consisting of propionaldehyde, methyl vinyl sulfide, n-butyronitrile, propylene, butene-1, 4-methylpentane-1, isobutylene, diisobutylene, acetaldehyde, and mixtures thereof.

10

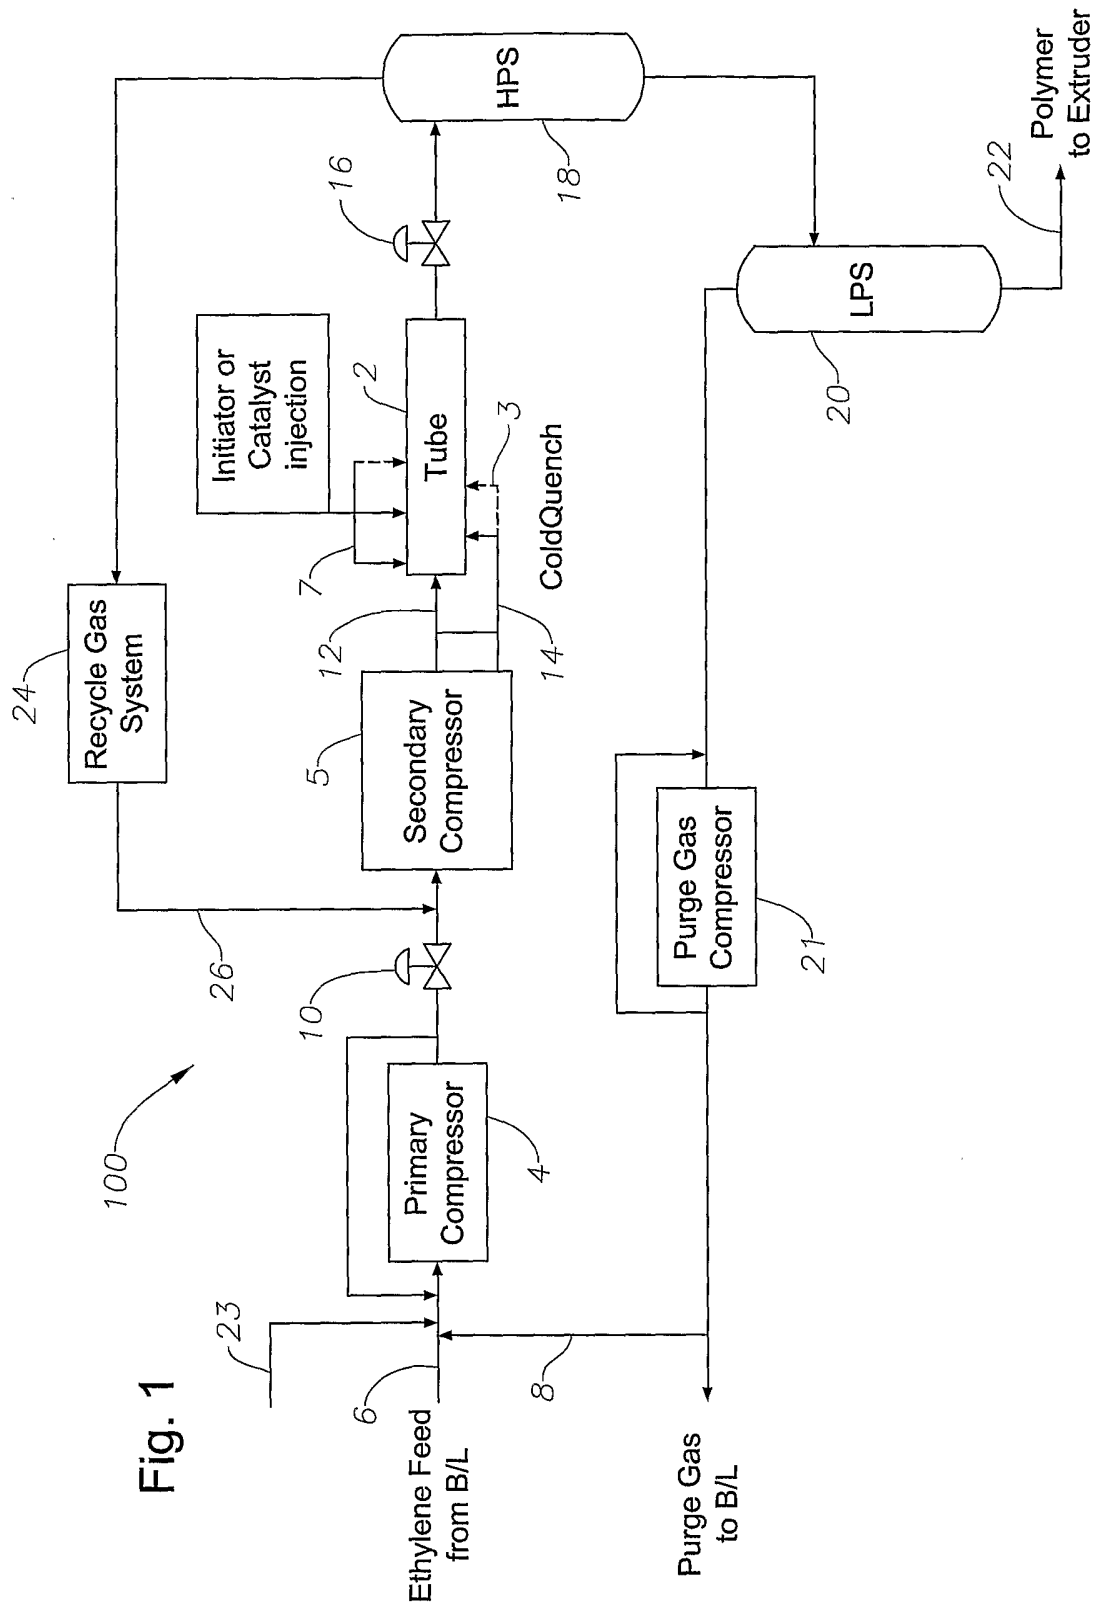

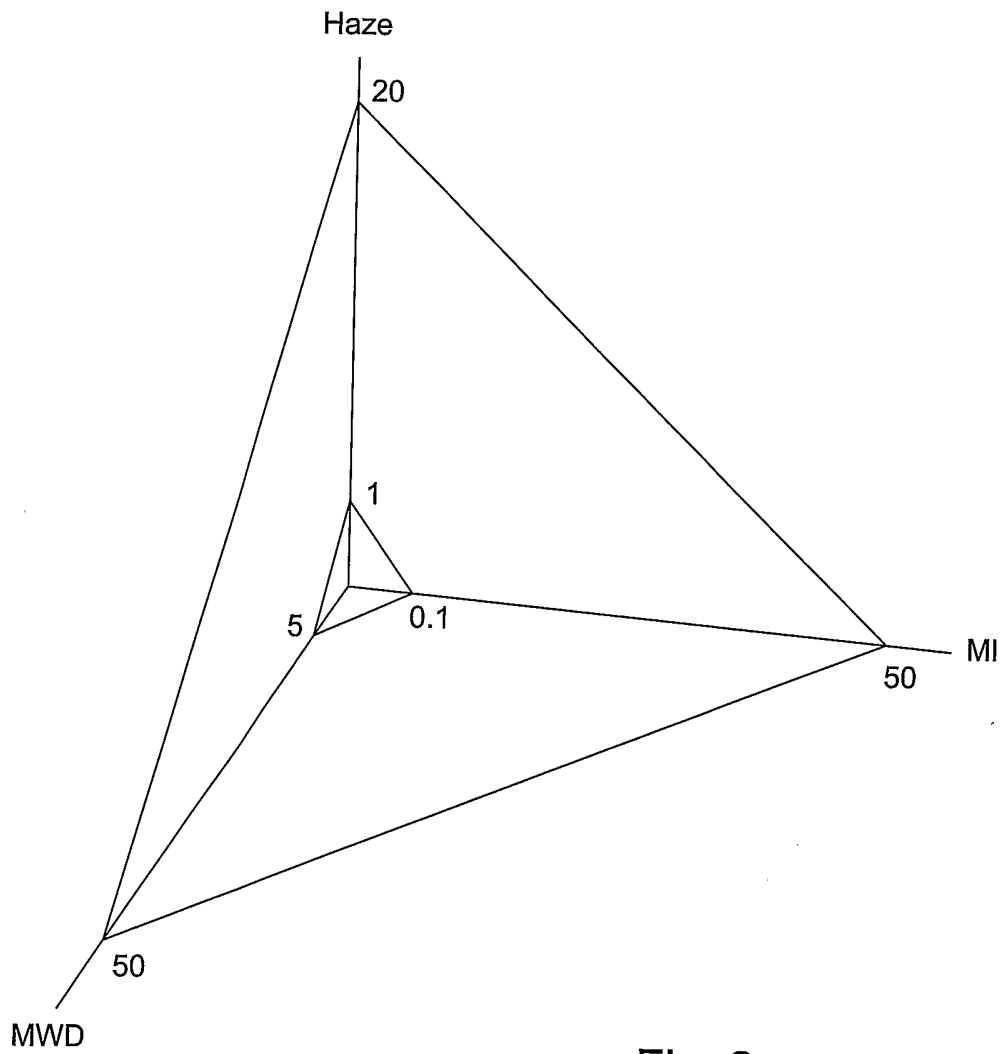


Fig. 2

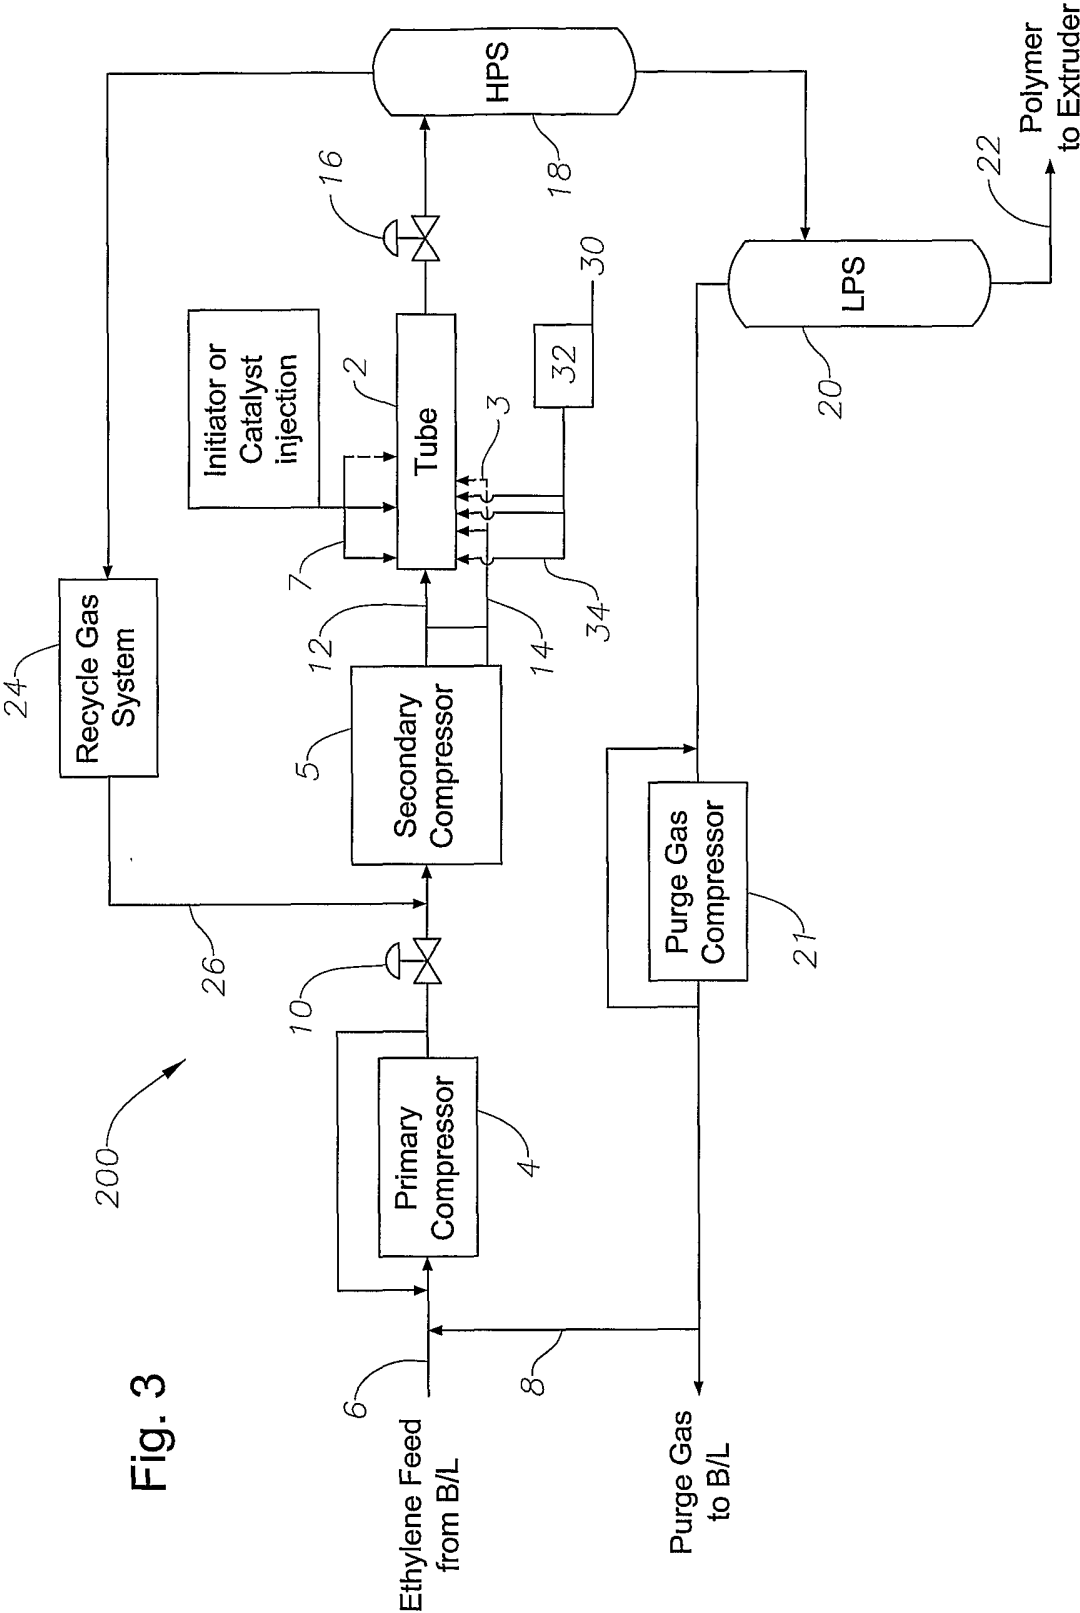


Fig. 3

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 03/20573

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B01J19/24 C08F2/01 C08F2/38 C08F210/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C08F B01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, X	US 2003/114607 A1 (DONCK JAN CYRIEL) 19 June 2003 (2003-06-19) the whole document ---	1-20
X	US 6 569 962 B1 (BEER HARALD ET AL) 27 May 2003 (2003-05-27) examples ---	1-20
X	US 3 334 081 A (MADGWICK GEORGE G ET AL) 1 August 1967 (1967-08-01) claims; examples ---	1-20
Y	US 6 509 424 B1 (KRULL MATTHIAS ET AL) 21 January 2003 (2003-01-21) the whole document --- -/--	1-20

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

30 January 2004

Date of mailing of the international search report

10/02/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Kaumann, E

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/20573

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4 668 473 A (AGARWAL SURESH C) 26 May 1987 (1987-05-26) column 1, line 24 - line 57 column 3, line 13-16 column 4, line 1 - line 13 column 6, line 16; claim 8; figures ----	1-20
A	US 6 518 372 B1 (WEICKERT GUENTER) 11 February 2003 (2003-02-11) column 5, line 30 - line 32 column 2, line 40 - line 48 column 1, line 45 column 7, line 8 - line 54; claims; figures ----	1-20
A	DE 197 54 039 A (BASF AG) 24 June 1999 (1999-06-24) page 2, line 38 -page 2, line 46; claims & US 6 610 797 A (DECKERS) 26 August 2003 (2003-08-26) ----	1-20
A	US 3 809 688 A (BATTINI R ET AL) 7 May 1974 (1974-05-07) column 3, line 15 -column 4, line 9 column 3, line 74 -column 4, line 2; claims -----	1-20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 03/20573

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2003114607	A1	19-06-2003	US 2003206835 A1	06-11-2003
US 6569962	B1	27-05-2003	DE 19829399 A1	03-02-2000
			AU 5503699 A	24-01-2000
			BR 9912229 A	02-05-2001
			CA 2336346 A1	13-01-2000
			EP 1098914 A2	16-05-2001
			JP 2002519485 T	02-07-2002
			PL 346218 A1	28-01-2002
			CZ 20004754 A3	13-02-2002
			WO 0001740 A2	13-01-2000
US 3334081	A	01-08-1967	BE 607527 A	
			FR 1306661 A	19-10-1962
			GB 915240 A	09-01-1963
			SE 317500 B	17-11-1969
US 6509424	B1	21-01-2003	DE 19754555 A1	24-06-1999
			CA 2255491 A1	09-06-1999
			DE 59807177 D1	20-03-2003
			EP 0922716 A1	16-06-1999
			ES 2192733 T3	16-10-2003
			JP 11240905 A	07-09-1999
			US 2002028890 A1	07-03-2002
US 4668473	A	26-05-1987	AU 565167 B2	10-09-1987
			AU 2722484 A	01-11-1984
			BR 8401765 A	04-12-1984
			CA 1222863 A1	16-06-1987
			DE 3476637 D1	16-03-1989
			EP 0124333 A2	07-11-1984
			ES 8600078 A1	01-01-1986
			ES 8603289 A1	16-04-1986
			ES 8603290 A1	16-04-1986
			HK 46289 A	16-06-1989
			IN 160886 A1	15-08-1987
			JP 59206414 A	22-11-1984
			SG 16089 G	07-07-1989
US 6518372	B1	11-02-2003	DE 19907021 A1	24-08-2000
			AU 3155300 A	04-09-2000
			BR 0008345 A	05-02-2002
			CA 2362839 A1	24-08-2000
			CN 1340063 T	13-03-2002
			DE 50002997 D1	28-08-2003
			WO 0049055 A1	24-08-2000
			EP 1159304 A1	05-12-2001
			JP 2002537420 T	05-11-2002
DE 19754039	A	24-06-1999	DE 19754039 A1	24-06-1999
			AT 215570 T	15-04-2002
			CA 2311413 A1	17-06-1999
			DE 59803667 D1	08-05-2002
			DK 1036100 T3	08-07-2002
			WO 9929748 A1	17-06-1999
			EP 1036100 A1	20-09-2000
			ES 2175845 T3	16-11-2002
			JP 2001525462 T	11-12-2001

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 03/20573

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 19754039 A		NO 20002778 A PT 1036100 T US 6610797 B1	31-07-2000 30-09-2002 26-08-2003
US 3809688 A	07-05-1974	BE 778690 A1 BG 25521 A3 CS 172364 B2 DD 95685 A5 DE 2205166 A1 FR 2124300 A5 GB 1362324 A LU 64706 A1 NL 7201394 A ,B, PL 70094 B1 SU 477578 A3 YU 24472 A ,B	16-05-1972 10-10-1978 29-12-1976 12-02-1973 10-08-1972 22-09-1972 07-08-1974 30-06-1972 07-08-1972 28-02-1974 15-07-1975 31-12-1979