

674625

CONVENTION - COMPANY - PCT

(By Assignment and Applicant is NOT Applicant in basic application)

P 00/0081

Section 29(1)

Regulation 3.1(2)

AUSTRALIA

PATENTS ACT 1990

NOTICE OF ENTITLEMENT

We, AlliedSignal, Inc., of 101 Columbia Road, Morristown, New Jersey 07963-2245, United States of America, being the applicant and nominated person in respect of Application No 16852/95, state the following -

- 1 The person nominated for the grant of the patent has entitlement from the actual inventor by assignment
- 2 The person nominated for the grant of the patent has entitlement from the applicants of the application listed in the declaration under Article 8 of the PCT by assignment
- 3 The basic application listed in the declaration under Article 8 of the PCT is the first application made in a Convention country in respect of the invention

For and on behalf of

AlliedSignal, Inc.



(Signature)

March 25, 1996

(Date)

Name Roger H. Criss
Title Assistant Secretary

File 18443

SHELSTON WATERS
60 MARGARET STREET, SYDNEY, AUSTRALIA



AU0510052

(12) PATENT ABRIDGMENT (11) Document No AU-B-16852/95
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No 674625

(Modified Examination)

- (54) Title**
AIRCRAFT WHEEL DEMOUNTABLE FLANGE CORROSION SEAL
- (51)⁰ International Patent Classification**
B60B 025/14
- (21) Application No 10052/95 (22) Application Date 21.09.94**
- (87) PCT Publication Number WO95/09737**
- (30) Priority Data**
- | | | |
|--------------------|------------------|-----------------------------|
| (31) Number | (32) Date | (33) Country |
| 133723 | 07.10.93 | US UNITED STATES OF AMERICA |
- (43) Publication Date 01.05.95**
- (44) Publication Date of Accepted Application 02.01.97**
- (71) Applicant(s)**
ALLIANCE SIGNAL INC.
- (72) Inventor(s)**
RICHARD BERT JANKOWSKI; BRIAN GENE HARKER
- (74) Attorney or Agent**
SHELSTON WATERS , Level 21, 60 Margaret Street, SYDNEY NSW 2000
- (50) Prior Art Documents**
JP JP-A 05160003
US US-A 4757851
GB GB-A 2261857
- (57) Claim**

1. In a wheel rim assembly having a wheel rim with first bead flange, a separable second bead flange, a retaining ring assembly having inboard and outboard portions, the inboard portion received within a groove in the wheel rim to secure the separable second bead flange on the wheel rim, and a flexible composite seal disposed adjacent the outboard portion of the retaining ring assembly, the wheel rim and the second bead flange having oppositely disposed complementary shaped lobe grooves extending radially inwardly and radially outwardly respectively, an axial opening extending between said second bead flange and wheel rim and being in alignment with said outboard portion, and the flexible composite seal member disposed within the axial opening and oppositely disposed complementary shaped lobe grooves, the composite seal member comprising a central flexible member and a radially extending flexible base

(11) AU-B-16852/95
(10) 674625

-2-

member extending at opposite ends into oppositely disposed spaced apart flexible lobe members each received within a respective oppositely disposed complementary shaped lobe groove to retain the composite seal member within the axial opening.

OP. DATE 01/05/95 APPL. NO. 16852/95
FOJP DATE 15/06/95 PCT NUMBER PCT/US94/10741



AU9516592

PCT)

(51) International Patent Classification:

B60B 25/14

(11) International Publication Number:

WO 95/09737

A1

(43) International Publication Date:

13 April 1995 (13 04 95)

(21) International Application Number: PCT/US94/10741

(81) Designated States: AU, JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE)

(22) International Filing Date: 21 September 1994 (21 09 94)

(30) Priority Data:

08/133,723

7 October 1993 (07 10 93)

US

Published

With international search report.

(71) Applicant: ALLIEDSIGNAL INC. [US/US], 101 Columbia Road, P.O. Box 2245, Morristown, NJ 07962-2245 (US).

(72) Inventors: JANKOWSKI, Richard, Bert; 52792 Highland Drive, South Bend, IN 46635 (US). HARKER, Brian, Gene; 15565 Durham Way West, Granger, IN 46530 (US).


(74) Agent: CRISS, Roger, H.; AlliedSignal Inc., Law Dept. (C.A. McNally), 101 Columbia Road, P.O. Box 2245, Morristown, NJ 07962-2245 (US).

674625

(54) Title: AIRCRAFT WHEEL DEMOUNTABLE FLANGE CORROSION SEAL

(57) Abstract

A wheel rim assembly (10) includes a first bead flange and a separable second bead flange (16), the separable second bead flange (16) maintained on a wheel rim (12) of the wheel rim assembly (10) by a retaining ring assembly (20). The retaining ring assembly (20) includes an outboard portion (22) which is partially disposed within an axial opening (18) between the second bead flange (16) and wheel rim (12). The second bead flange (16) and the wheel rim (12) each include an oppositely disposed complementary shaped lobe groove (13, 17) communicating with the axial opening (18). Disposed within the axial opening (18) is a flexible composite corrosion seal (30) comprising a generally rectangularly shaped central flexible member (32) joined with a radially extending flexible lobe member (35) having a plurality of axially extending protrusions (40) and oppositely disposed, spaced apart flexible lobe members (38, 39) each received within a respective lobe groove (13, 17). The seal (30) is flexible and when installed the lobe members (38, 39) extend radially outwardly to be received within the lobe grooves (13, 17) such that the seal (30) is captured within the axial opening (18) and prevents contaminants from entering into an area (50) between the second bead flange (16) and wheel rim (12) wherein the retaining ring assembly (20) is housed.

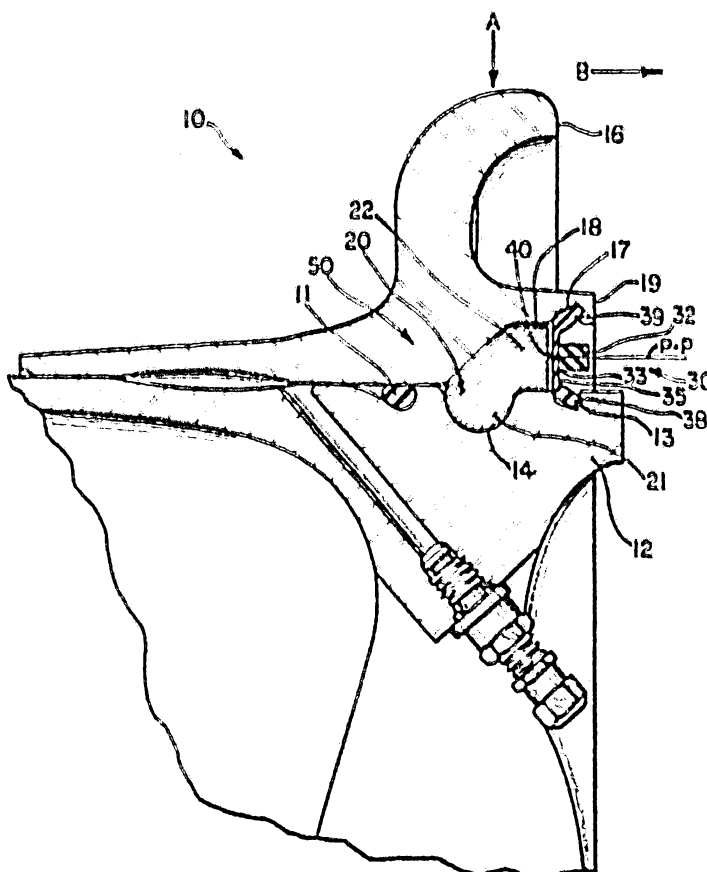

AIRCRAFT WHEEL DEMOUNTABLE FLANGE CORROSION SEAL

This invention relates to a wheel rim assembly having a separable second bead flange retained in place by a retaining ring assembly, with a flexible composite corrosion seal located between the separable second bead flange and wheel rim in order to protect the retaining ring assembly

5 Aircraft wheel assemblies comprise an inflatable tire which is first mounted on the wheel rim and then followed by a separable second bead flange which is maintained in place by a retaining ring assembly. Upon inflation of the mounted tire, the outboard tire bead forces the separable second bead flange into tight contacting engagement with the retaining ring assembly. When the tire is deflated, the retaining
10 ring assembly is removed first, followed by the separable bead flange and finally the deflated tire. Such a wheel assembly and retaining ring assembly is described in Van Den Abeele U S Patent No 4,757,851 owned by the same assignee as herein. When the tire has been inflated and the wheel assembly utilized on an aircraft, it is important that the retaining ring assembly be protected from corrosion, contaminants,
15 and any other matter which could degrade over time or damage the retaining ring assembly that maintains the separable second bead flange in place upon the wheel rim. If a seal is utilized for such protection, it is highly desirable that the seal be easy to install, retain itself in place, be easy to remove, and also compensate for tolerance stack-ups in the area that the seal is seated. Additionally, it is important that the seal
20 be easy to store so that when it is removed from storage it will return to its proper functional shape despite the manner in which it has been stored. The corrosion seal should be easily manufactured from currently available materials which will contribute to reducing its cost.

 The present invention provides solutions to the above by providing in a
25 wheel rim assembly having a wheel rim with first bead flange, a separable second bead flange, a retaining ring assembly having inboard and outboard portions, the inboard portion received within a groove in the wheel rim to secure the separable second bead flange on the wheel rim, and a flexible composite seal disposed adjacent the outboard portion of the retaining ring assembly, the wheel rim and the second bead flange having
30 oppositely disposed complementary shaped lobe grooves extending radially inwardly and radially outwardly respectively, an axial opening extending between said second bead flange and wheel rim and being in alignment with said outboard portion, and the flexible composite seal member disposed within the axial opening and oppositely disposed complementary shaped lobe grooves, the composite seal member comprising
35 a central flexible member and a radially extending flexible base member extending at opposite ends into oppositely disposed spaced apart flexible lobe members each

received within a respective oppositely disposed complementary shaped lobe groove to retain the composite seal member within the axial opening

One way of carrying out the invention is described in detail below with reference to the drawing which illustrates an embodiment in which

§ Figure 1 is a section view of a wheel rim assembly, separable second bead flange, retaining ring assembly, and the flexible composite seal of the present invention


The wheel rim assembly is designated generally by reference numeral 10. Wheel rim assembly 10 comprises wheel rim 12 having therein a circumferential and radially extending groove 14, and separable second bead flange 16 mounted onto rim 12 and held in place by retaining ring assembly 20. Retaining ring assembly 20 may be any one of several types of retaining ring assemblies having the general shape shown above, and including the assembly illustrated in Van Den Abeele U S Patent No 4,757,851. A first or inboard bead flange (not shown) is an integral part of wheel rim 12. Separable second bead flange 16 slides axially onto rim 12 to trap sealing means 11 therebetween, and retaining ring assembly includes lobe 21 disposed within groove 14. When an inflatable tire (not shown) is disposed about wheel rim assembly 10, the tire is inflated to force separable second bead flange 16 radially inward in the direction of Arrow A and axially in the direction of Arrow B. Retaining ring assembly 20 is captured between flange 16 and rim 12, with flange 16 maintained axially in place by lobe 21 of ring assembly 20 so that flange 16 cannot be displaced further in the direction of Arrow B.

Separable second bead flange 16 includes a portion of axially extending opening 18 (located between flange 16 and rim 12) extending from its outboard surface 19 toward the axial center of rim 12, opening 18 communicating with groove 14 wherein retaining ring assembly 20 is received. Retaining ring assembly 20 includes the lobe or inboard portion 21 and an outboard portion 22 located within and aligned with axial opening 18. Located toward the outboard portion of axial opening 18 are a pair of oppositely disposed complementary shaped lobe grooves 17 and 13. Groove 17 is located in second bead flange 16 and groove 13 is located in wheel rim 12. Each of the lobe grooves 13, 17 extends radially away from its communication with axial opening 18.

Disposed within axial opening 18 and lobe grooves 13 and 17 is a flexible composite corrosion seal designated generally by reference numeral 30. Corrosion seal 30 comprises a flexible composite seal having a generally rectangularly shaped central flexible member 32 joined at end 33 to radially extending flexible base member 35. Base member 35 of composite seal 30 includes a pair of oppositely disposed spaced apart flexible lobe members 38, 39 and a plurality of axially extending bumps or protrusions 40 which engage or abut outboard portion 22. Lobe member 38

is received within lobe groove 13 and lobe member 39 is received within lobe groove 17. Corrosion seal 30 is a composite seal comprising central flexible member 32 made from H1 Heel Stock which is a proprietary material available from the J M Clipper Seal Company of Nacogdoches, Texas. The H1 Heel Stock is joined to base member 35 which comprises butadiene acrylonitrile or what is sometimes called "nitrile rubber". Central flexible member 32 is disposed about peripheral axial centerline P-P.

After separable second bead flange 16, wheel rim 12, and the inflatable tire (not shown) have been assembled as above, corrosion seal 30 is installed easily by pressing the seal axially into axial opening 18 until protrusions 40 engage outboard portion 22 and lobes 38 and 39 extend resiliently radially outwardly into grooves 13 and 17. Grooves 13 and 17 are each disposed at an acute angle relative centerline P-P of flexible member 32. Lobes 38 and 39 are captured within lobe grooves 13 and 17 such that corrosion seal 30 is captured axially and radially between separable second bead flange 16, outboard portion 22, and wheel rim 12. Corrosion seal 30 prevents moisture, contaminants and any other damaging matter from entering into the area 50 defined by groove 14 and axial opening 18, and protects retaining ring assembly 20 from degradation or damage over time. Because of its flexibility and the bump like protrusions 40 on the axially inward side of base member 35, corrosion seal 30 compensates for any tolerance stack ups in the proximity of the area of its installation between flange 16 and rim 12, and compensates for changes in wheel shape due to ground loads transmitted through the tire into the wheel. The corrosion seal is easily removed by simply pulling axially outwardly (toward the right in Figure 1) on the H1 Heel Stock flexible member 32 with needle nose pliers. No special tools are required. Because of its flexibility and the form retaining ability of central flexible member 32, the corrosion seal which is annular in shape may be stored in a non-annular form and when removed for use, it will "remember" or retain its shape so that it is ready for installation. The corrosion seal of the present invention provides the above advantages so that it is easy to store prior to its use, easily installed, provides self retention when installed, and is easily removed.



THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:-

1. In a wheel rim assembly having a wheel rim with first bead flange, a separable second bead flange, a retaining ring assembly having inboard and outboard portions, the inboard portion received within a groove in the wheel rim to secure the separable second

5 bead flange on the wheel rim, and a flexible composite seal disposed adjacent the outboard portion of the retaining ring assembly, the wheel rim and the second bead flange having oppositely disposed complementary shaped lobe grooves extending radially inwardly and radially outwardly respectively, an axial opening extending between said second bead flange and wheel rim and being in alignment with said
10 outboard portion, and the flexible composite seal member disposed within the axial opening and oppositely disposed complementary shaped lobe grooves, the composite seal member comprising a central flexible member and a radially extending flexible base member extending at opposite ends into oppositely disposed spaced apart flexible lobe members each received within a respective oppositely disposed complementary shaped
15 lobe groove to retain the composite seal member within the axial opening.

2. The wheel rim assembly in accordance with claim 1, wherein the radially extending flexible base member and oppositely disposed spaced apart lobe members are made of butadiene acrylonitrile.

3. The wheel rim assembly in accordance with claim 2, wherein said central flexible
20 member is generally rectangularly shaped and made from III heel stock.

4. The wheel rim assembly in accordance with claim 3, wherein the flexible composite seal is a corrosion seal which prevents contaminants from entering into an



area between the second bead flange and wheel rim, the area occupied by said retaining ring assembly.

5. The wheel rim assembly in accordance with claim 4, wherein each of the lobe grooves is disposed at an acute angle relative to a peripheral center line of said radially
- 5 extending flexible base member.
6. The wheel rim assembly in accordance with claim 5, wherein the composite seal has a generally T-shaped cross section.
7. The wheel rim assembly in accordance with claim 1, wherein the flexible base member includes a plurality of axially extending protrusions on a side opposite from said
- central flexible member.

DATED this 3rd day of June, 1996

ALLIEDSIGNAL INC.

Attorney: RYAN D. CURNICK
Fellow Institute of Patent Attorneys of Australia
of SHELSTON WATERS



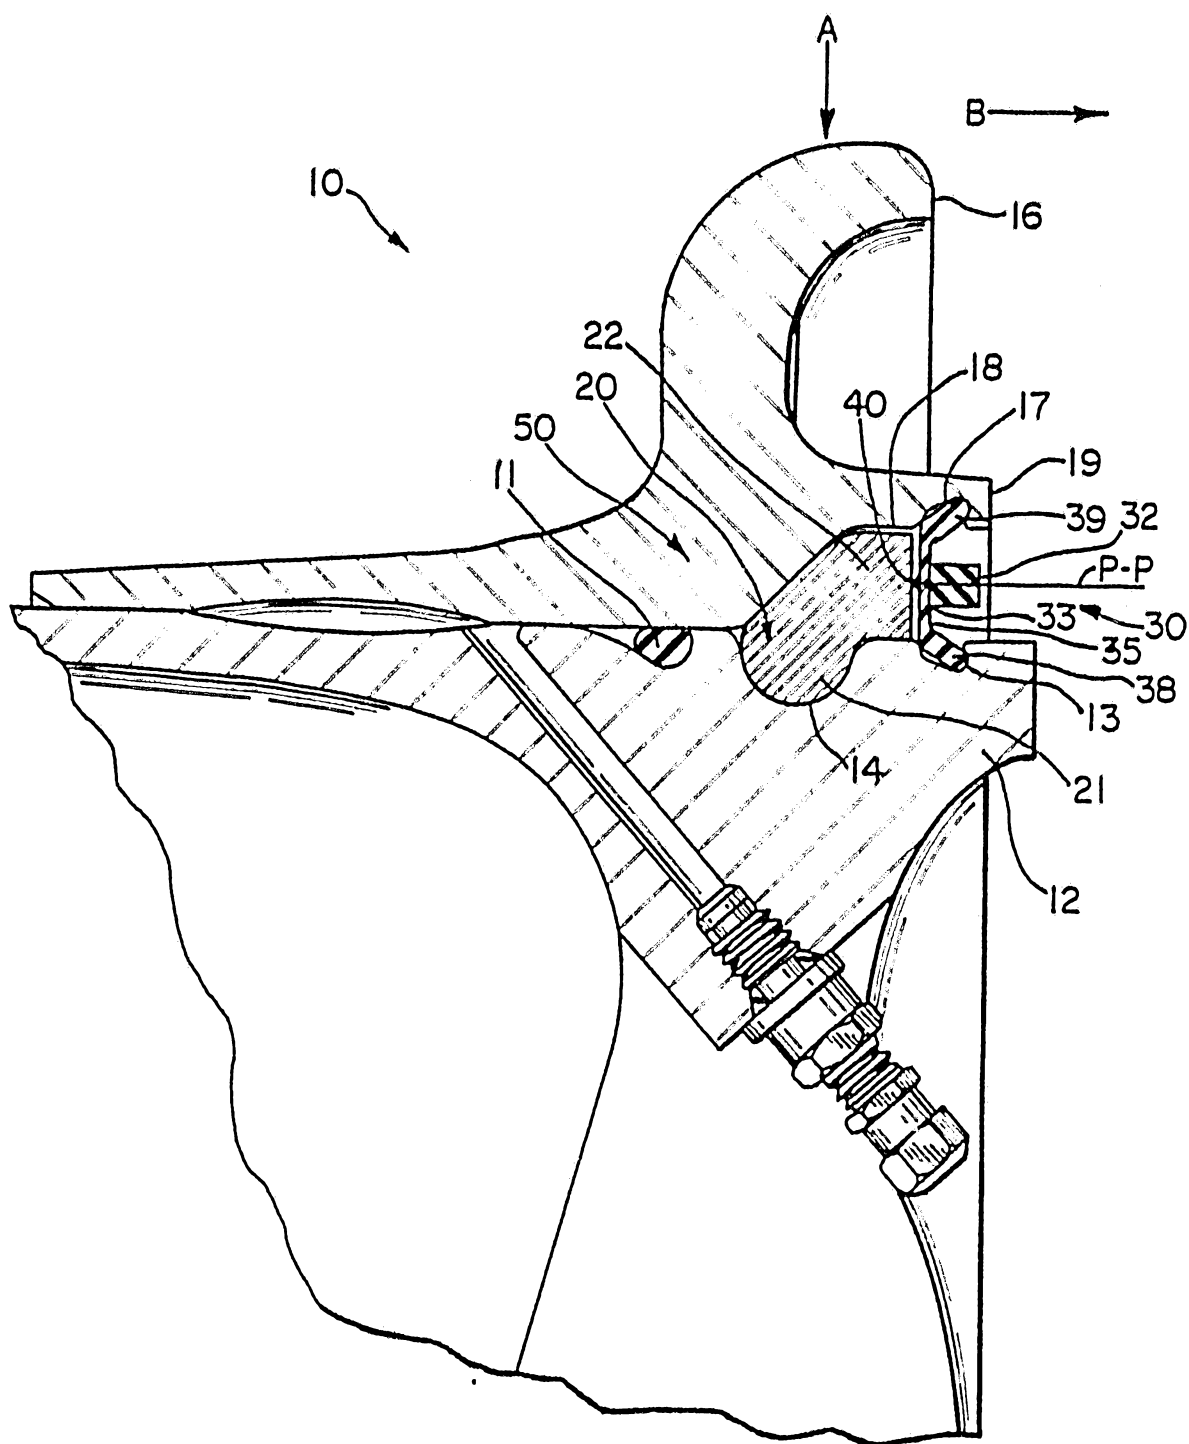


FIG. 1

INTERNATIONAL SEARCH REPORT

Intern. Application No.

PCT/US 94/10741

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 B60B25/14

According to International Patent Classification (IPC) or to both national classification and IPC:

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B60B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP,A,0 438 719 (THE BFGOODRICH COMPANY) 31 July 1991 see column 2, line 40 - column 5, line 53; figures ---	1
A	PATENT ABSTRACTS OF JAPAN vol. 17, no. 576 (M-1499) 20 October 1993 & JP,A,05 169 903 (BRIDGESTONE CORP) 9 July 1993 see abstract ---	1
A	US,A,4 757 851 (VAN DEN ABEELE) 19 July 1988 cited in the application see figures --- -/--	1



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *B* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

A document member of the same patent family

Date of the actual completion of the international search

13 January 1995

Date of mailing of the international search report

20.01.95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Vannest

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/US 94/10741

C. (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB, A, 2 261 857 (SMITH) 2 June 1993 see page 6, line 19 - page 14, line 16; figures ---	1
A	US, A, 4 683 930 (ELAM) 4 August 1987 see claim; figures -----	1

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 94/10741

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0438719	31-07-91	US-A- 5086821 DE-D- 69008147 DE-T- 69008147 ES-T- 2055286 JP-A- 4297303	11-02-92 19-05-94 03-11-94 16-08-94 21-10-92
US-A-4757851	19-07-88	DE-A- 3777678 EP-A, B 0238786 JP-A- 62227802	30-04-92 30-09-87 06-10-87
GB-A-2261857	02-06-93	US-A- 5259430 FR-A- 2684048	09-11-93 28-05-93
US-A-4683930	04-08-87	NONE	