

(19)



(11)

EP 4 051 932 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
08.11.2023 Bulletin 2023/45

(51) International Patent Classification (IPC):
F16K 3/08 ^(2006.01) **F16K 11/074** ^(2006.01)
G01N 30/20 ^(2006.01)

(21) Application number: **20780403.0**

(52) Cooperative Patent Classification (CPC):
F16K 11/0743; G01N 2030/202

(22) Date of filing: **04.09.2020**

(86) International application number:
PCT/US2020/049448

(87) International publication number:
WO 2022/050956 (10.03.2022 Gazette 2022/10)

(54) **ROTARY VALVE WITH REDUCED FLUSHING TIME**

DREHVENTIL MIT REDUZIERTER SPÜLZEIT

VANNE ROTATIVE AYANT UN TEMPS DE RINÇAGE RÉDUIT

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

• **KENNEDY, Michael**
Los Gatos, CA 95030 (US)

(43) Date of publication of application:
07.09.2022 Bulletin 2022/36

(74) Representative: **Qip Patentanwälte**
Dr. Kuehn & Partner mbB
Goethestraße 8
80336 München (DE)

(73) Proprietor: **Tecan Trading AG**
8708 Männedorf (CH)

(56) References cited:
WO-A1-2014/047108 **US-A- 5 419 208**
US-A1- 2006 260 695 **US-A1- 2016 033 049**

(72) Inventors:
 • **DONETZ, Anthony**
Hayward, CA 94545 (US)

EP 4 051 932 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD OF THE INVENTION

[0001] The invention relates to a rotary valve.

BACKGROUND OF THE INVENTION

[0002] Rotary valves may be used in laboratory automation systems for distributing liquids, such as reagents, dilutions, samples, etc. A rotary valve usually comprises a stator member with stator channels and a rotor member, which comprises a rotor channel. Dependent on different rotary positions, the rotor channel interconnects different stator channels with each other. A pump may convey a liquid from a first container and/or channel into the rotary valve and the rotary valve may distribute the liquid into other containers and/or channels dependent on its rotor position. The rotary valve also may draw from one of a plurality of source containers and may distribute the fluid into a common outlet.

[0003] An important feature of any valve in a laboratory automation system is the flushing time, i.e. the time in which a first liquid in the valve can be substituted with another liquid. A fast flushing time of the valve may increase the overall throughput of an analytical instrument.

[0004] A second important feature of any valve in a laboratory automation system is the flushing volume, i.e. the volume required to substitute a first liquid in the valve with another liquid. The first liquid has to be flushed out completely by the other liquid in order to prevent cross contamination which may impact downstream processes/analyses. Small flushing volume may decrease flushing time and/or may save precious reagents.

[0005] US 7 308 908 B2 shows a rotary valve with a stator channel in a stator member, which stator channel is transversely aligned to a rotation axis of a rotor member.

[0006] US 2016 0 033 049 A1 shows a multi-path selector valve with planar rotor and stator faces, in which rotor channels and stator channels are provided that are interconnected in a specific rotor position.

[0007] US 5 419 208 A shows a multiport selection valve with curved rotor and stator faces. The openings of the rotor and stator channels, which can be aligned with each other, have walls, which are orthogonal to the respective part of the corresponding face.

DESCRIPTION OF THE INVENTION

[0008] The objective of the invention is a rotary valve with a reduced flushing time.

[0009] This objective is met by the subject-matter of the independent claim. Further exemplary embodiments are evident from the dependent claims and the following description.

[0010] The invention relates to a rotary valve comprising a stator member with a planar stator face, the stator

member having a plurality of stator channels for conducting a fluid and a rotor member with a planar rotor face facing and in contact with the stator face, the rotor member having at least one rotor channel. The rotor member is rotatable with respect to the stator member about a rotation axis, such that in a conduction position, the rotor channel interconnects two of the stator channels and the two stator channels are in fluid communication. The stator face and the rotor face may be parallel. The rotation axis may be aligned orthogonally to the stator face and the rotor face.

[0011] The stator member and the rotor member may be accommodated in a housing of the rotary valve, wherein the stator member may be statically connected with the housing and the rotor member may be rotatably connected with the housing. The rotor member may be rotated by a step motor. A pump, such as an automatically actuated syringe, may be connected to one of the stator channels. The housing of the rotary valve furthermore may comprise means for pressing the rotor face against the stator face, such as a spring.

[0012] The stator member and/or the rotor member may be made of a ceramics material e.g. alumina, metal e.g. stainless steel or polymer e.g. PEEK (Polyetheretherketone) or ETFE (Ethylene Tetrafluoroethylene). The stator channels may be made of bores machined in the material before or after sintering or formed by inserting a wire before pressing or molding, which are removed after forming. The rotor channel may be made by machining a groove into the material. It also may be that the rotor member and/or the stator member are 3D printed, for example by laser sintering.

[0013] There may be more than one conduction position. It may be that the stator member has a stator channel with a central opening that opens into the rotor channel in any conduction position. It may be that the stator member has one or more eccentric stator channels with an opening spaced apart from the rotation axis. In a specific conduction position, one of the eccentric stator channels may be connected with the stator channel with the central opening.

[0014] According to an embodiment of the invention, at least one of the stator channels has a transverse channel section opening into the stator face and running transversely with respect to the stator face, the rotor face and/or the rotation axis. Transverse may mean that a central line of the transverse channel is not orthogonal with respect to the stator face and/or the rotor face. Transverse may mean that a central line of the transverse channel projected onto a plane comprising the rotation axis is not parallel and is not orthogonal. The transverse channel section may have a cylindrical form and/or may have a circular cross-section. It also may be that the transverse channel section has an ellipsoid, egg shaped or polygonal cross-section. The interface of the transverse channel section and the stator face may be elongated, such as egg-shaped or ellipsoidal.

[0015] With a transverse channel section, the overall

length of the fluid path through the stator member and the rotor member may be shortened. This may decrease the flushing time. With a transverse channel orientation, the flushing performance may be improved compared to an orthogonal orientation.

[0016] The at least one stator channel with the transverse channel section may be an eccentric stator channel. In the case, the stator member has more than one eccentric stator channel, each of the eccentric stator channels may have a transverse channel section. At least some of the transverse channel sections may be symmetric with respect to each other by rotation about the rotation axis.

[0017] It also may be that there is one or more pairs of stator channels, which are interconnected by a rotor channel. Both stator channels of a pair may have transverse channel sections. It also may be that one stator channel of a pair has a transverse channel section and that the other one is orthogonally aligned to the stator face. The pairs of stator channels may be symmetric with respect to each other by rotation about the rotation axis.

[0018] According to an embodiment of the invention, the rotor channel has a bottom, which at an intersection end of the rotor channel is inclined with respect to the rotor face, the stator face and the rotation axis, such that the rotor channel elongates an inner surface of the stator channel, when the rotor member is in the conducting position. As transverse, inclined means that the bottom has a substantially flat bottom surface and substantially straight bottom line, which is angled with respect to the rotor face, the stator face and/or the rotation axis. By elongating the stator channel and in particular the transverse channel section with the rotor channel, substantial continuous surfaces may be formed.

[0019] With the inclined bottom of the rotor channel, turbulences and/or vorticities in the transition between the rotor channel and the stator channel may be reduced. This also may reduce the flushing time, since a more laminar fluid flow may be achieved. Furthermore, a reduced flushing volume may be achieved by avoiding dead points.

[0020] An inclined bottom of the rotor channel may be provided by a rotor channel, which at the intersection end becomes deeper with increasing distance from the outermost position of the rotor channel. Over a range, the increase of the depth may be linear with respect to the distance to the outermost position.

[0021] According to the invention, the rotor channel is a groove in the rotor face. Over its complete extension, the rotor channel is always opened towards the rotor face.

[0022] According to an embodiment of the invention, the rotor channel has a U-shaped cross-section. The bottom surface of the rotor channel may have a substantial circular cross-section.

[0023] According to an embodiment of the invention, a bottom line of the rotor channel at the intersection end is inclined with respect to the rotor face, the stator face and/or the rotation axis. The bottom line may be com-

posed of the lowest points of the U-shaped cross-sections along the extension of the rotor channel.

[0024] According to the invention, the bottom of the rotor channel at the interconnection end is inclined with respect to the rotor face, the stator face and the rotation axis with the same angle as the stator channel. In such a way, a cylindrical shape of the transverse channel section of the stator channel may be elongated substantially flush with the rotor channel.

[0025] According to an embodiment of the invention, the rotor channel extends radially with respect to the rotation axis. The rotor channel may be substantially straight. One end of the rotor channel may be at the center of the rotor member, i.e. at the rotation axis.

[0026] According to an embodiment of the invention, the rotor channel extends tangential with respect to a circle around the rotation axis. It also may be that there are a plurality of rotor channels, which may be distributed symmetrically with respect to the rotation axis.

[0027] According to an embodiment of the invention, a center line of the transverse channel section intersects with the rotation axis. In other words, the rotation axis and the stator channel may be arranged in one plane.

[0028] According to an embodiment of the invention, the stator member comprises a parallel stator channel, which runs parallel to and/or along the rotation axis of the rotor member. The parallel stator channel may be the only input and/or output of the rotary valve from which the fluid is distributed to and/or collected from the eccentric stator channels, which then act as outputs and/or inputs. Both sections may have a circular cross-section and/or may be centred with respect to each other.

[0029] It also may be that a parallel stator channel is running spaced apart from the rotation axis. For example, pairs of stator channels, which are arranged symmetrically around the rotation axis may have a parallel stator channel.

[0030] A connection port may be a substantially cylindrical opening in the rotary valve for connecting pipes or hoses to the rotary valve. The connection ports, which may be designed to receive screwed fittings, may be provided by the stator member or a further member of the rotary valve arranged on a surface of the stator member opposite to the stator face.

[0031] According to an embodiment of the invention, the parallel stator channel has a first section opening into the rotor channel and a second section opening towards a connection port of the rotary valve. The second section has a smaller diameter as the first section. This may help forming a laminar fluid flow between the connection port and the parallel stator channel and/or also may reduce the flushing time.

[0032] According to an embodiment of the invention, the stator member comprises a circular groove surrounding the stator face. The circular groove may have an inclined surface, which is inclined with respect to the rotation axis. The transverse channel section(s) of the one or more eccentric stator channels may run along this cir-

cular groove. In particular, the transverse channel sections open the possibility, such that such a groove can be formed in the stator. With the groove, the stator may be designed more compact. The circular groove also may provide space so that any leakage between the rotor member and stator member may leave the rotary valve through a drain hole, rather than forcing through the sealed bearing and possibly damaging the bearing and/or valve.

[0033] According to an embodiment of the invention, the inclined surface is inclined with respect to the rotation axis with the same angle as the transverse channel section. In such a way, material between the inclined surface and the transverse channel sections may be spared.

[0034] According to an embodiment of the invention, a bearing surrounding the rotor member protrudes into the circular groove. The bearing may be used for supporting a rotation of the rotor. An overall length of the rotary valve may be reduced. The bearing may be a sliding bearing or a ball bearing.

[0035] According to an embodiment of the invention, the stator channel with the transverse channel section has a parallel channel section, which opens towards a connection port of the rotary valve. The parallel channel section runs parallel to the rotation axis. The transverse channel section and the parallel channel section may have the same diameter and/or may have a circular cross-section. The connection port to the stator channel may be aligned parallel to the rotation axis. In such a way, a laminar fluid flow between the stator channel and the connection port is supported. This also may support reducing the flushing time.

[0036] These and other aspects of the invention will be apparent from and elucidated with reference to the embodiments described hereinafter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0037] Below, embodiments of the present invention are described in more detail with reference to the attached drawings.

Fig. 1 shows a perspective sectional view of a rotary valve according to an example not belonging to the invention.

Fig. 2 shows a perspective sectional view of a part of the rotary valve of Fig. 1.

Fig. 3 schematically shows a perspective view of a stator channel of the rotary valve of Fig. 1.

Fig. 4 schematically shows a perspective view of a part of the stator channel of Fig. 3 from a different direction.

Fig. 5 shows a view onto a rotor member of a rotary valve according to an embodiment of the invention.

Fig. 6 shows a perspective view of a part of a rotary valve according to an embodiment of the invention.

Fig. 7 shows a perspective view of a part of a rotary valve according to an embodiment of the invention.

[0038] The reference symbols used in the drawings, and their meanings, are listed in summary form in the list of reference symbols. In principle, identical parts are provided with the same reference symbols in the figures.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

[0039] Fig. 1 shows a rotary valve 10 with a rotor assembly 12 and a stator assembly 14 in a housing 16.

[0040] The rotor assembly 12 comprises a spring element 18, a bearing 20 (such as a ball bearing), a sleeve 22, a rotor member 24 and a sliding bearing 26. The spring element 18, which lies on an annular ground wall 28 of the housing 16, presses the rotor member 24 via the bearing 20 and the sleeve 22 against the stator assembly 14. A sealing ring 30 tightens the rotor assembly against the housing 16.

[0041] The rotor member 24 is rotatably mounted to the bearing 20 and rotatably mounted inside the sliding bearing 26. The rotor member 24 is adapted to rotate about a rotation axis A. Through the annular ground wall 28, a shaft of a gear and/or an electrical motor may be mounted into the sleeve 22 and into an opening 32 of the rotor member 24.

[0042] The stator assembly 14 comprises a stator member 36, which is fixed to the housing 16. A bolt 38 prevents a rotation of the stator member 36. A port member 40 of the stator assembly 14 is arranged on the stator member 36 and fixed into the housing with a screw ring 42. The port member 40 comprises connection ports 44 for connecting lines or hoses to the rotary valve 10. The connection ports 44 are substantially cylindrical openings extending parallel to the rotation axis.

[0043] The stator member 36 comprises stator channels 46, 48 (see also Fig. 2), which enter into the connection ports 44. The rotor member 24 comprises a rotor channel 50, which in specific rotor positions interconnects the parallel stator channel 46 and one of the eccentric stator channels 48. In such a rotor position, a fluid can flow from the central port 44 to one of the other ports 44 or vice versa. In other positions, the fluid flow may be blocked.

[0044] Fig. 2 shows the rotor member 24 and the stator member 36 in more detail. Fig. 3 and 4 show the inner surfaces of a stator channel 48 and the rotor channel 50.

[0045] The rotor member 24 has a planar, disk shaped rotor face 52 in which the rotor channel 50 is provided as a groove. The stator member 36 has a planar, disk shaped stator face 54, which faces and is in contact with the rotor face 52. The spring element 18 (see Fig. 1) presses the rotor face 52 against the stator face 54, such

that a fluid tight connection is generated.

[0046] In Fig. 2, the rotor member 24 and the stator member 36 are shown in a conducting position, in which a fluid flow through the rotary valve is possible. The parallel stator channel 46 has a circular opening 56 in the stator face 54 and is positioned over a central extension end 58 of the rotor channel 50. An eccentric stator channel 48 has an irregular, elongated opening 60 in the stator face 54 and is positioned over an eccentric extension end 62 of the rotor channel.

[0047] The rotor channel 50 extends from the extension end 58 to the extension end 62 in a radial direction with respect to the rotation axis A. The extension end 58 has a semi-circular border. The extension end 62 has an ellipsoidal border. In between the extension ends, the borders of the rotor channel 50 are parallel.

[0048] Along its extension direction, the rotor channel 50 has a U-shaped cross-section with respect to planes orthogonal to the radial direction and the rotation axis A. Along a plane comprising the rotation axis A and the radial direction along which the rotor channel 50 extends, the rotor channel 50 has a longitudinal section, which, starting from the extension end 62, is inclined with respect to the rotation axis A, after that runs in radial direction and at the extension end 58 has a 90° turn into a line parallel to the rotation axis A.

[0049] At the eccentric extension end 62, the complete bottom 64 of the rotor channel 50 is inclined with respect to the rotation axis A and/or with the bottom 64 of the rotor channel 50 between the extension ends 62, 58. In particular, a substantially straight bottom line 66 is inclined in this way.

[0050] In between the extension ends 58, 62, the bottom 64 and/or the bottom line 66 runs orthogonal to the rotation axis A. At the central extension end 58, the bottom and/or the bottom line goes over into a line parallel to the rotation axis A. Partially, the bottom 64 of the rotor channel 50 at the interconnection end 58 is aligned orthogonally to the rotation axis A.

[0051] The parallel stator channel 46 has a first section 68, which opens into the rotor channel 50 at the opening 56, and a second section 70, which opens towards a connection port 44 of the rotary valve 10 at a further circular opening 72. Both sections 68, 70 have a circular cross-section. The second section 70 has a smaller diameter as the first section 68. The opening 72 extends from the diameter of the second section to the diameter of the first section 68.

[0052] Each of the eccentric stator channels 48 has a transverse channel section 74, which opens into the stator face 54 at the respective opening 60. The transverse channel section 74 runs transversely with respect to the rotation axis A. The transverse channel section 74 has a substantially cylindrical shape with a center line 74 that intersects with the rotation axis A. The bottom 64 and/or bottom line 66 of the rotor channel 50 at the interconnection end 62 is inclined with respect to the rotation axis A with the same angle as transverse channel section 74

and/or its center line.

[0053] The rotor channel 50 and its bottom 64 at the intersection end 62 are formed, such that the rotor channel 50 elongates an inner surface of the transverse channel section 74.

[0054] The opening 60 of the transverse channel section 74 has a side wall 76 running parallel to the rotation axis A at a side, where an angle between the transverse channel section 74 and the stator face 54 is acute. The opening 60 may be egg-shaped, i.e. may have a border, which is partially ellipsoidal shaped and partially circular shaped.

[0055] Each of the eccentric stator channels 48 have a parallel channel section 78, which opens towards one of the connection ports 44 with an opening 80. The channel section 78 as well as the opening 80 have a circular cross-section and the same diameter as the transverse channel section 74. An angle between the transverse channel section 74 and the parallel channel section 78 is obtuse. The parallel channel section 78 runs parallel to the rotation axis A.

[0056] The stator member 36 comprises a circular groove 82 surrounding the stator face 54. The circular groove 82 has an inclined surface 84, which is inclined with respect to the rotation axis A with the same angle as the transverse channel sections 74 of the eccentric stator channels 48. The bearing 26 surrounding the rotor member 24 protrudes into the circular groove 82. Opposite to the inclined surface 84, the circular groove 82 has a cylindrical surface 86. In such a way, a rim 88 is generated, which mechanically stabilizes the stator member 36.

[0057] Fig. 5 shows that the rotor member 24 may comprise more than one rotor channel 50. In Fig. 5 a plurality of rotor channels 50 are arranged rotational symmetric to the rotation axis A. Each of these rotor channels 50 may interconnect two stator channels 46, 48 as shown in the following drawings.

[0058] In Fig. 6, the stator member 36 comprises two eccentric stator channels 48, which are interconnectable by a rotor channel 50 as shown in Fig. 5. The eccentric stator channels 48 may be formed as shown in Fig. 2-4. The rotor channel 50 may have intersection ends 62, such as shown in Fig. 2-4.

[0059] In Fig. 7, the stator member 36 comprises an eccentric stator channels 48 and a parallel stator channel 46, which are interconnectable by a rotor channel 50 as shown in Fig. 5. The eccentric stator channel 48 may be formed as shown in Fig. 2-4. The eccentric stator channel 48 also may be formed, such as shown in Fig. 2-4, however, may be spaced apart from the rotation axis A. The rotor channel 50 may have one eccentric intersection end 62, such as shown in Fig. 2-4. The other end of the rotor channel 50 may be formed like the central intersection end 58 as shown in Fig. 2-4, however may be spaced apart from the rotation axis A.

[0060] While the invention has been illustrated and described in detail in the drawings and foregoing descrip-

tion, such illustration and description are to be considered illustrative or exemplary and not restrictive; the invention is not limited to the disclosed embodiments. Other variations to the disclosed embodiments can be understood and effected by those skilled in the art and practising the claimed invention, from a study of the drawings, the disclosure, and the appended claims. In the claims, the word "comprising" does not exclude other elements or steps, and the indefinite article "a" or "an" does not exclude a plurality. A single processor or controller or other unit may fulfil the functions of several items recited in the claims. The mere fact that certain measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage. Any reference signs in the claims should not be construed as limiting the scope.

LIST OF REFERENCE SYMBOLS

[0061]

10	rotary valve
12	rotor assembly
14	stator assembly
16	housing
18	spring element
20	bearing
22	sleeve
24	rotor member
26	sliding bearing
28	annular ground wall
30	sealing ring
A	rotation axis
32	opening
36	stator member
38	bolt
40	port member
42	screw ring
44	connection port
46	parallel stator channel
48	eccentric stator channel
50	rotor channel
56	opening
58	central extension end
60	opening
62	eccentric extension end
64	bottom
66	bottom line
68	first section
70	second section
72	opening
74	transverse channel section
76	side wall
78	parallel channel section
80	opening
82	circular groove
84	inclined surface
86	cylindrical surface

88 rim

Claims

1. A rotary valve (10), comprising:

a stator member (36) with a planar stator face, the stator member (36) having a plurality of stator channels (46, 48) for conducting a fluid; a rotor member (24) with a planar rotor face (52) facing and in contact with the stator face, the rotor member (24) having a rotor channel (50); wherein the rotor member (24) is rotatable with respect to the stator member (36) about a rotation axis (A), such that in a conducting position, the rotor channel (50) interconnects two of the stator channels (46, 48) and the two stator channels (46, 48) are in fluid communication; wherein at least one of the stator channels (48) has a transverse channel section (74) opening into the stator face (54) and running transversely with respect to the stator face (54); wherein the rotor channel (50) has a bottom (64), which at an intersection end (62) of the rotor channel (50) is inclined with respect to the rotor face (52), such that the rotor channel (50) elongates an inner surface of the stator channel (48), when the rotor member (24) is in the conducting position; wherein the rotor channel (50) is a groove in the rotor face (52) and the rotor channel is always opened towards the rotor face over its complete extension;

characterised in that
the bottom (64) of the rotor channel (50) at the interconnection end (62) is inclined with respect to the rotor face (52) and the rotation axis (A) with the same angle as the stator channel (48), such that a cylindrical shape of the transverse channel section (74) of the stator channel (48) is elongated flush with the rotor channel (50).

2. The rotary valve (10) of claim 1,

wherein the rotor channel (50) has a U-shaped cross-section.

3. The rotary valve (10) of one of the previous claims, wherein the bottom (64) of the rotor channel (50) at a second interconnection end (58), which opens into a further stator channel (46), is aligned orthogonally to the rotation axis (A).

4. The rotary valve (10) of one of the previous claims, wherein the rotor channel (50) extends radially with respect to the rotation axis (A); or wherein the rotor channel (50) extends tangent

- with respect to a circle around the rotation axis (A).
5. The rotary valve (10) of one of the previous claims, wherein a center line of the transverse channel section (74) intersects with the rotation axis (A). 5
6. The rotary valve (10) of one of the previous claims, wherein the stator member (36) comprises a parallel stator channel (46), which runs parallel to the rotation axis (A) of the rotor member (24). 10
7. The rotary valve (10) of claim 6,
- wherein the parallel stator channel (46) has a first section (68), which opens into the rotor channel (50), and a second section (70), which opens towards a connection port (44) of the rotary valve (10); 15
- wherein the second section (70) has a smaller diameter as the first section (68). 20
8. The rotary valve (10) of one of the previous claims,
- wherein the stator member (36) comprises a circular groove (82) surrounding the stator face (54); 25
- wherein the circular groove (82) has an inclined surface (84), which is inclined with respect to the rotation axis (A). 30
9. The rotary valve of claim 8, wherein the inclined surface (84) is inclined with respect to the rotation axis (A) with the same angle as the transverse channel section (74). 35
10. The rotary valve (10) of claims 8 or 9, wherein a bearing (26) surrounding the rotor member (24) protrudes into the circular groove (82). 40
11. The rotary valve (10) of one of the previous claims,
- wherein the stator channel (48) with the transverse channel section (74) has a parallel channel section (78), which opens towards a connection port (44) of the rotary valve (10); 45
- wherein the parallel channel section (78) runs parallel to the rotation axis (A). 50

Patentansprüche

1. Drehventil (10), umfassend:
- ein Statorelement (36) mit einer ebenen Statorfläche, wobei das Statorelement (36) mehrere Statorkanäle (46, 48) zum Leiten eines Fluids aufweist; 55

ein Rotorelement (24) mit einer ebenen Rotorfläche (52), die der Statorfläche zugewandt ist und mit dieser in Kontakt steht, wobei das Rotorelement (24) einen Rotorkanal (50) aufweist; wobei das Rotorelement (24) in Bezug auf das Statorelement (36) um eine Drehachse (A) derart drehbar ist, dass in einer leitenden Position der Rotorkanal (50) zwei der Statorkanäle (46, 48) miteinander verbindet und die beiden Statorkanäle (46, 48) in Strömungsverbindung stehen;

wobei mindestens einer der Statorkanäle (48) einen quer verlaufenden Kanalabschnitt (74) aufweist, der in die Statorfläche (54) öffnet und quer zu der Statorfläche (54) verläuft;

wobei der Rotorkanal (50) einen Boden (64) aufweist, der an einem Verbindungsende (62) des Rotorkanals (50) in Bezug auf die Rotorfläche (52) derart geneigt ist, dass der Rotorkanal (50) eine Innenfläche des Statorkanals (48) verlängert, wenn das Rotorelement (24) in der leitenden Position ist;

wobei der Rotorkanal (50) eine Nut in der Rotorfläche (52) ist und der Rotorkanal über seine gesamte Erstreckung immer zu der Rotorfläche hin geöffnet ist;

dadurch gekennzeichnet, dass der Boden (64) des Rotorkanals (50) an dem Verbindungsende (62) in Bezug auf die Rotorfläche (52) und die Drehachse (A) mit dem gleichen Winkel wie der Statorkanal (48) geneigt ist, derart, dass eine zylindrische Form des quer verlaufenden Kanalabschnitts (74) des Statorkanals (48) bündig mit dem Rotorkanal (50) verlängert ist.

2. Drehventil (10) nach Anspruch 1, wobei der Rotorkanal (50) einen U-förmigen Querschnitt aufweist.
3. Drehventil (10) nach einem der vorhergehenden Ansprüche, wobei der Boden (64) des Rotorkanals (50) an einem zweiten Verbindungsende (58), das in einen weiteren Statorkanal (46) öffnet, orthogonal zu der Drehachse (A) ausgerichtet ist.
4. Drehventil (10) nach einem der vorhergehenden Ansprüche,
- wobei sich der Rotorkanal (50) radial in Bezug auf die Drehachse (A) erstreckt; oder wobei sich der Rotorkanal (50) tangential in Bezug auf einen Kreis um die Drehachse (A) erstreckt.
5. Drehventil (10) nach einem der vorhergehenden Ansprüche, wobei eine Mittellinie des quer verlaufenden Kanal-

abschnitts (74) die Drehachse (A) schneidet.

6. Drehventil (10) nach einem der vorhergehenden Ansprüche,
wobei das Statorelement (36) einen parallelen Statorkanal (46) umfasst, der parallel zu der Drehachse (A) des Rotorelements (24) verläuft. 5
7. Drehventil (10) nach Anspruch 6,
wobei der parallele Statorkanal (46) einen ersten Abschnitt (68) aufweist, der in den Rotorkanal (50) öffnet, und einen zweiten Abschnitt (70), der zu einer Verbindungsöffnung (44) des Drehventils (10) hin öffnet;
wobei der zweite Abschnitt (70) einen kleineren Durchmesser als der erste Abschnitt (68) aufweist. 10
8. Drehventil (10) nach einem der vorhergehenden Ansprüche,
wobei das Statorelement (36) eine kreisförmige Nut (82) umfasst, die die Statorfläche (54) umgibt;
wobei die kreisförmige Nut (82) eine geneigte Fläche (84) aufweist, die in Bezug auf die Drehachse (A) geneigt ist. 15
9. Drehventil nach Anspruch 8,
wobei die geneigte Fläche (84) in Bezug auf die Drehachse (A) mit dem gleichen Winkel wie der quer verlaufende Kanalabschnitt (74) geneigt ist. 20
10. Drehventil (10) nach Anspruch 8 oder 9,
wobei ein Lager (26), das das Rotorelement (24) umgibt, in die kreisförmige Nut (82) ragt. 25
11. Drehventil (10) nach einem der vorhergehenden Ansprüche,
wobei der Statorkanal (48) mit dem quer verlaufenden Kanalabschnitt (74) einen parallelen Kanalabschnitt (78) aufweist, der sich zu einer Verbindungsöffnung (44) des Drehventils (10) hin öffnet;
wobei der parallele Kanalabschnitt (78) parallel zu der Drehachse (A) verläuft. 30

Revendications

1. Vanne rotative (10), comprenant :
un élément formant stator (36) avec une face de stator plane, l'élément formant stator (36) présentant une pluralité de canaux de stator (46, 48) pour conduire un fluide ; 35

un élément formant rotor (24) avec une face de rotor plane (52) faisant face et en contact avec la face de stator, l'élément formant rotor (24) présentant un canal de rotor (50) ;
dans laquelle l'élément formant rotor (24) est rotatif par rapport à l'élément formant stator (36) autour d'un axe de rotation (A), de sorte que, dans une position conductrice, le canal de rotor (50) relie deux des canaux de stator (46, 48) et les deux canaux de stator (46, 48) sont en communication fluide ;
dans laquelle au moins l'un des canaux de stator (48) a une section de canal transversale (74) s'ouvrant dans la face de stator (54) et s'étendant transversalement par rapport à la face de stator (54) ;
dans laquelle le canal de rotor (50) a un fond (64) qui, à une extrémité d'intersection (62) du canal de rotor (50), est incliné par rapport à la face de rotor (52), de sorte que le canal de rotor (50) prolonge une surface intérieure du canal de stator (48) lorsque l'élément formant rotor (24) est dans la position conductrice ;
dans laquelle le canal de rotor (50) est une rainure dans la face de rotor (52) et le canal de rotor est toujours ouvert vers la face de rotor sur toute son extension ;
caractérisée en ce que le fond (64) du canal de rotor (50) à l'extrémité d'interconnexion (62) est incliné par rapport à la face du rotor (52) et à l'axe de rotation (A) du même angle que le canal de stator (48), de sorte qu'une forme cylindrique de la section de canal transversale (74) du canal de stator (48) est allongée en affleurement avec le canal de rotor (50). 40

2. Vanne rotative (10) selon la revendication 1, dans laquelle le canal de rotor (50) a une section transversale en forme de U. 45
3. Vanne rotative (10) selon l'une des revendications précédentes, dans laquelle le fond (64) du canal de rotor (50), à une deuxième extrémité d'interconnexion (58) qui s'ouvre dans un autre canal de stator (46), est aligné orthogonalement à l'axe de rotation (A). 50
4. Vanne rotative (10) selon l'une des revendications précédentes,
dans laquelle le canal de rotor (50) s'étend radialement par rapport à l'axe de rotation (A) ; ou dans laquelle le canal de rotor (50) s'étend tangentiellement par rapport à un cercle autour de l'axe de rotation (A). 55
5. Vanne rotative (10) selon l'une des revendications précédentes, 60

dans laquelle une ligne centrale de la section de canal transversale (74) coupe l'axe de rotation (A).

6. Vanne rotative (10) selon l'une des revendications précédentes, 5
 dans laquelle l'élément formant stator (36) comprend un canal de stator parallèle (46) qui s'étend parallèlement à l'axe de rotation (A) de l'élément formant rotor (24). 10
7. Vanne rotative (10) selon la revendication 6,
 dans laquelle le canal de stator parallèle (46) a une première section (68) qui s'ouvre dans le canal de rotor (50) et une deuxième section (70) qui s'ouvre vers un orifice de connexion (44) de la vanne rotative (10) ; 15
 dans laquelle la deuxième section (70) a un diamètre plus petit que la première section (68). 20
8. Vanne rotative (10) selon l'une des revendications précédentes,
 dans laquelle l'élément formant stator (36) comprend une rainure circulaire (82) entourant la face de stator (54) ; dans laquelle la rainure circulaire (82) présente une surface inclinée (84) qui est inclinée par rapport à l'axe de rotation (A) . 25
9. Vanne rotative selon la revendication 8,
 dans laquelle la surface inclinée (84) est inclinée par rapport à l'axe de rotation (A) du même angle que la section de canal transversale (74). 30
10. Vanne rotative (10) selon les revendications 8 ou 9,
 dans laquelle un palier (26) entourant l'élément formant rotor (24) fait saillie dans la rainure circulaire (82). 35
11. Vanne rotative (10) selon l'une des revendications précédentes, 40
 dans laquelle le canal de stator (48) avec la section de canal transversale (74) a une section de canal parallèle (78) qui s'ouvre vers un orifice de connexion (44) de la vanne rotative (10) ; 45
 dans laquelle la section de canal parallèle (78) s'étend parallèlement à l'axe de rotation (A). 50

50

55

Fig. 1

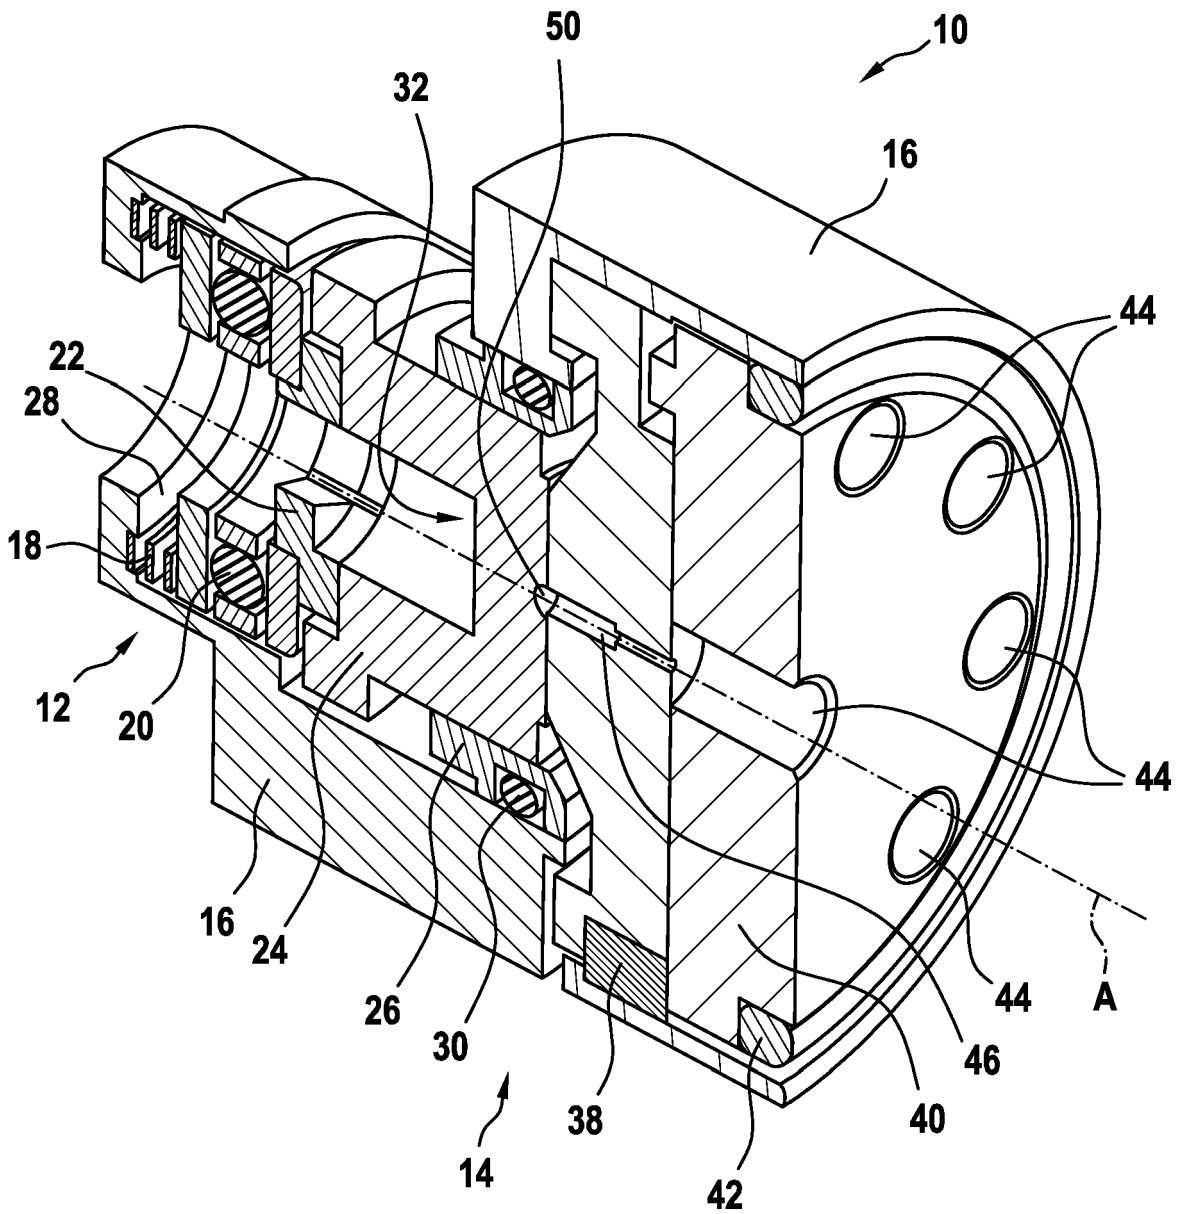


Fig. 2

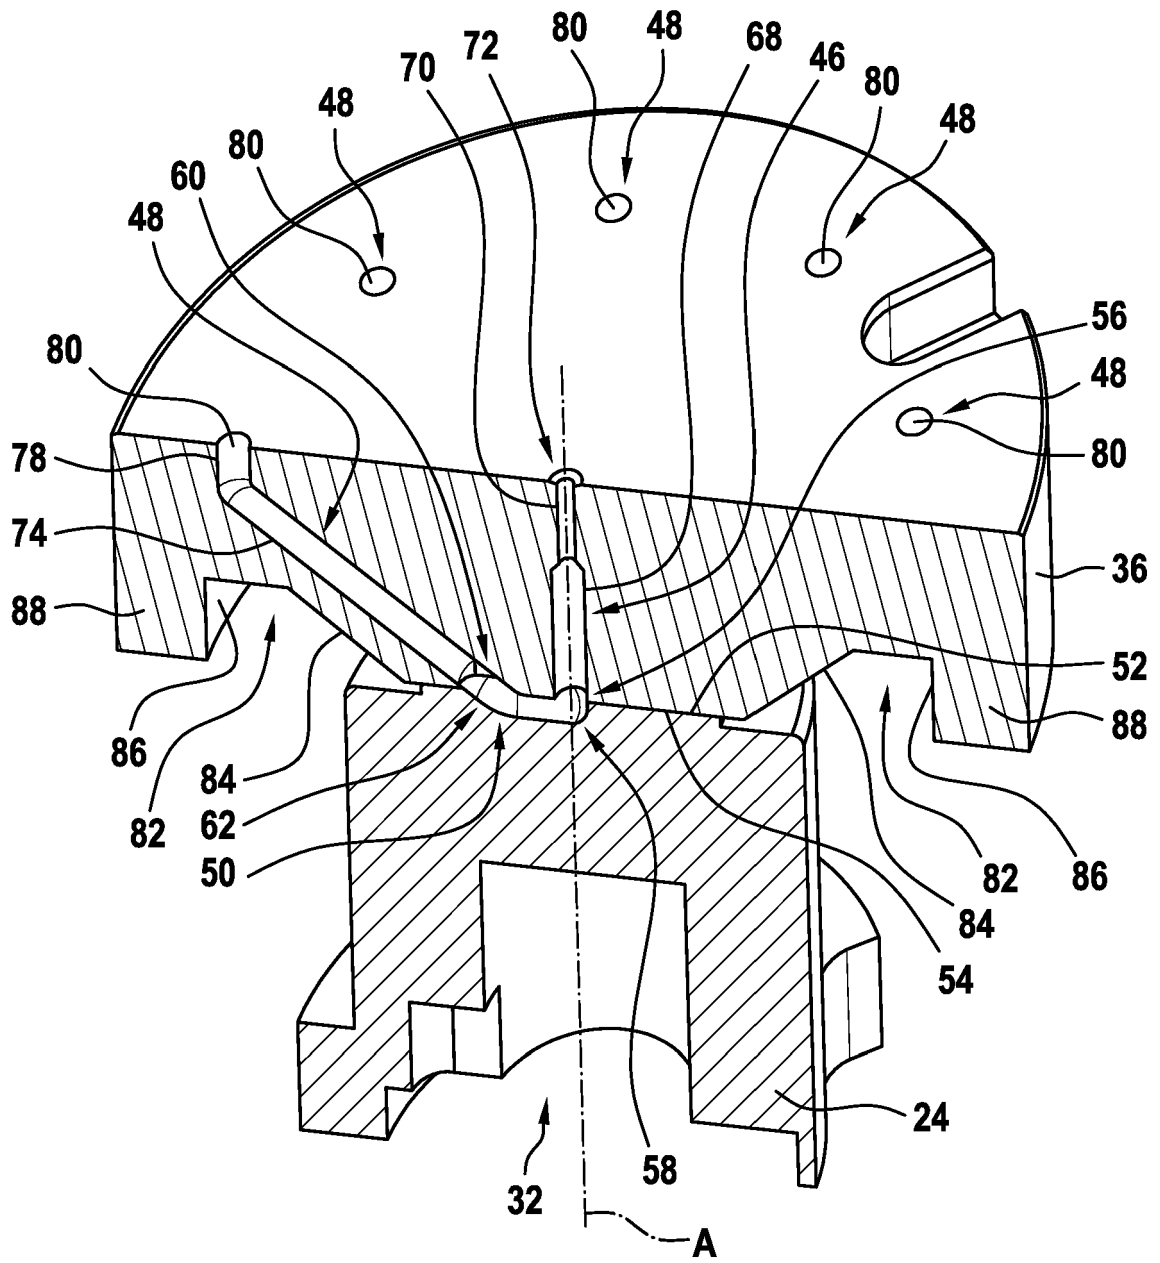


Fig. 3

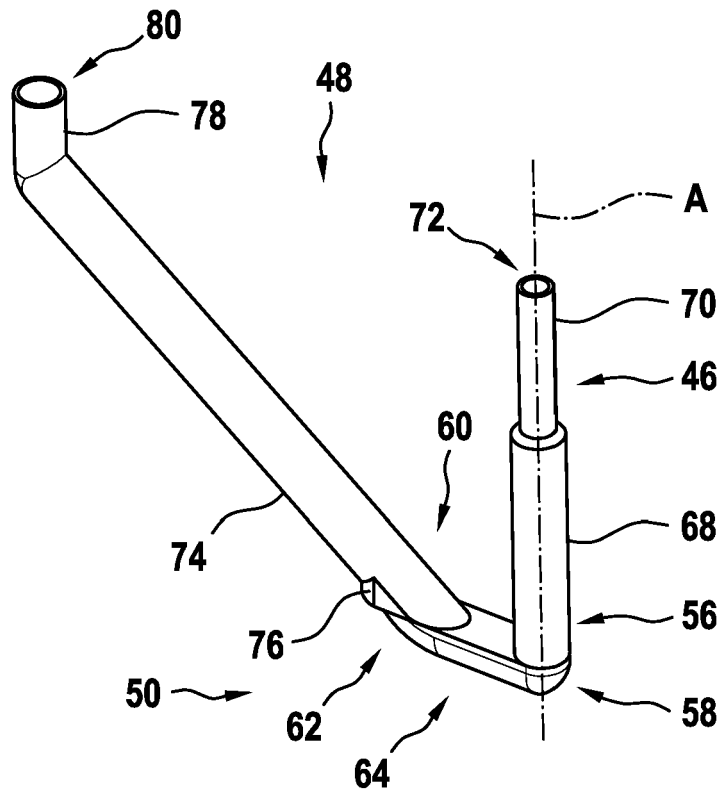


Fig. 4

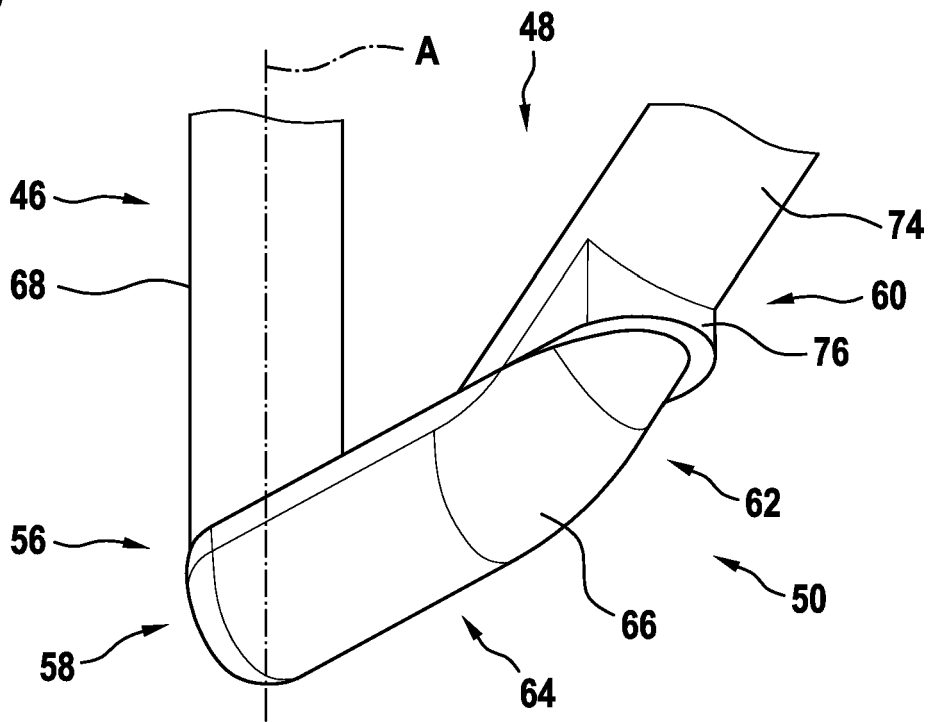


Fig. 5

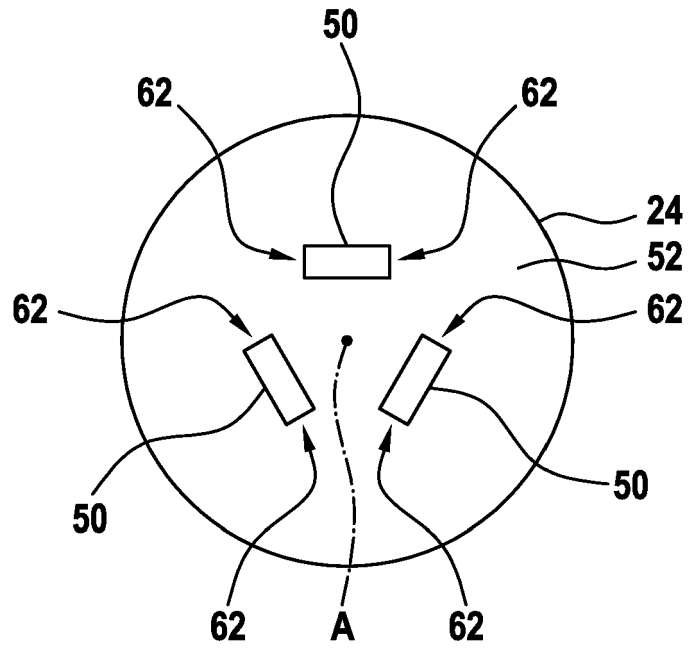


Fig. 6


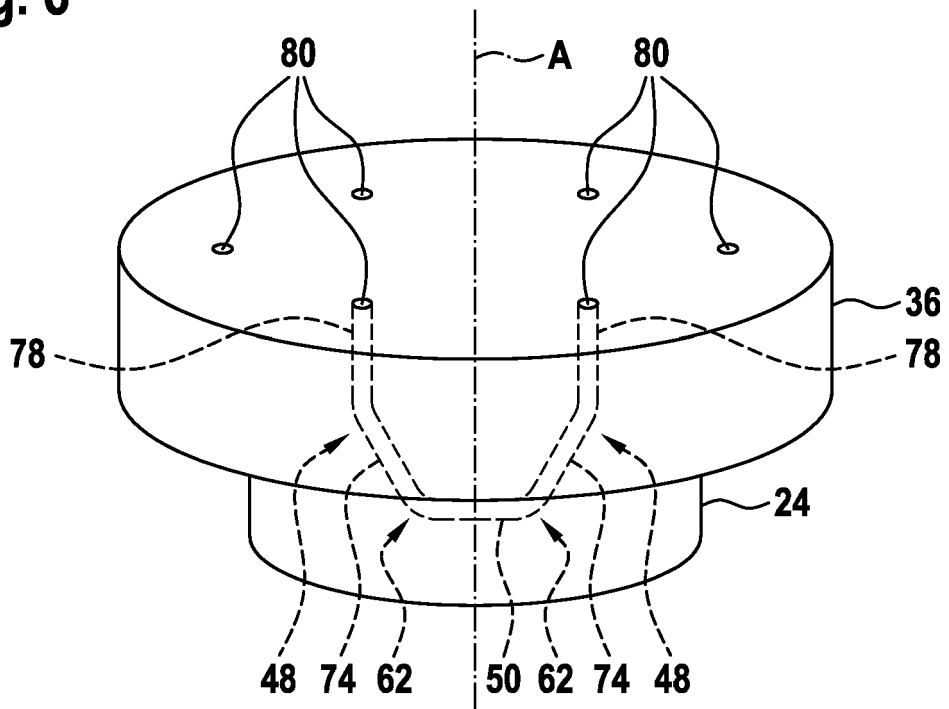


Fig. 7

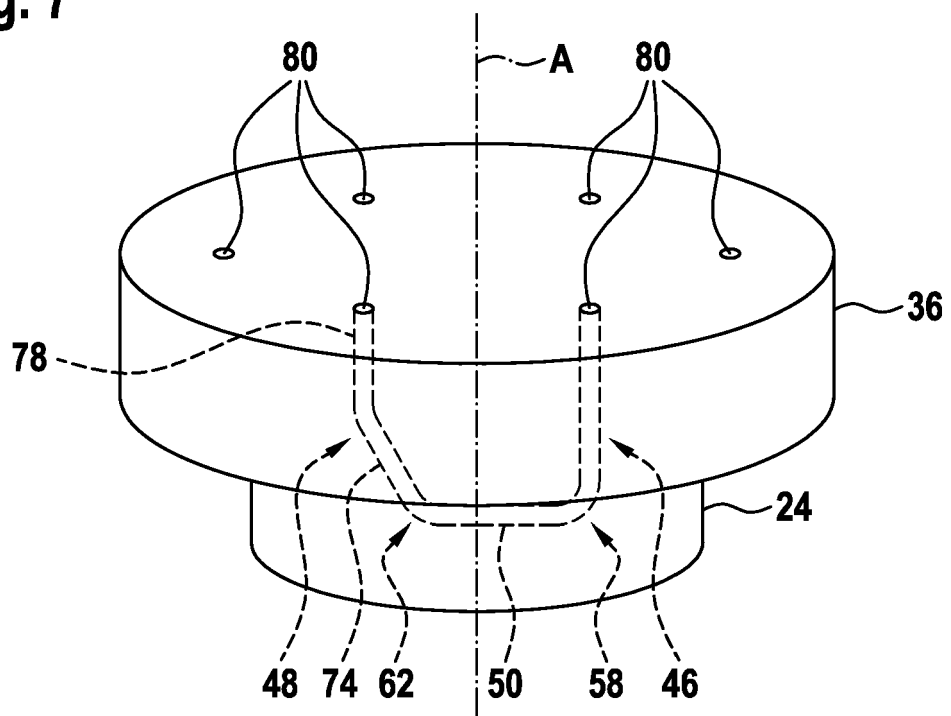

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 7308908 B2 [0005]
- US 20160033049 A1 [0006]
- US 5419208 A [0007]