



(22) **Date de dépôt/Filing Date:** 2014/04/25

(41) **Mise à la disp. pub./Open to Public Insp.:** 2014/11/15

(30) **Priorités/Priorities:** 2013/05/15 (US61/823,566);  
2014/04/17 (US14/255,379)

(51) **Cl.Int./Int.Cl. D21D 1/00** (2006.01)


(71) **Demandeur/Applicant:**  
ANDRITZ INC., US

(72) **Inventeurs/Inventors:**  
IHALINEN, ISMO, GB;  
RAYMOND, YVES, US;  
REHNSTROM, MIKAEL, FI

(74) **Agent:** BERESKIN & PARR LLP/S.E.N.C.R.L.,S.R.L.

(54) **Titre : PLAQUES A MASSE REDUITE POUR RAFFINEURS ET DISPENSEURS**

(54) **Title: REDUCED MASS PLATES FOR REFINERS AND DISPERSERS**

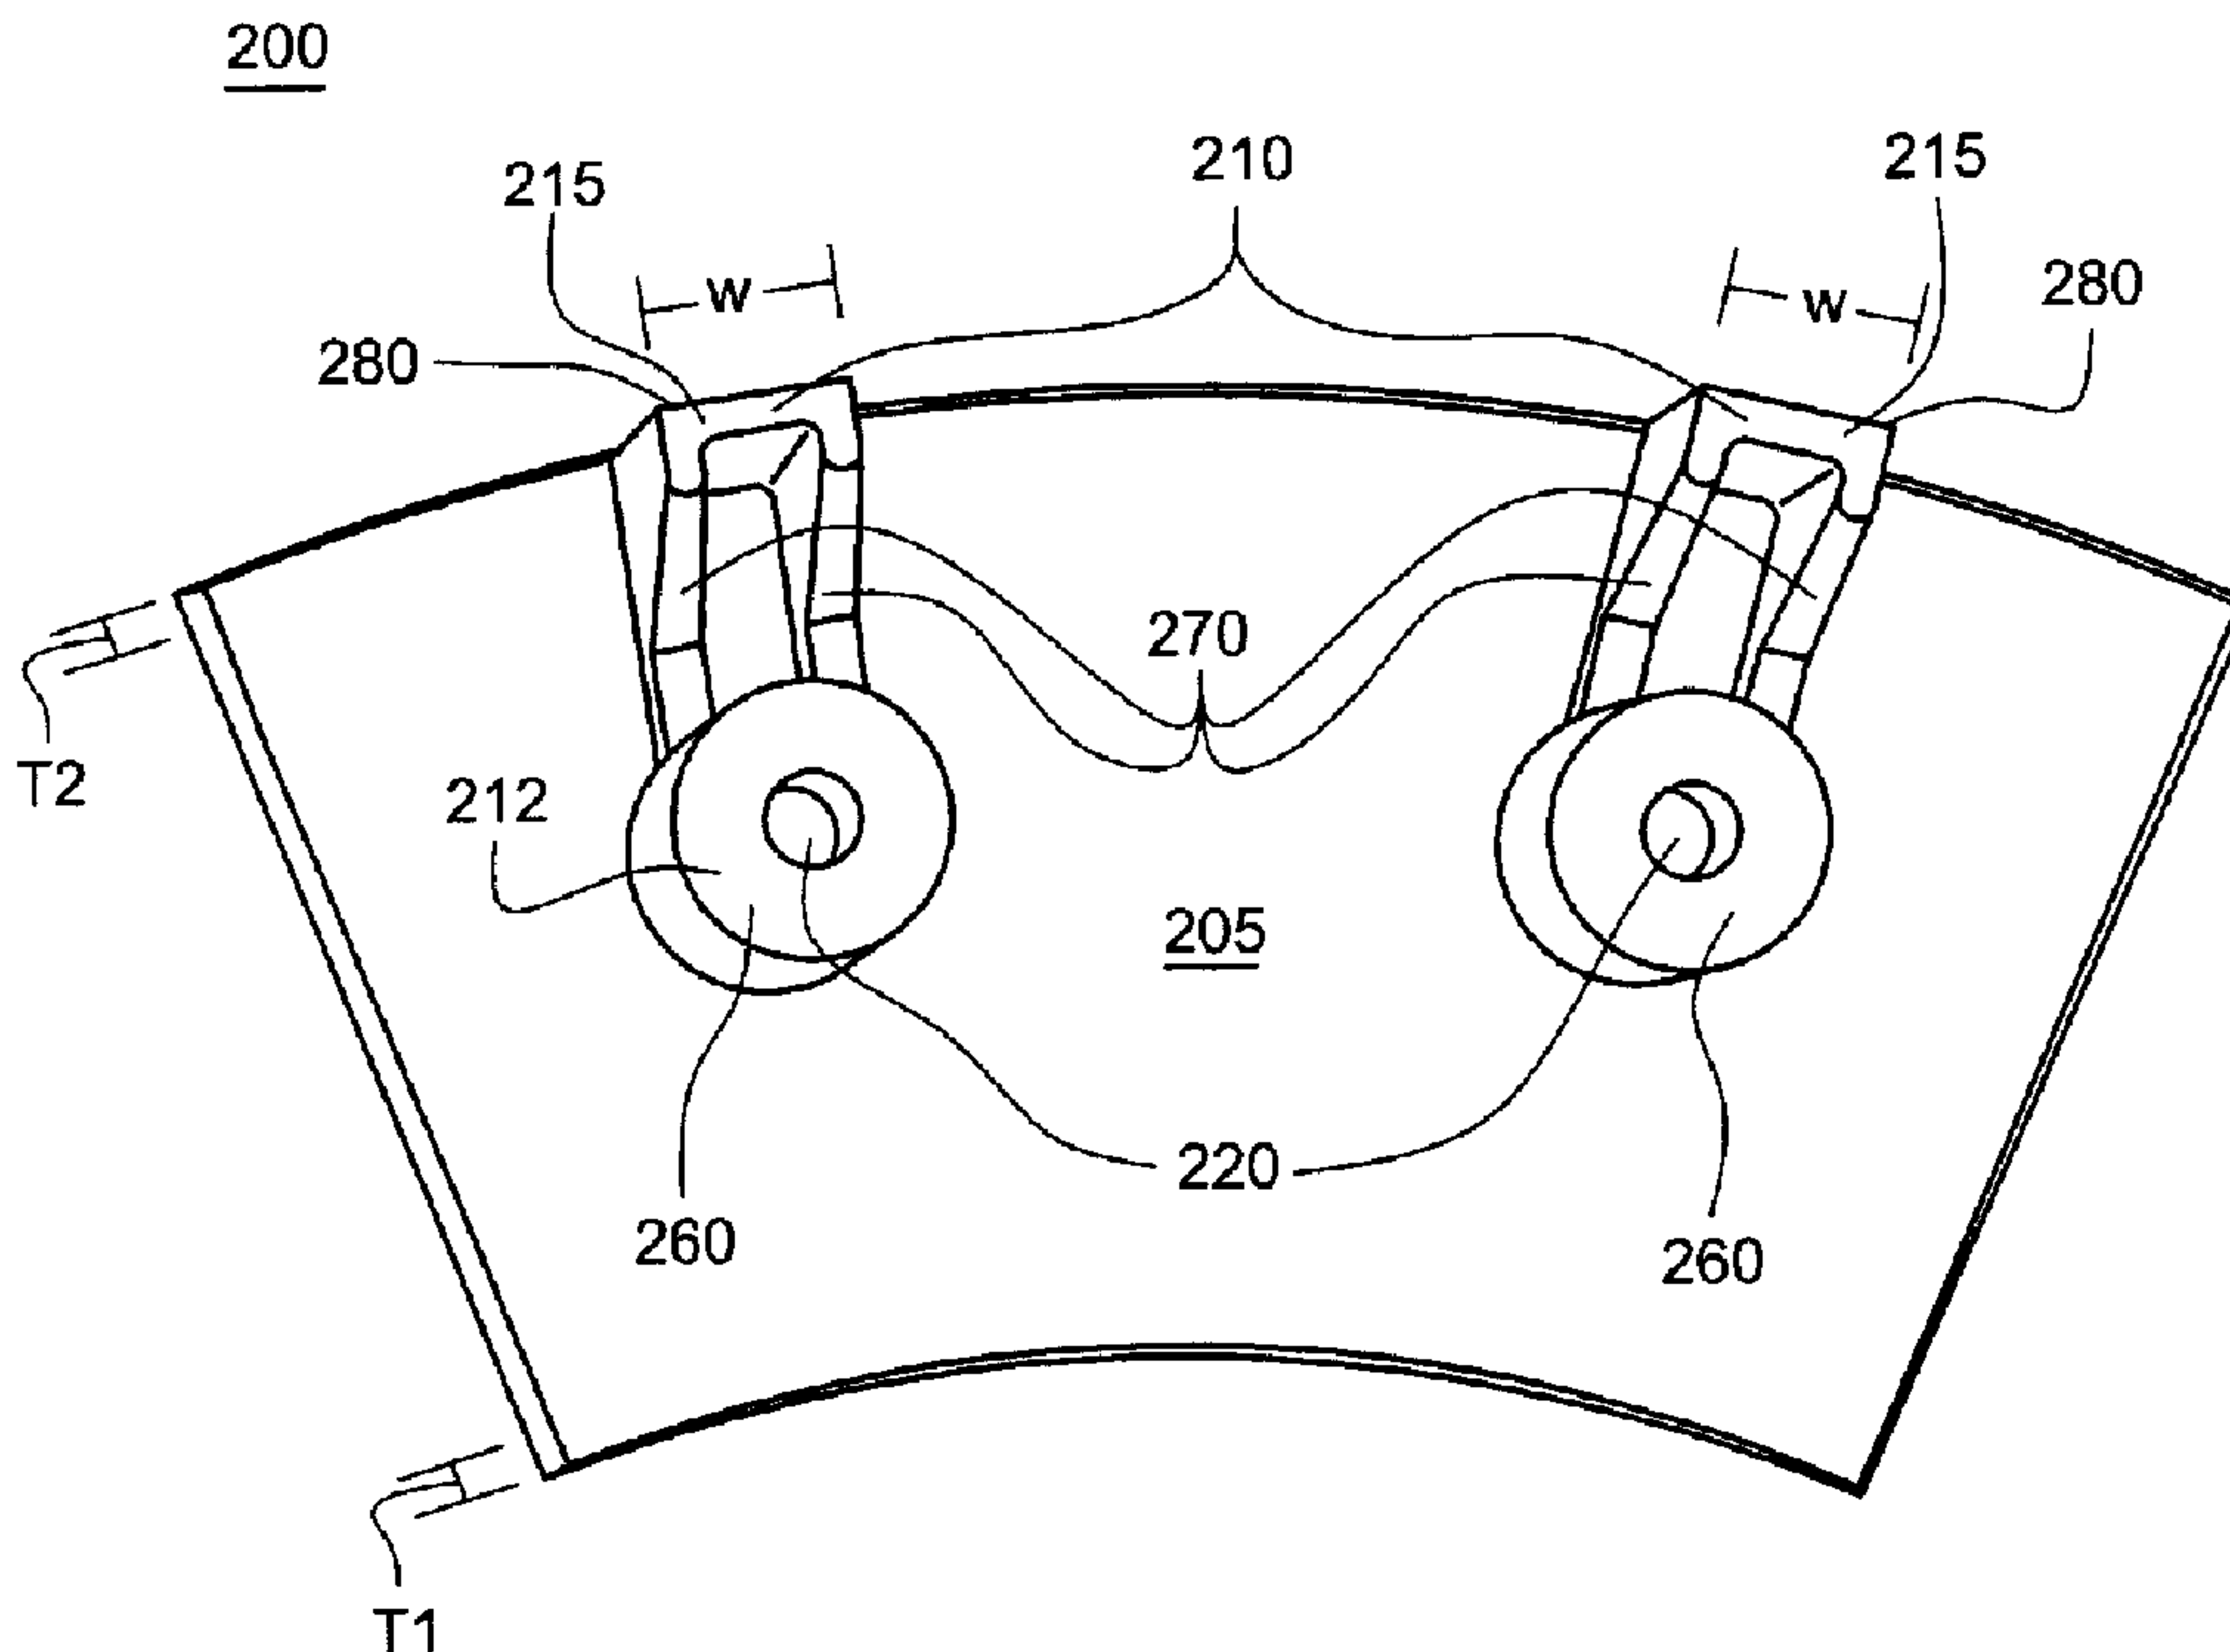

(57) **Abrégé/Abstract:**

A light weight plate segment configured to be mounted on a disc of a disperser or refiner for comminuted cellulosic material including: a front face having disperser teeth or refining bars; a back face having a raised post surrounding a fastener attachment structure and a raised plate positioning section; side edges of the plate segment; and a radially outer edge and a radially inner edge extending between the side edges; wherein the back face lacks raised structures along the side edges.

## ABSTRACT

A light weight plate segment configured to be mounted on a disc of a disperser or refiner for comminuted cellulosic material including: a front face having disperser teeth or refining bars; a back face having a raised post surrounding a fastener attachment structure and a raised plate positioning section; side edges of the plate segment; and a radially outer edge and a radially inner edge extending between the side edges; wherein the back face lacks raised structures along the side edges.

## REDUCED MASS PLATES FOR REFINERS AND DISPERSERS

### RELATED APPLICATION

[0001] This application claims priority and incorporates by reference U. S. provisional application serial number 61/823,566 filed May 15, 2013.

### TECHNICAL FIELD

[0002] The disclosure relates to plates and plate segments for refiners and dispersers (also known as dispergers) used in mechanical pulping and paper recycling processes to produce pulp material and recycled pulp material for various end uses.

### BACKGROUND OF THE INVENTION

[0003] In the production of pulp material to be used in the making of paper or other paper based packaging material. One conventional method is to employ a mechanical refiner. Mechanical refiners include, but are not limited to, refiners to process comminuted cellulosic material such as wood chips, etc. to produce pulp, and dispersers typically used in the processing of recycled paper material. Mechanical refiners typically include a set of opposing discs, such as a pair of flat discs at least one of which rotates, a pair of conically shaped discs, and an assembly of parallel flat and conical discs. As feed material moves through a gap between the opposing discs, fibers in the

material are separated to produce refined pulp; ink, and other contaminants may be dispersed from paper to produce a recycle pulp material.

[0004] Mechanical refiners that produce pulp from wood chips and other comminuted cellulosic material, typically referred to as refiners, have plates with bars and grooves on the front face of their plates. The plates are mounted on opposing discs. The gap between plates with bars and grooves is typically planer and formed between the upper ridges of the bars on opposing plates. Mechanical refiners used to process recycled paper and paperboard material are typically referred to as dispergers or dispersers, and have plates with teeth on the front face of the plates. The gap between opposing plates in a disperser may have a serpentine shape formed by the intermeshing rows of teeth on the opposing front faces of the plates.

[0005] The refining or dispersing action occurs as feed material, e.g., wood chips or recycled paper, enters the gap between the discs through an opening in one of the plates. The feed material is driven by centrifugal force to move radially outwardly through the gap and between the front faces of the plates. The refining or dispersing surfaces on the front faces act on the feed material as the material moves through the gap and is subjected to pulsating forces due to the crossing of the bars or teeth on the plates.

[0006] Plates may be formed by an annular assembly of plate segments mounted on the discs. The plates are generally an annular array of plate segments, such as pie shaped segments. The segments are mounted side-

by-side to form a circular plate mounted onto the disc mounting surface. The plates have a front face with bars and grooves forming refining surfaces in a pulp refiner or rows of teeth forming dispersing surfaces in a disperser. The gap in the refiner or disperser is formed between the front faces of the plates on the opposing discs. The back faces of the plates are mounted to a disc mounting surface. Bolts and other fasteners hold the plates to the disc mounting surface.

[0007] Plate segments, for a convention mechanical refiner (capable of handling high, medium or low consistency feed material) or a disperser (capable of handling recycled material feed material), are a critical component of the refining or dispersing equipment. As the feed material moves across the surface of the plate segments, the surface of the fronts of the plate segments wear down. The refining and dispersion action performed by the plate segments become less effective as the plates wear down. The worn plate segments must be replaced. Generally, plate segments are periodically replaced on refiners and dispersers.

[0008] A typical annular array of plate segments for a refiner or disperser includes three (3) to twenty four (24) equally-sized plate segments. At every plate change, all segments of an annular array of plate segments are removed and inspected, mounting surface (surface of the discs) cleaned, and the new segments installed. The plate segments that can be reused are cleaned and new segments are substituted for worn segments, typically all

plate segments are replaced but there are times when some plate segments may be cleaned and reused. The cleaned and new segments are mounted one-by-one onto the disc mounting surface. The mounting of each segment requires a shimming process to maintain equal spacing between the segments. The mounting also involves applying a proper torque to the fastener securing the segments to the disc mounting surface.

[0009] Refiners and dispersers usually have two annular plates arranged opposite to each other in the refiner. In the twin refiners or twin dispersers, there may be four plates arranged in two opposing pairs of plates. The refiner or disperser may have one rotor (which may be a double-sided rotor in a twin refiner or disperser) facing a stationary stator. Alternatively, the refiner or disperser may have opposite counter-rotating rotors. Regardless of the specific disc configuration, the plate segments mounted to the discs are periodically replaced. Plate segment replacement is needed because the refining or dispersing surface on the segments wears down by the abrasiveness of the feed material rubbing against these surfaces. A worn refining or dispersing surface reduces the efficiency of the refiner or disperser.

[0010] Plate segments generally must be rigid and structurally strong. The plate segments must support the front faces that comprise many bars and grooves for refiners and teeth for dispersers, which are subjected to continuous refining or dispersing action of the abrasive feed material as they encounter the feed material, centrifugal forces in the refiner or disperser, and

stresses from the fasteners, e.g., bolts, that affix the segments to the disc mounting surface. A minimum plate thickness is conventionally in a range of 1.0 to 1.5 inches (25 to 38 millimeters (mm)). Additionally, the back face of the plate segments conventionally have a network of raised ribs, posts surrounding the bolt holes and other raised structures to provide structural support to the segments and to provide abutments that seat against the disc mounting surface.

[0011] The thickness requirement and network of raised structures on the plate segments contribute substantially to the mass of the segments. The segments are formed by casting molding metal. The cast plate segments tend to have a large mass (i.e., heavy in weight), which makes the cast plate segments difficult to handle when replacement is necessary. The large mass of the plate segments increases the cost of casting due to the cost for a large amount of metal, cost of shipping and cost to handle and mount the segments to the disc. It is desirable to produce a plate segment using a less amount of metal while meeting the mounting and structural requirements needed for a structurally strong and rigid segment.

#### **BRIEF DESCRIPTION OF THE INVENTION**

[0012] A plate segment useful for mechanical refiner plate segments and disperser plate segments has been conceived having a reduced mass (i.e., lighter in weight). The reduction of mass is achieved by minimizing the network of raised ribs and other raised structures on the back face (non-

grinder and refining surface) of a conventional plate segment. The novel light weight plate segment has sufficient strength to support the grinding and refining surfaces on the front of the segment without unduly increasing the risk that the segment will break.

[0013] The novel plate segment may lack conventional ribs along the edges of the segment, outer diameter (OD) ribs (also referred to as support material), and many (but not all) of the conventional reinforcement ribs or support material. Minimizing the network of raised ribs and other structures reduces the weight of the plate segment by 20 to 40 percent, as compared to conventional plate segments. Using the invention disclosed herein, the network of ribs and other raised structures on the back face of a plate segment may be achieved without adversely affecting the structural integrity and rigidity of the plate segments.

[0014] A novel plate segment has been conceived that is configured to be mounted on a disc of a disperser or refiner for comminuted cellulosic material, the segment comprises: a front face including disperser teeth or refining bars; a back face including a raised post surrounding a fastener attachment structure and a raised plate positioning section, and side edges; extending between the side edges are both a radially outer edge and a radially inner edge; wherein the back face lacks raised structures along the side edges.



## BRIEF DESCRIPTION OF THE DRAWINGS

[0015] FIG. 1 is a perspective view of a back face of a conventional plate segment suitable for a refiner or disperser, wherein the back face includes a network of raised ribs and other raised structures.

[0016] FIG. 2 is a perspective view of a back face of a novel plate segment suitable for a refiner or disperser, wherein the back face lacks the raised ribs shown in FIG. 1, and has raised bolt hole posts and plate positioning ribs aligned with the posts.

[0017] FIG. 3 is a perspective view of another novel plate segment including a ring-section along an inner edge of the segment.

[0018] FIG. 4 is a cross-sectional side view of the novel plate segment with a ring-section separated from an inner edge section defined by line A-A.

[0019] FIG. 5 is a cross-sectional side view of a first embodiment of the ring-section and the inner edge section.

[0020] FIG. 6 is a cross-sectional side view of a second embodiment of the ring-section and the inner edge section, wherein a groove space on the inner edge faces a groove space on the ring-section.

[0021] FIG. 7 is a cross-sectional side view of a third embodiment of the ring-section and the inner edge section, wherein the ring-section and the inner edge section have abutting slanted surfaces.

[0022] FIG. 8 is a cross-sectional side view of a fourth embodiment of the ring-section and the inner edge section, wherein the ring-section and the inner edge section have abutting slanted surfaces.

[0023] FIG. 9 is a cross-sectional side view of another embodiment of the novel plate segment with an inner edge section defined by line circle B.

[0024] FIG. 10 is a cross-sectional side view of the inner edge section shown in Figure 9 abutting a disc mounting surface.

[0025] FIG. 11 is a perspective view of another embodiment of the novel plate segment including a ring section along the inner edge of the segment.

[0026] FIG. 12 is a side view of opposing plate segments each mounted to a disc mounting surface.

[0027] FIG. 13 is a flow chart of a method of forming a plate segment.

#### DETAILED DESCRIPTION OF THE INVENTION

[0028] It is desirable to provide a refiner or disperser plate segment with mass (i.e., weight) removed from the back face of the plate (i.e., the side adjacent

the surface of the disc) while maintaining the strength required to provide refining or dispersing actions without structural damage to the plate segments.

[0029] FIG. 1 shows the back face for a conventional plate segment **100**. A network of ribs **110** and other raised areas are formed on the back face. The network includes raised posts **118** surrounding bolt holes **120**, the edge ribs **140** along the radially outer edge of the plate segment, interior ribs and raised structures **135**, and a ring segment **130** of a ring at the radially inward edge of the segment. The network of ribs **110** is intended to provide structural support and rigidity to the conventional plate segment, to reduce the risk that segment will break, and to provide support surfaces that abut against the mounting surface of a disc.

[0030] The intended functions served by the network of ribs **110** support the conventional wisdom that such a network is needed on a plate segment. The inventors of the light weight plate segments disclosed herein broke from conventional wisdom. The inventors realized that the conventional network of ribs and other raised areas could be replaced by a reduced arrangement of support posts for each bolt hole and a supporting strip associated with each post.

[0031] The back face of a novel plate segment that has reduced mass includes raised posts and raised plate positioning sections. Each raised post surrounds one of the bolt holes and has a mounting surface seated against a disc mounting surface. The raised plate positioning sections are also

mounting surfaces that seat against the disc mounting surface. The posts and plate positioning sections provide sufficient mounting surfaces to support the plate segment on the disc mounting surface. They also provide structural support to the plate segment.

[0032] The posts and the plate positioning sections fix the position of the plate segment with respect to the disc mounting surface. The posts and plate positioning sections may have the only surfaces on the plate segment that abut the disc mounting surface. An inner ring segment (arc-edge) on the plate segment may also abut the disc mounting surface and fix the plate segment to the disc. The post, plate positioning sections and inner ring segment support the plate segments. Other raised structures on the back face are not needed to support the plate segments.

[0033] A light weight refiner or disperser plate segment has been invented comprising radially inner and outer edges; a front face with refining or dispersing features, a back face including a post providing a bolt hole and a raised plate positioning section, wherein the post and plate positioning section include surfaces configured to abut against a disc mounting surface.

[0034] One embodiment of this light weight plate segment removes material from the backside of the segment, such as all side and outer diameter (OD) support material, ribs, or support material being strips or mass of solid metal material, and removes most, but not all, reinforcement ribs or support material other than those supporting the plate positioning sections. The embodiment

allows reduction in overall weight of the plate segment. The light weight plate segment is less costly to manufacture, easier and less costly to transport, easier to handle (less manpower required to move and install the plates), quicker to install, and safer to handle in both manufacturing and customer premises. This light weight segment allows customers to further optimize their operating and maintenance processes by providing flexibility in the replacement frequency of the plate segments as the plate segments are quicker, safer and easier to change, thereby reducing the costs associated with their replacement.

[0035] In an embodiment of the invention the borders or edges of the plate segment are removed with the exception of the border or edge facing the feed flow (such as the inner periphery or diameter). That is, three of the four plate segment borders or edges are removed. The removal of these plate segment borders or edges (three of the four borders or edges) results in even further reduction of the weight of the plate segment.

[0036] A border at the inner periphery or diameter of the plate segments, remains such that a ring (referred to as an inner ring or face ring) is formed at the inner diameter of the plates segments. The inner periphery border is important to support the seal. This inner ring may be formed in one piece and assist in positioning the plate segment on the disc. The inner ring may be a single, solid ring section at the radially inward edge of the plate segment. The inner ring allows for improved congruent placement of the plate segments to

the disc mounting surface, thereby forming a smooth, continuous series of plate segments into a complete plate.

[0037] A seal may be in a grooved space, e.g., about 0.5 to 2.5 mm, between the inner ring and the disc. The seal may be formed by a suitable material, such as a soft flexible seal material or a hard metal to metal seal material.

[0038] The light weight plate segments tend to be easier and safer to handle, less costly to manufacture, and apply lower forces to the disc. Replacement of the conventional plate segments with the light weight plate segments may be accomplished quickly. Due to their lighter weight, there is less risk of physical injury to the mill personnel and to personnel involved in the manufacturing of the light weight plate segments. Light weight plate segments can be moved and mounted to the discs quickly as compared to conventional heavier plate segments.

[0039] Because the light weight plate segments may be quickly and easily replaced, the period between plate replacements may be shortened without substantially increasing the overall downtime of the refiner or disperser. As the plate segments may be more frequently replaced without decreasing the operating time for a machine, the surface condition of the plate segments over a machine operating period is better (i.e., less worn) than the conventional solid back heavy plate segments. Thus, using the new light weight plate segments in refiners or dispersers allows for a better refining (e.g., fiber

rubbing) or dispersing (e.g., contaminant breakage and further removal) action to be maintained which results in an improved final product.

[0040] FIG. 2 shows the back face of a light weight plate segment **200** for a plate segment according to one embodiment of the invention (reference numbers are similarly labeled for similar parts as in FIG. 1). It has been found a significant amount of the mass (i.e., weight), can be removed from a conventional plate segment without losing structural integrity while providing a light weight plate segment **200**.

[0041] The back face of the light weight plate segment **200** is a substantially flat surface **205**, which has a thickness **T1**, **T2** similar to the thickness of the narrowest thickness of a conventional plate segment. The flat surface **205** may be truly planar or may have a slight curvature along a radial direction. The thickness **T1**, **T2** of the light weight plate segment **200** may be substantially constant over the flat surface **205**, or the thickness **T1**, **T2** may gradually narrow in a radially outward direction. For example, **T1** may be wider than **T2** by a factor of 1.2 to 2.5. The thickness **T1**, **T2** may be measured from the flat surface **205** of the back face to the front face and particularly to the bottom of the grooves between the bars on the front face or to the mounting surface at the bottom of the teeth on the front face. The thickness **T1**, **T2** may be in a range of 1.0 to 1.5 inches (25 to 38 millimeters (mm)).

[0042] The back face of the light weight plate segment **200** lacks the extensive conventional network of ribs **110** and other raised surfaces, such as shown in FIG. 1. In particular, the segment **200** lacks raised edge ribs **140**. The interior ribs **270** are limited to ribs extending from the posts **260** surrounding the bolt holes **220**. The surfaces on the back face that abut the mounting surface of the disc mounting surface (see FIG. 5) may be limited to the upper surfaces of the posts **260** and the upper and side surfaces of plate positioning sections that are radially outward of the posts **260**. Other surfaces of the back face, such as the substantially flat surface **205**, may not touch the surface of the disc that opposes the back surface. An inner ring-section may be included along a radially inward edge of the segment (see FIGS. 3 to 12). The inner ring-section may also abut the surface of the disc mounting surface **205**.

[0043] The plate positioning sections **210** and the posts **260** surrounding each of the bolt holes **220** may be the primary raised sections on the back face of the light weight plate segment **200**. The plate positioning sections **210** and posts **260** may also include the contact surfaces **212**, **215** that abut the disc mounting surface and support the plate segment when mounted to the disc mounting surface. If the disc mounting surface has a flat contact surface, then the contact surfaces **212** on the posts **260** and the contact surfaces **215** on the plate positioning sections **210** may be substantially flat and in a common plane. Alternatively, if the disc mounting surface is conical, the contact surfaces **212**, **215** may conform to a conical surface. The contact surfaces **212**, **215** cooperate with bolt fasteners to align the light weight plate segments



**200** with respect to the disc mounting surface, and the bolt fasteners and contact surfaces **212**, **215** carry the forces applied to the light weight plate segments **200**.

[0044] The plate positioning sections **210** may also have an outer sidewall with a contact surface **280** that abuts a rim or post **260** on the disc mounting surface. The sidewall contact surfaces **280** align the radial position of the plate segment on the disc mounting surface and carry radial forces applied to the plate segment **200**. The sidewall contact surfaces **280** replace the “butt pads” on conventional plate segments.

[0045] The plate positioning sections **210** may be at the radially outer edge of the plate segment **200** or on the back face between the outer edge and the post **260**. Each plate positioning section **210** may be radially aligned with a post **260** such that a radial line from an axis of the disc to which the plate segment **200** is mounted passes through both the post **260** and the plate positioning section **210**. Ribs, such as parallel ribs **270** extend from the post **260** to the plate positioning sections **210**. The ribs **270** may have a height less than the height of the post **260** or plate positioning sections **210**. The ribs **270** may also be a pair of ribs **270** extending from the post **260** to the plate positioning section **210**. The ribs **270** provide structural support for the plate positioning sections **210** and posts **260**. The ribs **270** may extend along radial lines from an axis of the disc or be parallel pairs of ribs **270**.

[0046] In some embodiments, the ribs **270** may have the same height as the outer periphery plate positioning sections **210** (solid material sections) and may end at the post **260** where the height at the plate positioning section **210** end is in a range of between the post **260** height and half the height of post **260**.

[0047] The width **W** of the contact surface **215** on the plate positioning sections **210** may be substantially, e.g., within 20 percent, of the diameter of the post **260**. For example, the width **W** of the contact surface **215** and diameter of the post **260** may be in a range of 3 mm to 30 mm. The height of the plate positioning section **210** and post **260** may also be substantially, e.g., within 20 percent, the same or in a range of 2 mm to 50 mm.

[0048] FIG. 3 shows the back face of a second embodiment of the light weight plate segment **300** (reference numbers are similar for similar parts as FIG. 2). An inner ring **330** abuts a radially inward edge of the light weight plate segment **300**. The inner ring **330** may be an annular ring fixed to the disc mounting surface to form an abutting surface to the inner edges of the light weight plate segments **300**. In another embodiment, the inner ring **330** may be separate from the disc mounting surface. The inner ring **330** forms a dam or seal between the disc mounting surface and light weight plate segment **300** to prevent loose feed material and debris from entering a region between the back face of the light weight plate segment **300** and disc mounting surface.

[0049] The inner ring **330** may be a separate component from the light weight plate segment **300** to avoid adding mass to the plate segment. The inner ring **330** may be a one piece annular ring that fits around the center cap (not shown) of the refiner or disperser. The inner ring **330** may have a width **WE** of approximately 1 inch (25 mm) and a height substantially the same as the thickness of the light weight plate segment **300** at the inner most edge **385** of the light weight plate segment **300**. A seal **390** may be placed between the inner most edge **385** of the light weight plate segment **300** and the outermost edge **350** of the inner ring **330**. The seal **390** is made of suitable material (material capable of withstanding the operating environment of temperature, chemicals, etc. in a refiner or disperser)

[0050] During manufacturing, e.g., casting, of the light weight plate segments **300**, tighter tolerances on the sides of the light weight plate segments **300** may be to reduce the opening between adjacent light weight plate segments **300** when mounted to the stator or the rotor disc, thereby removing the need for a raised border (such as edge rib **140** shown in FIGURE 1) along the side edges. The light weight plate segments **300** may either be cast or machined to achieve tighter tolerances. When using the inner ring **330** along with the tighter manufacturing tolerances, little or no material will flow behind the light weight plate segment **300** by way of the opening in between the light weight plate segments **300** when placed side-by-side to form a complete plate.

[0051] The inner ring **330** prevents feed material entering the region between the plate segments and mounting surface of the disc. Feed material going between the plate segment and the mounting surface of the disc cause plate segment balance problems. If the light weight plate segments **300** become off balance, the refiner or disperser machine may begin to vibrate and would need to be shut down for cleaning and replacement of the light weight plate segments **300** (the same being true for conventional plate segments **100** as shown in FIG. 1).

[0052] The inner ring **330** may be the thickness of the thickest part of the light weight plate segment **300**, and may be removed from the surface of the disc or may remain in position on the disc allowing for easy removal of the light weight plate segment **300**. The inner ring **330** may also be part of the center cap of the refiner or disperser. The inner ring **330** as a functional feature may also be integrated into the center cap, so that it is not a separate part.

[0053] This inner ring **330** need not come in direct contact with the light weight plate segments **300**. Its primary purpose is to prevent the fiber material from getting to the back side of the light weight plate segments **300**. The light weight plate segments **300** can be either cast or machined to achieve tight enough tolerances in between them, so that the fiber does not go behind the light weight plate segments **300**. Outer diameter edge of the light weight plate segments **300** is left open with the idea that centrifugal force will keep the area free of unwanted material. The material of the inner ring **330** is a material

suitable for use in the abrasive environment experienced by plate segments of the refiner and disperser machines.

[0054] FIG. 4 is a cross-sectional view of the side of the light weight plate segment **400** and the inner ring **430**. The front face has teeth **402** as would be on a disperser plate. The teeth **402** are also representative of the bars on a refining plate. The reduced mass of the light weight plate segment **400** is evident from the minimal raised structures on the back face **404**. The structures include the post **260** surrounding the bolt hole **220** and the plate positioning section **210**. The ribs **270** may be tapered to reduce their mass while providing structural support for the plate positioning section **210**. The back face **404** may only abut a mounting surface of a disc via contact surfaces **215** and **210**. Other surfaces on the back face **404** may not touch the mounting surface of the disc.

[0055] The contact surface **215** on the positioning section **210** and contact surface **212** on the post **260** are in substantially the same contact plane **406**. The radially inner most edge **485** of the light weight plate segment **400** may also have a contact edge in the contact plane **406**. Similarly, the inner ring **430** has a contact surface in the contact plane **406**. The contact plane **406** conforms to the mounting surface of the disc. If the mounting surface is not planar, e.g., conical, then the contact surfaces **215** and **212**, as well as the inner most edge **485** and inner ring **430** are aligned with the mounting surface and not aligned in a plane.

[0056] The light weight plate segment **400** has an inner most edge **485** facing and opposite to the outermost edge **450** of the inner ring **430**. The opposing edges may have surfaces designed for one or more of simplicity, supporting a seal between the opposing edges and aligning the plate segment on the disc mounting surface.

[0057] FIG. 5 shows in cross-section an alternative for the radial inner edge region (A-A) of the light weight plate segment **400** (shown in FIG. 4) and the inner ring **430**. The opposing edge surfaces **481**, **451** of the light weight plate segment **400** and inner ring **430** are straight (linear) in a direction of the axis of the refiner or disperser and arc-shaped in a direction perpendicular to the axis. The opposing edge surfaces **481**, **451** have a simple shape. The space **495** between the opposing edge surfaces **481**, **451** may be sufficiently narrow such that feed material cannot pass through the space **495** or sufficiently wide to allow a seal to fit in the space **495**. For example, the space **495** may be in a range of 0.5 to 2.5 mm, which is sufficiently narrow to prevent feed material entering the region between the back face of the light weight plate segment **400** and the disc mounting surface. The space **495** may be entirely breached by metal to metal contact between the light weight plate segment **400** and inner ring **430** at numerous points in the space **495**.

[0058] FIG. 6 shows in cross-section an alternative light weight plate segment **400A** (for the radial inner region (A-A) shown in FIG. 4) and the inner ring **430**. In plate segment **400A** a grooved space **496** is formed on the opposing

edge surfaces **482, 452**, of the light weight plate segment **400A** and inner ring **430**. The grooved space **496** is between raised corners on each edge surfaces **482, 452**. The grooved space **496** formed between the opposing edge surfaces **482, 452** receives a flexible seal **494** (such as a flexible o-ring or gasket or other suitable insert). The seal **494** fills the grooved space **496** and prevents feed material entering the region between the back face of the light weight plate segment **400** and the disc mounting surface.

[0059] FIG. 7 shows in cross section an additional alternative light weight plate segment **400B** (for the radial inner region (A-A) of the plate in FIG. 4) and the inner ring **430**. The inner edge surface **483** of the light weight plate segment **400B** is slanted, e.g., oblique, with respect to the axis of a refiner disc. The slanted inner edge surface **483** faces a slanted edge surface **453** on the inner ring **430**. The slanted space **497** between the parallel inner edge surface **483** and the slanted edge surface **453** is also slanted. The slanted space **497** may have a space of between 0.5 to 2.5 mm, or sufficiently narrow, when used with the straight lower surface **454** of the outermost edge of the inner ring **430** to prevent material entering from the refining/dispersing surface of the refiner plate segments and becoming lodged in the region between the backside of the light weight plate segment **400B** and the disc mounting surface.

[0060] The inner ring **430** may also include a lower surface **454** that is not slanted, e.g., parallel to the axis of the disc. The corner between the lower

surface **454** and the slanted edge surface **453** provides an abutment to the slanted inner edge surface **483** of the light weight plate segment **400B**. The abutment assists in preventing debris and feed material from passing through the slanted space **497**.

[0061] In FIG. 7, the inner ring **430** has a height **H1** greater than the thickness **T3** of the light weight plate segment **400B**. The lower surface **454** of the inner ring **430** extends through a region **493** between the back face of the plate segment and the disc mounting surface **492**.

[0062] FIG. 8 shows in cross section yet another possible alternative light weight plate segment **400C** (for the radial inner edge region (A-A) in FIG.4) and the inner ring **430**, wherein an inner lip **498** on the inner ring **430** may support the inner edge region of the light weight plate segment **400C**. The light weight plate segment **400C** includes a slanted inner ring edge surface **483** and faces a slanted edge surface **453** of the inner ring **430**. The height **H2** of the inner ring **430** is greater than the thickness **T4** of the light weight plate segment **400C**.

[0063] The inner lip **498** extends radially outward under an inner portion of the light weight plate segment **400C**. The inner lip **498** and the corner between the inner lip **498** and slanted space **497** prevent feed material and debris from entering the region **493** between the light weight plate segment **400C** and disc mounting surface **492**. A seal (not shown) may be positioned in the region **493** and between the inner lip **498** and the light weight plate segment **400C**.



[0064] FIG. 9 is a cross-sectional view of a light weight plate segment **500** and FIG. 10 is an enlarged cross-sectional view of section B shown in FIG. 9. The inner most edge **585** of the light weight plate segment **500** is configured to be adjacent the disc mounting surface **586** of the annular disc **587**. The contact surfaces **212** on the post **260** and contact surface **215** on the plate positioning section **210** abut the disc mounting surface **586**. A back face ring section **588** faces the mounting surface **586**. A grooved sector **510** in the back face ring section **588** receives a seal **520**, e.g., a deformable annular seal, which may be fixed to the disc mounting surface **586** or be separate from both the light weight plate segment **500** and the disc mounting surface **586**. The seal **520** may have a cross sectional shape that is circular, oval, rectangular, triangular, octagonal, or combinations there of, or any suitable shape that may be suitable to be received by grooved sector **510**.

[0065] The grooved sector **510** may be located near and radially outward of the inner most edge **585** of the light weight plate segment **500**. The seal **520** between the back face ring section **588** and disc mounting surface **586** prevents feed material and debris entering the region between the light weight plate segment **500** and disc mounting surface **586**.

[0066] FIG. 11 shows another light weight plate segment **400** having a back face **404** which is largely devoid of raised structures. The post **460** for the bolt holes **420**, the plate positioning sections **410** and ribs **470** are similar to raised structures shown in FIGS. 2, 3 and 9. The raised structures may also include

a finger **411** and bar **412** which provide for grasping by devices for moving the light weight plate segment **400** while not attached to a disc mounting surface (especially during the manufacturing process). Even with the finger **411**, bar **412**, post **460** and plate positioning sections **410**, the back face **404** remains largely unencumbered by raised surfaces and the mass associated with extensive raised surfaces. In some embodiments, finger **411** and bar **412** may not be present.

[0067] The inner most edge **414** is similar to the inner most edge **585** shown in FIG. 10. The inner most edge **414** has a back face **404** configured to oppose the disc mounting surface. A grooved sector **416** is similar to the grooved sector **510** in FIG. 10, and is configured to seat over a seal (not shown) on a mounting surface.

[0068] FIG. 12 is a side view of a pair of light weight plate segments **710**, **712** each mounted on a mounting surface of a disc **714**, **716**. The light weight plate segments **710**, **712** are arranged side-by-side to form an annular array on the mounting surface of the disc **714**, **716**. The plate segments **710**, **712** are mounted onto the mounting surface of the disc **714**, and not mounted onto adjacent plate segments in the annular array. The disc **714**, **716** may be a rotor and a stator disc of a disperser (as shown in Figure 12) and the light weight plate segments **710**, **712** may have teeth for dispersing ink and other contaminants from recycled paper and other materials. The plate segments

may alternatively have bars and grooves and be mounted to discs for a refiner (not shown).

[0069] A fastener, such as a bolt **718**, extends from the disc **714, 716** into the bolt holes of the posts **720** on the back face of the light weight plate segments **710, 712**. The bolts **718** fasten the light weight plate segment **710, 712** to the disc **714, 716**. The contact surface **722** on the post **720** and the contact surface **724** on the plate positioning sections **726** abut the disc mounting surface **728** of the disc **714, 716**. The bolt fastener and the abutments between the contact surfaces **722** and the mounting surface **728** fix the light weight plate segment **710, 712** to the disc **714, 716**.

[0070] A ledge **730** on disc mounting surface **728** may abut a sidewall contact surface **732** on each of the plate positioning sections **726**. The ledge **730** resists radial movement of the light weight plate segment **710, 712** and aligns the light weight plate segment **710, 712** on the disc **714, 716**. An annular seal **734** on the disc mounting surface seats in a space **736** on an inner edge region of the light weight plate segment **710, 712**. The seal **734** prevents feed material (represented by arrow **738**) from getting in the region behind the light weight plate segment **710, 712** and between the light weight plate segment **710, 712** and disc **714, 716**. The feed material **738** moves radially outward and between the opposing front faces of the light weight plate segment **710, 712**.

[0071] FIG. 13 is a flow chart showing an exemplary casting process to manufacture the plate segment. Steps shown in the flow chart that are connected by solid lines refer to preferred steps of the process. Steps connected by dotted lines indicate optional steps of the process.

[0072] The plate segments may be formed by casting metal. Conventional manufacturing processes include pouring melted metal into a mold having the desired design for the specific plate segment of interest. Once the molded plate segment has cooled, the plate segment is removed from the mold and sent for cleaning and gate removal followed by grinding and rough inspection including bolt hole preparation, a second grinding step, robotic grinding of the plate segment prior to heat treatment and precision grinding.

[0073] For the light weight plate segments disclosed herein, a modified conventional manufacturing process is possible. The modified manufacturing process provides a lighter weight plate segment, thereby significantly reducing manufacturing steps and cost of manufacturing without adversely impacting the strength of the new, lighter weight plate segment.

[0074] Manufacturing of the light weight plate segment design begins with casting of the plate segment by taking molten metal **901**, and pouring molten metal into a mold **910**. The mold to be used has the new back face surface design that is largely devoid of raised surfaces, such as the conventional network of ribs and particularly the ribs around the edges and sides of the segment. The mold may include features for forming the raised surfaces, such

as the post, positioning section and mass support ribs. Once the mold has been filed with molten metal, the molded plate segment is allowed to cool **912** to a temperature that is sufficient for safe handling.

[0075] The cooled light weight plate segment is removed from the mold. The molded plate is cleaned and molding gates are removed **914** by grinding. Rough inspection and bolt hole preparation are also performed on the molded light weight plate segment. At this point the light weight plate segment may be ready for shipment **918** to the customer **950**, or optionally, the light weight plate segment may undergo the manufacturing steps of robotic rough grinding **920** and possibly precision grinding **922**, and heat treatment **924** before shipment **918**. If the optional manufacturing process step of heat treatment is excluded, the metal material used to form the light weight plate segment may have sufficient strength to produce a light weight plate segment such that a heat treatment step is unnecessary.

[0076] Due to the lower manufacturing costs of the light weight plate segment, a mill plan with refiners or dispersers may be able to afford more frequent replacement of sets of plate segments. Replacement of the light weight plates can be accomplished more easily, in less time and safer as compared to heavier plates. More frequent replacement of plates allows for more efficient refining or dispersing because the plates are replaced before their bars or teeth become dull or broken.

[0077] When an inner ring is present, the light weight plate segments may be removed from the stator and rotor discs without removing the inner ring itself. The inner ring may be incorporated to the center cap of the disc. When the inner ring becomes damaged or requires replacement it is removed at the same time as the light weight plates.

[0078] Using the combined light weight plate segment and the inner ring in the inner diameter of the light weight plate segment will result in multiple advantages over the conventional plate segments used in refining and dispersing machines. These advantages include: less material needed to manufacture the plate segments; ease of removing and installing the plate segments thereby reducing time required to remove and install plate segments; reduced transportation costs for both the new plate segments being delivered to the mill and the cost to return used plate segments (used plate segments are typically returned to the manufacturer so the metal can be reclaimed); because of the lighter weight of the plate segments, handling of the light weight plate segments is safer for the mill personnel as well as others involved in the transport of the plate segments.

[0079] In another alternative embodiment, the backside of the light weight plate segment may have a groove space on the backside of the plate segment to hold a seal. The groove space for the seal is set back, radially inward from the edge of the inner periphery of the backside of the light weight plate segment. The seal material is a flexible material capable of withstanding

the operating (temperature, chemical, etc.) environment of the machine without decomposing while holding the light weight plate segment to the mounting surface of the disc.

[0080] While preferred embodiments have been shown and described, various modifications and substitutions may be made thereto without departing from the spirit and scope of the invention. Accordingly, it is to be understood that the present invention has been described by way of illustration and not limitation.

We claim:

1. A plate segment configured to be mounted on a disc of a disperser or refiner of comminuted cellulosic material, the segment comprises:

a front face of a plate segment including disperser teeth or refining bars;

a back face of a plate segment on an opposing major surface to the front face, including a raised post surrounding a fastener attachment structure and a raised plate positioning section;

side edges of the plate segment located along edges of the front face and the back face; and

a radially outer edge and a radially inner edge extending between the side edges;

wherein the back face lacks raised structures along the side edges.

2. The plate segment in claim 1, wherein the back surface contains at least 20% less support material as compared to a conventional plate segment.

3. The plate segment in claim 1, wherein the raised post is aligned along a radial line extending from a rotational axis of the disperser or refiner.



4. The plate segment in claim 1 further comprising a second post and a second plate positioning section aligned along a radial line extending from a rotational axis of the disperser or refiner.

5. The plate segment in claim 1, wherein the radially outer edge is devoid of a raised structure.

6. The plate segment in claim 1, wherein the raised post and raised plate positioning section each have contact surfaces, and the contact surfaces are aligned in a common plane.

7. The plate segment in claim 1 further comprising a rib extending radially outward from the post to the plate positioning section.

8. An assembly of a disc and a plate segment for a refiner or disperser comprising:

a plate segment including a front face having disperser teeth or refining bars, a back face having a raised post surrounding a fastener attachment structure and a raised plate positioning section; side edges located along edges of the front face and back face, and a radially outer edge and a radially inner edge extending between the side edges, wherein the back face lacks raised structures along the side edges; and

a disc having a disc mounting surface configured to mount the plate segment, the disc mounting surface abuts the post and plate positioning section of the plate segment.

9. The assembly of claim 8 further comprising plate segments mounted side by side on the disc mounting surface to form an annular array on the mounting surface of the disc, and the plate segments are not mounted to adjacent plate segments.

10. The assembly of claim 8 further comprising a spaced region between the plate segment back surface and the disc mounting surface in which the back surface do not abut the disc mounting surface except for a surface on the raised post and the raised plate positioning section that abut the disc mounting surface.

11. The assembly of claim 8 further comprising an annular ring on the disc mounting surface, wherein the annular ring is radially inward and adjacent to the radially inner edge of the plate segment.

12. The assembly of claim 8, wherein a surface of the radially inner edge of the plate segment faces a surface of the annular ring, and the surfaces are straight in a direction of an axis of a refiner or disperser.

13. The assembly of claim 12, wherein an annular space between the facing surfaces has a thickness in a range of 0.5 to 2.5 mm.

14. The assembly of claim 12 wherein a surface of the radially inner edge of the plate segment faces a surface of the annular ring, and the surfaces form an annular partial space to receive an annular seal.

15. The assembly of claim 12, wherein the surfaces abut at various points along the inner edge of the plate segment.

16. The assembly of claim 11, wherein a surface of the radially inner edge of the plate segment faces a surface of the annular ring, the surfaces each have a grooved space, and the grooved spaces form a track to receive an annular seal.

17. The assembly of claim 16, wherein the annular seal is a deformable seal.

18. The assembly of claim 8, wherein a surface of the radially inner edge of the plate segment faces a surface of the annular ring, and the surfaces are parallel to each other and oblique to a direction of an axis of a refiner or a disperser.

19. The assembly of claim 18, wherein the surface of the annular ring includes a lip extending underneath the plate segment.

20. The assembly of claim 18, wherein the inner ring has a thickness greater than the thickness of the plate segment at the radially

inward edge, such that the radially inward edge does not abut the disc mounting surface.

21. The assembly of claim 16, wherein the annular seal is in a shape of circular, oval, rectangular, triangular, octagonal, or combinations thereof.

22. A plate segment comprising:

a front face on a plate segment, including disperser teeth or refining bars;

a back face on a major surface of the plate segment opposing the front face, including a raised post surrounding a fastener attachment structure and a raised plate positioning section;

side edges of the plate segment located along edges of the front face and the back face;

a radially outer edge and a radially inner edge extending between the side edges; and

a grooved space on the back face and adjacent to the radially inner edge, the grooved space is configured to receive a seal;

wherein the back face lacks raised structures along the side edges,.

23. The plate segment of claim 22, wherein the radially inner edge of the back face is in a common plane with contact surfaces on the post and plate positioning section.

24. A method to form a plate segment comprising:

casting a plate segment by pouring molten metal into a mold, wherein the mold includes impressions for a back face of the plate segment that lacks raised ribs along sidewalls of the back face;

cooling the plate segment and removing the segment from the mold after pouring the molten metal;

cleaning and removing casting gates from the cooled plate segment;  
and


grinding the cooled plate segment.

25. The method of claim 24, wherein the grinding of the plate segment includes an automated robotic rough grinding step followed by a manual precision grinding step.

26. The method of claim 24, wherein the plate segment is configured for use in a refiner or a disperser.


27. The method of claim 24, wherein the depressions in the mold for the back face are limited to depressions for at least one fastener support post, at least one plate positioning section radially aligned with each fastener support post, and at least one rib extending between each aligned fastener support post and plate positioning section.

1/9

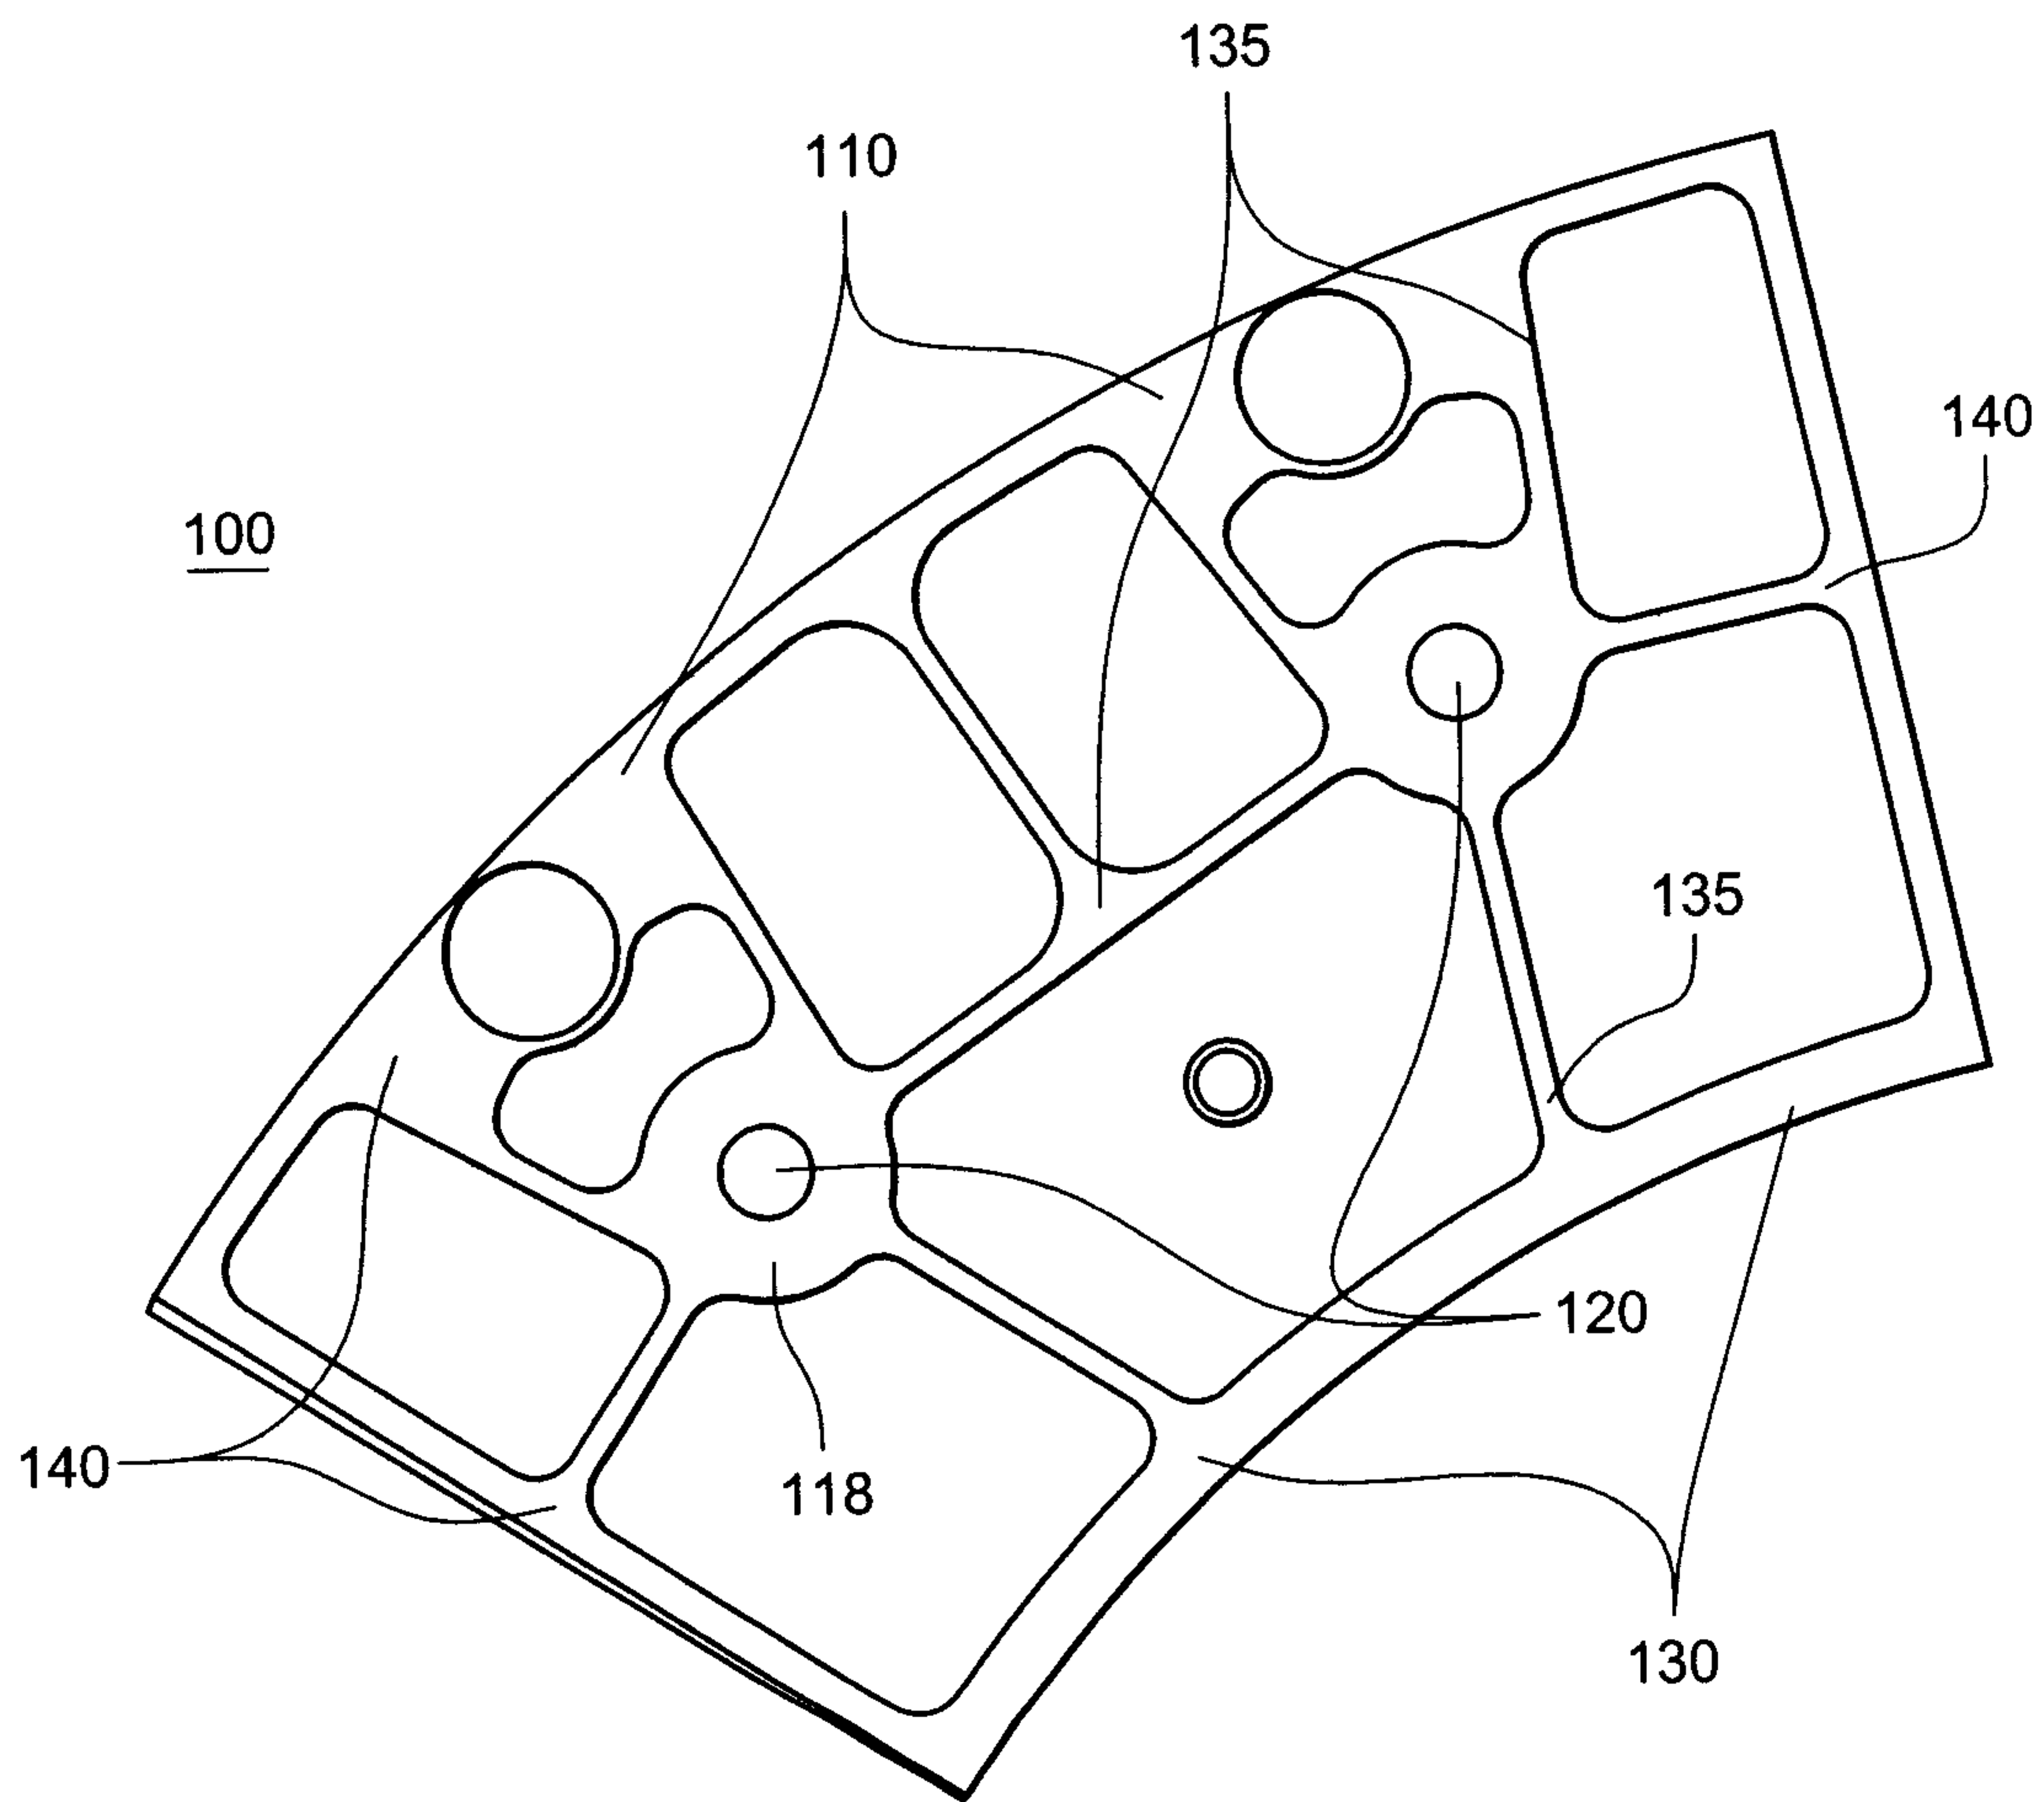

**FIG. 1**  
(Prior Art)


2/9

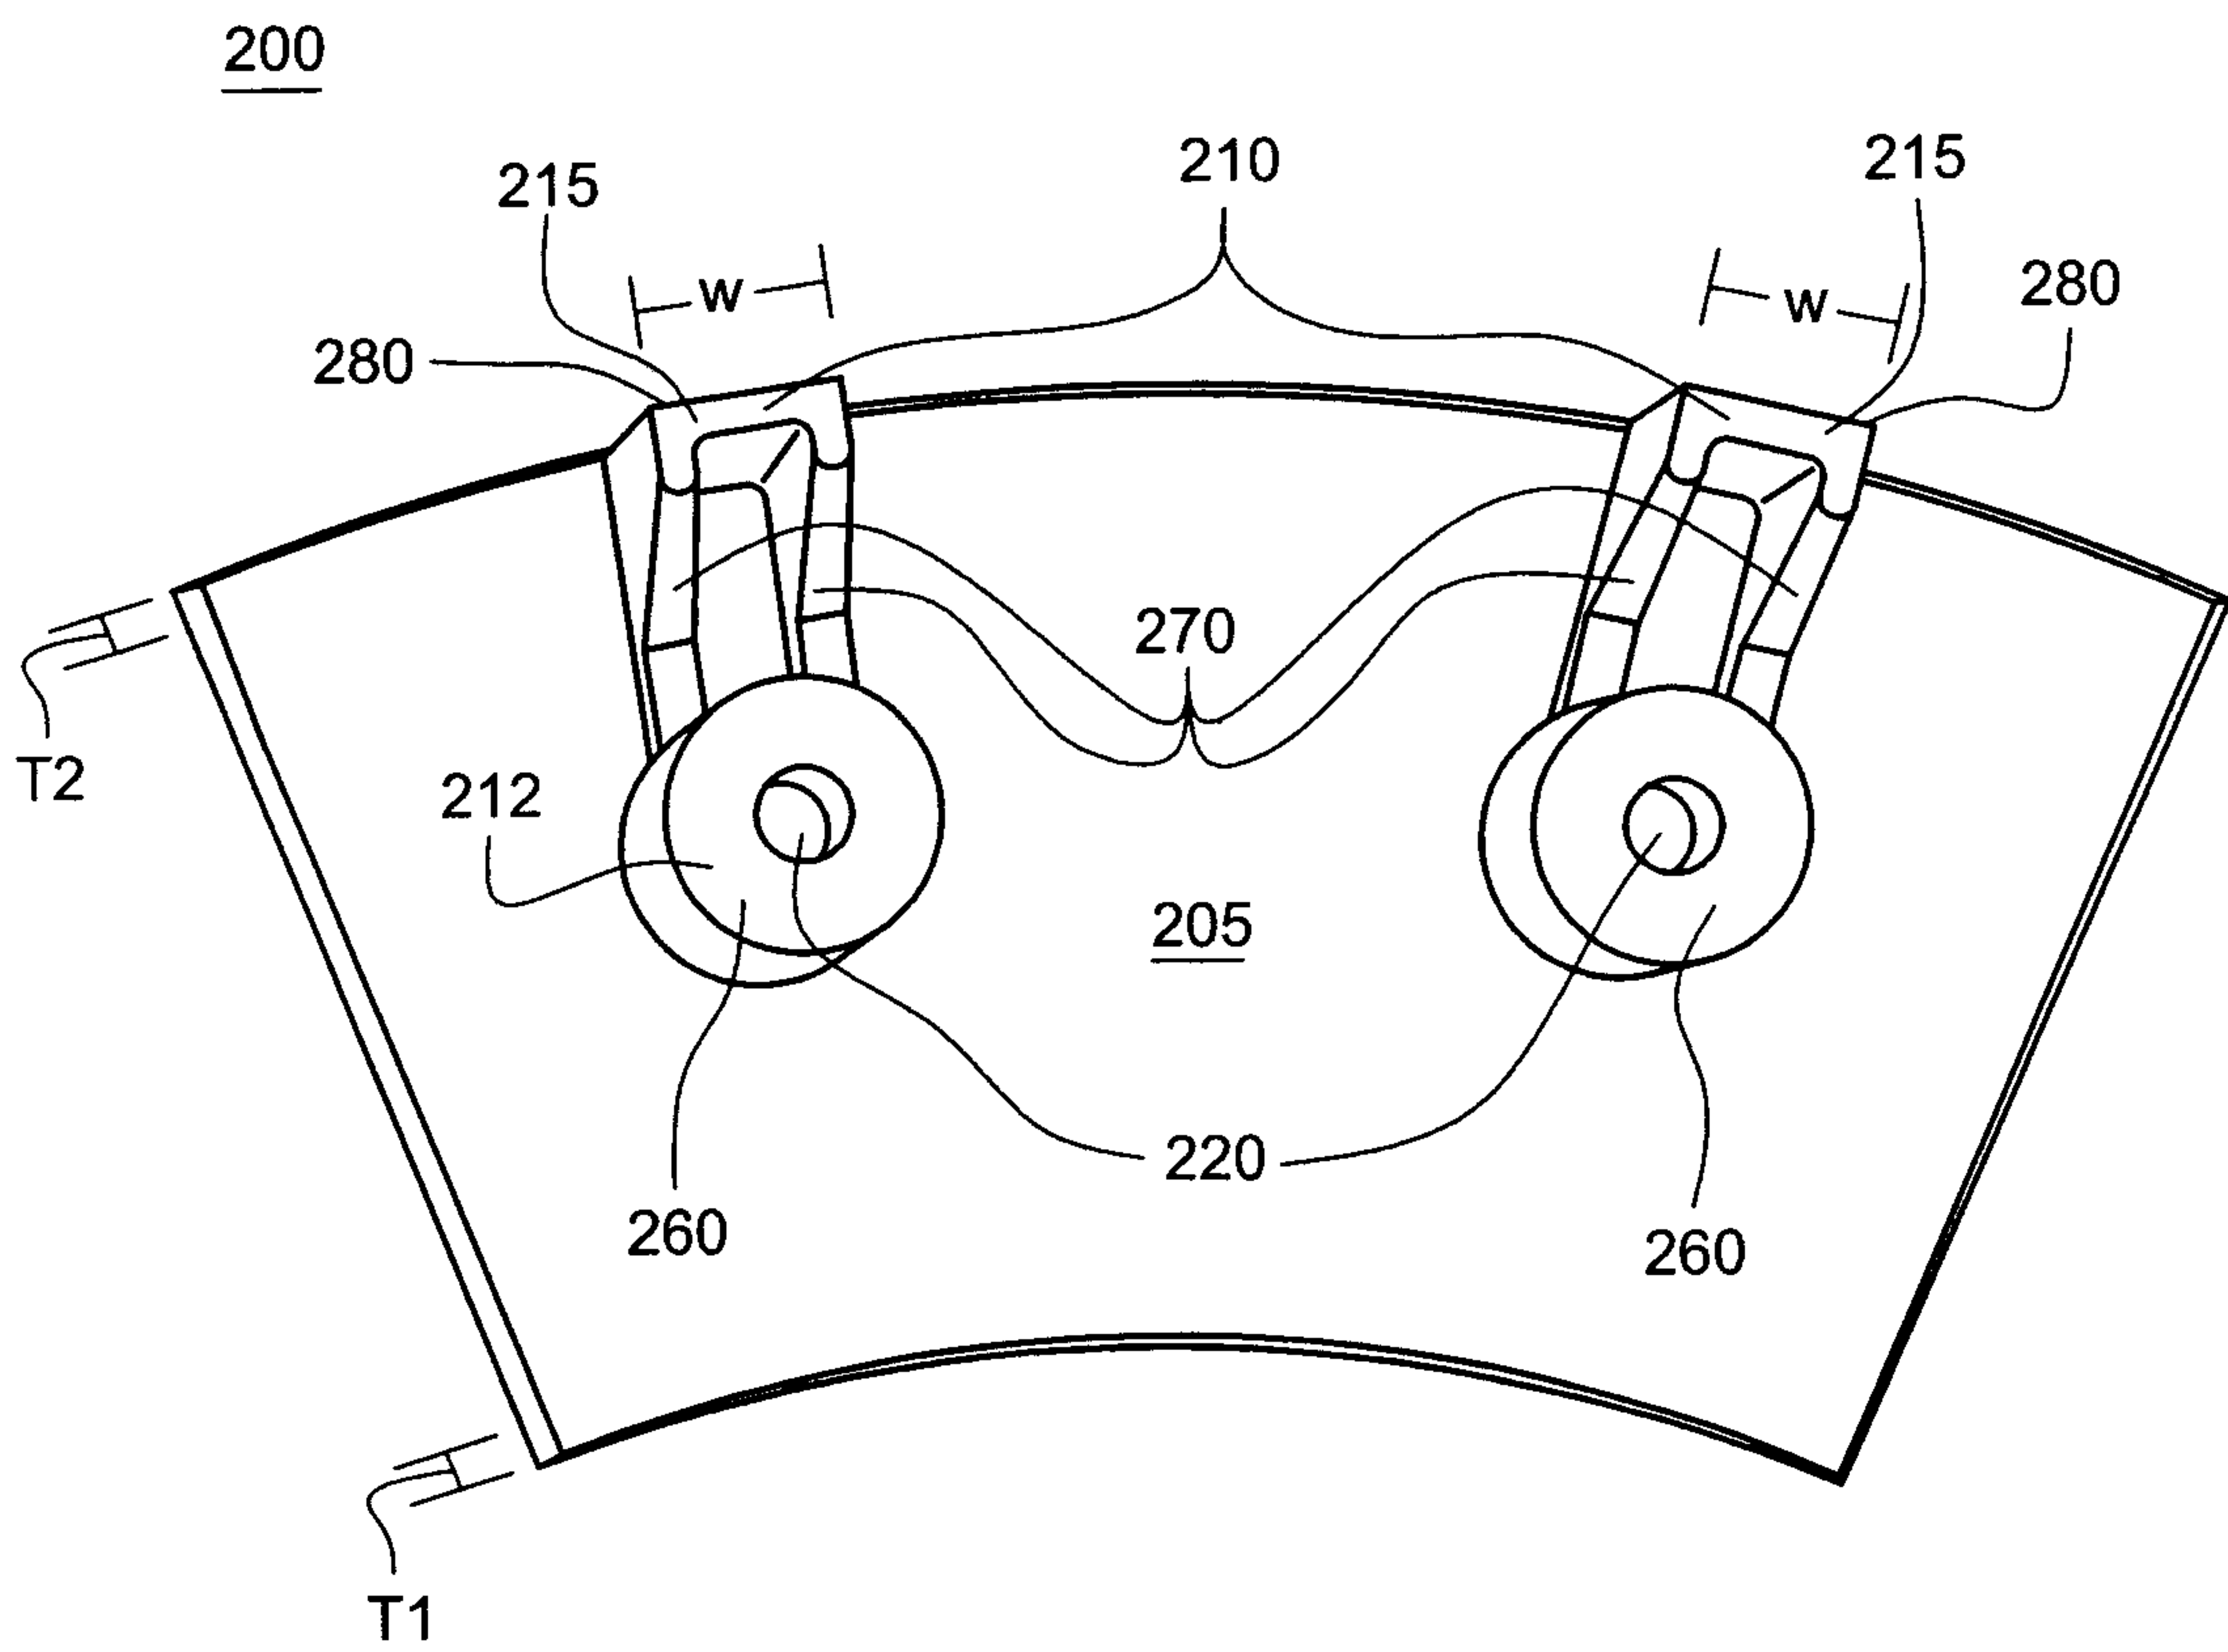

**FIG. 2**




3/9

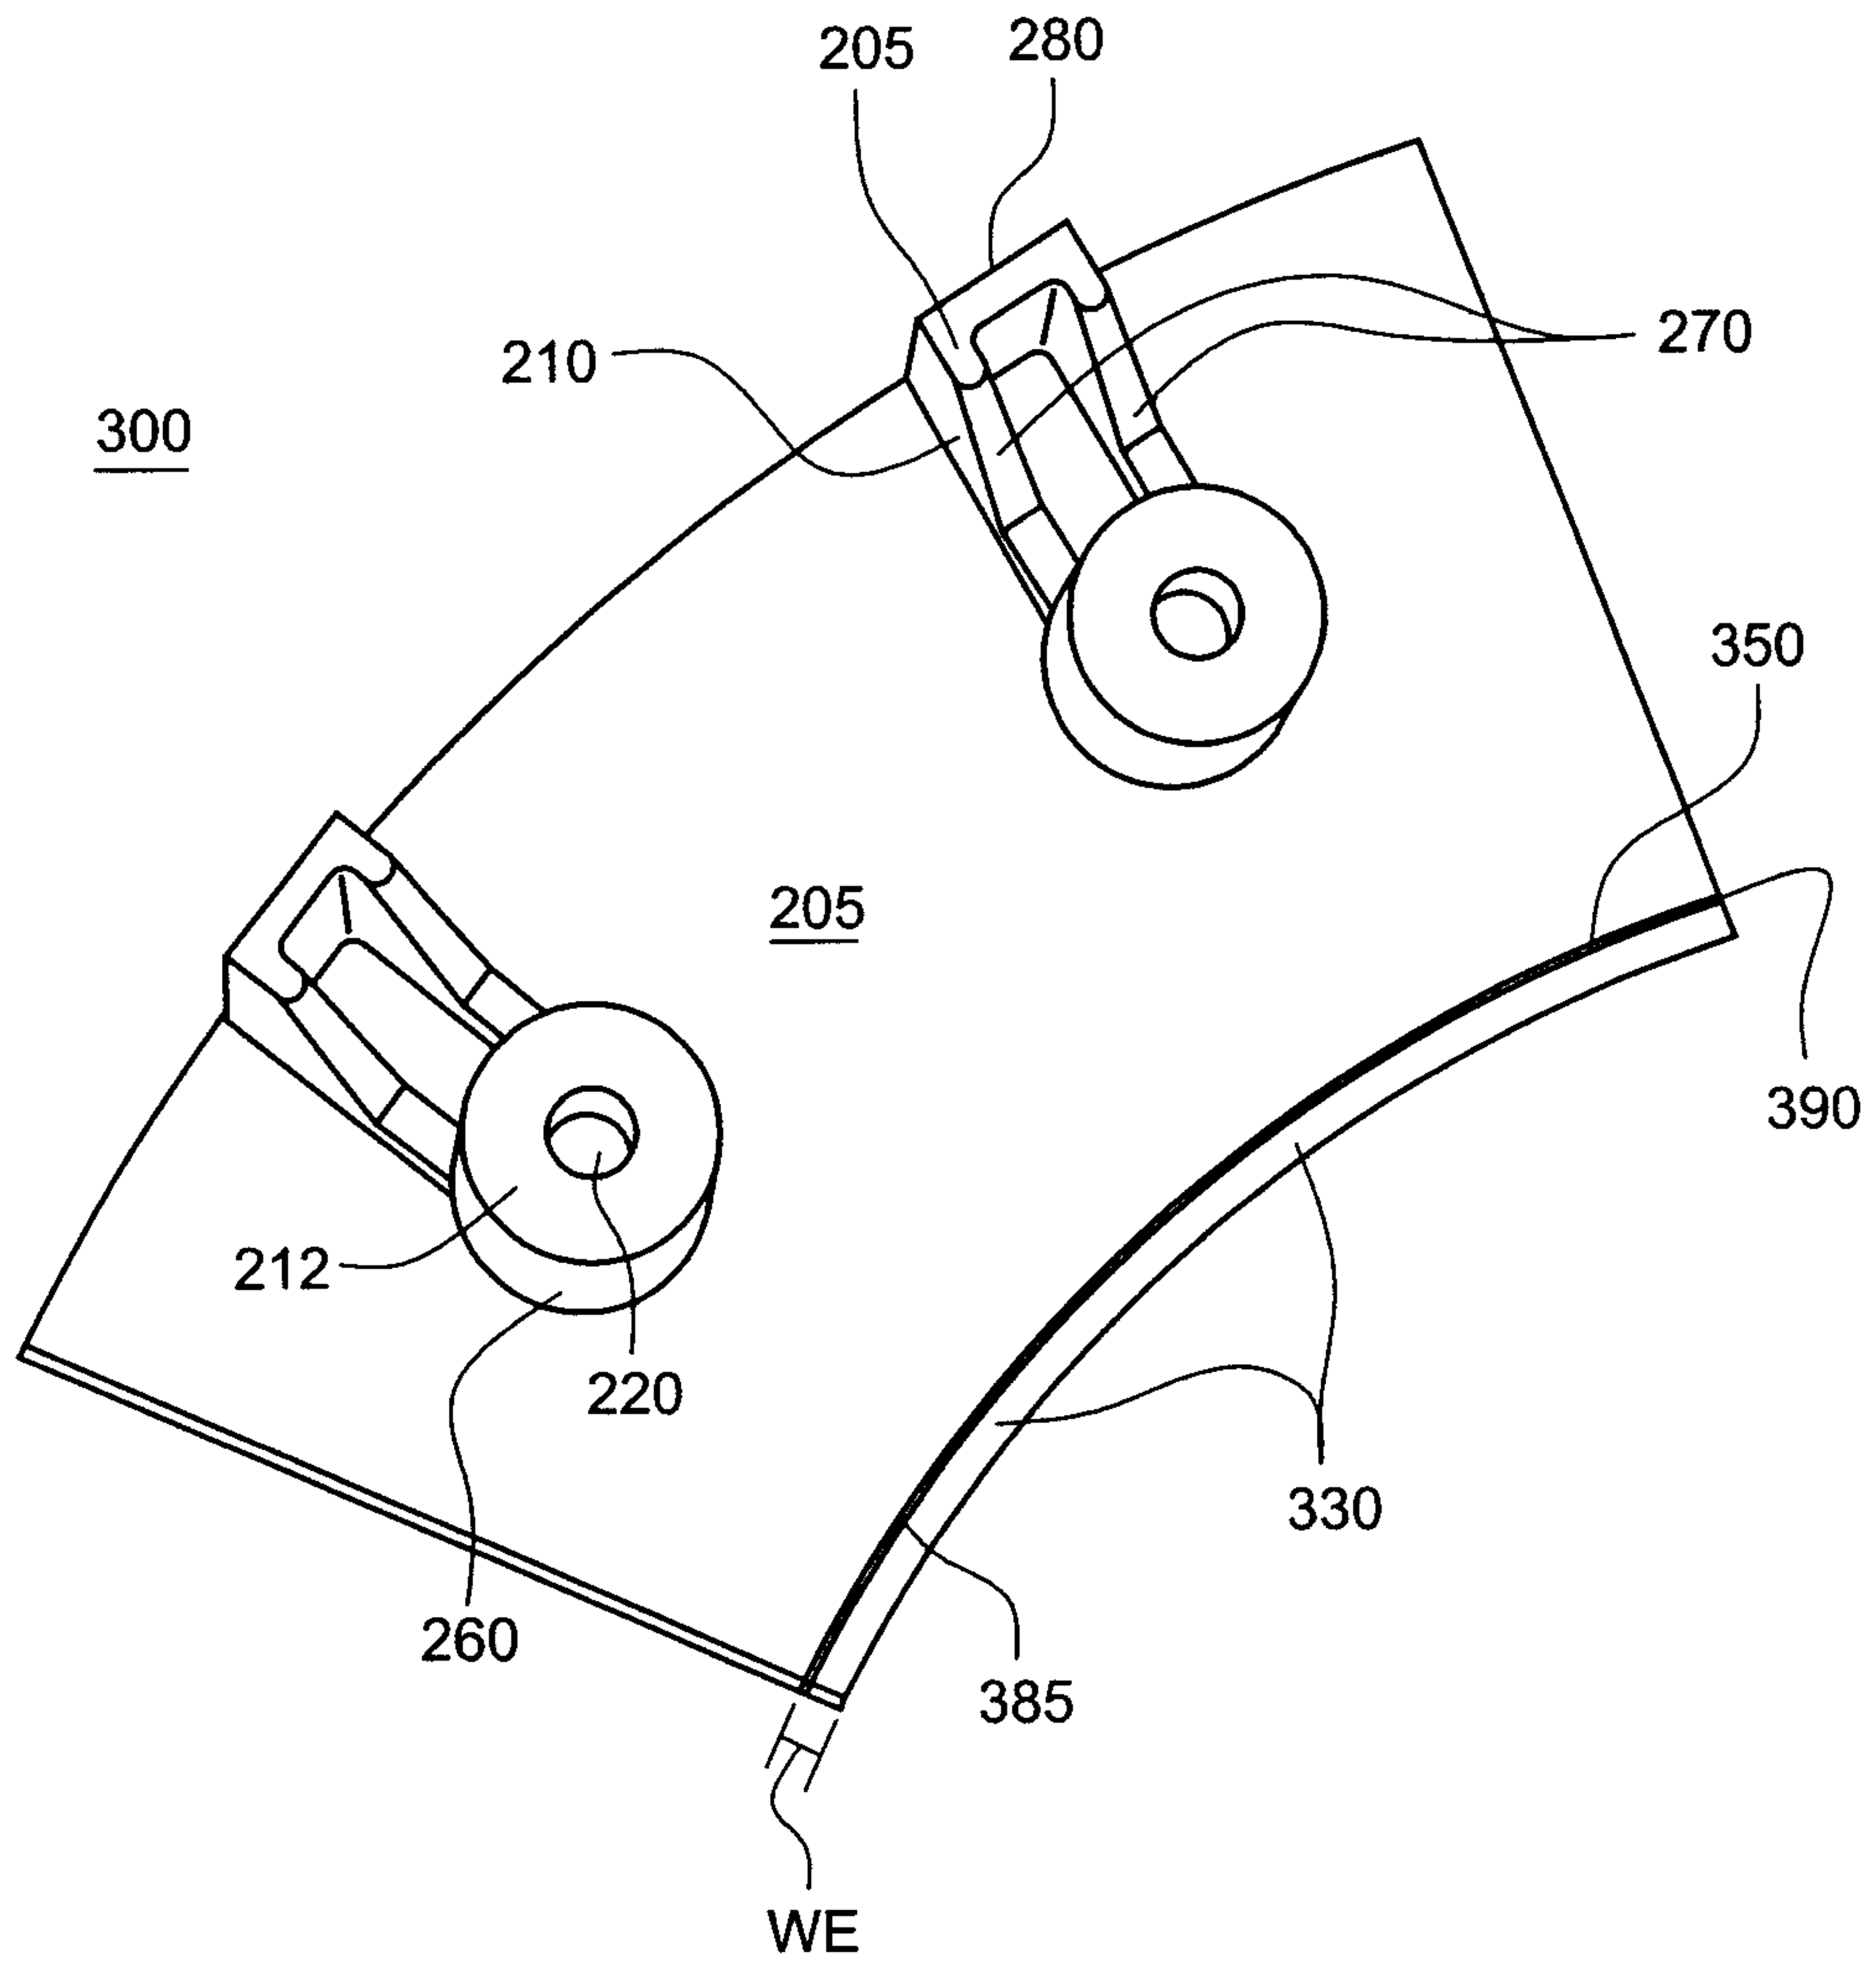


**FIG. 3**


4/9

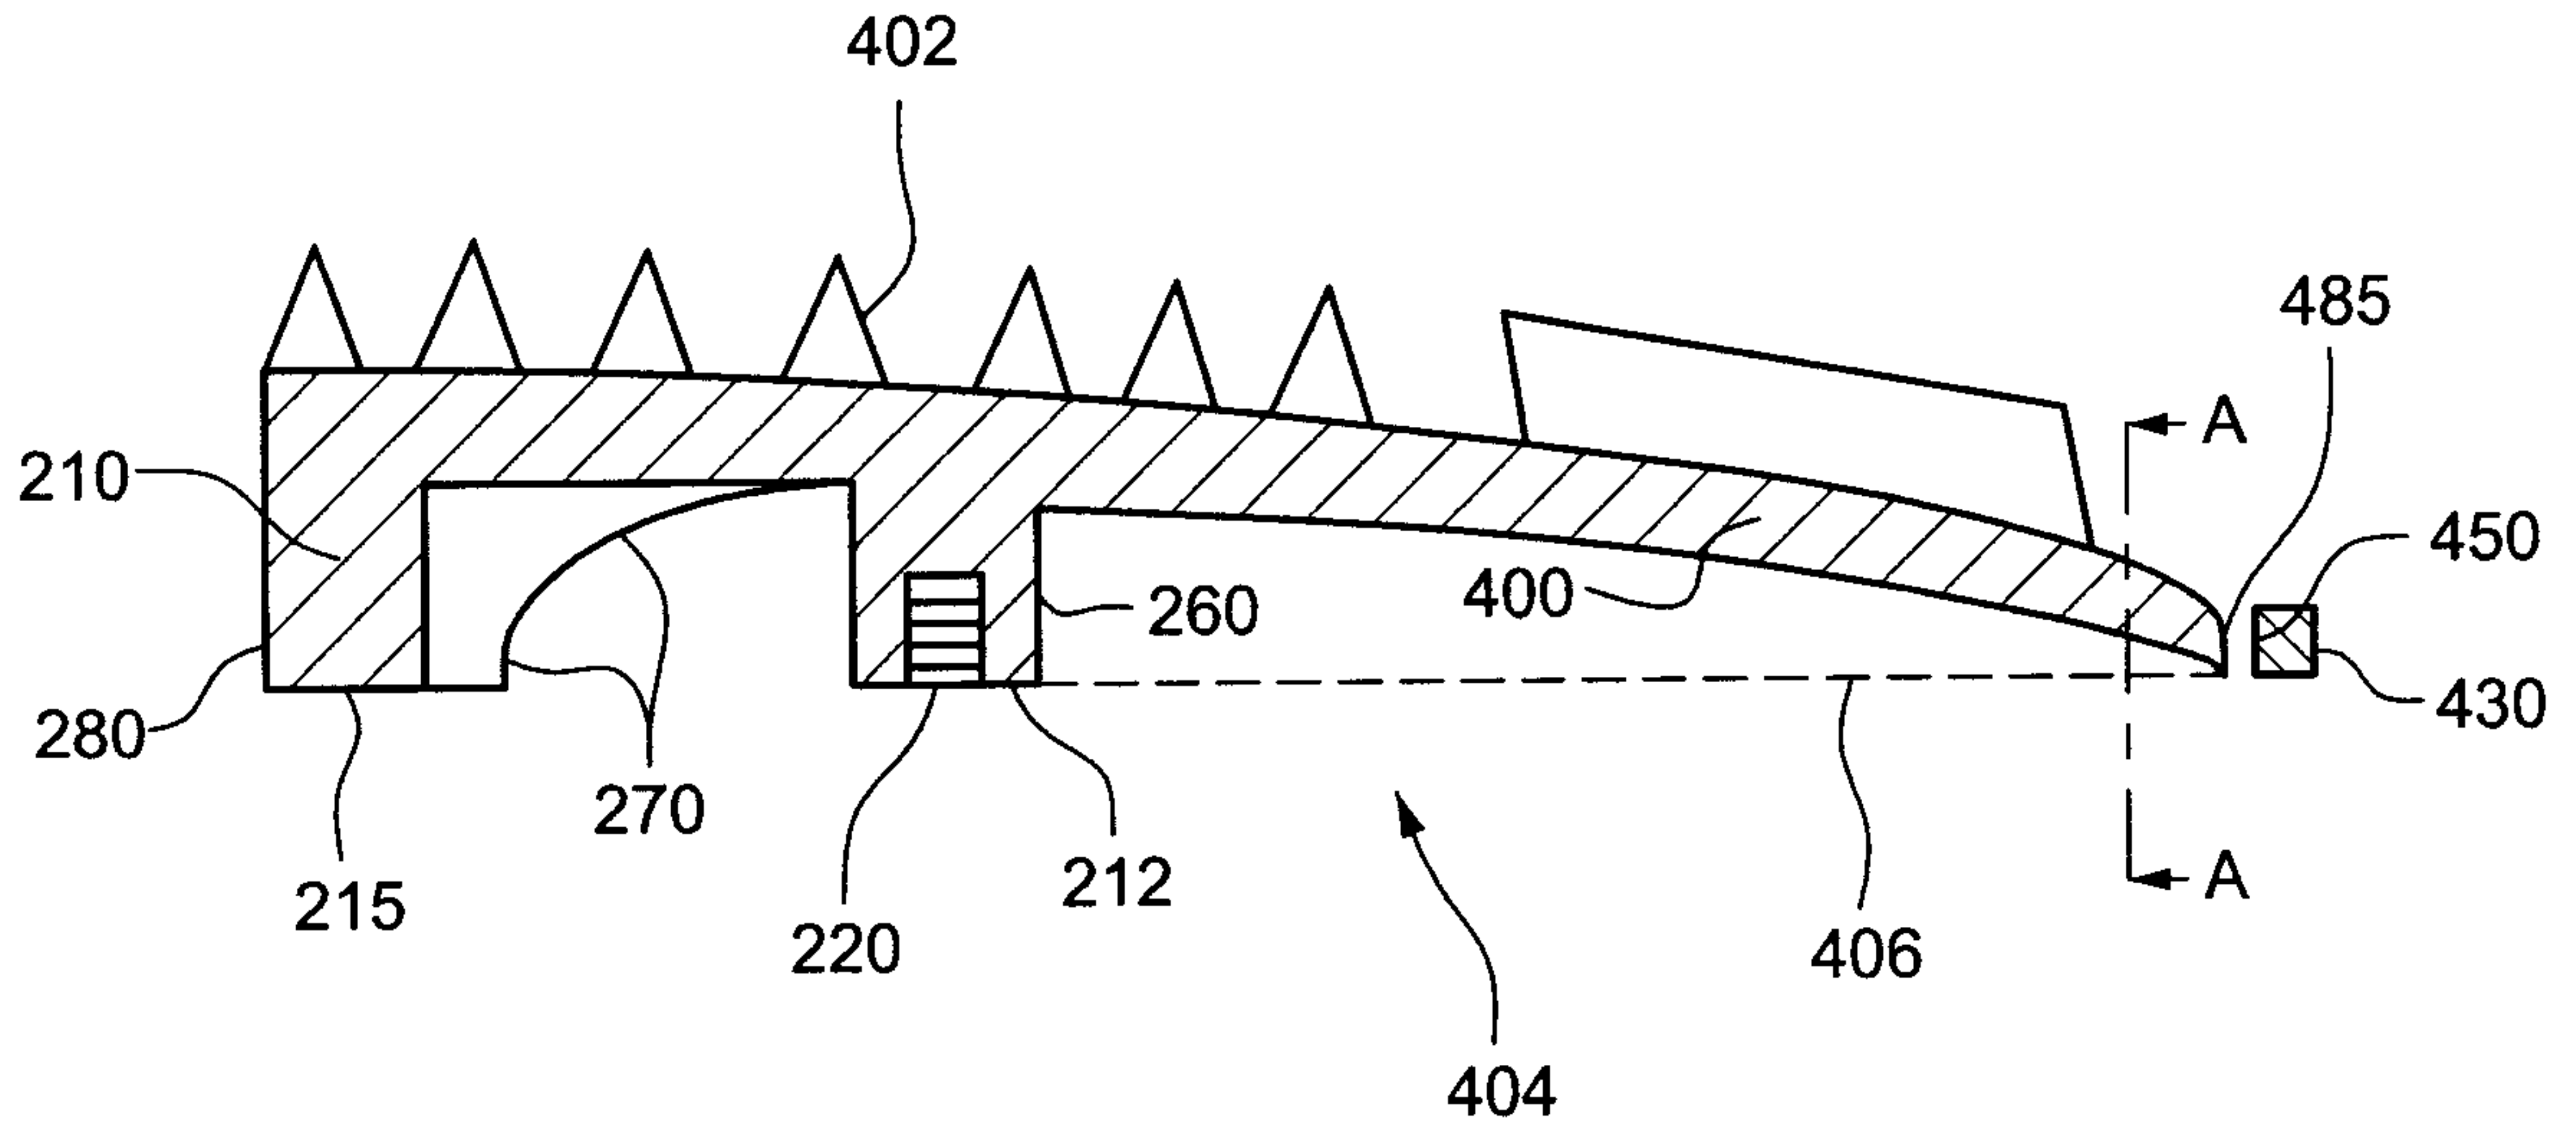

**FIG. 4**

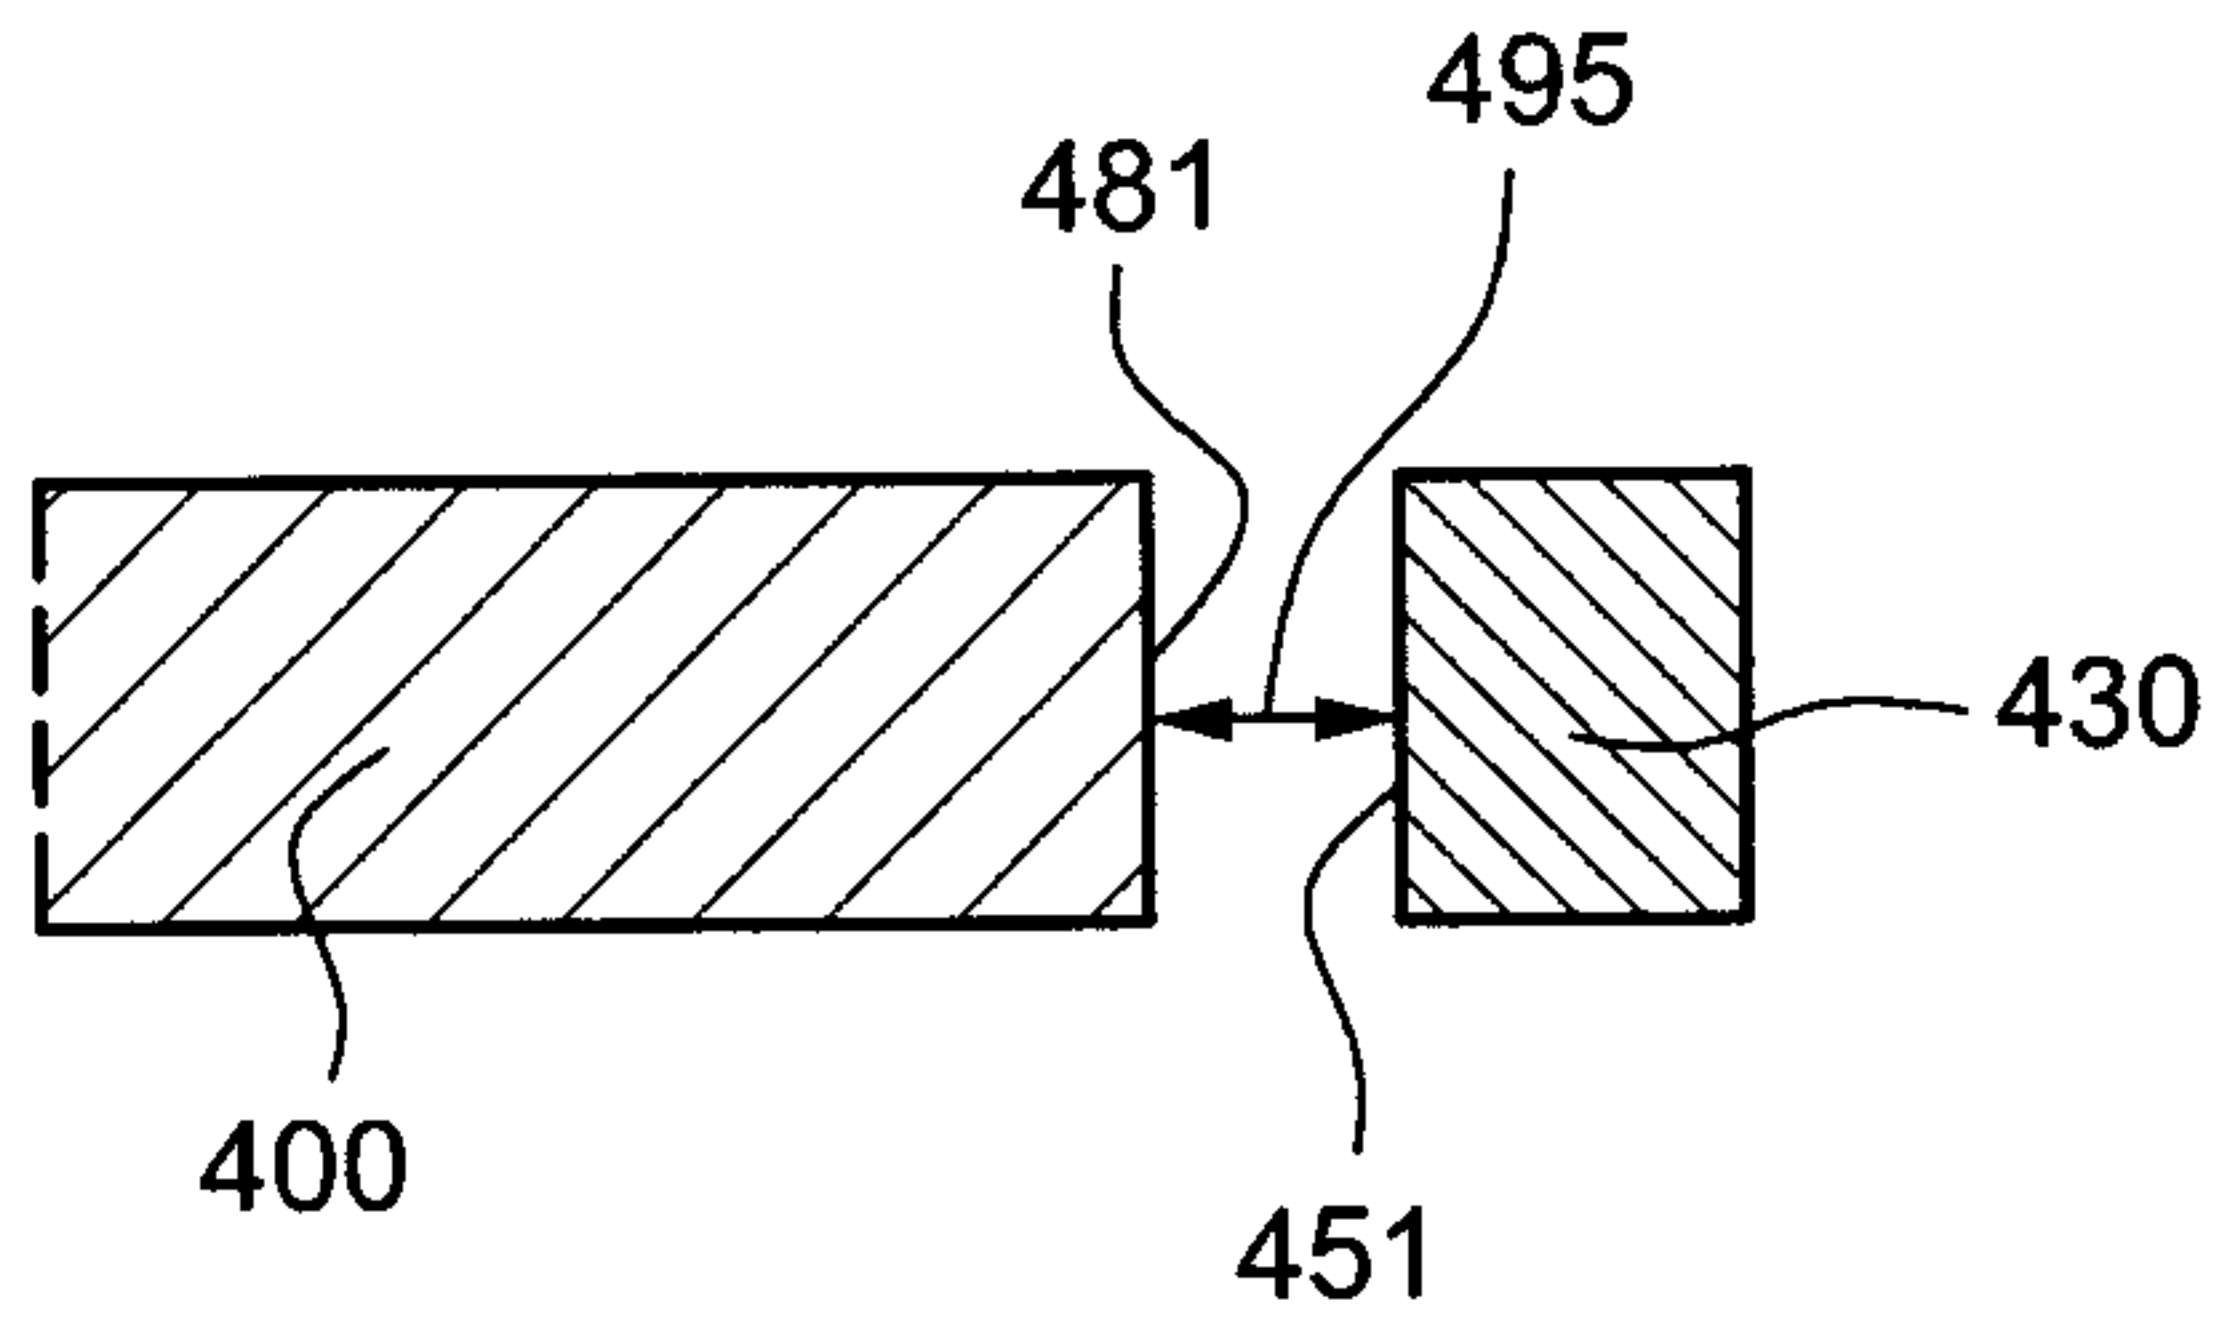


**FIG. 5**

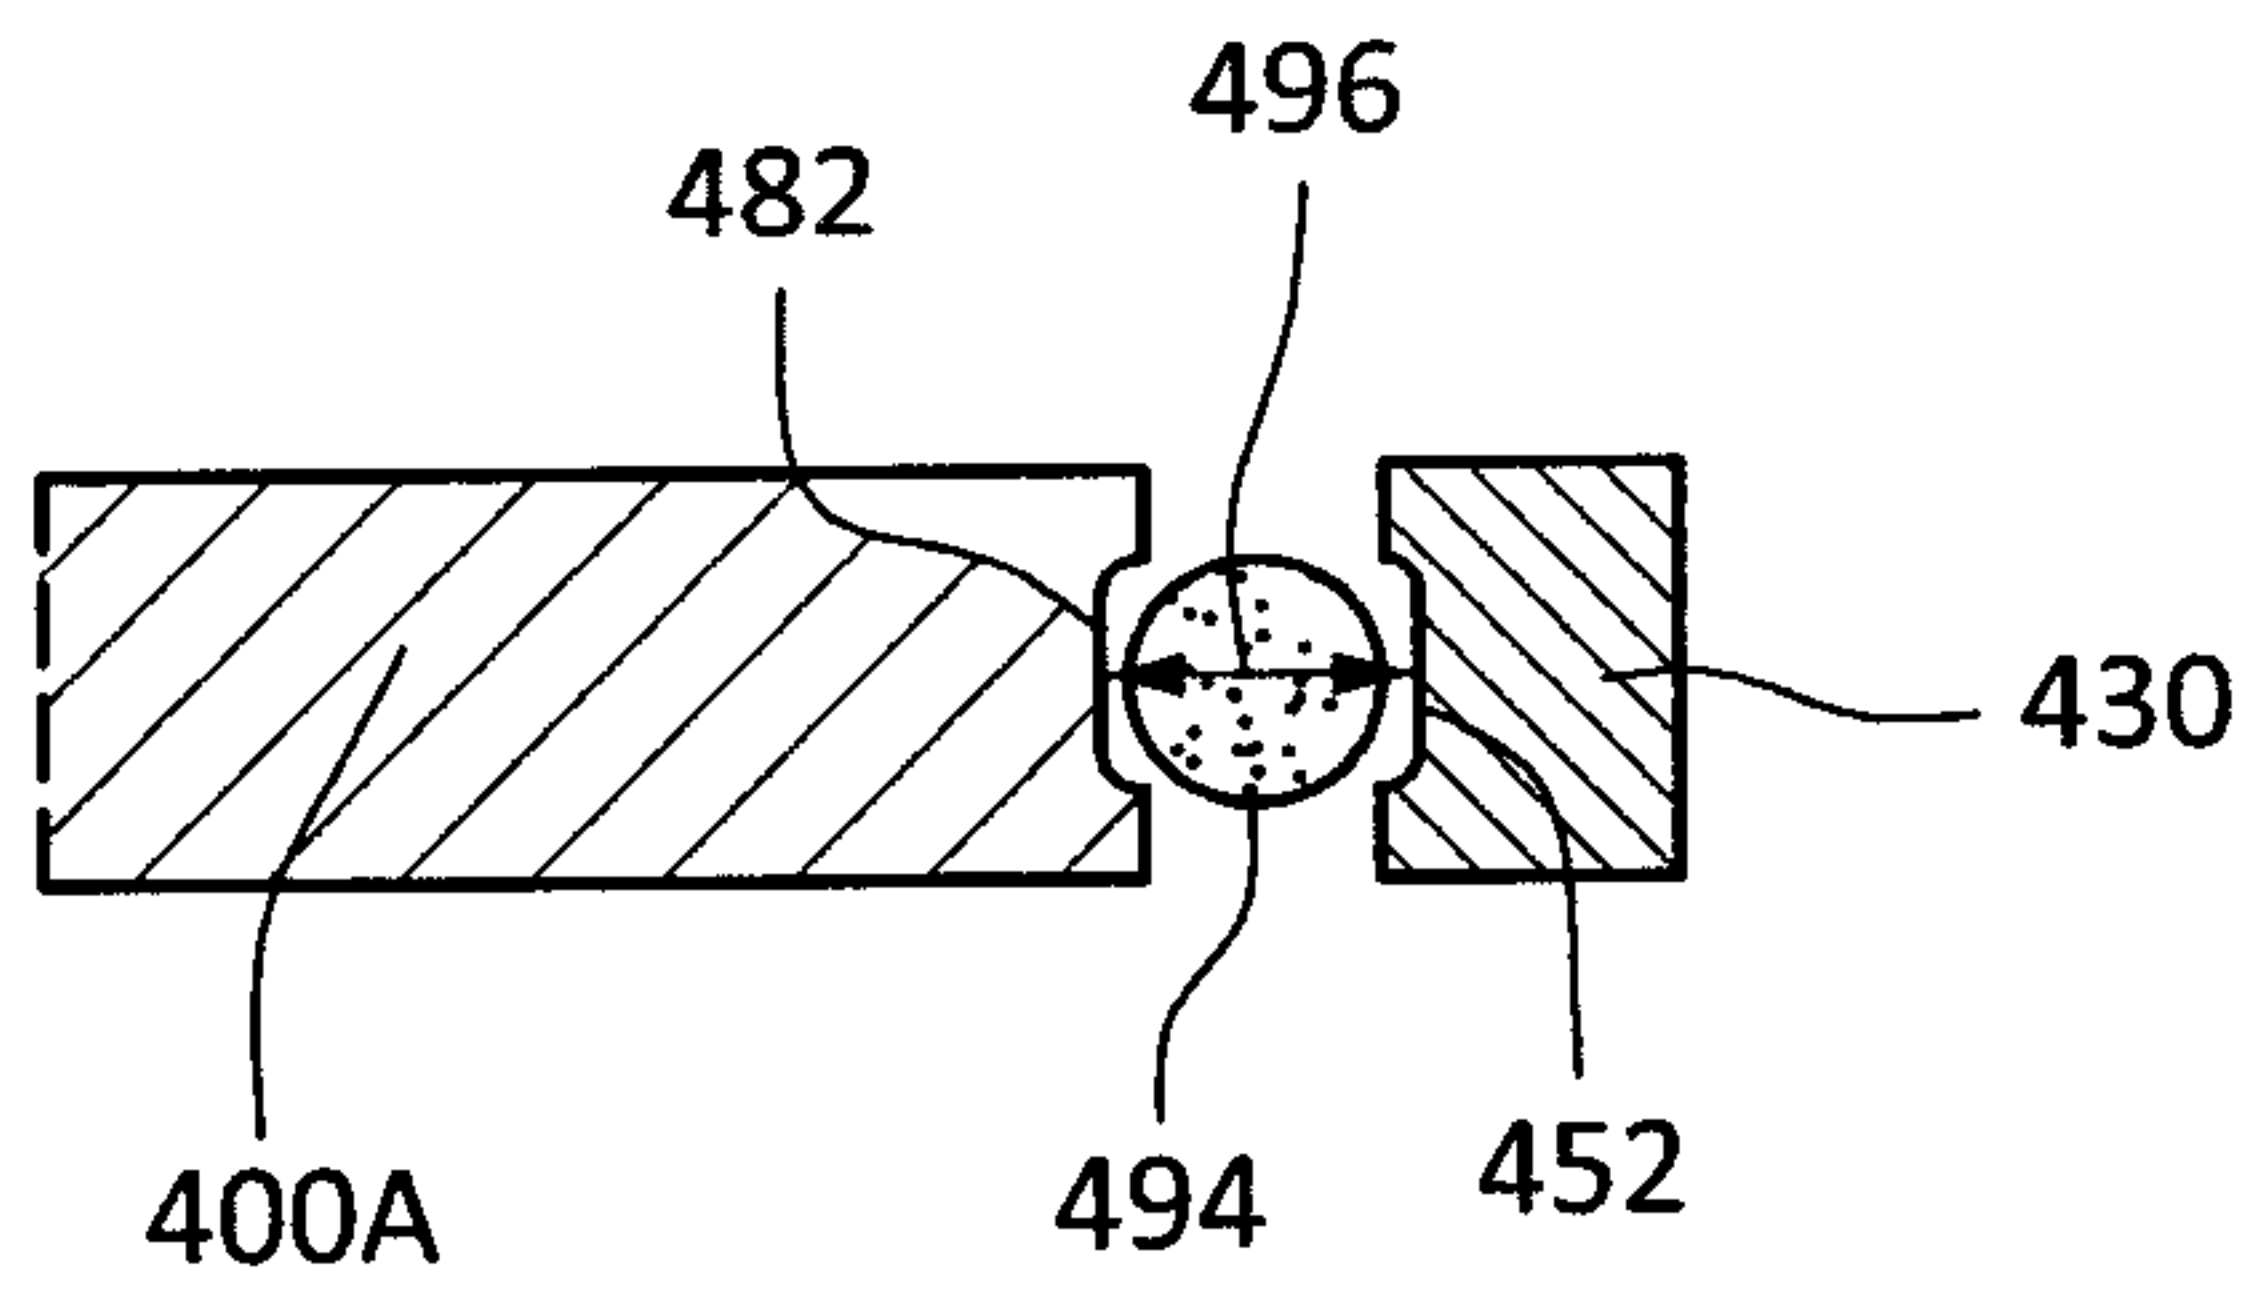


**FIG. 6**

5/9

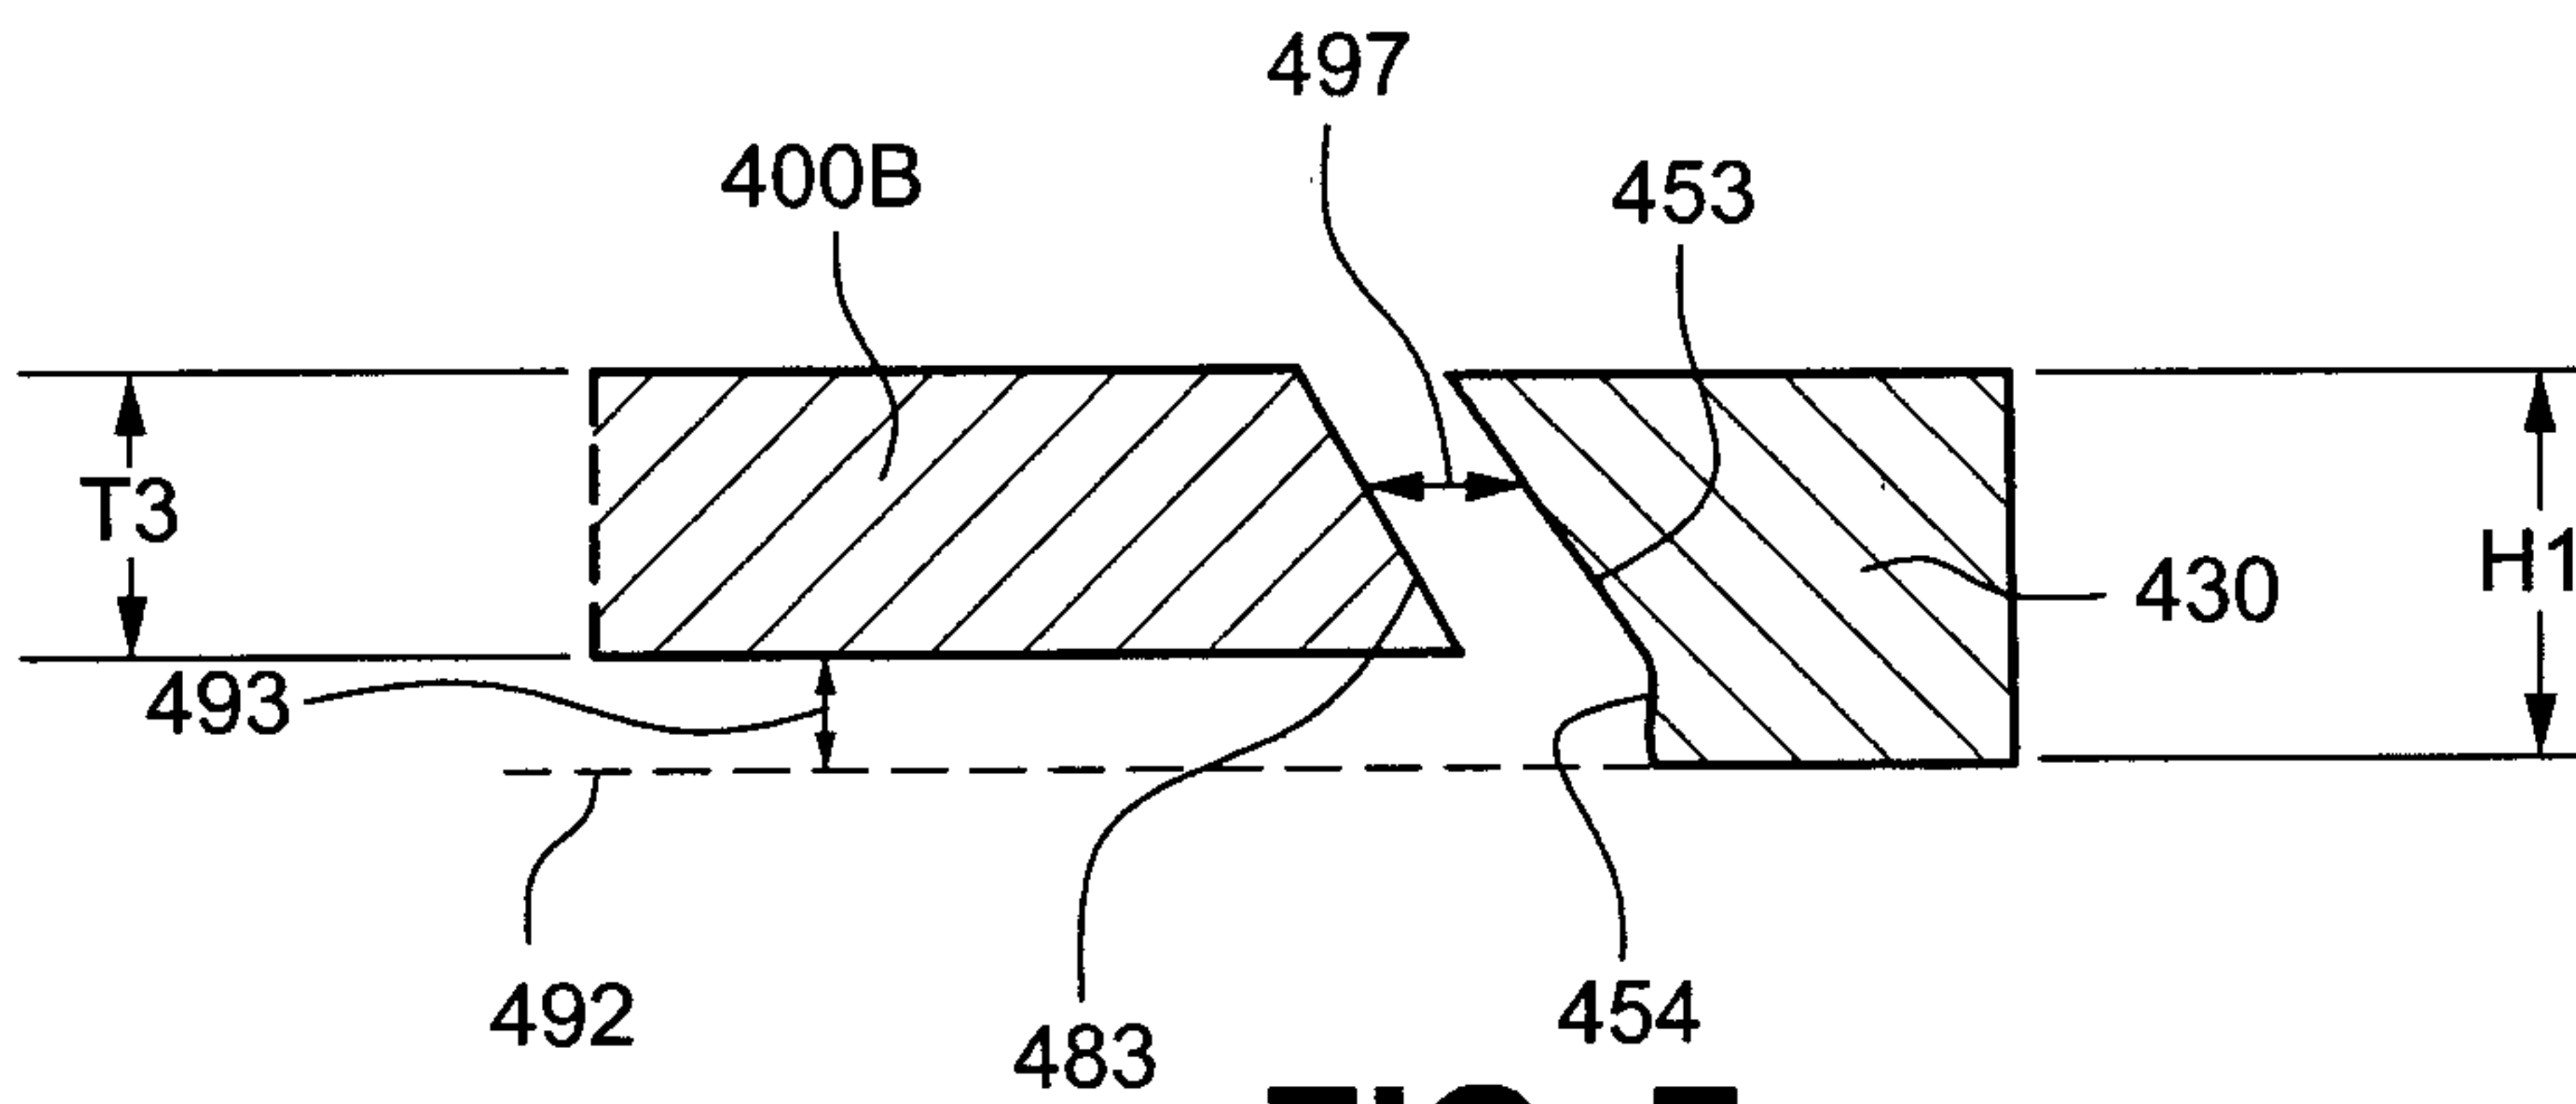


**FIG. 7**

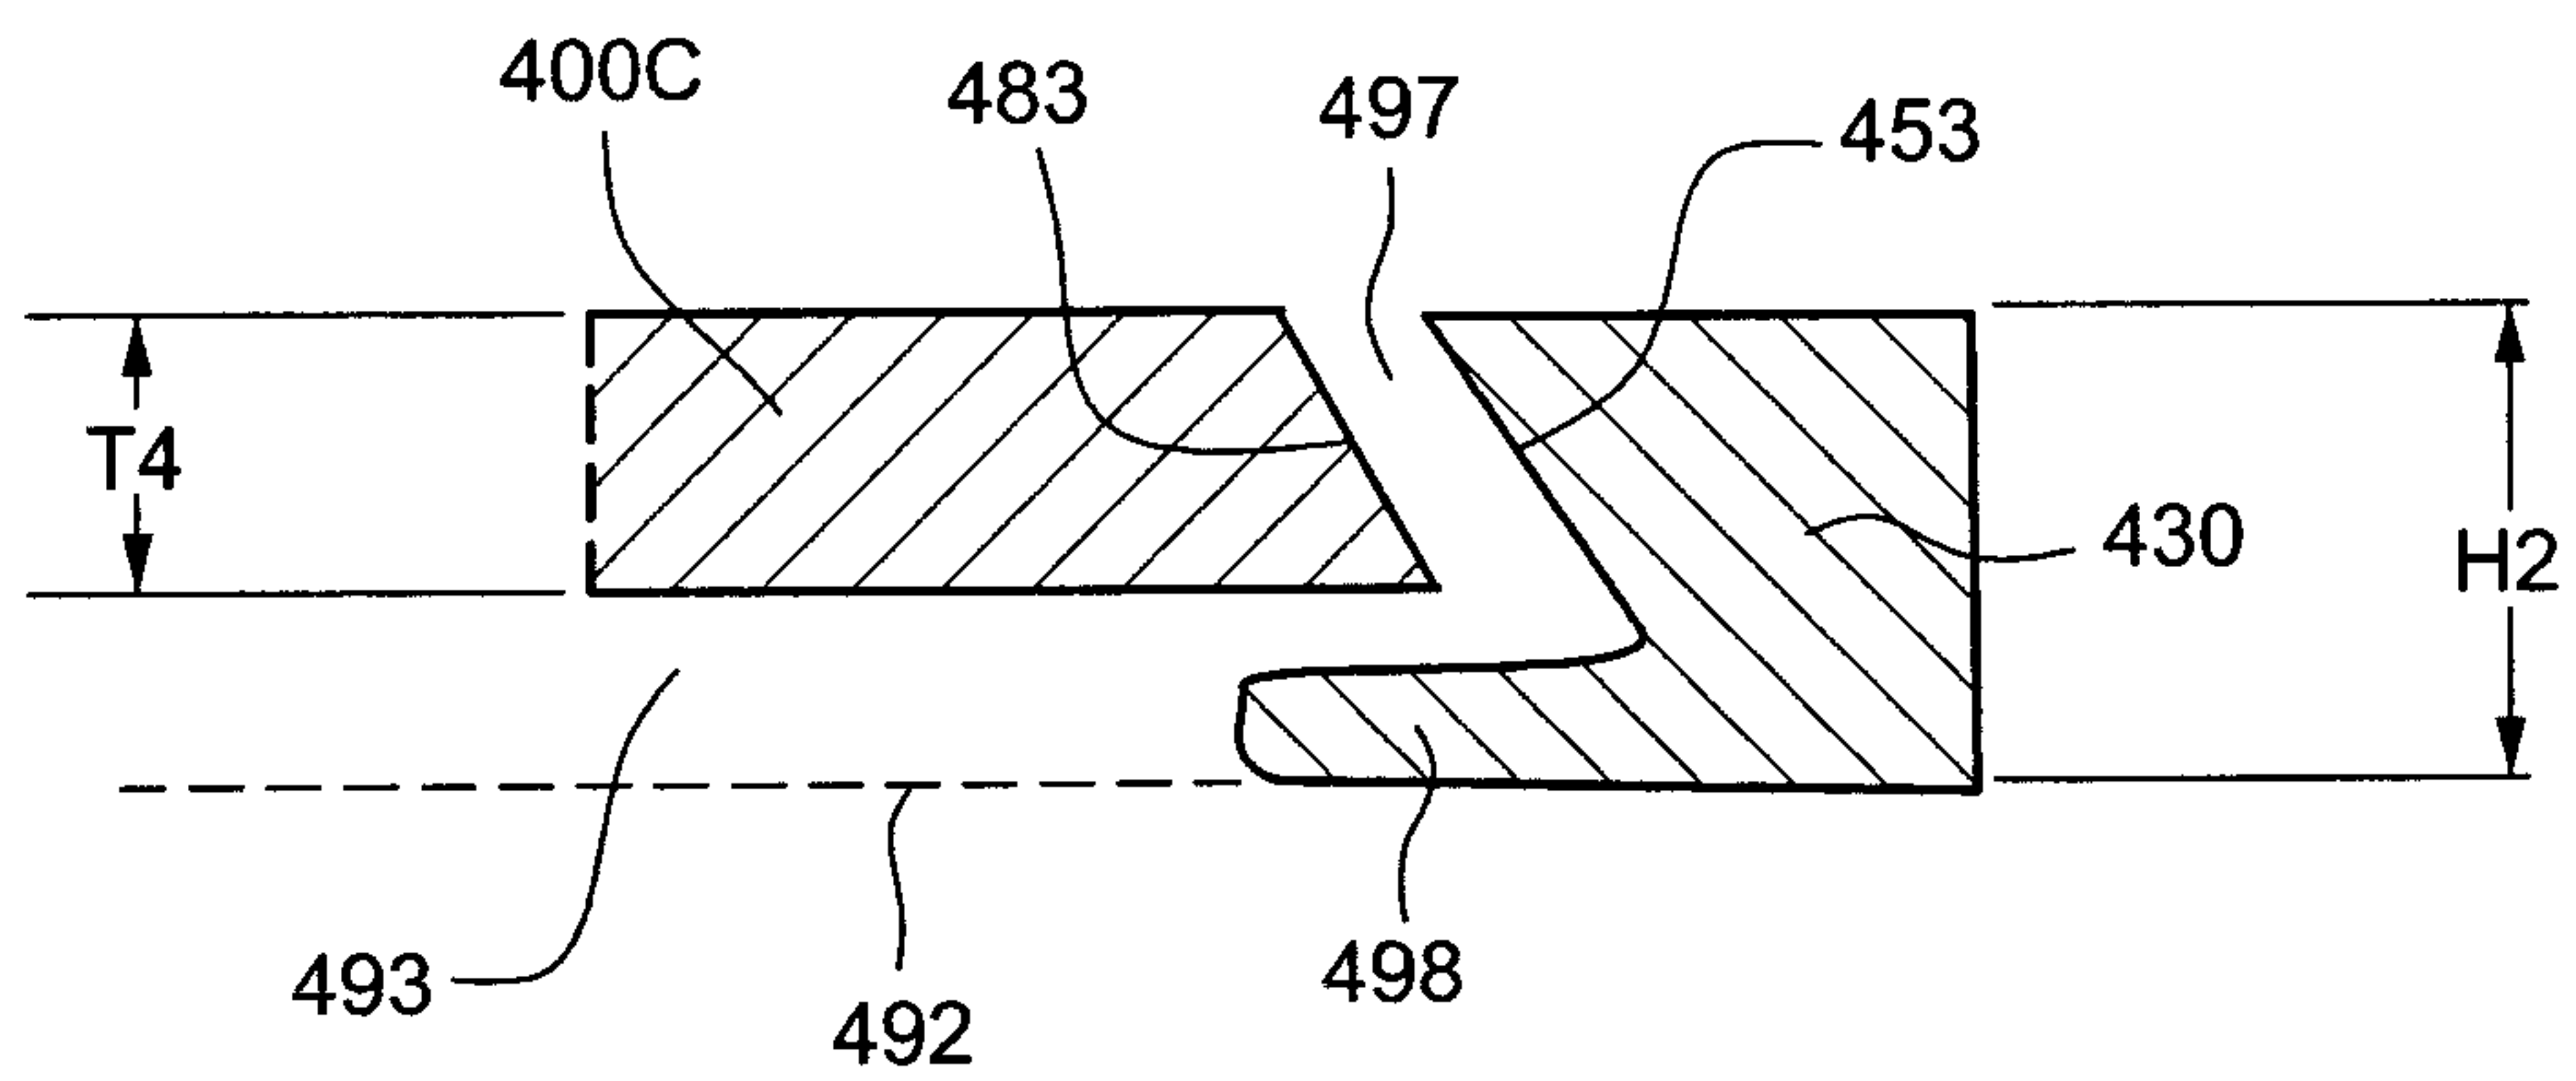


**FIG. 8**

6/9

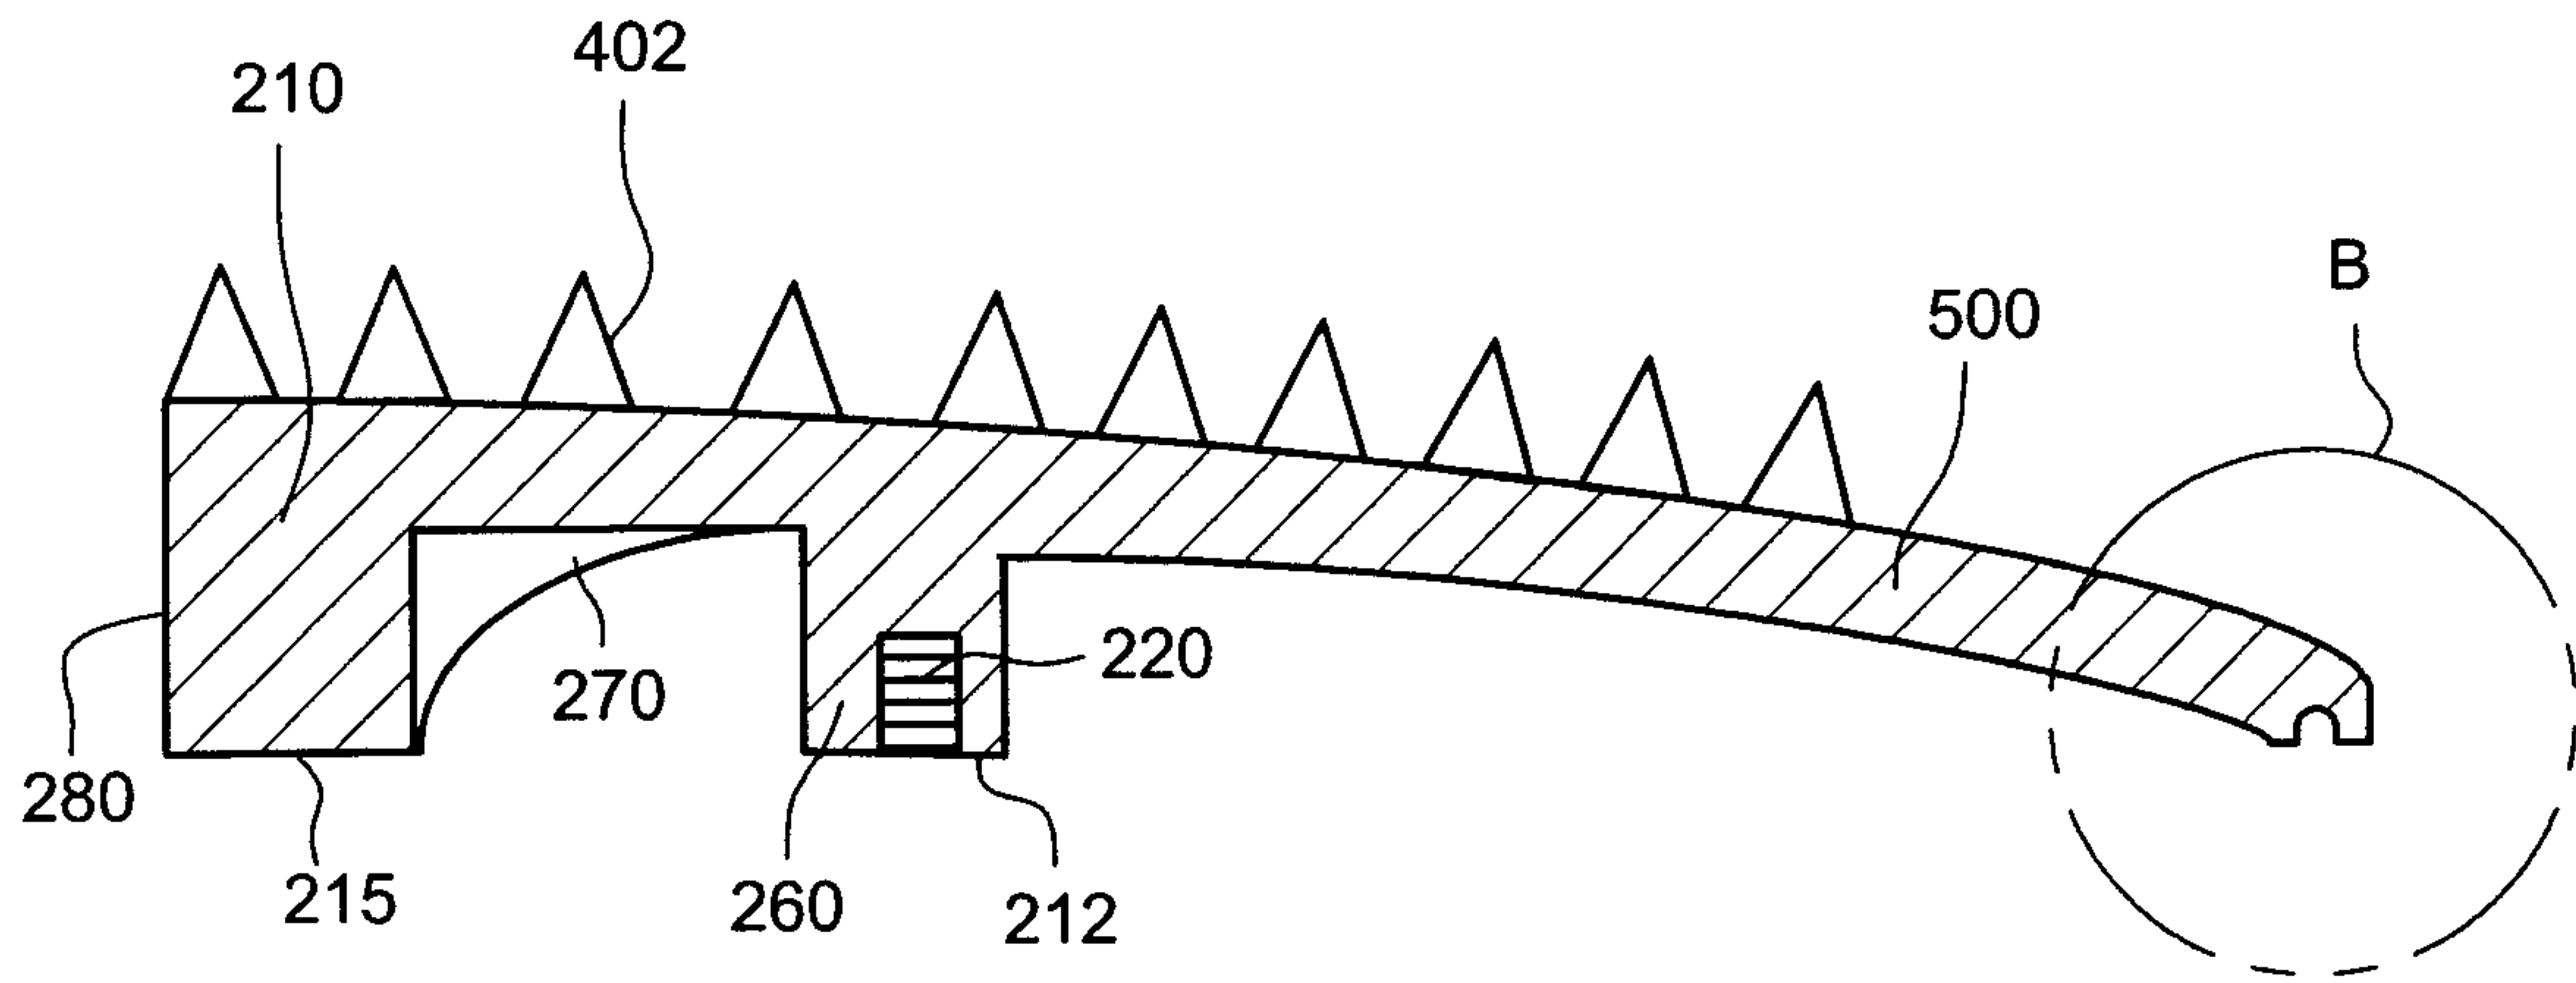


**FIG. 9**

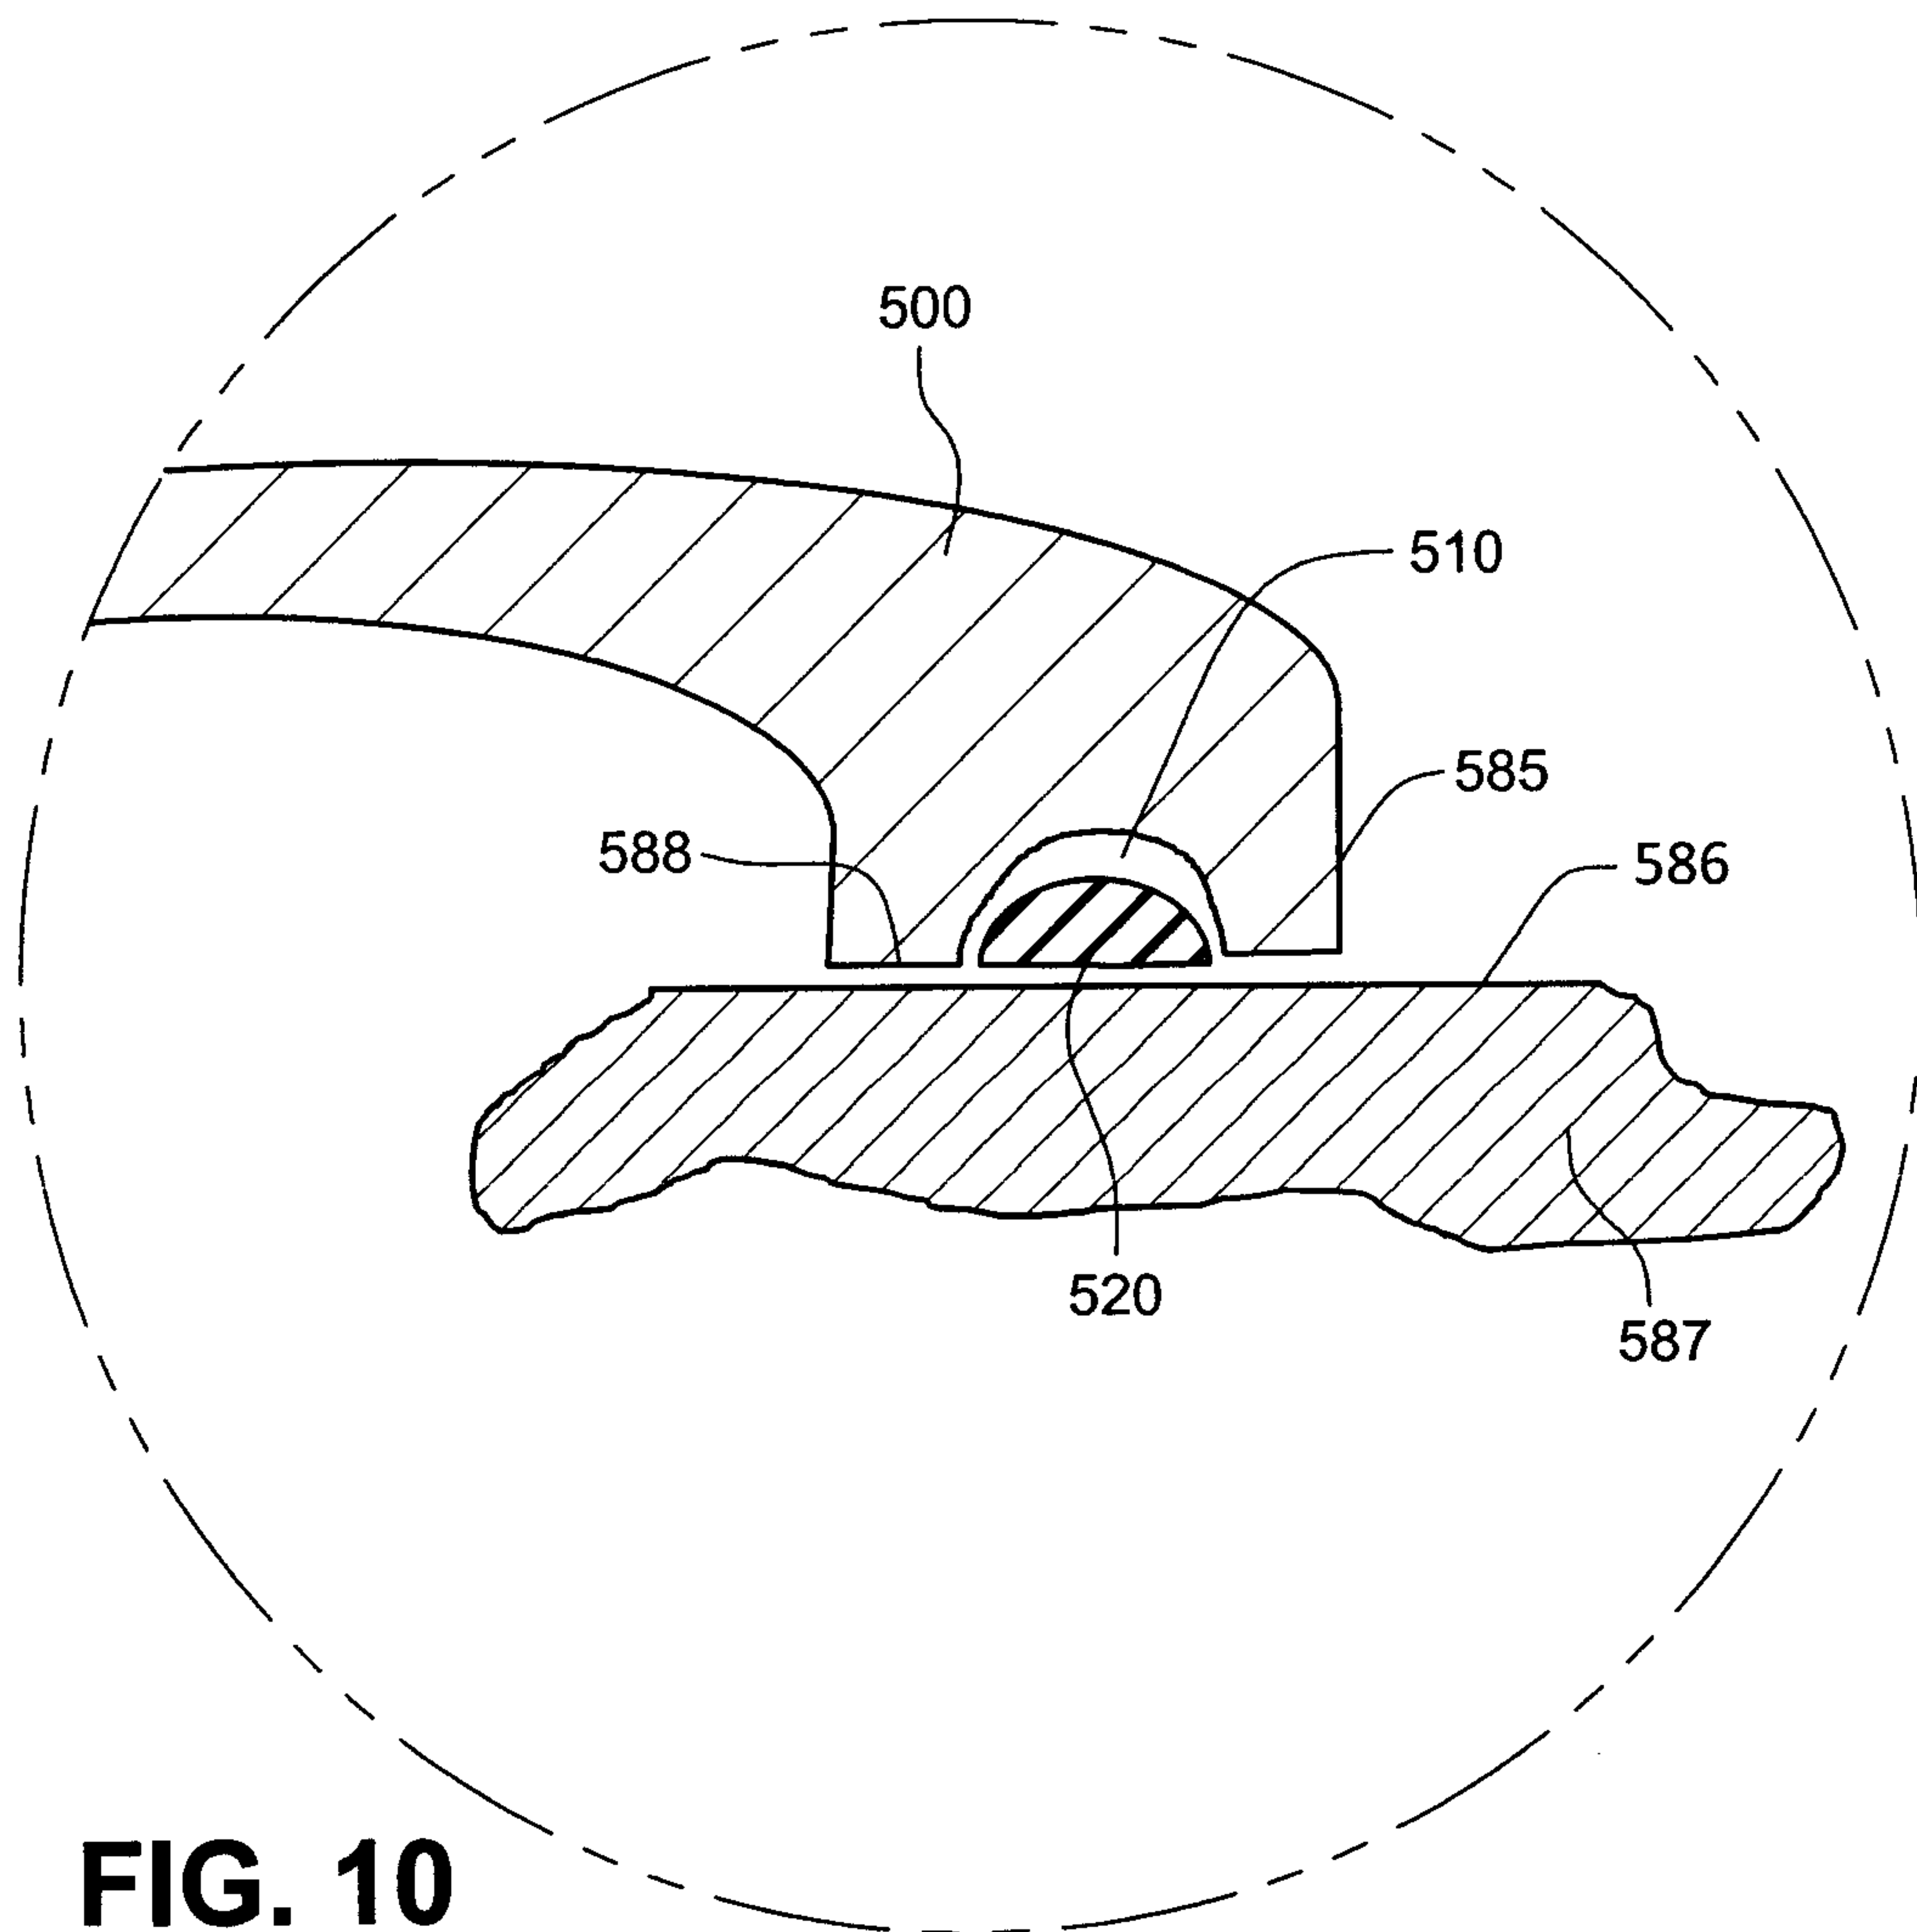


**FIG. 10**

7/9

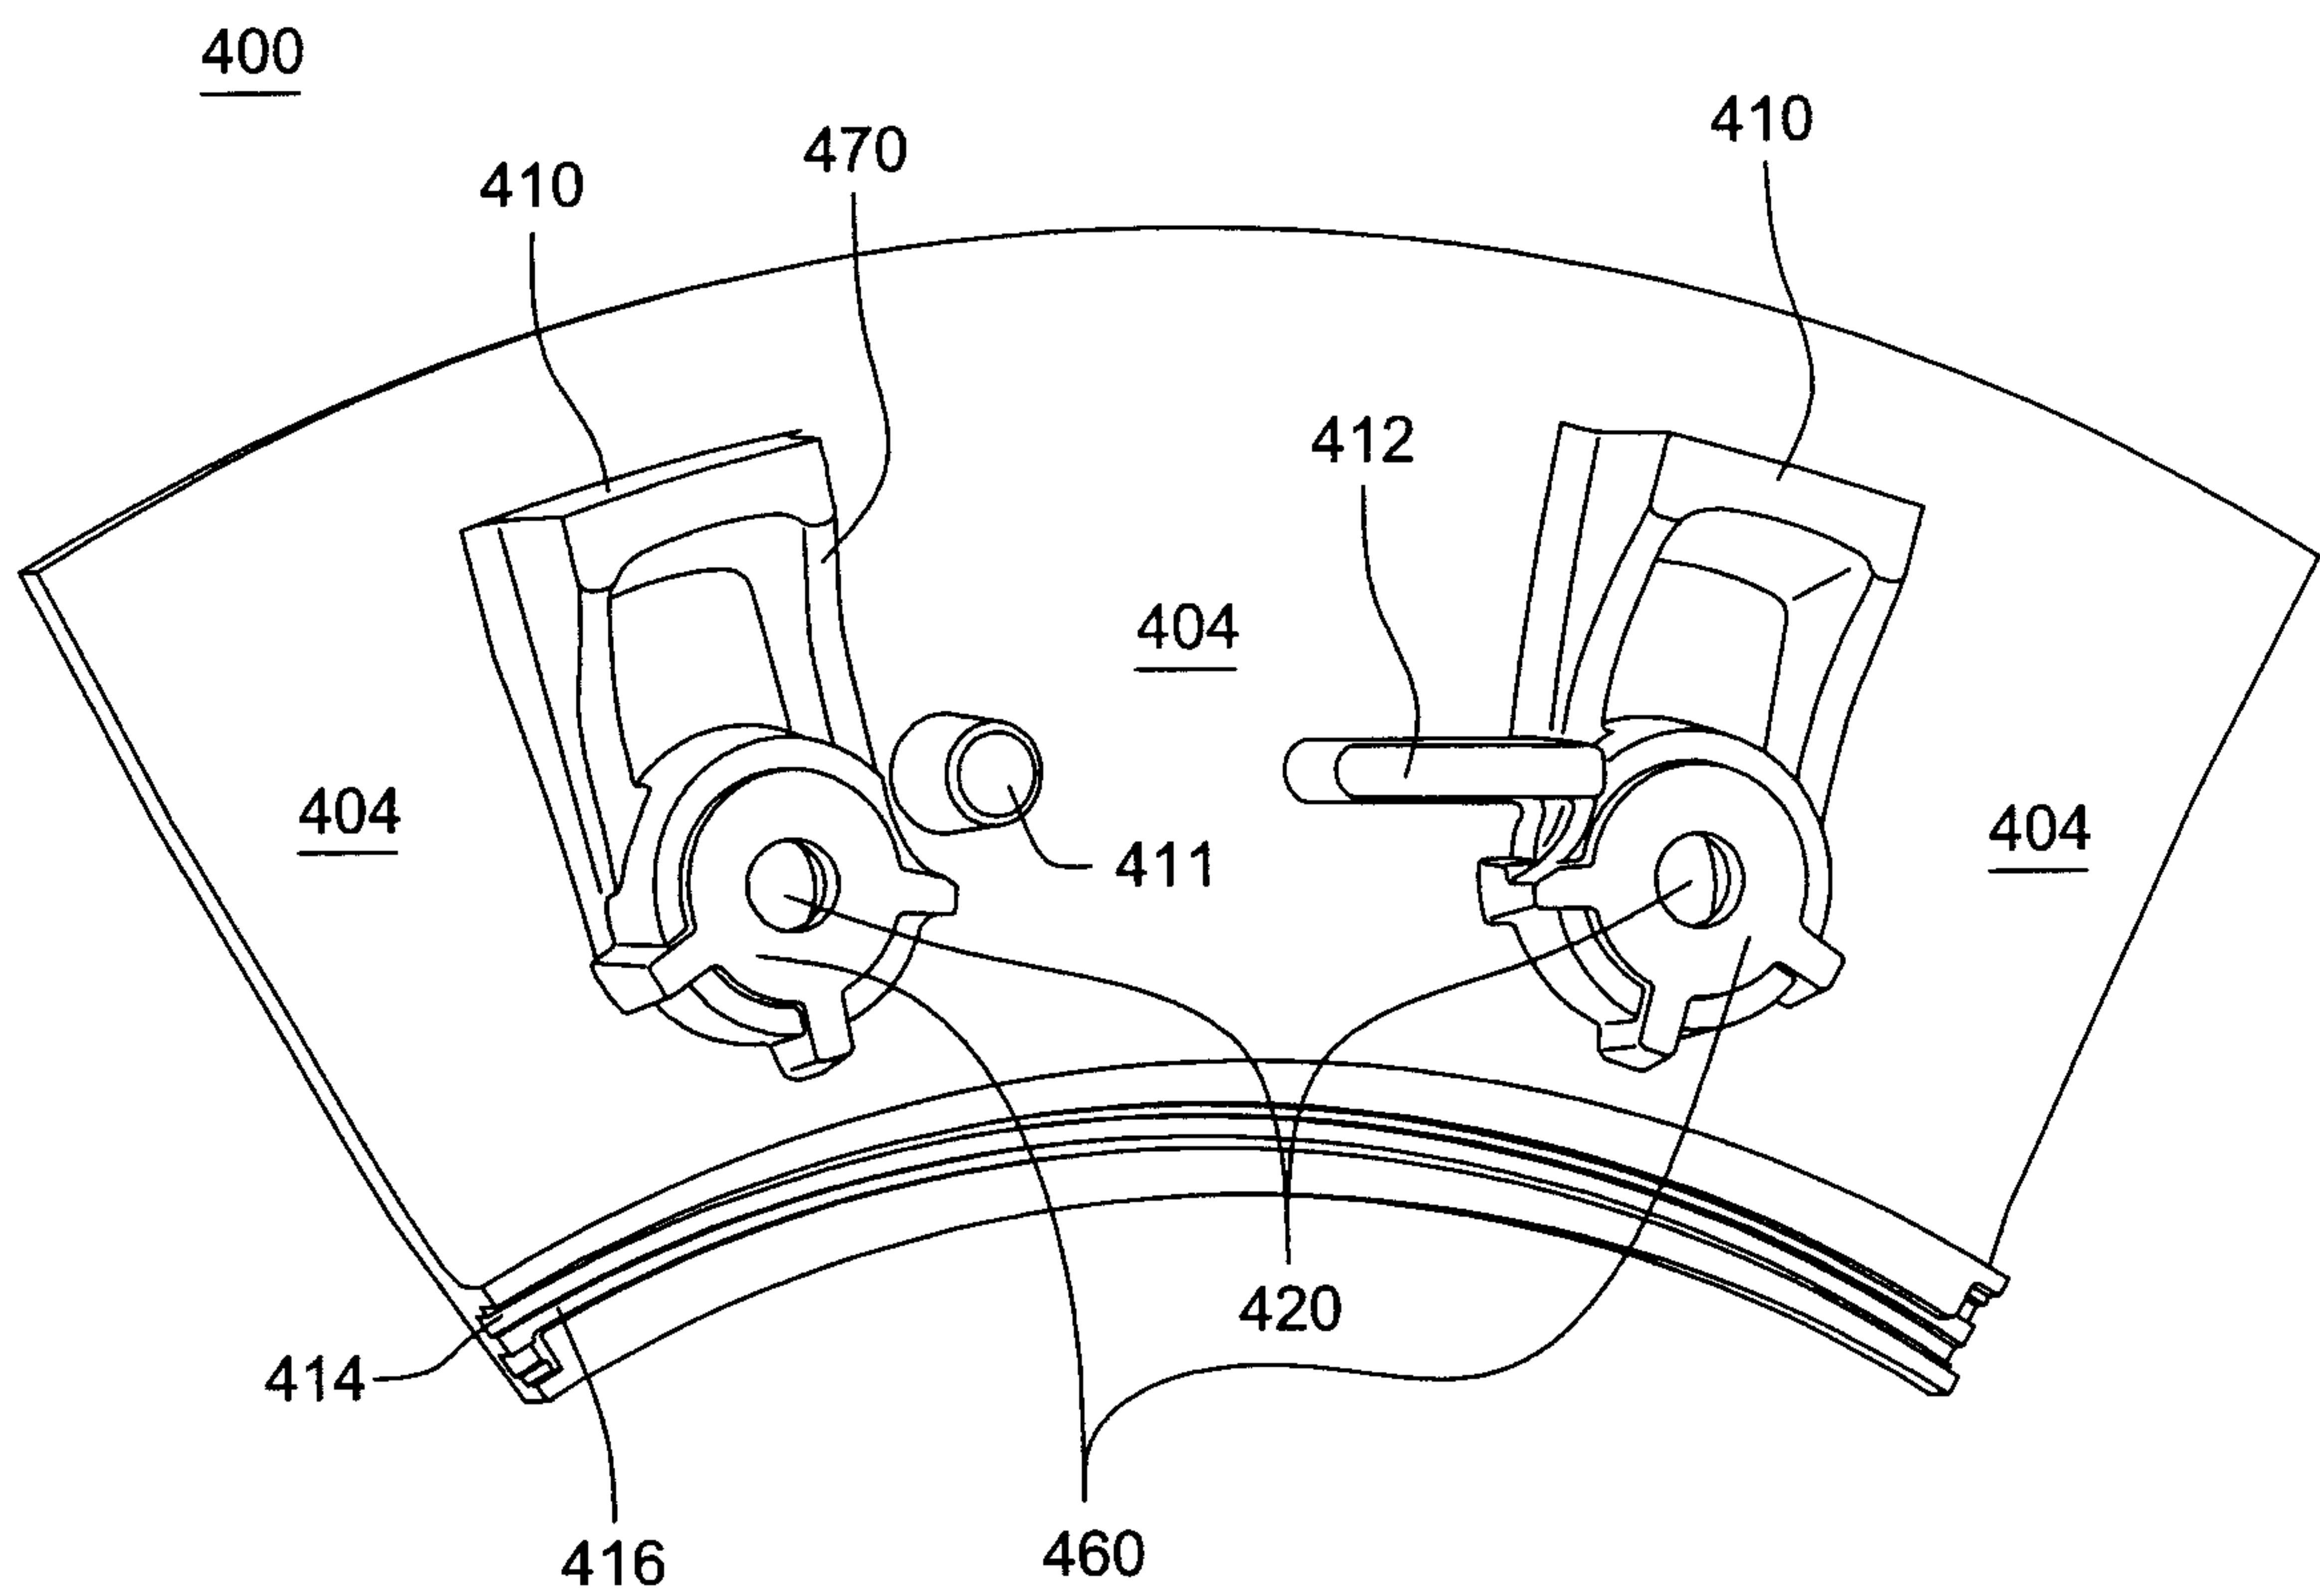

**FIG. 11**

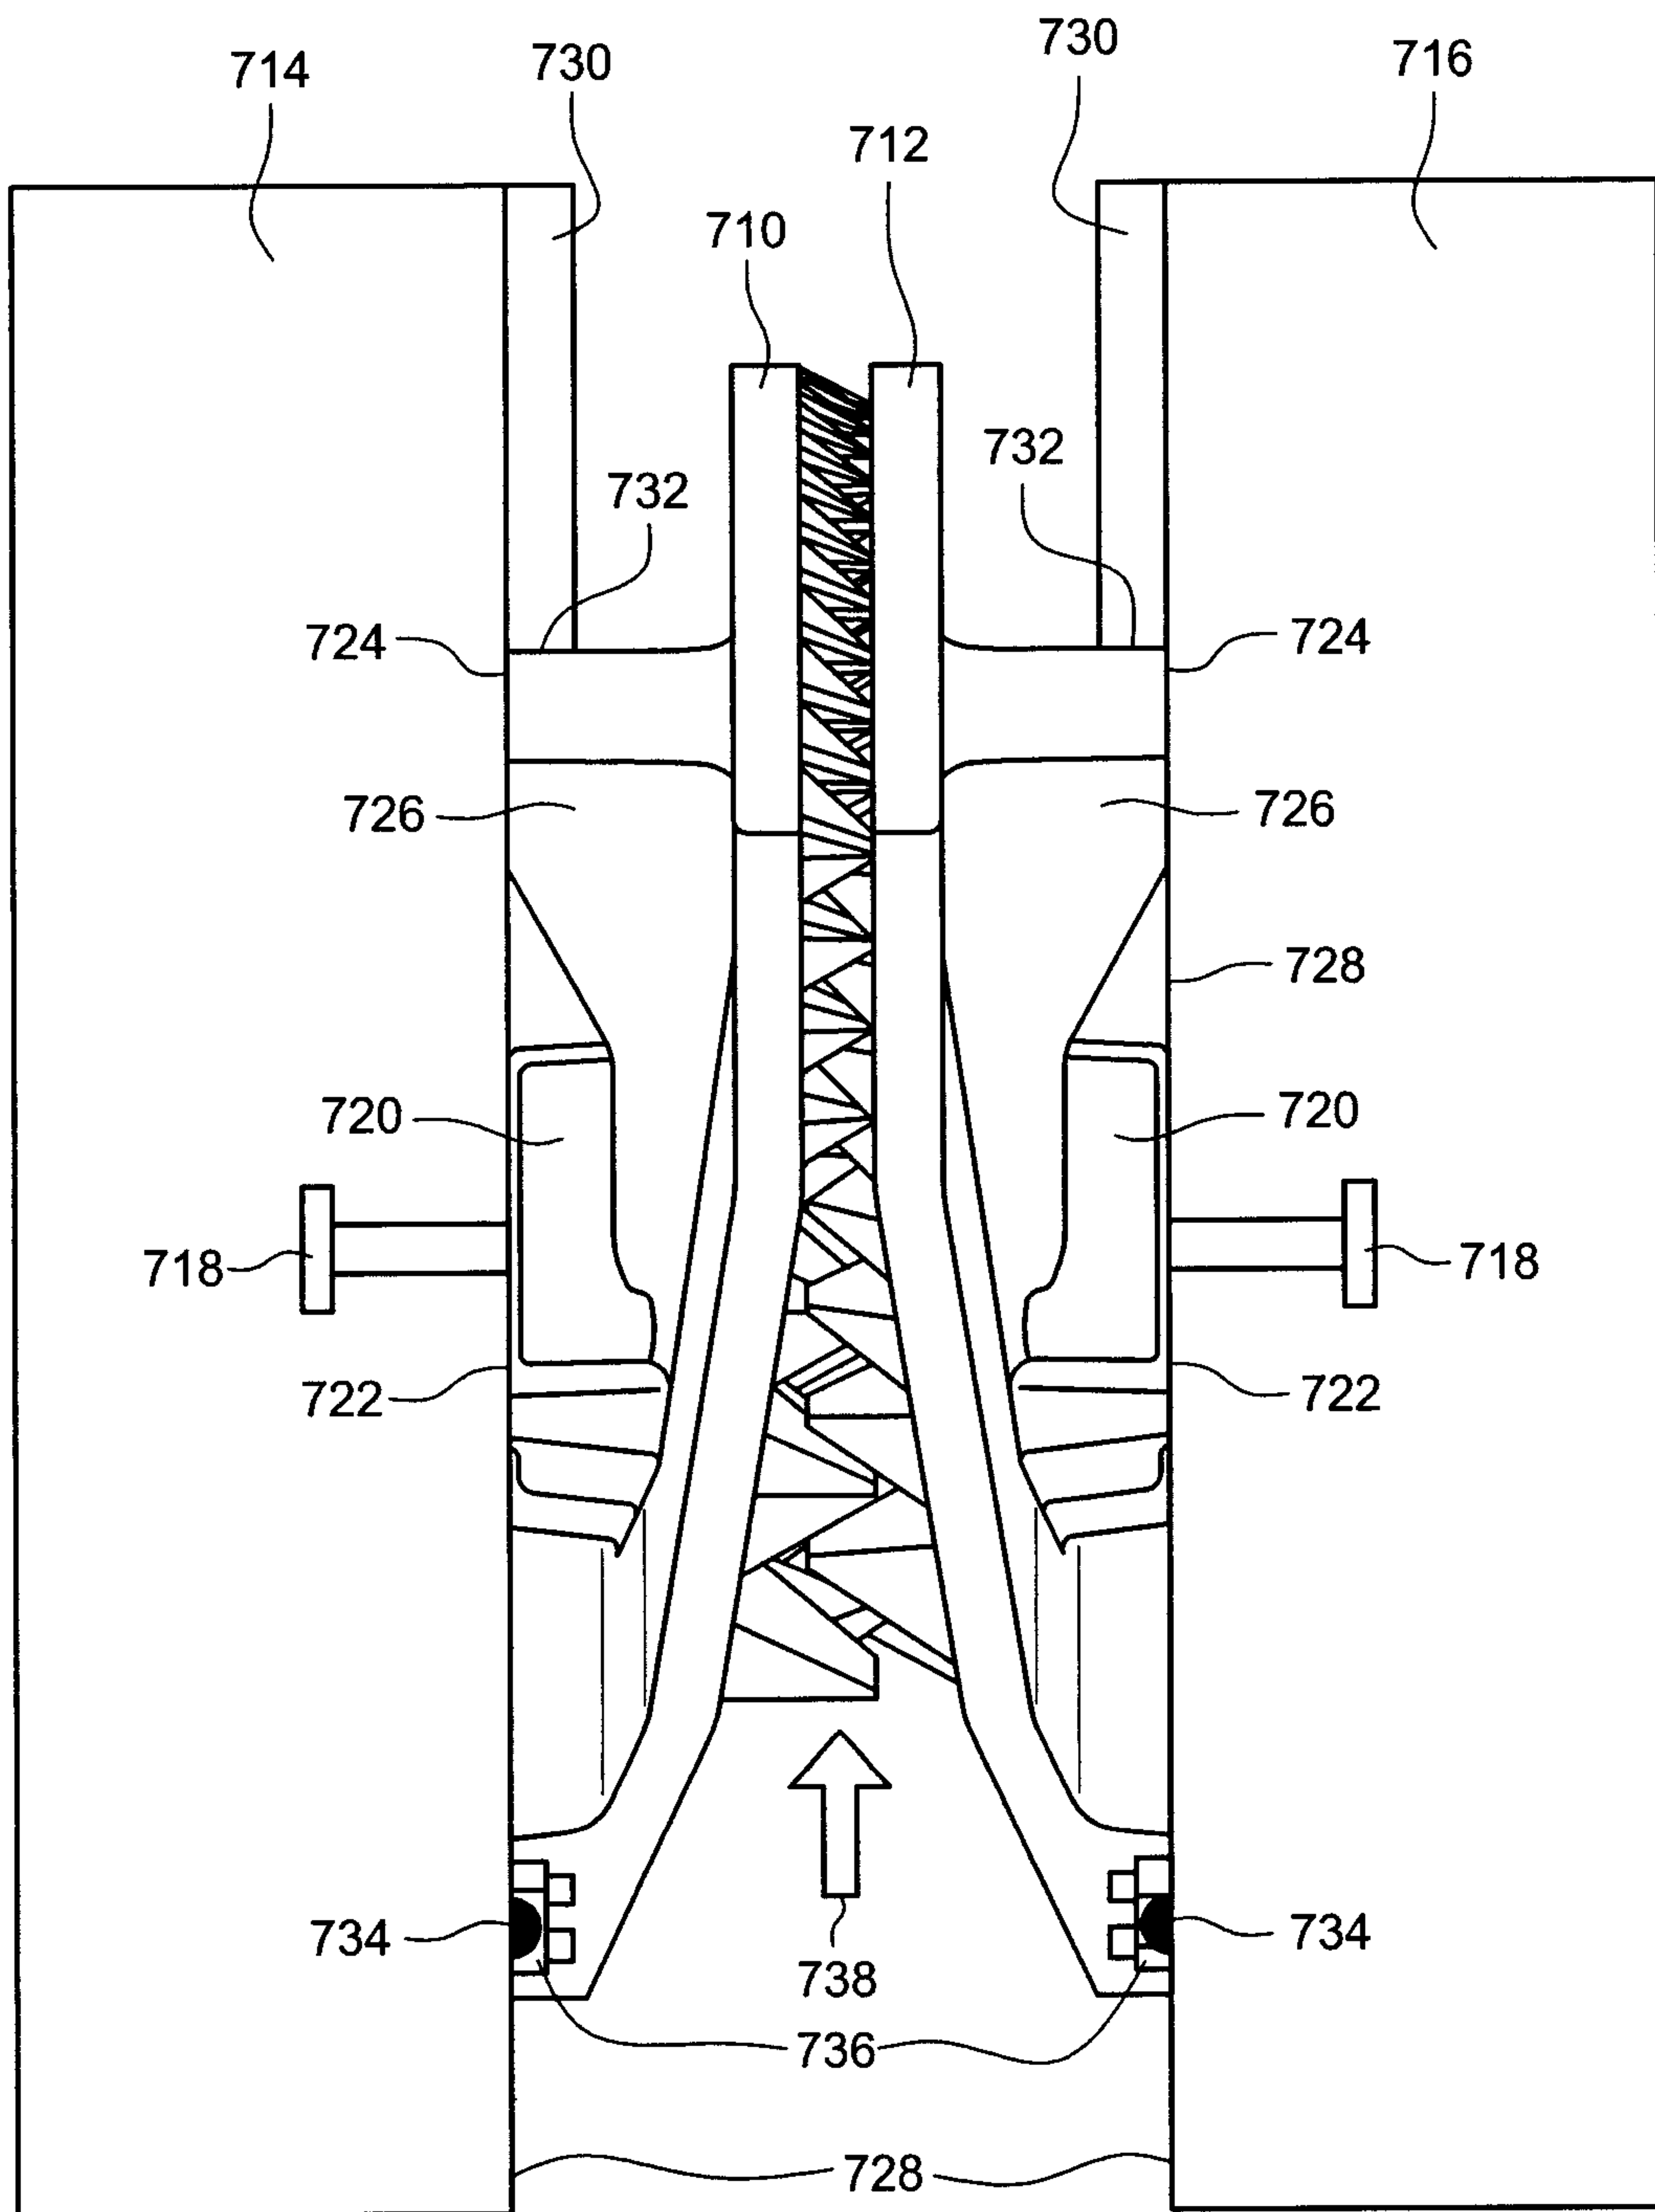

**FIG. 12**

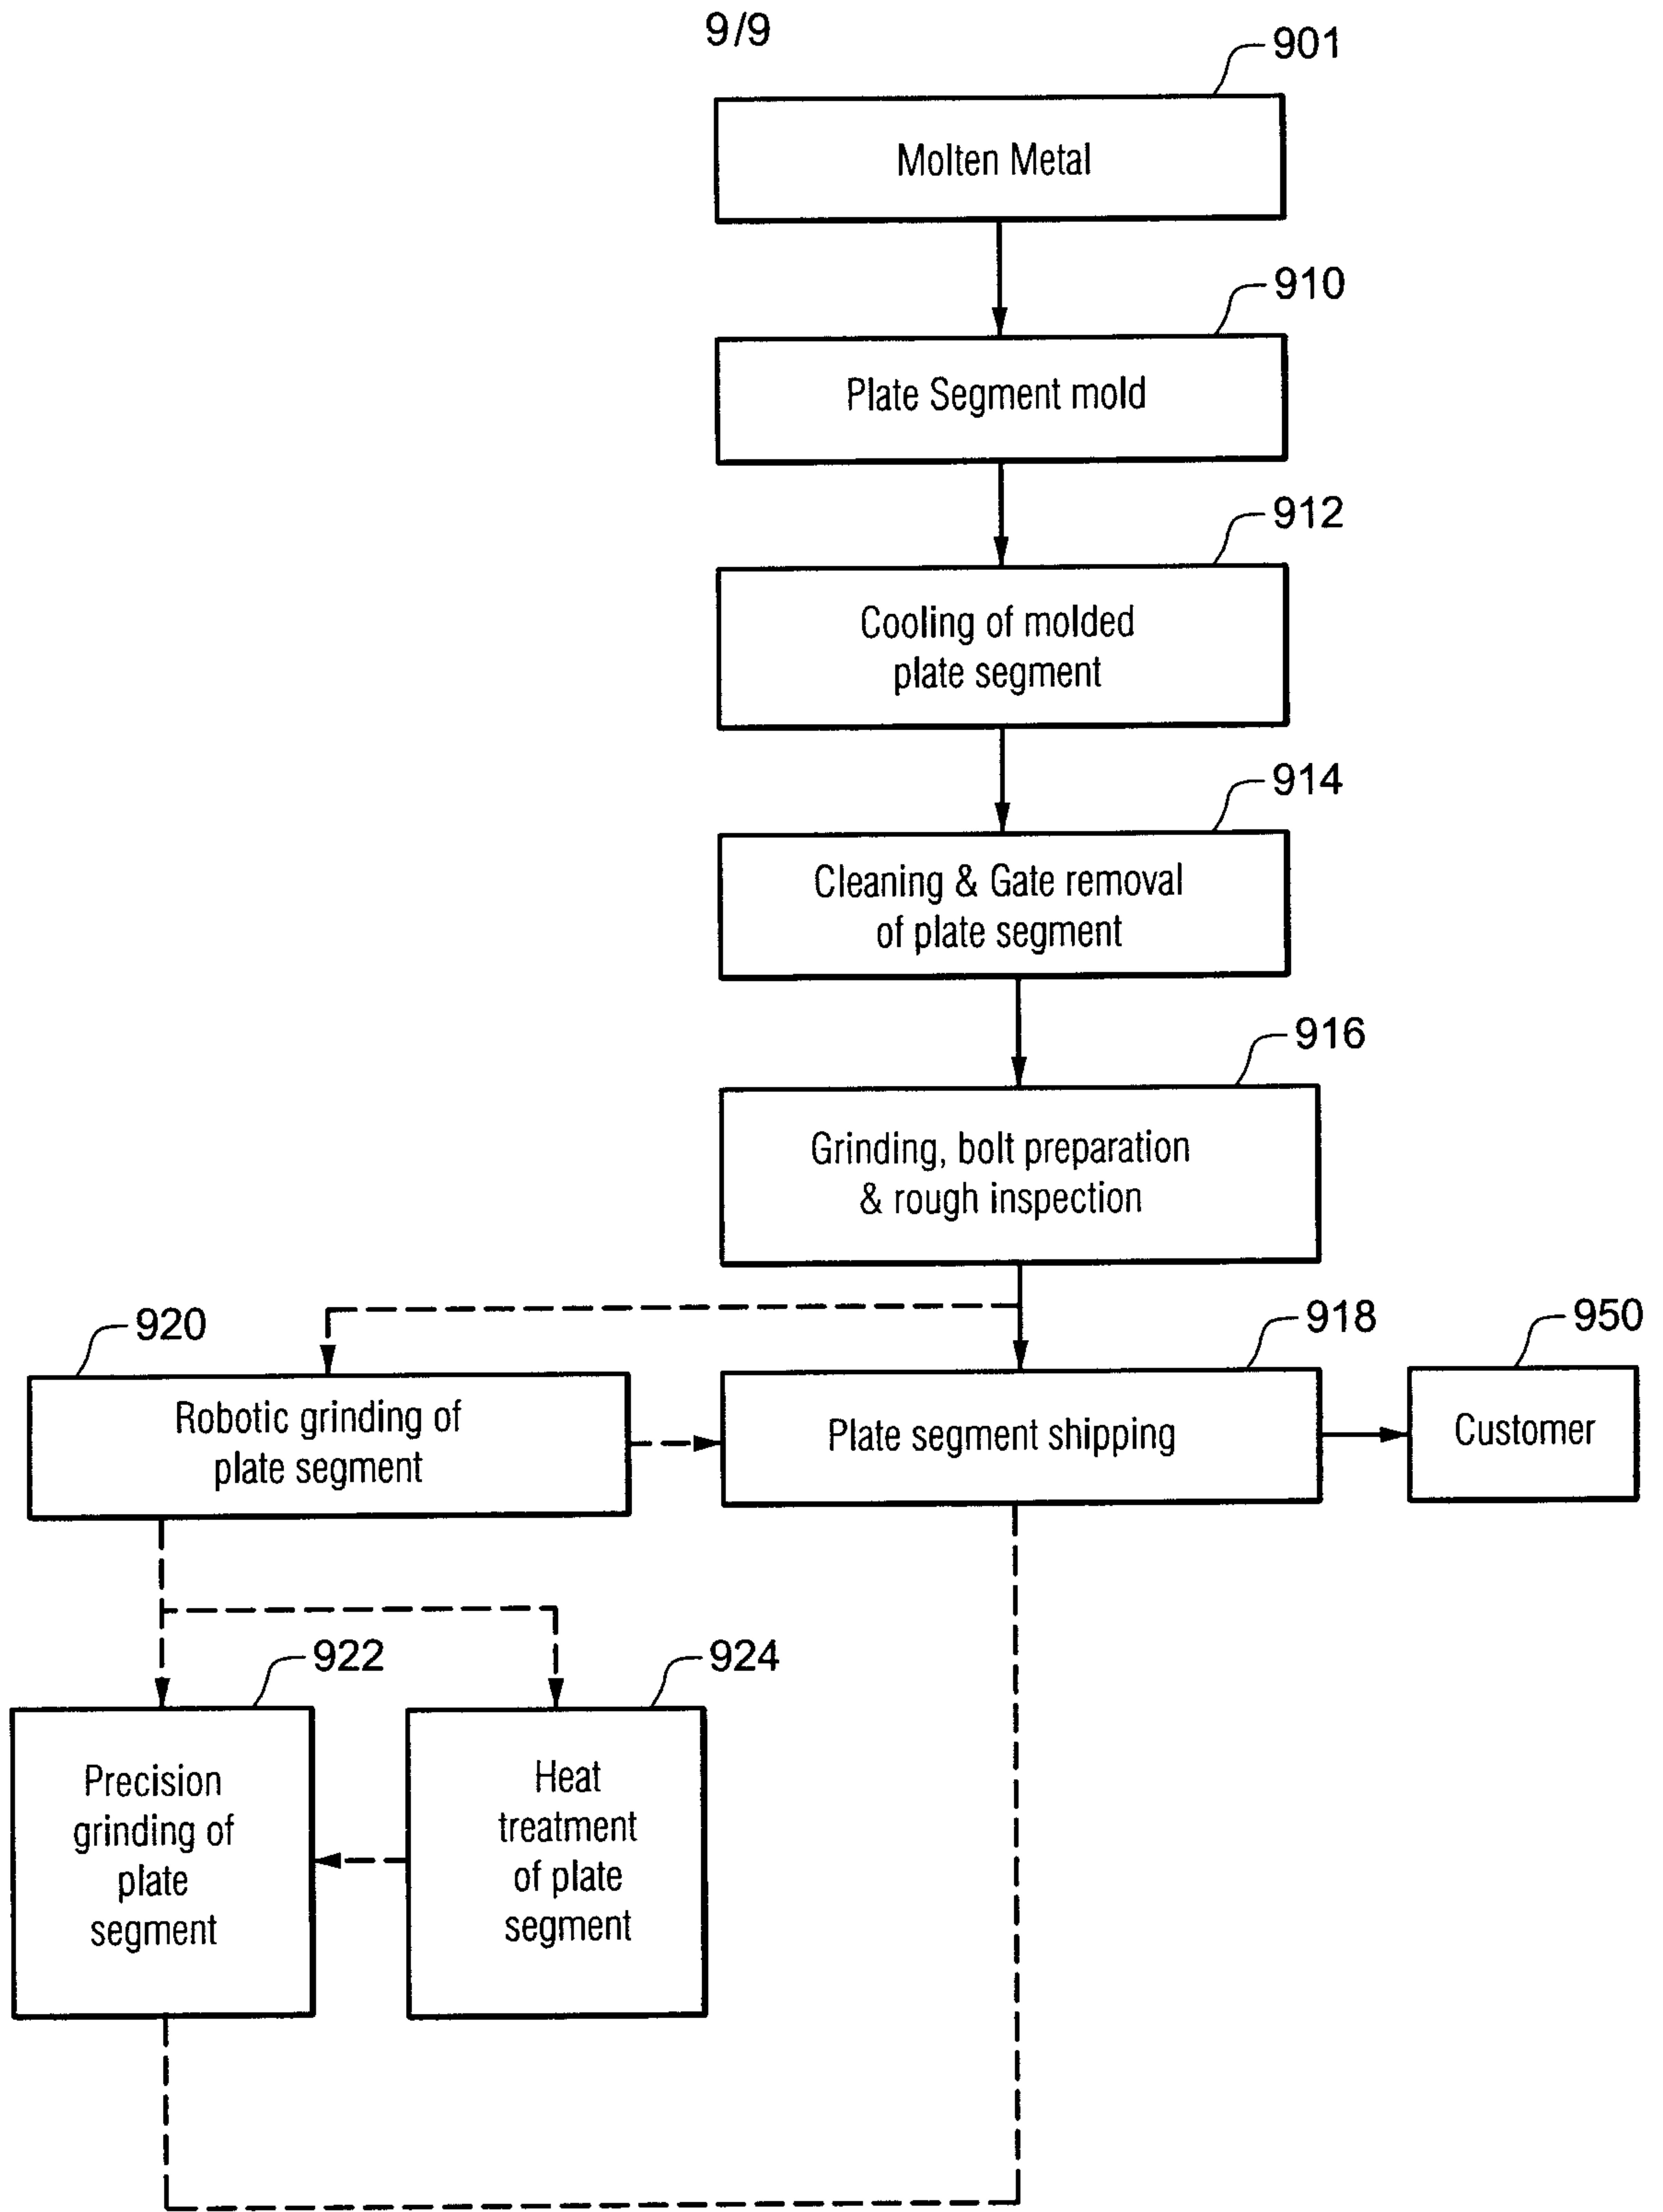


FIG. 13

200

