

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 August 2005 (04.08.2005)

PCT

(10) International Publication Number
WO 2005/071141 A1

- (51) International Patent Classification⁷: **C23C 24/08**, 26/00, 30/00
- (21) International Application Number: PCT/GB2005/000224
- (22) International Filing Date: 21 January 2005 (21.01.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0401379.3 22 January 2004 (22.01.2004) GB
0409078.3 23 April 2004 (23.04.2004) GB
0421985.3 4 October 2004 (04.10.2004) GB
- (71) Applicant (for US only): **THE VICTORIA UNIVERSITY OF MANCHESTER** [GB/GB]; Oxford Road, Manchester M13 9PL (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **XIAO, Ping** [GB/GB]; 19 Thorn Road, Bramhall, Stockport, Cheshire SK7 1HG (GB). **WANG, Xin** [CN/GB]; 48 Rossett Avenue, Timperley, Alterincham, Cheshire, WA15 6EX (GB).
- (74) Agents: **GOODWIN, Mark** et al.; Wilson Gunn M'Caw, 5th Floor, Blackfriars House, The Parsonage, Manchester M3 2JA (GB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



WO 2005/071141 A1

(54) Title: CERAMIC COATING

(57) Abstract: The present invention relates to a green ceramic coating composition, the composition comprises nano-sized particles dispersed within a carrier medium together with preformed particles. The composition optionally comprises an infiltration medium.

Ceramic Coating

The present invention relates to a ceramic coating and a method of preparing and applying said coating.

Ceramic coatings are typically applied to substrates to provide protection, in particular thermal protection to the underlying substrate. These substrates tend to be metallic.

One desirable method of producing a ceramic coating is by a slurry process. A slurry process involves preparing either an aqueous or non-aqueous slurry, applying the slurry to the substrate to form a layer or multi layer coating. The coating is then heat treated or sintered in order that a ceramic coating is produced. The coating prior to sintering is referred to as a green coating.

Many ceramic coatings comprise zirconia. However, zirconia is not generally suitable for application to a metallic substrate by a slurry process.

Typical zirconia coatings comprise crystallite of a conventional size typically in the range from about 1 to about 10 microns. In order to produce a ceramic coating these conventional sized zirconias require sintering temperatures of around 1400°C, clearly the metallic substrate cannot withstand such a temperature. Furthermore, the green coating tends to shrink during drying and sintering, causing an uncompromising dimensional mismatch between the coating and the substrate and thereby leading to the coating cracking and/or spalling.

Therefore, no crystalline ceramic coatings of a thickness greater than 100µm have been produced by a slurry method.

However, ceramic coatings of a thickness greater than 100µm are routinely utilised as a thermal barrier coating (TBC) in gas turbine engines.

5 Typically, a thermal barrier coating system comprises of yttria stabilised zirconia (YSZ) coat which adheres to the substrate via a layer of Al₂O₃ which is present on the surface of the substrate.

However, the use of these thermal barrier coatings is limited by their long-term durability.

10 Studies have shown that it is essential for TBC's to have a low elastic modulus in the plane of the coating to minimise the development of thermal expansion mismatch stresses and a low thermal conductivity perpendicular to the coating to minimise the heat transport through the coating to the underlying substrate. In order to address this, attempts have been made to control the porosity of the coatings by
15 way of modifying the method of application of TBC's.

Thermal barrier coatings are currently applied by thermal spraying and electron beam physical vapour deposition (EPPVD).

However, whilst these techniques allow variation in the porosity of the coating they are expensive and require high capital investment and high operation cost.

Furthermore, both are so-called light-on-sight techniques. That is, techniques that are only suitable for the application of TBC's to visible areas of a substrate and as such it is impossible to deposit coating material on inner surfaces of deep holes and other hard to reach places.

5 In an attempt to address the aforesaid problems, researchers have turned to nano-size technology. The past decade has seen enormous investment in nano particles and nano-structure technologies. Nano-size technology not only delivers unusual properties and performance of components, but it also provides opportunities to revolutionise material processing techniques.

10 As mentioned previously conventional size crystalline zirconias are sintered at temperatures around 1400°C. Clearly, it is not possible to sinter such coatings whilst they are in contact with a metallic substrate as the substrate cannot withstand such temperatures.

The use of nano-size zirconias enables the sintering temperature to be reduced
15 to around 975°C, However, this temperature is still too high for some metallic substrates.

Therefore, it is highly desirable to develop a coating and a method for its application which enables ceramic coatings to be sintered at a low temperature when in direct contact with a metallic substrate.

Such a system would reduce the cost of coating a metallic substrate, and offer more flexibility in that a coating could be applied to components with complex geometries.

According to the first aspect of the present invention there is provided a green
5 ceramic coating composition comprising nano-sized particles dispersed within a carrier medium together with pre-formed particles.

According to the second aspect of the present invention there is provided a method for producing a ceramic coating upon a substrate comprising the following steps: preparing a nano-suspension containing nano-sized ceramic particles,
10 preparing pre-formed particles, concentrating the nano-suspension to form a nano-slurry, mixing the preformed particles with the nano-slurry, applying the aforesaid mixture to the substrate, and heat treating the system such that the aforesaid particles become sintered thus producing a ceramic coating.

As referred to herein 'carrier medium' is intended to refer to a carrier medium
15 for the ceramic particles. The particles are insoluble in the carrier medium.

Advantageously, the composition of the present invention can be used to produce a ceramic coating which does not crack or spall during the drying and sintering procedures. Significantly, the ceramic coating produced from the composition of the present invention comprises a crystalline nano-structure.

Moreover, the composition of the present invention can be used to produce a coating having a thickness of upto 500 μ m. This thickness may be achieved by the application of one or more layers of the composition of the present invention.

Furthermore, the method of the present invention is a non-light-of-sight
5 technique such that all areas, including non-visible areas, of a substrate having a complex geometry may be coated.

A significant advantage of the present invention is that the combination of pre-formed particles with nano-size particles enables the coating composition to be sintered at a lower temperature which a metallic substrate can withstand. This is
10 thought to arise as a result of the lower temperature binding effect of nano-sized particles.

A further advantage of the present invention is that the large pore structure and nano-sized grain structure gives rise to a coating has a low thermal conductivity such that the underlying metallic substrate is protected from heat.

15 Due to the use of a combination of pre-formed particles and nano-sized particles the morphology and distribution of porosity of the coating can be specifically tailored having regard for the application of the coated substrate.

The substrate of the present invention is any metallic substrate and its choice is limited only by the temperature of the method described herein. Suitable examples

include Fecralloy, titanium alloys, aluminium alloys, stainless steel, inconel, Hastelloy, Monel alloy, Mumetal, and Platinum Aluminide.

Nano-sized particles can be synthesised using various techniques, such as chemical precipitation, sol-gel, hydrothermal synthesis, chemical vapour
5 condensation, inert gas condensation, etc.

A nano-suspension can be prepared either by dispersing nano-sized particles within a carrier medium or applying wet chemical techniques, e.g. hydrothermal methods, which produce a suspension system directly without the necessity of dispersion.

10 Preferably the size of the nano-sized particles is less than 200nm and more preferably less than 100nm. Advantageously, this smaller particle size provides a better binding effect such that a lower sintering temperature can be utilised to achieve a cohesive coating. Therefore, the nano-sized particles of the present invention preferably have a narrow particle size distribution, typically in the range from 10nm
15 to 100nm.

The carrier medium of the present invention is preferably water or a polar organic carrier medium, for example ethanol and isopropyl acetate (IPA).

The nano-sized particles are dispersed in the carrier medium such that a nano-suspension is afforded. As referred to herein a nano-suspension is a system whereby

the nano-sized particles have a low solid loading, of typically less 10wt%. A nano-slurry as referred to herein is a system whereby the nano-sized particles have a higher solid loading, typically greater than 20wt%.

Suitable nano-sized particles may be derived from any of the following
5 species which may be used alone or in combination; oxides, borides, silicides, phosphates, silicates, sulfides of any of the following species boron, aluminium, silicon, titanium, zirconium, hafnium, vanadium, niobium, tantalum, chromium, molybdenum, tungsten, lanthanum, yttrium, iron, cobalt and nickel.

Particularly preferred examples of suitable nano-sized particles are zirconias, alumina,
10 magnesia, titania, aluminium phosphate, zirconium silicate etc.

An important aspect of the present invention is the preparation of the pre-formed particles. Typically these particles have a particle size ranging from 5 μ m to 300 μ m and preferably from 10 μ m to 150 μ m. The nano-structure of the pre-formed particles may comprise crystallites in the order of 100 to 200nm in size.

15 Preferably the preformed particles have a variety of different shapes and these particles may be derived from any suitable ceramic material. The pre-formed particles comprise a crystalline nano-structure.

The pre-formed particles may be such as to form a framework wherein at least some of the pre-formed particles contact each other. The extent of the framework

depends upon the loading of the pre-formed particles. Advantageously, this feature provides strength to the coating of the present invention.

The pre-formed particles can be prepared using colloidal processing. This approach minimises defects formed by dry powder methods.

5 The pre-formed particles are typically prepared from a nano-suspension or nano-slurry of a suitable ceramic material by known methods such as electrophoretic deposition (EPD), dip coating, blade coating, spray drying and air drying.

Suitable ceramic materials which may be used alone or in combination include those derived from oxides, borides, silicides, silicates, phosphates, sulfides of any of
10 the following species boron, aluminium, silicon, titanium, zirconium, hafnium, vanadium, niobium, tantalum, chromium, molybdenum, tungsten, lanthanum, yttrium, iron, cobalt and nickel.

In a preferred embodiment of the method of the present invention the pre-formed particles are prepared by air-drying. A concentrated nano-slurry is allowed to
15 dry in air at room temperature to form a solid compact. The solid compact is then crushed and ground. The ground material is then classified by way of a sieve. The ensuing pre-formed particles are of irregular shape, but are nevertheless broadly equiaxed.

In a further preferred embodiment of the method of the present invention the pre-formed particles are prepared by dip coating a nano-slurry on a substrate, followed by drying and peeling ensuing dried coating from the substrate. The peeled coating is crushed and ground and sieved in order to size classify the pre-formed
5 particles.

In a particularly preferred embodiment of the method of the present invention the pre-formed particles are prepared by a combination of EPD and dip coating. This combination produces pre-formed particles having a plate-like physical form or small hollow tubes.

10 As varying the geometries of the pre-formed particles results in ceramic coatings having different microstructures and therefore different mechanical and thermal properties the choice of method for preparing the pre-formed particles can be used to influence the properties of the ceramic coating. For example, the thickness and aspect ratio of the plate-like particles can be adjusted by varying the
15 slurry/suspension concentration, deposition time and deposition rate

The present invention adopts a 'bricks and mortar' approach whereby the pre-formed particles are the 'bricks' and the slurry/suspension of nano-sized particles is the 'mortar'.

A key step in the method of the present invention is the concentration of the nano-suspension to a nano-slurry with a desired solid loading. The nano-slurry tends to be in the form of a paste. The nano-suspension is preferably concentrated by way of freeze drying or heat drying in either air or vacuum.

5 The solid loading of the nano-slurry is preferably 20 to 60 wt%.

The ratio of the pre-formed particles to the nano-sized particles is in the range from 1:5 to 1:1 and preferably is 2:5 on a dry weight basis. Once concentrated, the paste is preferably stored in a sealed container in order that the paste does not dry out prematurely.

10 In order to aid application of the paste to the substrate and change the rheology of the paste any of the following may be added to the paste either alone or in combination; water, at least one polar dispersing medium such as ethanol and at least one polymeric surfactant/binder. Suitable polymeric surfactants/binders include poly-methacrylic acid (PMAA), poly-methylmethacrylate (PMMA), polyvinyl alcohol and
15 methyl cellulose. Such polymeric surfactants/binders may be added to the paste in quantities upto about 5% w/w. The use of pastes having differently shaped preformed particles enables the pore architecture of the coatings to be manipulated. Such manipulation leads to distinctive thermal conductivity of the coatings. For example the use of plate-like pre-formed particles produced by EPD gives rise to a coating

having a parallel pore structure and a relatively lower thermal conductivity. In contrast to this, the use of pre-formed particles with irregular shapes gives rise to a coating having a random pore structure and therefore a relatively higher thermal conductivity. The coatings of the present invention may have a thermal conductivity
5 less than $1.0 \text{ w/m}^{\circ}\text{C}$ and a porosity of more than 30 vol%. Typical plasma sprayed TBC's have been found to have a thermal conductivity of $1.22 \text{ w/m}^{\circ}\text{C}$.

It has long been thought that the relatively low thermal conductivity of TBC's produced by PS and EBPVD techniques is due to the meta-stable tetragonal phase of zirconia present in the coating. However, the coatings of the present invention
10 comprise only stable phases i.e. tetragonal and cubic phases. Thus, the coatings have no meta-stable phase, but still have a lower thermal conductivity than plasma sprayed coatings.

The coating composition of the present invention may be used to provide a multi-layered ceramic coating. Furthermore, each coat may comprise pre-formed
15 particles having different architecture. For example, a paste comprising pre-formed particles having a plate like structure may be applied to a substrate and following heat treatment of that paste a second paste comprising irregularly shaped pre-formed particles may be applied thereto and heat treated

The green coating of the method of the present invention may be heat treated at any temperature in the range from 300 to 1200°C. However, heat treatment at 500°C produces a ceramic coating which exhibits good strength and adhesion.

In order to increase the coating integrity and improve the coating/substrate
5 adhesion, the coating is preferably infiltrated with an infiltration media after its heat treatment.

The infiltration media may be a suspension or a slurry.

Advantageously, this infiltration modifies the porosity of the coating and increases the inter-particle connectivity between the pre-formed particles of the
10 coating.

The infiltration process preferably takes place in a pressure chamber at a pressure preferably greater than 1MPa. However, prior to infiltration the chamber is vacuum-pumped in order to eliminate air and/or absorbed gas species from the pores of the green coating.

15 The infiltration media may contain exclusively nano-particles or a mixture of nano-particles and conventional fine powders dispersed in water, acetone, acetylacetone or other similar polar carrier medium. The solid loading of the infiltration suspension or slurry is preferably in the range from 5 to 80wt%.

In addition to infiltration with the media referred to herein, the coating may also be infiltrated with other infiltration media. The choice of the infiltration media is determined by the desired properties of the final product. Suitable examples of infiltration media include, but are not limited to, any of the following either alone or
5 in combination molten metals, such as molten aluminium, molten magnesium; molten salts, such as molten silicates and molten borates; metallic particles dispersed within a carrier medium, such as aluminium/alcohol suspension; polymeric materials, such as polyurethane, epoxy resin, ethylene copolymers, cyanoacrylates; and inorganic
10 binders, such as aluminium phosphate/phosphate acid mixture.

The infiltration media may also be introduced into green ceramic coatings in
10 addition or in the alternative to the nano-suspension/slurry as hereinbefore described thereby forming a composite coating material.

Thus, according to a further aspect of the present invention there is provided a
green composite coating material comprising pre-formed particles dispersed within a
15 carrier medium together with an infiltration media and/or nano-sized particles.

According to a further aspect of the present invention there is provided a
method for producing a composite coating upon a substrate comprising the steps of:
preparing pre-formed particles, preparing an infiltration medium, mixing together said
particles and said medium, optionally adding to the mixture a nano-slurry or

suspension, applying the aforesaid mixture to the substrate, and heat treating the system such that the aforesaid particles become sintered/set thus producing a composite coating.

The composite coating may be infiltrated in order to manipulate the porosity characteristics. Suitable infiltration media are described above.

According to a further aspect of the present invention there is provided a method of infiltrating a composite coating comprising the steps of: preparing a substrate having a composite coating as hereinbefore described, applying to the said coating an infiltration medium and/or nano-slurry/suspension, and heat treating the aforesaid infiltrated coating.

Advantageously, the use of an infiltration medium enables the initial green coating to be heat treated at a lower temperature than similar coatings which lack an infiltration medium. Therefore, this allows the use of metallic substrates, such as titanium alloys and aluminium alloys, magnesium alloys, which have been unsuitable for the applications described herein due to their low melting point. In any event, the infiltration process has been found to contribute to the mechanical strength of the coating.

Once infiltrated, the coating is then dried and heat treated at a temperature in the range from 300 to 1200°C, either in a vacuum or in air.

The infiltration process and subsequent heat treatment may be repeated until the desired density and architecture are achieved.

According to a further aspect of the present invention there is provided a method for producing a ceramic/metal composite coating upon a substrate comprising the steps of: preparing pre-formed particles, preparing an nano-slurry, mixing together said particles and said slurry, applying the aforesaid mixture to the substrate, and heat treating the system to produce a partially sintered ceramic porous coating; filling the pores and voids in aforesaid ceramic porous coating by employing electrochemical plating and/or electroless deposition with metallic materials, thus forming a ceramic/metal composite coating.

Suitable metallic materials that may be incorporated in the ceramic/metal composite coating by electrochemical plating and/or electroless deposition may be a pure metal or as an alloy of following elements: iron, cobalt and nickel, molybdenum, tungsten, lanthanum, yttrium, vanadium, niobium, tantalum, chromium, boron, aluminium, silicon, titanium, zirconium, hafnium.

In order that the present invention be more readily understood the present invention will now be described by way of example only and with reference to the following examples and drawings in which:

Figure 1 shows a representation of irregular pre-formed particles prepared in accordance with one embodiment of the present invention;

5 Figure 2 shows a representation of plate-like preformed particles prepared in accordance with one embodiment of the present invention;

Figure 3 is a graph showing the thermal diffusivity of a variety of coatings having differing pore structures;

10 Figure 4 is a graph showing the thermal conductivity of a variety of coatings according to the present invention, said coatings having differing pore structures;

Figure 5 is a graph showing the effects of infiltration on the porosity of the coating.

15 Figure 1 shows the irregularly shaped pre-formed particles that are typically produced by air-drying.

Figure 2 shows the plate-like pre-formed particles that are typically produced by EPD coating.

Figure 3 shows how the porosity of the coating changes the thermal diffusivity of the coating. It can be seen that the coating with random pore structure has a similar

thermal diffusivity to that of plasma-sprayed coating, while the coating with parallel pore structure has a much smaller thermal diffusivity. Measured by mercury porosimeter, the plasma sprayed coating was found to have 18% porosity, the coating with random pore structure had 28% porosity, and the coating with parallel pore structure had 30% porosity. Therefore, thermal diffusivity is dependent mainly on pore structure, while porosity does not seem to have an influence on thermal diffusivity.

Figure 4 shows how the porosity of the coating changes the thermal conductivity of the coating. It can be seen that the coating with random pore structure has a lower thermal conductivity than that of plasma-sprayed coating while the thermal conductivity of the coating with parallel pore structure is only about a quarter of that of plasma sprayed coating. Therefore the thermal conductivity is dependent not only on pore structure, but also on porosity.

Figure 5 shows how infiltrating the coating changes the porosity of the coating. It can be seen that as more infiltration is carried out on the coating, the less porous the coating is. Also it appears that large pores are the first to be filled by infiltration, indicating that the porosity distribution can be modified by the infiltration operation.

EXAMPLE 1

An aqueous nano-suspension of ZrO_2 doped with 5.3wt% Y_2O_3 and 0.25wt% Al_2O_3 was used as the starting material. The original nano-slurry of 24wt% in solid load concentration was diluted with distilled water to 3wt% in solid loading. EPD was employed for the preparation of plate-like pre-formed particles. For EPD, an electrical field of 3-5volt/cm and deposition time of 2-5 minutes were used. The deposited layer obtained as such was about 5-10 μ m in thickness. Upon crushing and sieve classification, plate-like particles of 5~20mm in thickness and 50~250mm in length were obtained. Further on heat treatment at 1200°C, the plate-like particles were consolidated to dense entities. A paste was prepared by mechanically blending of 5 grams of plate-like particles with 5 grams of nano-slurry for which the solid loading is 53wt%. The paste was plastered onto Fecralloy substrate. After being dried at room temperature and heat treated at 1200°C for 1h in air, coating pre-forms of 100~500mm in thickness were obtained with good integrity. The plate-like particles were found to be predominately oriented in parallel to the substrate. The pre-forms were further subjected to infiltration with a nano-slurry of 48wt% in solid loading, under a pressure of 1 MPa and heat treatment at 800°C. The infiltration and subsequent heat treatment were repeated for twice and finally the coatings were sintered at 1200°C for 1h.

20 EXAMPLE 2

The same procedure was followed as in sample 1, except that the first time heat treatment was conducted at 500°C and final sintering was conducted at 1100°C; and the repetition of the infiltration and heat treatment was five times.

EXAMPLE 3

The same procedure was followed as in sample 1, except that the stainless steel substrate was used and first time heat treatment was conducted at 500°C, and final sintering was conducted at 900°C and the repetition of the infiltration and heat
5 treatment was five times.

EXAMPLE 4

The same procedure was followed as in sample 1, except that the pre- formed particles were in irregular shape which was statistically equiaxed, the size of the preformed particle was 10~100mm.

10 EXAMPLE 5

An aqueous nano-suspension of ZrO_2 doped with 8wt% Y_2O_3 was used as the starting material.

The original suspension (23wt%) was diluted with distilled water to 5~10 wt% in solid loading.

15 EPD was employed for the preparation of plate-like preformed particles. For EPD, an electrical field of 5volt/cm and deposition time of 2~5 minutes were used. The deposited layer obtained as such was about 5~10 μ m. Upon crushing and sieve classification, plate- like particles of 30~150 μ m in length and 5~10 μ m in thickness were obtained. Further on heat treatment at 1200°C, the plate- like particles were
20 consolidated to dense entities. A paste was prepared by mechanically blending of 3 grams of plate- like particles with 3 grams of nano-slurry for which the solid loading is 57wt%. The paste was plastered onto Fecralloy substrate. After being dried at room temperature and heat-treated for the first time at 1030°C for 1h in vacuum (<10⁻⁵Torr), coating pre-forms of 100~500mm in thickness were obtained with good

integrity. The plate- like particles were found to be predominately oriented in parallel to the substrate. The pre- forms were further subjected to infiltrating with a nano-slurry of 40~60wt% in solid loading, under a pressure of 1 MPa and heat treatment at 1030°C in vacuum ($<10^{-5}$ Torr). Finally the coatings were sintered at 1200°C in air
5 for 1h.

EXAMPLE 6

The same procedure was followed as in sample 5, except that the first time heat treatment was conducted at 500°C in air; and the repetition of the infiltration and heat treatment was five times.

10 EXAMPLE 7

The same procedure was followed as in sample 5, except that the pre- formed large particles were in randomly irregular shape, the size of the pre- formed particle was 10~45 mm. For the preparation of the paste, 8 grams of large particles was mixed with 4 grams of nano-slurry for which the solid loading was 57wt%.

15 EXAMPLE 8

The same procedure was followed as in sample 7, except that the size of the pre- formed particle was 10~75 mm.

EXAMPLE 9

The same procedure was followed as in sample 7, except that 5 grams of large
20 particles was mixed with 5 grams of nano-slurry for which the solid loading was 57wt% for the preparation.

EXAMPLE 10

The same procedure was followed as in sample 7, except that an acetylacetonone based ZrO_2 suspension was used for infiltration, which was obtained by attrition milling of ZrO_2 (with 8wt% Y_2O_3) powder in acetylacetonone for 64 hours.

- 5 The following examples relate to composite coating materials as herein before described:

EXAMPLE 11

$\gamma-Al_2O_3$ powder and sodium sulfate (Na_2SO_4) were mixed in acetone to form a slurry with a molar ratio (Al_2O_3/Na_2SO_4) of 1:6. Then the mixtures were heat-treated at
10 $1150^\circ C$ for 60 min, followed by washing with hydrochloric acid and water. Hexagonal $\alpha-Al_2O_3$ platelets of $\sim 8\mu m$ in diagonal distance and $\sim 2\mu m$ in thickness were obtained as a result.

Aluminum hydroxide was dissolved in phosphate acid at $150^\circ C$ with a molar ratio of 1:12 ($Al(OH)_3 / H_3PO_4$) to form a transparent liquid. This liquid was mixed (in a
15 weight ratio of 1:1) with aforementioned hexagonal $\alpha-Al_2O_3$ particles and applied to titanium alloy substrates using a spatula, followed by heat treatment at $150^\circ C$ for 5hrs first and then at $250^\circ C$ for 5hrs. As a result, $\alpha-Al_2O_3 / phosphates$ composite coatings were obtained.

EXAMPLE 12

20 The hexagonal $\alpha-Al_2O_3$ particles as in example i were mixed with a PSZ nano-slurry (as in original sample 5) to form a paste. The paste then was applied to titanium substrates using a spreading method aided by ultrasonic sound (i.e., an ultrasonic

probe was used to spread the paste evenly over the surface of the substrates), followed by heat treatment at 300°C to form a coating preforms.

The coating preforms were further infiltrated with the phosphate liquid as in sample 1, followed by heat treatment followed by heat treatment at 150°C for 5hrs first and then
5 at 250°C for 5hrs.

EXAMPLE 13

The same procedure was followed as in example i, except that hexagonal α - Al_2O_3 platelets were prepared using a molar ratio ($\text{Al}_2\text{O}_3/\text{Na}_2\text{SO}_4$) of 1:3.

EXAMPLE 14

10 The same procedure was followed as in example ii, except that hexagonal α - Al_2O_3 platelets were prepared using a molar ratio ($\text{Al}_2\text{O}_3/\text{Na}_2\text{SO}_4$) of 1:10.

EXAMPLE 15

The PSZ preformed particles were prepared using EPD method as in original sample 5. A paste was prepared by mechanically blending of 3 grams of platelike particles
15 with 3 grams of nano-slurry for which the solid loading is 52wt%. The paste was spread onto titanium substrates aided by ultrasound. After being dried at room temperature and heat-treated at 300°C. As a result coating preforms were obtained. The preforms were further subjected to infiltrating with the phosphate liquid under a pressure of 1 MPa and heat treatment at 150°C for 5hrs first and then at 250°C for
20 5hrs.

EXAMPLE 16

The same procedure was followed as in example v, except that the preformed particles were in randomly irregular shape, the size of the pre- formed particle was

10~45 mm. For the preparation of the paste, 8 grams of large particles was mixed with 4 grams of nano-slurry for which the solid loading was 57wt%.

It is of course to be understood that the present invention is described by way
5 of example only and is not intended to be restricted to the above examples and
embodiments.

CLAIMS

1. A green ceramic coating composition comprising nano-sized particles dispersed within a carrier medium together with pre-formed particles.
- 5 2. A coating composition according to claim 1, wherein the nano-sized particles are less than 200nm in size.
3. A coating composition according to claim 2, wherein the nano-sized particles are less than 100 nm in size.
4. A coating composition according to claim 3, wherein the nano-sized particles
10 have a particle size distribution in the range from 10nm to 100nm.
5. A coating composition according to any one of the preceding claim, wherein the carrier medium is selected from water or a polar organic carrier medium.
6. A coating composition according to any one of the preceding claims, wherein the pre-formed particles have a crystalline nano-structure
- 15 7. A coating composition according to any one of the preceding claim, wherein the pre-formed particles have a particle size ranging from 5 μ m to 300 μ m
8. A coating composition according to claim 7, wherein the pre-formed particles have a particle size ranging from 10 μ m to 150 μ m.

9. A coating composition according to any one of the preceding claims, wherein the pre-formed particles form a framework such that at least some of the pre-formed particles contact each other.
- 5 10. A coating composition according to any one of the preceding claim, wherein the pre-formed particles are prepared from a ceramic material selected from any of the following either alone or in combination oxides, borides, silicides, phosphates, sulfides of any of the following boron, aluminium, silicon, titanium, zirconium, hafnium, vanadium, niobium, tantalum, chromium, molybdenum, tungsten,
- 10 lanthanum, yttrium, iron, cobalt and nickel.
11. A method for producing a ceramic coating upon a substrate comprising the following steps: preparing a nano-suspension comprising nano-sized ceramic particles, preparing pre-formed particles, concentrating the nano-suspension to form a nano-slurry, mixing the preformed particles with the nano-slurry, applying the
- 15 aforesaid mixture to the substrate, and heat treating the system such that the aforesaid particles produce a ceramic coating.
12. A method according to claim 11, wherein the ratio of pre-formed particles to nano-sized particles is in a range from 1:5 to 1:1 on a dry weight basis.

13. A method according to claim 12, wherein the ratio of pre-formed particles to nano-sized particles is 2:5.
14. A method according to any of claims 11 to 13, wherein the nano-slurry has a solid loading of from 20 to 60 wt%.
15. A method according to any of claims 11 to 14 wherein the nano-slurry is in the form of a paste.
16. A method according to any of claims 11 to 15, wherein the paste comprises any of the following additional ingredients either alone or in combination: water, at least one polar dispersing medium and at least one polymeric surfactant.
17. A method according to claim 16, wherein the polymeric surfactant is selected from polymethacrylic acid (PMAA), poly-methacrylate (PMMA), polyvinyl alcohol and methyl cellulose.
18. A method according to claim 16 or claim 17, wherein the polymeric surfactant constitutes upto about 5% w/w.
19. A method according to any of claims 11 to 18, wherein the coating afforded has a thermal conductivity below 1.0 w/m°C.
20. A method according to any of claims 11 to 19, wherein the coating afforded comprises stable zirconia phases.

21. A method according to any of claims 11 to 20, wherein the green coating is heated at any temperature in the range from 300 to 1200°C.
22. A method according to any of claims 11 to 21, wherein following heat
5 treatment the ceramic coating is infiltrated with an infiltration suspension or slurry.
23. A method according to claim 22, wherein the infiltration process takes place in a pressure chamber at a pressure greater than 1MPa.
24. A method according to claim 22 or claim 23, wherein the infiltration suspension or slurry exclusively comprises nano-sized particles.
- 10 25. A method according to claim 22 or claim 23, wherein the infiltration suspension or slurry comprises a mixture of nano-particles and conventional fine powders.
26. A method according to any one of claims 11 to 25 wherein the infiltration media is selected from any of the following either alone or in combination: molten
15 metals, molten salts, metallic particles dispersed within a carrier medium, polymeric materials and inorganic binders.
27. A green composite coating material comprising pre-formed particles dispersed within a carrier medium together with an infiltration media and/or nano-sized particles.

28. A method for producing a composite coating upon a substrate comprising the steps of: preparing pre-formed particles, preparing an infiltration medium, mixing together said particles and said medium, optionally adding to the mixture a nano-
5 slurry or suspension, applying the aforesaid mixture to the substrate, and heat treating the system such that the aforesaid particles become sintered/set thus producing a composite coating.
29. A method of infiltrating a composite coating comprising the steps of: preparing a substrate having a composite coating as referred to in claim 2, applying to
10 the said coating an infiltration medium and/or nano-suspension/slurry, and heat treating the aforesaid infiltrated coating.
30. A method according to any of claims 22 to 29, wherein the infiltration media has a solid loading in the range from 5 to 80wt%.
31. A method according to any one of claims 22 to 30, wherein following
15 infiltration the coating is dried and heat treated at a temperature in the range from 300 to 1200°C.
32. According to a further aspect of the present invention there is provided a method for producing a ceramic/metal composite coating upon a substrate comprising the steps of: preparing pre-formed particles, preparing a nano-slurry, mixing together

said particles and said slurry, applying the aforesaid mixture to the substrate, and heat treating the system to produce a partially sintered ceramic porous coating; filling the pores and voids in aforesaid ceramic porous coating by employing electrochemical plating and/or electroless deposition with metallic materials, thus forming a ceramic/metal composite coating.

33. A method according to claim 32, wherein the metallic materials are selected from any of the following either alone or in combination: a pure metal such as iron, cobalt, nickel, molybdenum, tungsten, lanthanum, uttrium, vanadium, mobium, tantalum, chromium, boron, aluminium, silicone, titanium, zirconium, hafnium or an alloy thereof.

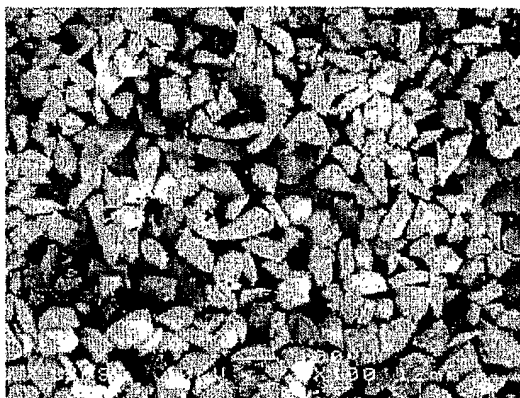


FIG. 1

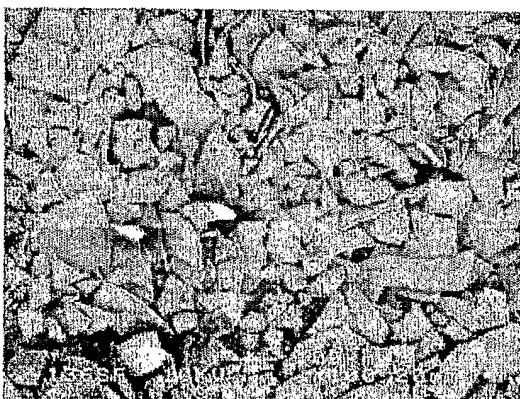


FIG. 2

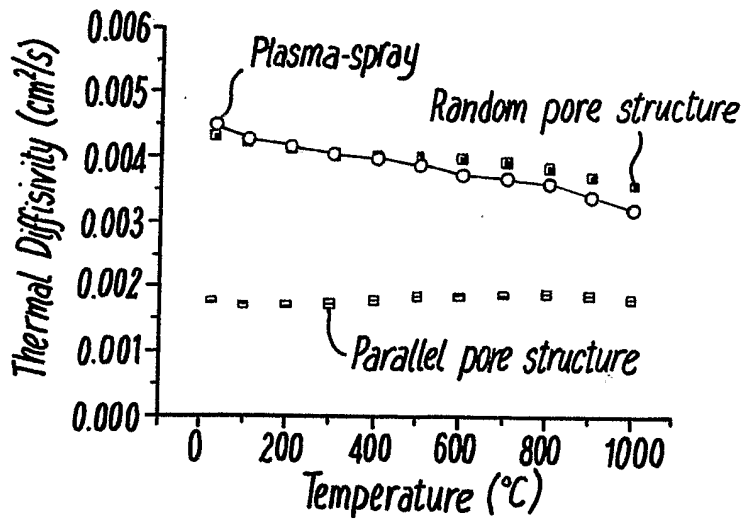


FIG. 3

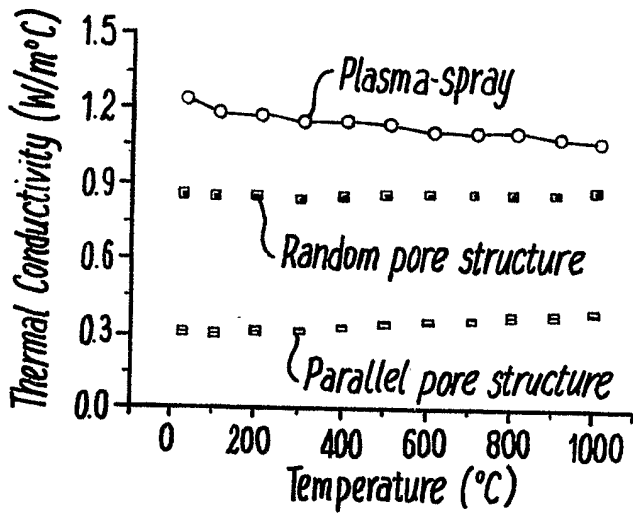


FIG. 4

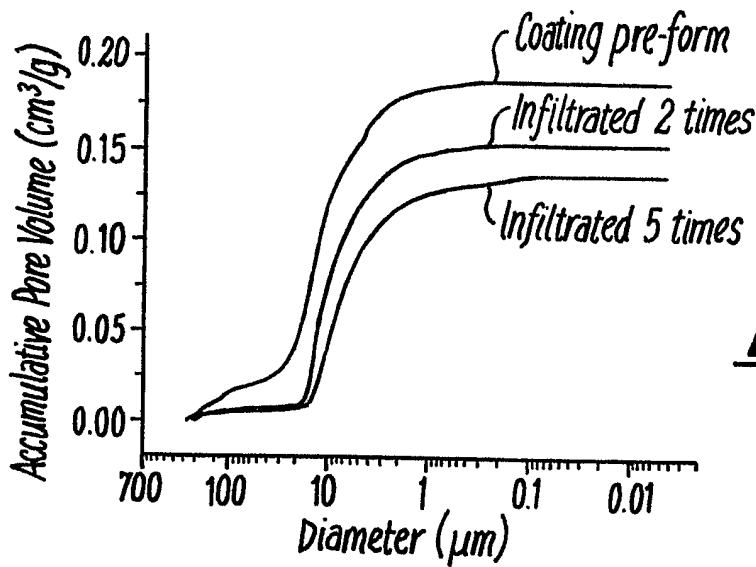


FIG. 5

INTERNATIONAL SEARCH REPORT

International Application No

.../GB2005/000224

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C23C24/08 C23C26/00 C23C30/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C23C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, CHEM ABS Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 198 00 310 A1 (BAYER AG, 51373 LEVERKUSEN, DE) 8 July 1999 (1999-07-08) page 4, line 57 - page 5, line 50; claims 1,10,11	1-31
X	US 2002/045010 A1 (ROHRBAUGH ROBERT HENRY ET AL) 18 April 2002 (2002-04-18) abstract claims 1,6,7,10,11,14,20	1-31
X	DE 199 39 686 A1 (DECHEMA GESELLSCHAFT FUER CHEMISCHE TECHNIK UND BIOTECHNOLOGIE EV) 22 February 2001 (2001-02-22) page 1, column 1, line 1 - line 7 page 1, column 1, line 67 - column 2; claims 1,3-5,8-10	1-31
	----- -/--	

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the International filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

12 April 2005

Date of mailing of the international search report

27/04/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Elsen, D

INTERNATIONAL SEARCH REPORT

International Application No
/GB2005/000224

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2003/003237 A1 (SEABAUGH MATTHEW M ET AL) 2 January 2003 (2003-01-02) page 4, line 23; claims 7,11,15,21-23,28 -----	1-31
X	US 6 007 926 A (PROVENZANO ET AL) 28 December 1999 (1999-12-28) column 2, line 18 - column 4, line 20; claims 1,4; examples 1,2 -----	1-31
X	DATABASE WPI Section Ch, Week 200346 Derwent Publications Ltd., London, GB; Class D15, AN 2003-483253 XP002324165 & CN 1 405 122 A (ZHANG Y) 26 March 2003 (2003-03-26) abstract -----	1-31
X	US 2003/077398 A1 (STRUTT PETER R ET AL) 24 April 2003 (2003-04-24) page 3, paragraph 35; claims 1,4-6 -----	1-31
X	WO 03/025258 A (TECHNISCHE UNIVERSITAET ILMENAU; KERN, HEINRICH; KRUEGER, HORST, GUENT) 27 March 2003 (2003-03-27) claims 1-3 abstract -----	32,33
X	WO 02/086194 A (ITN-NANOVATION GMBH; NONNINGER, RALPH; BINKLE, OLAF) 31 October 2002 (2002-10-31) page 2 - page 11; claims 1,5,7-12 -----	1-31

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

/GB2005/000224

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 19800310	A1	08-07-1999	WO 9935105 A1 15-07-1999
			EP 1044178 A1 18-10-2000
			JP 2002500157 T 08-01-2002
			TW 562787 B 21-11-2003
US 2002045010	A1	18-04-2002	WO 0196516 A1 20-12-2001
			US 2002028288 A1 07-03-2002
			BR 0116842 A 16-12-2003
			BR 0116846 A 25-02-2004
			CA 2431776 A1 12-09-2002
			CA 2431780 A1 26-09-2002
			CA 2431925 A1 08-08-2002
			CA 2446208 A1 12-12-2002
			EP 1355992 A1 29-10-2003
			EP 1360244 A2 12-11-2003
			EP 1355995 A2 29-10-2003
			EP 1395521 A1 10-03-2004
			JP 2004518786 T 24-06-2004
			JP 2004519373 T 02-07-2004
			JP 2004519545 T 02-07-2004
			JP 2004532729 T 28-10-2004
			MX PA03006828 A 13-11-2003
			MX PA03006829 A 13-11-2003
			MX PA03006830 A 13-11-2003
			MX PA03011177 A 27-02-2004
			WO 02070612 A1 12-09-2002
			WO 02074448 A2 26-09-2002
			WO 02060998 A2 08-08-2002
			WO 02098798 A1 12-12-2002
			US 2002172773 A1 21-11-2002
			US 2004034157 A1 19-02-2004
			US 2004170822 A1 02-09-2004
			US 2002102359 A1 01-08-2002
			US 2002144712 A1 10-10-2002
			AU 5487900 A 24-12-2001
			AU 6840301 A 24-12-2001
			AU 6840401 A 24-12-2001
			BR 0111623 A 06-05-2003
			BR 0111681 A 07-10-2003
			CA 2410362 A1 20-12-2001
CA 2410600 A1 20-12-2001			
CA 2411028 A1 20-12-2001			
CN 1436104 A 13-08-2003			
CN 1439041 A 27-08-2003			
CZ 20024049 A3 16-04-2003			
CZ 20024050 A3 13-08-2003			
EP 1290126 A1 12-03-2003			
EP 1299481 A2 09-04-2003			
EP 1290123 A2 12-03-2003			
JP 2004503662 T 05-02-2004			
JP 2004504925 T 19-02-2004			
JP 2004503370 T 05-02-2004			
MX PA02012432 A 25-04-2003			
MX PA02012433 A 25-04-2003			
WO 0196511 A2 20-12-2001			
DE 19939686	A1	22-02-2001	NONE

NATIONAL SEARCH REPORT

Information on patent family members

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2003003237	A1	02-01-2003	CA 2451342 A1	16-01-2003
			EP 1414557 A1	06-05-2004
			WO 03004140 A1	16-01-2003
			US 2005026017 A1	03-02-2005

US 6007926	A	28-12-1999	NONE	

CN 1405122	A	26-03-2003	NONE	

US 2003077398	A1	24-04-2003	US 6025034 A	15-02-2000
			US 6447848 B1	10-09-2002
			US 2001004473 A1	21-06-2001
			US 2002031658 A1	14-03-2002
			CA 2237588 A1	22-05-1997
			CN 1175984 A	11-03-1998
			EP 0866885 A1	30-09-1998
			RU 2196846 C2	20-01-2003
WO 9718341 A1	22-05-1997			

WO 03025258	A	27-03-2003	DE 10240291 A1	24-04-2003
			WO 03025258 A1	27-03-2003
			EP 1432851 A1	30-06-2004

WO 02086194	A	31-10-2002	DE 10119538 A1	24-10-2002
			CN 1503767 A	09-06-2004
			WO 02086194 A2	31-10-2002
			EP 1383940 A2	28-01-2004
			JP 2004530045 T	30-09-2004
			US 2004115416 A1	17-06-2004
