



INTERNATIONAL APPLICATION PUBLISHED UNDER

WO 9608283A1

(51) International Patent Classification ⁶ :	A1	(11) International Publication Number:	WO 96/08283
A61M 5/34, 5/50		(43) International Publication Date:	21 March 1996 (21.03.96)

(21) International Application Number: PCT/AU95/00604

(22) International Filing Date: 14 September 1995 (14.09.95)

(30) Priority Data:
PM 8294 16 September 1994 (16.09.94) AU

(71) Applicant (for all designated States except US): EASTLAND TECHNOLOGY AUSTRALIA PTY. LTD. [AU/AU]; West Point Centre, Unit 105, 396 Scarborough Beach Road, Osborne Park, W.A. 6017 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): WHISSON, Maxwell, Edmund [AU/AU]; 15 Loftus Street, Nedlands, W.A. 6009 (AU).


(74) Agents: HARWOOD, Errol, John et al.; Wray & Associates, Primary Industry House, 239 Adelaide Terrace, Perth, W.A. 6000 (AU).

(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).

Published

With international search report.

(54) Title: INJECTION MEANS

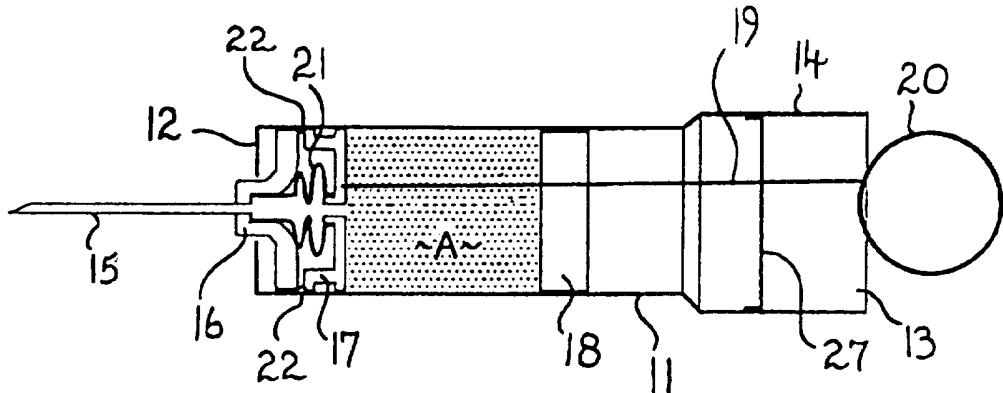

(57) Abstract

An injection device comprising a hollow body (11) having a forward end (12) and a rearward end (13), the forward end (12) slidably receiving a hollow needle (15), the body (11) providing a chamber (A) between its forward end (12) and its rearward end (13), the chamber being defined between a plug (17) and a stop (18), the plug (17) being sealingly and slidably received within the body (11) adjacent the forward end (12), the stop (18) being sealingly and slidably received within the body (11) rearward of the plug (17) wherein a greater degree of effort must be applied to the stop (18) than to the plug (17) to effect slidable movement within the body, the rearward end (13) of the body having a portion (14) in which the stop (18) is not sealingly received within the body, a drive element (19) connected at one end to the plug (17) and slidably and sealingly received through the stop (18) to extend from the rearward end (13) of the body (11), a manipulation means (20) provided on the other end of the drive element (19), the hollow interior of said needle (15) being connected to the chamber (A) through a flexible passageway (21) extending between the inner end of the needle (15) and the plug (17), said needle (15) being connected to the plug (17) or stop (18) by a tensioning means (21), a means (22) between the needle (15) and body (11) adapted to retain the needle (15) at a first position which extends from the body (11) and said means (22) being adapted to be able to release the needle (15) to allow the needle to move to a second position at which it is accommodated within the body, the movement between the first and second position being effected by the tensioning means (22).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

“INJECTION MEANS”

THIS INVENTION relates to an injection device and in particular relates to a device in the form of a syringe which can be utilised for the injection of a 5 parenteral agent into the body.

The present invention comprises a development beyond the device disclosed in International patent application PCT/AU93/00175 and International patent application PCT/AU94/00618, the contents of each of which are included herein 10 by reference. Each of those disclosures relate to injection devices which can be utilised in the injection of a parenteral agent into the body whereby on completion of the injection, the device is rendered unusable. It is a characteristic of each of these devices, however, that during the injection of the parenteral agent the needle is moved rearwardly within the body of the syringe, and as a 15 result of that movement, the tip of the needle is caused to move outwardly from tissue within which it may be located. While this arrangement may be satisfactory in a large number of applications, there are instances in which it is necessary to deposit the parenteral agent deeply within the tissue and/or where retraction of the needle within the body during the injection process is 20 undesirable.

It is an object of this invention to provide an injection device which is capable of being rendered unusable on completion of its use, but which is arranged such that the needle can remain substantially generally stationery within the tissue 25 during the injection step.

In one form, the invention resides in an injection device comprising a hollow body, having a forward end and a rearward end, the forward end slidably receiving a hollow needle, the body providing a chamber between its forward 30 end and its rearward end, the chamber being defined between a plug and a stop, the plug being sealingly and slidably received within the body adjacent the forward end, the stop being slidably and sealingly received within the body

rearward of the plug wherein a greater degree of effort must be applied to the stop than to the plug to effect slidable movement within the body, the rearward end of the body having a portion in which the stop is not sealingly received in the body, a drive element connected at one end to the plug member and slidably 5 and sealingly received through the stop member to extend from the rearward end of the body, a manipulation means provided on the other end of the drive element, the hollow interior of said needle being connected to the chamber through a flexible passageway extending between the inner end of the needle and the plug, said needle being connected to the plug or stop by a tensioning 10 means, a means between the needle and body adapted to retain the needle at a first position at which it extends from the body and said means being adapted to be able to release the needle to allow the needle to move to a second position at which it is accommodated within the body, the movement between the first and second position being effected by the tensioning means.

15

According to a preferred feature of the invention, the drive element is flexible. It is a preferred characteristic of the drive element that the manipulation means cannot be used to push the stop or the plug towards the forward end of the body. The manipulation means may comprise a slider which is slidably 20 supported in the rearward end of the body or alternatively may take the form of a ring or tab or like means which can be grasped and pulled to effect movement of the plug.

According to a further preferred feature of the invention, the rearmost end of the 25 body is configured such that movement of the stop and plug into the rearward end is irreversible.

According to a preferred feature of the invention, the tensioning means comprises a flexible tube which also forms the passageway. The tube may be 30 formed of a suitable resiliently extendable material and/or a resiliently extendable element may be incorporated into or around the tube. According to further form, the tube may be formed of a rigid material such as metal or a

- 3 -

suitable plastics material which is also resilient and where the tube is formed as a spring. The spring may be of the coiled form or may be of a form which in its relaxed state has the shape of a spiral and which when stretched has the shape of a cone.

5

According to a further preferred feature of the invention, the means comprises a frictional engagement between the inner end of the needle and the body whereby the means will release the needle on the tensioning means providing a predetermined force to the needle. The needle can be supported from a boss or

10 like member which is slidably received by the internal wall of the body.

According to a further alternative feature of the invention the means may comprise a latch or like engagement means which can positively engage the needle or its support when in the first position, where the means can be

15 disengaged from the needle to permit it to move to the second position.

The invention will be more fully understood in the light of the following description of one specific embodiment. The description is made with reference to the accompanying drawings of which;

20

Figure 1 is a schematic sectional elevation of the embodiment prior to injection;

25

Figure 2 is a schematic sectional elevation of the embodiment at the completion of injection;

Figure 3 is a sectional elevation of the embodiment illustrating retraction of the needle at an intermediate position; and

30

Figure 4 is a sectional elevation of the invention embodiment illustrating the needle in the fully retracted position.

- 4 -

The embodiment comprises an injection device of the form disclosed in PCT/AU93/00175 and PCT/AU94/00618 and which comprises a syringe having substantially hollow cylindrical body 11 having a forward end 12 and a rearward end 13. The rearward portion 14 of the embodiment adjacent the rear end 13 is 5 formed with an increased diameter. The body 11 supports a hollow needle 15 which is supported from a boss element 16 which is slidably received within the body 11.

The body 11 provides a chamber A which is defined between a plug member 17 10 and a stop member 18 which are each slidably and sealingly received within the body 11. The slidable engagement of the stop member 18 and plug member 17 is such that a greater degree of force is required to effect slidable movement of the stop member 18 within the body than to effect slidable movement of the plug member 17 within the body.

15

The plug member 17 is connected to a drive element in the form of an elongate flexible element 19 that may take the form of a thread or wire or the like, and which is fixed at one end to the plug 17. The flexible element 19 is slidably and sealingly received through the stop member 18 and is provided at its free end 20 with a manipulation means 20 which can take the form of a ring as shown, or a tab, or a slider which is slidably supported by the rearward end portion of the body as disclosed in PCT/AU94/00618.

The interior of the hollow needle 15 is connected to the chamber A through a 25 flexible tube 21 which extends between the boss 16 and the plug 17. The flexible tube is also formed to be resiliently extensible.

The boss 16 is frictionally engaged with the interior walls of the body 11 such that when the needle 15 is in its extended position, an increased amount of force 30 is required to displace the boss 16 from that position, and whereby on being displaced from the position the boss 16 will move relatively freely within the body 11. The increased frictional engagement is effected by the provision of a

- 5 -

protrusion 22 on the inner surface of the body 11 at its forward end which is engaged by the boss 16 when the needle 15 is in its extended position. As an alternative the boss 16 may be frictionally engaged with the opening provided in the forward end 12 in a manner which will enable the needle 15 to be released

5 on a sufficient force being applied by the tensioning means. In such an instance the boss 16 will need to be provided with a stabilising means which will support the boss 16 to enable it to remain substantially central as it moves rearwardly through the body towards the rearward end.

10 The boss 16 is not sealingly engaged with the internal wall of the body 11 in order to permit the escape of air from between the boss 16 and the plug 17 as the boss 16 moves towards the plug 18 under the influence of the tensioning means.

15 The rearward portion of the body 11 is provided with a barrier means 27 which prevents the plug 17 being pulled from the body 11.

The embodiment takes the form of a prefilled syringe in which the needle occupies the first position at which it is extended as shown at figure 1, and

20 where the parenteral agent is accommodated within the chamber A between the plug member 17 and the stop member 18. In utilisation of the syringe, the needle 15 is located in the tissue of the patient and by pulling on the manipulation means 20, the plug 17 is moved rearwardly within the body 11 towards the stop 18. Because of the differential frictional engagement between the plug member 25 17 and the walls of the body 11 as compared with the frictional engagement of the stop member 18 with the walls of the body 11, as the plug 17 is moved towards the stop 18, the latter remains in position, causing the chamber A to reduce in volume. As a result the parenteral agent is ejected from the chamber A through the flexible tube 21 into the hollow needle 15 and then into the tissue 30 in which the needle 15 is located.

- 6 -

As the plug member 17 is displaced, the flexible tube 21 is caused to become resiliently elongated and is tensioned. This tension increases as the plug member 17 moves towards the stop member 18. As the plug member 17 approaches the stop member 18, the force applied to the boss element 16 by 5 the tensioned flexible tube 21 becomes sufficient to overcome the frictional engagement forces retaining the boss element 16 in its forwardmost position. Once the boss element 16 becomes disengaged from its forwardmost position it is pulled towards the plug 17 under the influence of the tensioned flexible tube 21 until it is closely adjacent the stop 18. At that position the needle is fully 10 retracted to lie within the body as shown at Figure 4.

On completion of the movement of the plug 17 towards the stop 18 the plug 17 will become engaged with the stop 18. Further retraction by the manipulation means will cause the stop 18 to enter the enlarged rearward portion 14 of the 15 body 11 at which position the stop will become sealingly disengaged from the walls of the chamber A. As shown at Figure 5, the rearward portion 14 may be dimensioned such that the plug 17, and possibly the boss 16, may also be drawn into the rearward portion 14, where the plug 17 will become sealingly disengaged from the walls of the body 11.

20

If desired the rearward portion of the body may be formed of a differing cross-section from the forwardmost portion or with a groove or slot in order that the sealing engagement of the stop with the internal wall of the body is broken and that the chamber A ceases to be a sealed chamber.

25

It should be appreciated that the scope of the present invention not be limited to the particular scope of the embodiment described above.

THE CLAIMS defining the invention are as follows:

1. An injection device comprising a hollow body having a forward end and a rearward end, the forward end slidably receiving a hollow needle, the body providing a chamber between its forward end and its rearward end, the chamber being defined between a plug and a stop, the plug being sealingly and slidably received within the body adjacent the forward end, the stop being slidably and sealingly received within the body rearward of the plug, wherein a greater degree of effort must be applied to the stop than to the plug to effect slidable movement within the body, the rearward end of the body having a portion in which the stop is not sealingly received within the body, a drive element connected at one end to the plug and slidably and sealingly received through the stop to extend from the rearward end of the body, a manipulation means provided on the other end of the drive element, the hollow interior of said needle being connected to the chamber through a flexible passageway extending between the inner end of the needle and the plug, said needle being connected to the plug or stop by a tensioning means, a means between the needle and body adapted to retain the needle at a first position at which it extends from the body and said means being adapted to be able to release the needle to allow the needle to move to a second position at which it is accommodated within the body, the movement between the first and second position being effected by the tensioning means.
2. An injection device as claimed at claim 1 wherein the drive element is flexible.
3. A injection device as claimed at claim 2 wherein the manipulation means comprises a tab or ring.
4. An injection device as claimed at claim 2 wherein the manipulation means comprises a slider slidably supported in the rearward portion of the body.

- 8 -

5. An injection device as claimed at anyone of the preceding claims wherein the drive means comprises a filament.
6. An injection device as claimed at anyone of the preceding claims wherein the rearmost end of the body is configured such that with movement of the plug 5 into the rearward end portion, the stop is also capable of movement into the rearward portion.
7. An injection device as claimed at claim 6 wherein the internal face of the body is configured such that movement of the plug and/or stop into the rearward portion is irreversible.
- 10 8. An injection device as claimed at anyone of the preceding claims wherein the means comprises a frictional engagement between the needle and the body whereby the needle will become disengaged from said frictional engagement on the tensioning means providing a predetermined force to the needle.
9. An injection device as claimed at claim 8 wherein the inner end of the 15 needle is supported from the body by a support member which is frictionally engaged with the body.
10. An injection device as claimed at anyone of the preceding claims wherein the means comprises a latch which can positively engage the needle when in the first position and whereby the latch can be disengaged from the needle to 20 permit the needle to move to the second position under the influence of the tensioning means.
11. An injection device as claimed at anyone of the preceding claims wherein the tensioning means comprises flexible tube which also forms the passageway.


- 9 -

12. An injection device as claimed at claim 11 wherein the tube is formed of a resiliently extendable material.


13. An injection device as claimed at claim 11 or 12 wherein the flexible tube comprises a tubular member having a resiliently extendible member incorporated
5 into or around the walls of the tube.

14. An injection device as claimed at claim 11 wherein the tube is formed of a rigid material which is resilient and which has the form of a coiled or spiral spring.


15. An injection device as substantially herein described with reference to the
10 accompanying drawings.

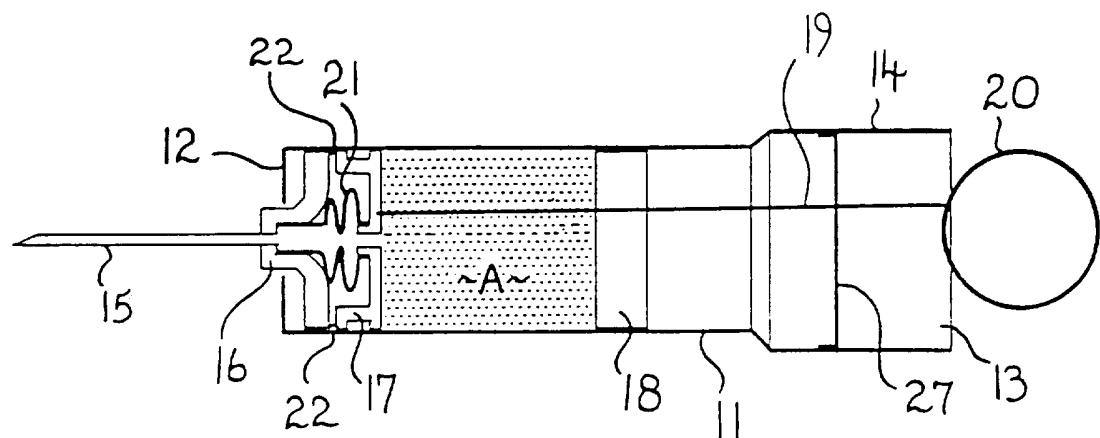

—Fig. 1.

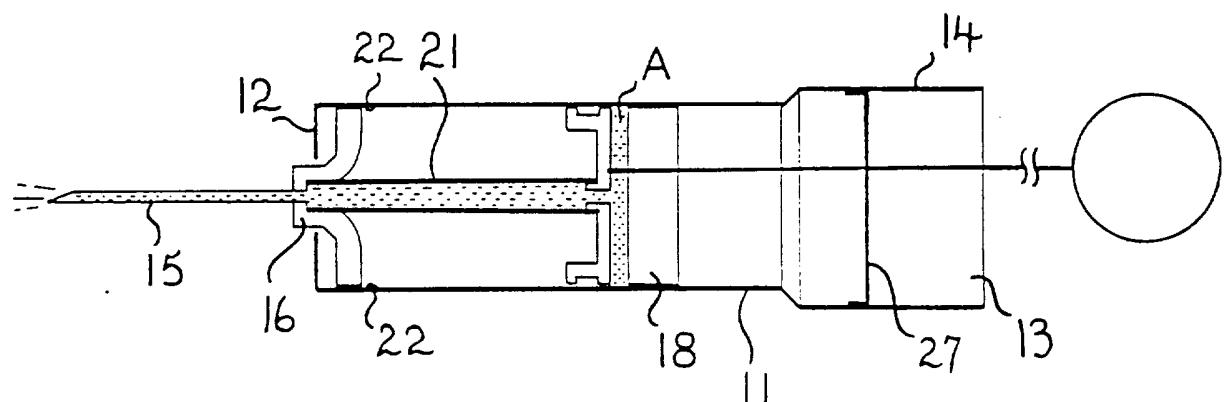

—Fig. 2.

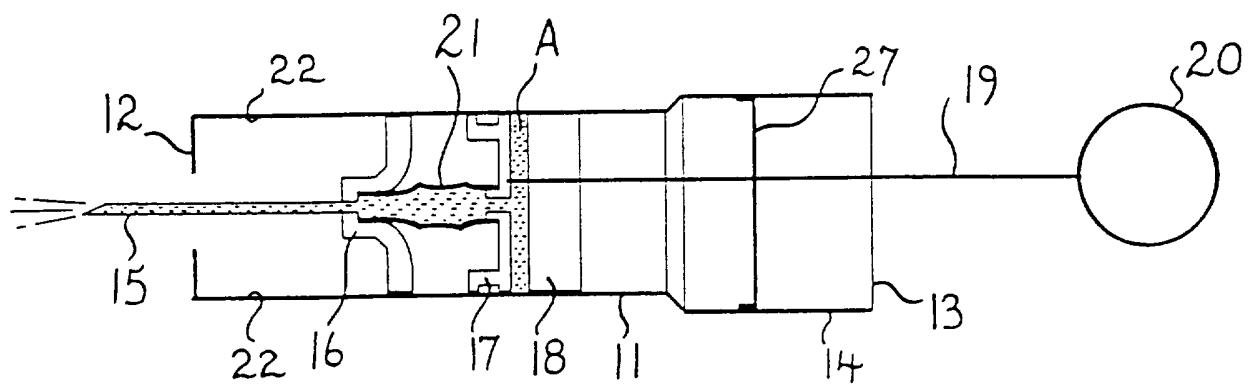

—Fig. 3.

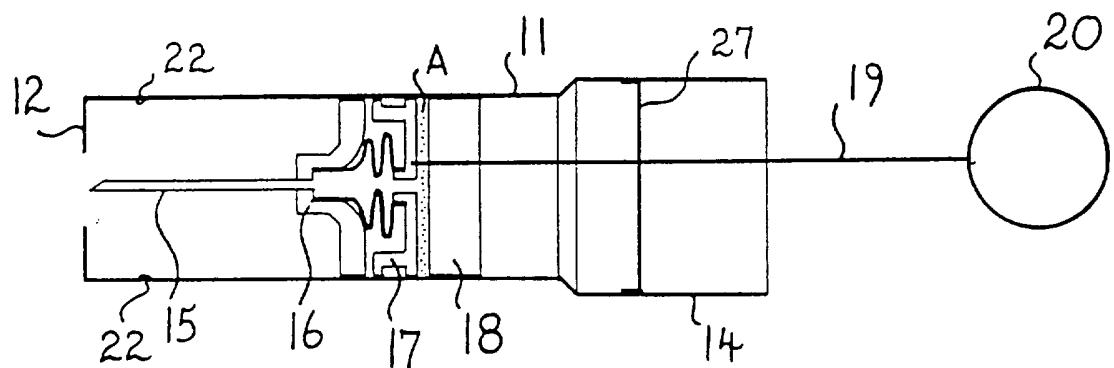


Fig. 4.

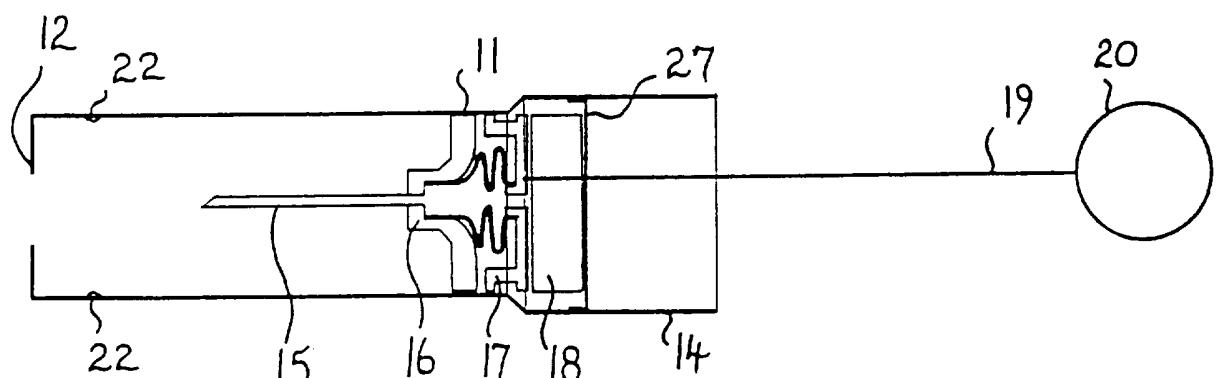


Fig. 5.

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/AU 95/00604

A. CLASSIFICATION OF SUBJECT MATTER

Int Cl⁶: A61M 5/34; A61M 5/50

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC A61M 5/34; A61M 5/50

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

AU: IPC as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

DERWENT: (needle # or syringe # or inject:) and (retract: or withdraw) and (flex: or resilient)

JAPIO: as above

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 93/20872 A (WHISSON) 20 October 1993 See entire document	1-15
A	US 5120310 A (SHAW) 9 June 1992 See entire document	1-15
A	US 4908022 A (HABER) 13 March 1990 See entire document	1-15



Further documents are listed in the continuation of Box C



See patent family annex

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier document but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search	Date of mailing of the international search report
18 December 1995	29 December 1995

Name and mailing address of the ISA/AU AUSTRALIAN INDUSTRIAL PROPERTY ORGANISATION PO BOX 200 WODEN ACT 2606 AUSTRALIA Facsimile No.: (06) 285 3929	Authorized officer <i>O. Melnichuk</i> for LARS KOCH Telephone No.: (06) 283 2551
---	---

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/AU 95/00604

C (Continuation)**DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 326983 A (VABIN INTERNATIONAL SRL) 9 August 1989 See entire document	1-15

INTERNATIONAL SEARCH REPORT

International Application No.

Information on patent family members**PCT/AU 95/00604**

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member					
EP	326983	BR	8900503	CN	1038218	IT	1226664
		JP	2005972	US	4955869	ZA	8900787
US	4908022						
US	5120310	AU	17910/92	EP	578758	MX	9201493
		WO	9217222	US	5188613	US	5267961
WO	9320872	AU	40371/93	EP	637256		

END OF ANNEX